

Electronic Tongue for Quantitation of Contaminants in Water

The main advantage is ruggedness.

NASA's Jet Propulsion Laboratory, Pasadena, California

An assembly of sensors, denoted an electronic tongue, is undergoing development as a prototype of compact devices for use in measuring concentrations of contaminants in water. Thus far, the electronic tongue has been tested on ions of Cu, Zn, Pb, and Fe and shown to respond to concentrations as low as about 10 parts per million. This electronic tongue is expected to be ca-

pable of measuring concentrations of other metal ions and organic compounds. Potential uses for electronic tongues include monitoring the chemical quality of water in a variety of natural, industrial, and laboratory settings; detecting micro-organisms indirectly by measuring microbially influenced corrosion; and characterizing compounds of interest to the pharmaceutical and

food industries.

This version of the electronic tongue includes a heater, a temperature sensor, an array of ion-specific electrodes, an oxidation/reduction sensor pair, an electrical-conductivity sensor, and an array of galvanic cells, all on one compact ceramic substrate (see figure). Special-purpose electronic excitation and readout circuitry for the sensors has also been constructed.

The main advantage of the electronic tongue, relative to electrodes of this type used traditionally to assess water quality, is extreme ruggedness.

The types of measurements that can be performed by use of the sensors on the electronic tongue are quite varied. The best combination of types of measurements for a given application depends on the specific contaminants that one seeks to detect. Experimental studies to identify such combinations were in progress at the time of reporting the information for this article.

This work was done by Marlin Buehler and Gregory Kuhlman of Caltech for NASA's Jet Propulsion Laboratory. Further information is contained in a TSP (see page 1).


In accordance with Public Law 96-517, the contractor has elected to retain title to this invention. Inquiries concerning rights for its commercial use should be addressed to:

*Innovative Technology Assets Management
JPL*

*Mail Stop 202-233
4800 Oak Grove Drive
Pasadena, CA 91109-8099
(818) 354-2240*

E-mail: iaoffice@jpl.nasa.gov

Refer to NPO-30601, volume and number of this NASA Tech Briefs issue, and the page number.

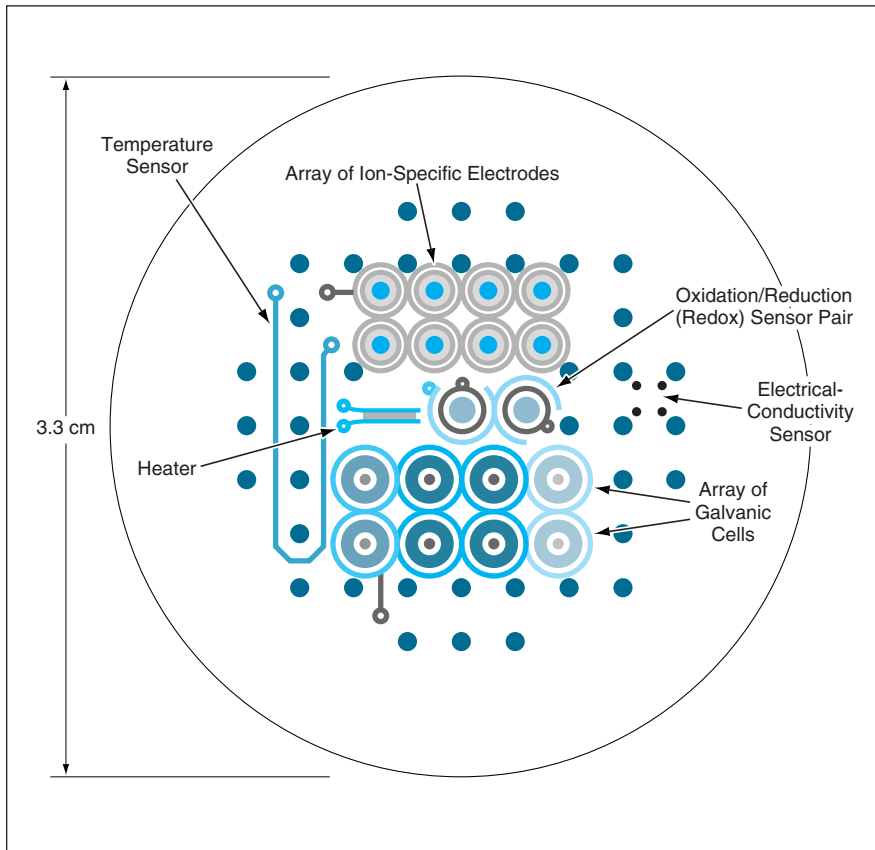

A Heater and Sensors of Five Different Types are all mounted together on a compact ceramic substrate.

Radar for Measuring Soil Moisture Under Vegetation

Polarimetric data would be acquired at two frequencies.

NASA's Jet Propulsion Laboratory, Pasadena, California

A two-frequency, polarimetric, spaceborne synthetic-aperture radar (SAR) system has been proposed for measuring the moisture content of soil as a function of depth, even in the presence of overlying vegetation. These measurements are needed because data on soil moisture

under vegetation canopies are not available now and are necessary for completing mathematical models of global energy and water balance with major implications for global variations in weather and climate.

The two proposed frequencies (137 and 435 MHz) are low relative to frequencies

ordinarily used in radar systems. One reason for choosing these frequencies is that they are low enough to enable penetration of vegetation and of soil to the required depths. Another reason for choosing these frequencies, in conjunction with polarimetry, is that prior research has shown