



US008196858B1

(12) **United States Patent**
Croom et al.

(10) **Patent No.:** **US 8,196,858 B1**
(45) **Date of Patent:** **Jun. 12, 2012**

(54) **AIRCRAFT CONFIGURED FOR FLIGHT IN AN ATMOSPHERE HAVING LOW DENSITY**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(75) Inventors: **Mark A. Croom**, Yorktown, VA (US);
Stephen C. Smith, Cupertino, CA (US);
Paul A. Gelhausen, Yorktown, VA (US);
Mark D. Gynn, Yorktown, VA (US);
Craig A. Hunter, Williamsburg, VA
(US); **David A. Paddock**, Toano, VA
(US); **Steven E. Riddick**, Hampton, VA
(US); **John E. Teter, Jr.**, Hampton, VA
(US)

(73) Assignee: **The United States of America as
represented by the Administrator of
the National Aeronautics and Space
Administration**, Washington, DC (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 341 days.

(21) Appl. No.: **12/721,833**

(22) Filed: **Mar. 11, 2010**

(51) **Int. Cl.**
B64C 39/12 (2006.01)

(52) **U.S. Cl.** **244/45 R**; 244/63; 244/1 R

(58) **Field of Classification Search** 244/63,
244/218, 49, 45, 1 R, 129.1, 117 R, 158 R,
244/173

See application file for complete search history.

3,197,158	A	7/1965	Rogalo	
3,386,687	A	6/1968	Rollins	
3,463,420	A	8/1969	Butler et al.	
4,090,684	A	5/1978	Look et al.	
4,161,301	A *	7/1979	Beardsley et al.	244/137.3
4,742,976	A *	5/1988	Cohen	244/58
4,869,442	A *	9/1989	Miller	244/3.28
5,820,074	A *	10/1998	Trommer et al.	244/58
6,322,021	B1 *	11/2001	Fisher et al.	244/49
6,948,686	B2 *	9/2005	Holemans	244/158.1
7,090,166	B2 *	8/2006	Dennis et al.	244/63
7,104,495	B2 *	9/2006	McGeer	244/1 R
7,140,575	B2 *	11/2006	McGeer et al.	244/63
2003/0168556	A1 *	9/2003	Lee	244/218
2005/0151009	A1 *	7/2005	Roeseler et al.	244/63

* cited by examiner

Primary Examiner — Michael Carone


Assistant Examiner — Medhat Badawi

(74) *Attorney, Agent, or Firm* — Helen M. Galus

(57) **ABSTRACT**

An aircraft is configured for flight in an atmosphere having a low density. The aircraft includes a fuselage, a pair of wings, and a rear stabilizer. The pair of wings extends from the fuselage in opposition to one another. The rear stabilizer extends from the fuselage in spaced relationship to the pair of wings. The fuselage, the wings, and the rear stabilizer each present an upper surface opposing a lower surface. The upper and lower surfaces have X, Y, and Z coordinates that are configured for flight in an atmosphere having low density.

19 Claims, 30 Drawing Sheets

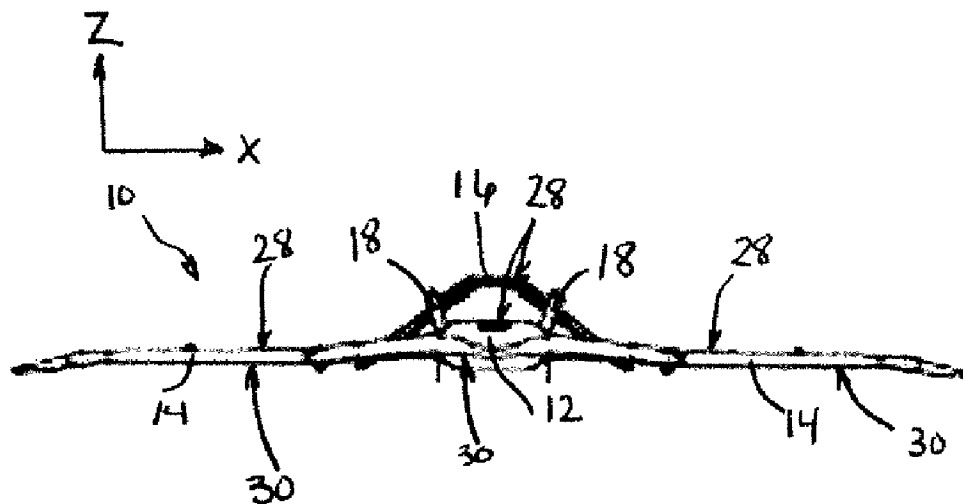

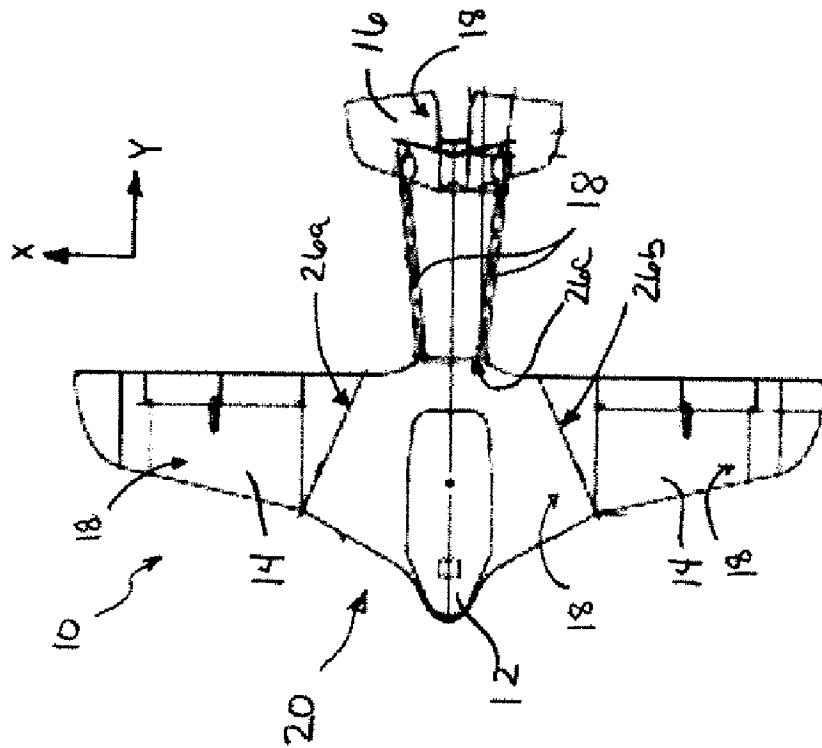


FIG - 1A

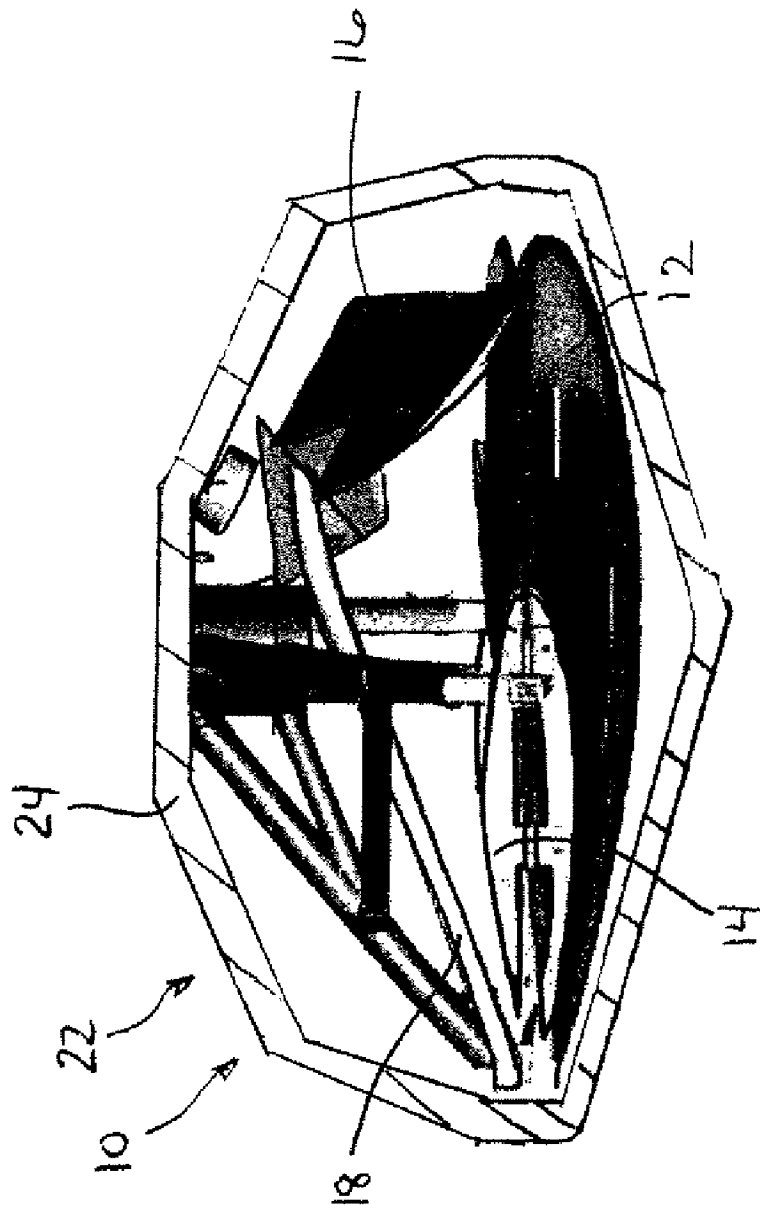
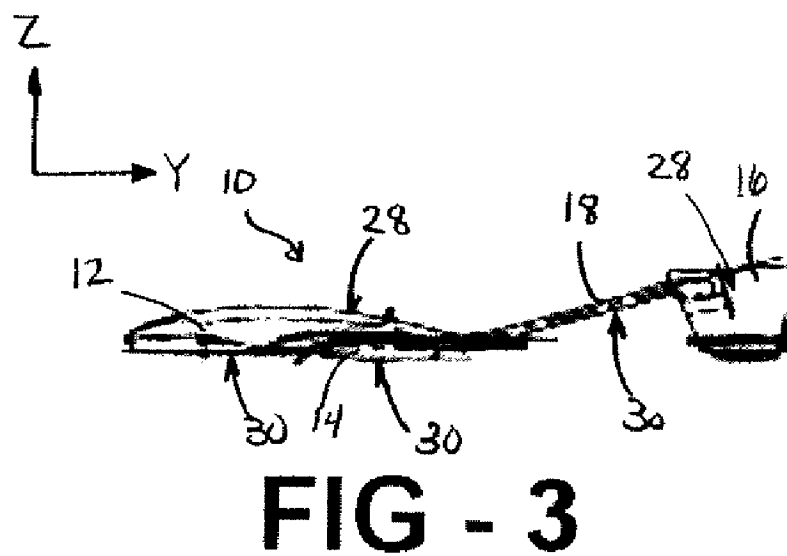
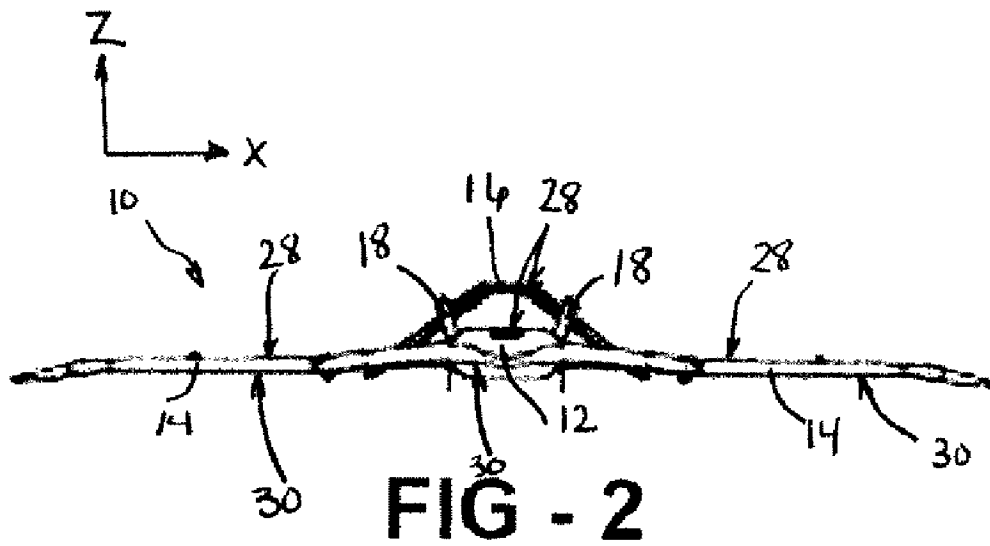
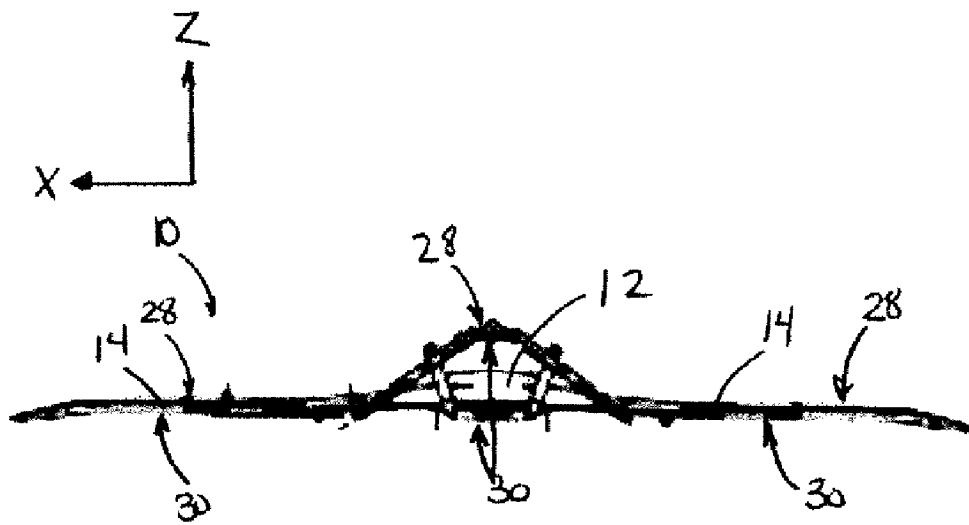
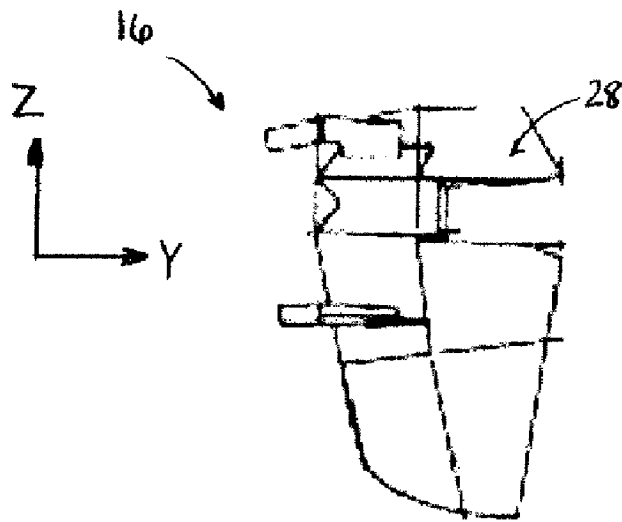


FIG - 1B



**FIG - 4****FIG - 5**

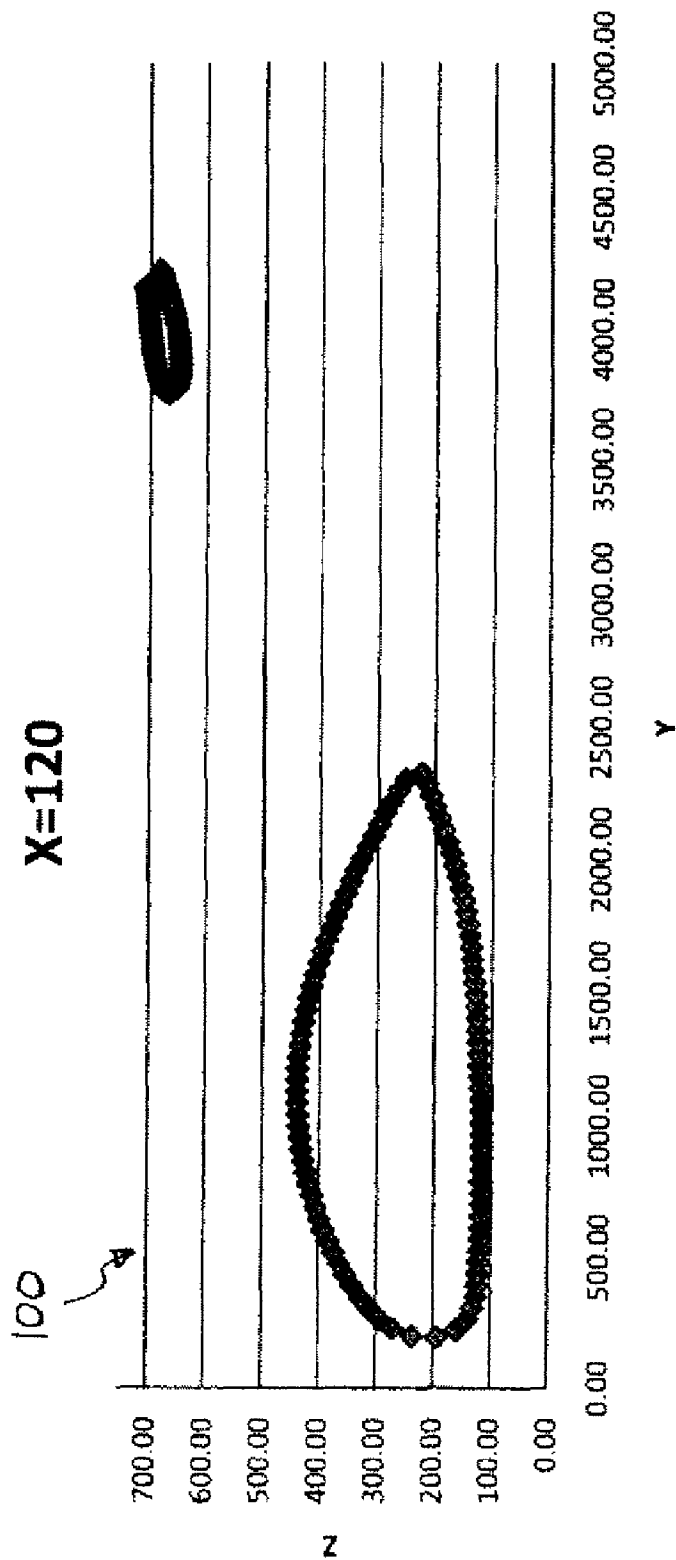


FIG - 6

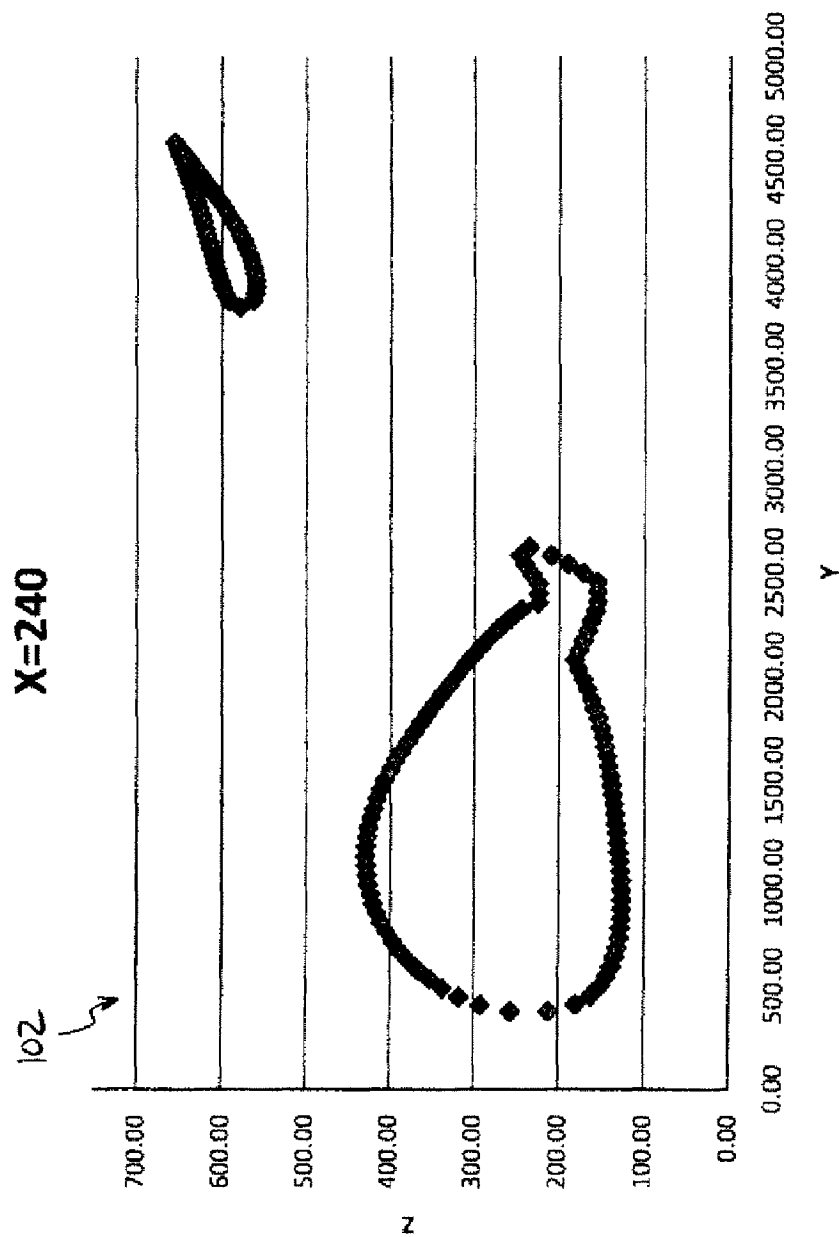


FIG - 7

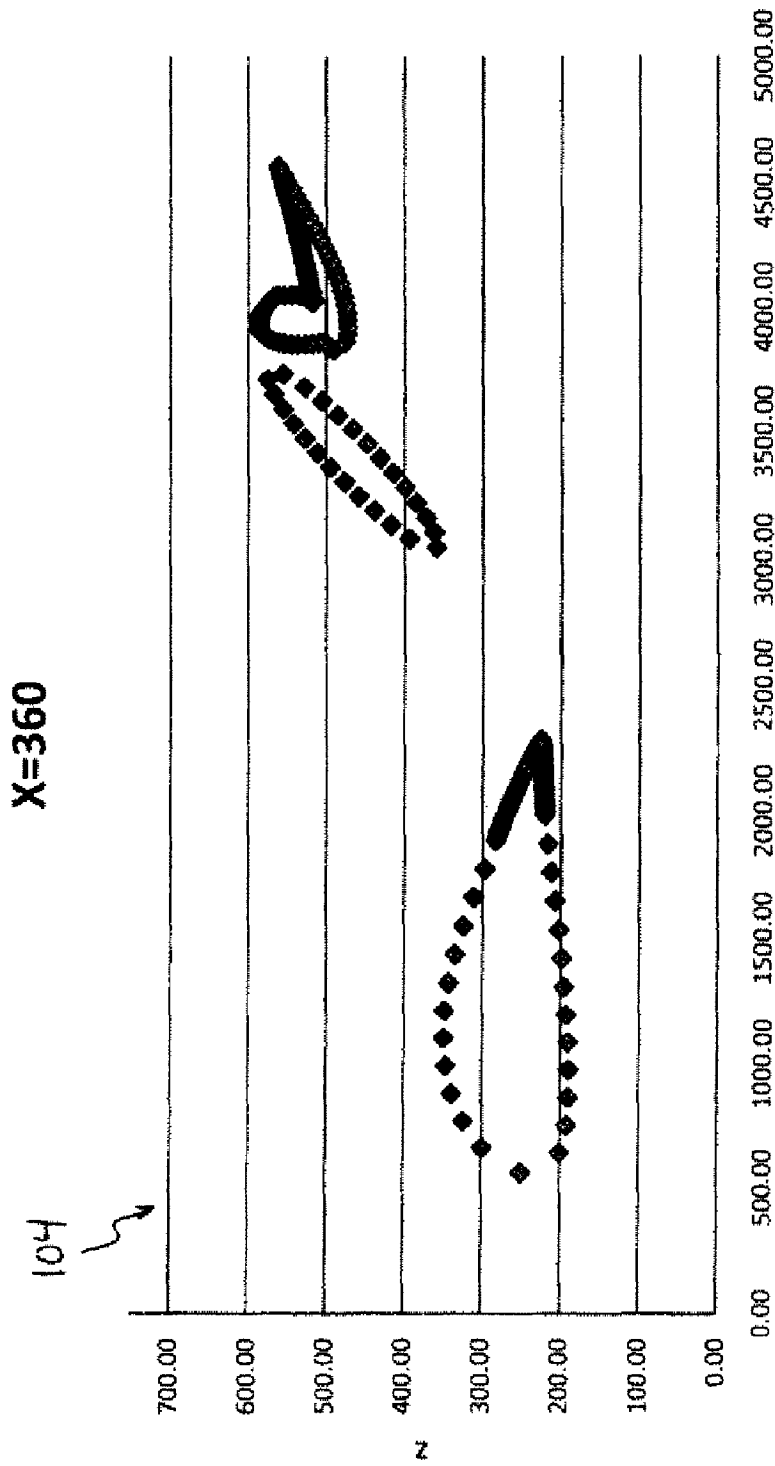


FIG - 8

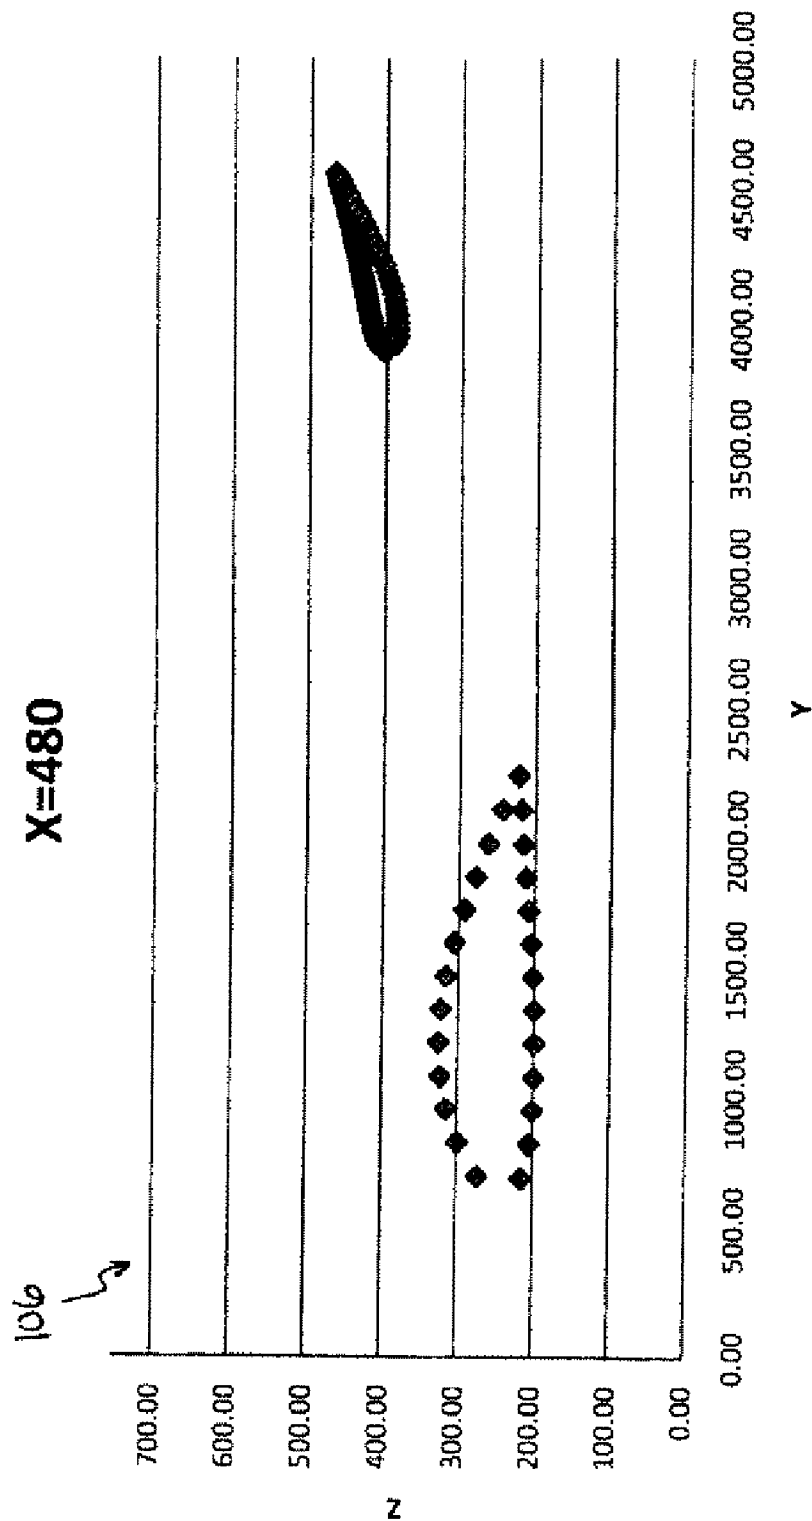


FIG - 9

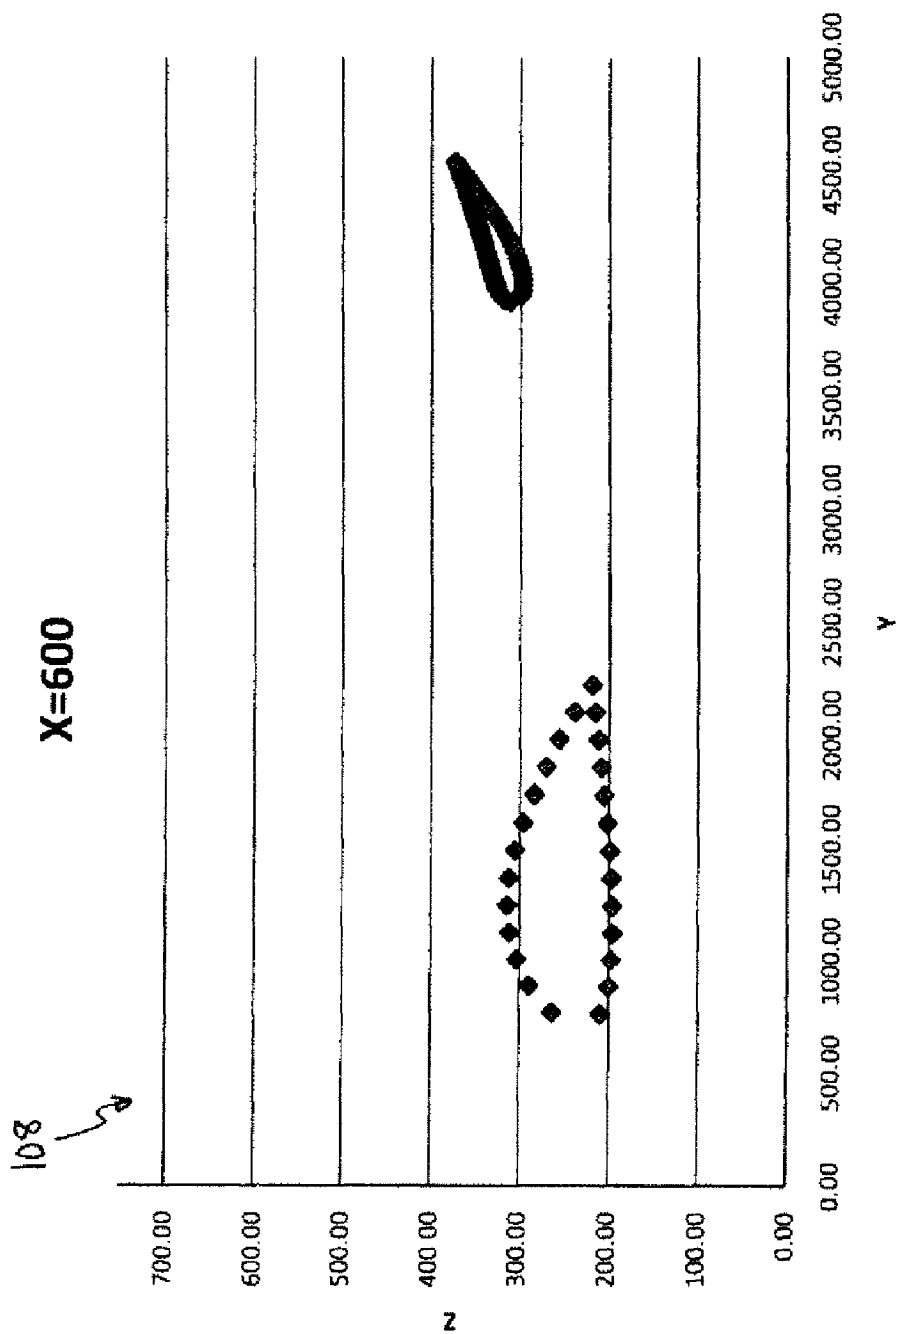


FIG - 10

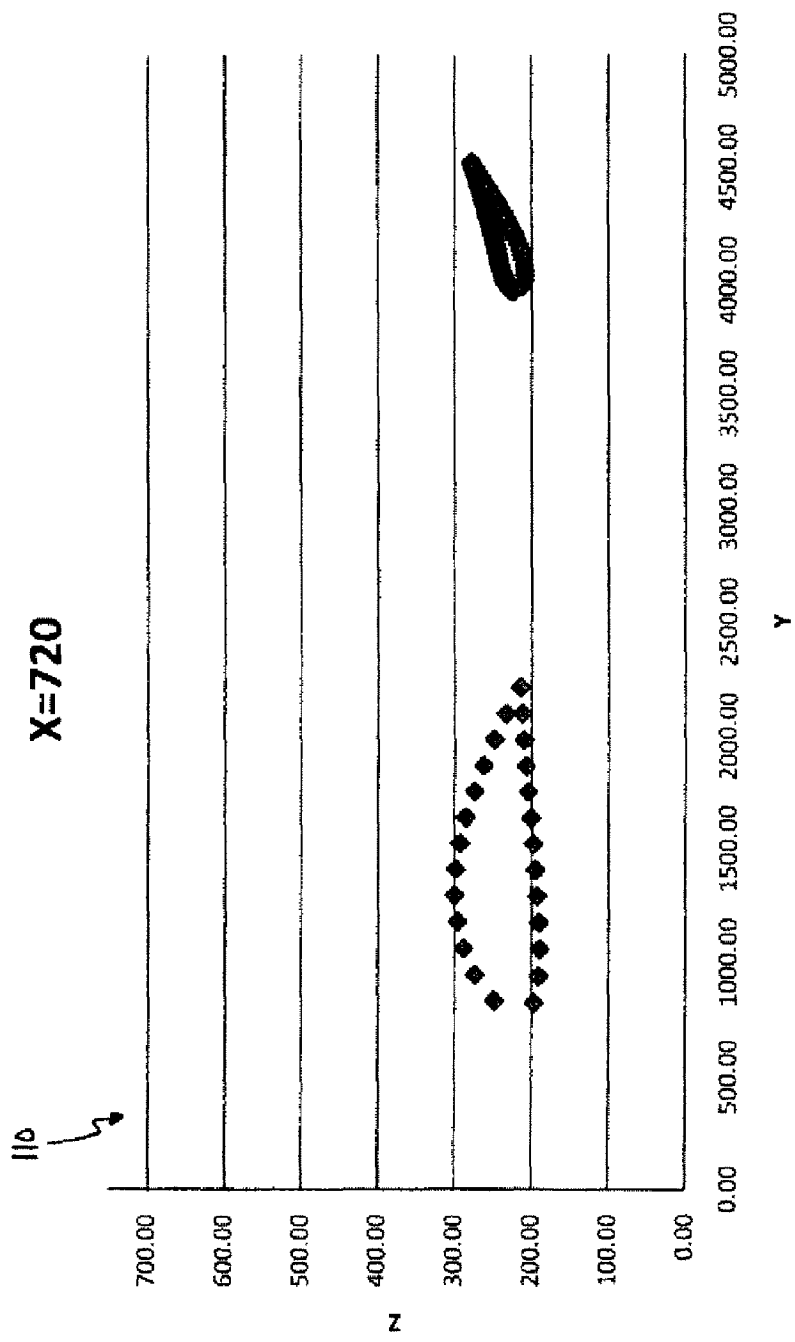


FIG - 11

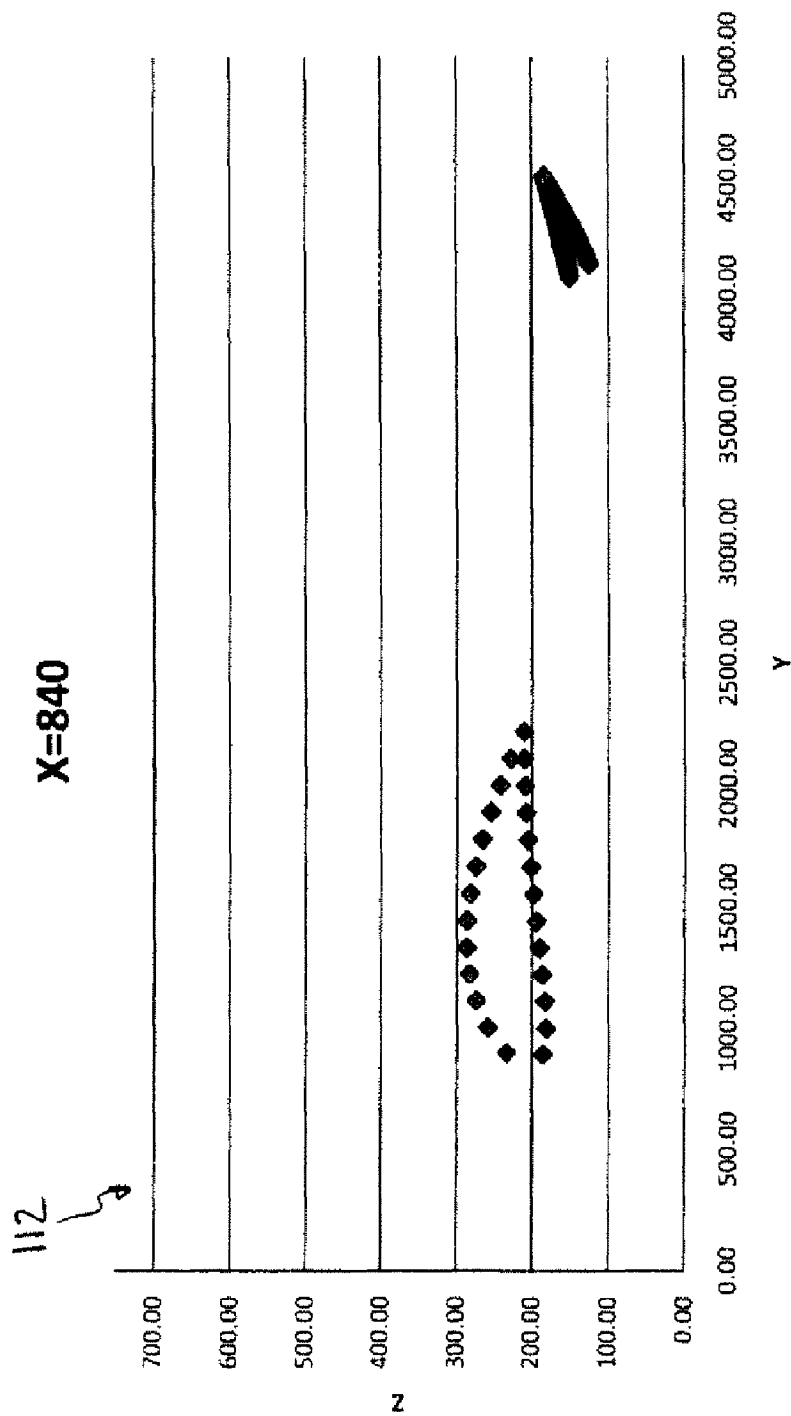


FIG - 12

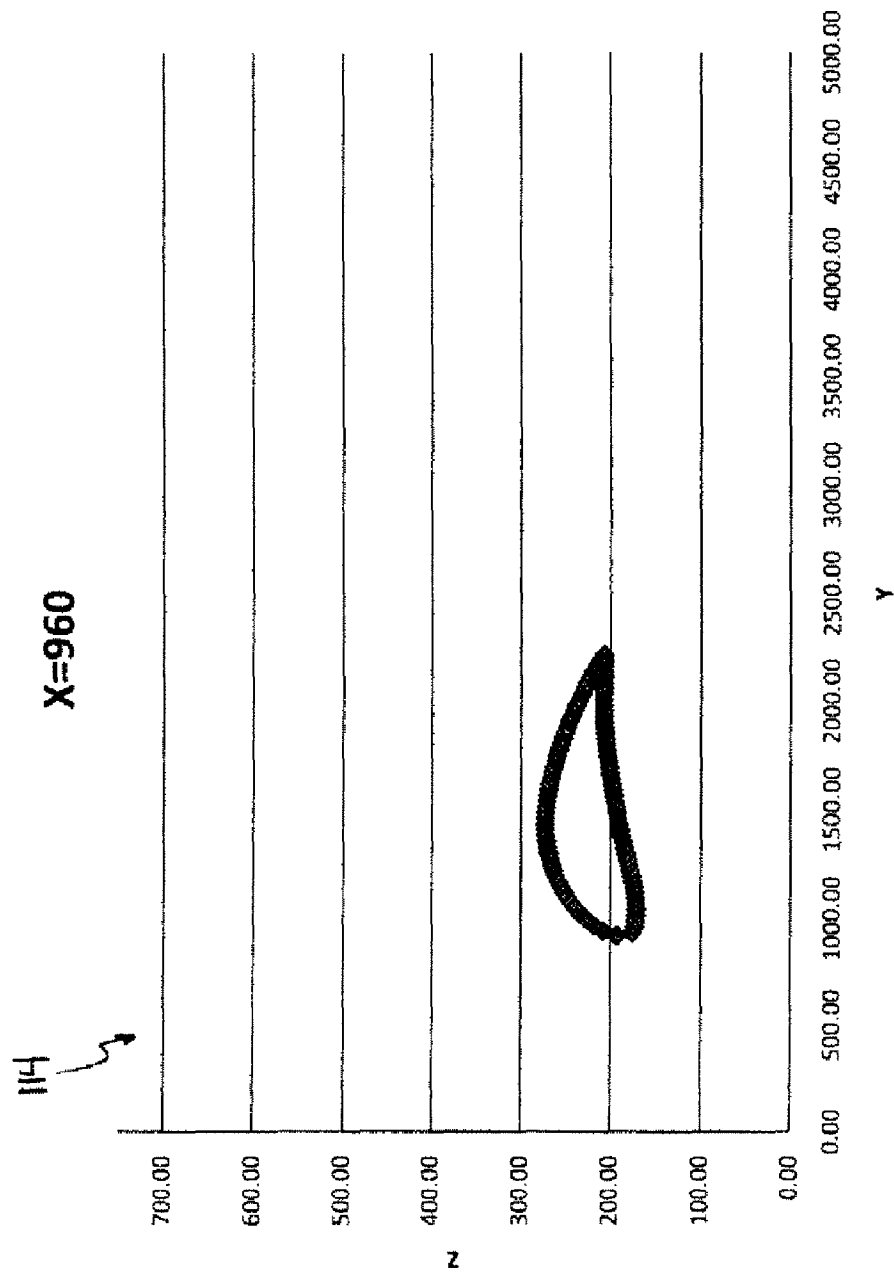


FIG - 13

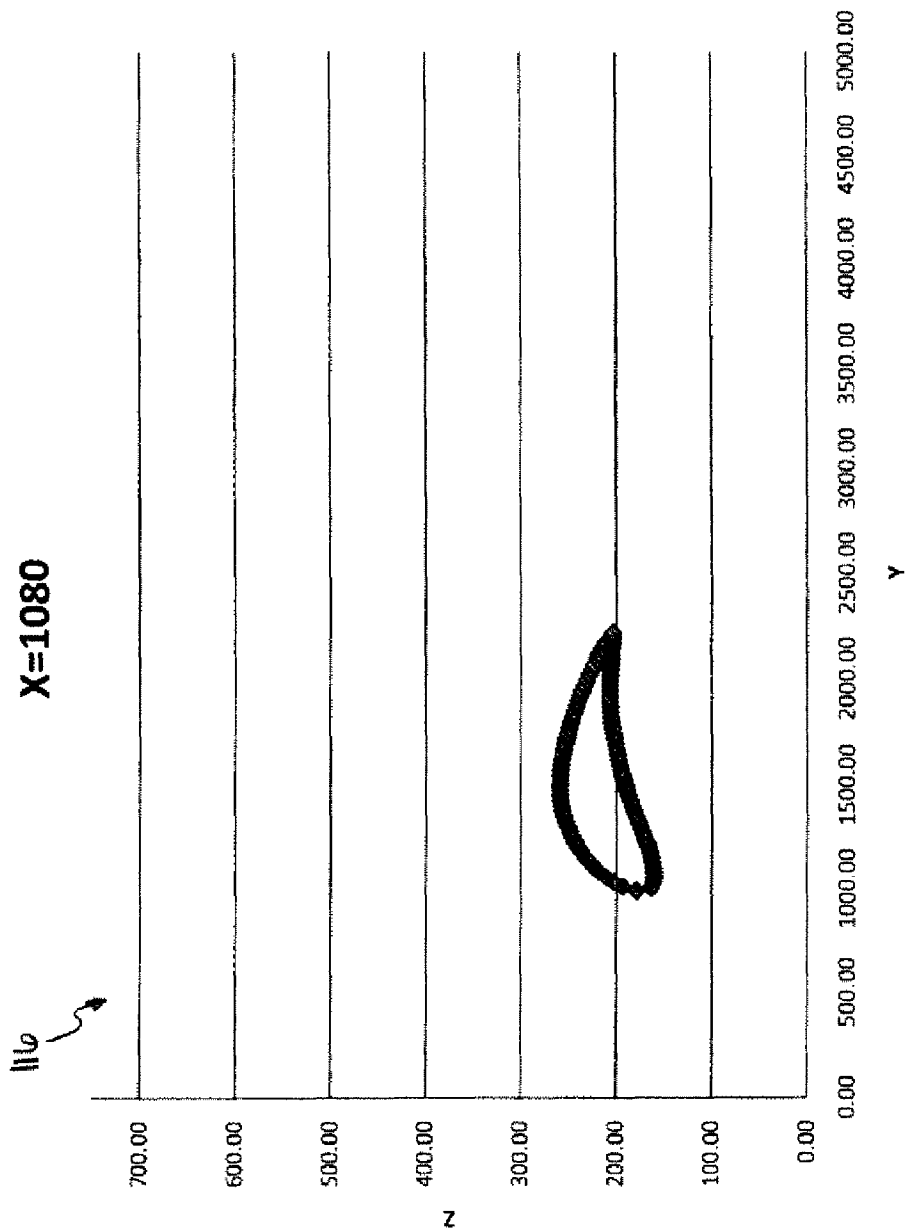


FIG - 14

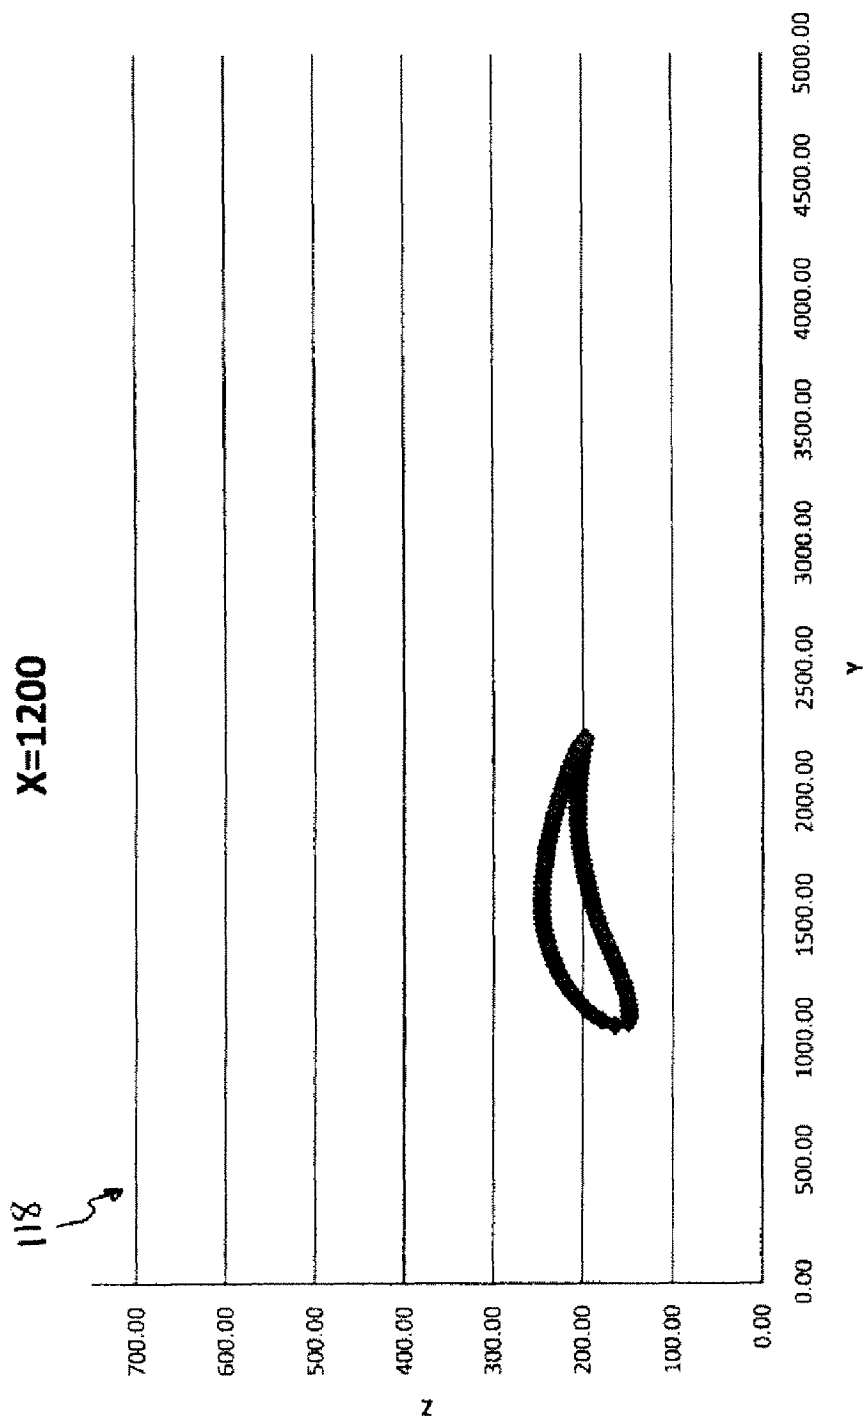


FIG - 15

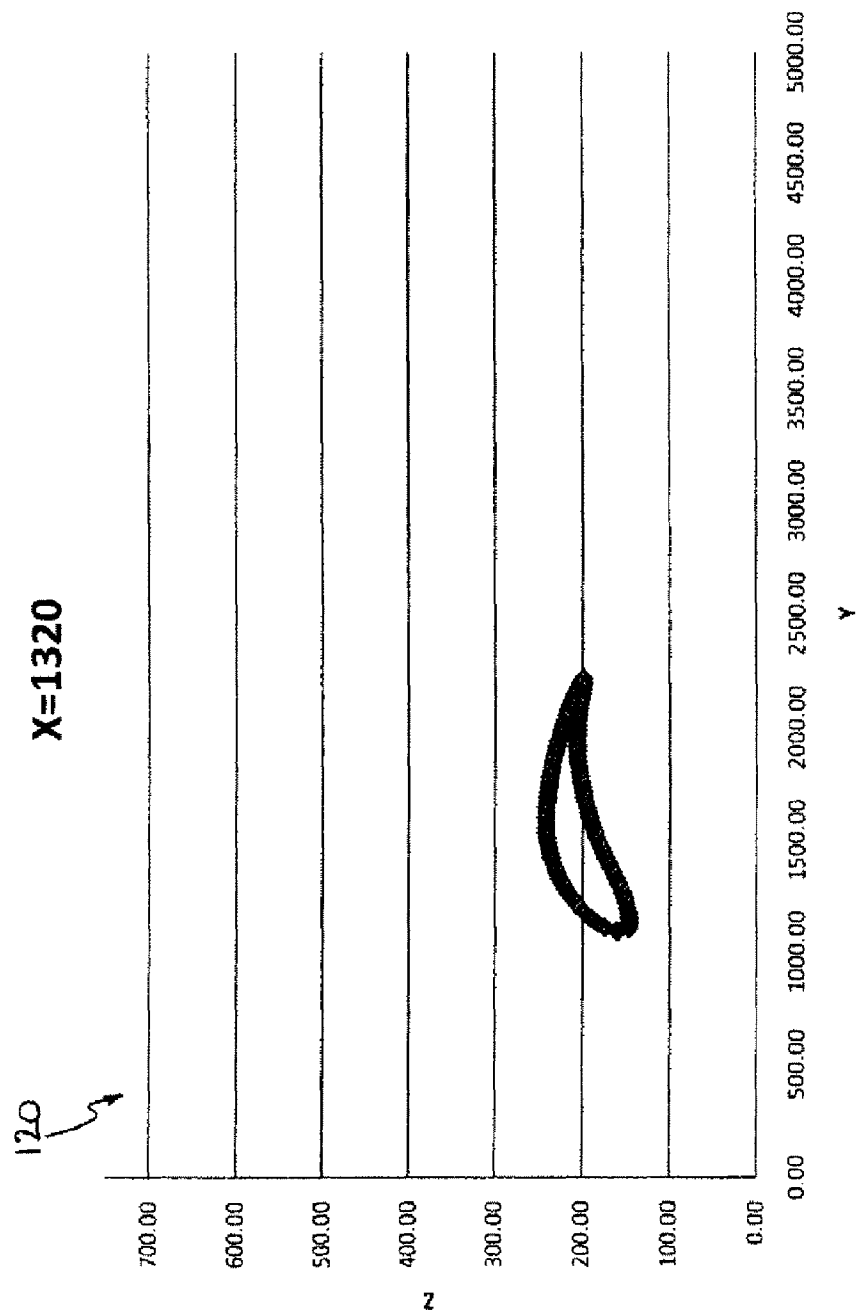


FIG - 16

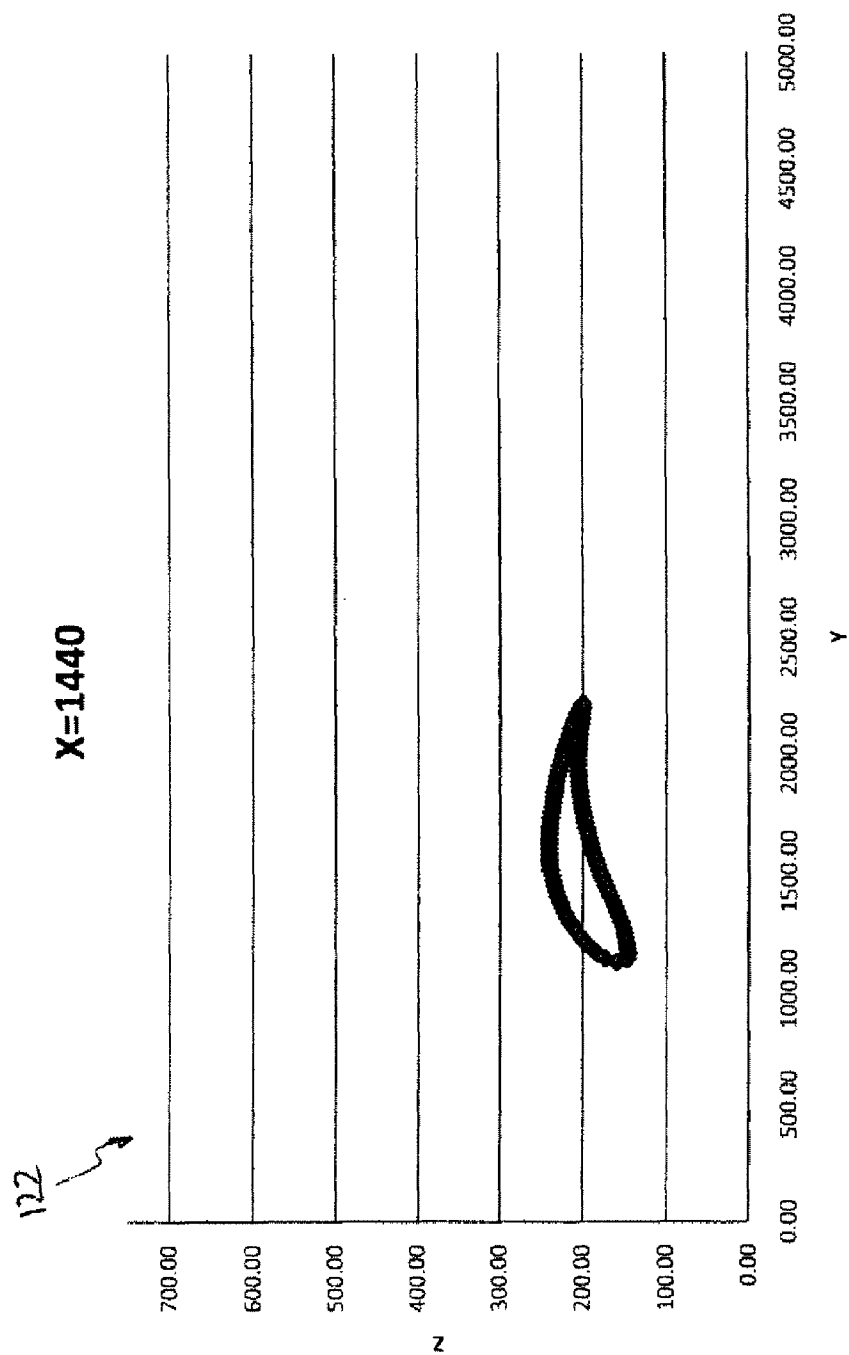


FIG - 17

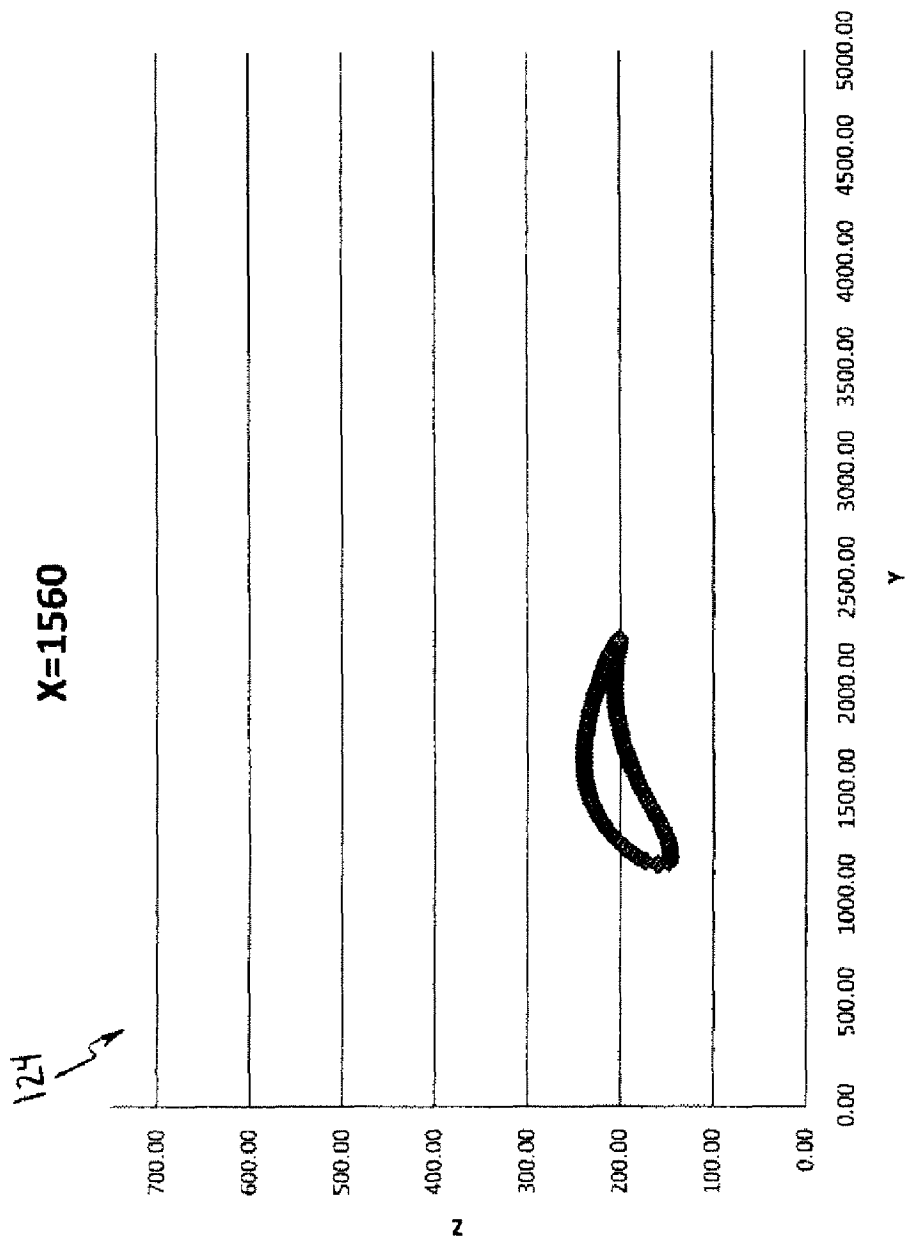


FIG - 18

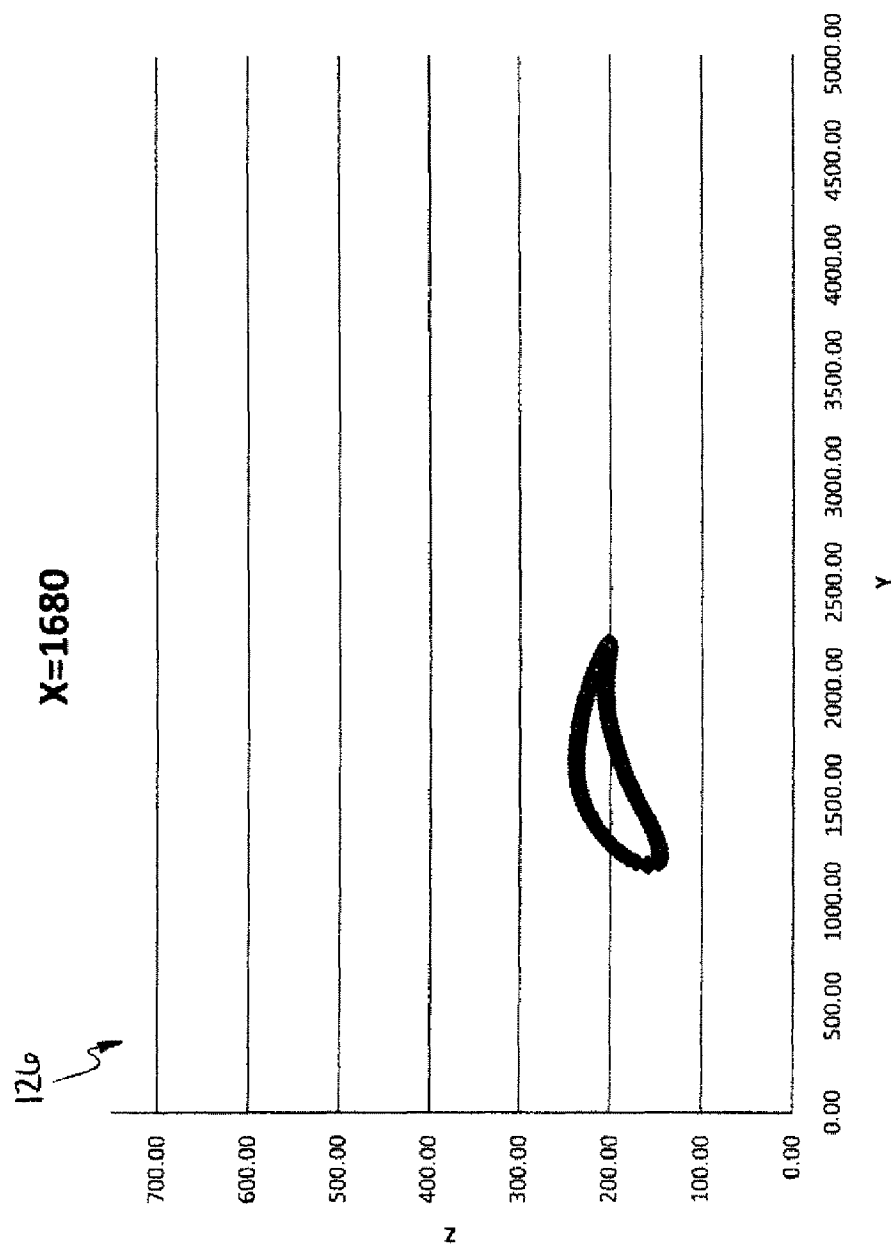


FIG - 19

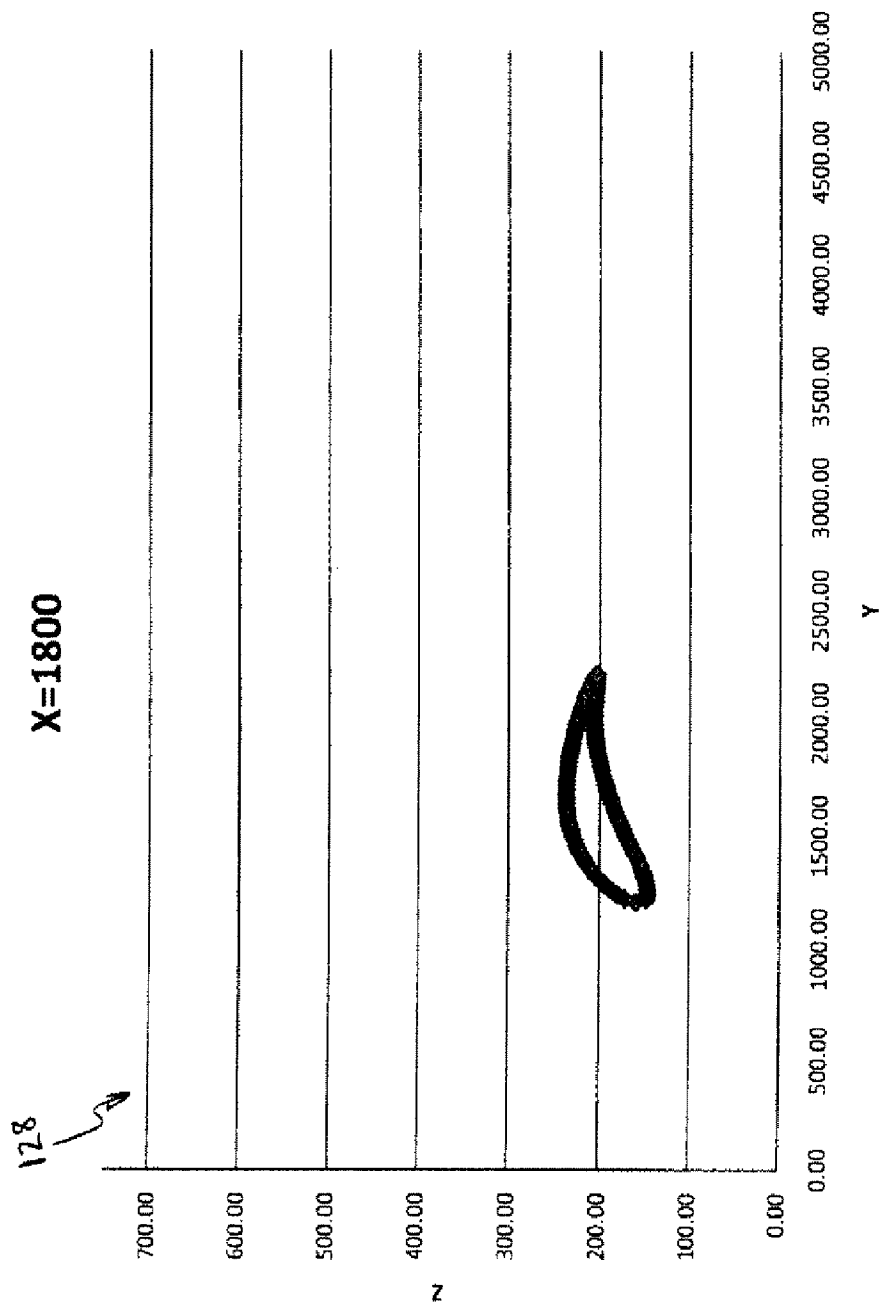


FIG - 20

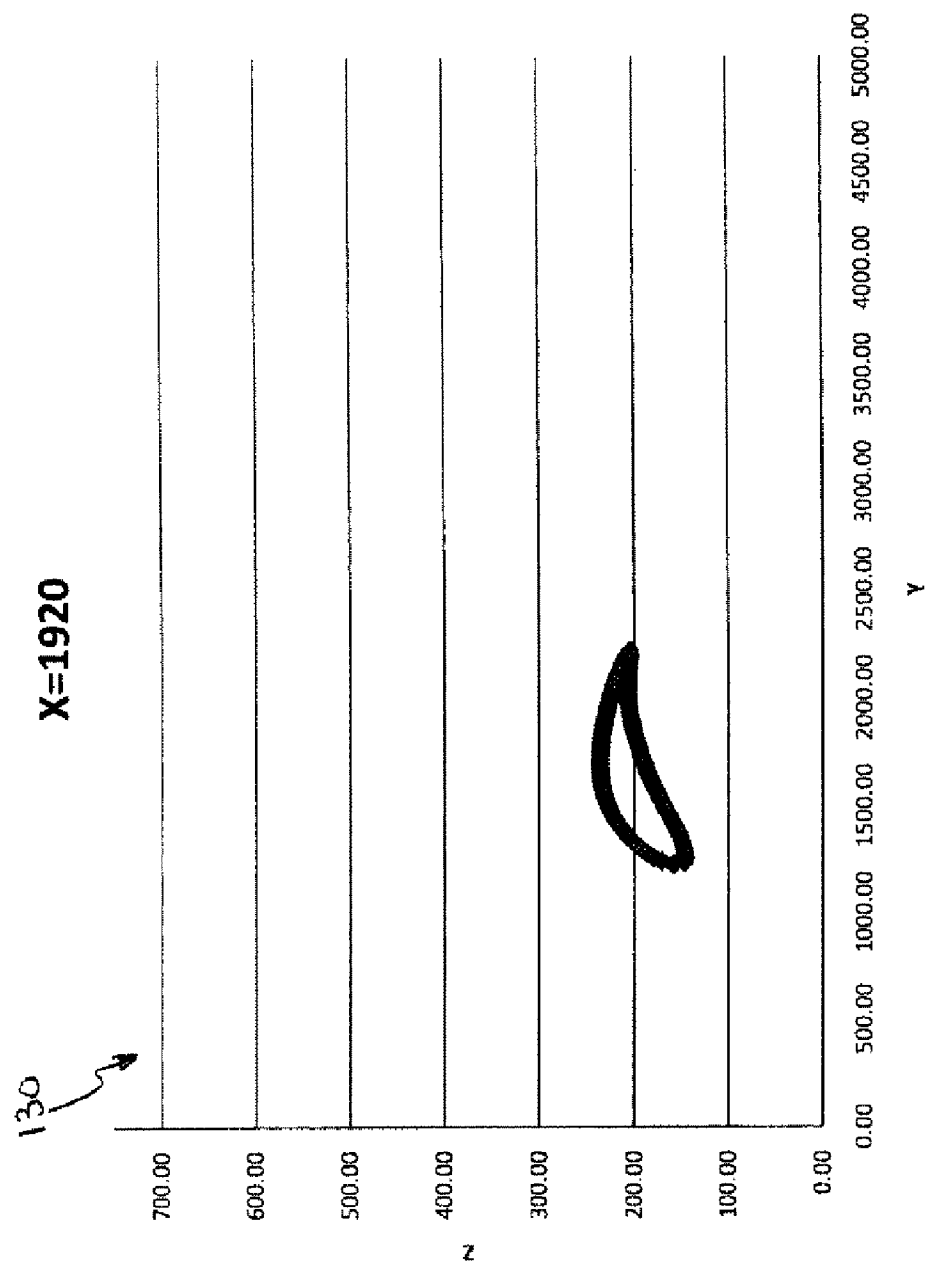


FIG - 21

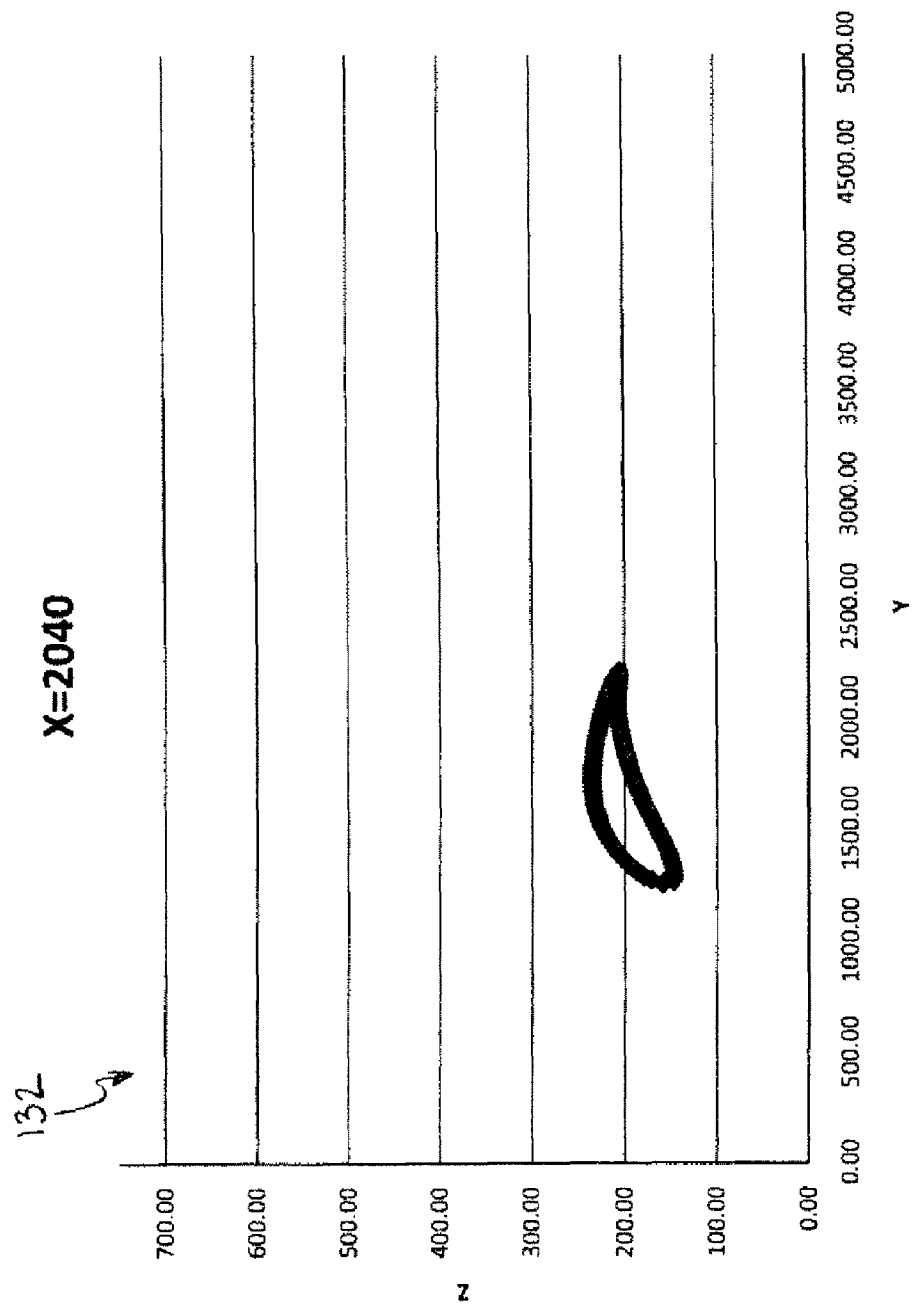


FIG - 22

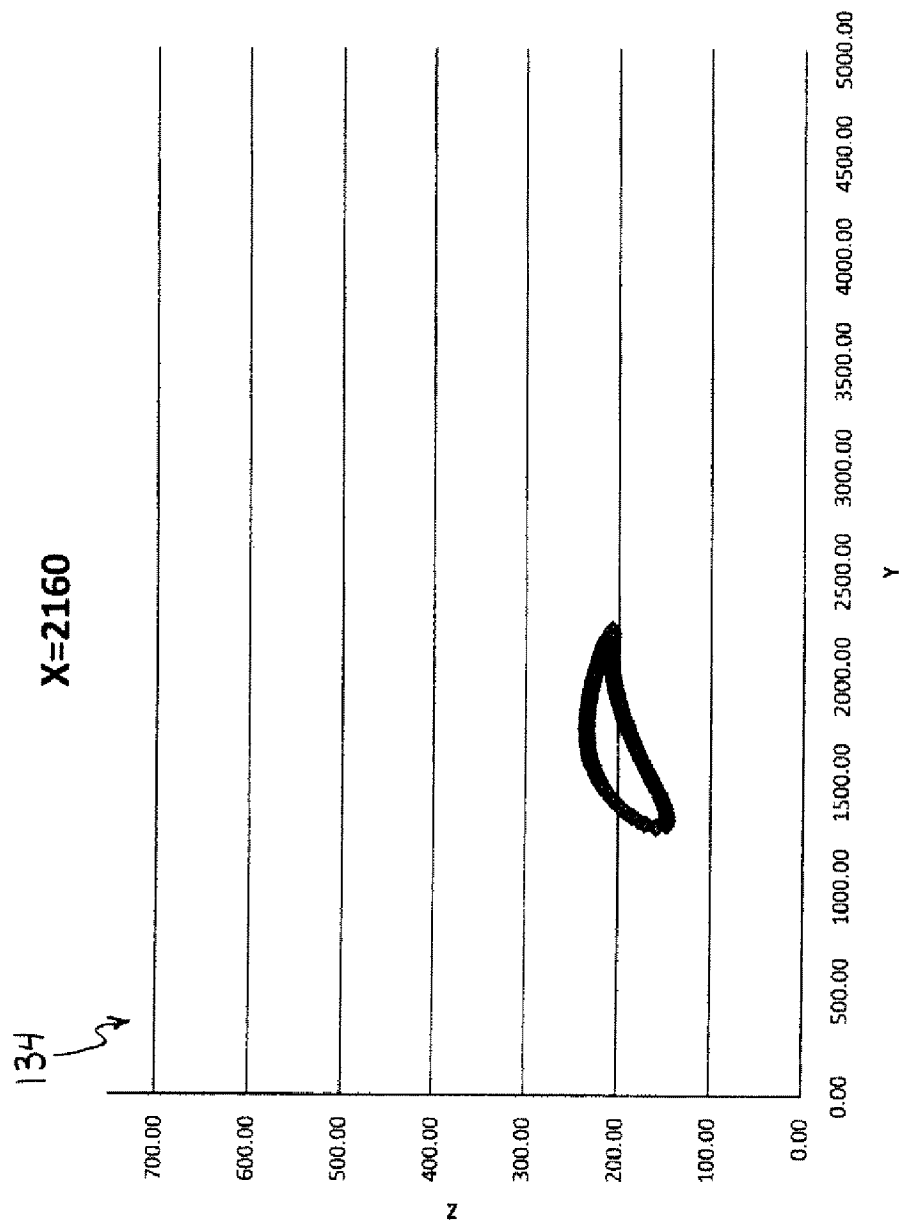


FIG - 23

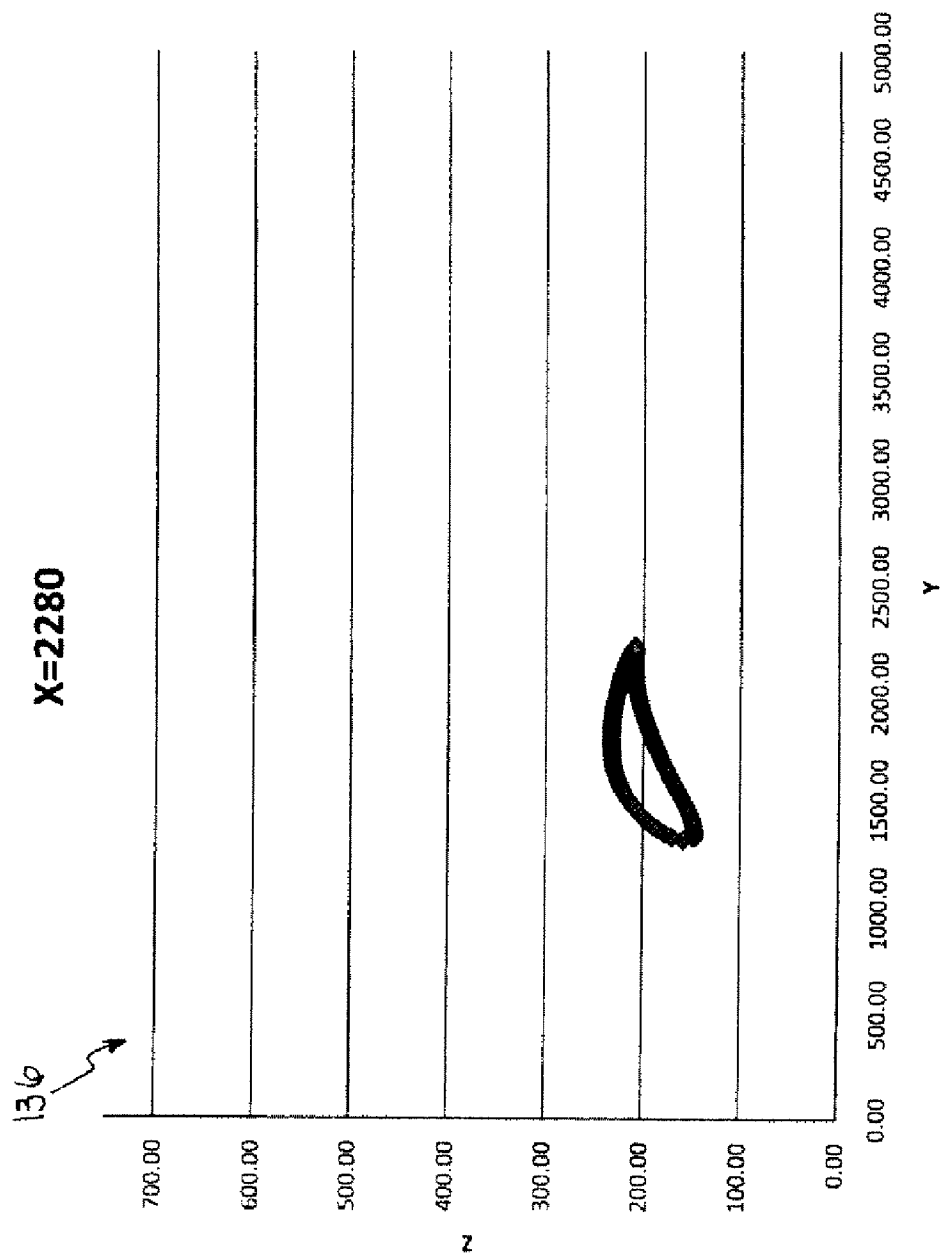


FIG - 24

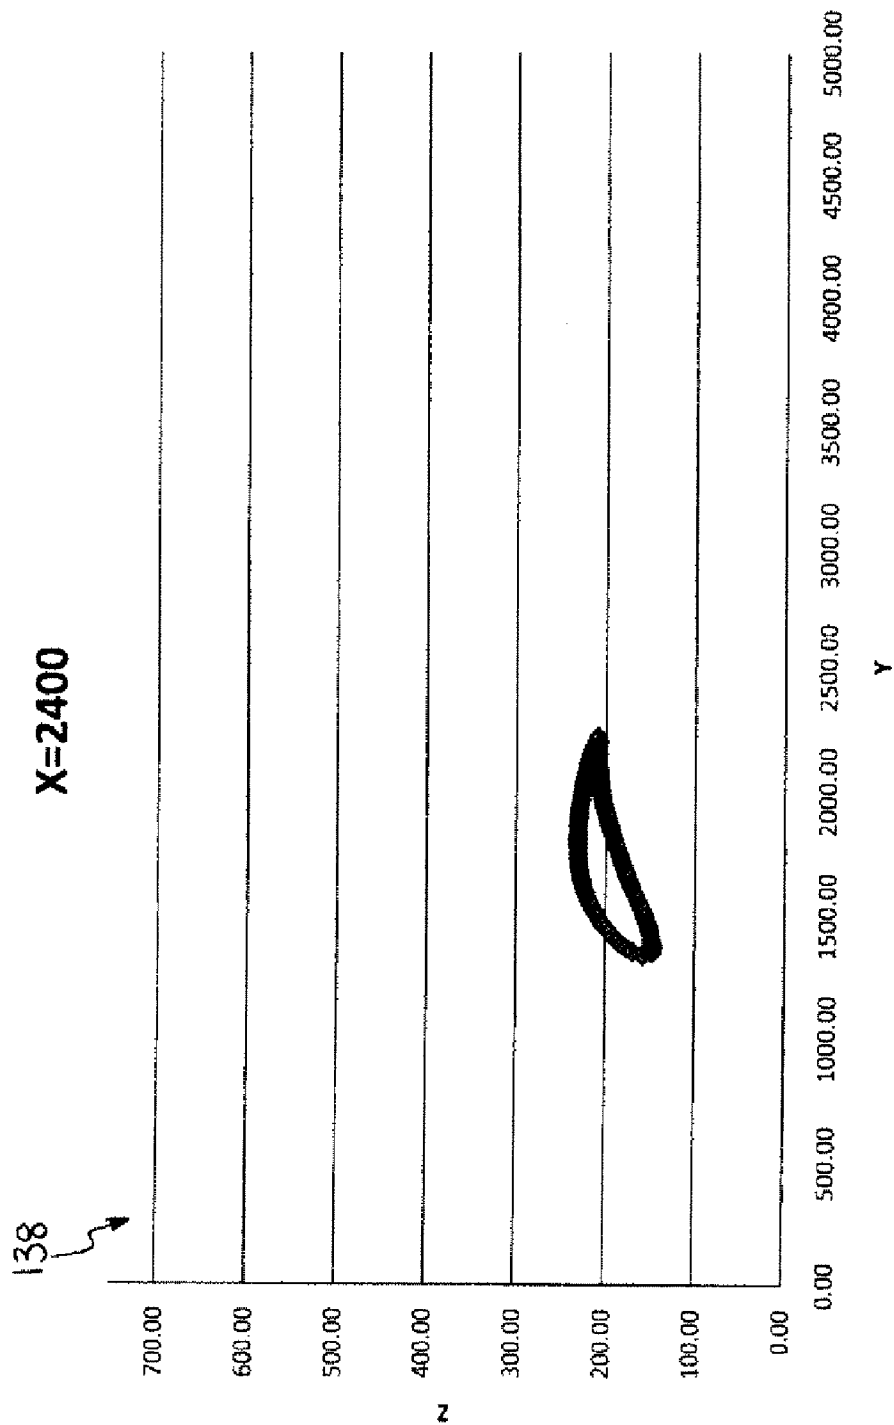


FIG - 25

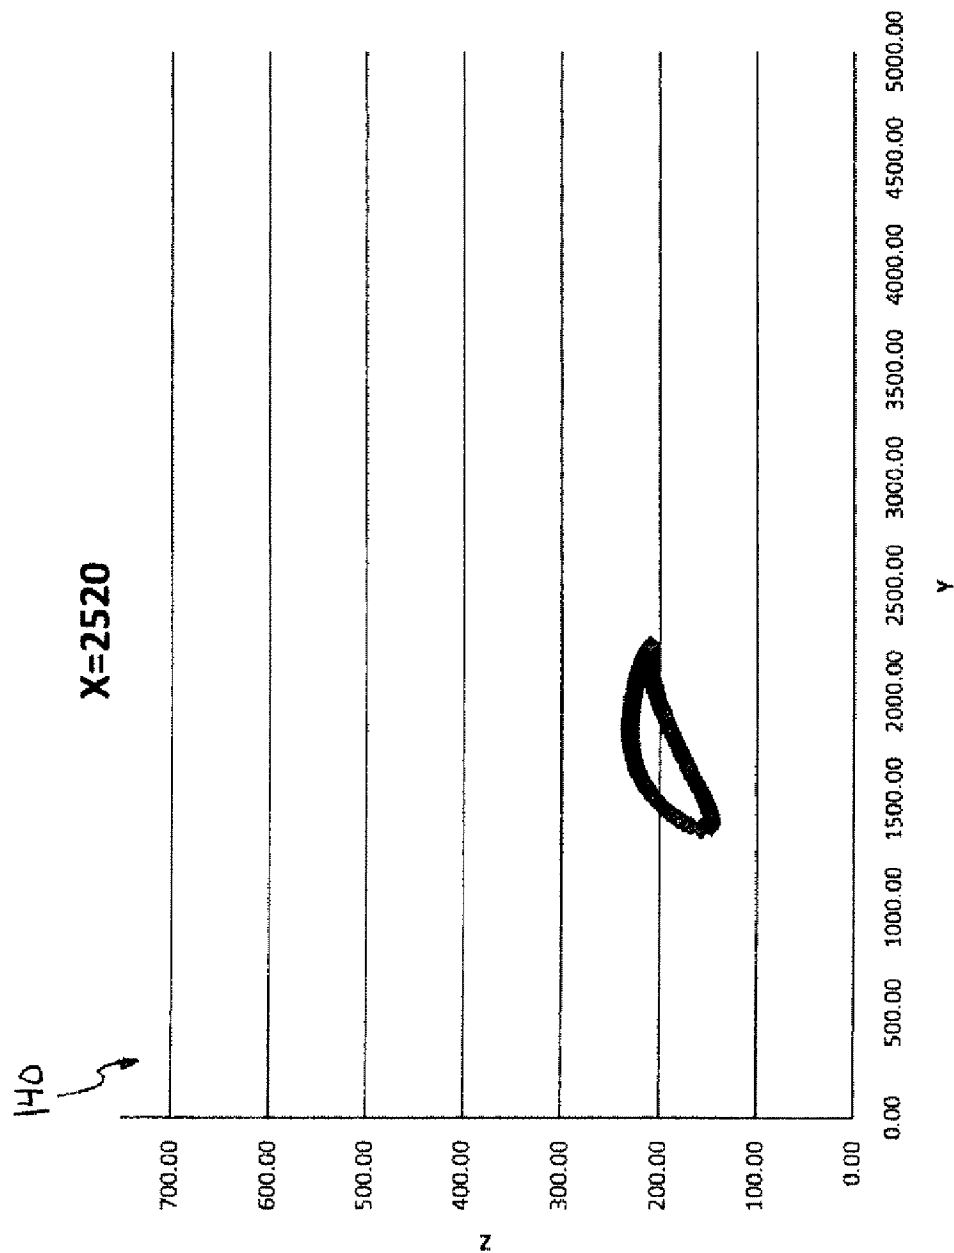


FIG - 26

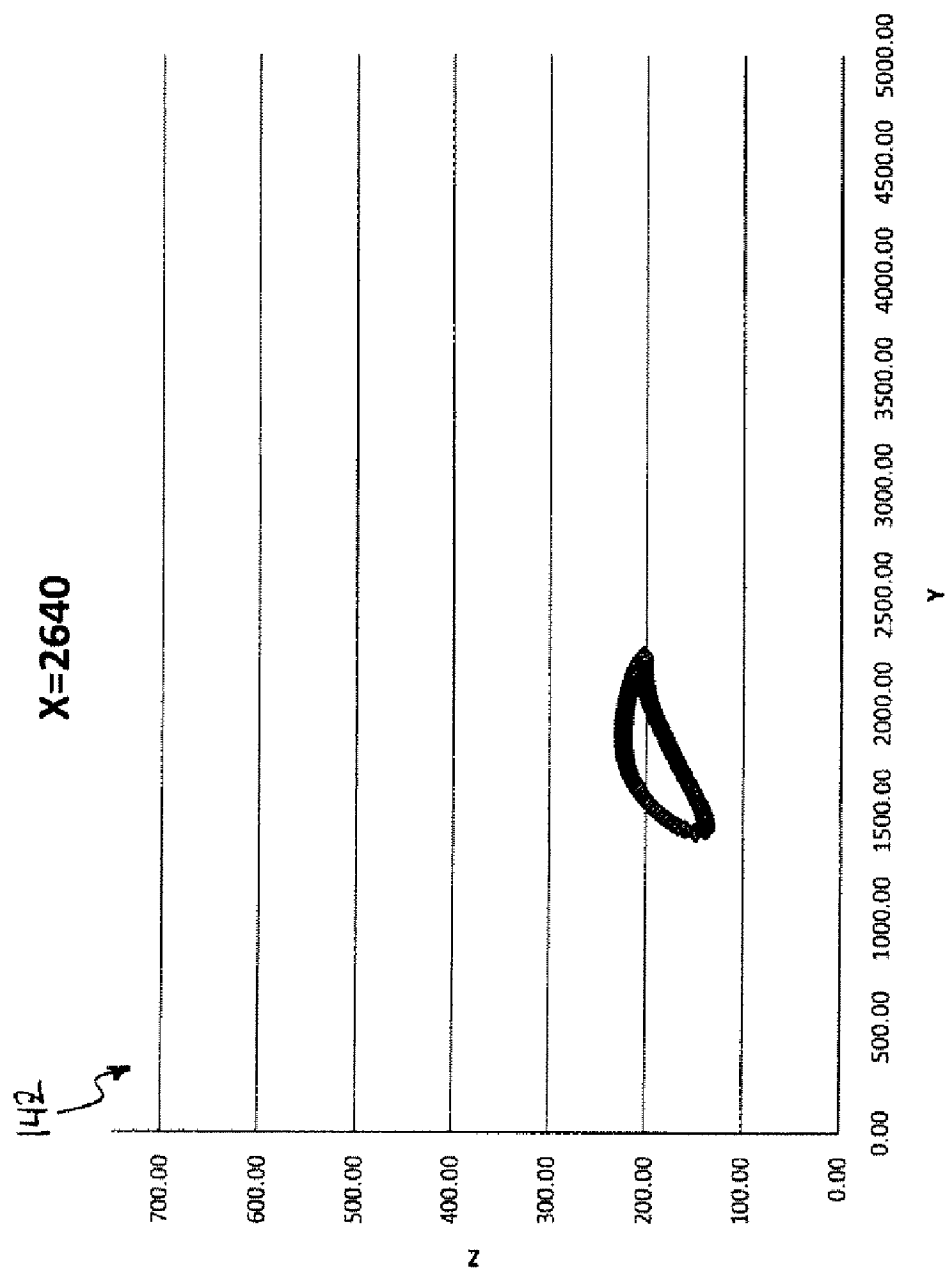


FIG - 27

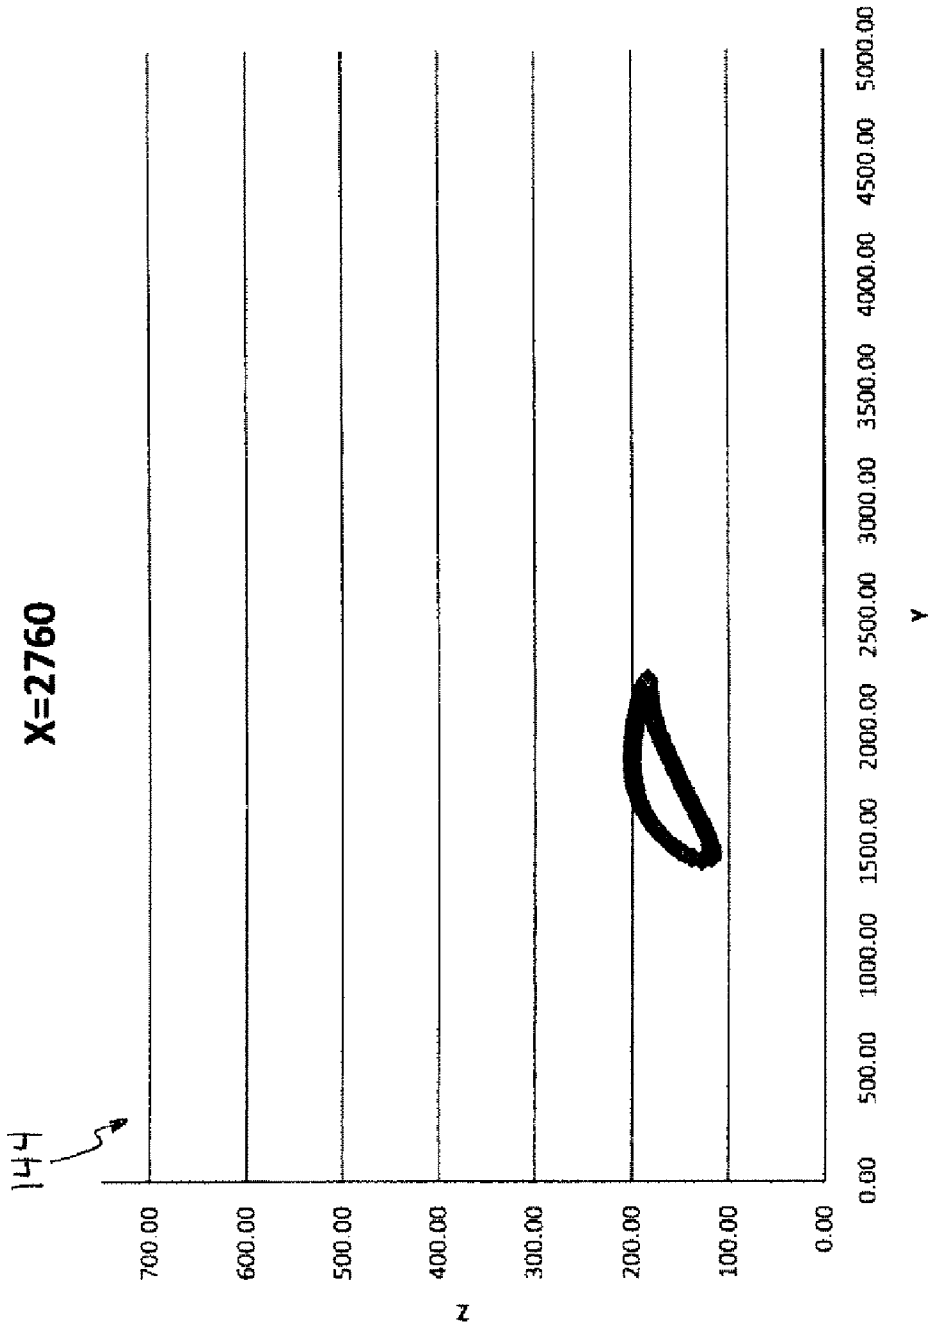


FIG - 28

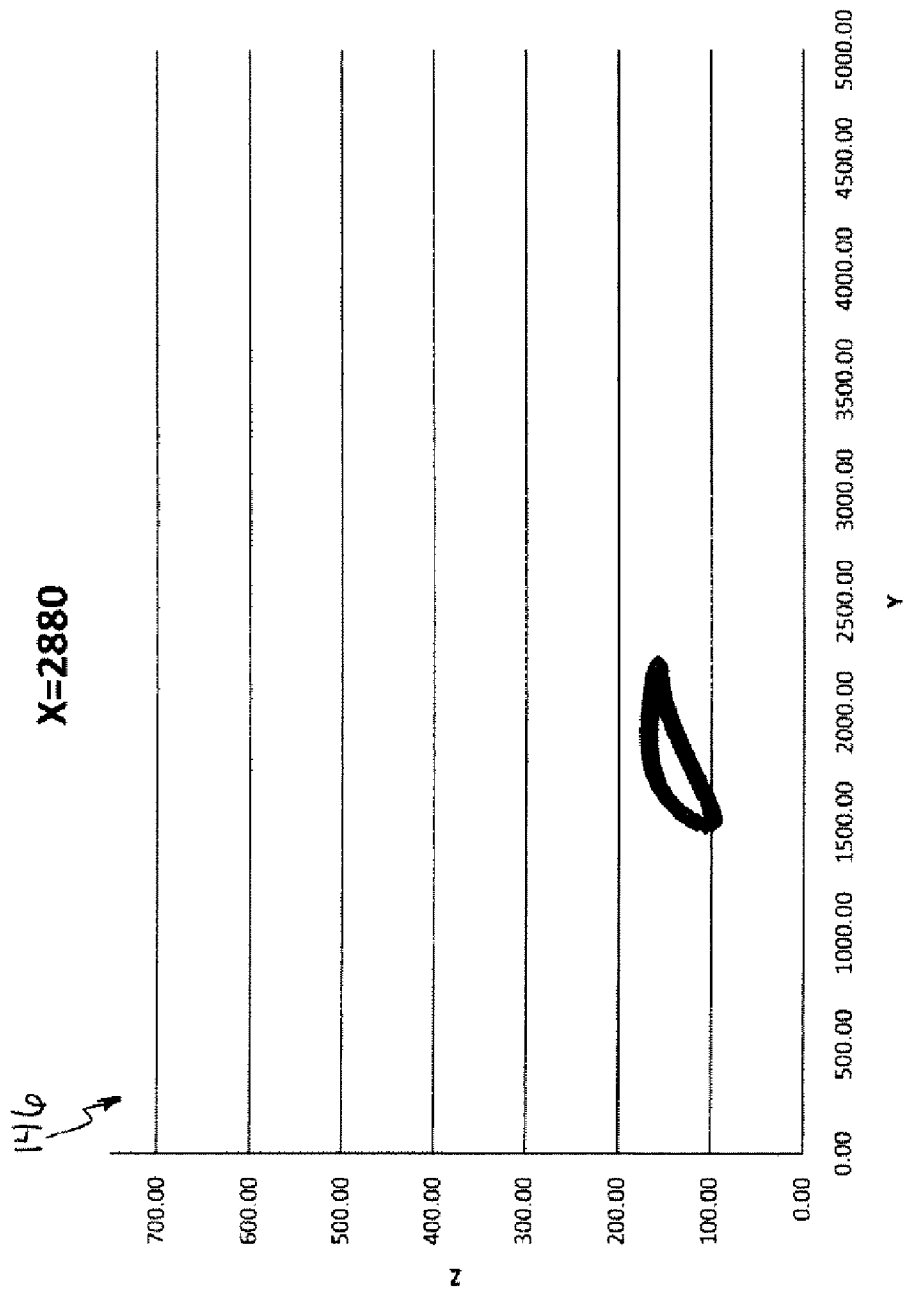


FIG - 29

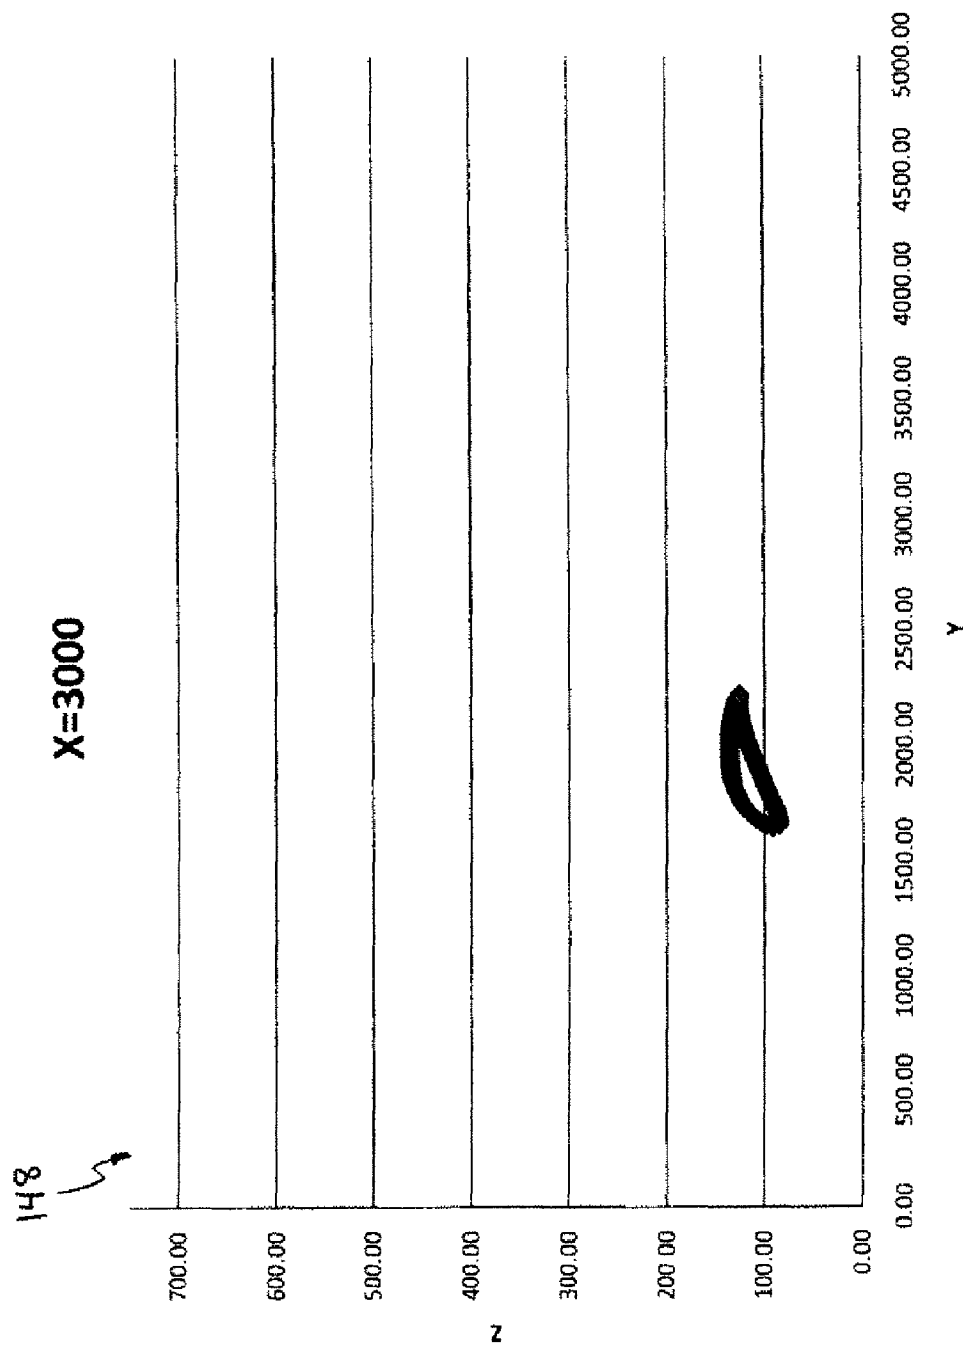


FIG - 30

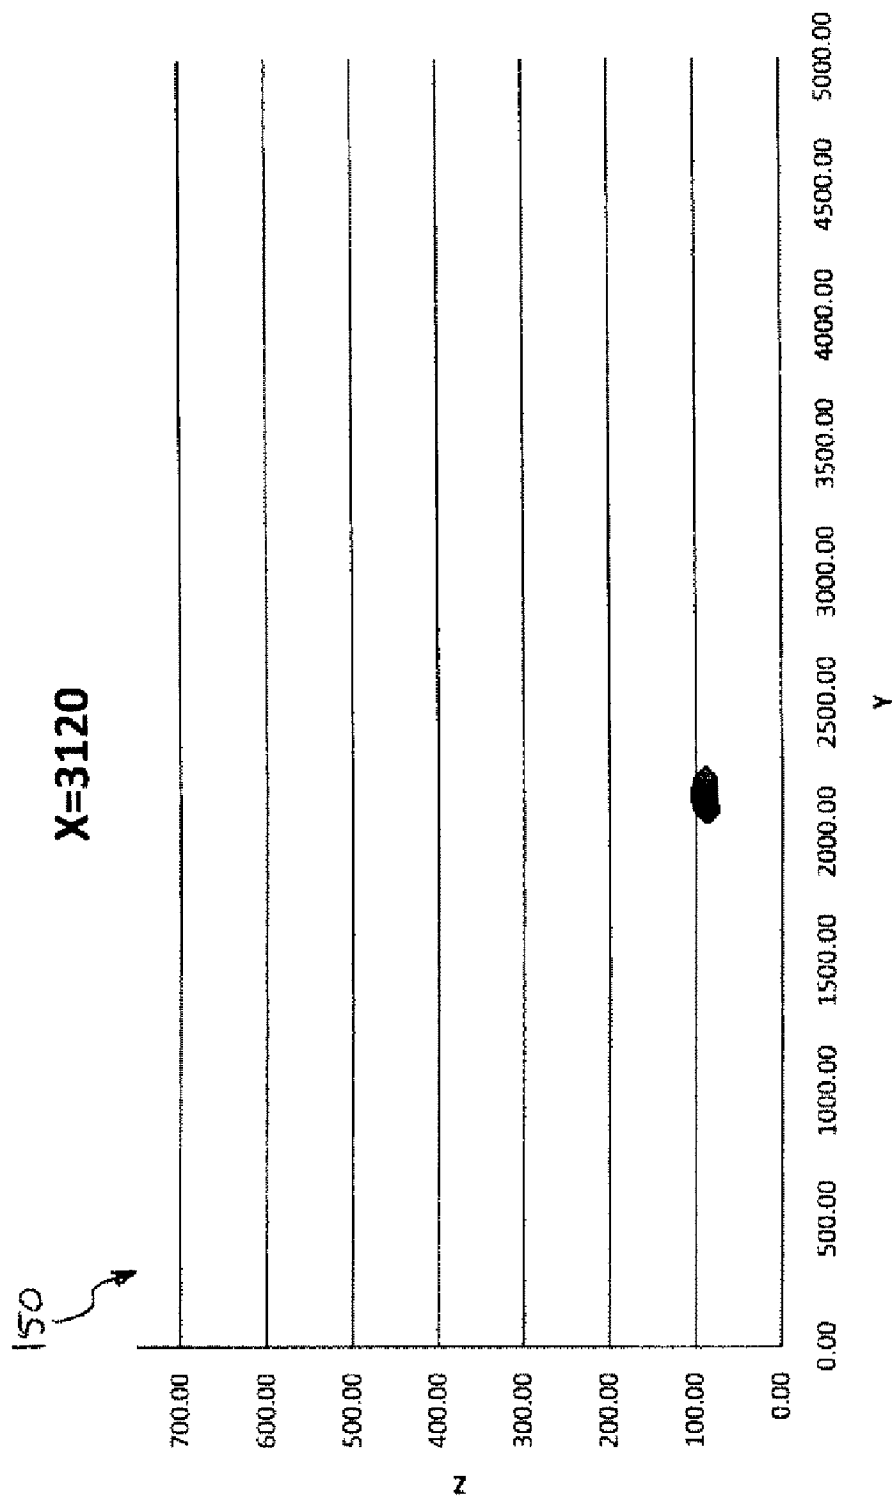


FIG - 31

1

AIRCRAFT CONFIGURED FOR FLIGHT IN AN ATMOSPHERE HAVING LOW DENSITY

ORIGIN OF THE INVENTION

This invention was made by employees of the United States Government any may be manufactured and used by or for the Government of the United States of America for governmental purposes without the payment of any royalties thereon or therefor.

TECHNICAL FIELD

The present invention relates to an aircraft configured for flight in an atmosphere having a low density.

BACKGROUND OF THE INVENTION

The Mars atmosphere is thin and composed mostly of carbon dioxide. The gravity is lower than the gravity on Earth. More specifically, atmospheric density near the Martian surface is roughly equivalent to an altitude of 100,000 feet on Earth. The low atmospheric density leads to a high cruise velocity, but a low Reynolds number. Since the speed of sound on Mars is lower than on Earth, transonic aerodynamic effects are encountered at a lower flight speed. Low atmospheric density also presents difficulty in generating sufficient thrust. Therefore, with such a thin atmosphere, generating enough lift to support airplane weight is difficult and wing loading must be small.

In addition to the challenge of generating sufficient lift and thrust to fly an airplane through the Martian atmosphere, there are challenges associated with getting the airplane to Mars. These challenges include stowage of the airplane in a non-flight configuration and the extraction of the airplane from the non-flight configuration to an in-flight configuration capable of flight in a thin atmosphere.

SUMMARY OF THE INVENTION

An aircraft is configured for flight in an atmosphere having a low density. The aircraft includes a fuselage, a pair of wings, and a rear stabilizer. The pair of wings extends from the fuselage in opposition to one another. The rear stabilizer extends from the fuselage in spaced relationship to the pair of wings. The fuselage, the wings, and the rear stabilizer each present an upper surface opposing a lower surface. The upper and lower surfaces have X, Y, and Z coordinates that are configured for flight in an atmosphere having low density.

The above features and advantages and other features and advantages of the present invention are readily apparent from the following detailed description of the best modes for carrying out the invention when taken in connection with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Referring now to the figures, which are exemplary embodiments and wherein like elements are numbered alike:

FIG. 1A is a schematic plan view of an aircraft in an unfolded position;

FIG. 1B is a schematic partial cross sectional side view of the aircraft of FIG. 1 in a folded position and disposed within an aeroshell;

FIG. 2 is a schematic front view of the aircraft of FIG. 1 in the unfolded position;

2

FIG. 3 is a schematic side view of the aircraft of FIG. 1 in the unfolded position;

FIG. 4 is a schematic rear view of the aircraft of FIG. 1 in the unfolded position;

FIG. 5 is a schematic view of a rear stabilizer of the aircraft of FIG. 1;

FIG. 6 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 120.0;

FIG. 7 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 240.0;

FIG. 8 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 360.0;

FIG. 9 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 480.0;

FIG. 10 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 600.0;

FIG. 11 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 720.0;

FIG. 12 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 840.0;

FIG. 13 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 960.0;

FIG. 14 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 1080.0;

FIG. 15 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 1200.0;

FIG. 16 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 1320.0;

FIG. 17 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 1440.0;

FIG. 18 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 1560.0;

FIG. 19 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 1680.0;

FIG. 20 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 1800.0;

FIG. 21 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 1920.0;

FIG. 22 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 2040.0;

FIG. 23 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 2160.0;

FIG. 24 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 2280.0;

FIG. 25 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 2400.0;

3

FIG. 26 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 2520.0;

FIG. 27 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 2640.0;

FIG. 28 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 2760.0;

FIG. 29 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 2880.0;

FIG. 30 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 3000.0; and

FIG. 31 is a graphical representation of Y and Z positions of upper and lower surfaces of the aircraft of FIG. 1 taken at an X position substantially equal to 3120.0.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to the drawings, wherein like reference numbers refer to like components, FIG. 1 shows an aircraft 10 configured for flight in an atmosphere having a low density. More specifically, the aircraft 10 includes a fuselage 12, a pair of wings 14, and a rear stabilizer 16. A stabilizer bar 18 operatively interconnects the fuselage 12 and the rear stabilizer 16.

The aircraft 10 is configured to move between an unfolded position 20, as shown in FIG. 1A, and a folded position 22, as shown in FIG. 1B, and vice versa. When the aircraft 10 is in the folded position 22, the aircraft 10 is configured to fit within volumetric space limitations of an aeroshell 24 (or similar capsule) of a launch vehicle, i.e., a Delta II, and the like (not shown). More specifically, the aircraft 10 is configured to move between the folded position 22 and the unfolded position 20 with only three folds 26a, 26b, 26c. Two of the folds 26a, 26b are on a respective wing 14 and the third fold 26c is on the stabilizer bar 18. Therefore, each of the wings 14 is foldable, relative to the fuselage 12, along the fold 26a, 26b, i.e., a wing hinge. Likewise, the rear stabilizer 16 is foldable, relative to the fuselage 12, along the fold 26c, i.e., a stabilizer hinge. It should be appreciated, however, that the aircraft 10 may be configured with any other desired number of folds, as known to those skilled in the art.

The aircraft 10 is also configured to have a desired mass and mass distribution when in the folded position 22 such that the aircraft 10 is transported stably within the launch vehicle. Likewise, the aircraft 10 is configured such that the mass and mass distribution provides stability in the unfolded position 20, for flight, without any artificial augmentation. A structural arrangement, i.e., internally and externally, is configured such that the aircraft 10 survives loads associated with launch and reentry (Earth and Mars, Earth and Earth, respectively). The aircraft 10 is also configured with a desired propulsion system duration, power, and efficiency to provide required speed and endurance. Additionally, the aircraft 10 is configured to have adequate payload capacity in both volume and mass available, while allowing any required subsystems to exist, e.g., batteries, guidance, control, telemetry, etc.

When the airplane is stowed in the launch vehicle in the folded position 22 within the confined volume, the airplane is configured to be transported via flight, e.g., via a rocket and the like, and released from the confined volume during flight. When the aircraft 10 is released from the confined volume of the launch vehicle during flight, the aircraft 10 is configured such that the wings 14 and the rear stabilizer 16 unfold about

4

the respective folds. Once the aircraft 10 is in the unfolded position 20, the aircraft 10 is configured for controlled flight in low density, such as around Mars. It should be appreciated, however, that the aircraft 10 is not limited to flight around Mars as the aircraft 10 is configured for flight in any planetary atmosphere with a low density.

Referring to FIGS. 1A-5, the fuselage 12, the pair of wings 14, and the rear stabilizer 16 present an upper surface 28 opposing a lower surface 30. The geometry of the upper and lower surfaces 28, 30 provides the requisite aerodynamic properties to the aircraft 10, such as lift and drag, such that flight in low density can be achieved. The upper and lower surfaces 28, 30 are defined at X, Y, and Z locations in a 3-dimensional X, Y, Z configuration. The X positions are defined along an X axis that generally extends between the wings 14. The Y locations are defined along a Y axis that extends along the fuselage 12, in perpendicular relationship to the x-axis. The Z locations are defined along a Z axis that generally extends in perpendicular relationship to the X axis and the Y axis. The upper and lower surfaces 28, 30 are defined at Y and Z positions corresponding substantially to an X position of 120.0, as shown in Table 1 and at 100 in FIG. 6.

TABLE 1

Y	Z
1005.68	117.26
1037.25	437.34
1049.79	117.67
1081.35	438.41
1093.9	118.26
1125.46	438.83
1138	119.03
1169.57	438.6
1182.11	119.96
1213.67	437.72
1226.2	121.01
1257.75	436.19
1270.3	122.11
1301.81	434.01
1314.4	123.2
1345.83	431.19
1358.5	124.3
1389.81	427.74
1402.59	125.48
1433.73	423.67
1446.68	126.77
1477.59	419.01
1490.77	128.22
1521.39	413.76
1534.85	129.87
1565.12	407.93
1578.92	131.74
1608.77	401.56
1622.98	133.88
1652.34	394.68
1667.02	136.33
1695.83	387.34
1711.05	139.13
1739.27	379.66
1755.04	142.31
1782.65	371.68
1799.01	145.91
1825.98	363.42
1842.93	149.98
1869.25	354.84
1886.8	154.56
1912.45	345.9
191.27	193.72
1930.61	159.67
1955.57	336.63
195.79	236.57
1974.36	165.31
1998.63	327.04
2018.04	171.45

5

TABLE 1-continued

Y	Z
2041.63	317.21
2061.66	178.05
2084.61	307.28
2105.22	185.01
2127.58	297.33
2148.72	192.28
2170.47	287.02
217.43	159.25
2192.19	199.79
2213.16	275.91
2235.63	207.48
223.69	270.3
2255.58	263.8
2279.04	215.29
2297.8	251.03
2321.2	224.19
257.36	140.96
260.67	294.21
300.44	131.64
300.83	312.4
342.35	327.29
344.24	126.54
3744.64	668.04
3758.76	679.04
3765.49	654.1
3778.09	682.59
3784.17	650.65
3797.57	685.21
3803.05	648.55
3817.1	687.46
3822.01	647.3
3836.67	689.38
3840.99	646.64
384.41	340.58
3856.25	691.1
3859.99	646.44
3875.86	692.61
3878.99	646.57
388.22	123.63
3895.47	694
3897.98	647.01
3915.08	695.32
3916.97	647.73
3934.71	696.47
3935.94	648.72
3954.35	697.51
3954.91	649.85
3973.87	651.12
3973.98	698.57
3992.81	652.63
3993.61	699.65
4011.73	654.36
4013.25	700.76
4030.63	656.29
4032.88	701.89
4049.51	658.39
4052.51	703.04
4068.38	660.63
4072.14	704.2
4087.23	662.99
4091.77	705.37
4106.07	665.47
4111.39	706.53
4124.89	668.04
4131.02	707.69
4143.7	670.71
4150.65	708.86
4162.5	673.48
4166.85	699.98
4181.28	676.32
4181.67	687.05
4198.83	681.03
4200.06	679.25
4218.82	682.24
426.85	352.58
432.29	121.8
469.58	363.51
476.39	120.56

6

TABLE 1-continued

Y	Z
512.54	373.55
520.48	119.5
555.68	382.76
564.59	118.6
598.98	391.18
608.69	117.9
642.42	398.84
652.8	117.4
685.98	405.76
696.91	117.05
729.65	411.98
741.02	116.83
773.41	417.53
785.13	116.7
817.25	422.43
829.24	116.66
861.15	426.68
873.35	116.71
905.12	430.3
917.46	116.82
949.13	433.28
961.57	117
993.17	435.63

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 240.0, as shown in Table 2 and at **102** in FIG. 7.

TABLE 2

Y	Z
1008.69	127.06
1035.5	427.37
1055.31	127.7
1082.12	428.34
1101.92	128.52
1128.74	428.6
1148.53	129.52
1175.36	428.16
1195.14	130.67
1221.97	427.01
1241.75	131.9
1268.56	425.16
1288.36	133.13
1315.11	422.62
1334.97	134.31
1361.62	419.4
1381.58	135.49
1408.08	415.51
1428.18	136.76
1454.48	410.96
1474.78	138.17
1500.81	405.74
1521.38	139.78
1547.07	399.92
1567.97	141.55
1593.25	393.54
1614.55	143.52
1639.37	386.67
1661.12	145.73
1685.42	379.37
1707.68	148.24
1731.41	371.73
1754.21	151.1
1777.36	363.82
1800.72	154.39
1823.26	355.65
1847.19	158.14
1869.11	347.17
1893.62	162.36
1914.91	338.47
1940.02	166.93
1960.69	329.65
1986.38	171.86
2006.45	320.69

7

TABLE 2-continued

Y	Z
2032.7	177.22
2052.16	311.53
2078.96	181.86
2097.84	302.18
2125.33	176.99
2143.44	292.47
2171.7	172.12
2188.87	281.99
2218.07	167.24
2229.98	271.22
2264.44	162.37
2274.71	258.07
2310.8	157.5
2319.28	244.41
2348.36	224.64
2357.32	155.36
2394.98	224.64
2403.94	155.36
2441.61	224.64
2450.53	155.55
2487.43	232.42
2494.11	172.14
2533.33	240.64
2537.23	189.87
2579.49	209.55
2579.59	246.32
2617.72	235.62
375.12	256.43
375.38	211.58
3785.74	578.95
3812.53	591.49
3818.72	563.38
3844.17	595.82
3850.44	560.38
3875.93	599.02
3882.31	559.49
3907.76	601.6
3914.19	559.73
3939.6	603.87
3946.06	560.73
3971.45	606.08
3977.89	562.42
4003.3	608.33
4009.7	564.57
4035.15	610.63
4041.47	567.25
404.71	291.98
4066.99	612.96
4073.18	570.54
408.89	180.02
4098.83	615.3
4104.84	574.31
4130.68	617.66
4136.45	578.44
4162.52	620.02
4168.02	582.89
4194.36	622.41
4199.55	587.61
4226.19	624.81
4231.05	592.57
4258.03	627.25
4262.51	597.73
4289.86	629.73
4293.95	603.02
4321.69	632.26
4325.36	608.45
4353.51	634.85
4356.76	614.01
4385.33	637.5
4388.13	619.68
4417.14	640.23
4419.48	625.46
443.64	317.5
4448.95	643.04
4450.83	631.3
4480.74	645.95
4482.16	637.19
4512.52	649

8

TABLE 2-continued

Y	Z
4513.49	643.11
451.81	162.04
4544.29	652.24
4544.81	649.04
4576.04	655.48
485.93	337.08
497.07	150.97
529.74	353.01
543.1	143.56
574.36	366.5
589.41	138.24
619.51	378.1
635.87	134.33
665.05	388.12
682.41	131.46
710.86	396.76
728.98	129.39
756.89	404.15
775.58	127.96
803.09	410.42
822.2	127.05
849.42	415.64
868.82	126.58
895.85	419.88
915.44	126.47
942.36	423.21
962.07	126.64
988.91	425.68

The upper and lower surfaces **28**, **30** are defined at Y and Z positions corresponding substantially to the X position of 360.0, as shown in Table 3 and at **104** in FIG. 8.

TABLE 3

Y	Z
1086.84	190.93
1102.24	349.39
1198.8	193.2
1214.21	348.27
1310.75	195.91
1326.09	343.42
1422.7	198.87
1437.77	335.26
1534.62	202.55
1549.19	324.11
1646.51	207.09
1660.41	311.04
1758.38	212.21
1771.53	297.17
1870.25	217.19
1882.71	283.67
1898.79	281.75
1914.87	279.8
1930.94	277.82
1947.01	275.81
1963.08	273.77
1979.14	271.69
1982.18	220.41
1994.25	220.57
1995.2	269.58
2006.3	220.73
2011.25	267.45
2018.35	220.89
2027.3	265.29
2030.4	221.06
2042.44	221.23
2043.35	263.11
2054.49	221.41
2059.39	260.89
2066.54	221.59
2075.43	258.65
2078.58	221.78
2090.63	221.97
2091.46	256.38

US 8,196,858 B1

9

TABLE 3-continued

Y	Z
2102.68	222.16
2107.49	254.08
2114.72	222.36
2123.52	251.74
2126.77	222.57
2138.82	222.79
2139.54	249.35
2150.86	223.01
2155.55	246.93
2162.91	223.25
2171.56	244.47
2174.96	223.49
2187	223.73
2187.56	241.96
2199.05	223.96
2203.55	239.41
2211.1	224.17
2219.53	236.81
2223.14	224.35
2235.19	224.53
2235.51	234.15
2247.24	224.76
2251.48	231.44
2259.28	225
2267.43	228.68
2271.33	225.19
2283.38	225.34
3048.66	358.95
3081.81	392.98
3107.69	361.82
3136.06	416.99
3166.11	372.19
3191.42	438.32
3224.07	384.89
3247.35	458.1
3281.7	399.03
3303.68	476.74
3339.04	414.27
3360.32	494.4
3396.12	430.48
3417.24	511.15
3452.93	447.6
3474.42	526.97
3509.45	465.66
3531.88	541.76
3565.62	484.79
3589.64	555.29
3621.32	505.25
3647.8	567.02
3676.23	527.69
3706.54	575.16
3728.99	554.71
3826.84	489.85
3832.12	496.49
3840.92	499.08
3847.1	535.94
3847.74	526.8
3848.05	545.04
3849.86	517.9
3849.91	500.87
3850.83	553.76
3853.66	509.57
3855.48	561.64
3857.12	475.49
3858.96	502.36
3861.71	568.34
3869.1	573.75
3877.22	577.98
3885.81	581.18
3886.67	472.77
3894.67	583.54
3903.68	585.18
3912.79	586.24
3916.34	472.11
3921.94	586.79
3931.11	586.9
3940.27	586.64
3946.02	472.46

10

TABLE 3-continued

Y	Z
3949.42	586.05
3958.54	585.16
3967.64	584
3975.68	473.52
3976.7	582.6
3985.72	580.97
3994.7	579.14
4003.64	577.12
4005.32	475.08
4012.54	574.92
4017.44	517.03
4021.4	572.55
4023.21	516.81
4025.68	521.05
4030.21	570.02
4032.35	517.48
4033.84	525.22
4034.93	477.15
4038.98	567.34
4041.49	518.14
4041.93	529.53
4045.14	562.47
4046.03	553.34
4046.92	544.22
4047.81	535.09
4050.64	518.81
4059.78	519.47
4064.51	479.52
4068.92	520.14
4078.07	520.8
4087.21	521.46
4094.05	482.41
4096.36	522.12
4105.5	522.79
4114.64	523.46
4123.54	485.79
4123.79	524.12
4132.93	524.79
4142.07	525.47
4151.22	526.14
4152.98	489.55
4160.36	526.82
4169.5	527.51
4178.64	528.19
4182.39	493.62
4187.79	528.87
4196.93	529.56
4206.07	530.25
4211.75	497.96
4215.21	530.94
4224.35	531.63
4233.49	532.32
4241.07	502.55
4242.64	533.02
4251.78	533.71
4260.92	534.41
4270.06	535.12
4270.36	507.33
4279.2	535.83
4288.34	536.54
4297.48	537.26
4299.63	512.26
4306.62	537.98
4315.76	538.71
4324.9	539.45
4328.88	517.33
4334.03	540.19
4343.17	540.93
4352.31	541.68
4358.11	522.51
4361.44	542.44
4370.58	543.2
4379.72	543.97
4387.31	527.8
4388.85	544.75
4397.99	545.53
4407.12	546.32
4416.25	547.11

11

TABLE 3-continued

Y	Z
4416.5	533.19
4425.39	547.92
4434.52	548.73
4443.65	549.55
4445.68	538.63
4452.78	550.38
4461.91	551.21
4471.04	552.06
4474.85	544.1
4480.17	552.91
4489.29	553.77
4498.42	554.65
4504.02	549.59
4507.54	555.54
4516.66	556.5
4525.78	557.42
4533.18	555.15
4534.9	558.35
4544.02	559.3
4553.13	560.29
4562.25	561.12
559.57	250.22
639.33	201.09
658.26	300.04
750.95	192.4
767.61	323.9
862.89	189.6
878.62	338.46
974.87	189.52
990.3	346.44

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 480.0, as shown in Table 4 and at **106** in FIG. 9.

TABLE 4

Y	Z
1077.08	199.89
1082.96	322.95
1206.22	199.56
1212.07	325.39
1335.36	200.25
1341.18	322.85
1464.49	201.92
1470.13	315.91
1593.6	204.67
1598.83	305.33
1722.69	208.38
1727.32	292.36
1851.78	211.95
1855.65	277.99
1980.88	214.94
1983.77	261.74
2109.98	218.44
2111.6	243.44
2239.06	222.4
3867.94	400.76
3871.64	405.98
3878.13	408.22
3884.81	409.8
3891.56	411.11
3895.51	387.56
3898.33	412.24
3905.13	413.23
3911.94	414.1
3918.76	414.91
3922.87	385
3925.59	415.68
3932.42	416.38
3939.25	417.04
3946.09	417.66
3950.34	384.38
3952.94	418.25
3959.78	418.83

12

TABLE 4-continued

Y	Z
3966.63	419.39
3973.47	419.94
3977.82	384.81
3980.32	420.49
3987.17	421.03
3994.01	421.57
4000.86	422.1
4005.28	385.91
4007.71	422.62
4014.56	423.15
4021.41	423.67
4028.25	424.19
4032.72	387.49
4035.1	424.71
4041.95	425.22
4048.8	425.72
4055.65	426.22
4060.13	389.44
4062.5	426.72
4069.35	427.21
4076.2	427.7
4083.05	428.19
4087.52	391.73
4089.91	428.68
4096.76	429.17
4103.61	429.66
4110.46	430.15
4114.89	394.28
4117.31	430.64
4124.16	431.14
4131.01	431.63
4137.86	432.13
4142.21	397.27
4144.71	432.63
4151.56	433.14
4158.41	433.64
4165.26	434.15
4169.48	400.66
4172.11	434.66
4178.96	435.17
4185.81	435.69
4192.65	436.2
4196.72	404.35
4199.5	436.71
4206.35	437.23
4213.2	437.74
4220.05	438.26
4223.91	408.31
4226.9	438.78
4233.75	439.29
4240.6	439.81
4247.44	440.33
4251.07	412.53
4254.29	440.85
4261.14	441.38
4267.99	441.9
4274.84	442.43
4278.2	416.94
4281.69	442.96
4288.53	443.49
4295.38	444.03
4302.23	444.57
4305.3	421.5
4309.07	445.11
4315.92	445.66
4322.77	446.2
4329.61	446.76
4332.38	426.19
4336.46	447.31
4343.3	447.87
4350.15	448.43
4356.99	449
4359.44	431
4363.84	449.57
4370.68	450.14
4377.53	450.72
4384.37	451.3
4386.48	435.92

13

TABLE 4-continued

Y	Z
4391.21	451.89
4398.06	452.48
4404.9	453.07
4411.74	453.67
4413.51	440.91
4418.58	454.27
4425.43	454.87
4432.27	455.48
4439.11	456.1
4440.53	445.93
4445.95	456.73
4452.79	457.36
4459.62	457.99
4466.46	458.63
4467.54	450.99
4473.3	459.27
4480.14	459.92
4486.98	460.57
4493.81	461.23
4494.55	456.08
4500.65	461.9
4507.48	462.63
4514.31	463.31
4521.14	464.01
4521.54	461.25
4527.98	464.71
4534.81	465.43
4541.64	466.17
4548.47	466.77
690.16	215.29
699.61	273.01
818.87	205.28
825.87	299.61
947.95	201.53
954.09	314.78

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 600.0, as shown in Table 5 and at **108** in FIG. 10.

TABLE 5

Y	Z
1002.53	196.57
1008.08	303
1124.05	195.41
1129.33	310.96
1245.58	195.46
1250.83	313.53
1367.11	196.43
1372.33	311.41
1488.62	198.3
1493.7	305.16
1610.12	201.16
1614.84	295.48
1731.59	204.88
1735.78	283.56
1853.07	208.45
1856.59	270.31
1974.56	211.45
1977.18	255.29
2096.04	214.92
2097.53	238.35
2217.51	218.79
3909.04	311.66
3912.74	316.21
3918.68	318.32
3924.8	319.87
3930.99	321.12
3933.9	299.62
3937.21	322.15
3943.46	323.04
3949.72	323.86
3955.99	324.61
3959.06	297.15

14

TABLE 5-continued

Y	Z
3962.26	325.29
3968.54	325.93
3974.83	326.54
3981.11	327.12
3984.33	296.48
3987.4	327.69
3993.69	328.25
3999.97	328.8
4006.26	329.34
4009.62	296.89
4012.55	329.86
4018.84	330.38
4025.13	330.89
4031.43	331.39
4034.88	297.89
4037.72	331.89
4044.01	332.38
4050.31	332.86
4056.6	333.33
4060.12	299.45
4062.89	333.8
4069.19	334.25
4075.49	334.7
4081.78	335.15
4085.34	301.39
4088.08	335.59
4094.37	336.04
4100.67	336.48
4106.97	336.92
4110.53	303.61
4113.26	337.36
4119.56	337.81
4125.86	338.25
4132.15	338.7
4135.7	306.06
4138.45	339.16
4144.74	339.61
4151.04	340.07
4157.33	340.53
4160.84	308.72
4163.63	341
4169.92	341.46
4176.22	341.93
4182.51	342.4
4185.95	311.75
4188.81	342.87
4195.1	343.34
4201.4	343.82
4207.69	344.29
4211.02	315.08
4213.98	344.76
4220.28	345.23
4226.57	345.71
4232.87	346.18
4236.05	318.67
4239.16	346.66
4245.46	347.13
4251.75	347.61
4258.04	348.09
4261.04	322.5
4264.34	348.57
4270.63	349.05
4276.92	349.53
4283.22	350.02
4286.01	326.54
4289.51	350.51
4295.8	351
4302.1	351.49
4308.39	351.99
4310.95	330.73
4314.68	352.49
4320.97	352.99
4327.26	353.49
4333.56	354
4335.86	335.06
4339.85	354.51
4346.14	355.02
4352.43	355.54

15

TABLE 5-continued

Y	Z
4358.72	356.06
4360.76	339.5
4365.01	356.59
4371.3	357.12
4377.59	357.65
4383.88	358.18
4385.64	344.03
4390.17	358.72
4396.46	359.26
4402.74	359.81
4409.03	360.36
4410.51	348.61
4415.32	360.92
4421.61	361.48
4427.89	362.04
4434.18	362.6
4435.37	353.22
4440.47	363.18
4446.75	363.76
4453.04	364.35
4459.32	364.95
4460.22	357.88
4465.6	365.54
4471.89	366.14
4478.17	366.74
4484.45	367.34
4485.07	362.58
4490.73	367.96
4497.02	368.59
4503.29	369.25
4509.57	369.89
4509.91	367.32
4515.85	370.54
4522.13	371.19
4528.4	371.88
4534.68	372.41
759.89	208.82
768.68	263.12
881.04	199.75
887.44	288.44

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 720.0, as shown in Table 6 and at **110** in FIG. 11.

TABLE 6

Y	Z
1057.5	189.57
1062.37	288.34
1173.27	190.72
1177.84	296.68
1289.03	192.65
1293.56	299.84
1404.79	194.98
1409.32	298.43
1520.53	197.72
1524.98	293.14
1636.26	200.95
1640.44	284.67
1751.98	204.55
1755.73	274.07
1867.72	207.66
1870.89	262.15
1983.47	209.9
1985.86	248.54
2099.23	212.16
2100.61	233.12
2214.98	214.62
3950.14	222.57
3953.72	226.6
3959.07	228.71
3964.63	230.2
3970.28	231.29
3972.28	211.68

16

TABLE 6-continued

Y	Z
3975.97	232.22
3981.66	233.04
3987.38	233.76
3993.09	234.43
3995.23	209.25
3998.82	235.05
4004.54	235.65
4010.27	236.23
4016	236.8
4018.31	208.5
4021.73	237.35
4027.46	237.88
4033.2	238.38
4038.93	238.88
4041.41	208.72
4044.67	239.37
4050.41	239.84
4056.14	240.31
4061.88	240.75
4064.48	209.63
4067.63	241.19
4073.37	241.61
4079.11	242.02
4084.85	242.43
4087.54	210.97
4090.59	242.83
4096.34	243.22
4102.08	243.62
4107.82	244.01
4110.56	212.81
4113.57	244.41
4119.31	244.8
4125.05	245.2
4130.8	245.61
4133.55	214.98
4136.54	246.01
4142.28	246.42
4148.03	246.83
4153.77	247.24
4156.52	217.39
4159.51	247.66
4165.25	248.08
4170.99	248.51
4176.73	248.93
4179.47	219.98
4182.47	249.36
4188.22	249.79
4193.96	250.22
4199.7	250.65
4202.4	222.74
4205.44	251.08
4211.18	251.51
4216.92	251.94
4222.66	252.37
4225.3	225.75
4228.4	252.8
4234.14	253.23
4239.88	253.67
4245.62	254.1
4248.16	229.01
4251.36	254.53
4257.1	254.97
4262.84	255.4
4268.59	255.84
4270.99	232.47
4274.33	256.28
4280.07	256.72
4285.81	257.16
4291.55	257.61
4293.8	236.14
4297.29	258.05
4303.02	258.5
4308.76	258.95
4314.5	259.4
4316.57	239.96
4320.24	259.86
4325.98	260.31
4331.72	260.77

17

TABLE 6-continued

Y	Z
4337.46	261.24
4339.32	243.92
4343.2	261.7
4348.93	262.17
4354.67	262.64
4360.41	263.12
4362.06	247.98
4366.15	263.6
4371.88	264.08
4377.62	264.56
4383.36	265.05
4384.78	252.11
4389.09	265.54
4394.83	266.04
4400.56	266.54
4406.3	267.04
4407.5	256.29
4412.03	267.55
4417.77	268.06
4423.5	268.57
4429.23	269.09
4430.2	260.5
4434.97	269.61
4440.7	270.14
4446.43	270.67
4452.16	271.22
4452.9	264.77
4457.89	271.77
4463.62	272.33
4469.35	272.89
4475.08	273.45
4475.59	269.09
4480.81	274.01
4486.54	274.58
4492.27	275.16
4497.99	275.77
4498.28	273.39
4503.72	276.36
4509.45	276.96
4515.17	277.58
4520.9	278.06
826.19	197.36
834.61	248.63
941.73	190.57
947.55	273.66

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 840.0, as shown in Table 7 and at **112** in FIG. **12**.

TABLE 7

Y	Z
1002.27	180.87
1007.37	258.37
1112.55	182.29
1116.63	273.28
1222.79	186.01
1226.56	282.08
1333.01	190.03
1336.78	285.9
1443.24	193.86
1447.07	285.24
1553.47	197.56
1557.28	280.96
1663.71	201.2
1667.34	273.74
1773.95	204.66
1777.24	264.5
1884.22	207.25
1887.03	253.94
1994.5	208.61
1996.65	241.75
2104.8	209.51
2106.07	227.88

18

TABLE 7-continued

Y	Z
2215.09	210.38
4086.08	149.58
4090.29	149.87
4094.5	150.16
4098.71	150.45
4102.93	150.74
4107.14	151.02
4111.35	151.3
4115.57	151.59
4119.78	151.87
4123.99	152.15
4128.21	152.44
4132.42	152.73
4136.63	153.02
4140.84	153.31
4141.74	124.32
4145.06	153.61
4149.27	153.9
4153.48	154.2
4157.1	125.8
4157.69	154.5
4161.91	154.81
4166.12	155.12
4170.33	155.42
4172.44	127.46
4174.54	155.73
4178.75	156.05
4182.96	156.36
4187.17	156.67
4187.76	129.27
4191.38	156.99
4195.59	157.3
4199.81	157.62
4203.07	131.18
4204.02	157.93
4208.23	158.25
4212.44	158.57
4216.65	158.88
4218.37	133.2
4220.86	159.2
4225.07	159.51
4229.28	159.83
4233.49	160.14
4233.66	135.3
4237.7	160.46
4241.91	160.78
4246.13	161.09
4248.93	137.5
4250.34	161.41
4254.55	161.73
4258.76	162.05
4262.97	162.36
4264.19	139.78
4267.18	162.68
4271.39	163
4275.6	163.33
4279.44	142.15
4279.81	163.65
4284.02	163.97
4288.23	164.29
4292.44	164.62
4294.67	144.59
4296.65	164.94
4300.86	165.27
4305.07	165.6
4309.28	165.92
4309.9	147.11
4313.49	166.25
4317.7	166.59
4321.91	166.92
4325.11	149.69
4326.12	167.25
4330.33	167.59
4334.54	167.92
4338.75	168.26
4340.31	152.34
4342.96	168.6
4347.17	168.94

19

TABLE 7-continued

Y	Z
4351.38	169.29
4355.5	155.03
4355.58	169.63
4359.79	169.98
4364	170.33
4368.21	170.68
4370.69	157.76
4372.42	171.03
4376.62	171.39
4380.83	171.74
4385.04	172.1
4385.87	160.52
4389.25	172.46
4393.45	172.83
4397.66	173.19
4401.05	163.31
4401.87	173.56
4406.07	173.93
4410.28	174.3
4414.49	174.67
4416.22	166.13
4418.69	175.05
4422.9	175.43
4427.1	175.81
4431.31	176.19
4431.38	168.99
4435.51	176.58
4439.72	176.97
4443.92	177.36
4446.54	171.87
4448.13	177.76
4452.33	178.16
4456.53	178.58
4460.73	179
4461.7	174.74
4464.94	179.43
4469.14	179.85
4473.34	180.27
4476.87	177.58
4477.54	180.69
4481.74	181.12
4485.94	181.55
4490.14	182
4492.02	180.51
4494.34	182.45
4498.54	182.9
4502.74	183.35
4507.11	183.71
892.09	185.17
900.01	233.46

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 960.0, as shown in Table 8 and at **114** in FIG. 13.

TABLE 8

Y	Z
1010.85	170.95
1015.43	232.32
1037.07	170.84
1041.03	237.97
1063.28	171.16
1066.76	242.99
1089.49	171.72
1092.59	247.47
1115.69	172.6
1118.5	251.45
1141.88	173.69
1144.47	255
1168.07	175
1170.49	258.18
1194.24	176.48
1196.56	260.99
1220.41	178.07

20

TABLE 8-continued

Y	Z
1222.65	263.47
1246.57	179.69
1248.78	265.62
1272.74	181.3
1274.93	267.46
1298.91	182.89
1301.1	269.01
1325.07	184.45
1327.29	270.28
1351.25	185.95
1353.48	271.26
1377.42	187.41
1379.69	271.96
1403.6	188.82
1405.9	272.37
1429.78	190.18
1432.11	272.52
1455.96	191.49
1458.33	272.39
1482.15	192.76
1484.54	272.06
1508.33	193.98
1510.75	271.53
1534.52	195.17
1536.96	270.8
1560.71	196.31
1563.16	269.88
1586.9	197.42
1589.35	268.79
1613.1	198.49
1615.53	267.53
1639.29	199.52
1641.71	266.1
1665.49	200.51
1667.88	264.52
1691.69	201.47
1694.04	262.83
1717.88	202.39
1720.19	261.02
1744.09	203.25
1746.34	259.09
1770.29	204.06
1772.47	257.09
1796.49	204.79
1798.6	254.96
1822.7	205.45
1824.72	252.75
1848.91	206.02
1850.84	250.49
1875.12	206.49
1876.95	248.17
1901.33	206.84
1903.06	245.75
1927.55	207.08
1929.15	243.22
1953.76	207.25
1955.23	240.58
1979.98	207.32
1981.3	237.83
2006.19	207.32
2007.37	234.99
2032.41	207.26
2033.42	232.08
2058.62	207.16
2059.46	229.08
2084.84	207.03
2085.49	225.95
2111.05	206.87
2111.5	222.65
2137.27	206.75
2137.48	219.15
2163.42	215.4
2163.48	206.59
2189.32	211.37
2189.7	206.37
2215.18	206.84
919.81	192.98
932.43	175.87

21

TABLE 8-continued

Y	Z
940.67	208.36
958.47	172.92
964.97	218.14
984.65	171.58
990.03	225.84

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 1080.0, as shown in Table 9 and at **116** in FIG. **14**.

TABLE 9

Y	Z
1007.07	193.254
1024.74	160.681
1030	202.825
1049.59	160.026
1053.66	210.444
1074.45	160.037
1077.66	216.894
1099.3	160.529
1101.86	222.568
1124.14	161.422
1126.2	227.615
1148.97	162.56
1150.64	232.134
1173.78	164.04
1175.17	236.176
1198.58	165.756
1199.76	239.807
1223.36	167.706
1224.4	243.068
1248.13	169.846
1249.09	245.98
1272.88	172.092
1273.81	248.57
1297.64	174.345
1298.56	250.847
1322.4	176.564
1323.34	252.835
1347.16	178.732
1348.14	254.541
1371.93	180.831
1372.95	255.974
1396.7	182.843
1397.78	257.136
1421.49	184.772
1422.62	258.017
1446.27	186.615
1447.47	258.612
1471.07	188.371
1472.33	258.946
1495.87	190.042
1497.19	258.998
1520.68	191.634
1522.04	258.881
1545.49	193.15
1546.9	258.576
1570.3	194.593
1571.75	258.093
1595.12	195.967
1596.6	257.438
1619.95	197.267
1621.44	256.625
1644.77	198.493
1646.28	255.66
1669.6	199.644
1671.11	254.544
1694.44	200.721
1695.94	253.288
1719.27	201.725
1720.76	251.927
1744.11	202.661
1745.57	250.447
1768.96	203.491

22

TABLE 9-continued

Y	Z
1770.38	248.857
1793.8	204.254
1795.18	247.221
1818.65	204.914
1819.97	245.425
1843.5	205.47
1844.76	243.559
1868.36	205.917
1869.54	241.639
1893.21	206.237
1894.32	239.656
1918.07	206.431
1919.09	237.578
1942.92	206.481
1943.85	235.391
1967.78	206.439
1968.61	233.1
1992.64	206.284
1993.35	230.715
2017.49	206.03
2018.08	228.25
2042.35	205.68
2042.81	225.723
2067.2	205.252
2067.53	223.109
2092.05	204.758
2092.24	220.362
2116.91	204.21
2116.92	217.433
2141.58	214.277
2141.76	203.697
2166.19	210.847
2166.61	203.148
2190.77	207.096
2191.46	202.511
2215.28	202.88
987.454	178.462
999.992	162.827

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 1200.0, as shown in Table 10 and at **118** in FIG. **15**.

TABLE 10

Y	Z
1055.69	164.888
1066.44	149.953
1074.47	178.648
1089.88	148.453
1096.08	187.886
1113.39	148.431
1118.36	195.354
1136.88	149.063
1140.98	201.736
1160.36	150.14
1163.79	207.402
1183.82	151.587
1186.75	212.454
1207.27	153.283
1209.81	216.994
1230.68	155.35
1232.96	221.079
1254.07	157.678
1256.17	224.77
1277.44	160.254
1279.44	228.104
1300.77	163.041
1302.75	231.099
1324.1	165.941
1326.1	233.787
1347.43	168.832
1349.48	236.182
1370.76	171.658
1372.89	238.301

23

TABLE 10-continued

Y	Z
1394.11	174.403
1396.33	240.151
1417.46	177.049
1419.78	241.739
1440.83	179.576
1443.24	243.065
1464.21	181.979
1466.73	244.113
1487.61	184.264
1490.22	244.879
1511.01	186.425
1513.72	245.39
1534.43	188.466
1537.22	245.615
1557.86	190.391
1560.73	245.7
1581.29	192.207
1584.23	245.615
1604.73	193.918
1607.74	245.37
1628.18	195.524
1631.24	244.972
1651.64	197.024
1654.74	244.432
1675.11	198.414
1678.23	243.757
1698.58	199.694
1701.72	242.946
1722.05	200.864
1725.21	242.009
1745.53	201.92
1748.69	240.971
1769.02	202.877
1772.17	239.82
1792.51	203.698
1795.64	238.567
1816	204.416
1819.11	237.298
1839.5	205.004
1842.57	235.827
1863	205.466
1866.03	234.303
1886.51	205.796
1889.48	232.721
1910.01	205.978
1912.93	231.07
1933.52	206.019
1936.37	229.325
1957.02	205.888
1959.8	227.479
1980.52	205.644
1983.22	225.533
2004.03	205.269
2006.64	223.507
2027.53	204.765
2030.05	221.415
2051.02	204.131
2053.46	219.27
2074.52	203.382
2076.86	217.036
2098.01	202.533
2100.24	214.659
2121.49	201.609
2123.61	212.082
2144.98	200.693
2146.94	209.254
2168.47	199.755
2170.24	206.119
2191.95	198.708
2193.48	202.624
2215.43	197.646

24

TABLE 11

Y	Z
1092.2	160.051
1104.7	146.699
1109.84	173.963
1127.42	145.568
1130.65	183.156
1150.18	145.768
1152.16	190.576
1172.92	146.578
1174.01	196.918
1195.64	147.815
1196.06	202.558
1218.25	207.59
1218.35	149.397
1240.55	212.119
1241.03	151.22
1262.94	216.204
1263.68	153.42
1285.4	219.901
1286.31	155.859
1307.91	223.249
1308.91	158.548
1330.46	226.267
1331.48	161.438
1353.06	228.985
1354.04	164.43
1375.69	231.418
1376.6	167.403
1398.34	233.583
1399.18	170.305
1421.02	235.487
1421.76	173.124
1443.72	237.134
1444.35	175.841
1466.43	238.528
1466.96	178.436
1489.16	239.653
1489.59	180.909
1511.9	240.498
1512.22	183.257
1534.65	241.094
1534.87	185.484
1557.41	241.405
1557.53	187.587
1580.17	241.583
1580.2	189.574
1602.88	191.449
1602.92	241.598
1625.57	193.217
1625.68	241.461
1648.27	194.879
1648.44	241.173
1670.97	196.431
1671.19	240.753
1693.69	197.873
1693.94	240.204
1716.41	199.202
1716.69	239.525
1739.13	200.417
1739.43	238.723
1761.86	201.52
1762.18	237.825
1784.6	202.519
1784.91	236.814
1807.34	203.371
1807.64	235.704
1830.09	204.131
1830.37	234.578
1852.83	204.757
1853.09	233.264
1875.59	205.253
1875.81	231.887
1898.34	205.612
1898.52	230.454
1921.1	205.819
1921.23	228.951
1943.86	205.879
1943.93	227.36
1966.61	205.773

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 1320.0, as shown in Table 11 and at **120** in FIG. 16.

25

TABLE 11-continued

Y	Z
1966.63	225.669
1989.31	223.883
1989.37	205.55
2011.99	222.018
2012.13	205.188
2034.67	220.091
2034.88	204.694
2057.34	218.115
2057.63	204.064
2080.01	216.057
2080.37	203.316
2102.66	213.858
2103.12	202.459
2125.29	211.465
2125.85	201.519
2147.89	208.819
2148.59	200.595
2170.46	205.866
2171.33	199.622
2192.97	202.551
2194.06	198.536
2215.42	198.82

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 1440.0, as shown in Table 12 and at **122** in FIG. **17**.

TABLE 12

Y	Z
1119.7	159.834
1131.87	146.79
1136.9	173.426
1154.03	145.702
1157.18	182.434
1176.23	145.915
1178.15	189.715
1198.42	146.723
1199.46	195.946
1220.59	147.945
1220.95	201.493
1242.59	206.448
1242.74	149.502
1264.34	210.912
1264.87	151.292
1286.18	214.943
1286.96	153.439
1308.08	218.596
1309.04	155.818
1330.03	221.908
1331.08	158.433
1352.03	224.898
1353.11	161.24
1374.07	227.597
1375.12	164.14
1396.14	230.017
1397.14	167.024
1418.23	232.175
1419.16	169.842
1440.35	234.079
1441.19	172.583
1462.49	235.734
1463.23	175.229
1484.65	237.141
1485.29	177.763
1506.82	238.284
1507.36	180.183
1529.01	239.155
1529.44	182.489
1551.2	239.783
1551.54	184.681
1573.4	240.135
1573.64	186.759
1595.6	240.356
1595.76	188.729

26

TABLE 12-continued

Y	Z
1617.81	240.417
1617.88	190.596
1640.01	240.33
1640.01	192.364
1662.15	194.033
1662.21	240.099
1684.3	195.601
1684.41	239.734
1706.45	197.068
1706.61	239.245
1728.61	198.428
1728.8	238.63
1750.78	199.685
1750.99	237.894
1772.95	200.838
1773.18	237.065
1795.13	201.892
1795.36	236.126
1817.31	202.814
1817.54	235.09
1839.5	203.646
1839.71	234.039
1861.69	204.355
1861.88	232.804
1883.89	204.938
1884.05	231.508
1906.08	205.384
1906.21	230.157
1928.28	205.68
1928.36	228.738
1950.49	205.832
1950.52	227.233
1972.66	225.63
1972.69	205.825
1994.8	223.935
1994.89	205.701
2016.93	222.163
2017.09	205.443
2039.06	220.329
2039.29	205.056
2061.18	218.449
2061.49	204.535
2083.29	216.487
2083.68	203.895
2105.4	214.39
2105.87	203.151
2127.48	212.101
2128.06	202.324
2149.54	209.567
2150.24	201.502
2171.56	206.733
2172.43	200.616
2193.53	203.546
2194.61	199.621
2215.44	199.952

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 1560.0, as shown in Table 13 and at **124** in FIG. **18**.

TABLE 13

Y	Z
1147.19	159.615
1159.03	146.881
1163.95	172.889
1180.64	145.837
1183.7	181.711
1202.29	146.063
1204.14	188.854
1223.92	146.868
1224.9	194.974
1245.53	148.076
1245.85	200.428
1266.94	205.305

27

TABLE 13-continued

Y	Z
1267.13	149.607
1288.13	209.704
1288.7	151.364
1309.41	213.681
1310.25	153.458
1330.75	217.29
1331.77	155.776
1352.15	220.568
1353.27	158.318
1373.59	223.53
1374.74	161.042
1395.07	226.209
1396.2	163.852
1416.59	228.616
1417.67	166.645
1438.12	230.769
1439.14	169.379
1459.69	232.672
1460.63	172.043
1481.27	234.333
1482.12	174.618
1502.87	235.753
1503.62	177.09
1524.49	236.916
1525.14	179.457
1546.11	237.813
1546.67	181.721
1567.75	238.473
1568.21	183.877
1589.39	238.864
1589.76	185.931
1611.04	239.128
1611.32	187.884
1632.69	239.237
1632.88	189.744
1654.33	239.199
1654.46	191.512
1675.98	239.022
1676.04	193.188
1697.62	238.716
1697.63	194.772
1719.22	196.262
1719.27	238.287
1740.83	197.655
1740.91	237.735
1762.43	198.952
1762.54	237.068
1784.05	200.154
1784.18	236.306
1805.67	201.265
1805.81	235.439
1827.29	202.254
1827.43	234.477
1848.92	203.161
1849.06	233.5
1870.55	203.953
1870.67	232.345
1892.19	204.622
1892.29	231.129
1913.83	205.157
1913.89	229.86
1935.47	205.541
1935.5	228.524
1957.1	227.105
1957.12	205.788
1978.69	225.591
1978.76	205.873
2000.28	223.987
2000.41	205.851
2021.86	222.307
2022.06	205.699
2043.44	220.567
2043.7	205.417
2065.01	218.782
2065.34	205.005
2086.58	216.918
2086.99	204.476
2108.13	214.921

28

TABLE 13-continued

Y	Z
2108.62	203.844
2129.67	212.738
2130.26	203.127
2151.18	210.315
2151.89	202.406
2172.66	207.6
2173.53	201.612
2194.09	204.54
2195.15	200.705
2215.46	201.085

The upper and lower surfaces **28**, **30** are defined at Y and Z positions corresponding substantially to the X position of 1680.0, as shown in Table 14 and at **126** in FIG. **19**.

TABLE 14

Y	Z
1174.69	159.39
1186.2	146.97
1191	172.35
1207.26	145.97
1210.23	180.99
1228.35	146.21
1230.12	187.99
1249.42	147.01
1250.34	194
1270.48	148.21
1270.74	199.36
1291.27	204.16
1291.52	149.71
1311.92	208.5
1312.54	151.44
1332.64	212.42
1333.53	153.48
1353.43	215.98
1354.5	155.73
1374.27	219.23
1375.45	158.2
1395.15	222.16
1396.38	160.85
1416.08	224.82
1417.29	163.56
1437.03	227.21
1438.21	166.27
1458.01	229.36
1459.13	168.92
1479.02	231.27
1480.07	171.5
1500.05	232.93
1501.01	174.01
1521.09	234.37
1521.96	176.42
1542.15	235.55
1542.93	178.73
1563.22	236.47
1563.9	180.95
1584.3	237.16
1584.88	183.08
1605.39	237.59
1605.88	185.1
1626.47	237.9
1626.88	187.04
1647.57	238.06
1647.89	188.89
1668.66	238.07
1668.91	190.66
1689.75	237.94
1689.93	192.34
1710.84	237.7
1710.96	193.94
1731.93	237.33
1732	195.46
1753.01	236.84
1753.04	196.88

29

TABLE 14-continued

Y	Z
1774.09	198.22
1774.1	236.24
1795.15	199.47
1795.18	235.55
1816.21	200.64
1816.25	234.75
1837.27	201.69
1837.33	233.86
1858.34	202.68
1858.4	232.96
1879.42	203.55
1879.46	231.89
1900.49	204.31
1900.52	230.75
1921.58	204.93
1921.58	229.56
1942.64	228.31
1942.66	205.4
1963.69	226.98
1963.75	205.74
1984.73	225.55
1984.84	205.93
2005.77	224.04
2005.93	206
2026.8	222.45
2027.02	205.96
2047.83	220.81
2048.12	205.78
2068.85	219.12
2069.2	205.47
2089.87	217.35
2090.29	205.06
2110.87	215.45
2111.38	204.54
2131.86	213.37
2132.46	203.93
2152.83	211.06
2153.54	203.31
2173.76	208.47
2174.62	202.61
2194.64	205.54
2195.7	201.79
2215.47	202.22

The upper and lower surfaces **28**, **30** are defined at Y and Z positions corresponding substantially to the X position of 1800.0, as shown in Table 15 and at **128** in FIG. **20**.

TABLE 15

Y	Z
1202.19	159.171
1213.37	147.061
1218.05	171.812
1233.88	146.105
1236.76	180.264
1254.41	146.356
1256.11	187.131
1274.93	147.158
1275.78	193.029
1295.43	148.337
1295.63	198.298
1315.61	203.02
1315.92	149.816
1335.7	207.289
1336.38	151.508
1355.87	211.158
1356.82	153.499
1376.1	214.679
1377.24	155.694
1396.38	217.885
1397.64	158.091
1416.71	220.793
1418.01	160.648
1437.08	223.432

30

TABLE 15-continued

Y	Z
1438.38	163.277
1457.48	225.814
1458.75	165.891
1477.9	227.954
1479.13	168.456
1498.35	229.859
1499.51	170.962
1518.82	231.532
1519.9	173.396
1539.3	232.978
1540.3	175.746
1559.81	234.179
1560.71	178.008
1580.32	235.13
1581.14	180.186
1600.84	235.855
1601.57	182.273
1621.37	236.324
1622	184.276
1641.91	236.674
1642.45	186.196
1662.44	236.875
1662.9	188.039
1682.98	236.939
1683.36	189.805
1703.52	236.868
1703.83	191.497
1724.05	236.677
1724.3	193.112
1744.59	236.37
1744.78	194.65
1765.12	235.946
1765.27	196.107
1785.65	235.411
1785.76	197.485
1806.18	234.787
1806.25	198.783
1826.7	234.064
1826.75	200.009
1847.22	233.251
1847.26	201.131
1867.74	232.424
1867.77	202.191
1888.25	231.426
1888.28	203.147
1908.76	230.371
1908.8	203.989
1929.27	229.267
1929.33	204.7
1949.77	228.098
1949.86	205.263
1970.27	226.851
1970.39	205.692
1990.76	225.513
1990.92	205.983
2011.25	224.09
2011.46	206.152
2031.73	222.595
2031.99	206.21
2052.21	221.044
2052.53	206.14
2072.68	219.449
2073.07	205.946
2093.15	217.78
2093.6	205.636
2113.61	215.984
2114.13	205.228
2134.05	214.012
2134.66	204.737
2154.47	211.812
2155.19	204.217
2174.86	209.334
2175.72	203.601
2195.2	206.53
2196.24	202.872
2215.49	203.349

31

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 1920.0, as shown in Table 16 and at **130** in FIG. **21**.

TABLE 16

Y	Z
1229.68	158.946
1240.54	147.15
1245.1	171.272
1260.5	146.238
1263.28	179.54
1280.47	146.503
1282.09	186.268
1300.44	147.304
1301.21	192.056
1320.39	148.467
1320.51	197.232
1339.95	201.876
1340.32	149.922
1359.48	206.081
1360.23	151.581
1379.1	209.896
1380.12	153.519
1398.77	213.373
1399.98	155.653
1418.5	216.544
1419.83	157.978
1438.27	219.424
1439.66	160.452
1458.08	222.044
1459.48	162.989
1477.92	224.413
1479.3	165.515
1497.79	226.547
1499.12	167.995
1517.68	228.452
1518.96	170.423
1537.59	230.133
1538.8	172.786
1557.52	231.59
1558.65	175.074
1577.46	232.812
1578.51	177.284
1597.42	233.788
1598.38	179.417
1617.39	234.546
1618.25	181.472
1637.36	235.054
1638.14	183.449
1657.34	235.446
1658.03	185.353
1677.32	235.695
1677.92	187.187
1697.3	235.808
1697.83	188.953
1717.28	235.793
1717.74	190.653
1737.26	235.659
1737.65	192.283
1757.25	235.412
1757.57	193.844
1777.22	235.051
1777.5	195.334
1797.2	234.584
1797.43	196.752
1817.17	234.029
1817.36	198.1
1837.14	233.377
1837.31	199.376
1857.11	232.638
1857.25	200.574
1877.08	231.885
1877.2	201.705
1897.04	230.966
1897.16	202.743
1917	229.992
1917.12	203.673
1936.95	228.97
1937.08	204.471

32

TABLE 16-continued

Y	Z
1956.91	227.885
1957.05	205.124
1976.85	226.724
1977.03	205.646
1996.8	225.474
1997	206.029
2016.73	224.142
2016.98	206.305
2036.67	222.739
2036.97	206.465
2056.59	221.283
2056.95	206.501
2076.52	219.783
2076.93	206.414
2096.44	218.211
2096.91	206.216
2116.35	216.516
2116.89	205.92
2136.24	214.649
2136.87	205.539
2156.11	212.56
2156.84	205.123
2175.96	210.202
2176.82	204.596
2195.76	207.524
2196.79	203.956
2215.51	204.481

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 2040.0, as shown in Table 17 and at **132** in FIG. **22**.

TABLE 17

Y	Z
1257.18	158.719
1267.72	147.24
1272.15	170.731
1287.12	146.372
1289.8	178.815
1306.54	146.652
1308.07	185.405
1325.95	147.449
1326.65	191.083
1345.34	148.599
1345.4	196.166
1364.28	200.732
1364.72	150.029
1383.26	204.873
1384.08	151.654
1402.32	208.635
1403.41	153.541
1421.44	212.067
1422.73	155.613
1440.61	215.202
1442.02	157.865
1459.83	218.056
1461.3	160.257
1479.08	220.656
1480.58	162.703
1498.36	223.011
1499.85	165.138
1517.67	225.139
1519.13	167.534
1537.01	227.045
1538.41	169.885
1556.36	228.732
1557.7	172.178
1575.73	230.203
1577	174.404
1595.12	231.443
1596.31	176.561
1614.52	232.446
1615.62	178.651
1633.93	233.236

33

TABLE 17-continued

Y	Z	
1634.94	180.67	
1653.35	233.784	5
1654.27	182.622	
1672.77	234.219	
1673.61	184.51	
1692.2	234.514	
1692.95	186.335	
1711.62	234.679	10
1712.3	188.101	
1731.05	234.716	
1731.65	189.808	
1750.48	234.641	
1751	191.454	
1769.9	234.454	15
1770.37	193.039	
1789.33	234.156	
1789.73	194.56	
1808.75	233.756	
1809.11	196.019	
1828.17	233.27	20
1828.48	197.417	
1847.59	232.689	
1847.86	198.748	
1867	232.025	
1867.25	200.008	
1886.42	231.346	25
1886.64	201.217	
1905.83	230.507	
1906.03	202.338	
1925.23	229.614	
1925.43	203.356	
1944.64	228.674	
1944.84	204.243	30
1964.04	227.672	
1964.25	204.984	
1983.44	226.597	
1983.67	205.597	
2002.83	225.436	
2003.09	206.081	35
2022.22	224.194	
2022.51	206.454	
2041.6	222.883	
2041.94	206.719	
2060.98	221.521	
2061.37	206.863	40
2080.35	220.116	
2080.79	206.883	
2099.72	218.641	
2100.22	206.796	
2119.09	217.047	
2119.65	206.612	45
2138.43	215.285	
2139.07	206.343	
2157.76	213.308	
2158.49	206.03	
2177.06	211.069	
2177.92	205.592	
2196.31	208.519	50
2197.34	205.04	
2215.52	205.613	

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 2160.0, as shown in Table 18 and at **134** in FIG. **23**.

TABLE 18

Y	Z	
1284.67	158.489	
1294.9	147.329	
1299.19	170.189	
1313.74	146.506	
1316.32	178.089	
1332.61	146.799	65
1334.05	184.541	

34

TABLE 18-continued

Y	Z	
1351.47	147.594	
1352.08	190.109	
1370.28	195.099	
1370.31	148.731	
1388.61	199.588	
1389.13	150.135	
1407.04	203.664	
1407.93	151.727	
1425.54	207.372	
1426.71	153.562	
1444.11	210.76	
1445.48	155.574	
1462.72	213.86	
1464.22	157.753	
1481.38	216.687	
1482.95	160.062	
1500.08	219.267	
1501.68	162.418	
1518.8	221.61	
1520.41	164.763	
1537.56	223.732	
1539.14	167.075	
1556.33	225.638	
1557.87	169.347	
1575.13	227.331	
1576.61	171.569	
1593.94	228.815	
1595.36	173.734	
1612.77	230.075	
1614.11	175.839	
1631.62	231.104	
1632.88	177.884	
1650.47	231.925	
1651.64	179.87	
1669.34	232.513	
1670.42	181.796	
1688.2	232.992	
1689.2	183.668	
1707.07	233.334	
1707.98	185.484	
1725.94	233.549	
1726.77	187.25	
1744.81	233.64	
1745.57	188.964	
1763.69	233.621	
1764.36	190.624	
1782.56	233.495	
1783.17	192.233	
1801.43	233.262	
1801.98	193.786	
1820.3	232.926	
1820.79	195.286	
1839.17	232.51	
1839.61	196.734	
1858.03	232.003	
1858.43	198.125	
1876.9	231.411	
1877.25	199.453	
1895.76	230.808	
1896.08	200.731	
1914.61	230.048	
1914.92	201.934	
1933.47	229.235	
1933.76	203.037	
1952.32	228.377	
1952.6	204.013	
1971.17	227.459	
1971.46	204.845	
1990.02	226.47	
1990.32	205.549	
2008.86	225.397	
2009.18	206.133	
2027.7	224.246	
2028.05	206.605	
2046.53	223.028	
2046.91	206.976	
2065.36	221.76	
2065.79	207.223	

35

TABLE 18-continued

Y	Z
2084.19	220.45
2084.66	207.353
2103.01	219.072
2103.53	207.376
2121.82	217.579
2122.4	207.304
2140.62	215.922
2141.27	207.147
2159.4	214.057
2160.15	206.938
2178.15	211.936
2179.01	206.587
2196.87	209.513
2197.88	206.124
2215.54	206.745

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 2280.0, as shown in Table 19 and at **136** in FIG. **24**.

TABLE 19

Y	Z
1312.16	158.26
1322.08	147.42
1326.23	169.65
1340.37	146.64
1342.83	177.36
1358.69	146.95
1360.03	183.68
1376.99	147.74
1377.51	189.13
1395.16	194.03
1395.27	148.86
1412.94	198.44
1413.54	150.24
1430.81	202.45
1431.79	151.8
1448.76	206.11
1450.02	153.58
1466.77	209.45
1468.23	155.54
1484.83	212.52
1486.43	157.64
1502.94	215.32
1504.61	159.87
1521.07	217.88
1522.79	162.13
1539.24	220.21
1540.97	164.39
1557.44	222.32
1559.15	166.62
1575.66	224.23
1577.34	168.81
1593.9	225.93
1595.53	170.96
1612.15	227.43
1613.73	173.06
1630.43	228.71
1631.93	175.12
1648.71	229.76
1650.14	177.12
1667.01	230.62
1668.35	179.07
1685.32	231.24
1686.57	180.97
1703.63	231.76
1704.79	182.83
1721.94	232.15
1723.02	184.63
1740.26	232.42
1741.26	186.4
1758.58	232.57
1759.49	188.12
1776.89	232.6

36

TABLE 19-continued

Y	Z
1777.73	189.8
1795.21	232.54
1795.98	191.43
1813.53	232.37
1814.23	193.01
1831.85	232.1
1832.48	194.55
1850.16	231.75
1850.74	196.04
1868.47	231.32
1869	197.49
1886.78	230.8
1887.26	198.89
1905.09	230.27
1905.53	200.24
1923.4	229.59
1923.81	201.53
1941.7	228.86
1942.08	202.72
1960.01	228.08
1960.37	203.78
1978.3	227.25
1978.67	204.7
1996.6	226.34
1996.97	205.5
2014.89	225.36
2015.27	206.18
2033.18	224.3
2033.58	206.76
2051.46	223.17
2051.89	207.23
2069.74	222
2070.21	207.58
2088.02	220.78
2088.52	207.82
2106.29	219.5
2106.84	207.96
2124.56	218.11
2125.16	208
2142.81	216.56
2143.48	207.95
2161.05	214.81
2161.8	207.84
2179.25	212.8
2180.11	207.58
2197.43	210.51
2198.43	207.21
2215.56	207.88

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 2400.0, as shown in Table 20 and at **138** in FIG. **25**.

TABLE 20

Y	Z
1339.65	158.021
1349.26	147.505
1353.27	169.1
1367	146.773
1369.35	176.634
1384.77	147.093
1386	182.811
1402.51	147.885
1402.94	188.158
1420.04	192.964
1420.24	148.993
1437.27	197.299
1437.95	150.349
1454.59	201.245
1455.65	151.874
1471.98	204.846
1473.33	153.607
1489.43	208.146
1490.99	155.497

37

TABLE 20-continued

Y	Z
1506.94	211.176
1508.64	157.532
1524.48	213.948
1526.28	159.675
1542.07	216.489
1543.91	161.849
1559.68	218.807
1561.54	164.016
1577.32	220.917
1579.17	166.158
1594.98	222.823
1596.81	168.274
1612.66	224.53
1614.45	170.355
1630.36	226.04
1632.1	172.396
1648.08	227.339
1649.75	174.396
1665.81	228.421
1667.4	176.353
1683.55	229.308
1685.06	178.271
1701.3	229.974
1702.73	180.146
1719.06	230.538
1720.4	181.984
1736.81	230.973
1738.07	183.784
1754.58	231.289
1755.75	185.547
1772.34	231.489
1773.43	187.276
1790.1	231.585
1791.11	188.969
1807.87	231.58
1808.8	190.624
1825.63	231.473
1826.49	192.241
1843.39	231.272
1844.18	193.82
1861.15	230.993
1861.88	195.364
1878.91	230.629
1879.58	196.863
1896.67	230.186
1897.28	198.328
1914.43	229.732
1914.99	199.756
1932.19	229.13
1932.7	201.124
1949.94	228.478
1950.42	202.401
1967.69	227.784
1968.14	203.555
1985.44	227.034
1985.88	204.564
2003.18	226.216
2003.62	205.45
2020.92	225.32
2021.37	206.236
2038.66	224.349
2039.12	206.903
2056.39	223.317
2056.87	207.485
2074.13	222.237
2074.63	207.943
2091.85	221.117
2092.39	208.294
2109.58	219.934
2110.16	208.535
2127.3	218.642
2127.92	208.689
2145	217.196
2145.68	208.752
2162.69	215.554
2163.45	208.75
2180.35	213.67
2181.21	208.577

38

TABLE 20-continued

Y	Z
2197.98	211.503
2198.97	208.292
2215.57	209.009

The upper and lower surfaces **28**, **30** are defined at Y and Z positions corresponding substantially to the X position of 2520.0, as shown in Table 21 and at **140** in FIG. **26**.

TABLE 21

Y	Z
1367.13	157.624
1376.43	147.413
1380.29	168.397
1393.62	146.725
1395.84	175.754
1410.82	147.062
1411.96	181.799
1428.02	147.845
1428.35	187.046
1444.9	191.758
1445.19	148.938
1461.57	196.022
1462.35	150.267
1478.34	199.907
1479.5	151.76
1495.18	203.462
1496.62	153.439
1512.08	206.721
1513.74	155.27
1529.02	209.717
1530.84	157.234
1546.01	212.469
1547.92	159.292
1563.04	214.993
1565.01	161.377
1580.09	217.303
1582.09	163.454
1597.17	219.41
1599.18	165.513
1614.28	221.32
1616.27	167.55
1631.4	223.039
1633.36	169.561
1648.55	224.565
1650.46	171.542
1665.71	225.885
1667.56	173.491
1682.88	226.997
1684.66	175.407
1700.07	227.925
1701.77	177.291
1717.26	228.629
1718.88	179.143
1734.46	229.242
1735.99	180.965
1751.67	229.725
1753.11	182.758
1768.87	230.089
1770.23	184.523
1786.08	230.347
1787.35	186.26
1803.29	230.501
1804.48	187.969
1820.5	230.556
1821.61	189.649
1837.71	230.516
1838.74	191.3
1854.92	230.385
1855.87	192.921
1872.13	230.17
1873.01	194.512
1889.34	229.88
1890.15	196.075
1906.55	229.521

39

TABLE 21-continued

Y	Z
1907.29	197.61
1923.76	229.096
1924.44	199.114
1940.96	228.603
1941.59	200.566
1958.16	228.041
1958.74	201.933
1975.36	227.423
1975.91	203.178
1992.56	226.755
1993.08	204.283
2009.75	226.02
2010.27	205.267
2026.95	225.21
2027.45	206.149
2044.13	224.328
2044.65	206.925
2061.32	223.383
2061.84	207.596
2078.5	222.393
2079.05	208.161
2095.68	221.364
2096.25	208.622
2112.86	220.272
2113.46	208.981
2130.03	219.073
2130.67	209.241
2147.18	217.726
2147.88	209.413
2164.33	216.185
2165.09	209.51
2181.44	214.408
2182.3	209.426
2198.53	212.353
2199.51	209.219
2215.58	209.976

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 2640.0, as shown in Table 22 and at **142** in FIG. **27**.

TABLE 22

Y	Z
1394.47	149.48
1402.87	139.041
1407.13	160.038
1419.51	138.27
1422.1	167.358
1436.18	138.573
1437.63	173.403
1452.83	139.328
1453.44	178.668
1469.42	183.41
1469.46	140.384
1485.52	187.715
1486.08	141.676
1501.72	191.649
1502.69	143.13
1517.99	195.261
1519.28	144.746
1534.32	198.585
1535.85	146.506
1550.71	201.65
1552.41	148.398
1567.13	204.476
1568.96	150.384
1583.59	207.079
1585.51	152.398
1600.09	209.472
1602.05	154.408
1616.61	211.667
1618.6	156.407
1633.16	213.67
1635.15	158.393

40

TABLE 22-continued

Y	Z
1649.73	215.483
1651.7	160.363
1666.32	217.105
1668.26	162.314
1682.92	218.53
1684.81	164.245
1699.54	219.76
1701.37	166.154
1716.18	220.806
1717.93	168.042
1732.83	221.608
1734.49	169.909
1749.48	222.304
1751.06	171.756
1766.14	222.891
1767.63	173.584
1782.8	223.354
1784.2	175.394
1799.46	223.7
1800.77	177.184
1816.13	223.942
1817.34	178.957
1832.8	224.084
1833.92	180.711
1849.46	224.128
1850.5	182.445
1866.13	224.078
1867.08	184.158
1882.8	223.941
1883.66	185.852
1899.47	223.725
1900.24	187.526
1916.13	223.436
1916.83	189.182
1932.79	223.075
1933.41	190.819
1949.46	222.64
1950	192.427
1966.12	222.129
1966.6	193.966
1982.77	221.555
1983.21	195.387
1999.43	220.927
1999.83	196.655
2016.08	220.226
2016.46	197.793
2032.73	219.441
2033.09	198.819
2049.38	218.573
2049.74	199.731
2066.02	217.627
2066.39	200.529
2082.66	216.618
2083.04	201.213
2099.29	215.559
2099.7	201.78
2115.92	214.424
2116.36	202.23
2132.54	213.169
2133.03	202.564
2149.14	211.741
2149.69	202.785
2165.73	210.084
2166.36	202.904
2182.28	208.144
2183.03	202.792
2198.79	205.857
2199.69	202.501
2215.24	203.162

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 2760.0, as shown in Table 23 and at **144** in FIG. **28**.

41

TABLE 23

Y	Z
1423.1	128.141
1431.64	118.295
1435.19	138.463
1447.69	117.651
1449.59	145.592
1463.76	118.022
1464.55	151.467
1479.8	156.583
1479.82	118.823
1495.2	161.184
1495.86	119.92
1510.73	165.351
1511.88	121.235
1526.35	169.155
1527.89	122.708
1542.05	172.641
1543.89	124.331
1557.8	175.845
1559.87	126.091
1573.61	178.797
1575.83	127.968
1589.45	181.514
1591.79	129.91
1605.34	184.014
1607.75	131.858
1621.25	186.309
1623.71	133.798
1637.19	188.41
1639.67	135.729
1653.16	190.323
1655.63	137.649
1669.14	192.045
1671.6	139.555
1685.15	193.578
1687.56	141.445
1701.17	194.924
1703.53	143.319
1717.2	196.084
1719.5	145.176
1733.25	197.036
1735.47	147.018
1749.32	197.8
1751.44	148.843
1765.38	198.484
1767.42	150.654
1781.45	199.045
1783.39	152.45
1797.52	199.49
1799.37	154.232
1813.59	199.831
1815.35	156.001
1829.67	200.074
1831.33	157.755
1845.75	200.226
1847.31	159.495
1861.83	200.289
1863.3	161.22
1877.91	200.268
1879.28	162.929
1893.98	200.171
1895.27	164.624
1910.06	200.003
1911.26	166.306
1926.14	199.771
1927.25	167.975
1942.21	199.477
1943.24	169.625
1958.29	199.118
1959.24	171.236
1974.36	198.697
1975.24	172.761
1990.43	198.227
1991.26	174.163
2006.5	197.711
2007.28	175.43
2022.57	197.131
2023.32	176.589
2038.64	196.482

42

TABLE 23-continued

Y	Z
2039.36	177.657
2054.7	195.772
2055.41	178.629
2070.76	195.013
2071.46	179.502
2086.82	194.211
2087.52	180.278
2102.87	193.381
2103.58	180.959
2118.93	192.495
2119.65	181.547
2134.98	191.517
2135.72	182.047
2151.02	190.409
2151.79	182.466
2167.04	189.136
2167.86	182.798
2183.05	187.662
2183.94	182.937
2199.04	185.957
2200.01	182.967
2215	183.991

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 2880.0, as shown in Table 24 and at **146** in FIG. **29**.

TABLE 24

Y	Z
1491.84	105.988
1500.75	97.6649
1502.74	115.477
1515.39	97.2462
1515.94	121.839
1529.66	126.996
1530.04	97.6842
1543.63	131.459
1544.67	98.4911
1557.74	135.423
1559.29	99.5643
1571.97	138.976
1573.89	100.816
1586.28	142.189
1588.48	102.209
1600.65	145.107
1603.05	103.733
1615.07	147.767
1617.62	105.371
1629.53	150.197
1632.17	107.095
1644.02	152.414
1646.72	108.843
1658.54	154.437
1661.27	110.582
1673.09	156.279
1675.82	112.31
1687.66	157.948
1690.38	114.027
1702.24	159.447
1704.93	115.729
1716.85	160.78
1719.49	117.415
1731.46	161.95
1734.05	119.084
1746.09	162.963
1748.61	120.736
1760.73	163.807
1763.18	122.371
1775.38	164.485
1777.74	123.989
1790.03	165.093
1792.31	125.592
1804.68	165.606
1806.88	127.179

43

TABLE 24-continued

Y	Z	
1819.34	166.027	
1821.45	128.751	5
1834	166.365	
1836.02	130.308	
1848.66	166.627	
1850.59	131.85	
1863.32	166.82	
1865.17	133.376	10
1877.99	166.946	
1879.75	134.888	
1892.65	167.011	
1894.32	136.382	
1907.31	167.019	
1908.9	137.861	15
1921.97	166.977	
1923.49	139.324	
1936.64	166.889	
1938.07	140.772	
1951.3	166.759	
1952.65	142.204	20
1965.96	166.588	
1967.24	143.615	
1980.62	166.376	
1981.83	144.983	
1995.29	166.127	
1996.43	146.278	
2009.95	165.849	25
2011.04	147.478	
2024.61	165.542	
2025.65	148.576	
2039.27	165.194	
2040.27	149.597	
2053.92	164.805	30
2054.89	150.546	
2068.58	164.379	
2069.52	151.424	
2083.24	163.923	
2084.15	152.23	
2097.89	163.442	35
2098.79	152.962	
2112.55	162.944	
2113.43	153.623	
2127.2	162.413	
2128.07	154.213	
2141.85	161.823	
2142.72	154.734	40
2156.5	161.148	
2157.37	155.189	
2171.14	160.359	
2172.02	155.578	
2185.77	159.427	
2186.67	155.828	45
2200.4	158.32	
2201.32	155.961	
2215	157.003	

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 3000.0, as shown in Table 25 and at **148** in FIG. **30**.

TABLE 25

Y	Z	
1648.32	91.5407	
1655.24	84.8022	
1657.03	98.7589	
1666.71	84.4397	
1667.47	103.513	60
1678.18	84.7776	
1678.3	107.309	
1689.3	110.564	
1689.64	85.4011	
1700.42	113.419	
1701.09	86.2148	65
1711.61	115.958	

44

TABLE 25-continued

Y	Z	
1712.53	87.1624	
1722.85	118.235	
1723.96	88.2029	
1734.14	120.291	
1735.38	89.3282	
1745.47	122.155	
1746.8	90.5268	
1756.82	123.85	
1758.21	91.7858	
1768.19	125.392	
1769.62	93.077	
1779.58	126.795	
1781.02	94.3645	
1790.98	128.071	
1792.43	95.6394	
1802.4	129.228	
1803.84	96.9011	
1813.83	130.272	
1815.25	98.1491	
1825.27	131.207	
1826.66	99.3821	
1836.71	132.035	
1838.07	100.599	
1848.17	132.763	
1849.49	101.799	
1859.62	133.393	
1860.91	102.983	
1871.09	133.922	
1872.33	104.151	
1882.56	134.347	
1883.75	105.301	
1894.03	134.72	
1895.17	106.435	
1905.5	135.041	
1906.59	107.553	
1916.97	135.302	
1918.02	108.654	
1928.44	135.51	
1929.45	109.739	
1939.92	135.667	
1940.88	110.807	
1951.4	135.778	
1952.31	111.858	
1962.87	135.845	
1963.74	112.892	
1974.35	135.868	
1975.17	113.907	
1985.82	135.85	
1986.61	114.904	
1997.3	135.791	
1998.04	115.88	
2008.77	135.695	
2009.48	116.836	
2020.25	135.563	
2020.92	117.772	
2031.72	135.396	
2032.36	118.688	
2043.2	135.194	
2043.81	119.581	
2054.67	134.955	
2055.25	120.448	
2066.14	134.679	
2066.7	121.277	
2077.62	134.365	
2078.16	122.048	
2089.09	134.014	
2089.61	122.748	
2100.56	133.625	
2101.07	123.368	
2112.02	133.187	
2112.54	123.916	
2123.49	132.696	
2124.01	124.395	
2134.95	132.151	
2135.48	124.801	
2146.41	131.552	
2146.95	125.129	
2157.87	130.896	

45

TABLE 25-continued

Y	Z
2158.43	125.373
2169.32	130.175
2169.91	125.525
2180.77	129.357
2181.39	125.578
2192.2	128.395
2192.86	125.526
2203.62	127.223
2204.34	125.313
2215	125.747

The upper and lower surfaces **28, 30** are defined at Y and Z positions corresponding substantially to the X position of 3120.0, as shown in Table 26 and at **150** in FIG. **31**.

TABLE 26

Y	Z
2068.13	86.96
2068.78	85.27
2070.95	87.9
2071.7	84.73
2073.85	88.54
2074.67	84.58
2076.79	89.06
2077.64	84.55
2079.73	89.5
2080.62	84.57
2082.68	89.89
2083.59	84.61
2085.64	90.23
2086.57	84.67
2088.6	90.53
2089.54	84.74
2091.56	90.8
2092.52	84.82
2094.53	91.05
2095.49	84.91
2097.5	91.27
2098.47	85
2100.47	91.47
2101.44	85.09
2103.44	91.65
2104.42	85.18
2106.41	91.81
2107.39	85.28
2109.38	91.96
2110.37	85.37
2112.35	92.09
2113.34	85.47
2115.33	92.2
2116.31	85.56
2118.3	92.3
2119.29	85.66
2121.28	92.38
2122.26	85.75
2124.25	92.45
2125.24	85.84
2127.23	92.51
2128.21	85.94
2130.21	92.55
2131.19	86.02
2133.18	92.58
2134.16	86.11
2136.16	92.6
2137.13	86.2
2139.14	92.6
2140.11	86.28
2142.11	92.6
2143.08	86.36
2145.09	92.58
2146.06	86.43
2148.06	92.55
2149.03	86.51
2151.04	92.51

46

TABLE 26-continued

Y	Z
2152.01	86.57
2154.02	92.46
2154.98	86.64
2156.99	92.4
2157.96	86.7
2159.97	92.33
2160.93	86.76
2162.94	92.25
2163.91	86.81
2165.92	92.16
2166.88	86.86
2168.89	92.05
2169.86	86.9
2171.87	91.94
2172.83	86.95
2174.84	91.82
2175.81	86.99
2177.81	91.69
2178.79	87.04
2180.79	91.54
2181.76	87.1
2183.76	91.38
2184.74	87.16
2186.73	91.2
2187.71	87.22
2189.7	91.02
2190.69	87.29
2192.67	90.82
2193.66	87.36
2195.64	90.61
2196.64	87.44
2198.6	90.39
2199.61	87.53
2201.57	90.15
2202.59	87.62
2204.54	89.9
2205.56	87.72
2207.5	89.65
2208.54	87.82
2210.46	89.38
2211.51	87.93
2213.43	89.09
2214.48	88.04

While the best modes for carrying out the invention have been described in detail, those familiar with the art to which this invention relates will recognize various alternative designs and embodiments for practicing the invention within the scope of the appended claims.

What is claimed as new and desired to be secured by Letters Patent of the United States is:

1. An aircraft configured for flight in an atmosphere having a low density, the aircraft comprising:
 - a fuselage;
 - a pair of wings extending from the fuselage in opposition to one another;
 - a rear stabilizer extending from the fuselage in spaced relationship to the pair of wings;
 wherein each of the fuselage, the pair of wings, and the rear stabilizer present an upper surface opposing a lower surface;
- wherein the upper and lower surfaces are defined at an X position along an X-axis in a 3-dimensional X, Y, Z configuration; and
- wherein the upper and lower surfaces are defined at Y and Z positions along respective Y and Z axes, corresponding substantially to the following table:

-continued

Y	Z		Y	Z
1005.68	117.26		3817.10	687.46
1037.25	437.34	5	3822.01	647.30
1049.79	117.67		3836.67	689.38
1081.35	438.41		3840.99	646.64
1093.90	118.26		384.41	340.58
1125.46	438.83		3856.25	691.10
1138.00	119.03		3859.99	646.44
1169.57	438.60	10	3875.86	692.61
1182.11	119.96		3878.99	646.57
1213.67	437.72		388.22	123.63
1226.20	121.01		3895.47	694.00
1257.75	436.19		3897.98	647.01
1270.30	122.11		3915.08	695.32
1301.81	434.01	15	3916.97	647.73
1314.40	123.20		3934.71	696.47
1345.83	431.19		3935.94	648.72
1358.50	124.30		3954.35	697.51
1389.81	427.74		3954.91	649.85
1402.59	125.48		3973.87	651.12
1433.73	423.67	20	3973.98	698.57
1446.68	126.77		3992.81	652.63
1477.59	419.01		3993.61	699.65
1490.77	128.22		4011.73	654.36
1521.39	413.76		4013.25	700.76
1534.85	129.87		4030.63	656.29
1565.12	407.93		4032.88	701.89
1578.92	131.74	25	4049.51	658.39
1608.77	401.56		4052.51	703.04
1622.98	133.88		4068.38	660.63
1652.34	394.68		4072.14	704.20
1667.02	136.33		4087.23	662.99
1695.83	387.34		4091.77	705.37
1711.05	139.13	30	4106.07	665.47
1739.27	379.66		4111.39	706.53
1755.04	142.31		4124.89	668.04
1782.65	371.68		4131.02	707.69
1799.01	145.91		4143.70	670.71
1825.98	363.42		4150.65	708.86
1842.93	149.98	35	4162.50	673.48
1869.25	354.84		4166.85	699.98
1886.80	154.56		4181.28	676.32
1912.45	345.90		4181.67	687.05
191.27	193.72		4198.83	681.03
1930.61	159.67		4200.06	679.25
1955.57	336.63	40	4218.82	682.24
195.79	236.57		426.85	352.58
1974.36	165.31		432.29	121.80
1998.63	327.04		469.58	363.51
2018.04	171.45		476.39	120.56
2041.63	317.21		512.54	373.55
2061.66	178.05	45	520.48	119.50
2084.61	307.28		555.68	382.76
2105.22	185.01		564.59	118.60
2127.58	297.33		598.98	391.18
2148.72	192.28		608.69	117.90
2170.47	287.02		642.42	398.84
217.43	159.25		652.80	117.40
2192.19	199.79	50	685.98	405.76
2213.16	275.91		696.91	117.05
2235.63	207.48		729.65	411.98
223.69	270.30		741.02	116.83
2255.58	263.80		773.41	417.53
2279.04	215.29	55	785.13	116.70
2297.80	251.03		817.25	422.43
2321.20	224.19		829.24	116.66
257.36	140.96		861.15	426.68
260.67	294.21		873.35	116.71
300.44	131.64	60	905.12	430.30
300.83	312.40		917.46	116.82
342.35	327.29		949.13	433.28
344.24	126.54		961.57	117.00
3744.64	668.04		993.17	435.63.
3758.76	679.04			
3765.49	654.10			
3778.09	682.59			
3784.17	650.65			
3797.57	685.21	65		
3803.05	648.55			

2. An aircraft, as set forth in claim 1, wherein the X position corresponds substantially to 120.00.

3. An aircraft, as set forth in claim 2, wherein the upper and lower surfaces are defined at an X position along the X axis corresponding substantially to 240.00; and

wherein the upper and lower surfaces are defined at Y and Z positions along the respective Y and Z axes, corresponding substantially to the following table:

Y	Z
1008.69	127.06
1035.50	427.37
1055.31	127.70
1082.12	428.34
1101.92	128.52
1128.74	428.60
1148.53	129.52
1175.36	428.16
1195.14	130.67
1221.97	427.01
1241.75	131.90
1268.56	425.16
1288.36	133.13
1315.11	422.62
1334.97	134.31
1361.62	419.40
1381.58	135.49
1408.08	415.51
1428.18	136.76
1454.48	410.96
1474.78	138.17
1500.81	405.74
1521.38	139.78
1547.07	399.92
1567.97	141.55
1593.25	393.54
1614.55	143.52
1639.37	386.67
1661.12	145.73
1685.42	379.37
1707.68	148.24
1731.41	371.73
1754.21	151.10
1777.36	363.82
1800.72	154.39
1823.26	355.65
1847.19	158.14
1869.11	347.17
1893.62	162.36
1914.91	338.47
1940.02	166.93
1960.69	329.65
1986.38	171.86
2006.45	320.69
2032.70	177.22
2052.16	311.53
2078.96	181.86
2097.84	302.18
2125.33	176.99
2143.44	292.47
2171.70	172.12
2188.87	281.99
2218.07	167.24
2229.98	271.22
2264.44	162.37
2274.71	258.07
2310.80	157.50
2319.28	244.41
2348.36	224.64
2357.32	155.36
2394.98	224.64
2403.94	155.36
2441.61	224.64
2450.53	155.55
2487.43	232.42
2494.11	172.14
2533.33	240.64
2537.23	189.87
2579.49	209.55

-continued

Y	Z
2579.59	246.32
2617.72	235.62
375.12	256.43
375.38	211.58
3785.74	578.95
3812.53	591.49
3818.72	563.38
3844.17	595.82
3850.44	560.38
3875.93	599.02
3882.31	559.49
3907.76	601.60
3914.19	559.73
3939.60	603.87
3946.06	560.73
3971.45	606.08
3977.89	562.42
4003.30	608.33
4009.70	564.57
4035.15	610.63
4041.47	567.25
404.71	291.98
4066.99	612.96
4073.18	570.54
408.89	180.02
4098.83	615.30
4104.84	574.31
4130.68	617.66
4136.45	578.44
4162.52	620.02
4168.02	582.89
4194.36	622.41
4199.55	587.61
4226.19	624.81
4231.05	592.57
4258.03	627.25
4262.51	597.73
4289.86	629.73
4293.95	603.02
4321.69	632.26
4325.36	608.45
4353.51	634.85
4356.76	614.01
4385.33	637.50
4388.13	619.68
4417.14	640.23
4419.48	625.46
443.64	317.50
4448.95	643.04
4450.83	631.30
4480.74	645.95
4482.16	637.19
4512.52	649.00
4513.49	643.11
451.81	162.04
4544.29	652.24
4544.81	649.04
4576.04	655.48
485.93	337.08
497.07	150.97
529.74	353.01
543.10	143.56
574.36	366.50
589.41	138.24
619.51	378.10
635.87	134.33
665.05	388.12
682.41	131.46
710.86	396.76
728.98	129.39
756.89	404.15
775.58	127.96
803.09	410.42
822.20	127.05
849.42	415.64
868.82	126.58
895.85	419.88
915.44	126.47

51

-continued

Y	Z
942.36	423.21
962.07	126.64
988.91	425.68.

4. An aircraft, as set forth in claim 1, wherein the upper and lower surfaces are defined at an X position along the X axis corresponding substantially to 360.00; and

wherein the upper and lower surfaces are defined at Y and Z positions along the respective Y and Z axes, corresponding substantially to the following table:

Y	Z	
1086.84	190.93	
1102.24	349.39	
1198.80	193.20	20
1214.21	348.27	
1310.75	195.91	
1326.09	343.42	
1422.70	198.87	
1437.77	335.26	
1534.62	202.55	25
1549.19	324.11	
1646.51	207.09	
1660.41	311.04	
1758.38	212.21	
1771.53	297.17	
1870.25	217.19	30
1882.71	283.67	
1898.79	281.75	
1914.87	279.80	
1930.94	277.82	
1947.01	275.81	
1963.08	273.77	35
1979.14	271.69	
1982.18	220.41	
1994.25	220.57	
1995.20	269.58	
2006.30	220.73	
2011.25	267.45	40
2018.35	220.89	
2027.30	265.29	
2030.40	221.06	
2042.44	221.23	
2043.35	263.11	
2054.49	221.41	
2059.39	260.89	45
2066.54	221.59	
2075.43	258.65	
2078.58	221.78	
2090.63	221.97	
2091.46	256.38	
2102.68	222.16	50
2107.49	254.08	
2114.72	222.36	
2123.52	251.74	
2126.77	222.57	
2138.82	222.79	
2139.54	249.35	55
2150.86	223.01	
2155.55	246.93	
2162.91	223.25	
2171.56	244.47	
2174.96	223.49	
2187.00	223.73	60
2187.56	241.96	
2199.05	223.96	
2203.55	239.41	
2211.10	224.17	
2219.53	236.81	
2223.14	224.35	65
2235.19	224.53	
2235.51	234.15	

52

-continued

Y	Z
2247.24	224.76
2251.48	231.44
2259.28	225.00
2267.43	228.68
2271.33	225.19
2283.38	225.34
3048.66	358.95
3081.81	392.98
3107.69	361.82
3136.06	416.99
3166.11	372.19
3191.42	438.32
3224.07	384.89
3247.35	458.10
3281.70	399.03
3303.68	476.74
3339.04	414.27
3360.32	494.40
3396.12	430.48
3417.24	511.15
3452.93	447.60
3474.42	526.97
3509.45	465.66
3531.88	541.76
3565.62	484.79
3589.64	555.29
3621.32	505.25
3647.80	567.02
3676.23	527.69
3706.54	575.16
3728.99	554.71
3826.84	489.85
3832.12	496.49
3840.92	499.08
3847.10	535.94
3847.74	526.80
3848.05	545.04
3849.86	517.90
3849.91	500.87
3850.83	553.76
3853.66	509.57
3855.48	561.64
3857.12	475.49
3858.96	502.36
3861.71	568.34
3869.10	573.75
3877.22	577.98
3885.81	581.18
3886.67	472.77
3894.67	583.54
3903.68	585.18
3912.79	586.24
3916.34	472.11
3921.94	586.79
3931.11	586.90
3940.27	586.64
3946.02	472.46
3949.42	586.05
3958.54	585.16
3967.64	584.00
3975.68	473.52
3976.70	582.60
3985.72	580.97
3994.70	579.14
4003.64	577.12
4005.32	475.08
4012.54	574.92
4017.44	517.03
4021.40	572.55
4023.21	516.81
4025.68	521.05
4030.21	570.02
4032.35	517.48
4033.84	525.22
4034.93	477.15
4038.98	567.34
4041.49	518.14
4041.93	529.53

53

-continued

Y	Z
4045.14	562.47
4046.03	553.34
4046.92	544.22
4047.81	535.09
4050.64	518.81
4059.78	519.47
4064.51	479.52
4068.92	520.14
4078.07	520.80
4087.21	521.46
4094.05	482.41
4096.36	522.12
4105.50	522.79
4114.64	523.46
4123.54	485.79
4123.79	524.12
4132.93	524.79
4142.07	525.47
4151.22	526.14
4152.98	489.55
4160.36	526.82
4169.50	527.51
4178.64	528.19
4182.39	493.62
4187.79	528.87
4196.93	529.56
4206.07	530.25
4211.75	497.96
4215.21	530.94
4224.35	531.63
4233.49	532.32
4241.07	502.55
4242.64	533.02
4251.78	533.71
4260.92	534.41
4270.06	535.12
4270.36	507.33
4279.20	535.83
4288.34	536.54
4297.48	537.26
4299.63	512.26
4306.62	537.98
4315.76	538.71
4324.90	539.45
4328.88	517.33
4334.03	540.19
4343.17	540.93
4352.31	541.68
4358.11	522.51
4361.44	542.44
4370.58	543.20
4379.72	543.97
4387.31	527.80
4388.85	544.75
4397.99	545.53
4407.12	546.32
4416.25	547.11
4416.50	533.19
4425.39	547.92
4434.52	548.73
4443.65	549.55
4445.68	538.63
4452.78	550.38
4461.91	551.21
4471.04	552.06
4474.85	544.10
4480.17	552.91
4489.29	553.77
4498.42	554.65
4504.02	549.59
4507.54	555.54
4516.66	556.50
4525.78	557.42
4533.18	555.15
4534.90	558.35
4544.02	559.30
4553.13	560.29
4562.25	561.12

54

-continued

Y	Z
559.57	250.22
639.33	201.09
658.26	300.04
750.95	192.40
767.61	323.90
862.89	189.60
878.62	338.46
974.87	189.52
990.30	346.44.

5. An aircraft, as set forth in claim 2, wherein the upper and lower surfaces are defined at an X position along the X axis corresponding substantially to 480.00; and wherein the upper and lower surfaces are defined at Y and Z positions along the respective Y and Z axes, corresponding substantially to the following table:

Y	Z
1077.08	199.89
1082.96	322.95
1206.22	199.56
1212.07	325.39
1335.36	200.25
1341.18	322.85
1464.49	201.92
1470.13	315.91
1593.60	204.67
1598.83	305.33
1722.69	208.38
1727.32	292.36
1851.78	211.95
1855.65	277.99
1980.88	214.94
1983.77	261.74
2109.98	218.44
2111.60	243.44
2239.06	222.40
3867.94	400.76
3871.64	405.98
3878.13	408.22
3884.81	409.80
3891.56	411.11
3895.51	387.56
3898.33	412.24
3905.13	413.23
3911.94	414.10
3918.76	414.91
3922.87	385.00
3925.59	415.68
3932.42	416.38
3939.25	417.04
3946.09	417.66
3950.34	384.38
3952.94	418.25
3959.78	418.83
3966.63	419.39
3973.47	419.94
3977.82	384.81
3980.32	420.49
3987.17	421.03
3994.01	421.57
4000.86	422.10
4005.28	385.91
4007.71	422.62
4014.56	423.15
4021.41	423.67
4028.25	424.19
4032.72	387.49
4035.10	424.71
4041.95	425.22
4048.80	425.72
4055.65	426.22

US 8,196,858 B1

55

-continued

Y	Z
4060.13	389.44
4062.50	426.72
4069.35	427.21
4076.20	427.70
4083.05	428.19
4087.52	391.73
4089.91	428.68
4096.76	429.17
4103.61	429.66
4110.46	430.15
4114.89	394.28
4117.31	430.64
4124.16	431.14
4131.01	431.63
4137.86	432.13
4142.21	397.27
4144.71	432.63
4151.56	433.14
4158.41	433.64
4165.26	434.15
4169.48	400.66
4172.11	434.66
4178.96	435.17
4185.81	435.69
4192.65	436.20
4196.72	404.35
4199.50	436.71
4206.35	437.23
4213.20	437.74
4220.05	438.26
4223.91	408.31
4226.90	438.78
4233.75	439.29
4240.60	439.81
4247.44	440.33
4251.07	412.53
4254.29	440.85
4261.14	441.38
4267.99	441.90
4274.84	442.43
4278.20	416.94
4281.69	442.96
4288.53	443.49
4295.38	444.03
4302.23	444.57
4305.30	421.50
4309.07	445.11
4315.92	445.66
4322.77	446.20
4329.61	446.76
4332.38	426.19
4336.46	447.31
4343.30	447.87
4350.15	448.43
4356.99	449.00
4359.44	431.00
4363.84	449.57
4370.68	450.14
4377.53	450.72
4384.37	451.30
4386.48	435.92
4391.21	451.89
4398.06	452.48
4404.90	453.07
4411.74	453.67
4413.51	440.91
4418.58	454.27
4425.43	454.87
4432.27	455.48
4439.11	456.10
4440.53	445.93
4445.95	456.73
4452.79	457.36
4459.62	457.99
4466.46	458.63
4467.54	450.99
4473.30	459.27
4480.14	459.92

56

-continued

Y	Z
4486.98	460.57
4493.81	461.23
4494.55	456.08
4500.65	461.90
4507.48	462.63
4514.31	463.31
4521.14	464.01
4521.54	461.25
4527.98	464.71
4534.81	465.43
4541.64	466.17
4548.47	466.77
690.16	215.29
699.61	273.01
818.87	205.28
825.87	299.61
947.95	201.53
954.09	314.78.

6. An aircraft, as set forth in claim 1, wherein the upper and lower surfaces are defined at an X position along the X axis corresponding substantially to 600.00; and wherein the upper and lower surfaces are defined at Y and Z positions along the respective Y and Z axes, corresponding substantially to the following table:

Y	Z
1002.53	196.57
1008.08	303.00
1124.05	195.41
1129.33	310.96
1245.58	195.46
1250.83	313.53
1367.11	196.43
1372.33	311.41
1488.62	198.30
1493.70	305.16
1610.12	201.16
1614.84	295.48
1731.59	204.88
1735.78	283.56
1853.07	208.45
1856.59	270.31
1974.56	211.45
1977.18	255.29
2096.04	214.92
2097.53	238.35
2217.51	218.79
3909.04	311.66
3912.74	316.21
3918.68	318.32
3924.80	319.87
3930.99	321.12
3933.90	299.62
3937.21	322.15
3943.46	323.04
3949.72	323.86
3955.99	324.61
3959.06	297.15
3962.26	325.29
3968.54	325.93
3974.83	326.54
3981.11	327.12
3984.33	296.48
3987.40	327.69
3993.69	328.25
3999.97	328.80
4006.26	329.34
4009.62	296.89
4012.55	329.86
4018.84	330.38
4025.13	330.89

US 8,196,858 B1

57

-continued

Y	Z
4031.43	331.39
4034.88	297.89
4037.72	331.89
4044.01	332.38
4050.31	332.86
4056.60	333.33
4060.12	299.45
4062.89	333.80
4069.19	334.25
4075.49	334.70
4081.78	335.15
4085.34	301.39
4088.08	335.59
4094.37	336.04
4100.67	336.48
4106.97	336.92
4110.53	303.61
4113.26	337.36
4119.56	337.81
4125.86	338.25
4132.15	338.70
4135.70	306.06
4138.45	339.16
4144.74	339.61
4151.04	340.07
4157.33	340.53
4160.84	308.72
4163.63	341.00
4169.92	341.46
4176.22	341.93
4182.51	342.40
4185.95	311.75
4188.81	342.87
4195.10	343.34
4201.40	343.82
4207.69	344.29
4211.02	315.08
4213.98	344.76
4220.28	345.23
4226.57	345.71
4232.87	346.18
4236.05	318.67
4239.16	346.66
4245.46	347.13
4251.75	347.61
4258.04	348.09
4261.04	322.50
4264.34	348.57
4270.63	349.05
4276.92	349.53
4283.22	350.02
4286.01	326.54
4289.51	350.51
4295.80	351.00
4302.10	351.49
4308.39	351.99
4310.95	330.73
4314.68	352.49
4320.97	352.99
4327.26	353.49
4333.56	354.00
4335.86	335.06
4339.85	354.51
4346.14	355.02
4352.43	355.54
4358.72	356.06
4360.76	339.50
4365.01	356.59
4371.30	357.12
4377.59	357.65
4383.88	358.18
4385.64	344.03
4390.17	358.72
4396.46	359.26
4402.74	359.81
4409.03	360.36
4410.51	348.61
4415.32	360.92

58

-continued

Y	Z
4421.61	361.48
4427.89	362.04
4434.18	362.60
4435.37	353.22
4440.47	363.18
4446.75	363.76
4453.04	364.35
4459.32	364.95
4460.22	357.88
4465.60	365.54
4471.89	366.14
4478.17	366.74
4484.45	367.34
4485.07	362.58
4490.73	367.96
4497.02	368.59
4503.29	369.25
4509.57	369.89
4509.91	367.32
4515.85	370.54
4522.13	371.19
4528.40	371.88
4534.68	372.41
759.89	208.82
768.68	263.12
881.04	199.75
887.44	288.44.

7. An aircraft, as set forth in claim 1, wherein the upper and lower surfaces are defined at an X position along the X axis corresponding substantially to 720.00; and wherein the upper and lower surfaces are defined at Y and Z positions along the respective Y and Z axes, corresponding substantially to the following table:

Y	Z
1057.50	189.57
1062.37	288.34
1173.27	190.72
1177.84	296.68
1289.03	192.65
1293.56	299.84
1404.79	194.98
1409.32	298.43
1520.53	197.72
1524.98	293.14
1636.26	200.95
1640.44	284.67
1751.98	204.55
1755.73	274.07
1867.72	207.66
1870.89	262.15
1983.47	209.90
1985.86	248.54
2099.23	212.16
2100.61	233.12
2214.98	214.62
3950.14	222.57
3953.72	226.60
3959.07	228.71
3964.63	230.20
3970.28	231.29
3972.28	211.68
3975.97	232.22
3981.66	233.04
3987.38	233.76
3993.09	234.43
3995.23	209.25
3998.82	235.05
4004.54	235.65
4010.27	236.23
4016.00	236.80

US 8,196,858 B1

59

-continued

Y	Z
4018.31	208.50
4021.73	237.35
4027.46	237.88
4033.20	238.38
4038.93	238.88
4041.41	208.72
4044.67	239.37
4050.41	239.84
4056.14	240.31
4061.88	240.75
4064.48	209.63
4067.63	241.19
4073.37	241.61
4079.11	242.02
4084.85	242.43
4087.54	210.97
4090.59	242.83
4096.34	243.22
4102.08	243.62
4107.82	244.01
4110.56	212.81
4113.57	244.41
4119.31	244.80
4125.05	245.20
4130.80	245.61
4133.55	214.98
4136.54	246.01
4142.28	246.42
4148.03	246.83
4153.77	247.24
4156.52	217.39
4159.51	247.66
4165.25	248.08
4170.99	248.51
4176.73	248.93
4179.47	219.98
4182.47	249.36
4188.22	249.79
4193.96	250.22
4199.70	250.65
4202.40	222.74
4205.44	251.08
4211.18	251.51
4216.92	251.94
4222.66	252.37
4225.30	225.75
4228.40	252.80
4234.14	253.23
4239.88	253.67
4245.62	254.10
4248.16	229.01
4251.36	254.53
4257.10	254.97
4262.84	255.40
4268.59	255.84
4270.99	232.47
4274.33	256.28
4280.07	256.72
4285.81	257.16
4291.55	257.61
4293.80	236.14
4297.29	258.05
4303.02	258.50
4308.76	258.95
4314.50	259.40
4316.57	239.96
4320.24	259.86
4325.98	260.31
4331.72	260.77
4337.46	261.24
4339.32	243.92
4343.20	261.70
4348.93	262.17
4354.67	262.64
4360.41	263.12
4362.06	247.98
4366.15	263.60
4371.88	264.08

60

-continued

Y	Z
4377.62	264.56
4383.36	265.05
4384.78	252.11
4389.09	265.54
4394.83	266.04
4400.56	266.54
4406.30	267.04
4407.50	256.29
4412.03	267.55
4417.77	268.06
4423.50	268.57
4429.23	269.09
4430.20	260.50
4434.97	269.61
4440.70	270.14
4446.43	270.67
4452.16	271.22
4452.90	264.77
4457.89	271.77
4463.62	272.33
4469.35	272.89
4475.08	273.45
4475.59	269.09
4480.81	274.01
4486.54	274.58
4492.27	275.16
4497.99	275.77
4498.28	273.39
4503.72	276.36
4509.45	276.96
4515.17	277.58
4520.90	278.06
826.19	197.36
834.61	248.63
941.73	190.57
947.55	273.66.

8. An aircraft, as set forth in claim 1, wherein the upper and lower surfaces are defined at an X position along the X axis corresponding substantially to 840.00; and wherein the upper and lower surfaces are defined at Y and Z positions along the respective Y and Z axes, corresponding substantially to the following table:

Y	Z
1002.27	180.87
1007.37	258.37
1112.55	182.29
1116.63	273.28
1222.79	186.01
1226.56	282.08
1333.01	190.03
1336.78	285.90
1443.24	193.86
1447.07	285.24
1553.47	197.56
1557.28	280.96
1663.71	201.20
1667.34	273.74
1773.95	204.66
1777.24	264.50
1884.22	207.25
1887.03	253.94
1994.50	208.61
1996.65	241.75
2104.80	209.51
2106.07	227.88
2215.09	210.38
4086.08	149.58
4090.29	149.87
4094.50	150.16
4098.71	150.45

US 8,196,858 B1

61

-continued

Y	Z
4102.93	150.74
4107.14	151.02
4111.35	151.30
4115.57	151.59
4119.78	151.87
4123.99	152.15
4128.21	152.44
4132.42	152.73
4136.63	153.02
4140.84	153.31
4141.74	124.32
4145.06	153.61
4149.27	153.90
4153.48	154.20
4157.10	125.80
4157.69	154.50
4161.91	154.81
4166.12	155.12
4170.33	155.42
4172.44	127.46
4174.54	155.73
4178.75	156.05
4182.96	156.36
4187.17	156.67
4187.76	129.27
4191.38	156.99
4195.59	157.30
4199.81	157.62
4203.07	131.18
4204.02	157.93
4208.23	158.25
4212.44	158.57
4216.65	158.88
4218.37	133.20
4220.86	159.20
4225.07	159.51
4229.28	159.83
4233.49	160.14
4233.66	135.30
4237.70	160.46
4241.91	160.78
4246.13	161.09
4248.93	137.50
4250.34	161.41
4254.55	161.73
4258.76	162.05
4262.97	162.36
4264.19	139.78
4267.18	162.68
4271.39	163.00
4275.60	163.33
4279.44	142.15
4279.81	163.65
4284.02	163.97
4288.23	164.29
4292.44	164.62
4294.67	144.59
4296.65	164.94
4300.86	165.27
4305.07	165.60
4309.28	165.92
4309.90	147.11
4313.49	166.25
4317.70	166.59
4321.91	166.92
4325.11	149.69
4326.12	167.25
4330.33	167.59
4334.54	167.92
4338.75	168.26
4340.31	152.34
4342.96	168.60
4347.17	168.94
4351.38	169.29
4355.50	155.03
4355.58	169.63
4359.79	169.98
4364.00	170.33

62

-continued

Y	Z
4368.21	170.68
4370.69	157.76
4372.42	171.03
4376.62	171.39
4380.83	171.74
4385.04	172.10
4385.87	160.52
4389.25	172.46
4393.45	172.83
4397.66	173.19
4401.05	163.31
4401.87	173.56
4406.07	173.93
4410.28	174.30
4414.49	174.67
4416.22	166.13
4418.69	175.05
4422.90	175.43
4427.10	175.81
4431.31	176.19
4431.38	168.99
4435.51	176.58
4439.72	176.97
4443.92	177.36
4446.54	171.87
4448.13	177.76
4452.33	178.16
4456.53	178.58
4460.73	179.00
4461.70	174.74
4464.94	179.43
4469.14	179.85
4473.34	180.27
4476.87	177.58
4477.54	180.69
4481.74	181.12
4485.94	181.55
4490.14	182.00
4492.02	180.51
4494.34	182.45
4498.54	182.90
4502.74	183.35
4507.11	183.71
892.09	185.17
900.01	233.46.

9. An aircraft, as set forth in claim 1, wherein the upper and lower surfaces are defined at an X position along the X axis corresponding substantially to 960.00; and

wherein the upper and lower surfaces are defined at Y and Z positions along the respective Y and Z axes, corresponding substantially to the following table:

Y	Z
1010.85	170.95
1015.43	232.32
1037.07	170.84
1041.03	237.97
1063.28	171.16
1066.76	242.99
1089.49	171.72
1092.59	247.47
1115.69	172.60
1118.50	251.45
1141.88	173.69
1144.47	255.00
1168.07	175.00
1170.49	258.18
1194.24	176.48
1196.56	260.99
1220.41	178.07
1222.65	263.47

US 8,196,858 B1

63

-continued

Y	Z
1246.57	179.69
1248.78	265.62
1272.74	181.30
1274.93	267.46
1298.91	182.89
1301.10	269.01
1325.07	184.45
1327.29	270.28
1351.25	185.95
1353.48	271.26
1377.42	187.41
1379.69	271.96
1403.60	188.82
1405.90	272.37
1429.78	190.18
1432.11	272.52
1455.96	191.49
1458.33	272.39
1482.15	192.76
1484.54	272.06
1508.33	193.98
1510.75	271.53
1534.52	195.17
1536.96	270.80
1560.71	196.31
1563.16	269.88
1586.90	197.42
1589.35	268.79
1613.10	198.49
1615.53	267.53
1639.29	199.52
1641.71	266.10
1665.49	200.51
1667.88	264.52
1691.69	201.47
1694.04	262.83
1717.88	202.39
1720.19	261.02
1744.09	203.25
1746.34	259.09
1770.29	204.06
1772.47	257.09
1796.49	204.79
1798.60	254.96
1822.70	205.45
1824.72	252.75
1848.91	206.02
1850.84	250.49
1875.12	206.49
1876.95	248.17
1901.33	206.84
1903.06	245.75
1927.55	207.08
1929.15	243.22
1953.76	207.25
1955.23	240.58
1979.98	207.32
1981.30	237.83
2006.19	207.32
2007.37	234.99
2032.41	207.26
2033.42	232.08
2058.62	207.16
2059.46	229.08
2084.84	207.03
2085.49	225.95
2111.05	206.87
2111.50	222.65
2137.27	206.75
2137.48	219.15
2163.42	215.40
2163.48	206.59
2189.32	211.37
2189.70	206.37
2215.18	206.84
919.81	192.98
932.43	175.87
940.67	208.36

64

-continued

Y	Z
958.47	172.92
964.97	218.14
984.65	171.58
990.03	225.84

10. An aircraft, as set forth in claim 1, wherein the upper and lower surfaces are defined at an X position along the X axis corresponding substantially to 1680.00; and wherein the upper and lower surfaces are defined at Y and Z positions along the respective Y and Z axes, corresponding substantially to the following table:

Y	Z
1174.69	159.39
1186.20	146.97
1191.00	172.35
1207.26	145.97
1210.23	180.99
1228.35	146.21
1230.12	187.99
1249.42	147.01
1250.34	194.00
1270.48	148.21
1270.74	199.36
1291.27	204.16
1291.52	149.71
1311.92	208.50
1312.54	151.44
1332.64	212.42
1333.53	153.48
1353.43	215.98
1354.50	155.73
1374.27	219.23
1375.45	158.20
1395.15	222.16
1396.38	160.85
1416.08	224.82
1417.29	163.56
1437.03	227.21
1438.21	166.27
1458.01	229.36
1459.13	168.92
1479.02	231.27
1480.07	171.50
1500.05	232.93
1501.01	174.01
1521.09	234.37
1521.96	176.42
1542.15	235.55
1542.93	178.73
1563.22	236.47
1563.90	180.95
1584.30	237.16
1584.88	183.08
1605.39	237.59
1605.88	185.10
1626.47	237.90
1626.88	187.04
1647.57	238.06
1647.89	188.89
1668.66	238.07
1668.91	190.66
1689.75	237.94
1689.93	192.34
1710.84	237.70
1710.96	193.94
1731.93	237.33
1732.00	195.46
1753.01	236.84
1753.04	196.88
1774.09	198.22
1774.10	236.24

65

-continued

Y	Z	
1795.15	199.47	
1795.18	235.55	5
1816.21	200.64	
1816.25	234.75	
1837.27	201.69	
1837.33	233.86	
1858.34	202.68	
1858.40	232.96	10
1879.42	203.55	
1879.46	231.89	
1900.49	204.31	
1900.52	230.75	
1921.58	204.93	
1921.58	229.56	15
1942.64	228.31	
1942.66	205.40	
1963.69	226.98	
1963.75	205.74	
1984.73	225.55	
1984.84	205.93	20
2005.77	224.04	
2005.93	206.00	
2026.80	222.45	
2027.02	205.96	
2047.83	220.81	
2048.12	205.78	25
2068.85	219.12	
2069.20	205.47	
2089.87	217.35	
2090.29	205.06	
2110.87	215.45	
2111.38	204.54	
2131.86	213.37	30
2132.46	203.93	
2152.83	211.06	
2153.54	203.31	
2173.76	208.47	
2174.62	202.61	35
2194.64	205.54	
2195.70	201.79	
2215.47	202.22	

11. An aircraft, as set forth in claim 1, wherein the upper and lower surfaces are defined at an X position along the X axis corresponding substantially to 2280.00; and
 wherein the upper and lower surfaces are defined at Y and Z positions along the respective Y and Z axes, corresponding substantially to the following table:

Y	Z	
1312.16	158.26	
1322.08	147.42	50
1326.23	169.65	
1340.37	146.64	
1342.83	177.36	
1358.69	146.95	
1360.03	183.68	
1376.99	147.74	55
1377.51	189.13	
1395.16	194.03	
1395.27	148.86	
1412.94	198.44	
1413.54	150.24	
1430.81	202.45	
1431.79	151.80	60
1448.76	206.11	
1450.02	153.58	
1466.77	209.45	
1468.23	155.54	
1484.83	212.52	
1486.43	157.64	65
1502.94	215.32	

66

-continued

Y	Z	
1504.61	159.87	
1521.07	217.88	
1522.79	162.13	
1539.24	220.21	
1540.97	164.39	
1557.44	222.32	
1559.15	166.62	
1575.66	224.23	
1577.34	168.81	
1593.90	225.93	
1595.53	170.96	
1612.15	227.43	
1613.73	173.06	
1630.43	228.71	
1631.93	175.12	15
1648.71	229.76	
1650.14	177.12	
1667.01	230.62	
1668.35	179.07	
1685.32	231.24	
1686.57	180.97	20
1703.63	231.76	
1704.79	182.83	
1721.94	232.15	
1723.02	184.63	
1740.26	232.42	
1741.26	186.40	25
1758.58	232.57	
1759.49	188.12	
1776.89	232.60	
1777.73	189.80	
1795.21	232.54	
1795.98	191.43	30
1813.53	232.37	
1814.23	193.01	
1831.85	232.10	
1832.48	194.55	
1850.16	231.75	
1850.74	196.04	35
1868.47	231.32	
1869.00	197.49	
1886.78	230.80	
1887.26	198.89	
1905.09	230.27	
1905.53	200.24	40
1923.40	229.59	
1923.81	201.53	
1941.70	228.86	
1942.08	202.72	
1960.01	228.08	
1960.37	203.78	45
1978.30	227.25	
1978.67	204.70	
1996.60	226.34	
1996.97	205.50	
2014.89	225.36	
2015.27	206.18	
2033.18	224.30	50
2033.58	206.76	
2051.46	223.17	
2051.89	207.23	
2069.74	222.00	
2070.21	207.58	
2088.02	220.78	
2088.52	207.82	55
2106.29	219.50	
2106.84	207.96	
2124.56	218.11	
2125.16	208.00	
2142.81	216.56	
2143.48	207.95	60
2161.05	214.81	
2161.80	207.84	
2179.25	212.80	
2180.11	207.58	
2197.43	210.51	
2198.43	207.21	65
2215.56	207.88	

67

-continued

Y	Z
---	---

12. An aircraft, as set forth in claim 1, wherein the upper and lower surfaces are defined at an X position along the X axis corresponding substantially to 3120.00; and

wherein the upper and lower surfaces are defined at Y and Z positions along the respective Y and Z axes, corresponding substantially to the following table:

Y	Z
2068.13	86.96
2068.78	85.27
2070.95	87.90
2071.70	84.73
2073.85	88.54
2074.67	84.58
2076.79	89.06
2077.64	84.55
2079.73	89.50
2080.62	84.57
2082.68	89.89
2083.59	84.61
2085.64	90.23
2086.57	84.67
2088.60	90.53
2089.54	84.74
2091.56	90.80
2092.52	84.82
2094.53	91.05
2095.49	84.91
2097.50	91.27
2098.47	85.00
2100.47	91.47
2101.44	85.09
2103.44	91.65
2104.42	85.18
2106.41	91.81
2107.39	85.28
2109.38	91.96
2110.37	85.37
2112.35	92.09
2113.34	85.47
2115.33	92.20
2116.31	85.56
2118.30	92.30
2119.29	85.66
2121.28	92.38
2122.26	85.75
2124.25	92.45
2125.24	85.84
2127.23	92.51
2128.21	85.94
2130.21	92.55
2131.19	86.02
2133.18	92.58
2134.16	86.11
2136.16	92.60
2137.13	86.20
2139.14	92.60
2140.11	86.28
2142.11	92.60
2143.08	86.36
2145.09	92.58
2146.06	86.43
2148.06	92.55
2149.03	86.51
2151.04	92.51
2152.01	86.57
2154.02	92.46
2154.98	86.64
2156.99	92.40
2157.96	86.70
2159.97	92.33

68

-continued

Y	Z
2160.93	86.76
2162.94	92.25
2163.91	86.81
2165.92	92.16
2166.88	86.86
2168.89	92.05
2169.86	86.90
2171.87	91.94
2172.83	86.95
2174.84	91.82
2175.81	86.99
2177.81	91.69
2178.79	87.04
2180.79	91.54
2181.76	87.10
2183.76	91.38
2184.74	87.16
2186.73	91.20
2187.71	87.22
2189.70	91.02
2190.69	87.29
2192.67	90.82
2193.66	87.36
2195.64	90.61
2196.64	87.44
2198.60	90.39
2199.61	87.53
2201.57	90.15
2202.59	87.62
2204.54	89.90
2205.56	87.72
2207.50	89.65
2208.54	87.82
2210.46	89.38
2211.51	87.93
2213.43	89.09
2214.48	88.04

13. An aircraft, as set forth in claim 1, wherein at least one stabilizer bar operatively interconnects the fuselage and the rear stabilizer at an angle substantially equal to 16.4 degrees, relative to a plane proximate a bottom of the fuselage.

14. An aircraft, as set forth in claim 13, wherein the at least one stabilizer bar includes a stabilizer hinge such that the rear stabilizer is foldable about the hinge, relative to the fuselage.

15. An aircraft, as set forth in claim 14, wherein each of the wings includes a wing hinge such that each of the wings are foldable about the respective wing hinge, relative to the fuselage.

16. An aircraft, as set forth in claim 15, wherein each of the wing hinges extends along a hinge axis substantially equal to 23.5 degrees, relative to a centerline of the fuselage.

17. An aircraft, as set forth in claim 1, wherein each of the wings and the rear stabilizer are foldable relative to the fuselage to a foldable position.

18. An aircraft configured for flight in an atmosphere having low density, the aircraft comprising:

- a fuselage;
- a pair of wings extending from the fuselage in opposition to one another;
- a rear stabilizer extending from the fuselage in spaced relationship to the pair of wings;
- a stabilizer bar operatively interconnecting the rear stabilizer and the fuselage;
- wherein each of the fuselage, the pair of wings, and the rear stabilizer present an upper surface opposing a lower surface;
- wherein the upper and lower surfaces are defined at an X position along an X axis, in a 3-dimensional X, Y, Z configuration; and

wherein the upper and lower surfaces are defined at Y and Z positions along a respective Y and Z axis, corresponding substantially to the following table:

Y	Z
1005.68	117.26
1037.25	437.34
1049.79	117.67
1081.35	438.41
1093.90	118.26
1125.46	438.83
1138.00	119.03
1169.57	438.60
1182.11	119.96
1213.67	437.72
1226.20	121.01
1257.75	436.19
1270.30	122.11
1301.81	434.01
1314.40	123.20
1345.83	431.19
1358.50	124.30
1389.81	427.74
1402.59	125.48
1433.73	423.67
1446.68	126.77
1477.59	419.01
1490.77	128.22
1521.39	413.76
1534.85	129.87
1565.12	407.93
1578.92	131.74
1608.77	401.56
1622.98	133.88
1652.34	394.68
1667.02	136.33
1695.83	387.34
1711.05	139.13
1739.27	379.66
1755.04	142.31
1782.65	371.68
1799.01	145.91
1825.98	363.42
1842.93	149.98
1869.25	354.84
1886.80	154.56
1912.45	345.90
191.27	193.72
1930.61	159.67
1955.57	336.63
195.79	236.57
1974.36	165.31
1998.63	327.04
2018.04	171.45
2041.63	317.21
2061.66	178.05
2084.61	307.28
2105.22	185.01
2127.58	297.33
2148.72	192.28
2170.47	287.02
217.43	159.25
2192.19	199.79
2213.16	275.91
2235.63	207.48
223.69	270.30
2255.58	263.80
2279.04	215.29
2297.80	251.03
2321.20	224.19
257.36	140.96
260.67	294.21
300.44	131.64
300.83	312.40
342.35	327.29
344.24	126.54
3744.64	668.04
3758.76	679.04

-continued

Y	Z
3765.49	654.10
3778.09	682.59
3784.17	650.65
3797.57	685.21
3803.05	648.55
3817.10	687.46
3822.01	647.30
3836.67	689.38
3840.99	646.64
384.41	340.58
3856.25	691.10
3859.99	646.44
3875.86	692.61
3878.99	646.57
388.22	123.63
3895.47	694.00
3897.98	647.01
3915.08	695.32
3916.97	647.73
3934.71	696.47
3935.94	648.72
3954.35	697.51
3954.91	649.85
3973.87	651.12
3973.98	698.57
3992.81	652.63
3993.61	699.65
4011.73	654.36
4013.25	700.76
4030.63	656.29
4032.88	701.89
4049.51	658.39
4052.51	703.04
4068.38	660.63
4072.14	704.20
4087.23	662.99
4091.77	705.37
4106.07	665.47
4111.39	706.53
4124.89	668.04
4131.02	707.69
4143.70	670.71
4150.65	708.86
4162.50	673.48
4166.85	699.98
4181.28	676.32
4181.67	687.05
4198.83	681.03
4200.06	679.25
4218.82	682.24
426.85	352.58
432.29	121.80
469.58	363.51
476.39	120.56
512.54	373.55
520.48	119.50
555.68	382.76
564.59	118.60
598.98	391.18
608.69	117.90
642.42	398.84
652.80	117.40
685.98	405.76
696.91	117.05
729.65	411.98
741.02	116.83
773.41	417.53
785.13	116.70
817.25	422.43
829.24	116.66
861.15	426.68
873.35	116.71
905.12	430.30
917.46	116.82
949.13	433.28
961.57	117.00
993.17	435.63

71

19. An aircraft configured for moving from a folded position to an unfolded position for flight in an atmosphere having low density, the aircraft comprising:

- a fuselage;
- a pair of wings extending from the fuselage in opposition to one another;
- a rear stabilizer extending from the fuselage in spaced relationship to the pair of wings;
- wherein each of the pair of wings and the rear stabilizer is foldable relative to the fuselage along a respective fold line;
- wherein each of the fuselage, the pair of wings, and the rear stabilizer present an upper surface opposing a lower surface;
- wherein the upper and lower surfaces are defined at an X position along an X axis, in a 3-dimensional X, Y, Z configuration; and
- wherein the upper and lower surfaces are defined at Y and Z positions along a respective Y and Z axis, corresponding substantially to the following table:

Y	Z	
1005.68	117.26	25
1037.25	437.34	
1049.79	117.67	
1081.35	438.41	
1093.90	118.26	30
1125.46	438.83	
1138.00	119.03	
1169.57	438.60	
1182.11	119.96	35
1213.67	437.72	
1226.20	121.01	
1257.75	436.19	
1270.30	122.11	40
1301.81	434.01	
1314.40	123.20	
1345.83	431.19	
1358.50	124.30	45
1389.81	427.74	
1402.59	125.48	
1433.73	423.67	
1446.68	126.77	50
1477.59	419.01	
1490.77	128.22	
1521.39	413.76	
1534.85	129.87	55
1565.12	407.93	
1578.92	131.74	
1608.77	401.56	
1622.98	133.88	60
1652.34	394.68	
1667.02	136.33	
1695.83	387.34	
1711.05	139.13	65
1739.27	379.66	
1755.04	142.31	
1782.65	371.68	
1799.01	145.91	70
1825.98	363.42	
1842.93	149.98	
1869.25	354.84	
1886.80	154.56	75
1912.45	345.90	
191.27	193.72	
1930.61	159.67	
1955.57	336.63	80
195.79	236.57	
1974.36	165.31	
1998.63	327.04	
2018.04	171.45	85
2041.63	317.21	
2061.66	178.05	
2084.61	307.28	

72

-continued

Y	Z
2105.22	185.01
2127.58	297.33
2148.72	192.28
2170.47	287.02
217.43	159.25
2192.19	199.79
2213.16	275.91
2235.63	207.48
223.69	270.30
2255.58	263.80
2279.04	215.29
2297.80	251.03
2321.20	224.19
257.36	140.96
260.67	294.21
300.44	131.64
300.83	312.40
342.35	327.29
344.24	126.54
3744.64	668.04
3758.76	679.04
3765.49	654.10
3778.09	682.59
3784.17	650.65
3797.57	685.21
3803.05	648.55
3817.10	687.46
3822.01	647.30
3836.67	689.38
3840.99	646.64
384.41	340.58
3856.25	691.10
3859.99	646.44
3875.86	692.61
3878.99	646.57
388.22	123.63
3895.47	694.00
3897.98	647.01
3915.08	695.32
3916.97	647.73
3934.71	696.47
3935.94	648.72
3954.35	697.51
3954.91	649.85
3973.87	651.12
3973.98	698.57
3992.81	652.63
3993.61	699.65
4011.73	654.36
4013.25	700.76
4030.63	656.29
4032.88	701.89
4049.51	658.39
4052.51	703.04
4068.38	660.63
4072.14	704.20
4087.23	662.99
4091.77	705.37
4106.07	665.47
4111.39	706.53
4124.89	668.04
4131.02	707.69
4143.70	670.71
4150.65	708.86
4162.50	673.48
4166.85	699.98
4181.28	676.32
4181.67	687.05
4198.83	681.03
4200.06	679.25
4218.82	682.24
426.85	352.58
432.29	121.80
469.58	363.51
476.39	120.56
512.54	373.55
520.48	119.50
555.68	382.76

73
-continued

Y	Z
564.59	118.60
598.98	391.18
608.69	117.90
642.42	398.84
652.80	117.40
685.98	405.76
696.91	117.05
729.65	411.98
741.02	116.83
773.41	417.53
785.13	116.70

5

10

74
-continued

Y	Z
817.25	422.43
829.24	116.66
861.15	426.68
873.35	116.71
905.12	430.30
917.46	116.82
949.13	433.28
961.57	117.00
993.17	435.63.

* * * * *