



Additive / Aerospace 2014 Los Angeles • November 3, 2014

Additive Manufacturing and 3D Printing in NASA: An Overview of Current Projects and Future Initiatives for Space Exploration

R. G. Clinton, Jr.
Deputy Manager, Science & Technology Office
Marshall Space Flight Center







- NASA Headquarters Structure and Sponsorship
- Aeronautics Applications
- "FOR Space" Additive Manufacturing
- "IN Space" Additive Manufacturing
 - National Research Council Committee on Space-Based Additive Manufacturing (COSBAM) Report Synopsis
 - Initiatives
- Cross-Cutting Activities
- Summary



Acknowledgements



America Makes – Ed Morris

Ames Research Center – Jessica Koehne

Glenn Research Center – Michael Meyer, Bob Carter

Goddard Space Flight Center – Peter Hughes, Aprille Ericsson

Jet Propulsion Laboratory – Kendra Short

Johnson Space Center – Michael Waid

Kennedy Space Center – Jack Fox

Langley Research Center – Karen Taminger

Marshall Space Flight Center – Frank Ledbetter, Kristin Morgan, Niki Werkheiser, Janet Salverson


National Research Council COSBAM – Dwayne Day, Betsy Cantwell

University of Southern California – Berok Khoshnevis



NASA Structure Related to Additive Manufacturing



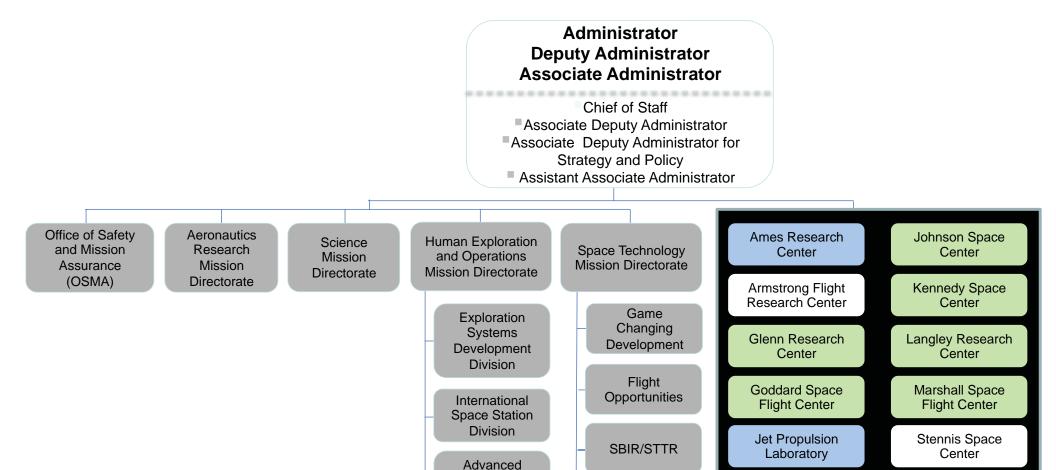

Exploration

Systems

Division

Space Technology

Research Grants

(STRG)

NIAC/CIF

Primary Focus

Limited Activities

Multiple R&D

Activities

Printed Electronics











Science & Technology AM for Aeronautics at Langley Research Center: Structures



- Engineered materials coupled with tailored structural design enable reduced weight and improved performance for future aircraft fuselage and wing structures
- Multi-objective optimization:
 - Structural load path
 - Acoustic transmission
 - Durability and damage tolerance
 - Minimum weight
 - Materials functionally graded to satisfy local design constraints
- Additive manufacturing using new alloys enables unitized structure with functionally graded, curved stiffeners
- Weight reduction by combined tailoring structural design and designer materials

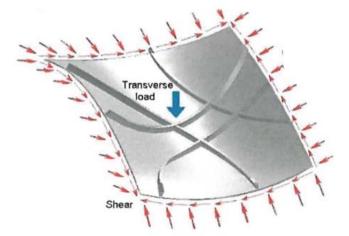

Design optimization tools integrate curvilinear stiffener and functionally graded elements into structural design

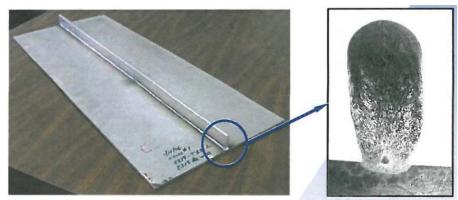

High toughness alloy at stiffener base for damage tolerance, transitioning to metal matrix composite for increased stiffness and acoustic damping


POC: Karen.M.Taminger@nasa.gov




AM for Aeronautics at Glenn Research Center: Propulsion




- Objective: Conduct the first comprehensive evaluation of emerging materials and manufacturing technologies that will enable fully non-metallic gas turbine engines.
- Assess the feasibility of using additive manufacturing technologies to fabricate gas turbine engine components from polymer and Ceramic matrix composites.
 - Fabricate prototype components and test in engine operating conditions
- Conduct engine system studies to estimate the benefits of a fully non-metallic gas turbine engine design in terms of reduced emissions, fuel burn and cost
- Focusing on high temperature and fiber reinforced polymer composites fabricated using FDM, and fundamental development of high temperature ceramics / CMC's using binder jet process

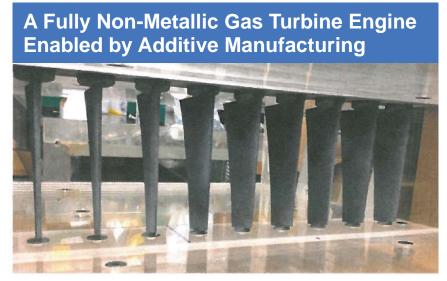


Polymer Vane Configuration in Cascade wind tunnel Rig



Digital Image CorrelationMeasurements



Finite Element Analysis

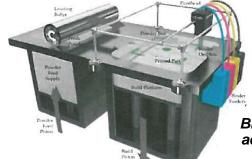

Binder jet process was adapted for SiC fabrication

NASA GRC POC: Joseph Grady










FOR Space Applications: Rocket Propulsion



- GRC and Aerojet Rocketdyne tested an additively manufactured injector in 2013 under the Manufacturing Innovation Project (MIP) and Advanced Manufacturing Technologies (AMT) Project.
- MSFC successfully tested two complex injectors printed with additive manufacturing August 2014
- GRC, LaRC, and MSFC Team building on success of MIP and AMT projects to develop and hot fire test additively manufactured thrust chamber assembly
 - Copper combustion chamber and nozzle produced via Selective Laser Melting (SLM)
 - Grade from copper to nickel for structural jacket and manifolds via EBF³
- RL10 Additive Manufacturing Study (RAMS) task order between GRC and Aerojet-Rocketdyne sponsored by USAF.
 - Related activity Generate materials characterization database on additively manufactured (AM) Ti-6Al-4V to facilitate the design and implementation of an AM gimbal cone for the RL10 rocket engine.
- GRC, AFRL, MSFC Additive Manufacturing of Hybrid Turbomachinery Disk:

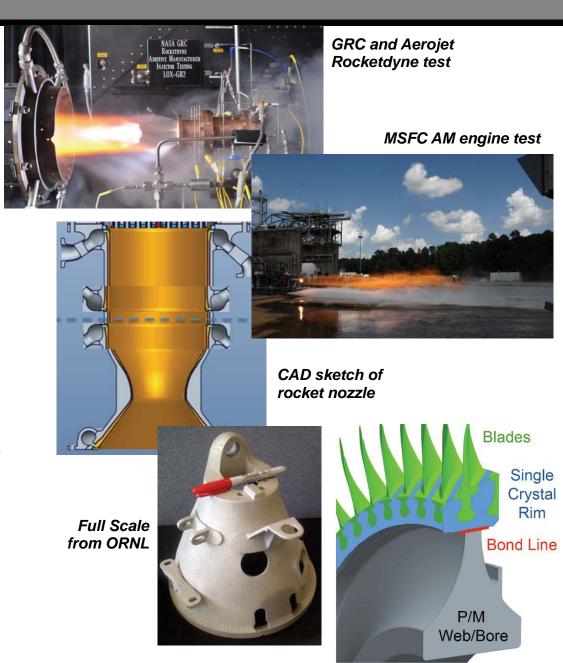

Hybrid Disk Concept



FOR Space Applications: Rocket Propulsion (concluded)




- Powder Bed Fusion (PBF) technologies enable rapid manufacturing of complex, high-value propulsion components.
- Flexibility inherent in the AM technologies increases design freedom; enables complex geometries. Designers can explore lightweight structures; integrate functionality; customize parts to specific applications and environments.
- Goal: reduce part count, welds, machining operations → reduce \$ and time











J-2X Gas Generator Duct

Pogo Z-Baffle Turbopump Inducer

RS-25 Flex Joint

Part	Cost Savings	Time Savings
J-2X Gas Generator Duct	70%	50%
Pogo Z-Baffle	64%	75%
Turbopump Inducer	50%	80%

RS-25 Flex Joint	Heritage Design	SLM Design
Part Count	45	17
# Welds	70+	26
Machining Operations	~147	~57




FOR Space Applications: Environmental Control and Life Support Systems and ISS Tools




 AM techniques can create extremely fine internal geometries that are difficult to achieve with subtractive manufacturing methods.









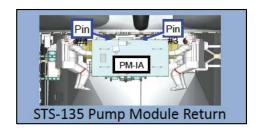

ISS EVA Tool Fabrication & Certification Demo



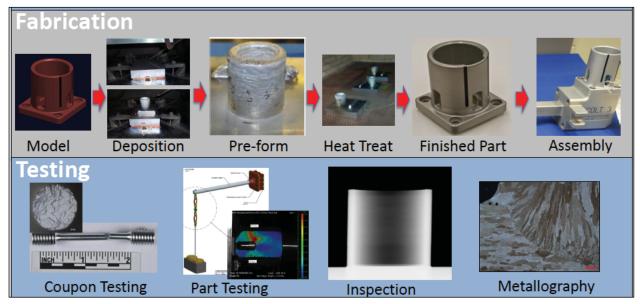

- ISS Tool Design for Manufacturability and Processing
- Structural Integrity
 Verification
 - Material Properties
 - Non-destructive Evaluation
 - Structural Analysis and Testing



FOR Space: Spacecraft Instruments and Components – Goddard Space Flight Center



- GSFC's first Additive Manufacturing (AM) part for instrument prototype/possible flight use (FY12) -Titanium tube - in a tube – in a tube for cryo thermal switch for ASTRO-H
- First to fly AM component in space (FY13) battery case on suborbital sounding rocket mission
- Miniaturizing telescopes: Utilize new Direct Metal Laser Sintering (DMLS) to produce <u>dimensionally</u> <u>stable</u> integrated instrument structures at lower cost
- Unitary core-and-face-sheet optical bench material
 - Features tailored alloy composition to achieve desired coefficient of thermal expansion
- Efficient radiation shielding through Direct Metal Laser Sintering:
 - Develop a method for mitigating risk due to total ionizing dose (TID) using direct metal laser sintering (DMLS) and the commerciallyavailable Monte-Carlo particle transport code, NOVICE to enable otherwise difficult to fabricate component-level shielding







Battery Case

0.3m Telescope via DMLS

Optical bench core material sample

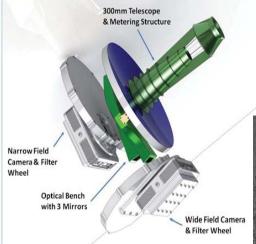

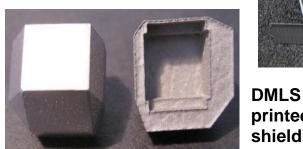







FOR Space: Spacecraft Electronics, Sensors and Coatings – Goddard Space Flight Center

 Aerosol jet printing of various circuit building blocks: crossovers, resistors, capacitors, chip attachments, EMI shielding.

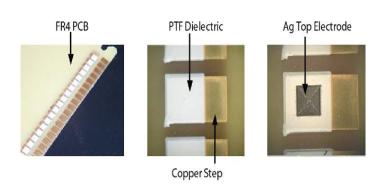



Printed RC filter

Multi-layer deposition, Polyimide dielectric and Ag deposited onto Cu pads to make a simple capacitor

- Nanosensors printed directly on a daughter board for chemical detection
- Super-black nanotechnology coating: Enable
 Spacecraft instruments to be more sensitive
 without enlarging their size. Demonstrated
 growth of a uniform layer of carbon nanotubes
 through the use of Atomic Layer Deposition.

Printed Nanosensor Graphene **Nanowires** Metal cluster for Functional groups for selectivity selectivity Printed Circuit Board Contact pad Metal lead Wire bond










National Research Council Committee on Space-Based Additive Manufacturing of Space Hardware – Task Summary



- The Air Force Space Command, the Air Force Research Laboratory Space Vehicles Directorate, the NASA Office of the Chief Technologist and the Space Technology Mission Directorate requested the US National Research Council (NRC) to
 - Evaluate the feasibility of the concept of space-based additive manufacturing of space hardware
 - Identify the science and technology gaps
 - Assess the implications of a spacebased additive manufacturing capability
 - Report delivered in July
 - Printed in September

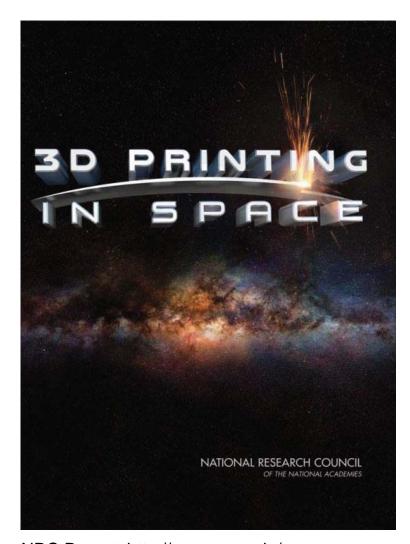


NRC Report: http://www.nap.edu/download.php?record_id=18871




NRC Report: The Promise (of In Space Manufacturing)




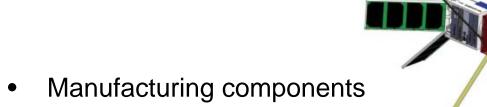

- Recycling
- Creating sensors or entire satellites
- Creating Structures Difficult To Manufacture On Earth Or Launch
- Using resources on off-Earth surfaces



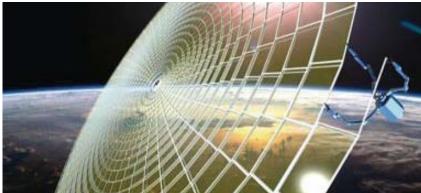

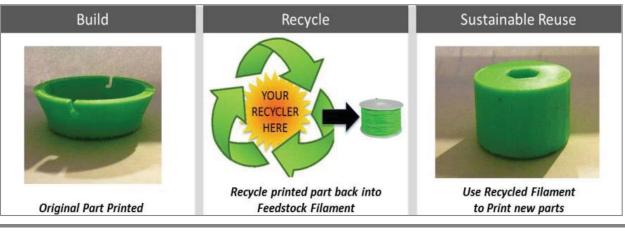





NRC Report: Summary Findings (10 Findings in 5 Categories)



Additive manufacturing in space has great potential. Space system configurations that are
currently dominated by requirements to survive ground manufacturing, assembly, test, transport, and
launch could be reexamined as AM capability becomes available, and additive manufacturing might
provide the means to transform space architectures.

However, there are many technological and regulatory hurdles before such a vision could be achieved.

- **Terrestrial challenges remain unresolved.** Before moving additive manufacturing technology to the space environment, further development in several fundamental areas needs to be complete and well understood. These areas represent barriers to a wider use, even in a ground-based environment, and preclude additive manufacturing techniques moving immediately to a space-based environment.
- Space related challenges magnify terrestrial ones. The space environment (zero gravity, vacuum)
 poses additional constraints, and additive manufacturing is even more of a systems engineering and
 industrial logistics problem compared to additive manufacturing on the ground.
- Technology not implementable without supporting infrastructure. Supporting infrastructure and environment which are relatively straightforward and easy considerations on the ground (i.e. rent factory space, connect to the local power grid) are not simple for space issues such as supply chain logistics, integrated processes, minimal human interaction, and quality control are more pronounced.



NRC Report: Summary Recommendations for Air Force and NASA




- Analysis. Agencies need to do systems and cost benefit analyses (CBA) related to the value of AM in space. The analyses should not focus just on how AM could replace traditional manufacturing but how it can enable entirely new structures and functionalities that were not possible before. A specific area where a CBA would be helpful is in the manufacture of smaller satellites on the ISS.
- **Investment**. Targeted investment is needed in areas such as <u>standardization and certification</u>, and <u>infrastructure</u>. The investment should be strategic, and use workshops and other information-sharing forums to develop roadmaps with short and long-term targets.
- **Platforms**. Given the short life of the <u>ISS</u>, agencies should leverage it to the extent feasible to test AM and AM parts.
- Cooperation, coordination and collaboration. Instead of stove-piped parallel development in multiple institutional settings, it is critical that there be cooperation, coordination and collaboration within and across agencies, sectors, and nations. It would be useful to develop working groups, conferences and leverage existing efforts such as the *America Makes*.
- **Education and training**. Agencies need to <u>develop capabilities</u> related to relevant fields such as material science and others that would be important for the development of the field of AM.



NASA IN Space Manufacturing Technology Development Vision



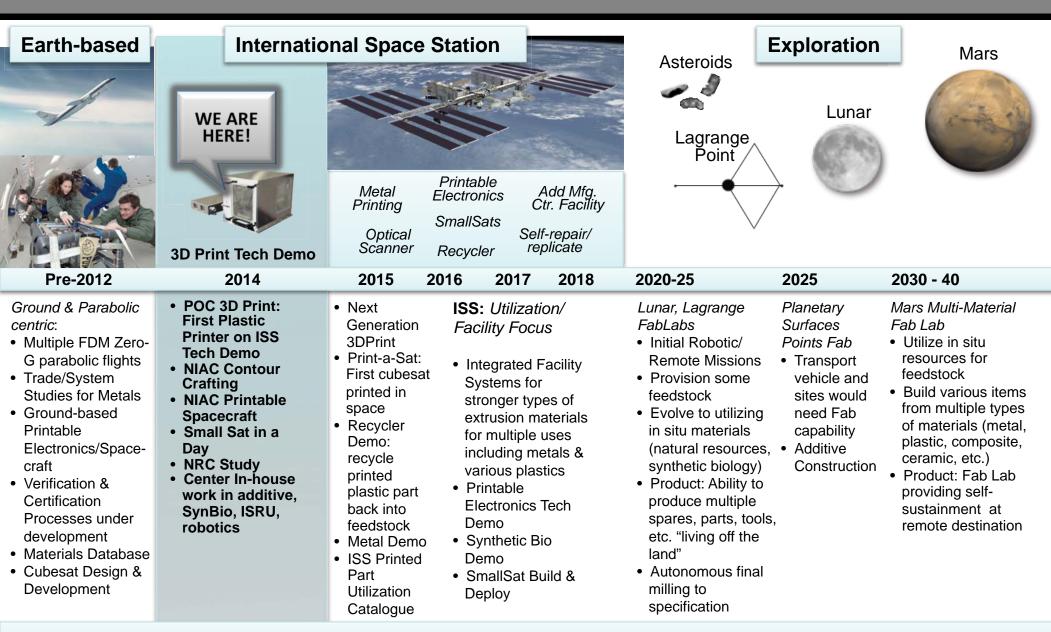


Meets objectives of Agency Decadal Survey AP10 and STMD Technology Areas 7 and 12




IN Space Manufacturing: ISS Tech Demo – 3D Print



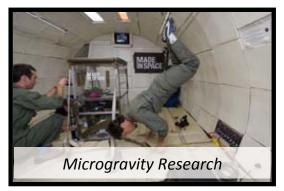

The first 3D Printer in space was delivered to the ISS on SpaceX-4 and will investigate the effects of consistent microgravity on melt deposition additive manufacturing by printing parts in space.





Melt deposition modeling:

- 1) nozzle ejecting molten plastic,
- deposited material (modeled part),
- 3) controlled movable table

Potential Mission Accessories













3D Print Specifications

Dimensions 33 cm x 30 cm x 36 cm **Print Volume** 6 cm x 12 cm x 6 cm

Mass 20 kg (w/out packing material or

spares)

Est. Accuracy 95 % **Resolution** .35 mm


Maximum Power 176W (draw from MSG)

Software MIS SliceR

Traverse Linear Guide Rail

Feedstock ABS Plastic



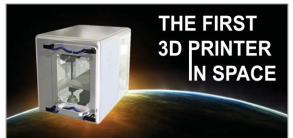



IN Space Manufacturing (ISM) Activities



3D Printing in Zero-G Continuation:

 MSFC analyses of Flight Parts compared to ground samples, publish results

Utilization Catalogue Development

 MSFC/JSC working with ISS IVA Tools and Operations Support Offices to define, first AM Parts for In-space Utilization

ISS Scanner/In-space Verification & Validation


 Made in Space, Inc.: provides CoTS Scanner for ISS Flight

In-space Materials Characterization Database

 MSFC Foundation for In-space utilization, analyses, testing, & verification

Recycler Tech Demo

 Two Phase I SBIRs awarded which will be completed early FY15.

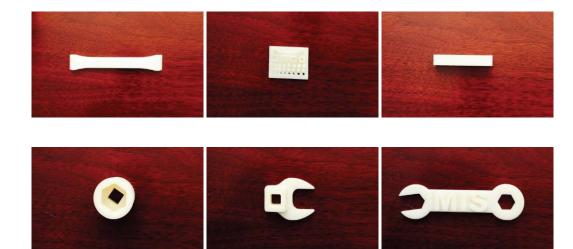



Original Part Printed



Recycle printed part back into Feedstock Filament



IN Space Manufacturing (ISM) Activities



Printable Electronics


 ARC/MSFC/JPL: Develop in-space manufacturing capabilities to produce functional electronic and photonic component on demand.

In-space Additive Repair

 JSC/MSFC: working with JSC and MMOD Office to develop and test process for ground-based repair of MMOD simulated damaged panels for future in-space capability.




Close-up of simulated MMOD Damage to External ISS Panel

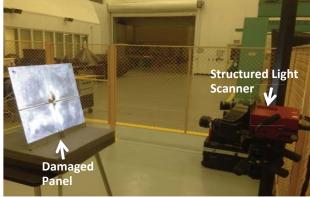

Scanning the Damaged Panel

Additive Construction

 Co-led by KSC & MSFC: Joint project with Engineer Research and Development Center – Construction Engineering Research Laboratory, U. S. Army Corp of Engineers.

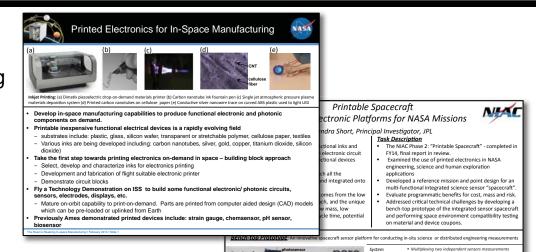







IN Space: Electron Beam Freeform Fabrication (EBF³) – Langley Research Center



Portable Systems for In-Space Simulation Experiments


- First successful microgravity demos
 February 2006
- Microgravity tests support fabrication, assembly and repair of space structures and in-space manufacturing of spare parts
- Smaller build volume (12" x 12" x 12")
 with finer wire for more precise deposits
 minimizing or eliminating finish machining
- Two systems designed and integrated inhouse to assess different approaches for reducing power, volume and mass without impacting build volume



POC: Karen.M.Taminger@nasa.gov





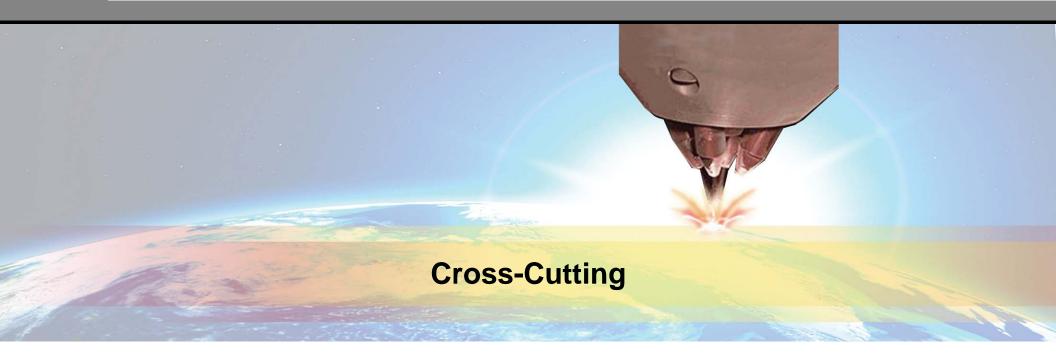



Cross-Cutting: Additive Manufacturing Challenges and Constraints to Widespread Adoption




Need/Issue	Impact If Not Addressed
Dimensional accuracy & surface finish	Additional processing cost, unusable parts
Uniform mechanical properties – different in build direction	Increased design complexity & added weight, suboptimal designs
Improved process control & repeatability	Acceptable part quality, process yield & cost
NDE methods for complex defects and part geometry-understanding of potential defects – effects of defects	Undetected defects leading to component failure
AM Standards (Materials, process, machine, quality)	Slow implementation of AM in industrial base
Qualification and Certification protocols	Slow adoption, conflicting approaches, waste in research and sustainment dollars
Design tools for AM components	Suboptimal design, increased time to market, material waste, poor performance



Cross-Cutting: Rocket Propulsion Additive Manufacturing Technology Interchange Meeting (TIM) – Sept. 3-5, 2014



- JANNAF Liquid Propulsion Subcommittee (LPS) Advanced Materials Panel hosted an Additive Manufacturing TIM at the Jackson Center in Huntsville, AL
 - Focus was on Additive Manufacturing for Rocket Propulsion
 - Understanding state-of-the-art Additive Manufacturing for fabricating parts for rocket propulsion applications - where are we today
 - Understanding what is required to take AM parts to flight
 - Organizations brought hardware for display
- 284 Attendees from 19 States

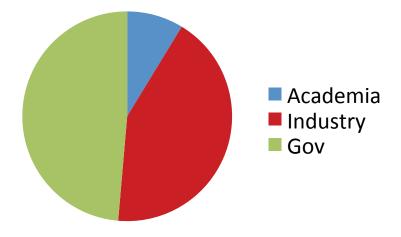













Cross-Cutting: Additive Manufacturing Development Processing-Structure-Property Relationships



Technical Objectives

Build the standard level of information on AM powder bed fusion processes that is required for qualification of any new critical process used for aerospace applications

Expand and extend the manufacturing base for aerospace hardware through standardization and qualification of critical AM processes. Better understanding of controlling process parameters and process failure modes will be achieved through completion of this study. Opportunities for industry participation are available in each of the tasks below.

- 1. Build Interactions / Effects ARC/LaRC/MSFC Objective: Understand how basic AM build factors influence part properties.
- 2. Powder Influence / Effects GRC *Objective:* Understand how basic powder feedstock characteristics influence a part's physical, mechanical, and surface properties.
- 3. Thermal Processing / Effects LaRC/MSFC *Objective:* a) Understand how standard wrought thermal processes influence AM mechanical properties, and b) explore the potential cost and benefit of AM-specific thermal processing.
- 4. Surface Improvement / Effects MSFC *Objective:* Understand how as-built and improved AM surface texture influence part performance and fatigue life.
- 5. Applied Materials Characterization GRC/LaRC/MSFC *Objective:* Enable use of AM parts in severe aerospace environments.
- 6. Qualification of AM Critical Components MSFC *Objective:* Develop an Agency-wide accepted practice for the qualification of AM processes for aerospace hardware.

Related Task: Process Modeling – GRC,MSFC Objective: Use precipitation modeling to predict location specific microstructure in as-fabricated and post-processed 718, which has been fabricated with selective laser sintering





Cross-Cutting: Certification – NDE



Foundational NDE Methodology for Certification of Additive Manufacturing (AM) Parts and Materials

- Purpose: Develop certification methodologies designed to ensure the production of safe and reliable AM parts for spaceflight applications. Emphasis will be placed on metals and AM processes used in fabrication of propulsion system components.
- **Justification:** AM is a rapidly emerging technology and there is a recognized lag in AM process and part validation and certification methodologies. NDE has been identified as one key technology to close this gap.
- **Summary:** The OSMA state of the art AM report will be used to define highest priority needs/gaps for NDE of AM parts. Resources will be used to down select and optimize NDE techniques that will then be combined with NDE modeling for a cost-effective methodology for verifying part quality. A workshop will be held mid year to assess progress and further define needs.



Summary



- NASA, including each Mission Directorate, is investing in, experimenting with, and/or utilizing AM across a broad spectrum of applications and projects.
- Centers have created and are continuing to create partnerships with industry, other Government Agencies, other Centers, and Universities.
- In-house additive manufacturing capability enables rapid iteration of the entire design, development and testing process, increasing innovation and reducing risk and cost to projects.
- For deep space exploration, AM offers significant reduction to logistics costs and risk by providing ability to create on demand.
- There are challenges: Overwhelming message from recent JANNAF AM for Propulsion Applications TIM was "certification."
- NASA will continue to work with our partners to address this and other challenges to advance the state of the art in AM and incorporate these capabilities into an array of applications from aerospace to science missions to deep space exploration.