



US008795903B2

(12) **United States Patent**
Smart et al.

(10) **Patent No.:** **US 8,795,903 B2**
(45) **Date of Patent:** **Aug. 5, 2014**

(54) **LITHIUM-ION ELECTROLYTES
CONTAINING FLAME RETARDANT
ADDITIVES FOR INCREASED SAFETY
CHARACTERISTICS**

(75) Inventors: **Marshall C. Smart**, Studio City, CA
(US); **Kiah A. Smith**, Milwaukee, WI
(US); **Ratnakumar V. Bugga**, Arcadia,
CA (US); **Surya G. Prakash**, Hacienda
Heights, CA (US); **Frederick Charles
Krause**, San Francisco, CA (US)

(73) Assignee: **California Institute of Technology**,
Pasadena, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 918 days.

(21) Appl. No.: **12/543,495**

(22) Filed: **Aug. 18, 2009**

(65) **Prior Publication Data**

US 2010/0047695 A1 Feb. 25, 2010

Related U.S. Application Data

(60) Provisional application No. 61/189,415, filed on Aug.
19, 2008, provisional application No. 61/201,842,
filed on Dec. 16, 2008.

(51) **Int. Cl.**
H01M 6/16 (2006.01)

(52) **U.S. Cl.**
USPC **429/332**; 429/330; 429/199; 429/200;
429/307; 429/331; 252/62.2

(58) **Field of Classification Search**
USPC 429/332, 330, 199, 200, 307, 331;
252/62.2

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,399,255 B2	6/2002	Herreyre et al.	
6,492,064 B1	12/2002	Smart et al.	
2005/0277027 A1 *	12/2005	Kim et al.	429/330
2006/0073391 A1 *	4/2006	Kim	429/329
2009/0017386 A1 *	1/2009	Xu et al.	429/331

OTHER PUBLICATIONS

Doughty, D.H., et al., "Effects of Additives on Thermal Stability of Li
Ion Cells", Journal of Power Sources, 2005, 146, pp. 116-120.

Ma, Y., et al., "A Phosphorous Additive for Lithium-Ion Batteries",
Electrochemical and Solid State Letters, 2008, 11 (8), pp. A129-
A131.

Nam, T., et al., "Diphenyloctyl Phosphate and Tris(2,2,2-
trifluoroethyl) Phosphite as Flame-Retardant Additives for Li-Ion
Cell Electrolytes at Elevated Temperatures", Journal of Power
Sources, 2008, 180, pp. 561-567.

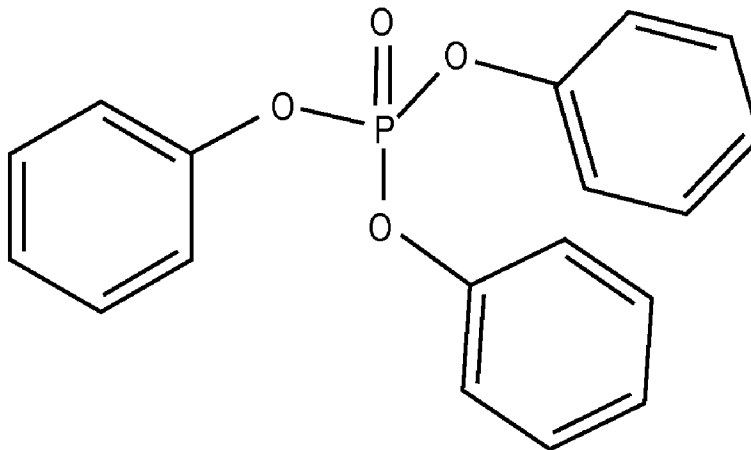
(Continued)

Primary Examiner — Laura Weiner

(57) **ABSTRACT**

The invention discloses various embodiments of Li-ion elec-
trolytes containing flame retardant additives that have deliv-
ered good performance over a wide temperature range, good
cycle life characteristics, and improved safety characteristics,
namely, reduced flammability. In one embodiment of the
invention there is provided an electrolyte for use in a lithium-
ion electrochemical cell, the electrolyte comprising a mixture
of an ethylene carbonate (EC), an ethyl methyl carbonate
(EMC), a fluorinated co-solvent, a flame retardant additive,
and a lithium salt. In another embodiment of the invention
there is provided an electrolyte for use in a lithium-ion elec-
trochemical cell, the electrolyte comprising a mixture of an
ethylene carbonate (EC), an ethyl methyl carbonate (EMC), a
flame retardant additive, a solid electrolyte interface (SEI)
film forming agent, and a lithium salt.

9 Claims, 40 Drawing Sheets



TRIPHENYL PHOSPHATE

(56)

References Cited

OTHER PUBLICATIONS

Smart, M.C., et al., "Improved Performance of Lithium-Ion Cells With the Use of Fluorinated Carbonate-Based Electrolytes", *Journal of Power Sources*, 2003, 119-121, pp. 359-367.

Smith, K.A., et al., "Lithium-Ion Electrolytes Containing Flame-Retardant Additives for Increased Safety Characteristics", *ECS Transactions*, 2009, 16 (35), pp. 33-41, The Electrochemical Society.

Smith, K.A., et al., "Lithium-Ion Electrolytes Containing Flame-Retardant Additives for Increased Safety Characteristics", 214th Meeting of the Electrochemical Society, Honolulu, HI, Oct. 15, 2008.

Wang, X., et al., "Nonflammable Trimethyl Phosphate Solvent-Containing Electrolytes for Lithium-Ion Batteries", *Journal of the Electrochemical Society*, 2001, 148 (10), pp. A1058-A1065.

Wang, X., et al., "Nonflammable Trimethyl Phosphate Solvent-Containing Electrolytes for Lithium-Ion Batteries", *Journal of the Electrochemical Society*, 2001, 148 (10), pp. A1066-A1071.

Xu, K., et al., "An Attempt to Formulate Nonflammable Lithium Ion Electrolytes with Alkyl Phosphates and Phosphazenes", *Journal of the Electrochemical Society*, 2002, 149 (5), pp. A622-A626.

Xu, K., et al., "Nonflammable Electrolytes for Li-Ion Batteries Based on a Fluorinated Phosphate", *Journal of the Electrochemical Society*, 2002, 149 (8), pp. A1079-A1082.

Xu, K., et al., "Evaluation of Fluorinated Alkyl Phosphates as Flame Retardants in Electrolytes for Li-Ion Batteries", *Journal of the Electrochemical Society*, 2003, 150 (2), pp. A161-A169.

Xu, K., "Nonaqueous Liquid Electrolytes for Lithium-Based Rechargeable Batteries", *Chem. Rev.*, 2004, 104, pp. 4303-4417.

Zhang, S.S., et al., "Tris(2,2,2-Trifluoroethyl) Phosphite as a Co-Solvent for Nonflammable Electrolytes in Li-Ion Batteries", *Journal of Power Sources*, 2003, 113, pp. 166-172.

* cited by examiner

Fig. 1
**Charge-discharge characteristics of experimental lithium-ion
 cells containing various electrolytes subjected to formation cycling**

ELECTROLYTE TYPE	CHARGE CAPACITY (Ah) 1ST CYCLE	DISCHARGE CAPACITY (Ah) 1ST CYCLE	IRREVERSIBLE CAPACITY (1ST CYCLE)	COULOMBIC EFFICIENCY (1ST CYCLE)	CHARGE CAPACITY (Ah) 5TH CYCLE	REVERSIBLE CAPACITY (Ah) 5TH CYCLE	CUMULATIVE IRREVERSIBLE CAPACITY (1ST-5TH CYCLE)	COULOMBIC EFFICIENCY (5TH CYCLE)
1.0 M LiPF ₆ EC+EMC (20:80 v/v %)	0.4216	0.3334	0.088	79.08	0.3341	0.3266	0.1241	97.76
1.0 M LiPF ₆ EC+EMC (20:80 v/v %)	0.46816	0.40443	0.064	86.39	0.40126	0.39136	0.1136	97.53
1.0 M LiPF ₆ EC+DEC+DMC (1:1:1 v/v %)	0.47882	0.41059	0.068	85.75	0.41169	0.39789	0.1313	96.65
1.0 M LiPF ₆ EC+EMC+TFEB (20:60:20 v/v %)	0.51793	0.44202	0.076	85.34	0.43826	0.43123	0.1140	98.40
1.0 M LiPF ₆ EC+EMC+TFEB+TPP (20:55:20:5 v/v %)	0.48152	0.41348	0.068	85.87	0.40638	0.39901	0.1045	98.19
1.0 M LiPF ₆ EC+EMC+TFEB+TBP (20:55:20:5 v/v %)	0.48621	0.40535	0.081	83.37	0.40872	0.39525	0.1393	96.70
1.0 M LiPF ₆ EC+EMC+TFEB+TEP (20:55:20:5 v/v %)	0.46896	0.38857	0.080	82.86	0.39595	0.38401	0.1340	96.98
1.0 M LiPF ₆ EC+EMC+TFEB+BTfEMP (20:55:20:5 v/v %)	0.48073	0.39720	0.084	82.62	0.39859	0.38546	0.1476	96.71

Fig. 2
Summary of the Discharge Capacity at Low Temperature for MCMB-LiNiCoO₂
containing Electrolytes with Flame Retardant Additives

ELECTROLYTE TYPE		1.00 M LiPF ₆ EC+EMC+TFEB (20:60:20 v/v %)		1.0 M LiPF ₆ EC+EMC+TFEB+TPPh (20:55:20:5 v/v %)		1.0 M LiPF ₆ EC+EMC+TFEB+TBuPh (20:55:20:5 v/v %)		1.0 M LiPF ₆ EC+EMC+TFEB+TEPh (20:55:20:5 v/v %)		1.0 M LiPF ₆ EC+EMC+TFEB+TFMPo (20:55:20:5 v/v %)	
TEMP. (°C)	DISCHARGE CURRENT (mA)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)
23°	25	0.4312	100.00	0.3990	100.00	0.3953	100.00	0.3840	100.00	0.3855	100.00
0°	25	*	*	0.3012	75.50	0.2898	73.32	0.2553	66.48	0.2867	74.37
-20°	25	0.3718	86.22	0.2583	64.73	0.2708	68.51	0.2218	57.75	0.2469	64.05
	50	0.3528	81.81	0.2290	57.38	0.0416	10.51	0.1681	43.77	0.1810	46.95
	100	*	*	0.1244	31.19	0.1141	28.87	0.0625	16.28	0.0332	13.80
-30°	25	*	*	0.1432	35.88	0.2022	51.15	0.0626	16.31	0.1461	37.90
-40°	25	0.3166	73.42	0.0789	19.76	0.0879	22.25	0.2023	52.67	0.0894	23.20
	50	0.2631	61.01	0.0366	9.17	0.0416	10.51	0.0472	12.30	0.0389	10.09
	100	*	*	0.0245	6.13	0.0288	7.30	0.0305	7.94	0.0259	6.73
-50°	25	0.2024	46.94	0.0253	6.34	0.0301	7.61	0.0281	7.31	0.0271	7.03
	50	0.0324	7.51	0.0004	0.09	0.0201	5.09	0.0208	5.42	0.0195	5.05
-60°	5	0.2723	63.14	0.0660	16.54	0.1206	30.52	0.0590	15.35	0.0518	13.43
	10	0.1918	44.48	0.0008	0.19	0.0074	1.87	0.0051	1.34	0.0042	1.10
	25	0.0209	4.85	0.0004	0.09	0.0063	1.60	0.0099	2.58	0.0079	2.05

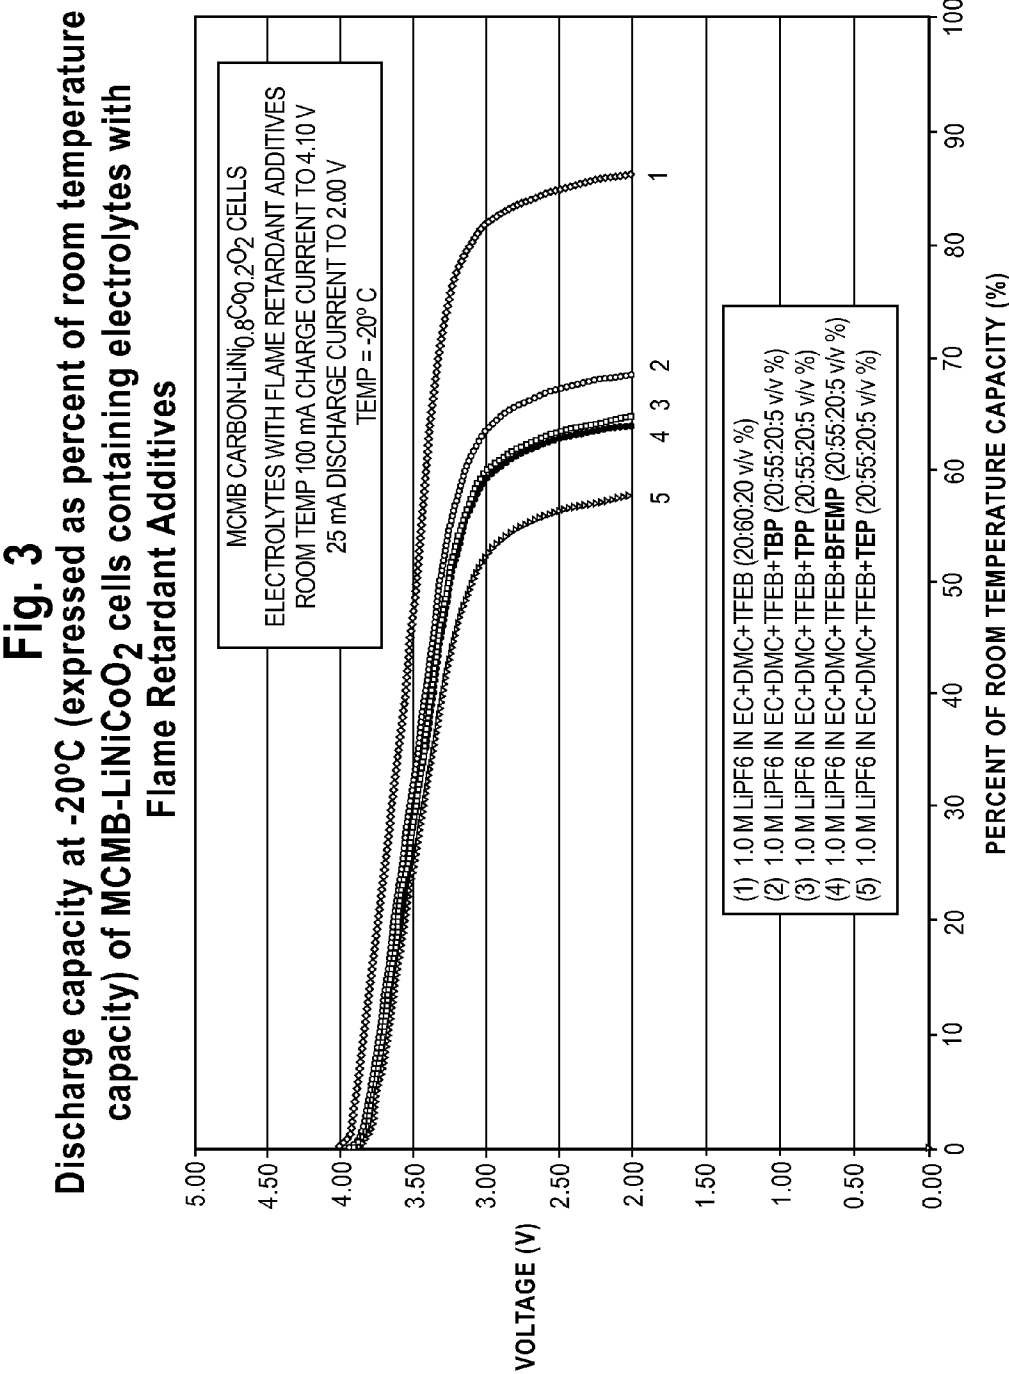


Fig. 4

Cycle life performance of MCMB-LiNiCoO₂ cell containing electrolytes with

Flame Retardant Additives

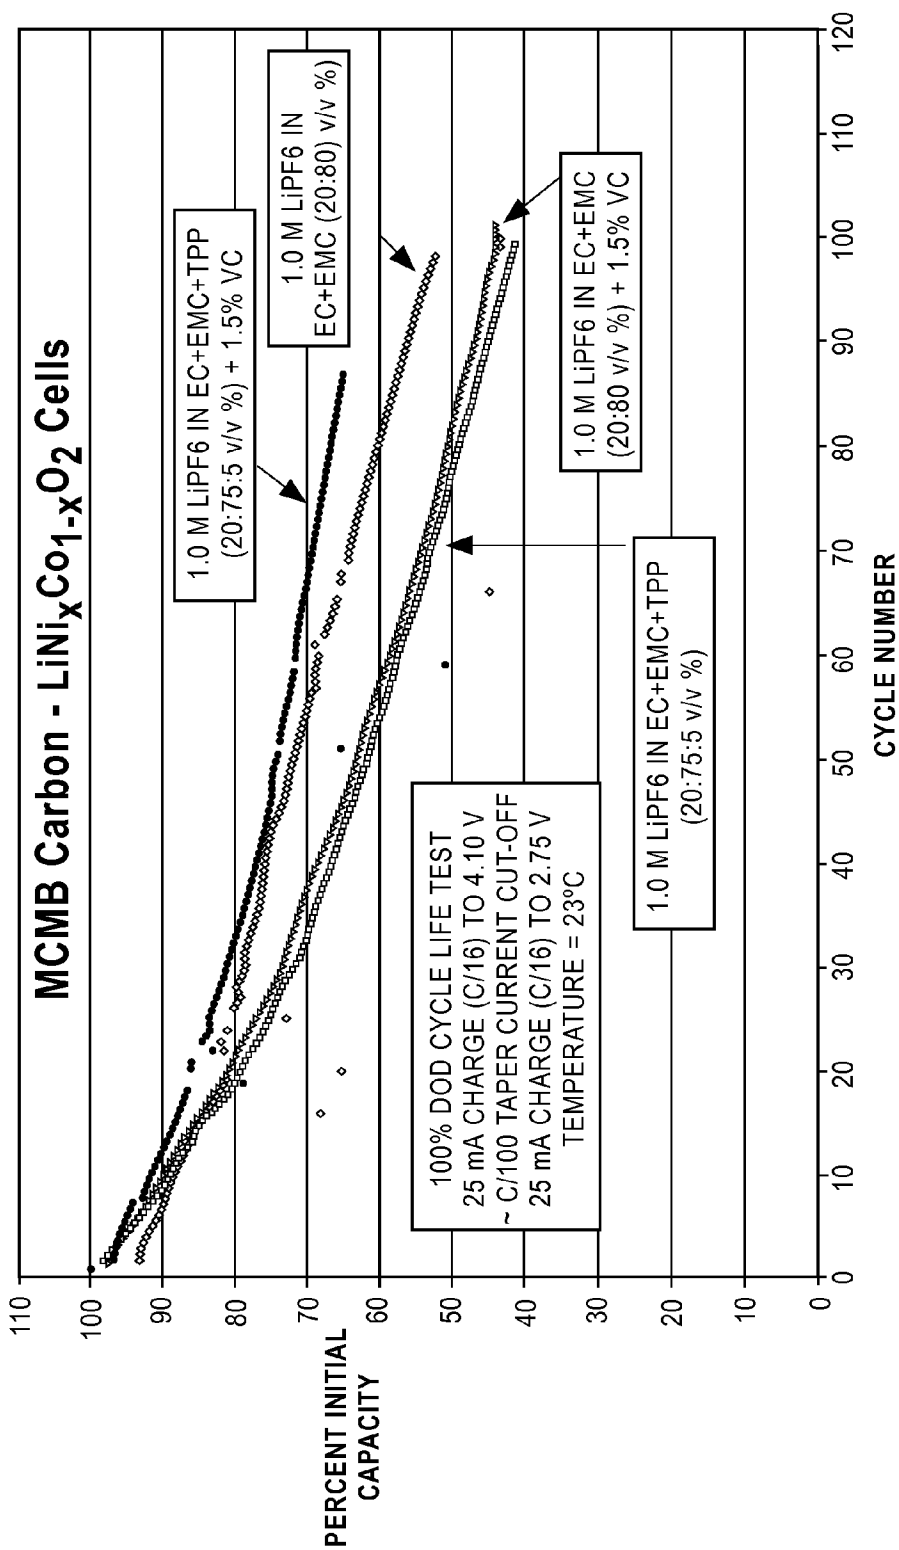
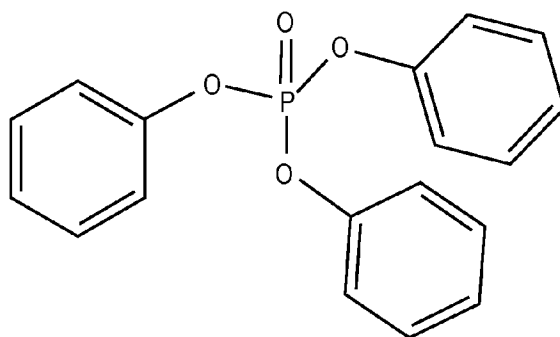
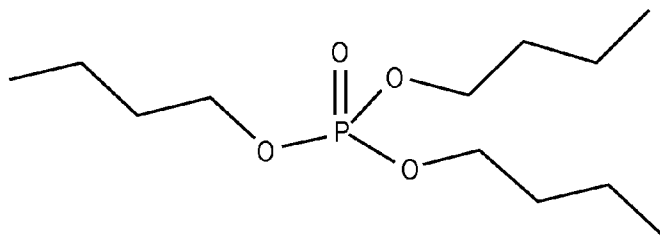
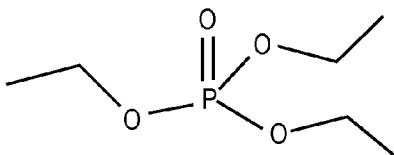


Fig. 5a

TRIPHENYL PHOSPHATE

Fig. 5b

TRIBUTYL PHOSPHATE

Fig. 5c

TRIETHYL PHOSPHATE

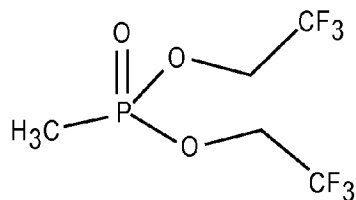
Fig. 5dBIS (2,2,2-TRIFLUOROETHYL)
METHYL PHOSPHONATE

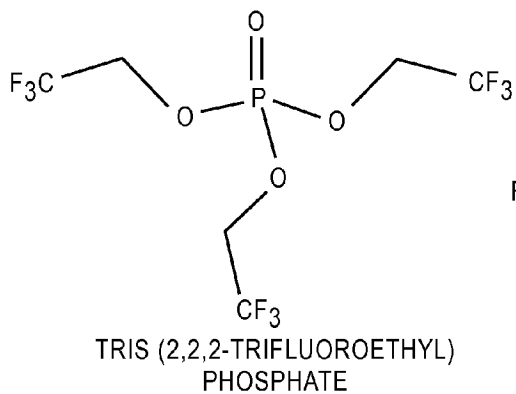
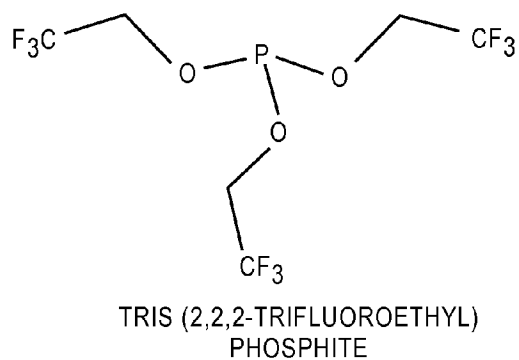
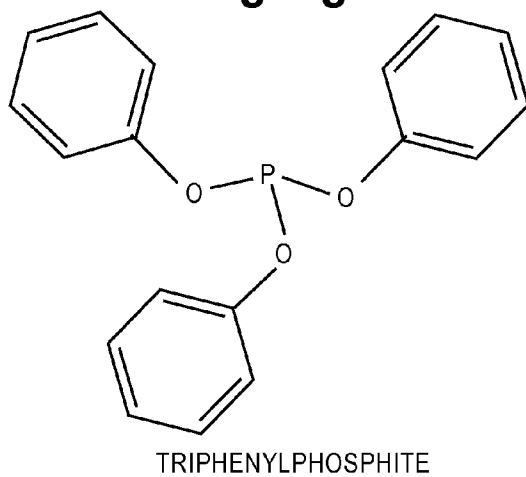
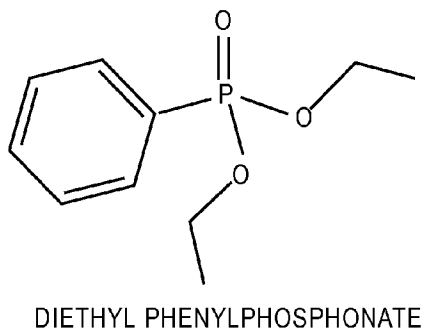
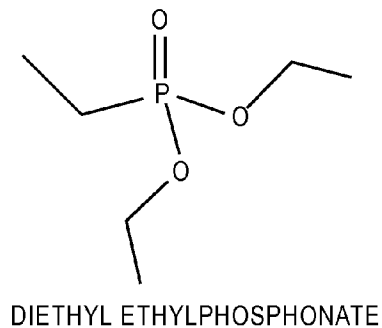
Fig. 5e**Fig. 5f****Fig. 5g****Fig. 5h****Fig. 5i**

Fig. 6

**Charge-discharge characteristics of experimental MCMB-LiNiCoO₂ cells
containing electrolytes with Flame Retardant Additives subjected to formation cycling**

ELECTROLYTE TYPE	CHARGE CAPACITY (Ah) 1ST CYCLE	DISCHARGE CAPACITY (Ah) 1ST CYCLE	IRREVERSIBLE CAPACITY (1ST CYCLE)	COULOMBIC EFFICIENCY (1ST CYCLE)	CHARGE CAPACITY (Ah) 5TH CYCLE	REVERSIBLE CAPACITY (Ah) 5TH CYCLE	CUMULATIVE IRREVERSIBLE CAPACITY (1ST-5TH CYCLE)	COULOMBIC EFFICIENCY (5TH CYCLE)
1.0 M LiPF ₆ EC+EMC+TFPa (20:75:5 v/v %)	0.5267	0.3944	0.1323	74.88	0.4312	0.3870	0.3419	89.76
1.0 M LiPF ₆ EC+EMC+TFPi (20:75:5 v/v %)	0.4949	0.4195	0.0754	84.76	0.4224	0.4097	0.1353	96.99
1.0 M LiPF ₆ EC+EMC+TPPi (20:75:5 v/v %)	0.4726	0.3982	0.0744	84.26	0.4130	0.4022	0.1283	97.37
1.0 M LiPF ₆ EC+EMC+DEP (20:75:5 v/v %)	0.4713	0.4151	0.0563	88.06	0.4001	0.3987	0.0703	99.65
1.0 M LiPF ₆ EC+EMC+DPP (20:75:5 v/v %)	0.4632	0.3960	0.0672	85.49	0.3924	0.3862	0.1027	98.40

Fig. 7
Fifth discharge of formation cycling for cells containing Flame Retardant Additives. Discharge at 25 mA at room temperature.


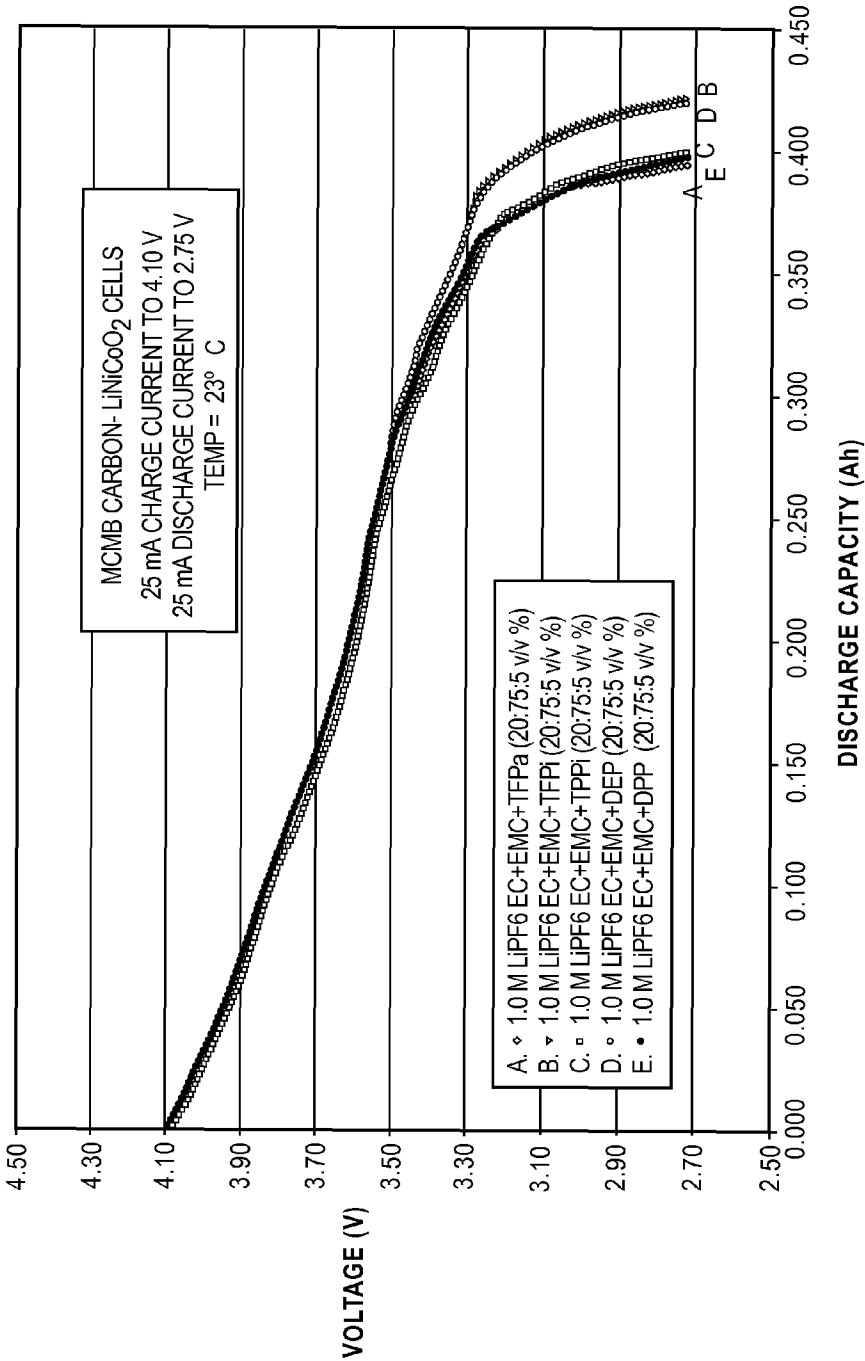


Fig. 8

Summary of the discharge capacity at low temperature of a number of MCMB-LiNiCoO₂ cells containing electrolytes with Flame Retardant Additives.

ELECTROLYTE TYPE		FLAME RETARDANT ADDITIVES											
		1.0 M LiPF ₆ EC+EMC+TFPa (20:75:5 v/v %) #2		1.0 M LiPF ₆ EC+EMC+TFPi (20:75:5 v/v %)		1.0 M LiPF ₆ EC+EMC+TPPi (20:75:5 v/v %)		1.0 M LiPF ₆ EC+EMC+DEP (20:75:5 v/v %)		1.0 M LiPF ₆ EC+EMC+DPP (20:75:5 v/v %)			
TEMP. (°C)	DISCHARGE CURRENT (mA)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)
23°	25	0.3918	100.00	0.3991	100.00	0.4007	100.00	0.3770	100.00	0.3756	100.00		
0°	25	0.3617	92.31	0.3656	91.62	0.3477	86.78	0.3450	91.52	0.3466	92.30		
-20°	25	0.3295	84.10	0.3449	86.42	0.3016	75.28	0.3298	87.50	0.3249	86.52		
	50	0.3152	80.45	0.3301	82.71	0.2785	69.51	0.3164	83.94	0.3114	82.92		
	100	0.2891	73.78	0.2998	75.11	0.2398	59.84	0.2949	78.23	0.2878	76.63		
-30°	25	0.2980	76.06	0.3166	79.32	0.2617	65.31	0.3071	81.47	0.2998	79.83		
-40°	25	0.2846	72.65	0.2908	72.87	0.2276	56.81	0.2916	77.34	0.2753	73.29		
	50	0.1873	47.80	0.2083	52.21	0.1220	30.44	0.2250	59.68	0.1986	52.88		
	100	0.0385	9.83	0.0647	16.21	0.0268	6.69	0.0920	24.41	0.0682	18.15		
-50°	25	0.0649	16.56	0.1080	27.06	0.0450	11.23	0.1465	38.86	0.0926	24.66		
	50	0.0098	2.51	0.0165	4.13	0.0091	2.27	0.0200	5.29	0.0139	3.70		
-60°	5	0.0922	23.52	0.1919	48.10	0.0481	12.02	0.2153	57.12	0.1602	42.66		
	10	0.0076	1.94	0.0170	4.25	0.0073	1.81	0.0543	14.40	0.0122	3.26		

Fig. 9
Discharge capacity at -20°C (expressed as percent of room temperature capacity) of MCMB-LiNiCoO₂ cells containing electrolytes with Flame Retardant Additives

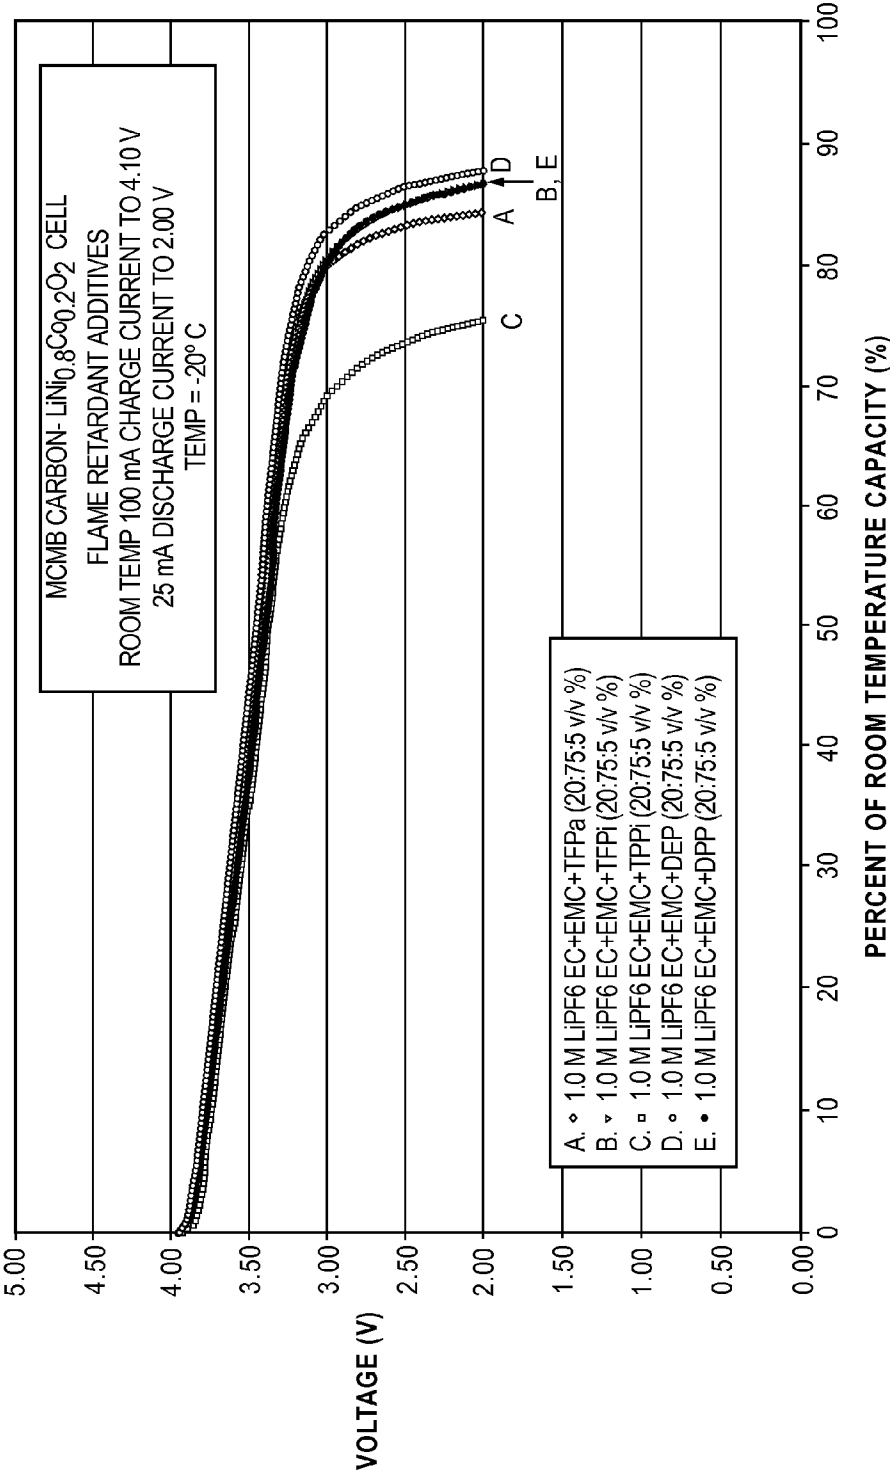

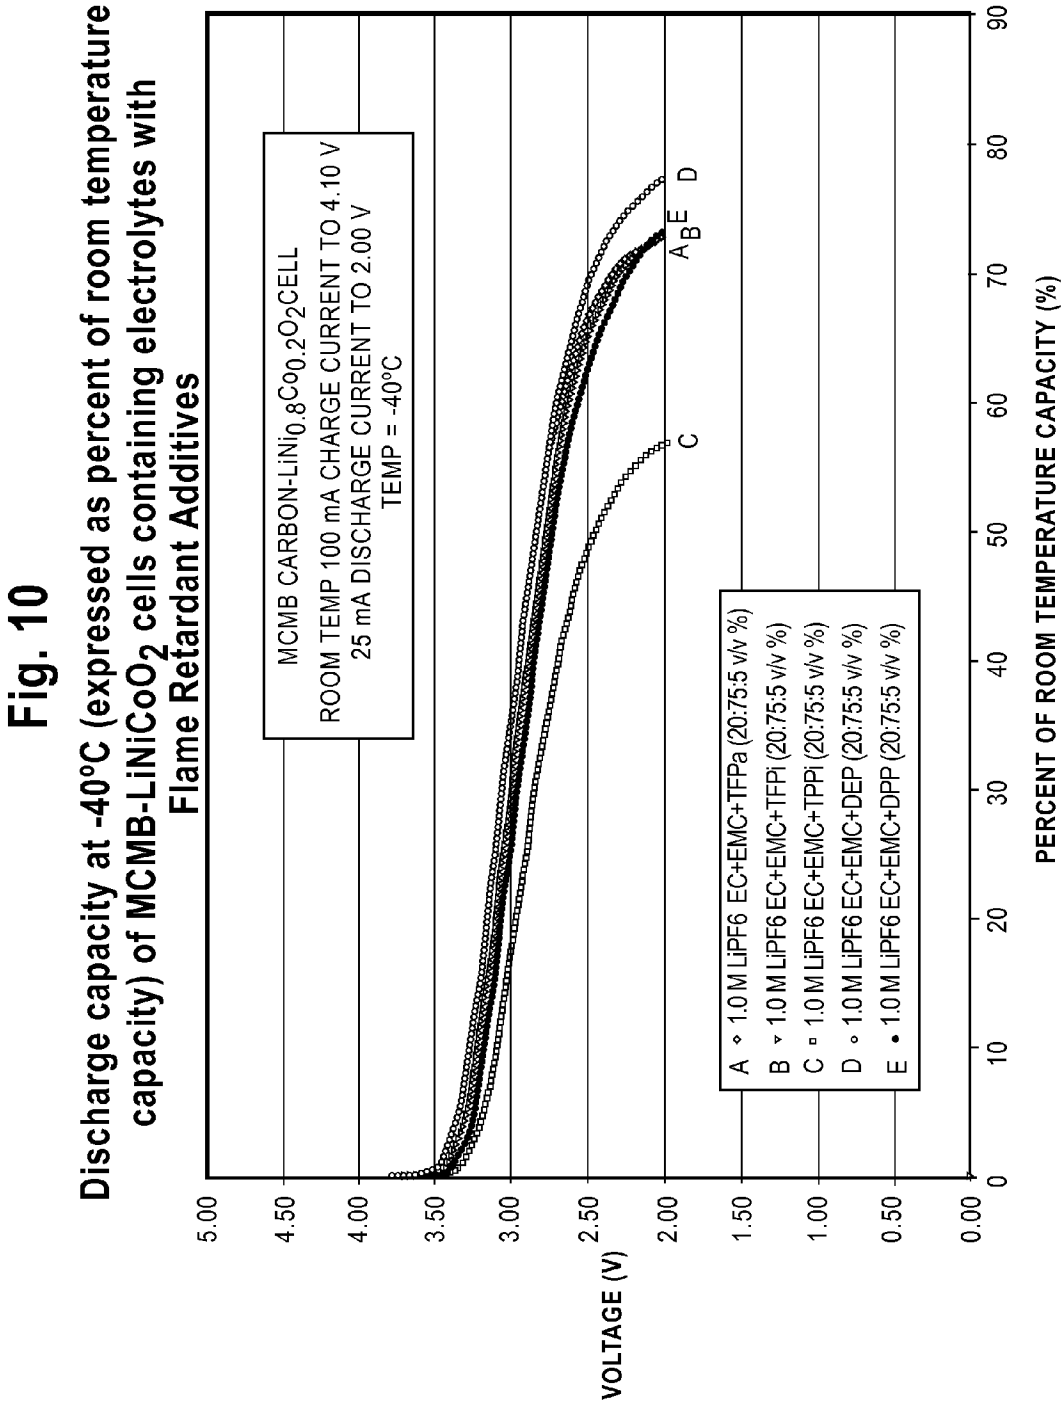


Fig. 11

Cycle life performance of MCMB-LiNiCoO₂ cells containing electrolytes with Flame Retardant Additives


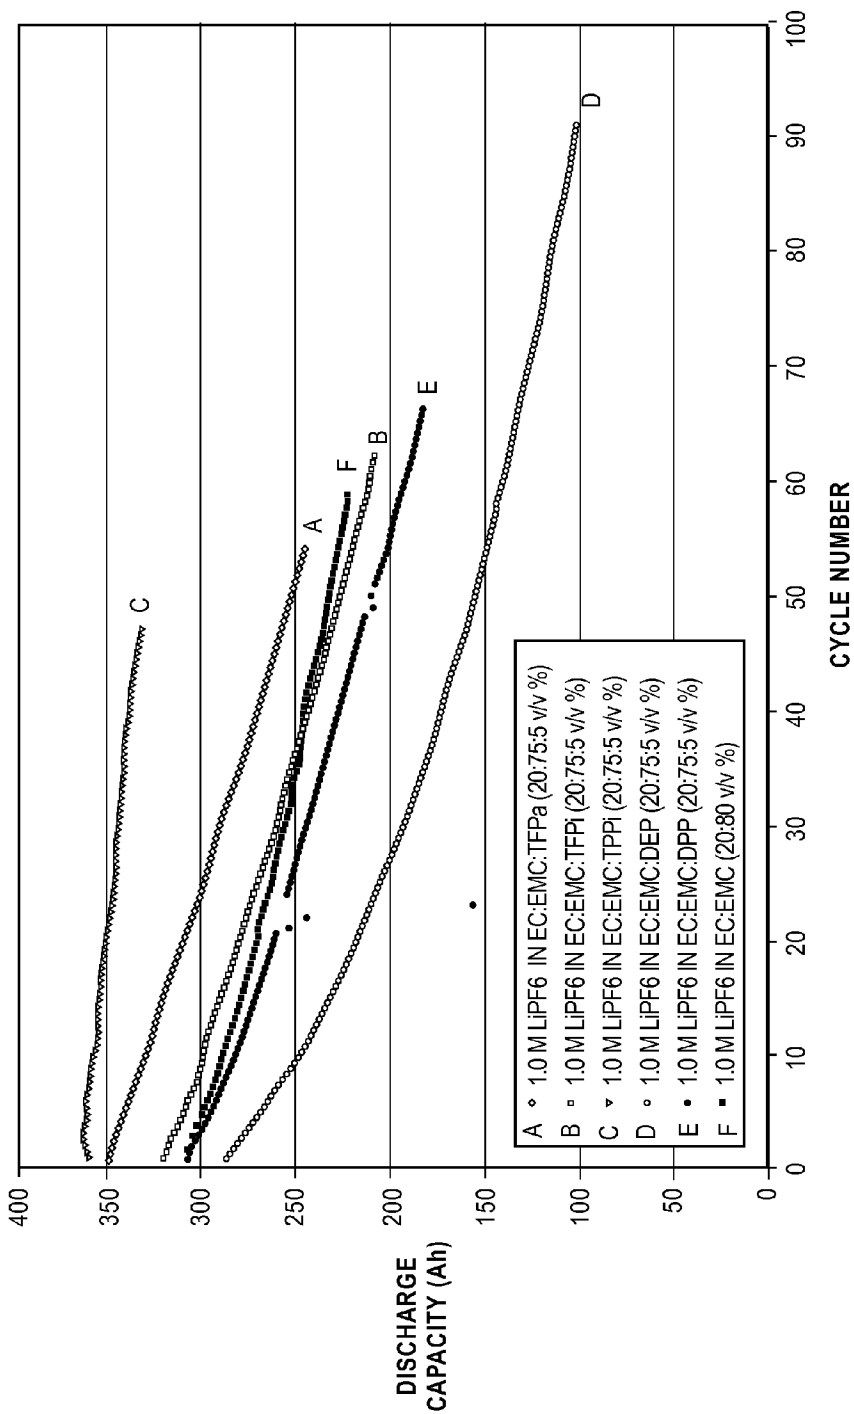


Fig. 12

**Formation Characteristics of Electrolytes with
Flame Retardant Additives and Fluoroester**

ELECTROLYTE TYPE	CHARGE CAPACITY (Ah) 1ST CYCLE	DISCHARGE CAPACITY (Ah) 1ST CYCLE	IRREVERSIBLE CAPACITY (1ST CYCLE)	COULOMBIC EFFICIENCY (1ST CYCLE)	CHARGE CAPACITY (Ah) 5TH CYCLE	REVERSIBLE CAPACITY (Ah) 5TH CYCLE	CUMULATIVE IRREVERSIBLE CAPACITY (1ST-5TH CYCLE)	COULOMBIC EFFICIENCY (5TH CYCLE)
1.0 M LiPF ₆ EC+EMC+TFEB (20:60:20 v/v %)	0.5179312	0.44202	0.07591	85.34	0.4382585	0.4312333	0.11402	98.40
1.0 M LiPF ₆ EC+EMC+TFEB+TPPhPh (20:55:20:5 v/v %)	0.4815	0.4134756	0.0680	85.87	0.4063783	0.3990103	0.1045	98.19
1.0 M LiPF ₆ EC+EMC+TFEB+TBuPh (20:55:20:5 v/v %)	0.4862076	0.4053501	0.08086	83.37	0.4087209	0.3952519	0.1393	96.70
1.0 M LiPF ₆ EC+EMC+TFEB+TElPh (20:55:20:5 v/v %)	0.4689576	0.388573	0.08038	82.86	0.3959548	0.3840084	0.1340	96.98
1.0 M LiPF ₆ EC+EMC+TFEB+TFMPO (20:55:20:5 v/v %)	0.4807283	0.3971957	0.08353	82.62	0.3985919	0.38546	0.1476	96.71

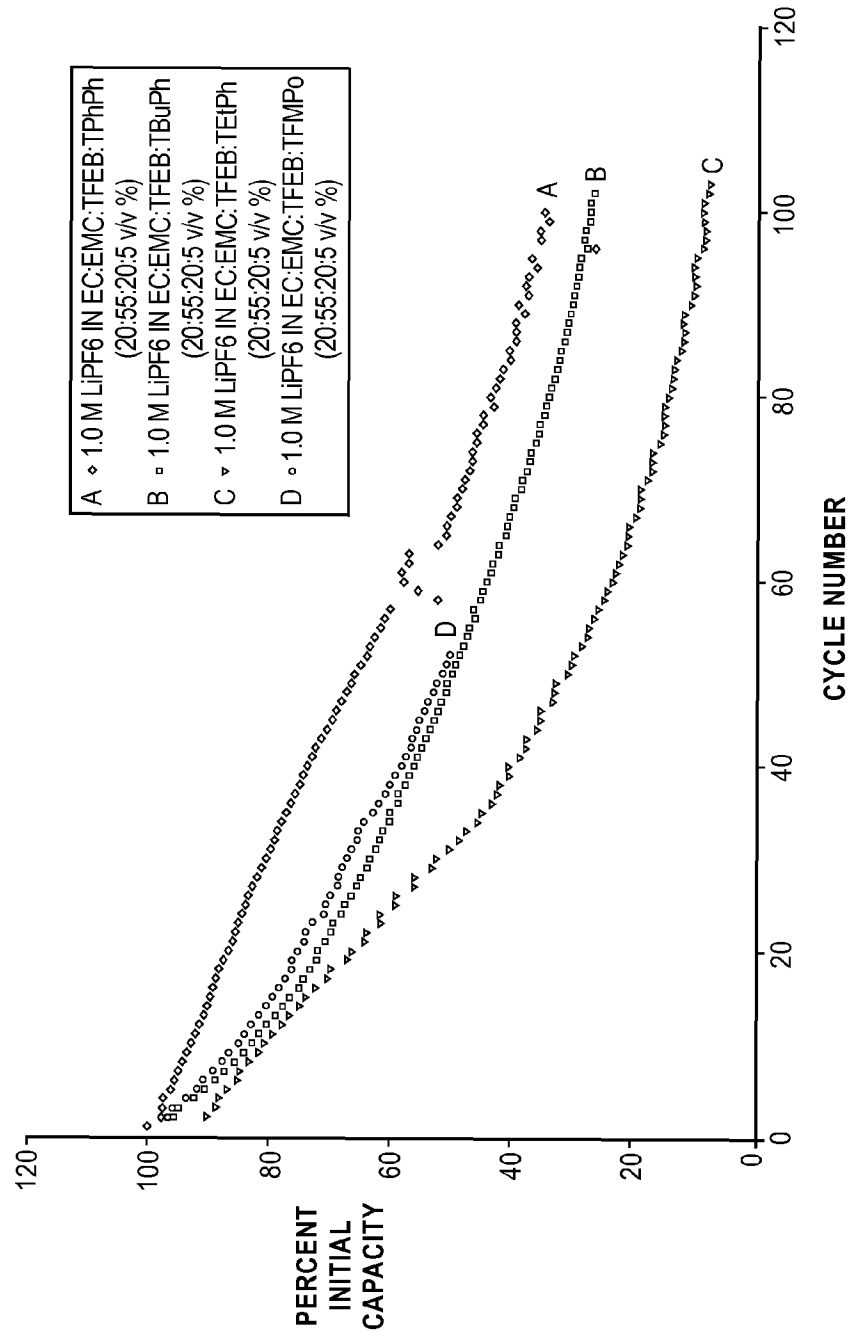Fig. 13
**Cycle Life of Electrolytes with Flame Retardant Additives
and Fluoroester**



ELECTROLYTE TYPE		1.0 M LiPF6 EC+EMC+TFEB (20:60:20 v/v %)		1.0 M LiPF6 EC+EMC+TFEB+TPhPh (20:55:20:5 v/v %)		1.0 M LiPF6 EC+EMC+TFEB+TBuPh (20:55:20:5 v/v %)		1.0 M LiPF6 EC+EMC+TFEB+TEIPH (20:55:20:5 v/v %)		1.0 M LiPF6 EC+EMC+TFEB+TFMPiO (20:55:20:5 v/v %)			
TEMPERATURE (°C)	IMPEDANCE (Ohms)	1.0 M LiPF6 EC+EMC+TFEB (20:60:20 v/v %)		1.0 M LiPF6 EC+EMC+TFEB+TPhPh (20:55:20:5 v/v %)		1.0 M LiPF6 EC+EMC+TFEB+TBuPh (20:55:20:5 v/v %)		1.0 M LiPF6 EC+EMC+TFEB+TEIPH (20:55:20:5 v/v %)		1.0 M LiPF6 EC+EMC+TFEB+TFMPiO (20:55:20:5 v/v %)			
		EQUIVALENT CIRCUIT	IMPEDANCE (Ohms)	EQUIVALENT CIRCUIT	IMPEDANCE (Ohms)	EQUIVALENT CIRCUIT	IMPEDANCE (Ohms)	EQUIVALENT CIRCUIT	IMPEDANCE (Ohms)	EQUIVALENT CIRCUIT	IMPEDANCE (Ohms)		
ROOM TEMP	ANODE		Rs	R(CR)(CR)	0.1555	R(CR)(CR)(Rw))	0.2118	R(CR)(CR)(Rw))	0.2019	R(CR)(CR)(Rw))	0.2512	R(CR)(CR)(Rw))	0.195
			Rf		0.06419		0.03664		0.05478		0.0578		0.06138
			Rct		0.03474		0.04416		0.0361		0.03349		0.02916
0°	ANODE		Rs	R(CR)(CR)(Rw))	0.2189	R(CR)(CR)(Rw))	0.3149	R(CR)(CR)(Rw))	0.2855	R(CR)(CR)(Rw))	0.347	R(CR)(CR)(Rw))	0.2805
			Rf		0.08007		0.2834		0.1968		0.182		0.1383
			Rct		0.0753		0.3895		0.206		0.2486		0.1503
-20°	ANODE		Rs	R(CR)(CR)(Rw))	0.2977	R(CR)(CR)	0.4223	R(CR)(CR)	0.4403	R(CR)(CR)(Rw))	0.4298	R(CR)(CR)	0.4526
			Rf		0.1165		0.3084		0.5059		0.275		0.4733
			Rct		0.6088		1.156		1.586		0.4817		1.263
-30°	ANODE		Rs	R(CR)(CR)(Rw))	0.4721	R(CR)(CR)	0.8177	R(CR)(CR)	0.646	R(CR)(CR)(Rw))	0.5978	R(CR)(CR)(Rw))	0.5932
			Rf		0.1441		1.4210		0.8261		0.2991		0.2923
			Rct		1.422		8.6490		5.773		1.5		1.69
-40°	ANODE		Rs	R(CR)(CR)(Rw))	0.6271	R(CR)(CR)	1.2	R(CR)(CR)	0.8956	R(CR)(CR)(Rw))	0.799	R(CR)(CR)(Rw))	0.9303
			Rf		0.2882		1.023		1.033		0.5051		0.5388
			Rct		5.303		12.58		10.54		4.157		4.558
-50°	ANODE		Rs	R(CR)(CR)(Rw))	1.389	R(CR)(CR)	2.987	R(CR)(CR)	2.17	R(CR)(CR)	1.702	R(CR)(CR)	2.239
			Rf		0.8344		4.858		2.83		1.869		2.009
			Rct		22.96		68.04		53.77		41.19		40.87

Fig. 16 **Tafel Polarization Measurements Performed on MCMB Anodes**
in contact with Electrolytes with Flame Retardant Additives and Fluoroesters
Data Obtained from MCMB-LiNi_{0.8}Co_{0.2}O₂ Cells
containing Lithium Reference Electrodes

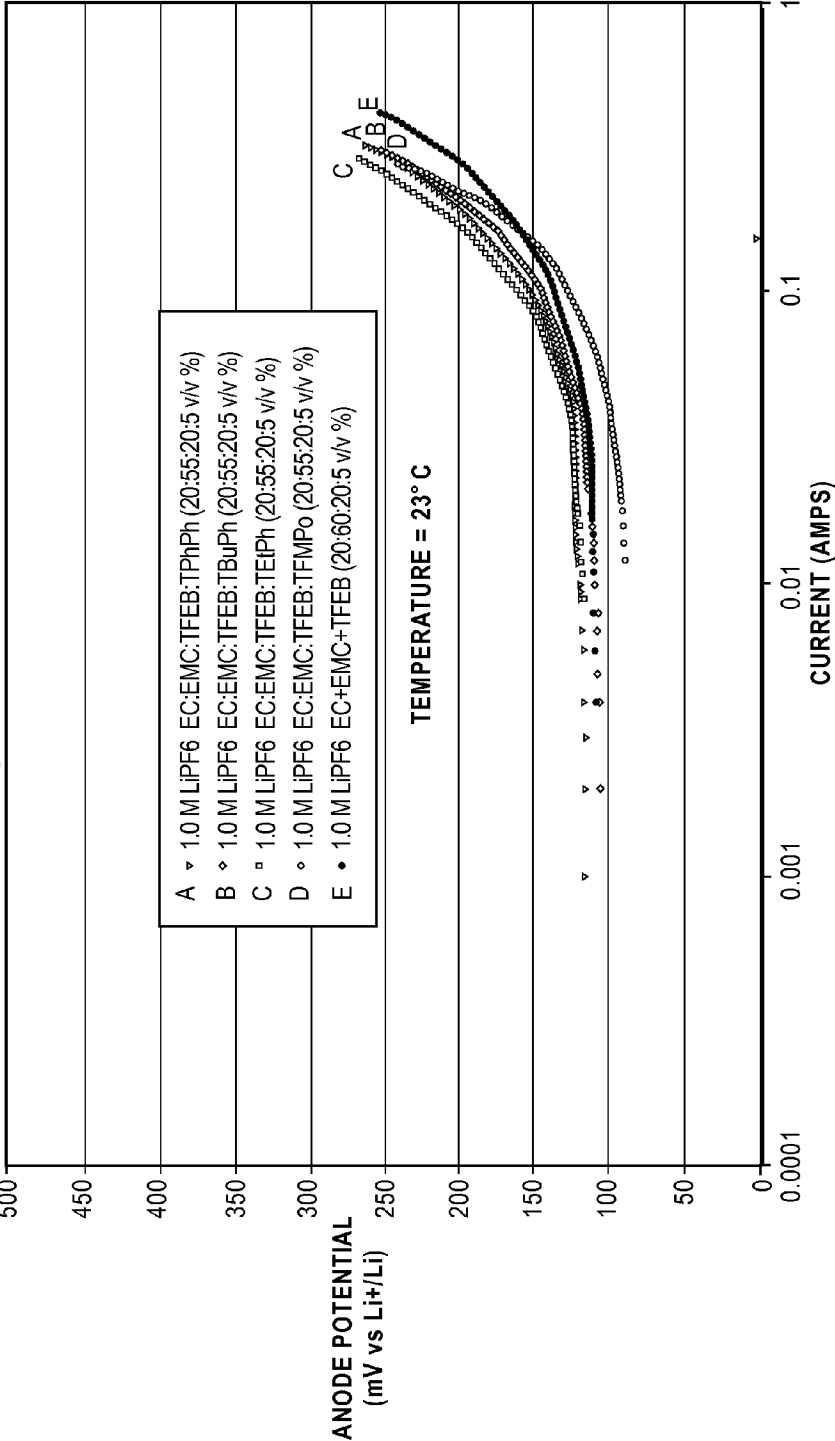


Fig. 17 **Tafel Polarization Measurements Performed on LiNiCoO₂ Cathodes**
in contact with Electrolytes with Flame Retardant Additives and Fluoroesters
Data Obtained from MCMB-LiNiCoO₂ Cells
equipped with Lithium Reference Electrodes

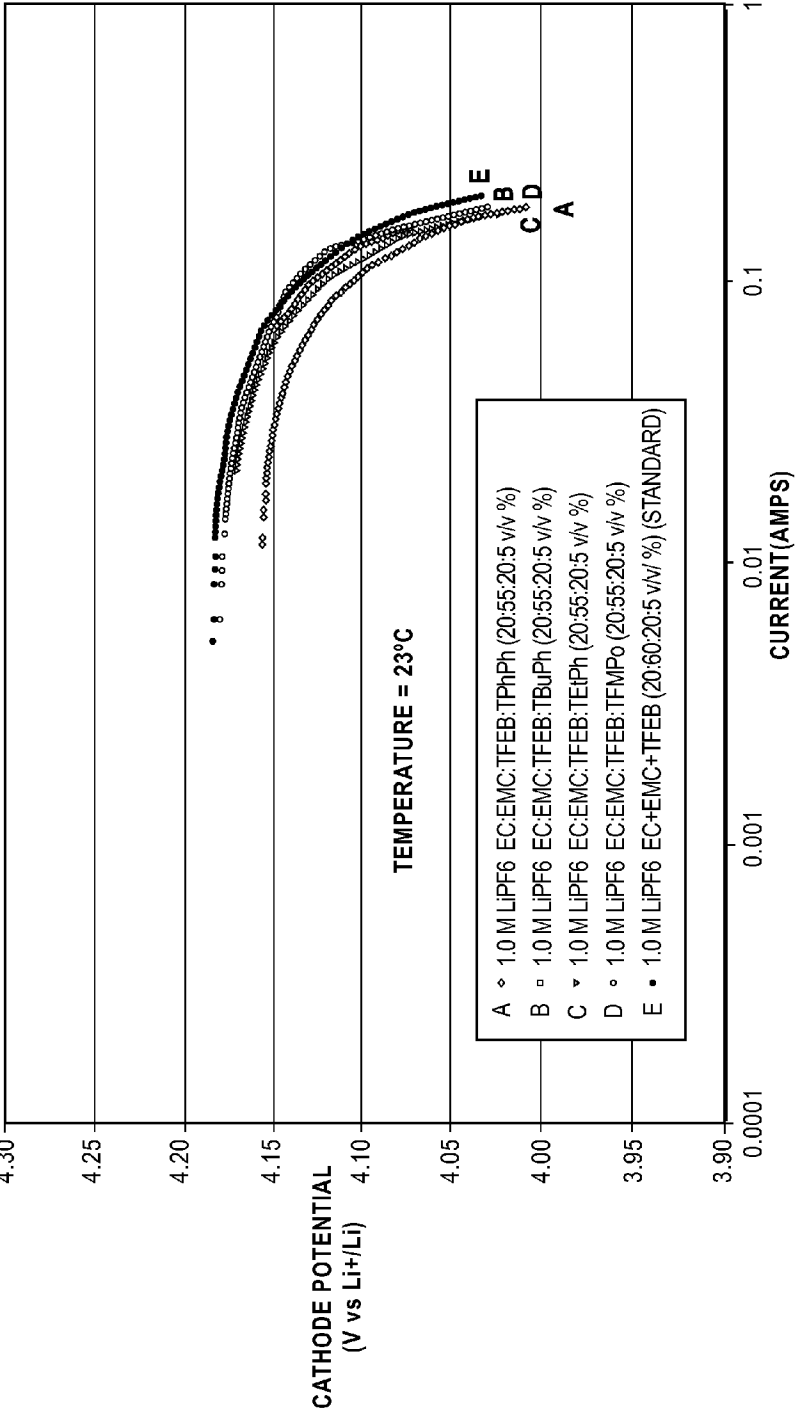


Fig. 18

**DC Micro-Polarization Measurements for the Cathode of Cells containing
Flame Retardant Additives and Fluoroester Electrolytes**

	LINEAR POLARIZATION VALUE OF CATHODE						
	23°C	0°C	-10°C	-20°C	-30°C	-40°C	-50°C
ELECTROLYTE COMPOSITION							
1.0M LiPF6 in EC:EMC:TFEB (20:60:20 v/v%) (Baseline)	0.62	0.87	*	2.91	10.00	139.86	195.65
1.0M LiPF6 in EC:EMC:TFEB:TPhPh (20:55:20:5 v/v%)	0.44	0.78	1.71	3.41	9.78	50.51	143.29
1.0M LiPF6 in EC:EMC:TFEB:TBuPh (20:55:20:5 v/v%)	0.39	0.97	1.86	2.48	11.40	41.67	236.32
1.0M LiPF6 in EC:EMC:TFEB:TEtPh (20:55:20:5 v/v%)	0.64	1.07	1.61	2.46	11.86	36.63	224.59
1.0M LiPF6 in EC:EMC:TFEB:TFMPO (20:55:20:5 v/v%)	0.33	0.87	1.75	2.66	7.87	45.46	231.14

Fig. 19

**DC Micro-Polarization Measurements for the Anode of Cells containing
Flame Retardant Additives and Fluoroester Electrolytes**

ELECTROLYTE COMPOSITION	LINEAR POLARIZATION VALUE OF ANODE						
	23°C	0°C	-10°C	-20°C	-30°C	-40°C	-50°C
1.0M LiPF ₆ in EC:EMC:TFEB (20:60:20 v/v%) (Baseline)	0.35	0.72	*	2.17	7.39	17.53	55.56
1.0M LiPF ₆ in EC:EMC:TFEB:TPhPh (20:55:20:5 v/v%)	0.63	1.48	3.76	2.71	16.64	24.42	159.66
1.0M LiPF ₆ in EC:EMC:TFEB:TBuPh (20:55:20:5 v/v%)	0.45	1.51	3.84	3.52	12.47	29.87	128.21
1.0M LiPF ₆ in EC:EMC:TFEB:TetPh (20:55:20:5 v/v%)	0.54	1.39	2.32	3.77	11.28	29.32	93.14
1.0M LiPF ₆ in EC:EMC:TFEB:TFMPo (20:55:20:5 v/v%)	0.56	1.40	2.26	3.56	9.67	20.52	87.88

Fig. 20
SEI Enhancing Agent

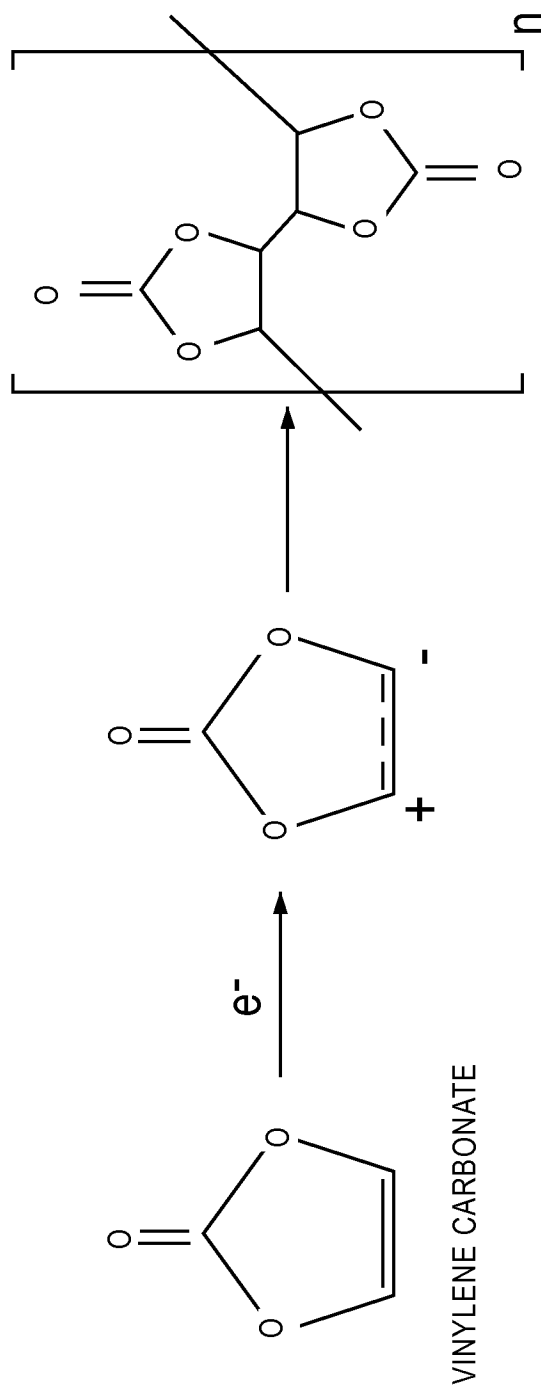


Fig. 21
Formation Characteristics of Electrolytes with Flame Retardant Additives and SEI Enhancing Agent

ELECTROLYTE TYPE	CHARGE CAPACITY (Ah) 1ST CYCLE	DISCHARGE CAPACITY (Ah) 1ST CYCLE	IRREVERSIBLE CAPACITY (1ST CYCLE)	COULOMBIC EFFICIENCY (1ST CYCLE)	CHARGE CAPACITY (Ah) 5TH CYCLE	REVERSIBLE CAPACITY (Ah) 5TH CYCLE	CUMULATIVE IRREVERSIBLE CAPACITY (1ST-5TH CYCLE)	COULOMBIC EFFICIENCY (5TH CYCLE)
1.0 M LiPF ₆ EC+EMC (20:80 v/v %)	0.4537	0.3846	0.0691	84.7700	0.3886	0.3781	0.1220	97.2862
1.0 M LiPF ₆ EC+EMC (20:80 v/v %) w/ 1.5% VC	0.4696	0.3967	0.0729	84.4786	0.4001	0.3903	0.1116	97.5450
1.0 M LiPF ₆ EC+EMC+TPPh (20:75:5 v/v %)	0.4705	0.4071	0.0635	86.5096	0.4011	0.3974	0.0748	99.0606
1.0 M LiPF ₆ EC+EMC+TPPh (20:75:5 v/v %) w/ 1.5% VC	0.4649	0.3698	0.0951	79.5530	0.3828	0.3774	0.1355	98.5969
1.0 M LiPF ₆ EC+EMC+TFEB (20:60:20 v/v %)	0.0518	0.4420	0.0760	85.3400	0.4383	0.4312	0.1140	98.4000

Fig. 22
Evaluation of Low Temperature Performance of Cells
containing Flame Retardant Additive and SEI additive

		BASELINE		ELECTROLYTES WITH ADDITIVES					
		1.0 M LiPF6 EC+EMC (20:80 v/v %)		1.00 M LiPF6 EC+EMC (20:80 v/v %) w/ 1.5% VC		1.00 M LiPF6 EC+EMC+TPPhPh (20:75:5 v/v %)		1.00 M LiPF6 EC+EMC+TPPhPh (20:75:5 v/v %) w/ 1.5% VC	
TEMPERATURE (°C)	DISCHARGE CURRENT (mA)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)
23°	25	0.3781	100.00	0.3903	100.00	0.3974	100.00	0.3774	100.00
0°	25	0.3288	86.95	0.3382	86.66	0.3517	88.50	0.3388	89.76
-20°	25	0.3105	82.11	0.3173	81.29	0.3284	82.64	0.3204	84.88
	50	0.2842	75.16	0.2935	75.19	0.3044	76.61	0.2973	78.77
	100	0.2374	62.78	0.2499	64.03	0.2651	66.72	0.2536	67.19
	150	0.2063	54.57	0.2063	52.87	0.1922	48.36	0.1823	48.31
-30°	25	0.2748	72.69	0.2920	74.83	0.3020	76.00	0.2907	77.02
-40°	25	0.2640	69.83	0.2665	68.29	0.2661	66.98	0.2565	67.96
	50	0.1697	44.89	0.1664	42.63	0.1130	28.44	0.1265	33.52
	100	0.0157	4.15	0.0389	9.97	0.0303	7.64	0.0281	7.45
	150	0.0001	0.02	0.0056	1.44	0.0145	3.65	0.0011	0.30
-50°	25	0.1291	34.16	0.1317	33.75	0.0817	20.56	0.0891	23.61
	50	0.0222	5.87	0.0234	5.99	0.0257	6.47	0.0151	4.01
-60°	5	0.2043	54.04	0.2026	51.90	0.1537	38.67	0.1619	42.88
	10	0.1106	29.26	0.0631	16.16	0.0387	9.74	0.0443	11.73
	25	0.0064	1.70	0.0031	0.80	0.0032	0.81	0.0026	0.69

Fig. 23
Electrochemical Impedance Spectroscopy (EIS) Measurements for the Cathodes of
Cells containing Electrolytes with Flame Retardant Additives/VC

ELECTROLYTE TYPE		1.0 M LiPF ₆ EC+EMC (20:80 v/v %)		1.0 M LiPF ₆ EC+EMC (20:80 v/v %) w/1.5% VC		1.0 M LiPF ₆ EC+EMC+TPPhPh (20:75:5 v/v %)		1.0 M LiPF ₆ EC+EMC+TPPhPh (20:75:5 v/v %) w/1.5% VC	
TEMPERATURE (°C)	IMPEDANCE (Ohms)	EQUIVALENT CIRCUIT	IMPEDANCE (Ohms)	EQUIVALENT CIRCUIT	IMPEDANCE (Ohms)	EQUIVALENT CIRCUIT	IMPEDANCE (Ohms)	EQUIVALENT CIRCUIT	IMPEDANCE (Ohms)
Room Temp	Cathode	R_s	0.5918	$R(CR)(C(RW))$	0.2345	$R(CR)(C(RW))$	0.1623	$R(CR)(C(RW))$	0.2579
		R_f	0.2423		0.202		0.2702		0.006863
		R_{ct}	0.03378		0.01247		0.03598		0.07206
0°	Cathode	R_s	0.1833	$R(CR)(C(RW))$	0.213	$R(CR)(C(RW))$	0.1739	$R(CR)(C(RW))$	0.3777
		R_f	2.919		1.771		1.515		2.326
		R_{ct}	0.6802		0.3864		0.4928		0.4761
-20°	Cathode	R_s	0.3142	$R(CR)(C(RW))$	0.2658	$R(CR)(C(RW))$	0.2278	$R(CR)(C(RW))$	0.5368
		R_f	0.2908		0.2079		0.3055		0.1043
		R_{ct}	1.753		0.8338		1.233		0.7084
-40°	Cathode	R_s	0.4437	$R(CR)(C(RW))$	0.4515	$R(CR)(C(RW))$	0.5991	$R(CR)(C(RW))$	0.6277
		R_f	5.019		1.768		1.192		2.722
		R_{ct}	35.86		62.83		74.72		16.25
-60°	Cathode	R_s	2.016	$R(CR)(C(RW))$	2.571	$R(CR)(C(RW))$	***	$R(CR)(C(RW))$	3.299
		R_f	6.242		1.07				1.449
		R_{ct}	17.03		29.9				48.27

Fig. 24
Electrochemical Impedance Spectroscopy (EIS) Measurements for the Anodes of
Cells containing Electrolytes with Flame Retardant Additives/VC

ELECTROLYTE TYPE		1.0 M LiPF ₆ EC+EMC (20:80 v/v %) w/1.5% VC		1.0 M LiPF ₆ EC+EMC+TPPhPh (20:75:5 v/v %)		1.0 M LiPF ₆ EC+EMC+TPPhPh (20:75:5 v/v %) w/ 1.5% VC	
TEMPERATURE (°C)	IMPEDANCE (Ohms)	EQUIVALENT CIRCUIT	IMPEDANCE (Ohms)	EQUIVALENT CIRCUIT	IMPEDANCE (Ohms)	EQUIVALENT CIRCUIT	IMPEDANCE (Ohms)
Room Temp	Anode	R_s	0.4303	$R(CR)(C(RW))$	0.2753	$R(CR)(C(RW))$	0.1906
		R_f	0.02344		0.07171		0.01922
		R_{ct}	0.03534		0.03001		0.04464
0°	Anode	R_s	0.386	$R(CR)(C(RW))$	0.3676	$R(CR)(C(RW))$	0.2653
		R_f	0.03427		0.2808		0.2306
		R_{ct}	0.03546		0.4105		0.182
-20°	Anode	R_s	0.3669	$R(CR)(C(RW))$	0.4122	$R(CR)(C(RW))$	0.3251
		R_f	0.3294		0.36		0.3087
		R_{ct}	0.9189		1.701		0.7985
-40°	Anode	R_s	0.6563	$R(CR)(C(RW))$	0.6576	$R(CR)(C(RW))$	0.7849
		R_f	0.5904		1.241		1.499
		R_{ct}	1.461		5.764		3.171
-60°	Anode	R_s	3.812	$R(CR)(C(RW))$	3.671	$R(CR)(C(RW))$	5.838
		R_f	5.11		8.337		12.66
		R_{ct}	126.9		264.9		176.2
							265.1

Fig. 25

**Linear Polarization Measurements for the Anodes of cells containing
Electrolytes with Flame Retardant Additives/VC**

ELECTROLYTE COMPOSITION	LINEAR POLARIZATION VALUE OF ANODE							
	23°C	0°C	-10°C	-20°C	-30°C	-40°C	-50°C	-60°C
1.0M LiPF6 in EC:EMC (20:80 v/v%) (Baseline)	0.64	0.83	1.63	2.85	9.04	22.95	95.00	106.61
1.0M LiPF6 in EC:EMC (20:80 v/v%) w/ 1.5% VC	0.62	1.94	4.40	5.09	*	59.75	287.88	1067.42
1.0M LiPF6 in EC:EMC:TPhPh (20:75:5 v/v%)	0.46	1.09	2.94	2.53	14.98	33.69	144.16	536.723
1.0M LiPF6 in EC:EMC:TPhPh (20:75:5 v/v%) w/ 1.5% VC	1.22	1.89	4.87	4.59	23.00	64.94	323.13	1055.56

Fig. 26

**Linear Polarization Measurements for the Cathodes of cells containing
Electrolytes with Flame Retardant Additives/VC**

ELECTROLYTE COMPOSITION	LINEAR POLARIZATION VALUE OF CATHODE							
	23°C	0°C	-10°C	-20°C	-30°C	-40°C	-50°C	-60°C
1.0M LiPF ₆ in EC:EMC (20:80 v/v%) (Baseline)	0.85	4.03	7.09	2.49	27.38	68.84	162.50	472.64
1.0M LiPF ₆ in EC:EMC (20:80 v/v%) w/ 1.5% VC	0.45	2.28	3.17	1.55	15.20	51.91	395.83	215.42
1.0M LiPF ₆ in EC:EMC:TPhPh (20:75:5 v/v%)	0.62	2.32	3.32	1.71	12.26	44.32	111.08	154.76
1.0M LiPF ₆ in EC:EMC:TPhPh (20:75:5 v/v%) w/ 1.5% VC	0.43	3.39	4.38	1.55	18.34	49.48	291.41	494.78

Fig. 27 Formation of characteristics of experimental MCMB-LiNiCoO₂ cells containing electrolytes with Flame Retardant Additives subjected to formation cycling

ELECTROLYTE TYPE	CHARGE CAPACITY (Ah) 1ST CYCLE	DISCHARGE CAPACITY (Ah) 1ST CYCLE	IRREVERSIBLE CAPACITY (1ST CYCLE)	COULOMBIC EFFICIENCY (1ST CYCLE)	CHARGE CAPACITY (Ah) 5TH CYCLE	REVERSIBLE CAPACITY (Ah) 5TH CYCLE	CUMULATIVE IRREVERSIBLE CAPACITY (1ST-5TH CYCLE)	COULOMBIC EFFICIENCY (5TH CYCLE)
1.0 M LiPF ₆ EC+DEC+DMC(1:1:1 v/v %)	0.4980	0.4160	0.082	83.52	0.4119	0.4022	0.1264	97.64
1.0 M LiPF ₆ EC+EMC (20:80 v/v %)	0.4504	0.3768	0.074	83.64	0.3799	0.3676	0.1356	96.75
1.0 M LiPF ₆ EC+EMC+TPP (20:70:10 v/v %)	0.4705	0.3978	0.073	84.55	0.3969	0.3819	0.1449	96.20
1.0 M LiPF ₆ EC+EMC+DTFEC+TPP (20:50:20:10 v/v %)	0.4929	0.4234	0.070	85.89	0.4248	0.4148	0.1157	97.64
1.0 M LiPF ₆ EC+EMC+DTFEC+TPP (20:30:40:10 v/v %)	0.4904	0.4124	0.078	84.09	0.4272	0.4035	0.1958	94.45
1.0 M LiPF ₆ FEC+EMC+TFEMC+TPP (20:50:20:10 v/v %)	0.4391	0.3687	0.070	83.97	0.3698	0.3646	0.0967	98.60
1.0 M LiPF ₆ FEC+EMC+TPP (20:70:10 v/v %)	0.4784	0.4095	0.069	85.59	0.4127	0.4063	0.1015	98.45
1.0 M LiPF ₆ EC+EMC+TFEMC+TPP (20:50:20:10 v/v %)	0.4494	0.3753	0.074	83.51	0.3655	0.3596	0.1192	98.40
1.0 M LiPF ₆ FEC+EMC+TFEMC+TPP (20:50:20:10 v/v %)+1.5%VC	0.4574	0.3868	0.071	84.55	0.3941	0.3867	0.1036	98.13

Fig. 28

Summary of the discharge capacity at low temperature of a number of MCMB-LiNiCoO₂ cells containing electrolytes with Flame Retardant Additives

ELECTROLYTE TYPE		1.0 M LiPF ₆ EC+EMC (20:80 v/v %)		1.0 M LiPF ₆ EC+EMC+TPP (20:70:10 v/v %)		1.0 M LiPF ₆ EC+EMC+DTFEC+TPP (20:50:20:10 v/v %)		1.0 M LiPF ₆ EC+EMC+DTFEC+TPP (20:30:40:10 v/v %)	
TEMP. (°C)	CURRENT (mA)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)
23°	25 mA	0.3676	100.00	0.3819	100.00	0.4148	100.00	0.4035	100.00
0°	25 mA	0.3568	97.07	0.3688	96.58	0.3952	95.28	0.3763	93.26
	50 mA	0.3375	91.83	0.3534	92.55	0.3695	89.09	0.3465	85.87
	100 mA	0.3207	87.23	0.3356	87.90	0.3380	81.49	0.2057	50.98
	150 mA	0.3086	83.95	0.3101	81.19	0.2485	59.90	0.0656	16.25
-20°	25 mA	0.3056	83.15	0.3208	84.00	0.3202	77.20	0.2364	58.60

Fig. 29

Discharge performance at 0°C (expressed as percent of room temperature capacity) of a ~ 400mAh MCMB-LiNiCoO₂ cell containing 1.0 M LiPF₆ in EC+EMC+TPP (20:70:10 v/v%). The cell was charged at 23°C prior to discharge.



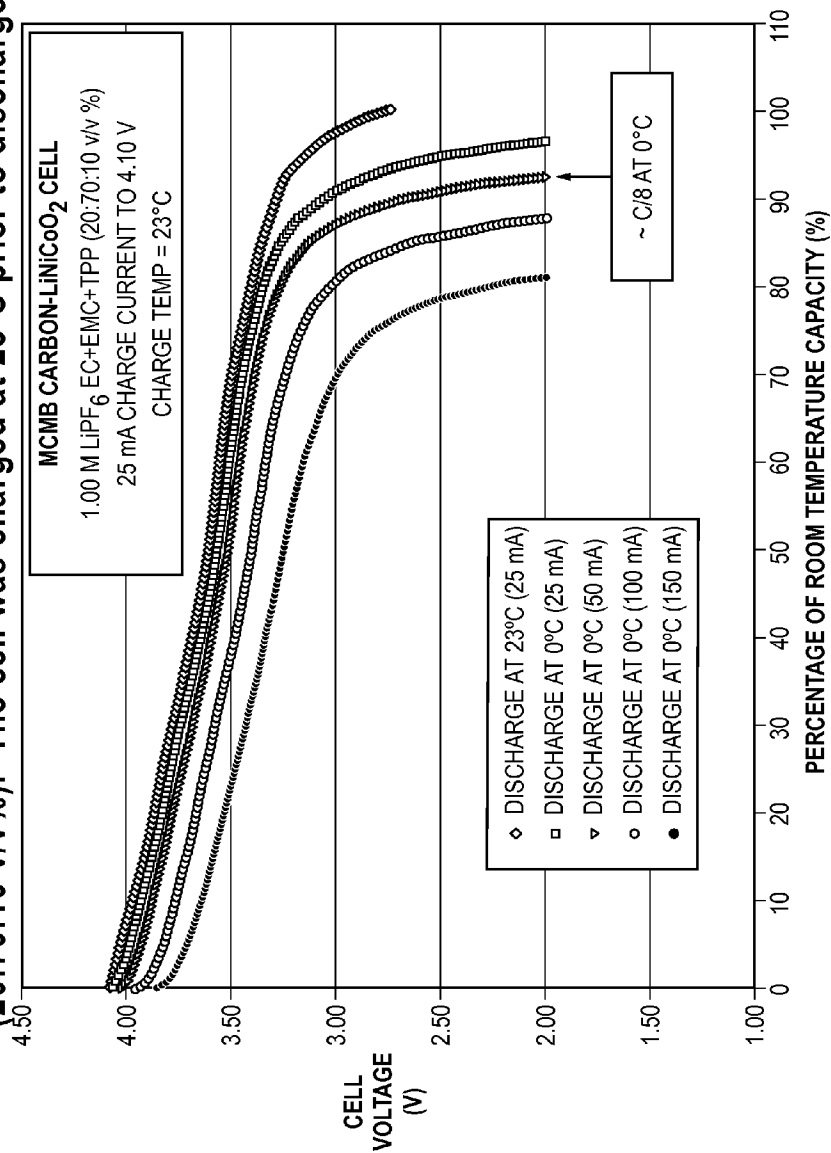


Fig. 30 Discharge performance at 0°C (expressed as percent of room temperature capacity) of a MCMB-LiNiCoO₂ cell containing 1.0 M LiPF₆ in EC+EMC+DTFEC+TPP (20:50:20:10 v/v %). The cell was charged at 23°C prior to discharge.

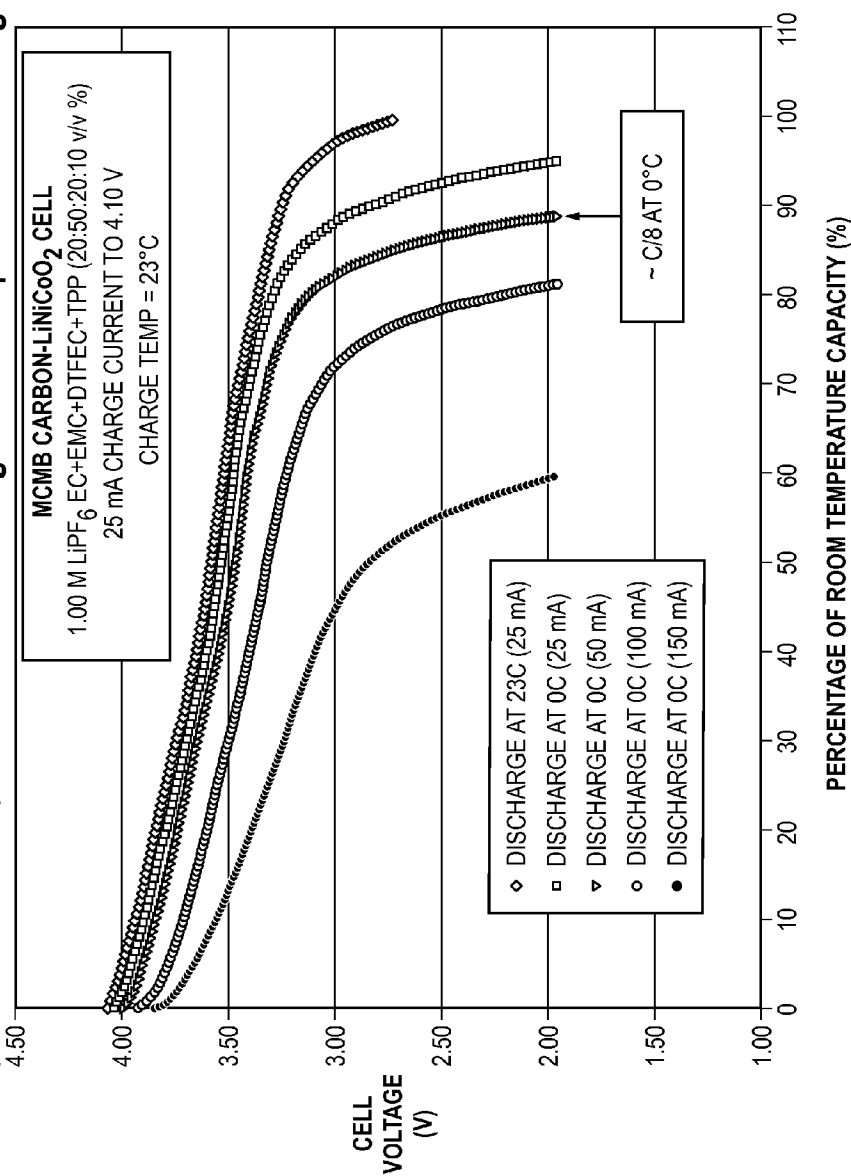

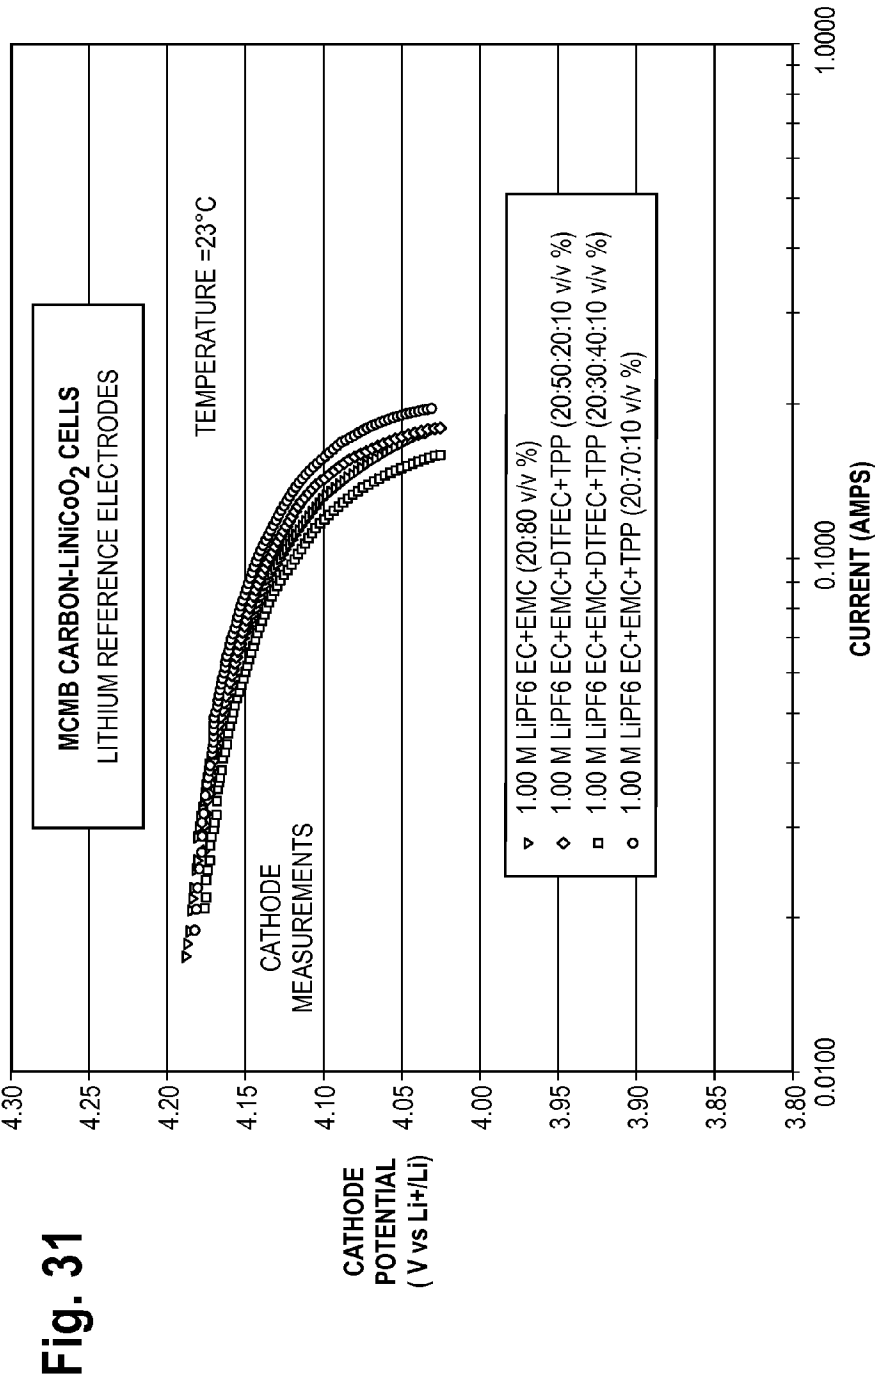Tafel Polarization Measurements of LiNiCoO₂ Electrodes from MCMB-LiNiCoO₂ Cells containing Electrolytes with 10% TPP and with and without the addition of DTFEC



Tafel Polarization Measurements of MCMB Electrodes from MCMB-LiNiCoO₂ Cells containing Electrolytes with 10% TPP and with and without the addition of DT FEC

Fig. 32

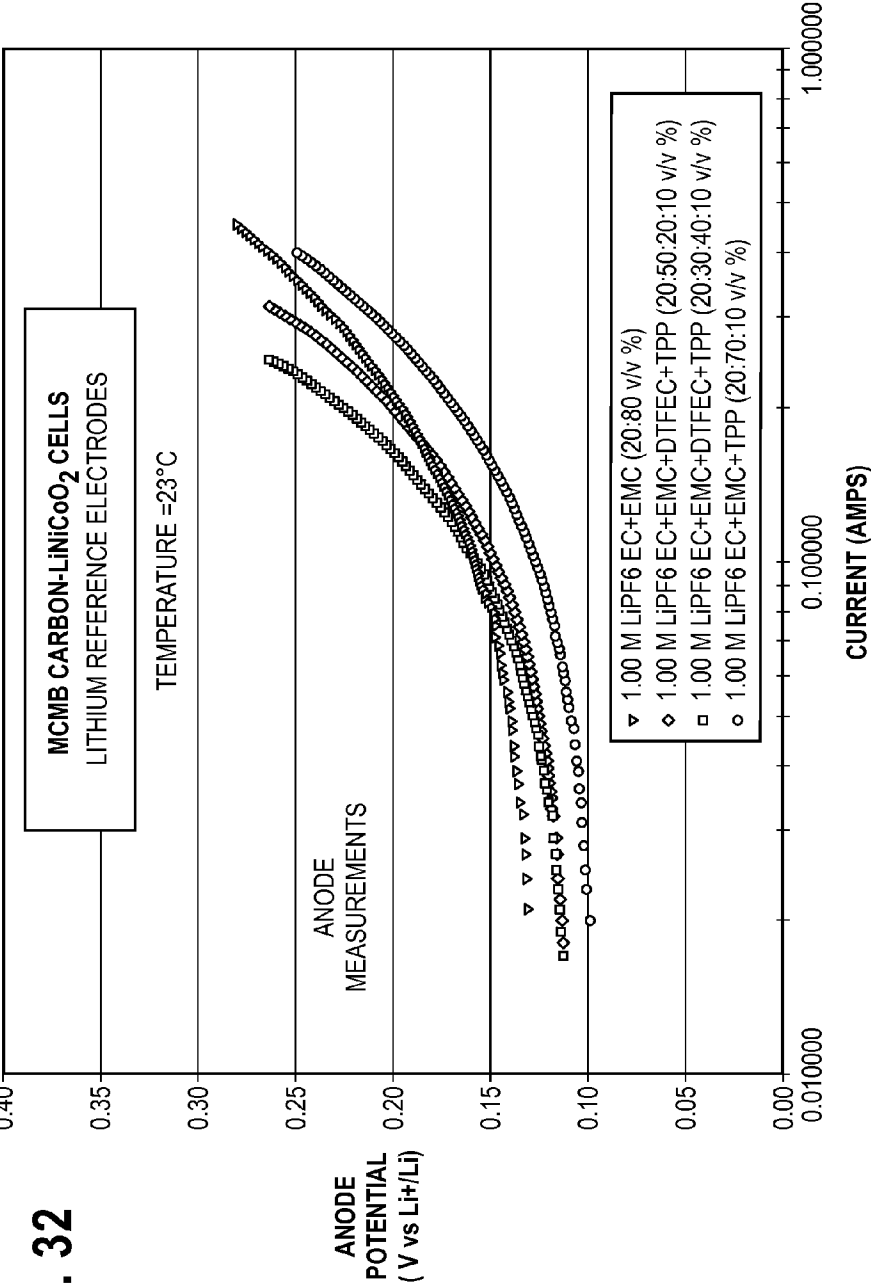


Fig. 33

Summary of the discharge capacity at low temperature of a number of MCMB-LiNiCoO₂ cells containing electrolytes with 10% TPP and TFEMC and/or FEC

ELECTROLYTE TYPE		1.0 M LiPF ₆ EC+DEC+DMC (1:1:1 v/v %)		1.0 M LiPF ₆ FEC+EMC+TFEMC+TPPa (20:50:20:10 v/v %)		1.0 M LiPF ₆ FEC+EMC+TPP (20:70:10 v/v %)		1.0 M LiPF ₆ EC+EMC+TFEMC+TPP (20:30:40:10 v/v %)		1.0 M LiPF ₆ FEC+EMC+TFEMC+TPPa (20:50:20:10 v/v %) +1.5%VC		
		CURRENT (mA)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)	CAPACITY (Ah)	PERCENT (%)
	23°	25 mA	0.4022	100.00	0.3846	100.00	0.4063	100.00	0.3596	100.00	0.3867	100.00
	0°	25 mA	0.3633	90.31	0.3497	95.92	0.3805	93.63	0.3410	94.81	0.3621	93.64
		50 mA	0.3609	89.73	0.3409	93.48	0.3731	91.82	0.3362	93.47	0.3591	92.88


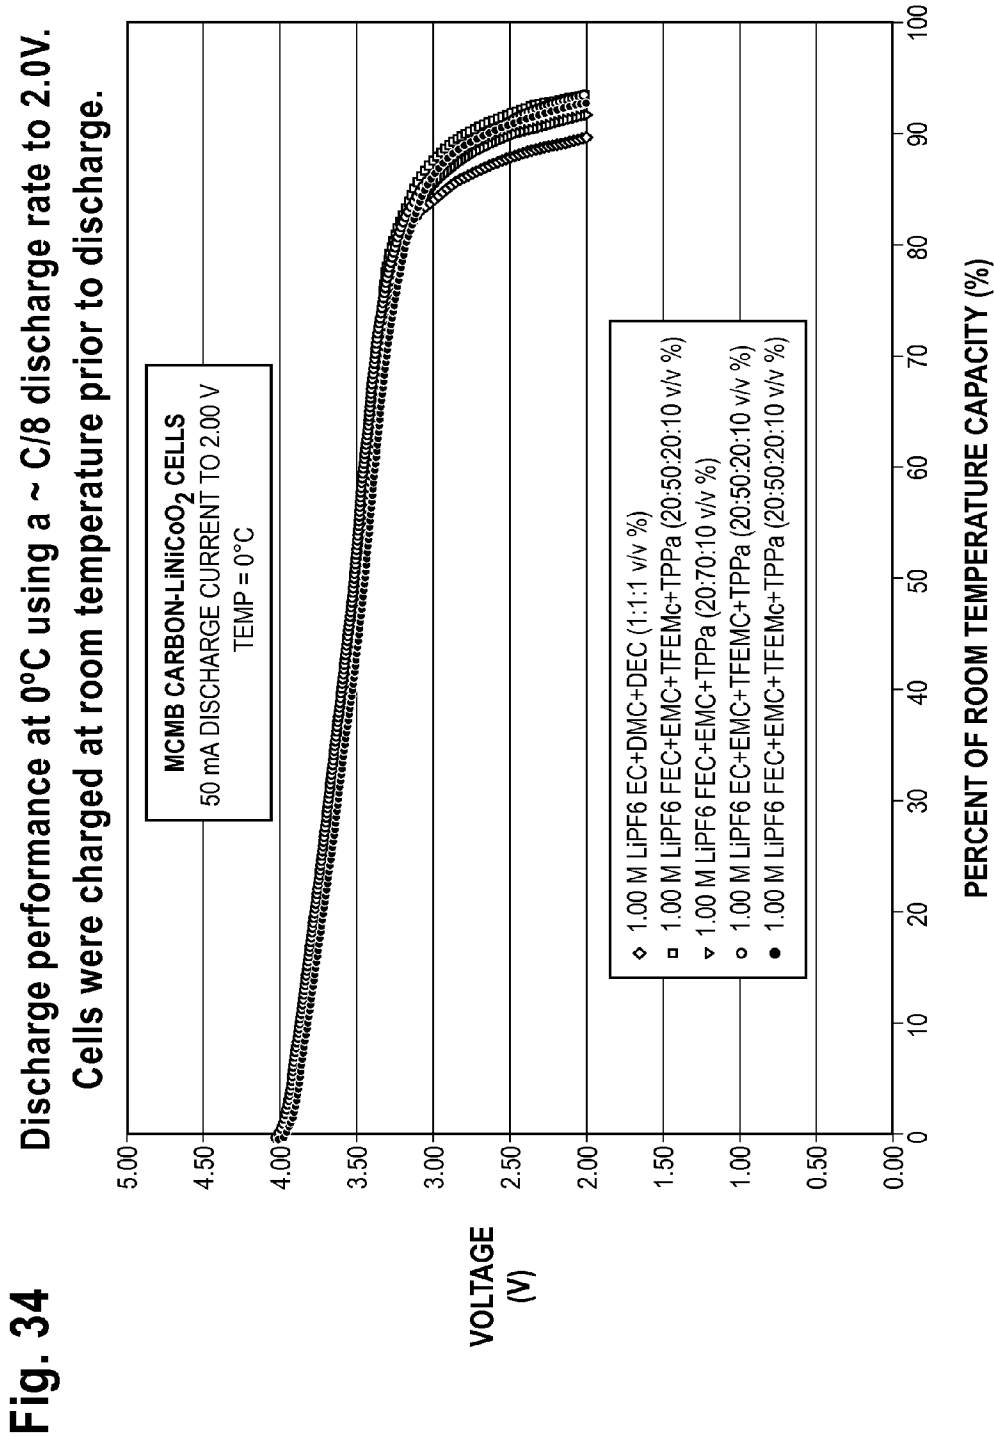


Fig. 35 Summary of the formation characteristics of a number of Li-
 $\text{Li}(\text{Li}_{0.17}\text{Ni}_{0.25}\text{Mn}_{0.58})\text{O}_2$ cells containing various electrolytes with TPP and TPPI flame
retardant additives

ELECTROLYTE TYPE	ANODE TYPE	CATHODE WEIGHT (g)	CHARGE CAPACITY (mAh) 1ST CYCLE	DISCHARGE CAPACITY (mAh) 1ST CYCLE	DISCHARGE CAPACITY (mAh/g) 1ST CYCLE	IRREVERSIBLE CAPACITY 1ST CYCLE	COULOMBIC EFFICIENCY 1ST CYCLE	CHARGE CAPACITY (mAh) 5TH CYCLE	REVERSIBLE CAPACITY 5TH CYCLE	REVERSIBLE CAPACITY (mAh/g) 5TH CYCLE	CUMULATIVE IRREVERSIBLE CAPACITY (1ST-5TH CYCLE) (mAh)	CUMULATIVE IRREVERSIBLE CAPACITY (1ST-5TH CYCLE) (mAh/g)	COULOMBIC EFFICIENCY 1ST CYCLE
1.0 M LiPF ₆ EC+EMC (20:80 v/v%)	LITHIUM METAL	0.0175	5.3022	4.2184	241.05	1.084	79.56	4.2422	4.1153	235.16	1.8211	92.63	97.01
1.0 M LiPF ₆ EC+EMC (20:80 v/v%)	LITHIUM METAL	0.0166	5.0498	4.0088	241.49	1.041	79.39	4.0104	3.8866	234.13	1.5555	93.70	96.91
1.0 M LiPF ₆ EC+EMC+TPP (20:75.5 v/v%)	LITHIUM METAL	0.0122	3.5549	2.9879	244.91	0.567	84.05	2.8756	2.8377	232.60	0.6519	53.43	98.68
1.0 M LiPF ₆ EC+EMC+TPP (20:75.5 v/v%)	LITHIUM METAL	0.0141	4.1911	3.3283	236.05	0.863	79.41	3.3776	3.1484	223.29	1.7485	124.01	93.21
1.0 M LiPF ₆ EC+EMC+TPP (20:75.5 v/v%)	LITHIUM METAL	0.0130	4.4004	2.9701	228.47	1.430	67.50	3.4184	2.7415	210.88	4.3334	333.34	80.20
1.0 M LiPF ₆ EC+EMC+TPP (20:75.5 v/v%) +1.5% VC	LITHIUM METAL	0.0182	5.9747	4.2199	231.86	1.755	70.63	4.6908	3.8683	212.54	5.6966	313.00	82.47
1.0 M LiPF ₆ EC+EMC+TPPI (20:75.5 v/v%)	LITHIUM METAL	0.0154	4.7756	1.8885	129.12	2.787	41.54	2.6031	1.9382	125.73	6.7913	440.99	74.38
1.0 M LiPF ₆ EC+EMC+TPPI (20:75.5 v/v%)	LITHIUM METAL	0.0115	2.93880	1.28900	112.00	1.651	43.83	1.7488	1.3933	121.16	4.3401	377.40	79.67
1.0 M LiPF ₆ EC+EMC+TPP (20:70:10 v/v%)	LITHIUM METAL	0.0113	3.3552	2.6198	232.25	0.735	78.08	2.301	2.4717	219.12	1.9715	174.78	87.34
1.0 M LiPF ₆ EC+EMC+TPP (20:70:10 v/v%)	LITHIUM METAL	0.0121	3.5093	2.8579	235.58	0.651	81.44	2.9397	2.6911	222.77	1.4162	117.24	91.54
1.0 M LiPF ₆ EC+EMC+DTEFC+TPP (20:50:20:10 v/v%)	LITHIUM METAL	0.0107	03.1482	2.5084	233.99	0.640	79.68	2.6500	2.3205	216.46	1.8025	168.14	87.21
1.0 M LiPF ₆ EC+EMC+DTEFC+TPP (20:50:20:10 v/v%)	LITHIUM METAL	0.0111	3.3069	2.6087	234.60	0.693	78.89	2.8064	2.4042	215.21	2.1168	190.27	85.67

Fig. 36

TEMP (°C)	RATE	CURRENT (A)	LW473				LW474			
			1.0 M LiPF6 in EC+EMC+TPP+VC (19.7:73.9:4.9:1.5 v/v %)				1.0 M LiPF6 in EC+EMC+TPP+VC (19.7:73.9:4.9:1.5 v/v %)			
			CAPACITY (Ah)	WATT-HOURS (Wh)	ENERGY (Wh/Kg)	% OF ROOM TEMP	CAPACITY (Ah)	WATT-HOURS (Wh)	ENERGY (Wh/Kg)	% OF ROOM TEMP
20°C (Initial)	C/5	1.800	6.9080	25.073	103.95	100	6.8947	25.03	104.06	100
20°	C	7.000	6.2737	22.020	91.30	90.82	6.3852	22.667	94.25	92.61
	C/2	3.500	6.5372	23.322	96.69	94.63	6.5249	23.295	96.86	94.64
	C/5	1.400	6.9152	24.877	103.14	100.10	6.9055	24.856	103.35	100.16
	C/10	0.700	7.1899	25.884	107.31	104.08	7.1895	25.892	107.66	104.28
	C/20	0.350	7.3629	26.527	109.98	106.58	7.3678	26.551	110.40	106.86
10°	C/50	0.140	7.4035	26.660	110.53	107.17	7.4345	26.770	111.31	107.83
	C	7.000	5.8089	20.206	83.77	84.09	5.9083	20.860	86.73	85.69
	C/2	3.500	6.0681	21.605	89.57	87.84	6.0524	21.572	89.70	87.78
	C/5	1.400	6.4461	23.241	96.35	93.31	6.4372	23.223	96.56	93.37
	C/10	0.700	6.7325	24.343	100.92	97.46	6.7299	24.342	101.21	97.61
0°	C/20	0.350	7.0210	25.370	105.18	101.64	7.0269	25.396	105.60	101.92
	C/50	0.140	7.2964	26.292	109.01	105.62	7.3254	26.397	109.76	106.25
	C	7.000	5.4378	18.526	76.81	78.72	5.5533	19.271	80.13	80.54
	C/2	3.500	5.6957	20.009	82.96	82.45	5.6758	19.953	82.96	82.32
	C/5	1.400	6.0224	21.626	89.66	87.18	6.0129	21.603	89.82	87.21
-10°	C/10	0.700	6.2889	22.750	94.32	91.04	6.2847	22.742	94.56	91.15
	C/20	0.350	6.5637	23.808	98.70	95.02	6.5725	23.844	99.15	95.33
	C/50	0.140	6.9334	25.076	103.96	100.37	6.9652	25.192	104.75	101.02
	C	7.000	5.0073	16.430	68.12	72.49	5.1258	17.227	71.63	74.34
	C/2	3.500	5.2855	18.081	74.96	76.51	5.2613	17.998	74.83	76.31
-20°	C/5	1.400	5.5653	19.750	81.88	80.56	5.5501	19.701	81.92	80.50
	C/10	0.700	5.8634	21.075	87.37	84.88	5.8591	21.065	87.59	84.98
	C/20	0.350	6.1313	22.205	92.06	88.76	6.1315	22.211	92.35	88.93
	C/50	0.140	6.4670	23.493	97.40	93.62	6.4913	23.584	98.06	94.15
	C	7.000	4.7786	14.257	59.11	69.18	4.6554	14.844	61.72	67.52
-30°	C/2	3.500	4.8704	15.881	65.84	70.50	4.8393	15.753	65.60	70.19
	C/5	1.400	5.1634	17.657	73.20	74.75	5.1371	17.551	72.98	74.51
	C/10	0.700	5.4255	19.056	79.00	78.54	5.4142	19.011	79.05	78.53
	C/20	0.350	5.6926	20.362	84.42	82.41	5.6887	20.346	84.60	82.51
	C/50	0.140	6.0245	21.813	90.44	87.21	6.0432	21.881	90.98	87.65
-40°	C	7.000	4.5880	11.984	49.68	66.42	4.0878	11.885	49.42	59.29
	C/2	3.500	4.3046	13.065	54.17	62.31	4.2251	12.736	52.96	61.28
	C/5	1.400	4.6824	15.065	62.46	67.78	4.6663	14.964	62.22	67.68
	C/10	0.700	4.9371	16.516	68.47	71.47	4.9252	16.461	68.44	71.44
	C/20	0.350	5.2225	18.038	74.78	75.60	5.2133	17.993	74.82	75.61
-50°	C/50	0.140	5.5779	19.813	82.14	80.75	5.5942	19.873	82.63	81.14
	C	7.000	0.5644	1.396	5.79	8.17	3.8324	9.297	38.66	55.59
	C/2	3.500	3.6000	9.754	40.44	52.11	3.5997	9.757	40.57	52.21
	C/5	1.400	4.1115	12.038	49.91	59.52	4.0825	11.905	49.50	59.21
	C/10	0.700	4.3587	13.415	55.62	63.10	4.3394	13.319	55.38	62.94
-60°	C/20	0.350	4.6906	15.109	62.64	67.90	4.6809	15.054	62.59	67.89
	C/50	0.140	5.0578	17.150	71.10	73.22	5.0783	17.203	71.53	73.66
	C/100	0.070	5.2632	18.422	76.37	76.19	5.3032	18.547	77.12	76.92
	C/2	3.500	1.5415	3.486	14.45	22.32	1.5253	3.502	14.56	22.12
	C/5	1.400	2.8741	7.328	30.38	41.61	2.8355	7.199	29.93	41.13
-70°	C/10	0.700	3.4388	9.195	38.12	49.78	3.4039	9.063	37.68	49.37
	C/20	0.350	3.9363	11.204	46.45	56.98	3.8984	11.056	45.97	56.54
	C/50	0.140	4.4235	13.677	56.70	64.03	4.4448	13.719	57.04	64.47
	C/100	0.070	4.6809	15.292	63.40	67.76	4.7114	15.361	63.87	68.33
	C/2	3.500	0.0004	0.001	0.00	0.01	0.0004	0.001	0.00	0.01
-80°	C/5	1.400	0.6521	1.378	5.71	9.44	0.6537	1.376	5.72	9.48
	C/10	0.700	1.1357	2.563	10.63	16.44	1.0732	2.420	10.06	15.57
	C/20	0.350	2.1648	5.090	21.10	31.34	2.1100	4.948	20.57	30.60
	C/50	0.140	3.4634	9.048	37.51	50.14	3.4477	8.977	37.33	50.01

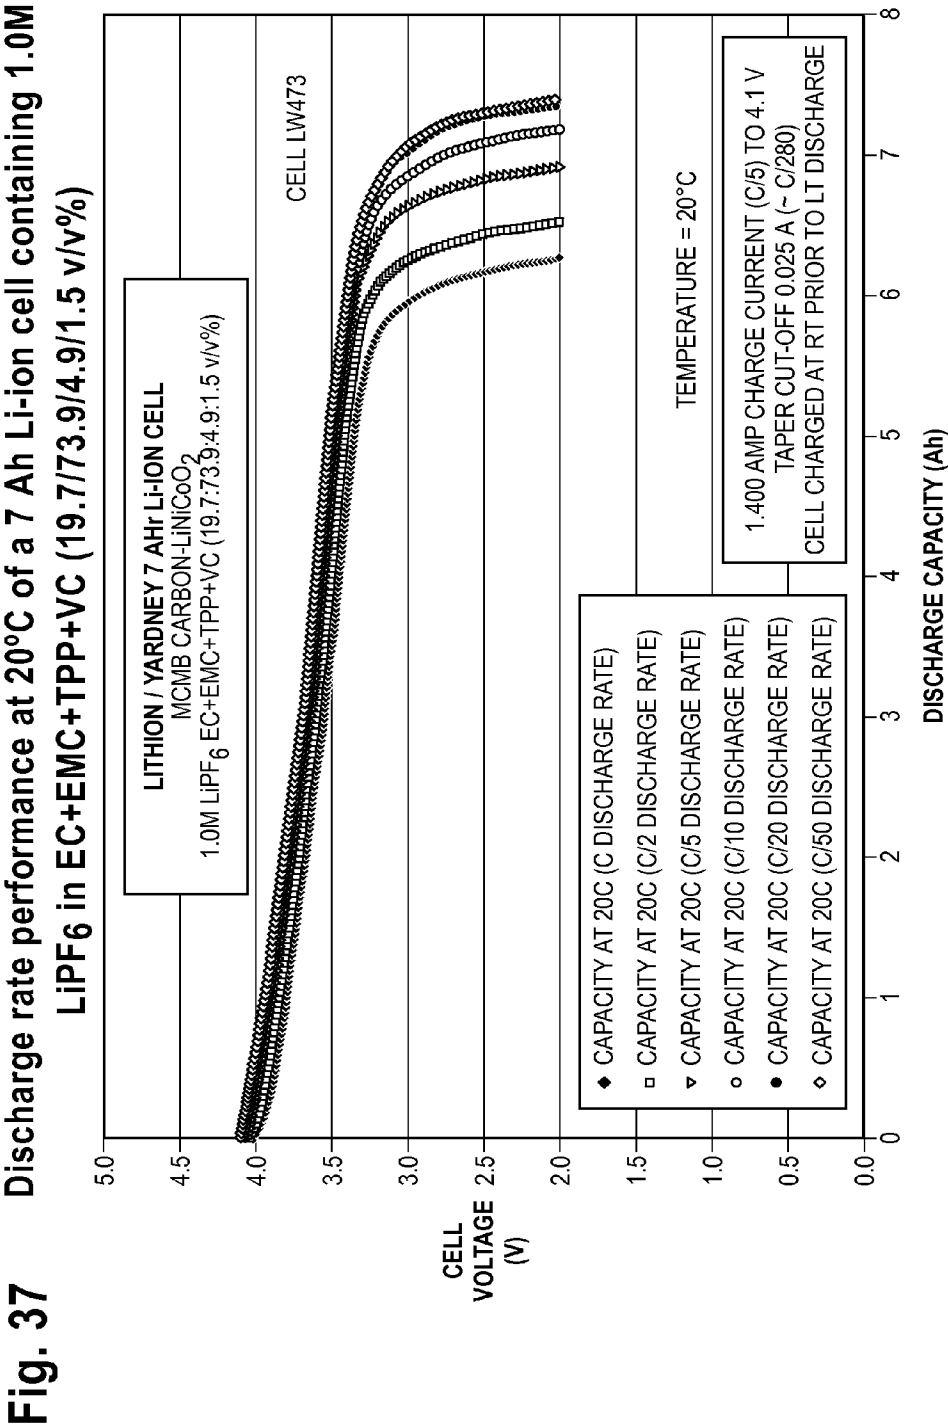

100% Depth of discharge (DOD) cycling of 7 Ah Li-ion cells containing a Flame Retardant Additive containing electrolyte [1.0M LiPF₆ in EC+EMC+TPP+VC (19.7/73.9/4.9 v/v %)] and the baseline electrolyte [1.0M LiPF₆ in EC+DMC+DEC (1:1:1 v/v %)]

Fig. 38


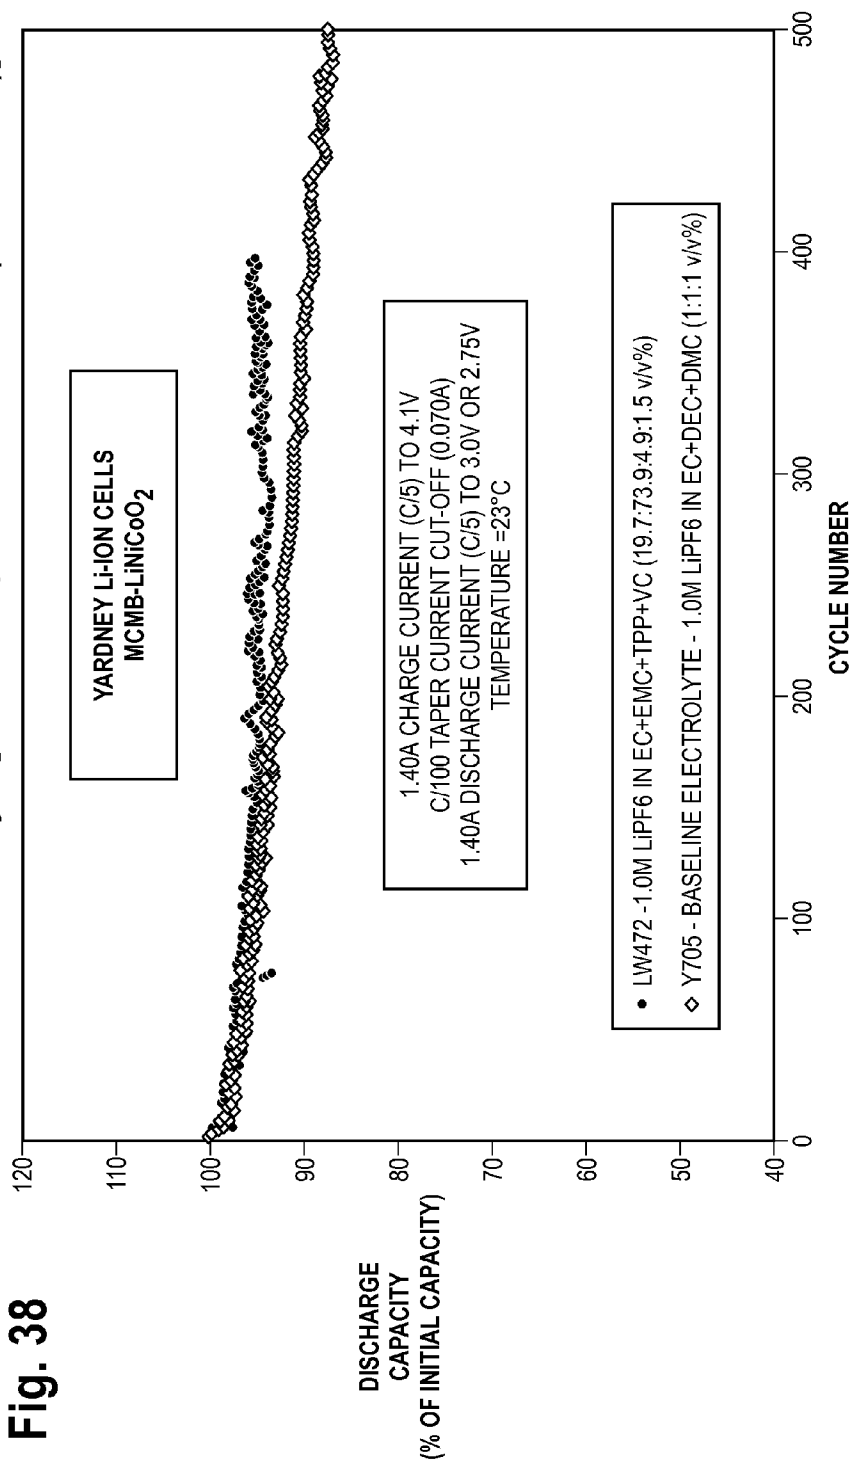


Fig. 39

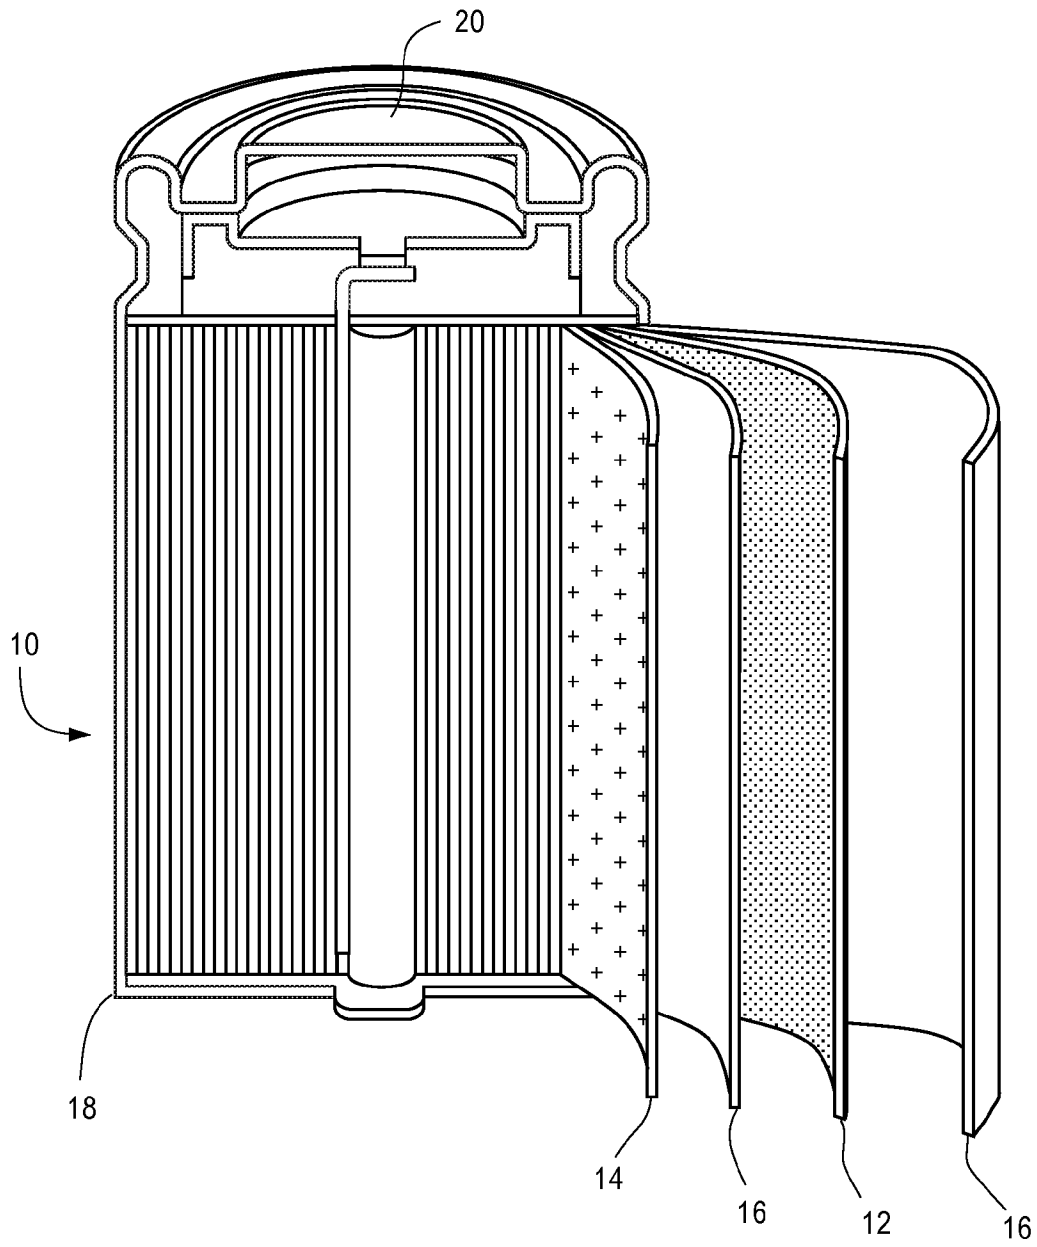

1

LITHIUM-ION ELECTROLYTES CONTAINING FLAME RETARDANT ADDITIVES FOR INCREASED SAFETY CHARACTERISTICS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims priority to U.S. Provisional Patent Application Ser. No. 61/189,415, filed Aug. 19, 2008, which is incorporated herein by reference in its entirety, and this application also claims priority to U.S. Provisional Patent Application Ser. No. 61/201,842, filed Dec. 16, 2008, which is also incorporated herein by reference in its entirety.

GOVERNMENT RIGHTS

The invention described herein was made in the performance of work under a NASA contract, and is subject to the provisions of Public Law 96-517 (35 USC 202) in which the Contractor has elected to retain title.

BACKGROUND

a. Field of the Invention

The invention relates to electrolytes and organic solvents for electrochemical cells. In particular, the invention relates to lithium-ion electrolytes and organic solvents for lithium-ion cells.

b. Background Art

Lithium-ion ("Li-ion") cells typically include a carbon (e.g., coke or graphite) anode intercalated with lithium ions to form Li_xC ; an electrolyte consisting of a lithium salt dissolved in one or more organic solvents; and a cathode made of an electrochemically active material, typically an insertion compound, such as LiCoO_2 . During cell discharge, lithium ions pass from the carbon anode, through the electrolyte to the cathode, where the ions are taken up with the simultaneous release of electrical energy. During cell recharge, lithium ions are transferred back to the anode, where they reintercalate into the carbon matrix.

Future NASA missions aimed at exploring Mars, the Moon, and the outer planets require rechargeable batteries that can operate effectively over a wide temperature range (-60°C . (Celsius) to $+60^\circ\text{C}$. (Celsius)) to satisfy the requirements of various applications, including: Landers (lander spacecraft), Rovers (surface rover spacecraft), and Penetrators (surface penetrator spacecraft). Some future applications typically will require high specific energy batteries that can operate at very low temperatures, while still providing adequate performance and stability at higher temperatures. In addition, many of these applications envisioned by the ESRT (Exploration Systems Research and Technology) program will require improved safety, due to their use by humans. Lithium-ion rechargeable batteries have the demonstrated characteristics of high energy density, high voltage, and excellent cycle life. Currently, the state-of-the-art lithium-ion system has been demonstrated to operate over a wide range of temperatures (-40°C . to $+40^\circ\text{C}$.), however, abuse conditions such as being exposed to high temperature, overcharge, and external shorting, can often lead to cell rupture and fire. The nature of the electrolyte can greatly affect the propensity of the cell/battery to catch fire, given the flammability of the organic solvents used within. Therefore, extensive effort has been devoted recently to developing non-flammable electrolytes to reduce the flammability of the cell/battery.

2

Desired properties for Li-ion electrolytes can include high conductivity over a wide temperature range (e.g., 1 mS (milli-Siemens) cm^{-1} from -60°C . to $+60^\circ\text{C}$.); good electrochemical stability over a wide voltage range (e.g., 0 to 4.5V (volts)) with minimal oxidative degradation of solvents/salts; good chemical stability; good compatibility with a chosen electrode couple, including good SEI (solid electrolyte interface) characteristics on the electrode and facile lithium intercalation/de-intercalation kinetics; good thermal stability; good low temperature performance throughout the life of the cell, including good resilience to high temperature exposure and minimal impedance build-up with cycling and/or storage; and low toxicity. Since the flammability of the electrolyte solution in Li-ion batteries is a major concern, significant research has been devoted to developing electrolyte formulations with increased safety. Known electrolytes used in state-of-the-art Li-ion cells have typically comprised binary mixtures of organic solvents, for example, high proportions of ethylene carbonate, propylene carbonate or dimethyl carbonate, within which is dispersed a lithium salt, such as lithium hexafluorophosphate (LiPF_6). Examples may include 1.0 M (molar) LiPF_6 in a 50:50 mixture of ethylene carbonate/dimethyl carbonate, or ethylene carbonate/diethyl carbonate. More recently, electrolytes have also been developed which combine more than two solvents and/or have incorporated the use of electrolyte additives to address specific performance goals.

Fluorinated esters have been incorporated into multi-component electrolyte formulations and their performance was demonstrated over a wide temperature range (-60°C . to $+60^\circ\text{C}$.) (see U.S. application Ser. No. 12/419,473 filed Apr. 7, 2009, for "Lithium Ion Electrolytes and Lithium Ion Cells with Good Low Temperature Performance", Smart et al.). The fluorinated ester co-solvents were employed due to their favorable properties and improved safety characteristics, mainly associated with their low flammability associated with their halogenated nature. Since the flammability of the electrolyte solution in Li-ion batteries is a major concern, significant research has been devoted to developing electrolyte formulations with increased safety. To achieve this, a number of approaches have been adopted, including the use of low-flammability solvents and the use of electrolyte additives. Regarding the first approach, the use of halogenated solvents (Smart, et al., "Improved Performance of Lithium Ion Cells with the use of Fluorinated Carbonate-Based Electrolytes", *Journal of Power Sources*, 119-121, 359-367 (2003)) and ionic liquids (Xu, Kang, "Nonaqueous Liquid Electrolytes for Lithium-Based Rechargeable Batteries", *Chemical Reviews*, 104(10), 4303-4417 (2004)) have been pursued. With respect to the use of electrolyte additives, the main focus has been upon the use of phosphorus containing additives, including trimethyl phosphate (Wang, et al., "Non-flammable Trimethyl Phosphate Solvent-Containing Electrolytes for Lithium-Ion Batteries", *Journal of the Electrochemical Society*, 148(10), A1058-A1065 (2001); Wang, et al., "Nonflammable Trimethyl Phosphate Solvent-Containing Electrolytes for Lithium-Ion Batteries", *Journal of the Electrochemical Society*, 148(10), A1066-A1071 (2001)), triethyl phosphate (Xu, et al., "An Attempt to Formulate Nonflammable Lithium Ion Electrolytes with Alkyl Phosphates and Phosphazenes", *Journal of the Electrochemical Society*, 149 (5), A622-A626 (2002)), triphenyl phosphate (Doughty, et al., "Effects of Additives on Thermal Stability of Li-ion Cells", *Journal of Power Sources*, Vol. 146, Issues 1-2, pp. 116-120 (2005)), tris(2,2,2-trifluoroethyl) phosphate (Xu, et al., "Nonflammable Electrolytes for Li-Ion Batteries Based on a Fluorinated Phosphate", *Journal of the Electrochemical Society*, 149(8), A1079-A1082 (2002); Xu, et al., "Evaluation

of Fluorinated Alkyl Phosphates as Flame Retardants in Electrolytes for Li-Ion Batteries”, *Journal of the Electrochemical Society*, 150(2), A161-A169 (2003)), and bis(2,2,2-trifluoroethyl) methyl phosphonate (TFMPo) (Xu, et al., “Nonflammable Electrolytes for Li-Ion Batteries Based on a Fluorinated Phosphate”, *Journal of the Electrochemical Society*, 149(8), A1079-A1082 (2002); Xu, et al., “Evaluation of Fluorinated Alkyl Phosphates as Flame Retardants in Electrolytes for Li-Ion Batteries”, *Journal of the Electrochemical Society*, 150(2), A161-A169 (2003)).

In addition, known improvements have been made to the safety characteristics of Li-ion electrolytes by the addition of flame retardant additives, such as triphenyl phosphate (referred to as TPhPh or TPP or TPPa), tributyl phosphate (referred to as TBP or TBuPh), triethyl phosphate (referred to as TEP or TEtPh), and bis(2,2,2-trifluoroethyl) methyl phosphonate (referred to as BTFEMP or TFMPo) (see NPO-46262, May 8, 2008). A number of electrolytes based upon these approaches have delivered good performance over a wide temperature range, good cycle life characteristics, and improved safety characteristics, namely reduced flammability. Since the flammability of the electrolyte solution in Li-ion batteries is a major concern, significant research has been devoted to developing electrolyte formulations with increased safety. To achieve this, a number of approaches have been adopted, including the use of low-flammability solvents and the use of electrolyte additives. As discussed above, regarding the first approach, the use of halogenated solvents (Smart, et al., “Improved Performance and Safety of Lithium Ion Cells with the Use of Fluorinated Carbonate-Based Electrolytes”, *Journal of Power Sources*, 119-12, 359-367 (2003)) and ionic liquids (Xu, Kang, “Nonaqueous Liquid Electrolytes for Lithium-Based Rechargeable Batteries”, *Chemical Review*, 104(10), 4303-4417 (2004)) have been pursued. With respect to the use of electrolyte additives, the main focus has been upon the use of phosphorus containing additives, including trimethyl phosphate, triethyl phosphate, triphenyl phosphate, tris(2,2,2-trifluoroethyl) phosphate, and bis(2,2,2-trifluoroethyl) methyl phosphonate (TFMPo) (see all above). In addition, known phosphorus based flame retardant additives have been investigated. Some of these electrolyte additives have been demonstrated to perform well in multi-component Li-ion battery electrolytes. For example, tris(2,2,2-trifluoroethyl) phosphate (see FIG. 5e) has been used in electrolyte solutions consisting of 1.0M LiPF₆ in EC+EMC (1:1 wt %) in varying concentrations (Xu, et al., “Nonflammable Electrolytes for Li-Ion Batteries Based on a Fluorinated Phosphate”, *Journal of the Electrochemical Society*, 149(8), A1079-A1082 (2002); Xu, et al., “Evaluation of Fluorinated Alkyl Phosphates as Flame Retardants in Electrolytes for Li-Ion Batteries”, *Journal of the Electrochemical Society*, 150(2), A161-A169 (2003)). Tris(2,2,2-trifluoroethyl) phosphite (see FIG. 5f) has been used in concentrations of up to 15% in solutions of 1.0M LiPF₆ PC+EC+EMC (3:3:4 wt %) (Zhang, et al., “Tris(2,2,2-trifluoroethyl) Phosphite as a Co-Solvent for Nonflammable Electrolytes in Li-Ion Batteries”, *Journal of Power Sources*, 113 (1), 166-172 (2003)), while other have investigated in 1.15M LiPF₆ in EC+EMC (3:7 vol %) (Nam, et al., “Diphenyloctyl Phosphate and tris(2,2,2-trifluoroethyl) Phosphite as Flame-Retardant Additives for Li-ion Cell Electrolytes at Elevated Temperature”, *Journal of Power Sources*, 180 (1), 561-567 (2008)). Triphenylphosphite (see FIG. 5g) has been investigated in solutions consisting of 1.0M LiPF₆ in EC+DEC+DMC (1:1:1 wt %) using concentrations of 10 wt % FRA (Ma, et al., “A Phosphorous Additive for Lithium-Ion Batteries”, *Electrochemical and Solid State Letters*, 11(8), A129-A131 (2008)).

Accordingly, there is a need for lithium-ion electrolytes containing flame retardant additives having increased and improved safety characteristics.

SUMMARY

This need for lithium-ion electrolytes containing flame retardant additives having increased and improved safety characteristics is satisfied. The invention discloses various embodiments of Li-ion electrolytes containing flame retardant additives that have delivered good performance over a wide temperature range, good cycle life characteristics, and improved safety characteristics, namely, reduced flammability.

In one embodiment of the invention there is provided an electrolyte for use in a lithium-ion electrochemical cell. The electrolyte comprises a mixture of an ethylene carbonate (EC); an ethyl methyl carbonate (EMC); a fluorinated co-solvent; a flame retardant additive; and, a lithium salt. Preferably, the electrochemical cell operates in a temperature range of from about -50 degrees Celsius to about 60 degrees Celsius. The fluorinated co-solvent preferably comprises 2,2,2-trifluoroethyl butyrate (TFEB), di-2,2,2-trifluoroethyl carbonate (DTFEC), 2,2,2-trifluoroethyl methyl carbonate (TFEMC), mono-fluoroethylene carbonate (FEC), ethyl trifluoroacetate (ETFA), 2,2,2-trifluoroethyl acetate (TFEA), 2,2,2-trifluoroethyl propionate (TFEP), ethyl-2,2,2-trifluoroethyl carbonate (ETFEC), propyl-2,2,2-trifluoroethyl carbonate (PTFEC), methyl-2,2,2,2',2',2'-hexafluoro-i-propyl carbonate (MHFPC), ethyl-2,2,2,2',2',2'-hexafluoro-i-propyl carbonate (EHFPC), fluoropropylene carbonate (FPC), trifluoropropylene carbonate (TFPC), methyl nonafluorobutyl ether, 2,2,3,3,3-pentafluoropropyl methyl ether, 1,1,3,3,3-pentafluoro-2-trifluoromethyl ether, 2,2,3,3-tetrafluoropropyl difluoromethyl ether, 1,1,2,3,3,3-hexafluoropropyl ethyl ether, or perfluoropolyether. The flame retardant additive preferably comprises triphenyl phosphate (TPhPh/TPP/TPPa), tributyl phosphate (TBP/TBuPh), triethyl phosphate (TEP/TEtPh), bis(2,2,2-trifluoroethyl) methyl phosphonate (BTFEMP/TFMPo), triphenyl phosphite, tris(2,2,2-trifluoroethyl) phosphate, tris(2,2,2-trifluoroethyl) phosphite, diethyl ethylphosphonate, and diethyl phenylphosphonate.

In another embodiment of the invention there is provided an electrolyte for use in a lithium-ion electrochemical cell. The electrolyte comprises a mixture of an ethylene carbonate (EC); an ethyl methyl carbonate (EMC); a flame retardant additive; a solid electrolyte interface (SEI) film forming agent; and, a lithium salt. Preferably, the electrochemical cell operates in a temperature range of from about -50 degrees Celsius to about 60 degrees Celsius. The flame retardant additive preferably comprises triphenyl phosphate (TPhPh/TPP/TPPa), tributyl phosphate (TBuPh), triethyl phosphate (TEtPh), bis(2,2,2-trifluoroethyl) methyl phosphonate (TFMPo), triphenyl phosphite, tris(2,2,2-trifluoroethyl) phosphate, tris(2,2,2-trifluoroethyl) phosphite, diethyl ethylphosphonate, and diethyl phenylphosphonate. The solid electrolyte interface (SEI) film forming agent preferably comprises vinylene carbonate (VC), vinyl ethylene carbonate (VEC), dibutyl pyrocarbonate (DBPC), dimethyl pyrocarbonate (DMPC), mono-fluoroethylene carbonate (FEC), lithium bis(oxalate)borate (LiBOB), lithium oxalotdifluoroborate (LiODFB), ethylene sulfite, propylene sulfite, butylene sulfite, lithium tetrafluoroxyalotophosphate (LiPF₄ (C₂O₄)), vinylene acetate, acrylic acid nitrile, ethyl isocyanate, 2-cyano furan, divinyl adipate, maleic anhydride, 2-vinyl pyridine, and vinyl-containing silane based compounds.

In another embodiment of the invention there is provided an electrolyte for use in a lithium-ion electrochemical cell. The electrolyte comprises a mixture of an ethylene carbonate (EC); an ethyl methyl carbonate (EMC); a phosphorus containing flame retardant additive; and, a lithium salt. Preferably, the electrochemical cell operates in a temperature range of from about -50 degrees Celsius to about 60 degrees Celsius. The phosphorus containing flame retardant additive preferably comprises triphenyl phosphate (TPhPh/TPP/TPPa), tributyl phosphate (TBPuPh), triethyl phosphate (TEtPh), bis(2,2,2-trifluoroethyl) methyl phosphonate (TFMPo), triphenyl phosphite, tris(2,2,2-trifluoroethyl) phosphite, diethyl ethylphosphonate, and diethyl phenylphosphonate.

In another embodiment of the invention there is provided a lithium-ion electrochemical cell comprising an anode; a cathode; and, an electrolyte interspersed between the anode and the cathode. The electrolyte comprises a mixture of an ethylene carbonate (EC); an ethyl methyl carbonate (EMC); a fluorinated co-solvent preferably comprising 2,2,2-trifluoroethyl butyrate (TFEB), di-2,2,2-trifluoroethyl carbonate (DTFEC), 2,2,2-trifluoroethyl methyl carbonate (TFEMC), mono-fluoroethylene carbonate (FEC), ethyl trifluoroacetate (ETFA), 2,2,2-trifluoroethyl acetate (TFEA), 2,2,2-trifluoroethyl propionate (TFEP), ethyl-2,2,2-trifluoroethyl carbonate (ETFEC), propyl-2,2,2-trifluoroethyl carbonate (PTFEC), methyl-2,2,2,2',2',2'-hexafluoro-i-propyl carbonate (MH-FPC), ethyl-2,2,2,2',2',2'-hexafluoro-i-propyl carbonate (EH-FPC), fluoropropylene carbonate (FPC), trifluoropropylene carbonate (TFPC), methyl nonafluorobutyl ether, 2,2,3,3,3-pentafluoropropyl methyl ether, 1,1,3,3,3-pentafluoro-2-trifluoromethyl ether, 2,2,3,3-tetrafluoropropyl difluoromethyl ether, 1,1,2,3,3,3-hexafluoropropyl ethyl ether, or perfluoropolyether; a flame retardant additive preferably comprising triphenyl phosphate (TPhPh/TPP/TPPa), tributyl phosphate (TBPuPh), triethyl phosphate (TEtPh), bis(2,2,2-trifluoroethyl) methyl phosphonate (TFMPo), triphenyl phosphite, tris(2,2,2-trifluoroethyl) phosphite, tris(2,2,2-trifluoroethyl) phosphite, diethyl ethylphosphonate, and diethyl phenylphosphonate; and, a lithium salt. Preferably, the electrochemical cell operates in a temperature range of from about -50 degrees Celsius to about 60 degrees Celsius.

In another embodiment of the invention there is provided a lithium-ion electrochemical cell comprising an anode; a cathode; and, an electrolyte interspersed between the anode and the cathode. The electrolyte comprises a mixture of an ethylene carbonate (EC); an ethyl methyl carbonate (EMC); a phosphorus containing flame retardant additive preferably comprising triphenyl phosphate (TPhPh/TPP/TPPa), tributyl phosphate (TBPuPh), triethyl phosphate (TEtPh), bis(2,2,2-trifluoroethyl) methyl phosphonate (TFMPo), triphenyl phosphite, tris(2,2,2-trifluoroethyl) phosphite, tris(2,2,2-trifluoroethyl) phosphite, diethyl ethylphosphonate, and diethyl phenylphosphonate; and, a lithium salt. The electrochemical cell operates in a temperature range of from about -50 degrees Celsius to about 60 degrees Celsius.

The features, functions, and advantages that have been discussed can be achieved independently in various embodiments of the disclosure or may be combined in yet other embodiments further details of which can be seen with reference to the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention can be better understood with reference to the following detailed description taken in conjunction with

the accompanying drawings which illustrate preferred and exemplary embodiments, but which are not necessarily drawn to scale, wherein:

FIG. 1 is an illustration of a table summary of charge-discharge characteristics of experimental lithium-ion cells containing various electrolytes subjected to formation cycling according to the invention;

FIG. 2 is an illustration of a table summary of discharge capacity at low temperature for MCMB-LiNiCoO₂ containing electrolytes with flame retardant additives according to the invention;

FIG. 3 is an illustration of a graph showing discharge capacity at -20° C. (expressed as percent of room temperature capacity) of MCMB-LiNiCoO₂ cells containing electrolytes with flame retardant additives according to the invention;

FIG. 4 is an illustration of a graph showing cycle life performance of MCMB-LiNiCoO₂ cell containing electrolytes with flame retardant additives according to the invention;

FIG. 5a is an illustration of the chemical structure of flame retardant triphenyl phosphate;

FIG. 5b is an illustration of the chemical structure of flame retardant tributyl phosphate;

FIG. 5c is an illustration of the chemical structure of flame retardant triethyl phosphate;

FIG. 5d is an illustration of the chemical structure of flame retardant bis(2,2,2-trifluoroethyl) methyl phosphonate;

FIG. 5e is an illustration of the chemical structure of flame retardant tris(2,2,2-trifluoroethyl) phosphate;

FIG. 5f is an illustration of the chemical structure of flame retardant tris(2,2,2-trifluoroethyl) phosphite;

FIG. 5g is an illustration of the chemical structure of flame retardant triphenylphosphite;

FIG. 5h is an illustration of the chemical structure of flame retardant diethyl phenyl phosphonate;

FIG. 5i is an illustration of the chemical structure of flame retardant diethyl ethyl phosphonate;

FIG. 6 is an illustration of a table summary of charge-discharge characteristics of experimental MCMB-LiNiCoO₂ cells containing electrolytes with flame retardant additives subjected to formation cycling according to the invention;

FIG. 7 is an illustration of a graph showing fifth discharge of formation cycling for cells containing flame retardant additives according to the invention;

FIG. 8 is an illustration of a table summary of discharge capacity at low temperature of a number of MCMB-LiNiCoO₂ cells containing electrolytes with flame retardant additives according to the invention;

FIG. 9 is an illustration of a graph showing discharge capacity at -20° C. (expressed as percent of room temperature capacity) of MCMB-LiNiCoO₂ cells containing electrolytes with flame retardant additives according to the invention;

FIG. 10 is an illustration of a graph showing discharge capacity at -40° C. (expressed as percent of room temperature capacity) of MCMB-LiNiCoO₂ cells containing electrolytes with flame retardant additives according to the invention;

FIG. 11 is an illustration of a graph showing cycle life performance of MCMB-LiNiCoO₂ cells containing electrolytes with flame retardant additives according to the invention;

FIG. 12 is an illustration of a summary table of formation characteristics of electrolytes with flame retardant additives and fluoroesters according to the invention;

FIG. 13 is an illustration of a graph showing cycle life of electrolytes with flame retardant additives and fluoroesters according to the invention;

FIG. 14 is an illustration of a summary table of results obtained from Electrochemical Impedance Spectroscopy (EIS) measurements for cathodes in contact with electrolytes with flame retardant additives and fluoroesters according to the invention;

FIG. 15 is an illustration of a summary table of results obtained from Electrochemical Impedance Spectroscopy (EIS) measurements for anodes in contact with electrolytes with flame retardant additives and fluoroesters according to the invention;

FIG. 16 is an illustration of a graph showing the Tafel polarization measurements performed on MCMB anodes in contact with electrolytes with flame retardant additives and fluoroesters and data was obtained from MCMB-LiNi_{0.8}Co_{0.2}O₂ cells containing lithium reference electrodes according to the invention;

FIG. 17 is an illustration of a graph showing the Tafel polarization measurements performed on LiNiCoO₂ cathodes in contact with electrolytes with flame retardant additives and fluoroesters and data was obtained from MCMB-LiNiCoO₂ cells equipped with lithium reference electrodes according to the invention;

FIG. 18 is an illustration of a table summary of DC micro-polarization measurements for the cathode of cells containing flame retardant additives and fluoroester electrolytes according to the invention;

FIG. 19 is an illustration of a table summary of DC micro-polarization measurements for the anode of cells containing flame retardant additives and fluoroester electrolytes according to the invention;

FIG. 20 is an illustration of the chemical structure of SEI (solid electrolyte interface) enhancing agent vinylene carbonate;

FIG. 21 is an illustration of a table summary of formation characteristics of electrolytes with flame retardant additives and SEI enhancing agent according to the invention;

FIG. 22 is an illustration of a table summary of evaluation of low temperature performance of cells containing flame retardant additives and SEI additive according to the invention;

FIG. 23 is an illustration of a table summary of results obtained from Electrochemical Impedance Spectroscopy (EIS) measurements for the cathodes of cells containing flame retardant additives/VC according to the invention;

FIG. 24 is an illustration of a table summary of results obtained from Electrochemical Impedance Spectroscopy (EIS) measurements for the anodes of cells containing flame retardant additives/VC according to the invention;

FIG. 25 is an illustration of a table summary of linear polarization measurements for the anodes of cells containing electrolytes with flame retardant additives/VC according to the invention;

FIG. 26 is an illustration of a table summary of linear polarization measurements for the cathodes of cells containing electrolytes with flame retardant additives/VC according to the invention;

FIG. 27 is an illustration of a table summary of formation characteristics of experimental MCMB-LiNiCoO₂ cells containing electrolytes with flame retardant additives subjected to formation cycling according to the invention;

FIG. 28 is an illustration of a table summary of discharge capacity at low temperature of a number of MCMB-LiNiCoO₂ cells containing electrolytes with flame retardant additives according to the invention;

FIG. 29 is an illustration of a graph showing discharge performance at 0° C. (expressed as percent of room temperature capacity) of a ~400 mAh MCMB-LiNiCoO₂ cell containing 1.0 M LiPF₆ in EC+EMC+TPP (20:70:10 v/v %) according to the invention;

FIG. 30 is an illustration of a graph showing discharge performance at 0° C. (expressed as percent of room temperature capacity) of a MCMB-LiNiCoO₂ cell containing 1.0 M LiPF₆ in EC+EMC+DTFEC+TPP (20:50:20:10 v/v %) according to the invention;

FIG. 31 is an illustration of a graph showing the Tafel polarization measurements of LiNiCoO₂ electrodes from MCMB-LiNiCoO₂ cells containing electrolytes with 10% TPP and with and without the addition of DTFEC according to the invention;

FIG. 32 is an illustration of a graph showing the Tafel polarization measurements of MCMB electrodes from MCMB-LiNiCoO₂ cells containing electrolytes with 10% TPP and with and without the addition of DTFEC according to the invention;

FIG. 33 is an illustration of a table summary of discharge capacity at low temperature of a number of MCMB-LiNiCoO₂ cells containing electrolytes with 10% TPP and TFEC and/or FEC according to the invention;

FIG. 34 is an illustration of a graph showing discharge performance at 0° C. using a ~C/8 discharge rate to 2.0 V (volts) according to the invention;

FIG. 35 is an illustration of a table summary of the formation characteristics of a number of Li—Li (Li_{0.17}Ni_{0.25}Mn_{0.58})O₂ cells containing various electrolytes with TPP and TPPi flame retardant additives according to the invention;

FIG. 36 is an illustration of a table summary of discharge performance of a 7 Ah Li-ion cell containing 1.0M LiPF₆ in EC+EMC+TPP+VC (19.7/73.9/4.9/1.5 v/v %) according to the invention;

FIG. 37 is an illustration of a graph showing discharge rate performance at 20° C. of a 7 Ah Li-ion cell containing 1.0M LiPF₆ in EC+EMC+TPP+VC (19.7/73.9/4.9/1.5 v/v %) according to the invention;

FIG. 38 is an illustration of a graph showing 100% depth of discharge (DOD) cycling of 7 Ah Li-ion cell containing flame retardant additive containing electrolyte [1.0M LiPF₆ in EC+EMC+TPP+VC (19.7/73.9/4.9/1.5 v/v %)] and the baseline electrolyte [1.0M LiPF₆ in EC+DMC+DEC (1:1:1 v/v %)] according to the invention; and,

FIG. 39 is an illustration of a partially exploded view of a lithium-ion electrochemical cell constructed according to one embodiment of the invention.

DETAILED DESCRIPTION

Disclosed embodiments will now be described more fully hereinafter with reference to the accompanying drawings, in which some, but not all disclosed embodiments are shown. Indeed, several different embodiments may be provided and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete and will fully convey the scope of the disclosure to those skilled in the art.

The invention discloses various embodiments of Li-ion electrolytes containing flame retardant additives that have delivered good performance over a wide temperature range, good cycle life characteristics, and improved safety characteristics, namely, reduced flammability. In addition, the invention discloses lithium-ion electrochemical cells com-

prising anodes; cathodes; and embodiments of the electrolyte of the invention interspersed between the anodes and the cathodes.

FIG. 39 is an illustration of a partially exploded view of a lithium-ion electrochemical cell 10 or battery constructed according to one embodiment of the invention. The electrolytes and organic solvents described herein may be used in the construction of the improved Li-ion electrochemical cell, characterized by good performance over a wide temperature range, good cycle life characteristics, and improved safety characteristics. The electrochemical cell preferably operates in a temperature range of from about -50 degrees C. (Celsius) to about 60 degrees C. (Celsius). The lithium-ion electrochemical cell 10 comprises an anode 12. The anode 12 may comprise mesocarbon microbeads (MCMB) carbon, lithium titanate ($\text{Li}_4\text{Ti}_5\text{O}_{12}$), carbon graphite, coke based carbon, lithium metal, or another suitable material. Carbon is the preferred anode material for lithium-ion rechargeable cells due to its low potential versus lithium (of the lithiated compound), excellent reversibility for lithium intercalation/de-intercalation reactions, good electronic conductivity, and low cost. Three broad types of carbonaceous anodic materials are known: (a) non-graphitic carbon, e.g., petroleum coke, pitch coke, (b) graphitic carbon, e.g., natural graphite, synthetic graphite, and (c) modified carbon, e.g., mesocarbon microbead carbon material. The lithium-ion electrochemical cell further comprises a cathode 14 such as an insertion-type cathode. The cathode 14 may comprise lithium cobalt oxide (LiCoO_2), lithium nickel cobalt oxide ($\text{LiNi}_{0.8}\text{Co}_{0.2}\text{O}_2$), lithium manganese oxide (LiMn_2O_4), lithium nickel cobalt aluminum oxide (LiNiCoAlO_2), lithium metal phosphate (LiMPO_4) where the metal may comprise iron, cobalt, manganese, or another suitable metal, lithium nickel cobalt manganese oxide (LiNiCoMnO_2), high voltage electrodes such as $\text{Li}(\text{Li}_{0.17}\text{Ni}_{0.25}\text{Mn}_{0.58})\text{O}_2$ and LiMn_2O_4 spinel, or another suitable material. Suitable cathode materials include transition metal oxides, such as insertion-type metal oxides. In lithium-ion cells, the cathode functions as a source of lithium for the intercalation/de-intercalation reactions at the anode and the cathode. Also, it is preferable that the cathode material in lithium-ion cells have a high voltage versus lithium (>3.0 V) to compensate for voltage losses due to the use of alternate lithium anode materials (having reduced lithium activity) such as lithiated carbon. Lithiated cobalt oxide is a preferred compound because of its ease of preparation and reversibility. Lithiated nickel oxide, lithiated manganese oxide, and other suitable lithiated metal oxides are good alternatives. The anode 12 may be separated from the cathode 14 by one or more electrolyte-permeable separators 16, with the anode/separator(s)/cathode preferably cylindrically rolled up in "jelly roll" fashion and inserted into a can or case 18, which is sealed or closed by a cap 20. The Li-ion electrochemical cell 10 further comprises an electrolyte, such as one of the electrolytes discussed in detail below, interspersed between the anode and the cathode. Both the anode 12 and the cathode 14 are bathed in the electrolyte which is able to pass through the separator(s), allowing ion movement from one electrode to the other. The electrolyte that may be used in the Li-ion electrochemical cell may comprise one of the below discussed mixtures. Other features, such as one or more gaskets, anode and cathode tabs, safety vents, center pin, and other features known in the art may be included as deemed appropriate, in accordance with known battery design and fabrication. The electrolytes of the invention may be used in the above-described electrochemical cell or battery, and may also be used in such batteries as automotive Li-ion cell batteries, computer laptop Li-ion cell batteries, and can be used for

aerospace applications (e.g., astronaut equipment, satellites, planetary rovers, and other suitable applications), and military applications (e.g., communications devices, aircraft batteries, back-up power sources, and other suitable applications).

EXAMPLES AND ELECTROCHEMICAL MEASUREMENTS

Li-ion Electrolytes Containing FRA and Incorporating Fluorinated Ester Co-Solvents

Description. Experiments were conducted on Li-ion electrolytes containing flame retardant additives (FRA) and incorporating fluorinated ester co-solvents. As part of a continuing effort to develop advanced electrolytes to improve the safety and performance of Li-ion cells, especially over a wide operating temperature range, a number of Li-ion electrolytes that contain flame retardant additive in conjunction with fluorinated ester co-solvents were developed to provide a safe, wide operating temperature range system. The safety characteristics of these electrolytes were further improved by the addition of flame retardant additives, such as triphenyl phosphate (TPP or TPPA or TPhPh), tributyl phosphate (TBP or TBuPh), triethyl phosphate (TEP or TEtPh), and bis(2,2,2-trifluoroethyl) methyl phosphonate (BTFEMP or TFMPo). A number of electrolytes based upon these approaches have delivered good performance over a wide temperature range, good cycle life characteristics, and improved safety characteristics, namely reduced flammability.

The following electrolyte formulations were investigated and demonstrated in experimental MCMB carbon- $\text{LiNi}_{0.8}\text{Co}_{0.2}\text{O}_2$ cells: (1) 1.0 M LiPF_6 in EC+EMC+TFEB+TPP (20:55:20:5 v/v %); (2) 1.0 M LiPF_6 in EC+EMC+TFEB+TBP (20:55:20:5 v/v %); (3) 1.0 M LiPF_6 in EC+EMC+TFEB+TEP (20:55:20:5 v/v %); (4) 1.0 M LiPF_6 in EC+EMC+TFEB+BTFEMP (20:55:20:5 v/v %); (5) 1.0 M LiPF_6 in EC+EMC+TPP (20:75:5 v/v %); (6) 1.0 M LiPF_6 in EC+EMC+TPP (20:75:5 v/v %)+1.5% VC; (7) 1.0 M LiPF_6 in EC+EMC (20:80 v/v %)+1.5% VC; and, (8) 1.0 M LiPF_6 in EC+EMC (20:80 v/v %) (Baseline).

In general, many of the formulations displayed good performance over a wide temperature range, good cycle life characteristics, and were expected to have improved safety characteristics, namely low flammability. Of the electrolytes studied, 1.0 M LiPF_6 EC+EMC+TFEB+TPP (20:55:20:5 v/v %) (where TPP=triphenyl phosphate) was identified as being a promising non-flammable electrolyte, due to reasonable low temperature performance and superior life characteristics. In addition, the electrolyte consisting of 1.0 M LiPF_6 EC+EMC+TPP (20:75:5 v/v %)+1.5% VC was demonstrated to have even further improved life characteristics, due to the incorporation of an SEI (solid electrolyte interface) promoter (i.e., VC=vinylene carbonate), which appears to inhibit the decomposition of the TPP.

A number of experimental lithium-ion cells, consisting of MCMB carbon anodes and $\text{LiNi}_{0.8}\text{Co}_{0.2}\text{O}_2$ cathodes, have been fabricated to study the described technology. These cells served to verify and demonstrate the reversibility, low temperature performance, and electrochemical aspects of each electrode as determined from a number of electrochemical characterization techniques. The electrolytes selected for evaluation are listed above (see electrolytes 1-8). FIG. 1 is an illustration of a table summary of charge-discharge characteristics of experimental lithium-ion cells containing various electrolytes subjected to formation cycling according to the invention. As shown in FIG. 1, all cells displayed good revers-

ibility at room temperature and minimal reactivity during the formation cycling. The high coulombic efficiency and comparable irreversible capacity losses were indirectly related to the overall stability of the solutions and the electrode filming characteristics. As further shown in FIG. 1, reasonable reversibility was observed with the cells containing all of the electrolyte variations, when compared after the formation cycling. It should be noted that some variation in capacity was due to different electrode weights, and not electrolyte type, so most comparisons were expressed in terms of percentage of initial capacity under ambient temperatures. Of the additives investigated, the triphenyl phosphate (TPP) displayed the lowest irreversible capacity losses and highest coulombic efficiency, suggesting that it is not electrochemically decomposing and participating in the electrode filming process deleteriously.

Low Temperature Performance. FIG. 2 is an illustration of a table summary of discharge capacity at low temperature for MCMB-LiNiCoO₂ containing electrolytes with flame retardant additives according to the invention. When the cells described were evaluated at low temperatures, as shown in FIG. 2, reasonable low temperature performance was generally observed. This finding was significant since the use of flame retardant additives was anticipated in decreasing the power capability and low temperature performance, due to decreased ionic conductivity of the media and increased electrode film resistance with the possible reactivity of the FRA.

As expected, the low temperature performance was somewhat compromised upon the addition of the flame retardant additives, especially at temperatures below -20° C. (Celsius). Of the FRA-containing electrolytes the formulation containing tributyl phosphate delivered the best performance at low temperature, with over 68% of the room temperature capacity being delivered at -20° C. using a ~C/16 (approximate full capacity over 16 hour discharge rate), as illustrated in FIG. 3. FIG. 3 is an illustration of a graph showing discharge capacity at -20° C. (expressed as percent of room temperature capacity) of MCMB-LiNiCoO₂ cells containing electrolytes with flame retardant additives according to the invention. The x-axis shows percent of room temperature capacity (%) and the y-axis shows voltage (V).

Cycle Life Performance. As mentioned previously, the general expectation was that the cycle life performance would be compromised with the addition of FRAs due to the possible reactivity with the electrode interfaces leading to impedance build-up and capacity loss. To mitigate this, incorporation of a "film forming" additive to the electrolyte to prevent excessive reactivity of the FRA, especially at the anode, was investigated. FIG. 4 is an illustration of a graph showing cycle life performance of MCMB-LiNiCoO₂ cell containing electrolytes with flame retardant additives according to the invention. The x-axis shows cycle number and the y-axis shows percent initial capacity. As illustrated in FIG. 4, when vinylene carbonate (VC), a well-known SEI "film forming" additive, was added to an electrolyte containing an FRA additive (e.g., triphenyl phosphate), much improved cycle life performance was obtained. It is anticipated that this approach can be extended to other FRA-containing electrolytes which have different solvent blends, salt types, and/or which employed other SEI film forming agents. It should also be noted that the cycle life performance is anticipated to be much better in aerospace quality lithium-ion cells, due to the fact that the data reflects experimental cells which are a flooded design, and not hermetically sealed.

FIG. 12 is an illustration of a summary table of formation characteristics of electrolytes with flame retardant additives and fluoroester according to the invention. Addition of flame

retardant additives did not significantly increase irreversible capacity loss or reduce coulombic efficiency of the cells during the formation cycles. FIG. 13 is an illustration of a graph showing cycle life of electrolytes with flame retardant additives and fluoroester according to the invention. The x-axis shows cycle number and the y-axis shows percent initial capacity. As shown in FIG. 13, phenyl branches improved cyclability of FRA electrolytes, and short aliphatic branches of the FRA reduced the electrochemical and life cycle stability of the electrolyte. FIG. 14 is an illustration of a summary table of results obtained from Electrochemical Impedance Spectroscopy (EIS) measurements for cathodes in contact with electrolytes with flame retardant additives and fluoroesters according to the invention. As shown in FIG. 14, addition of FRA did not significantly increase the impedance growth at the cathode. FIG. 15 is an illustration of a summary table of the results obtained from Electrochemical Impedance Spectroscopy (EIS) measurements for MCMB anodes in contact with electrolytes with flame retardant additives and fluoroesters according to the invention. As shown in FIG. 15, significant impedance growth at the anode occurred with the addition of the FRA, and the film resistance growth was significantly higher than the baseline. FIG. 16 is an illustration of a graph showing the Tafel polarization measurements performed on MCMB anodes in contact with electrolytes with flame retardant additives and fluoroesters and data was obtained from MCMB-LiNi_{0.8}Co_{0.2}O₂ cells containing lithium reference electrodes at a temperature of 23° C. according to the invention. The x-axis shows current (Amps) and the y-axis shows anode potential (mV versus Li⁺/Li). FIG. 17 is an illustration of a graph showing the Tafel polarization measurements performed on LiNiCoO₂ cathodes in contact with electrolytes with flame retardant additives and fluoroesters and data was obtained from MCMB-LiNiCoO₂ cells equipped with lithium reference electrodes at a temperature of 23° C. according to the invention. The x-axis shows current (Amps) and the y-axis shows cathode potential (V versus Li⁺/Li). FIG. 18 is an illustration of a table summary of DC (direct current) micro-polarization measurements for the cathode of cells containing flame retardant additives and fluoroester electrolytes according to the invention. FIG. 19 is an illustration of a table summary of the results obtained from DC micro-polarization measurements for the anode of MCMB-LiNi_{0.8}Co_{0.2}O₂ cells containing flame retardant additives and fluoroester electrolytes according to the invention. FIGS. 18-19 further highlight that the deleterious action of the flame retardant additives was resultant from their action at the anode.

FIG. 20 is an illustration of the chemical formation and structure of SEI (solid electrolyte interface) enhancing agent vinylene carbonate. It is generally held that vinylene carbonate undergoes a radical polymerization process at the electrode surface, i.e., especially under reductive conditions at the anode, to produce poly(vinylene carbonate) which imparts beneficial properties to the SEI (i.e., facile transport of lithium ions while offering protection against excessive solvent reduction). SEI enhancing agents can improve the SEI layer by reducing gas generation against extended cycling, reduced capacity loss and SEI stabilization. The mechanism is electrochemically-induced polymerization, and it is terminated by a radical anion reaction with a solvent molecule. The SEI enhancing agent can reduce the decomposition of flame retardant additives. FIG. 21 is an illustration of a table summary of formation characteristics of electrolytes with flame retardant additives and SEI enhancing agent according to the invention. As shown by FIG. 21, the addition of the SEI enhancing additive, vinylene carbonate, increased irrevers-

13

ible capacity loss. However, continued degradation can be minimal after the formation cycling due to the protective nature of vinylene carbonate. FIG. 22 is an illustration of a table summary of evaluation of low temperature performance of cells containing flame retardant additives and SEI additive according to the invention. As shown by FIG. 22, the addition of vinylene carbonate contributed to improved low temperature and increased rate performance. FIG. 23 is an illustration of a table summary of results obtained from Electrochemical Impedance Spectroscopy (EIS) measurements performed on LiNiCoO₂ cathodes of MCMB-LiNiCoO₂ cells containing electrolytes possessing flame retardant additives/VC according to the invention. As shown by FIG. 23, the impedance growth at the cathode was not significantly influenced by the addition of vinylene carbonate or FRA. FIG. 24 is an illustration of a table summary of results obtained from Electrochemical Impedance Spectroscopy (EIS) measurements performed on MCMB anodes of MCMB-LiNiCoO₂ cells containing electrolytes possessing flame retardant additives/VC according to the invention. As shown by FIG. 24, the influence of both FRA and vinylene carbonate was seen at the anode and was exacerbated at low temperatures (i.e., larger film resistance, R_f , and larger charge transfer resistance, R_{ct}). FIG. 25 is an illustration of a table summary of linear polarization measurements that were performed on MCMB anodes from MCMB-LiNiCoO₂ cells containing electrolytes possessing flame retardant additives/VC according to the invention. FIG. 26 is an illustration of a table summary of linear polarization measurements performed on LiNiCoO₂ cathodes from MCMB-LiNiCoO₂ cells containing electrolytes possessing flame retardant additives/VC according to the invention. As shown by FIGS. 25-26, the polarization resistance of the MCMB anodes increased much more than the cathodes for cells containing FRA.

Summary. The safety characteristics of Li-ion electrolytes has been further improved by the addition of flame retardant additives (FRA), such as triphenyl phosphate (TPP or TPPa or TPhPh), tributyl phosphate (TBP or TBuPh), triethyl phosphate (TEP or TEtPh), and bis(2,2,2-trifluoroethyl) methyl phosphonate (BTEMP or TFMPo). A number of electrolytes based upon these approaches have delivered good performance over a wide temperature range, good cycle life characteristics, and improved safety characteristics, namely reduced flammability. Of the additives investigated, the triphenyl phosphate displayed the lowest irreversible capacity losses and high coulombic efficiency, suggesting that it displays the least amount of electrochemical decomposition and does not participate in the electrode filming process to a great extent. Of the FRA-containing electrolytes, the formulation containing tributyl phosphate delivered the best performance at low temperature, with over 68% (percent) of the room temperature capacity being delivered at -20° C. using a -C/16 discharge rate. With respect to cycle life performance, improved life characteristics were observed with the incorporation of film forming additives, which serve to prevent excessive reactivity of the FRA at the electrode interfaces, especially at the carbon anode. Further optimization of these electrolyte formulations was anticipated to yield improved performance. It was also anticipated that much improved performance would be demonstrated once these electrolyte solutions were incorporated into hermetically sealed large capacity, prototype cells, especially if effort is devoted to ensuring that all electrolyte components are highly pure. The fluorinated esters imparted desirable physical characteristics on the base electrolyte solvent system. The structure of the FRA significantly influenced the performance characteristics of the cells. Short aliphatic chained phosphates imparted

14

preferred low temperature characteristics. Larger branches of FRA offered increased electrochemical stability leading to improved cycle life. Deleterious effects of FRA were primarily seen at the anodes, such as the build-up of surface films at the interface which limits the kinetics of lithium intercalation/de-intercalation as determined by Electrochemical Impedance Spectroscopy (EIS) and the DC (direct current) polarization techniques. These findings can lead to the mitigation strategy of incorporating additional electrolyte additives to minimize the continued reaction of the FRA at the interface.

Li-ion Electrolytes Containing Phosphorus-Based FRA

Description. Additional experiments were conducted with Li-ion electrolytes containing more phosphorus-based flame retardant additives. As part of a continuing effort to develop advanced electrolytes to improve the safety and performance of lithium-ion cells, especially over a wide operating temperature range, a number of Li-ion electrolytes that contain flame retardant additives optimized for operation over a wide temperature range were developed. Phosphorus-based flame retardant additives were investigated, including (a) tris(2,2,2-trifluoroethyl) phosphate (see FIG. 5e showing the chemical structure), (b) tris(2,2,2-trifluoroethyl) phosphite (see FIG. 5f showing the chemical structure), (c) triphenylphosphite (see FIG. 5g showing the chemical structure), (d) diethyl ethylphosphonate (see FIG. 5i showing the chemical structure), and (e) diethyl phenylphosphonate (see FIG. 5h showing the chemical structure). These phosphorus-based flame retardant additives, as shown in FIGS. 5e-5i, were added to an electrolyte composition intended for wide operating temperature range, namely 1.0M LiPF₆ in EC+EMC (20:80 v/v %).

The following electrolyte formulations were investigated and demonstrated in experimental MCMB carbon-LiNi_{0.8}Co_{0.2}O₂ cells: (1) 1.0 M LiPF₆ in EC+EMC+TPPa (20:75:5 v/v %); (2) 1.0 M LiPF₆ in EC+EMC+TFPi (20:75:5 v/v %); (3) 1.0 M LiPF₆ in EC+EMC+TPPi (20:75:5 v/v %); (4) 1.0 M LiPF₆ in EC+EMC+DEP (20:75:5 v/v %); (5) 1.0 M LiPF₆ in EC+EMC+DPP (20:75:5 v/v %); and, (6) 1.0 M LiPF₆ in EC+EMC (20:80 v/v %) (Baseline), (where TPPa=tris(2,2,2-trifluoroethyl) phosphate, TFPi=tris(2,2,2-trifluoroethyl) phosphite, TPPi=triphenyl phosphite, DEP=diethyl ethylphosphonate, and DPP=diethyl phenylphosphonate).

In general, many of the formulations investigated in this study displayed good performance over a wide temperature range, good cycle life characteristics, and were expected to have improved safety characteristics, namely low flammability. Of the electrolytes studied, 1.0 M LiPF₆ in EC+EMC+DEP (20:75:5 v/v %) and 1.0 M LiPF₆ in EC+EMC+DPP (20:75:5 v/v %) displayed the best operation at low temperatures, whereas the electrolyte containing triphenylphosphite displayed the best cycle life performance compared to the baseline solution. It is anticipated that further improvements can be made to the life characteristics with the incorporation of a SEI promoters (such as VC, vinylene carbonate), which will likely inhibit the decomposition of the flame retardant additives, as demonstrated in the previous study.

Description. A number of experimental lithium-ion cells, consisting of MCMB carbon anodes and LiNi_{0.8}Co_{0.2}O₂ cathodes, were fabricated to study the described technology. These cells served to verify and demonstrate the reversibility, low temperature performance, and electrochemical aspects of each electrode as determined from a number of electrochemical characterization techniques. The electrolytes selected for

evaluation are listed above (electrolytes 1-6). FIG. 6 is an illustration of a table summary of charge-discharge characteristics of experimental MCMB-LiNiCoO₂ cells containing electrolytes with flame retardant additives subjected to formation cycling according to the invention. As shown in FIG. 6, all cells displayed good reversibility at room temperature and minimal reactivity during the formation cycling. The high coulombic efficiency and comparable irreversible capacity losses were indirectly related to the overall stability of the solutions and the electrode filming characteristics.

FIG. 7 is an illustration of a graph showing fifth discharge of formation cycling for cells containing flame retardant additives according to the invention. The x-axis shows discharge capacity in Ah (Ampere hours) and the y-axis shows voltage (V). As shown in FIGS. 6-7, reasonable reversibility was observed with the cells containing all of the electrolyte variations, when compared after the formation cycling. It should be noted that some variation in capacity was due to different electrode weights, and not electrolyte type, so most comparisons were expressed in terms of percentage of initial capacity under ambient temperatures. Of the additives investigated, the electrolytes containing the diethyl ethylphosphonate and diethyl phenylphosphonate displayed the lowest irreversible capacity losses and highest coulombic efficiency, suggesting that it was not electrochemically decomposing and participating in the electrode filming process deleteriously.

Low Temperature Performance. FIG. 8 is an illustration of a table summary of discharge capacity at low temperature of a number of MCMB-LiNiCoO₂ cells containing electrolytes with flame retardant additives according to the invention. When the cells described were evaluated at low temperatures, as shown in FIG. 8, reasonable low temperature performance was generally observed. This finding is significant since the use of flame retardant additives was anticipated in decreasing the power capability and low temperature performance, due to decreased ionic conductivity of the media and increased electrode film resistance with the possible reactivity of the FRA.

Of the additives investigated, the diethyl ethylphosphonate (DEP)-containing electrolyte resulted in cells that displayed the best low temperature performance of the group. Conductivity studies performed on the individual electrolyte solutions lead to the finding that some of the solutions containing FRA actually displayed higher ionic conductivity at lower temperatures compared with the baseline solution which did not contain any flame retardant additive, such as with triethyl phosphate. This finding suggests that the FRA can serve to lower the viscosity of the medium, in addition to imparting flame retardant properties. Thus, the high conductivity of the electrolyte, coupled with potentially minimal decomposition of the additive on the electrode surfaces, can lead to good low temperature performance.

This is illustrated in FIG. 9, in which the performance of cells containing electrolytes with various FRAs are shown when discharged at -20° C. using a C/16 discharge rate. FIG. 9 is an illustration of a graph showing discharge capacity at -20° C. (expressed as percent of room temperature capacity) of MCMB-LiNiCoO₂ cells containing electrolytes with flame retardant additives according to the invention. The x-axis shows percent of room temperature capacity (%) and the y-axis shows voltage (V). Of the FRA-containing electrolytes, the formulation containing diethyl ethylphosphonate delivered the best performance at low temperature, with over 85% of the room temperature capacity being delivered at -20° C.

Similar trends and excellent performance was obtained at -40° C., as shown in FIG. 10, in which the cells were dis-

charged using a C/16 discharge rate, following charging at room temperature. FIG. 10 is an illustration of a graph showing discharge capacity at -40° C. (expressed as percent of room temperature capacity) of MCMB-LiNiCoO₂ cells containing electrolytes with flame retardant additives according to the invention. The x-axis shows percent of room temperature capacity (%) and the y-axis shows voltage (V). As shown, the cell containing the electrolyte with the DEP additive again displayed the best performance at low temperature.

Cycle Life Performance. As mentioned previously, the general expectation is that the cycle life performance will be compromised with the addition of FRAs due to the possible reactivity with the electrode interfaces leading to impedance build-up and capacity loss. However, generally good cycle life performance was obtained in experimental cells, as illustrated in FIG. 11, with the cell containing the electrolyte with triphenyl phosphite additive delivering the best performance. FIG. 11 is an illustration of a graph showing cycle life performance of MCMB-LiNiCoO₂ cells containing electrolytes with flame retardant additives according to the invention. The x-axis shows cycle number and the y-axis shows discharge capacity in (mAh) (milli-Ampere-hours). To further improve the cycle life characteristics, the addition of SEI "film forming" additives is anticipated to impart enhanced stability to the system. It should also be noted that the cycle life performance is anticipated to be much better in aerospace quality lithium-ion cells, due to the fact that the data reflects experimental cells which are a flooded design, and not hermetically sealed.

Summary. The safety characteristics of Li-ion electrolytes have been further improved by the addition of flame retardant additives, such as tris(2,2,2-trifluoroethyl) phosphate, (b) tris(2,2,2-trifluoroethyl) phosphite, (c) triphenylphosphite, (d) diethyl ethylphosphonate, and (e) diethyl phenylphosphonate. A number of electrolytes based upon these additives have delivered good performance over a wide temperature range, good cycle life characteristics, and improved safety characteristics, namely reduced flammability. Of the additives investigated, the diethyl ethylphosphonate displayed the lowest irreversible capacity losses and high coulombic efficiency, suggesting that it displayed the least amount of electrochemical decomposition and did not participate in the electrode filming process to a great extent. Of the FRA-containing electrolytes studied, the formulation containing diethyl ethylphosphonate also delivered the best performance at low temperature, with over 85% of the room temperature capacity being delivered at the -20° C. using a C/16 discharge rate. With respect to cycle life performance, the formulation containing the triphenylphosphite electrolyte additive displayed the best performance. Further optimization of these electrolyte formulations is anticipated to yield improved performance. It is also anticipated that much improved performance will be demonstrated once these electrolyte solutions are incorporated into hermetically sealed large capacity, prototype cells, especially if effort is devoted to ensuring that all electrolyte components are highly pure.

Li-ion Electrolytes Containing Increased Concentrations of FRA

Description. A number of additional electrolyte formulations containing flame retardant additives were investigated and demonstrated in experimental MCMB carbon-LiNi_{0.8}Co_{0.2}O₂ cells. These electrolytes included: (1) formulations which incorporated greater concentrations of the flame retardant additive; (2) the use di-2,2,2-trifluoroethyl carbonate (DTFEC) as a co-solvent; (3) the use of 2,2,2-

trifluoroethyl methyl carbonate (TFEMC) as a co-solvent; (4) the use of mono-fluoroethylene carbonate (FEC) as a co-solvent and/or a replacement for ethylene carbonate in the electrolyte mixture; and, (5) the use of vinylene carbonate (VC) as an "SEI promoting" electrolyte additive, to build on the favorable results previously obtained. The use of higher concentrations of the flame retardant additive is known to reduce the flammability of the electrolyte solution, thus, a range was investigated (e.g., 5% to 20% by volume). The desired concentration of the flame retardant additive is the greatest amount tolerable without adversely affecting the performance in terms of reversibility, ability to operate over a wide temperature range, and the discharge rate capability. Fluorinated carbonates, such as mono-fluoroethylene carbonate (FEC), may be used as both a fluorinated ester-based co-solvent, as well as a flame retardant additive.

The electrolytes developed which embodied these approaches included: (1) Approaches based on increased FRA concentrations: (a) 1.0 M LiPF_6 in EC+EMC+TPP (20:70:10 v/v %); (b) 1.0 M LiPF_6 in EC+EMC+TPPi (20:70:10 v/v %); and (c) 1.0 M LiPF_6 in EC+EMC+TPPi (20:80:20 v/v %); (2) Approaches based on the incorporation of di-2,2,2-trifluoroethyl carbonate: (a) 1.0 M LiPF_6 in EC+EMC+DTFEC+TPP (20:50:20:10 v/v %); and (b) 1.0 M LiPF_6 in EC+EMC+DTFEC+TPP (20:30:40:10 v/v %); (3) Approaches based on the use of 2,2,2-trifluoroethyl methyl carbonate (TFEMC) and (4) mono-fluoroethylene carbonate (FEC): (a) 1.0 M LiPF_6 in EC+EMC+TFEMC+TPP (20:50:20:10 v/v %); (b) 1.0 M LiPF_6 in FEC+EMC+TFEMC+TPP (20:50:20:10 v/v %); and (c) 1.0 M LiPF_6 in FEC+EMC+TPP (20:70:10 v/v %); (5) Approaches based on the use of vinylene carbonate (VC): (a) 1.0 M LiPF_6 in EC+EMC+TPPi (20:75:5 v/v %)+1.5% VC; and (b) 1.0 M LiPF_6 FEC+EMC+TFEMC+TPP (20:50:20:10 v/v %)+1.5% VC; (where TPP=TPPa=triphenyl phosphate, TPPi=triphenyl phosphite, DTFEC=di-2,2,2-trifluoroethyl carbonate, TFEMC=2,2,2-trifluoroethyl methyl carbonate, FEC=mono-fluoroethylene carbonate, VC=vinylene carbonate, EC=ethylene carbonate, EMC=ethyl methyl carbonate).

A number of experimental lithium-ion cells, consisting of MCMB carbon anodes and $\text{LiNi}_{0.8}\text{Co}_{0.2}\text{O}_2$ cathodes, were fabricated to study the described technology. These cells served to verify and demonstrate the reversibility, low temperature performance, and electrochemical aspects of each electrode as determined from a number of electrochemical characterization techniques. The electrolytes selected for evaluation are listed above (electrolytes 1-5). FIG. 27 is an illustration of a table summary of formation characteristics of experimental MCMB- LiNiCoO_2 cells containing electrolytes with flame retardant additives subjected to formation cycling according to the invention. As shown in FIG. 27, in which the formation characteristics are shown for a number of cells containing electrolytes with triphenyl phosphate (TPP) as a flame retardant additive, all cells displayed good reversibility at room temperature and minimal reactivity during the formation cycling. The high coulombic efficiency and comparable irreversible capacity losses were indirectly related to the overall stability of the solutions and the electrode filming characteristics.

For comparison, two baseline electrolytes were investigated which do not contain any flame retardant additive or fluorinated solvents, namely 1.0M LiPF_6 in EC+DMC+DEC (1:1:1 v/v %) and 1.0M LiPF_6 in EC+EMC (20:80 v/v %). As shown in FIG. 27, notable features are that the FRA-containing electrolytes possess comparable coulombic efficiency on the first cycle (e.g., above 83%), with 1.0 M LiPF_6 in EC+EMC+DTFEC+TPP (20:50:20:10 v/v %) and 1.0 M

LiPF_6 in FEC+EMC+TPP (20:70:10 v/v %) displaying the highest values of 85.9% and 85.6%, respectively. Also of note is the fact that the FEC and TFEMC-containing carbonate blends displayed the highest coulombic efficiency by the fifth cycle, all exhibiting over 98% efficiency (compared to ~ (approximately) 97% shown by the baseline solutions), indicative of good stability. Furthermore, some of the solutions displayed much lower cumulative irreversible capacities compared to the baseline formulation, especially with the FEC containing electrolyte formulations which all displayed less than 104 mAh in contrast to the baseline solutions which exhibited greater than 126 mAh and 136 mAh, respectively.

Effect of Increased TPP Concentration and Incorporation of DTFEC on the Discharge Performance at Different Temperatures. When the cells containing electrolyte possessing 10% TPP with and without the incorporation of DTFEC described were evaluated at different rates and low temperatures, as shown in FIG. 28, reasonable low temperature performance was generally observed. FIG. 28 is an illustration of a table summary of discharge capacity at low temperature of a number of MCMB- LiNiCoO_2 cells containing electrolytes with flame retardant additives according to the invention. This finding was significant since the use of flame retardant additives was anticipated in decreasing the power capability and low temperature performance. As illustrated in FIG. 28, when 10% TPP was added to one of the baseline electrolytes, namely 1.0M LiPF_6 in EC+EMC (20:80 v/v %), minimal impact upon the low temperature discharge rate capability was observed, being essentially comparable at 0° C. over a range of discharge rates investigated. The performance of the cell containing 1.0 M LiPF_6 in EC+EMC+TPP (20:70:10 v/v %) at 0° C. is displayed in FIG. 29. FIG. 29 is an illustration of a graph showing discharge performance at 0° C. (expressed as percent of room temperature capacity) of a ~400 mAh MCMB- LiNiCoO_2 cell containing 1.0 M LiPF_6 in EC+EMC+TPP (20:70:10 v/v %) according to the invention. The x-axis shows percentage of room temperature capacity (%) and the y-axis shows cell voltage (V). When the performance of a cell containing an electrolyte possessing both 10% TPP and 20% DTFEC was evaluated under identical conditions, as shown in FIG. 30, somewhat decreased performance was observed, being more dramatic at higher rates and lower temperatures. FIG. 30 is an illustration of a graph showing discharge performance at 0° C. (expressed as percent of room temperature capacity) of a MCMB- LiNiCoO_2 cell containing 1.0 M LiPF_6 in EC+EMC+DTFEC+TPP (20:50:20:10 v/v %) according to the invention. The x-axis shows percentage of room temperature capacity (%) and the y-axis shows cell voltage (V). Thus, although this system was anticipated to have increased safety in contrast to an electrolyte with only TPP present, it was observed to have diminished performance capability at higher rates. When increased DTFEC was added to the system (e.g., 40% DTFEC by volume), this trend of decreased rate capability at lower temperature was further magnified.

In order to further elucidate the nature of the performance characteristics of the cells containing the different electrolytes, Tafel polarization measurements were performed on both the anodes and cathodes at different temperature to determine the lithium intercalation/de-intercalation kinetics. The measurements were conducted on the cells while they were in a full SOC (state of charge) (OCV (open circuit voltage) \Rightarrow 4.07V) on each electrode while utilizing a lithium reference electrode. In all of these Tafel plots, there were distinct charge-transfer controlled regimes, where the overpotential increased linearly with log (I). The effect of mass transfer seems to be relatively insignificant, such that kinetic

parameters, i.e., exchange current and transfer coefficients, can be derived. FIG. 31 is an illustration of a graph showing the Tafel polarization measurements of LiNiCoO₂ electrodes from MCMB-LiNiCoO₂ cells containing electrolytes with 10% TPP and with and without the addition of DTFEC according to the invention. The x-axis shows current (Amps) and the y-axis shows cathode potential (V versus Li⁺/Li). As illustrated in FIG. 31, in which the Tafel polarization measurements have been performed on the LiNiCoO₂ cathodes at room temperature, the cell containing the 1.0 M LiPF₆ in EC+EMC+TPP (20:70:10 v/v %) electrolyte displayed enhanced lithium kinetics (i.e., higher limiting current densities) compared to the baseline system that does not contain the flame retardant additive. When the cell containing both the 10% TPP and 20% DTFEC was evaluated comparable kinetics to the baseline was observed. In contrast, when 40% DTFEC was added to the electrolyte the resultant limiting current densities of the cathode were noticeably lower.

FIG. 32 is an illustration of a graph showing the Tafel polarization measurements of MCMB electrodes from MCMB-LiNiCoO₂ cells containing electrolytes with 10% TPP and with and without the addition of DTFEC according to the invention. The x-axis shows current (Amps) and the y-axis shows anode potential (V versus Li⁺/Li). When the Tafel polarization measurements were performed on the MCMB anodes at room temperatures, as shown in FIG. 32, both the incorporation of 10% TPP and DTFEC were observed to decrease the lithium de-intercalation kinetics compared to the baseline composition. These results suggested that these compounds react at the anode interface to produce solid electrolyte interface (SEI) layers that do not allow facile movement of lithium-ions at high rates. To mitigate this behavior "SEI promoting" additives can be added to the electrolyte to further improve the nature of the interface.

Effect of Increased TPP Concentration and Incorporation of TFEMC and FEC on the Discharge Performance at Different Temperatures. In addition to investigating trifluoroethyl butyrate and di-2,2,2-trifluoroethyl carbonate as co-solvents in multi-component mixtures, other fluorinated carbonates were incorporated into electrolyte formulations with the intent of further lower the flammability of the system, such as 2,2,2-trifluoroethyl methyl carbonate and mono-fluoroethylene carbonate. As mentioned previously, when electrolytes containing these co-solvents and 10% TPP were added to MCMB-LiNiCoO₂ cells, good reversibility, high coulombic efficiency and low irreversible capacities were observed. When the cells were evaluated at different rates and different temperatures, good performance was observed being comparable to the baseline formulations, as shown in FIG. 33. FIG. 33 is an illustration of a table summary of discharge capacity at low temperature of a number of MCMB-LiNiCoO₂ cells containing electrolytes with 10% TPP and TFEMC and/or FEC according to the invention.

FIG. 34 is an illustration of a graph showing discharge performance at 0° C. using a ~C/8 discharge rate to 2.0 V (volts) according to the invention. The x-axis shows percent of room temperature capacity (%) and the y-axis shows Voltage (V). As illustrated in FIG. 34, good performance was delivered from the cells containing 10% triphenyl phosphate and trifluoroethyl methyl carbonate and/or fluoroethylene carbonate when evaluated at a ~C/8 discharge rate (50 mA) at 0° C. In all cases, the cells were observed to deliver more capacity than the baseline system, with the cell containing the 1.0 M LiPF₆ in FEC+EMC+TFEMC+TPP (20:50:20:10 v/v %) electrolyte exhibiting the best performance.

Evaluation of FRA-Containing Electrolyte Formulations in Conjunction with High Voltage, High Capacity Cathode

Materials. In addition to evaluating the electrolytes in MCMB-LiNiCoO₂ cells, a number of the formulations were investigated in Li—Li(Li_{0.17}Ni_{0.25}Mn_{0.58})O₂ cells to determine their compatibility with high voltage, high capacity cathode materials. These systems are typically charged to a much higher potential (e.g., 4.80V) than the commonly used lithium nickel cobalt oxide materials.

FIG. 35 is an illustration of a table summary of the formation characteristics of a number of Li—Li(Li_{0.17}Ni_{0.25}Mn_{0.58})O₂ cells containing various electrolytes with TPP and TPPi flame retardant additives according to the invention. As illustrated in FIG. 35, Li—Li(Li_{0.17}Ni_{0.25}Mn_{0.58})O₂ cells containing a "baseline" electrolyte that does not contain any flame retardant additives delivered an average of 234 mAh/g reversible capacity when cycled to 4.80V vs Li+/Li using C/20 charge and discharge rates. When triphenyl phosphate (TPP) was incorporated into the electrolyte formulation very little loss in reversible capacity is observed, with the cells displaying an average of 228 and 221 mAh/g being displayed with 5% TPP and 10% TPP, respectively. Slightly lower reversible capacity was observed with the incorporation of 10% TPP and 20% DTFEC (e.g., 216 mAh/g). In contrast, the use of triphenyl phosphite (TPPi) was accompanied by a sharp decline in the performance, resulting in much lower reversible capacity and an increase in the irreversible capacity. Similar trends in the rate capability at room temperature were observed for the cells.

Demonstration of FRA-Containing Electrolytes in High Capacity Prototype Li-Ion Cells. To further assess the performance characteristics of candidate electrolyte formulations, a number of high capacity, hermetically sealed Li-ion cells were fabricated with one of the promising electrolyte solutions, namely 1.0M LiPF₆ in EC+EMC+TPP+VC (19.7/73.9/4.9/1.5 v/v %). Thus, a number of 7 Ah MCMB-LiNiCoO₂ Li-Ion cells were obtained from Yardney Technical Products, Inc. of Pawcatuck, Conn., that incorporated this electrolyte. After the formation process at the vendor, the cells were subjected to conditioning cycling at various temperatures (20° C., 0° C., and -20° C.) to determine the reversible capacity, the specific energy, and the impedance of the cells. After completing the initial characterization testing, a number of performance tests were performed on the cells, including evaluating: (a) the discharge rate performance at various temperatures, (b) the charge rate performance at various temperatures, and (c) determining the cycle life characteristics. FIG. 36 is an illustration of a table summary of discharge performance of a 7 Ah Li-ion cell containing 1.0M LiPF₆ in EC+EMC+TPP+VC (19.7/73.9/4.9/1.5 v/v %) according to the invention. As shown in FIG. 36, the discharge rate characterization testing was performed over a wide temperature range (20° to -60° C.) and a wide range of discharge rates (e.g., C/100 to 1.0 C). The cells were charged at room temperature and discharged to 2.0V (the initial measurement at C/5 and 20° C. was performed only down to 2.75V). As illustrated, the cells displayed good rate capability down to very low temperatures, being able to support moderate rates to temperatures as low as -50° C.

FIG. 37 is an illustration of a graph showing discharge rate performance at 20° C. of a 7 Ah Li-ion cell containing 1.0M LiPF₆ in EC+EMC+TPP+VC (19.7/73.9/4.9/1.5 v/v %) according to the invention. The x-axis shows discharge capacity (Ah) and the y-axis shows cell voltage (V). In FIG. 37, the discharge rate performance of the cell is displayed at 20° C., illustrated that superior performance was obtained in the prototype cells compared to the data generated with the experimental three electrode cells. This trend has also been

observed with a number of electrolyte formulations that have been scaled up to industrially manufactured Li-ion cells.

As mentioned above, charge rate characterization testing was also performed on the 7 Ah Li-ion cells, which consisted of evaluating the cell at different temperatures (20° C., 10° C., 0° C., and -10° C.) and different charge rates (ranging up to a C rate charge). Charging consisted of employing constant current to a constant potential of 4.10V, followed by taper current cut-off of C/100. It was observed that the cell could be effectively charged over the range of conditions investigated, without the evidence of lithium plating occurring which can be deleterious to cell health.

In addition to these tests, a 100% depth-of-discharge (DOD) test was implemented using C/5 charge and discharge rates (over a voltage range of 2.75V to 4.10V). FIG. 38 is an illustration of a graph showing 100% depth of discharge (DOD) cycling of 7 Ah Li-ion cell containing flame retardant additive containing electrolyte [1.0M LiPF₆ in EC+EMC+TPP+VC (19.7/73.9/4.9/1.5 v/v %)] and the baseline electrolyte [1.0M LiPF₆ in EC+DMC+DEC (1:1:1 v/v %)] according to the invention. The x-axis shows cycle number and the y-axis shows discharge capacity (% of initial capacity). As illustrated in FIG. 38, excellent cycle life performance has been obtained thus far, with approximately 400 cycles being completed while still retaining 95% of the initial capacity. The cycle life observed was actually superior to that obtained with a similar cell containing the baseline electrolyte formulation, namely 1.0M LiPF₆ in EC+DMC+DEC (1:1:1 v/v %).

It is expected that other FRAs in the same or similar classes of compounds as discussed above, can work in a similar fashion in the invention, i.e., phosphates, phosphites, and phosphonates.

Many modifications and other embodiments of the disclosure will come to mind to one skilled in the art to which this disclosure pertains having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. The embodiments described herein are meant to be illustrative and are not intended to be limiting. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

What is claimed is:

1. An electrolyte for use in a lithium-ion electrochemical cell, the electrolyte comprising a mixture of:

an ethylene carbonate (EC);

an ethyl methyl carbonate (EMC);

a fluorinated co-solvent selected from a group consisting of fluorinated carbonates, fluorinated ester co-solvents, and fluorinated ethers;

a flame retardant additive selected from a group consisting of fluorinated phosphate flame retardant additives, phosphite flame retardant additives, and phosphonate flame retardant additives; and,

a lithium salt

wherein the electrolyte comprises from about 5% to about 30% by volume flame retardant additive.

2. The electrolyte of claim 1 wherein the fluorinated co-solvent is selected from the group consisting of 2,2,2-trifluoroethyl butyrate (TFEB), di-2,2,2-trifluoroethyl carbonate (DTFEC), 2,2,2-trifluoroethyl methyl carbonate (TFEMC), mono-fluoroethylene carbonate (FEC), ethyl trifluoroacetate (ETFA), 2,2,2-trifluoroethyl acetate (TFEA), 2,2,2-trifluoroethyl propionate (TFEP), ethyl-2,2,2-trifluoroethyl carbonate (ETFEC), propyl-2,2,2-trifluoroethyl carbonate (PTFEC), methyl-2,2,2,2',2',2'-hexafluoro-i-propyl carbonate (MHFPC), ethyl-2,2,2,2',2',2'-hexafluoro-i-propyl carbonate (EHFPC), fluoropropylene carbonate (FPC), trifluoropropylene carbonate (TFPC), methyl nonafluorobutyl ether, 2,2,3,3,3-

pentafluoropropyl methyl ether, 1,1,3,3,3-pentafluoro-2-trifluoromethyl ether, 2,2,3,3-tetrafluoropropyl difluoromethyl ether, 1,1,2,3,3,3-hexafluoropropyl ethyl ether, and perfluoropolyether.

3. The electrolyte of claim 1 wherein the flame retardant additive is selected from the group consisting of bis(2,2,2-trifluoroethyl) methyl phosphonate (BTFEMP/TFMPo), triphenyl phosphite, tris(2,2,2-trifluoroethyl) phosphate, tris(2,2,2-trifluoroethyl) phosphite, diethyl ethylphosphonate, and diethyl phenylphosphonate.

4. The electrolyte of claim 1 wherein the lithium salt is selected from the group consisting of lithium hexafluorophosphate (LiPF₆), lithium tetrafluoroborate (LiBF₄), lithium bis(oxalate) borate (LiBOB), lithium hexafluoroarsenate (LiAsF₆), lithium perchlorate (LiClO₄), lithium trifluoromethanesulfonate (LiCF₃SO₃), lithium bistrifluoromethanesulfonate sulfonyl imide (LiN(SO₂CF₃)₂), and mixtures thereof.

5. The electrolyte of claim 1 wherein the electrolyte comprises from about 10% to about 60% by volume fluorinated co-solvent.

6. The electrolyte of claim 1 wherein the electrolyte comprises from about 5% to about 15% by volume flame retardant additive.

7. The electrolyte of claim 1 wherein the electrolyte comprises 1.0 M LiPF₆ in 20% by volume ethylene carbonate (EC) plus 55% by volume ethyl methyl carbonate (EMC) plus 20% by volume 2,2,2-trifluoroethyl butyrate (TFEB) plus 5% by volume triphenyl phosphite.

8. A lithium-ion electrochemical cell comprising:

an anode;

a cathode;

an electrolyte interspersed between the anode and the cathode, wherein the electrolyte comprises a mixture of:

an ethylene carbonate (EC);

an ethyl methyl carbonate (EMC);

a fluorinated co-solvent selected from the group consisting of 2,2,2-trifluoroethyl butyrate (TFEB), di-2,2,2-trifluoroethyl carbonate (DTFEC), 2,2,2-trifluoroethyl methyl carbonate (TFEMC), mono-fluoroethylene carbonate (FEC), ethyl trifluoroacetate (ETFA), 2,2,2-trifluoroethyl acetate (TFEA), 2,2,2-trifluoroethyl propionate (TFEP), ethyl-2,2,2-trifluoroethyl carbonate (ETFEC), propyl-2,2,2-trifluoroethyl carbonate (PTFEC), methyl-2,2,2,2',2',2'-hexafluoro-i-propyl carbonate (MHFPC), ethyl-2,2,2,2',2',2'-hexafluoro-i-propyl carbonate (EHFPC), fluoropropylene carbonate (FPC), trifluoropropylene carbonate (TFPC), methyl nonafluorobutyl ether, 2,2,3,3,3-pentafluoropropyl methyl ether, 1,1,3,3,3-pentafluoro-2-trifluoromethyl ether, 2,2,3,3-tetrafluoropropyl difluoromethyl ether, 1,1,2,3,3,3-hexafluoropropyl ethyl ether, and perfluoropolyether;

a flame retardant additive selected from the group consisting of triphenyl phosphate (TPhPh/TPP/TPPa), tributyl phosphate (TBuPh), triethyl phosphate (TEtPh), bis(2,2,2-trifluoroethyl) methyl phosphonate (TFMPo), triphenyl phosphite, tris(2,2,2-trifluoroethyl) phosphate, tris(2,2,2-trifluoroethyl) phosphite, diethyl ethylphosphonate, and diethyl phenylphosphonate; and,

a lithium salt,

wherein the electrochemical cell operates in a temperature range of from about -50 degrees Celsius to about 60 degrees Celsius and further wherein the electrolyte comprises from about 5% to about 30% by volume flame retardant additive.

23

9. A lithium-ion electrochemical cell comprising:
 an anode;
 a cathode;
 an electrolyte interspersed between the anode and the cathode, wherein the electrolyte comprises a mixture of: 5
 an ethylene carbonate (EC);
 an ethyl methyl carbonate (EMC);
 a fluorinated co-solvent selected from the group consisting 10
 of 2,2,2-trifluoroethyl butyrate (TFEB), di-2,2,2-trifluoroethyl carbonate (DTFEC), 2,2,2-trifluoroethyl methyl carbonate (TFEMC), mono-fluoroethylene carbonate (FEC), ethyl trifluoroacetate (ETFA), 2,2, 2-trifluoroethyl acetate (TFEA), 2,2,2-trifluoroethyl propionate (TFEP), ethyl-2,2,2-trifluoroethyl carbonate (ETFEC), propyl-2,2,2-trifluoroethyl carbonate (PTFEC), methyl-2,2,2,2',2'-hexafluoro-i-propyl 15
 carbonate (MHFPC), ethyl-2,2,2,2',2'-hexafluoro-i-propyl carbonate (EHFPC), fluoropropylene carbonate (FPC), trifluoropropylene carbonate (TFPC), methyl nonafluorobutyl ether, 2,2,3,3,3-pentafluoro- 20
 propyl methyl ether, 1,1,3,3,3-pentafluoro-2-trifluo-

24

romethyl ether, 2,2,3,3-tetrafluoropropyl difluoromethyl ether, 1,1,2,3,3,3-hexafluoropropyl ethyl ether, and perfluoropolyether;
 a flame retardant additive selected from the group consisting of triphenyl phosphate (TPhPh/TPP/TPPa), tributyl phosphate (TBuPh), triethyl phosphate (TEtPh), bis(2,2,2-trifluoroethyl) methyl phosphonate (TFMPo), triphenyl phosphite, tris(2,2,2-trifluoroethyl) phosphate, tris(2,2,2-trifluoroethyl) phosphite, diethyl ethylphosphonate, and diethyl phenylphosphonate; and,
 a lithium salt,
 wherein the electrochemical cell operates in a temperature range of from about -50 degrees Celsius to about 60 degrees Celsius and further wherein the electrolyte comprises 1.0 M LiPF₆ lithium salt in 20% by volume ethylene carbonate (EC) plus 55% by volume ethyl methyl carbonate (EMC) plus 20% by volume 2,2,2-trifluoroethyl butyrate (TFEB) plus 5% by volume triphenyl phosphate (TPhPh/TPP/TPPa).

* * * * *