



Affordable Development and Demonstration of a Small NTR Engine and Stage: A Preliminary NASA, DOE and Industry Assessment

S. K. Borowski and R. J. Sefcik (NASA GRC)

J. E. Fittje and D. R. McCurdy (Vantage Partners, LLC@GRC)

A. L. Qualls and B. G. Schnitzler (ORNL)

J. Werner (INL) and A. Weitzberg (DOE Consultant)


C. R. Joyner (Aerojet Rocketdyne)

216-977-7091, Stanley.K.Borowski@nasa.gov

presented at

Nuclear and Emerging Technologies for Space (NETS-2015)
Albuquerque, NM

Monday, Feb. 23, 2015





Formulation of Affordable and Sustainable NTP Development Strategy is Underway Involving NASA, DOE and Industry

- In FY' 11, Nuclear Thermal Propulsion (NTP) was identified as a key propulsion option under the Advanced In-Space Propulsion (AISP) component of NASA's Exploration Technology Development and Demonstration (ETDD) program
- A strategy was outlined by GRC and NASA HQ that included 2 key elements – “**Foundational Technology Development**” followed by specific “**Technology Demonstration**” projects
- The “Technology Demonstration” element proposed ground technology demonstration (GTD) testing in the early 2020's, followed by a flight technology demonstration (FTD) mission by ~2025
- In order to reduce development costs, the demonstration projects would focus on developing a small, low thrust (~7.5 – 16.5 klb_f) engine that utilizes a “common” fuel element design scalable to the higher thrust (~25 klb_f) engines used in NASA's Mars DRA 5.0 study (NASA-SP-2009-566)
- Besides reducing development costs and allowing utilization of existing, flight proven engine hardware (e.g., hydrogen pumps and nozzles), small, lower thrust ground and flight demonstration engines can validate the technology and offer improved capability – increased payloads and decreased transit times – valued for robotic science missions identified in NASA's Decadal Study
- NASA, NE-75, ORNL, INL, NNSA, & industry (NSTech, Aerojet Rocketdyne) are working together on formulating a strategy leading to the development of a small GTD engine in the early 2020' s followed by a FTD “lunar flyby” mission using a small NTP stage (SNTPS) around 2025
- The preliminary assessment provided here along with similar information provided by DOE/NNSA provides a strawman for continued refinement allowing an informed cost estimate to be made





Fiscal Year

2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027
------	------	------	------	------	------	------	------	------	------	------	------	------	------


Key Milestones




Notional

Foundational Technology Development


System Concepts & Requirements Definition / Planning / Engine Modeling & Analysis




NTP Technology Development and Demonstrations

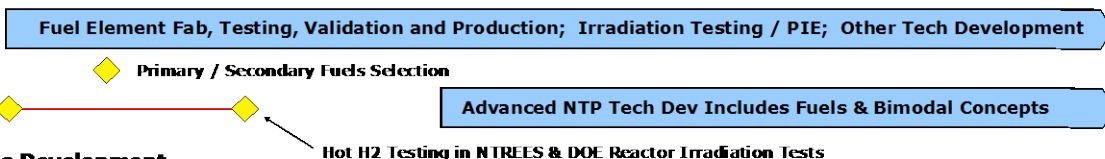


NTP Test Facilities Development



- Potential Demos / Mars Flights
- 2029-30 - Lunar/EM-L2 Flights
- 2031-33 - Mars Cargo Flights
- 2033-35 - Mars Crewed Flight!



Small NTP Stage for Lunar Flyby Mission



SOTA Reactor Core & Engine Modeling




NERVA "Composite" Fuel



"Cermet" Fuel




"Fuel-Rich" Engine




Fuel Element Irradiation Testing in ATR at INL

Ground & Flight Technology Demonstrators


Ground Test Facility (GTF)



Test Articles for Ground & Flight

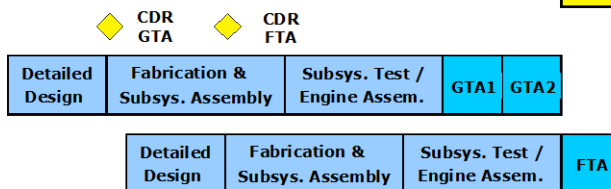

- GTD Ground Tech Demo
- GTA1 Ground Test Article 1
- GTA2 Ground Test Article 2
- FTA Flight Test Article
- FTD Flight Tech Demo



Affordable SAFE Ground Testing at the Nevada Test Site (NTS)






NTR Element Environmental Simulator (NTREES)

Glenn Research Center

at Lewis Field



"Heritage" Fuel Element Size Comparisons (Shown to Relative Scale)

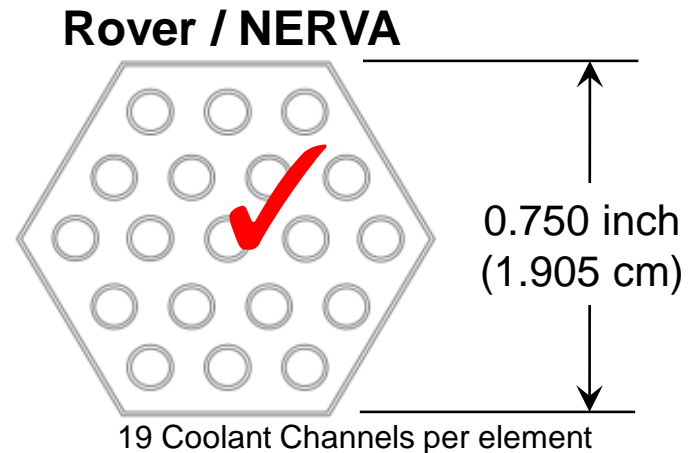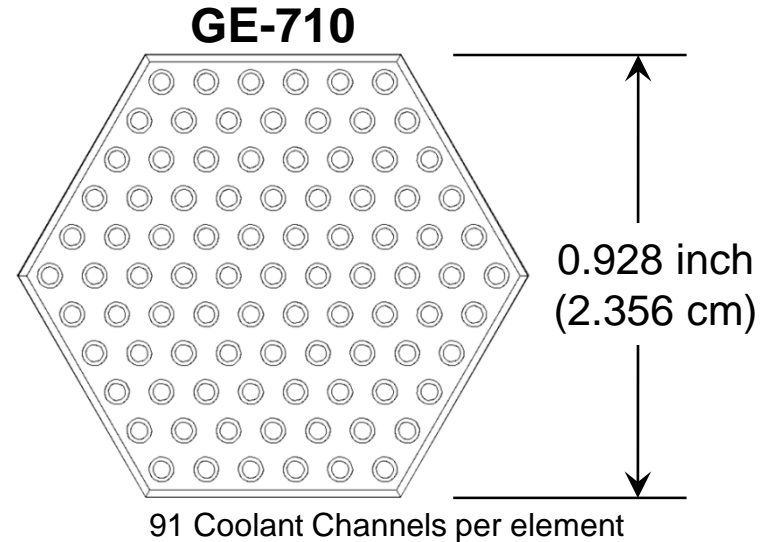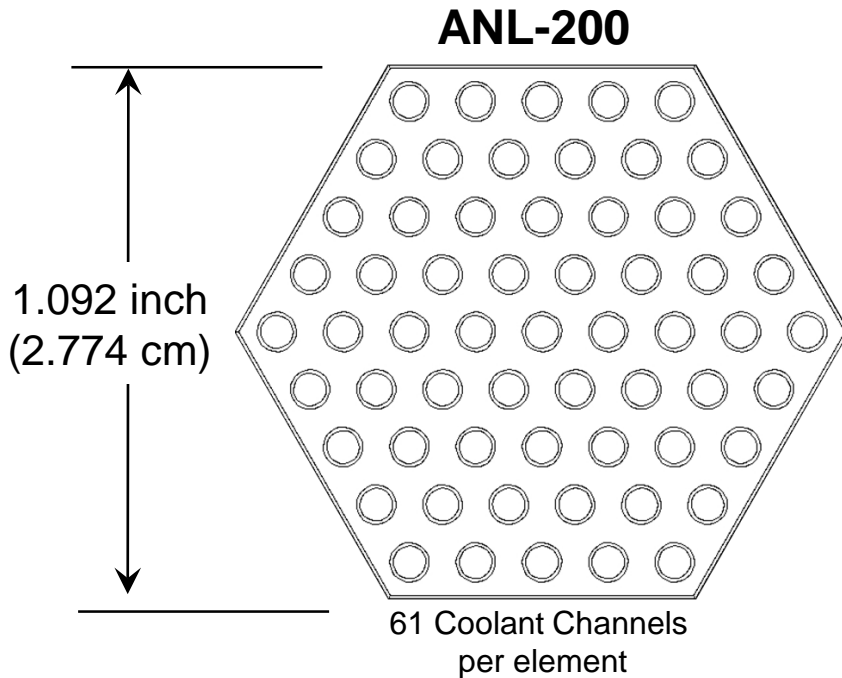

S. K. Borowski et al., "Point of Departure" Designs for Small & Full Size (25 klb_f) Composite & Cermet Fuel NTR Engines (March 20, 2013)





"Propelling Us to New Worlds"

Rover / NERVA* Program Summary (1959-1972)

The smallest engine tested, the 25 klb_f "Pewee" engine, is sufficient for human Mars missions when used in a clustered arrangement of 3 – 4 engines

- 20 NTR / reactors designed, built and tested at the Nevada Test Site – "All the requirements for a human mission to Mars were demonstrated"
- Engine sizes tested
 - 25, 50, 75 and 250 klb_f
- H₂ exit temperatures achieved
 - 2,350-2,550 K (in 25 klb_f Pewee)
- I_{sp} capability
 - 825-850 sec ("hot bleed cycle" tested on NERVA-XE)
 - 850-875 sec ("expander cycle" chosen for NERVA flight engine)
- Burn duration
 - ~ 62 min (50 klb_f NRX-A6 - single burn)
 - ~ 2 hrs (50 klb_f NRX-XE: 27 restarts / accumulated burn time)


* NERVA: Nuclear Engine for Rocket Vehicle Applications

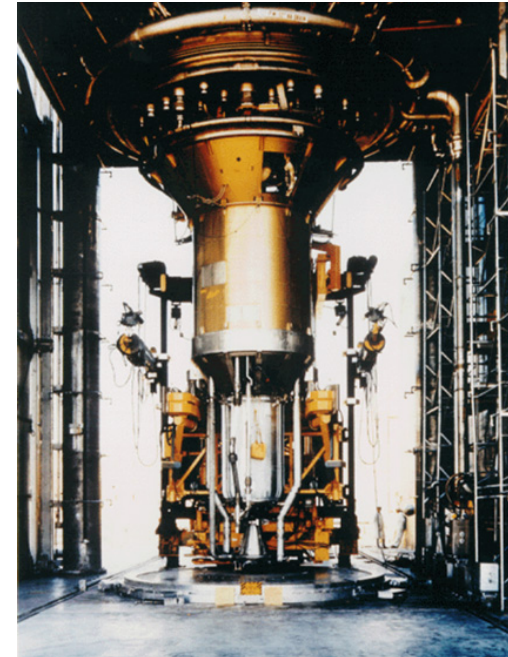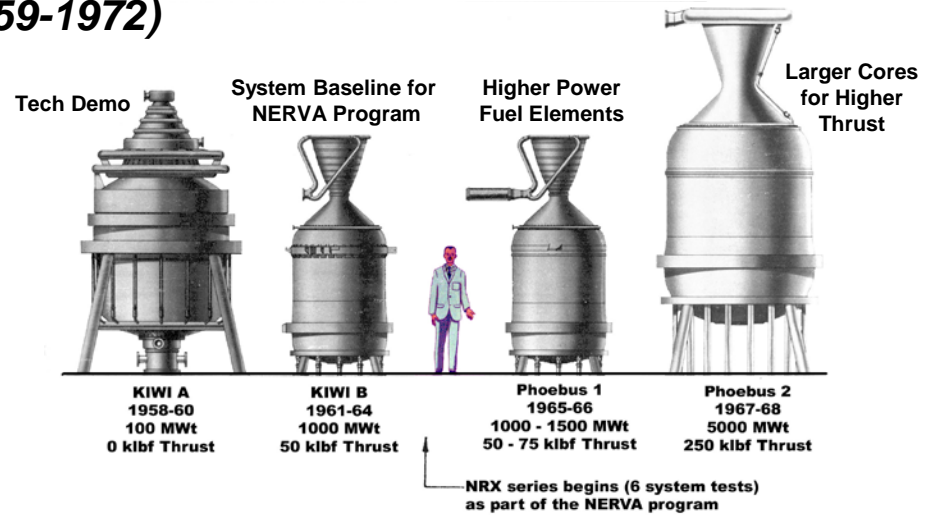

The NERVA Experimental Engine (XE) demonstrated 28 start-up / shut-down cycles during tests in 1969.



"Heritage" Rover / NERVA Reactor Core Fuel Element and Tie Tube Bundle Arrangement

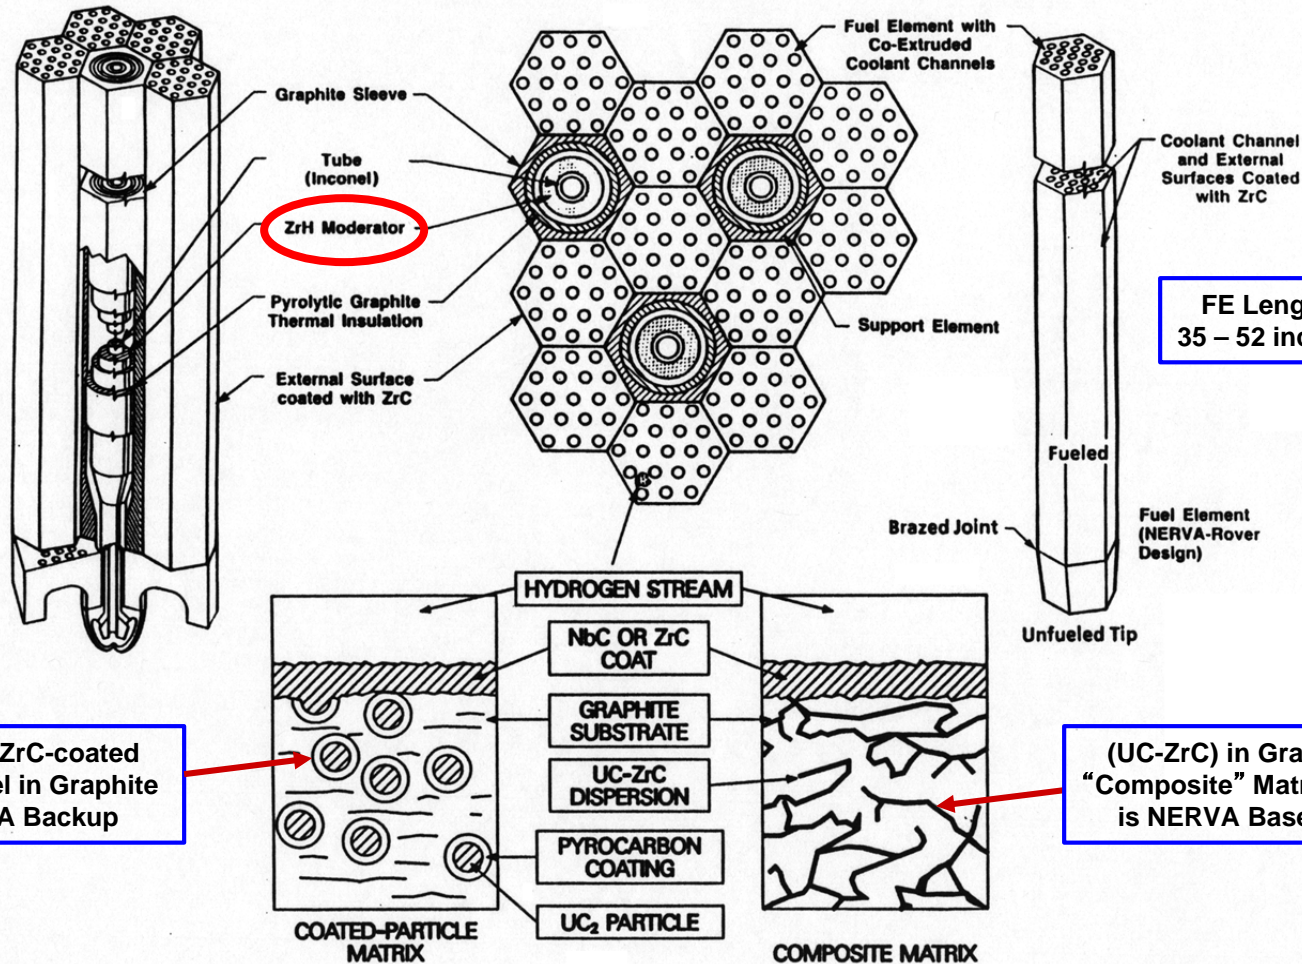



FE Length:
35 – 52 inches

Improved ZrC-coated Particle Fuel in Graphite is NERVA Backup

(UC-ZrC) in Graphite "Composite" Matrix Fuel is NERVA Baseline ✓


GRC / INL Integrated Neutronics, Multi-Physics & Engine Modeling Approach

Temperature Distribution Across FE and TT

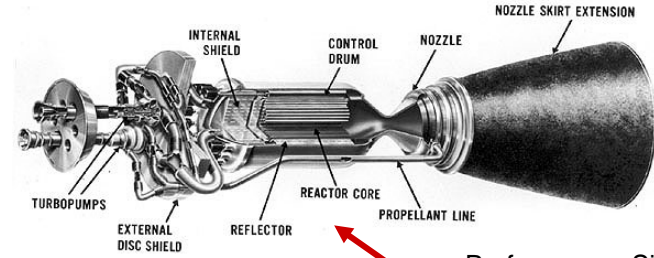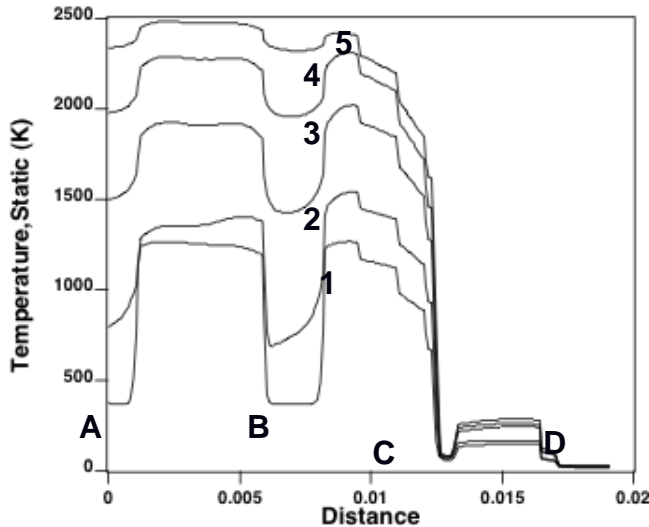


Performance, Size & Mass estimation


Temperature Distributions at Five Axial Stations
(Numbers Indicate Cold to Hot End Stations)

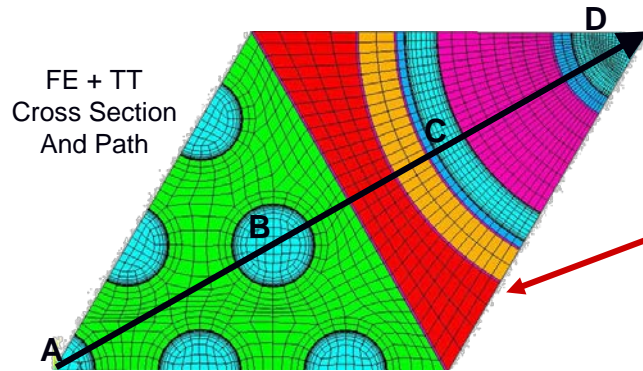


ANSYS Model

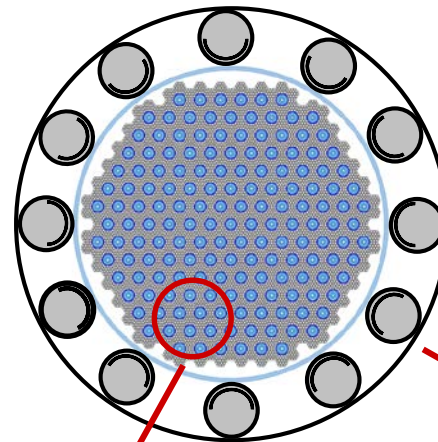

MCNP neutronics for core criticality, detailed energy deposition, and control worth

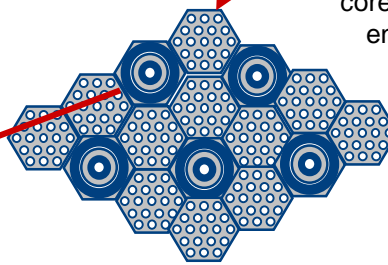


Fuel Element-to-Tie Tube ratio varies with engine thrust level

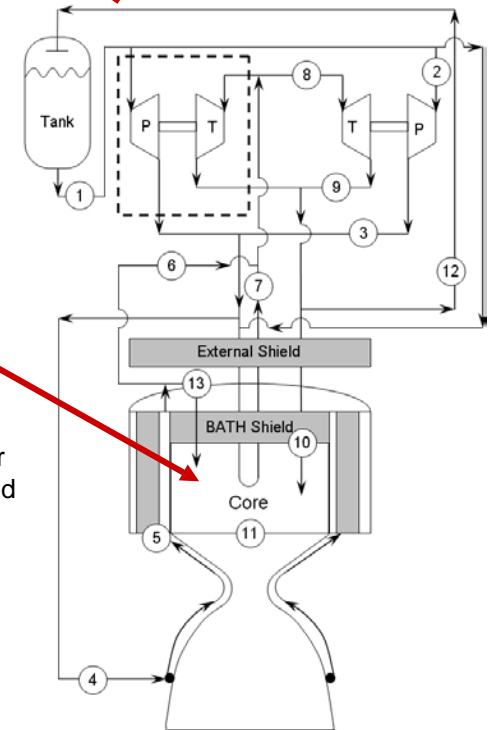

Nuclear Engine System Simulation (NESS) code has been upgraded to use MCNP-generated data


Fuel Element (FE) – Tie Tube (TT) Arrangements for NERVA-derived NTR Engines

“Sparse” FE – TT Pattern used for Large Engines

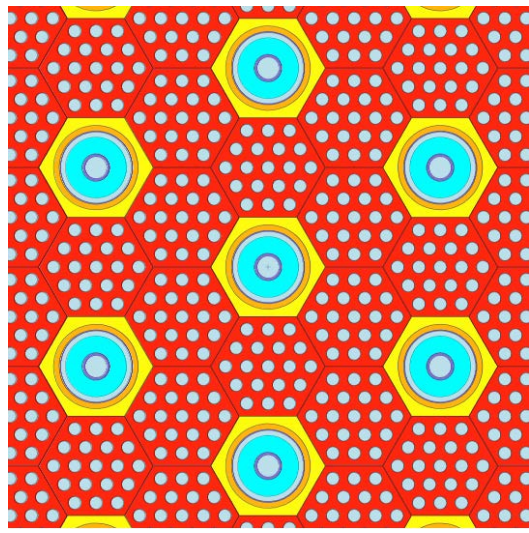


Each FE has 4 adjacent FEs and 2 adjacent TTs with a FE to TT ratio of ~3 to 1

“SNRE” FE – TT Pattern used in Small Nuclear Rocket Engine

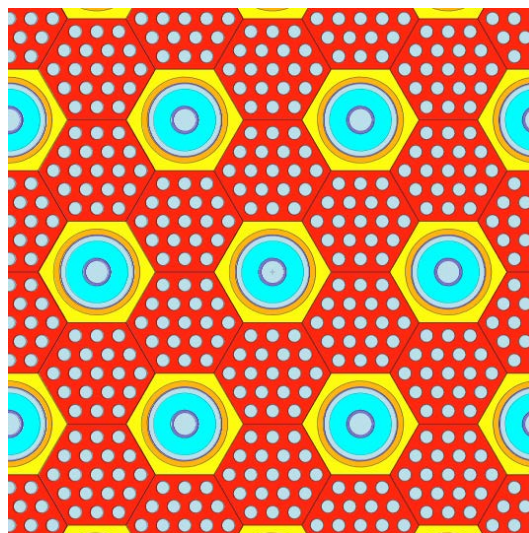

Each FE has 3 adjacent FEs and 3 adjacent TTs with a FE to TT ratio of ~2 to 1

“Dense” FE – Tie Tube Pattern used in Lower Thrust Engines

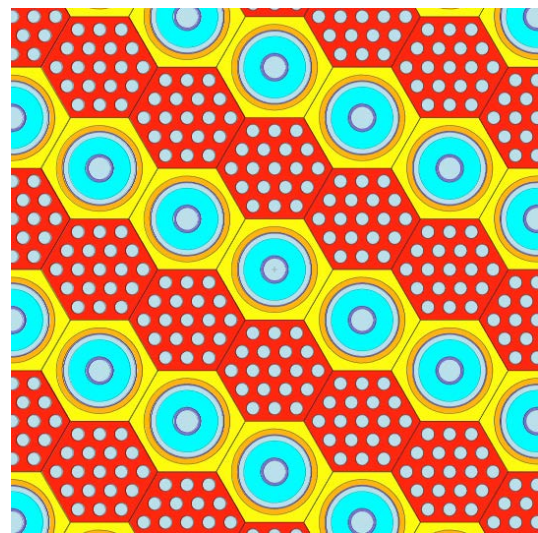


Each FE has 2 adjacent FEs and 4 adjacent TTs with a FE to TT ratio of ~1 to 1

NOTE: An important feature common to both the Sparse and SNRE FE – TT patterns is that each tie tube is surrounded by and provides mechanical support for 6 fuel elements

Ref: B. Schnitzler, et al., “Lower Thrust Engine Options Based on the Small Nuclear Rocket Engine Design”, AIAA-2011-5846




Cross Sections for Low to High Thrust Engines using Various Fuel Element – Tie Tube Patterns

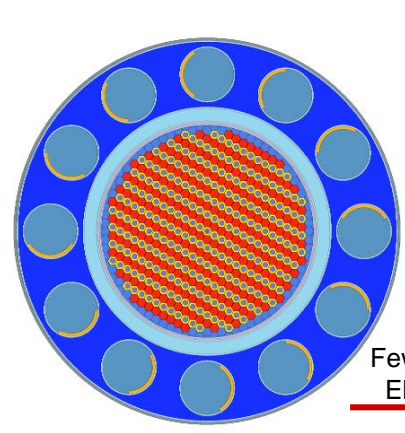


7.5-klb_f thrust engine
(F/W_{eng} ~1.91)

Fewer Fuel Elements →

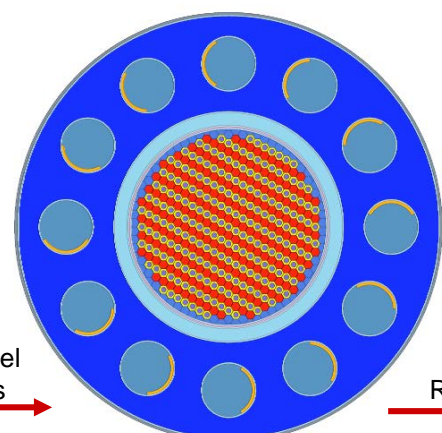


6.0-klb_f thrust engine
(F/W_{eng} ~1.43)


Thicker Reflectors →

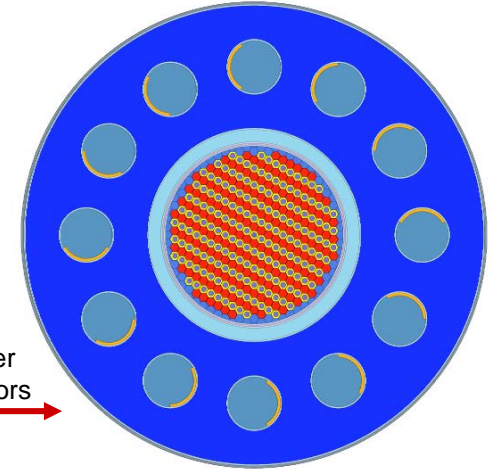


5.3-klb_f thrust engine (F/W_{eng} ~1.10)

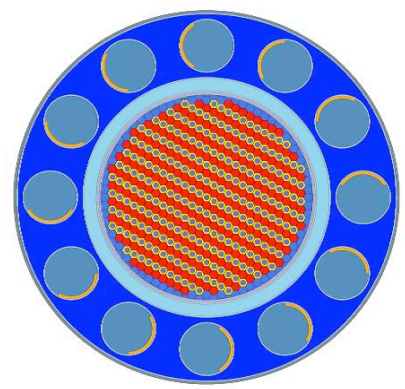

7.5-klb_f low thrust engine - Dense

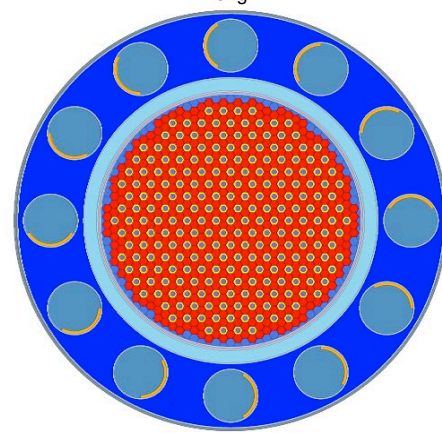

16.4-klb_f SNRE pattern

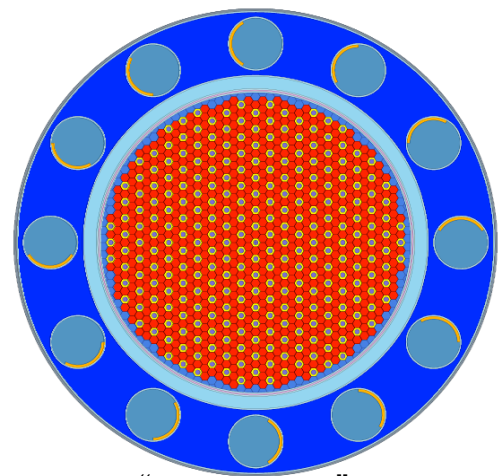


25-klb_f "Pewee-class" engine
(Radial growth / Sparse pattern)
(Same Scale for all Concepts)

Ref: B. Schnitzler, et al., "Lower Thrust Engine Options Based on the Small Nuclear Rocket Engine Design", AIAA-2011-5846

Development of a Common Scalable Fuel Element for Ground Testing and Flight Validation

- During the Rover program, a common fuel element / tie tube design was developed and used in the design of the 50 klbf Kiwi-B4E (1964), 75 klbf Phoebus-1B (1967), 250 klbf Phoebus-2A (June 1968), then back down to the 25 klbf Pewee engine (Nov-Dec 1968)
- NASA and DOE are evaluating a similar approach: design, build, ground then flight test a small engine using a common fuel element that is scalable to a larger 25 klbf thrust engine needed for human missions

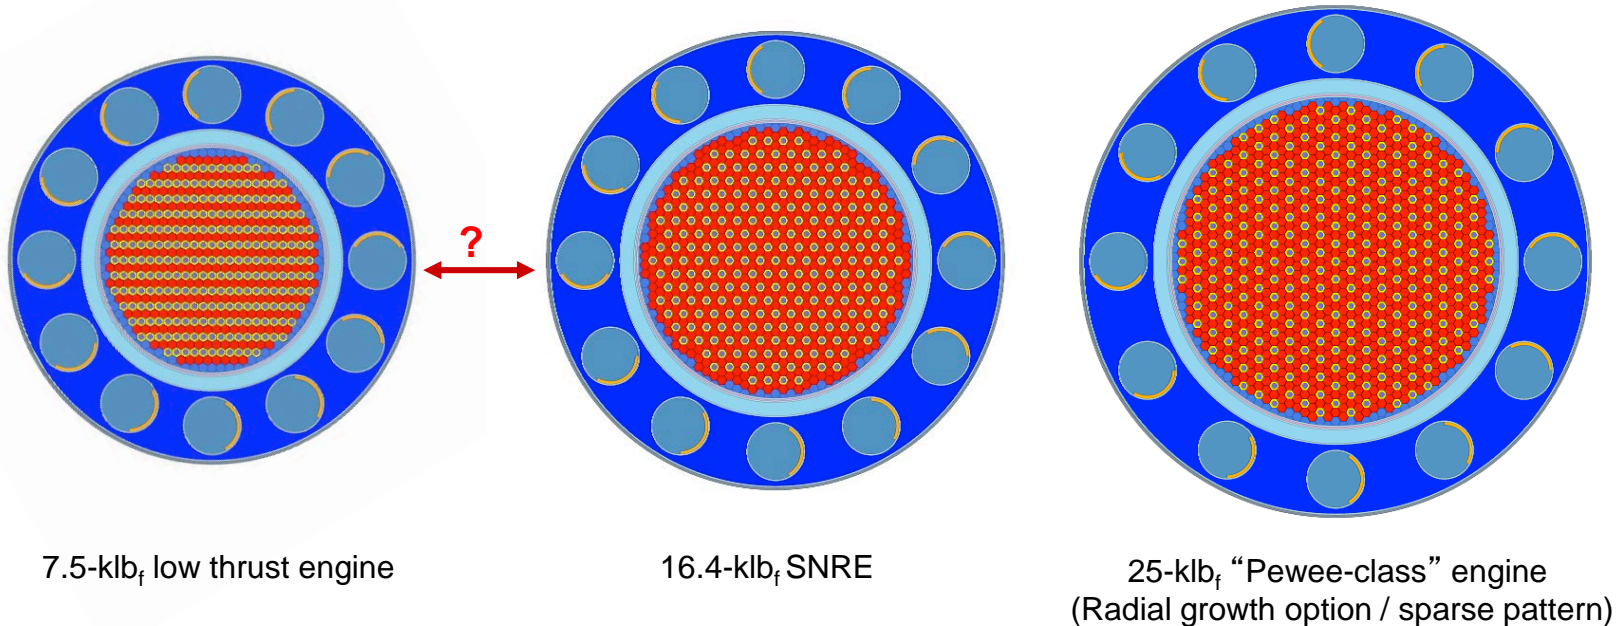

Ref: B. Schnitzler, et al., "Lower Thrust Engine Options Based on the Small Nuclear Rocket Engine Design", AIAA-2011-5846 paper presented at the 47th Joint Propulsion Conference, San Diego, CA



Performance Characteristics for Small & Full Size NERVA-derived Engine Designs – Composite Fuel



"Propelling Us to New Worlds"

Performance Characteristic	Small Citicality Limited Engine	SNRE		25 klb _f Axial Growth Option	
	★	Baseline	Baseline +	★ Nominal	Enhanced
Engine System					
Thrust (klb _f)	7.52	16.4	16.7	25.2	25.1
Chamber Inlet Temperature (K)	2739	2695	2733	2790	2940
Chamber Pressure (psia)	565	450	450	1000	1000
Nozzle Area Ratio (NAR)	300:1	100:1	300:1	300:1	300:1
Specific Impulse (s)	894	875	900	909	945
Engine Thrust-to-Weight	1.91	2.92	3.06	3.42	3.41
Approx. Engine Length* (m)	6.19	4.46	6.81	8.69	8.69
Length w/ Retracted Nozzle (m)	4.93	N/A	3.65	6.53	6.53
Reactor					
Active Fuel Length (cm)	89	89	89	132	132
Reflector Thickness (cm)	14.7	14.7	14.7	14.7	14.7
Pressure Vessel Diameter (cm)	87.7	98.5	98.5	98.5	98.5
Element Fuel/Tie Tube Pattern Type	Dense	SNRE	SNRE	SNRE	SNRE
Number of Fuel Elements	260	564	564	564	564
Number of Tie-Tube Elements	251	241	241	241	241
Fuel Fissile Loading (g U per cm ³)	0.60	0.60	0.60	0.25	0.25
Maximum Enrichment (wt% U-235)	93	93	93	93	93
Maximum Fuel Temperature (K)	2860	2860	2860	2860	3010
Margin to Fuel Melt (K)	40	40	40	190	40
U-235 Mass (kg)	27.5	59.6	59.6	36.8	36.8

*Varies with thrust level, chamber pressure, NAR and TPA/TVC layout

SOTA "Pewee-class" Engine Parameters





NTP Fuels and Engine Development Sequence

Nuclear & Non-Nuclear Testing

Fuel Specimens

- Fabrication and characterization
- High temperature testing including hot H₂ exposure and flow rates
- Irradiation testing at high temperature

Fuel Elements (Prototypic Cross-Section, Segments or Full Length)

- Fabrication and characterization
- High temperature testing including H₂ exposure and prototypic flow rates (e.g., NTREES)
- Irradiation testing

Reactor Design


- Neutronics and Physics
- Heat Transfer
- Dynamics
- Structures
- I&C

Engine Ground Test

- Prototypic fuel temperatures, hot H₂ flow rates, and operating times
- Engine test also serves as fuel qualification test

Addressing Ground Test Challenges

- Utilize the SAFE borehole concept
- Use temporary facilities & services at the ground test site
- Minimize engine size & number of tests to qualify for launch
- Maximize existing facilities (e.g., DAF) and capabilities for testing and PIE

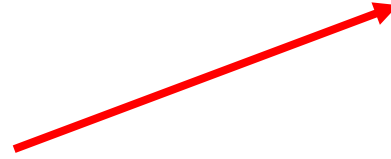




NERVA Graphite - Composite Fuel Elements with Protective ZrC Coating are Being Produced Now at ORNL for NCPS Project




"Propelling Us to New Worlds"




Above: 19 and 4-hole NERVA fuel element extrusion dies; Left: Graphite extruder with vent lines installed for DU capability



Above and Left: Extrusion samples using carbon-matrix/Ha blend 0.75" across flats, 0.125" coolant channels

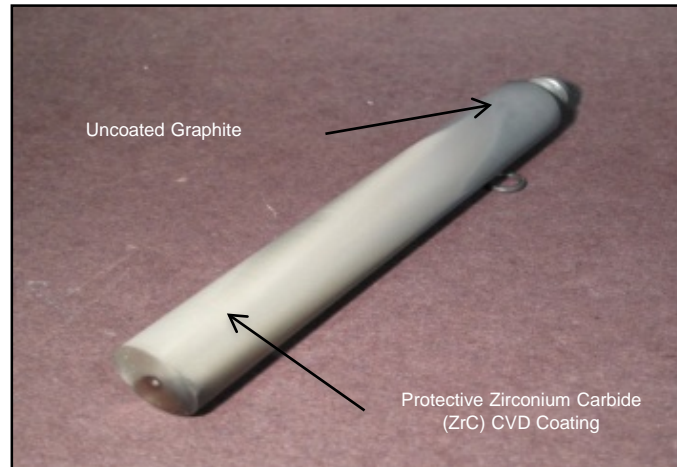

Above: Test Piece highlighting ZrC Coating Right: Coating primarily on external surface

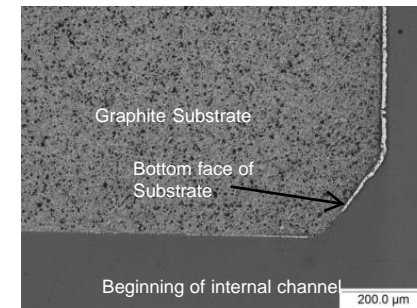


Right: Layoff base / Graphite insert



Glenn Research Center

at Lewis Field






NERVA Graphite - Composite Fuel Elements with Protective ZrC Coating are Being Produced Now at ORNL for NCPS Project

❑ Fuel Fabrication

- Layoff base/graphite insert has been fabricated and installed.
- New feed materials (graphite, resin, and ZrC) have been ordered.
- A new 19-hole extrusion die has been designed and fabricated.
- Modifications have been made to the 4-hole hexagonal die design to reduce friction during extrusion.
- 4-hole fuel elements will be used first to establish ZrC coating specs, then will transition to prototypic NERVA-type 19-hole element.
- Elements with depleted uranium (DU) will undergo rf-heating tests first before enriched uranium elements are tested in DOE reactor.

Extruder

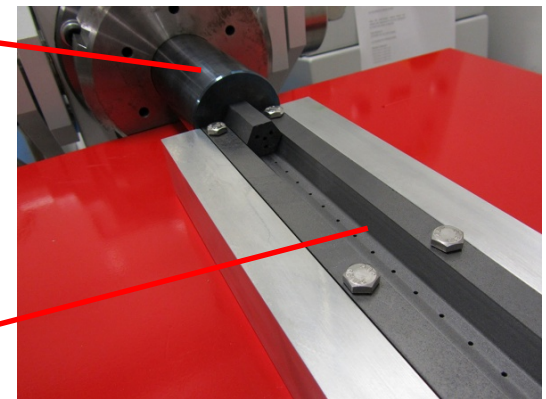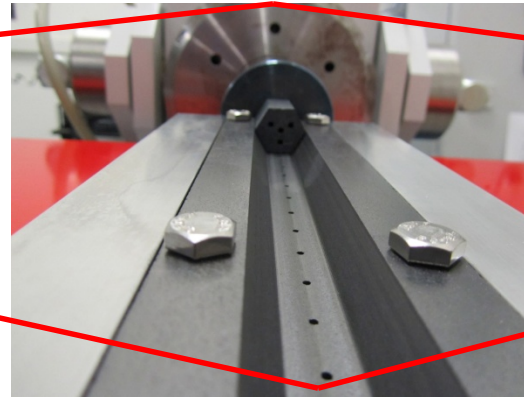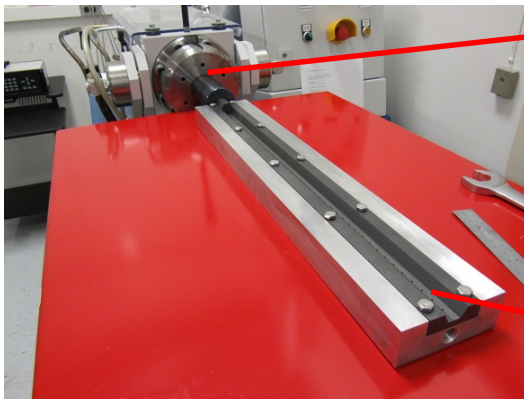

Layoff Table

Maximize Use of NTS, DAF and Existing Bore Holes / Tunnels

- Testing should be conducted at the Nevada Test Site (NTS) using SAFE (Subsurface Active Filtration of Exhaust) approach in existing boreholes or tunnels.
- NTS provides a large secure, safety zone for conducting NTR testing.
- The Device Assembly Facility (DAF) is located within the NTS and is available for pre-test staging (assembly and "0-power" critical testing) of engine's reactor system prior to transfer to the borehole or tunnel test location within the NTS.
- DAF is a collection of interconnected steel-reinforced concrete test cells. The entire complex is covered by compacted earth.
- DAF has multiple assembly / test cells; high bays have multi-ton crane capability. The assembly cells are designed to handle SNM.
- Options exist at NTS/NNSS to test in vertical boreholes or in tunnels.




Aerial View of the DAF at the Nevada Test Site




Non-Nuclear Subscale SAFE Bore Hole Feasibility Test

"Propelling Us to New Worlds"


Source: Dr. Steve Howe, CSNR

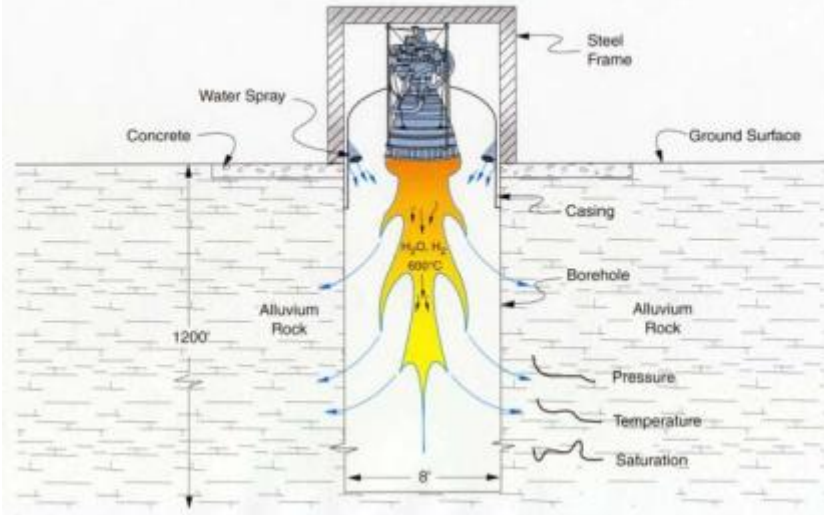

Schematic at left shows the idealized configuration of the testing concept including the mounting pad, containment, water spray, and dispersion profiles

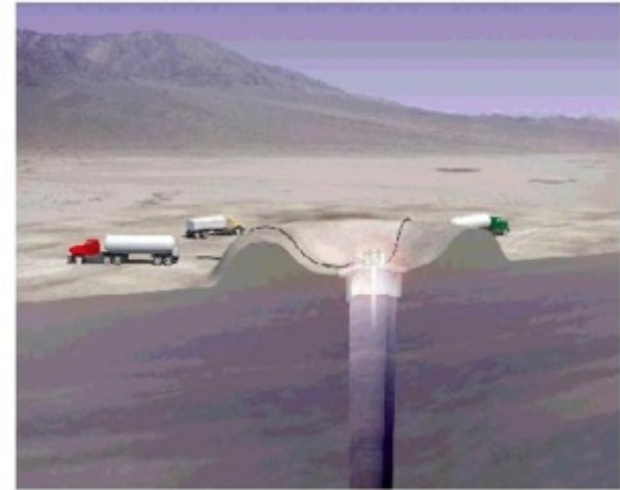

- Driving the hydrogen exhaust into the alluvium soil at the NTS allows capture of gases in a geology proven to contain heavy elements
- Fission products (if any) exhausted into the hole will be trapped into the soil strata at low concentrations $\sim 10^{-9}$ gms/cm³
- Use of the bore hole as an “in-situ” exhaust scrubber system potentially offers a low cost testing option for NTR
- Potential option is to have a suitably sized subscale validation test performed in the Phase II NTP project for $\sim 2 - 2.5$ M\$
- Component inventory and cost breakdown for subscale test being reevaluated by GRC and DOE/NSTech to identify potential savings

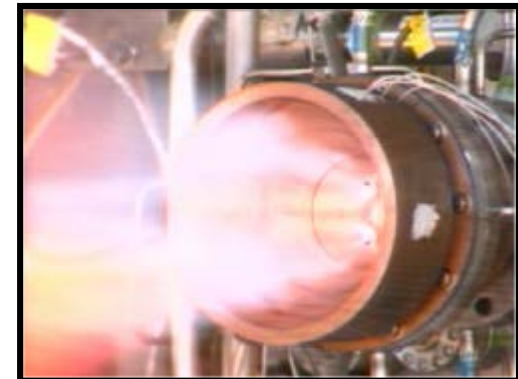

Aerojet-Rocketdyne’s ~ 2.1 -klbf “fuel rich” H/O engine is an attractive option for non-nuclear, subscale validation testing

SAFE: Subsurface Active Filtration of Exhaust

Glenn Research Center

at Lewis Field




Trailers Configured for Controls and Measurements Readily Moved to Other Test Areas



Other Nuclear Tests

- **Cold Critical Experiments**
 - Confirmation of critical configuration
 - Excess Reactivity
 - Static physics/safety parameters
- **Hot Critical Experiments**
 - Kinetics parameters
 - Safety coefficients (feedback)
- **Gamma/Neutron Exposures**
 - Irradiations to establish tolerance

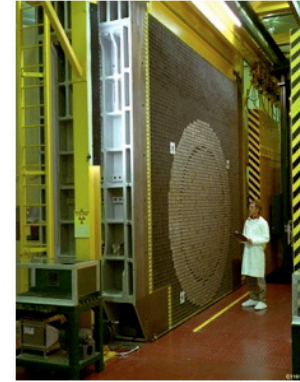




"Propelling Us to New Worlds"

Small 7.5 klb_f NTP Engine and Stage for 2025 Lunar Flyby FTD Mission



- IMLEO ~11.72 t
- F ~7.52 klb_f, I_{sp} ~894 s
- LH₂ mass ~4.70 t
- Stage dry mass ~6.77 t
- Burn time ~18.9 mins

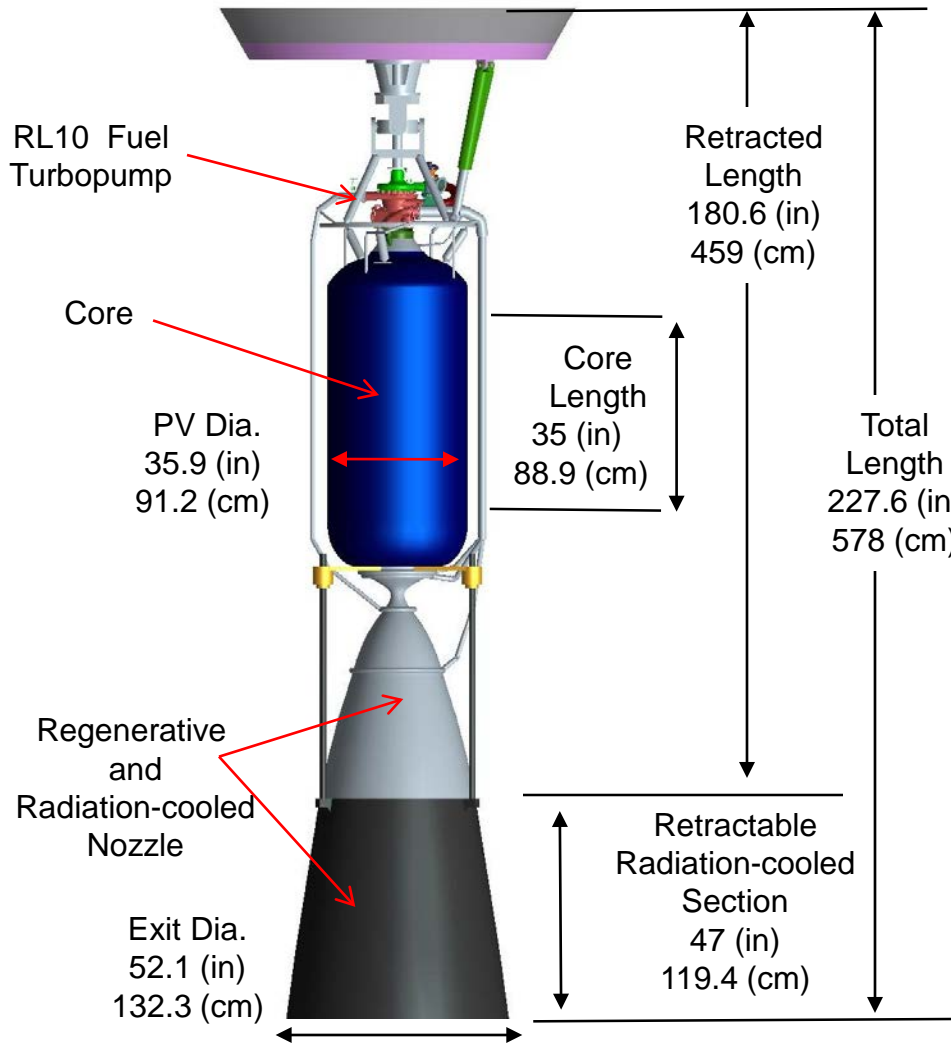

SNTPS FTD Launch on Delta 4 M (5,4)




DCSS delivers SNTPS to LEO

LO2/LH2 RL10B-2 Tvac 24,750-lbf



211 cm 6.9 ft

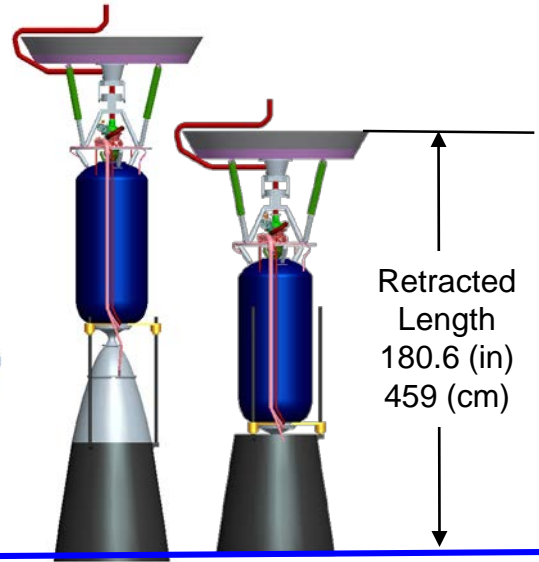



"Propelling Us to New Worlds"

2025 Small NTPS FTD Mission: "Single-Burn Lunar Flyby"

SNTPS FTD Launch on Delta 4 M (5,4)



- ELV launches Small NTPS (SNTPS) to LEO (407 km)
- 3 – Day LEO to Moon Transit
- Lunar Gravity Assist and disposal

DCSS delivers SNTPS to LEO



Earthrise Final Farewell Pictures



Single-Burn TLI sends SNTPS to the Moon

- IMLEO ~11.72 t
- F ~7.52 klb_f, I_{sp} ~894s, F/W_{eng} ~1.91
- LH₂ mass ~4.70 t
- Stage dry mass ~6.77 t
- PL ~0.25 t
- Burn time ~18.9 mins



Lunar Gravity Assist sends SNTPS into Deep Space






"Propelling Us to New Worlds"

Assumptions for “Sporty” SNTPS GTD & FTD Mission Schedule


- A 10-year period to a ground tested “qualification engine” by 2024 is conceivable but challenging and many things must line up / flow well.
- By necessity it would be a success-oriented high-risk activity requiring immediate and serious financial commitments to the following areas:
 - Management and acquisition approach is streamlined
 - Composite fuel is the baseline and fuel element (FE) production levels are scaled up prior to complete verification of all processing activities; Testing in boreholes or tunnels at the NTS
 - NEPA and launch safety analyses is initiated along with ID’ ed shipping and ATLO facility mods
- A single co-located nuclear “skunk works” type temporary facility is sited at the NTS near the site of the candidate borehole / tunnel. Its function would be reactor assembly, criticality testing, disassembly and PIE. Required equipment would be procured as “turn-key” for placement in the temporary facility. A single hot cell module (similar to that used by the UK at their Sellafield hot cell facility) would be used to disassemble and inspect the reactor and fuel elements after operation. After inspection, smaller groupings of parts could be shipped off-site for final disposal in existing shipping casks.
- The GTD program would focus on borehole testing of two units:
 - Engineering reactor and engine test article (90% fidelity) in 2023
 - Qualification engine (100% fidelity) in 2024 after qual-level testing (e.g., vibration) in 2023;
- The flight unit – identical to the qualification unit – would be launched in 2025





Notional NTP Ground & Flight Test Demonstration Milestone Schedule

"Propelling Us to New Worlds"

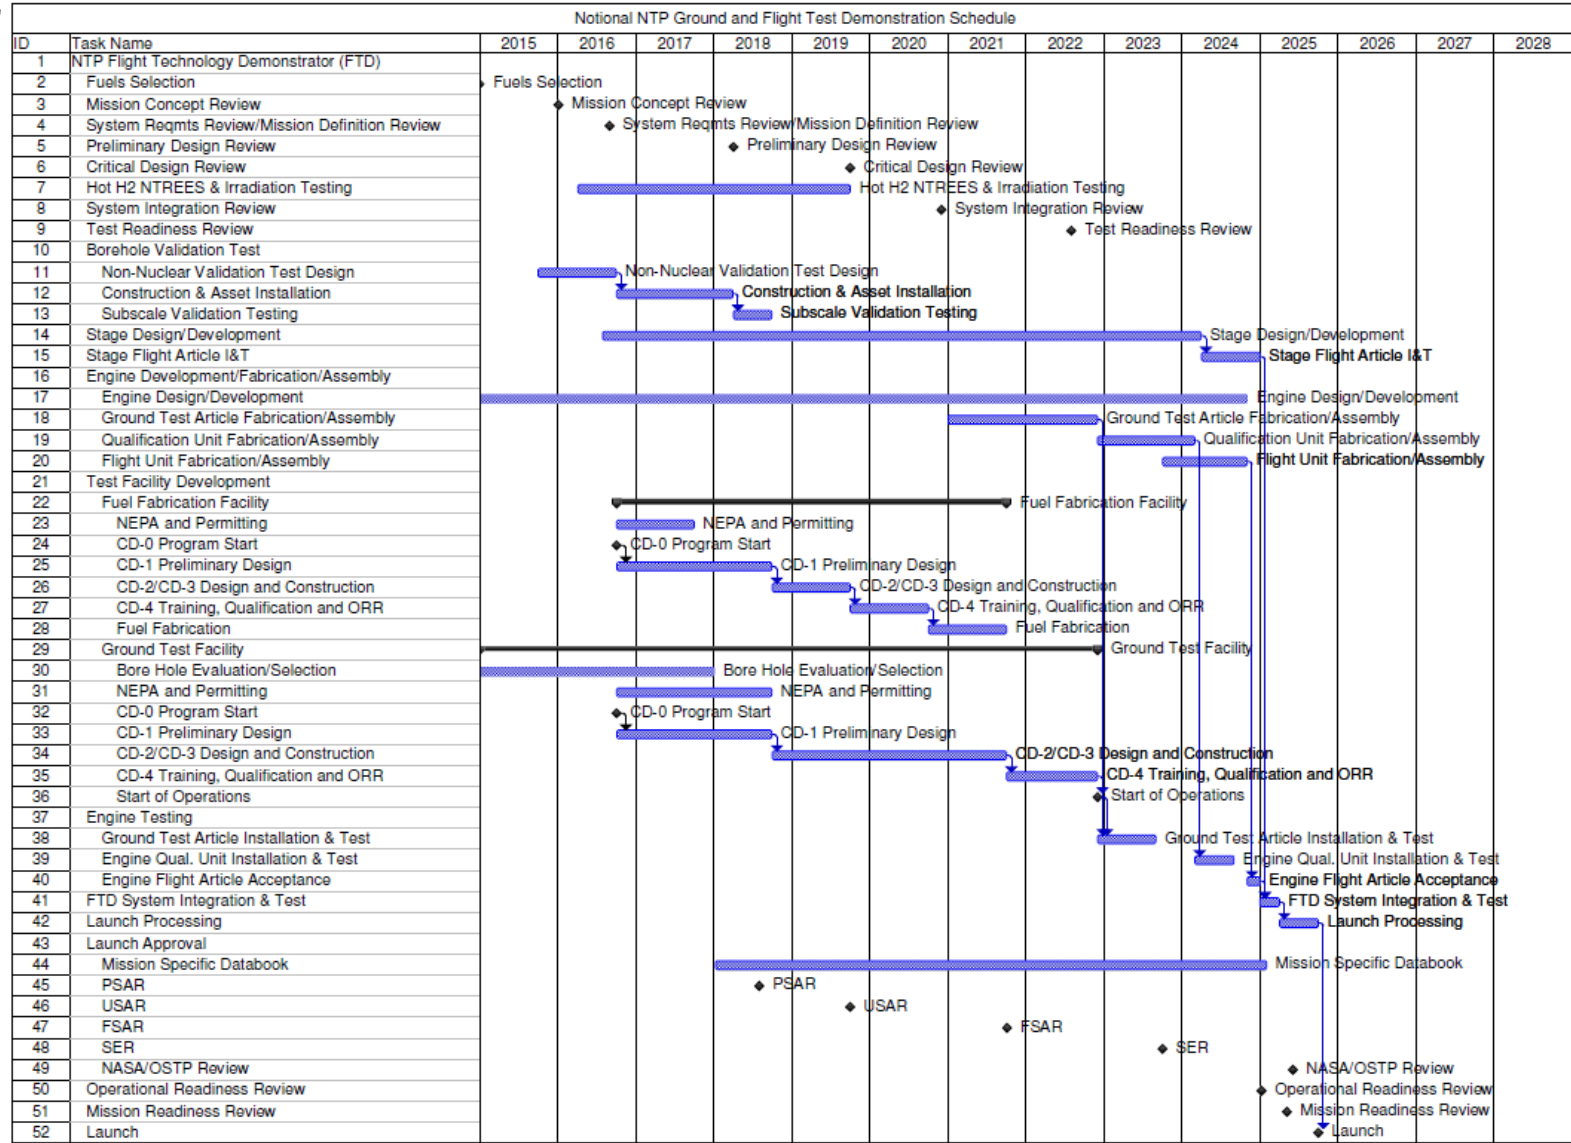

Summary and Conclusions

- NASA, NE-75, ORNL, INL, NNSA and industry (NSTech, Aerojet Rocketdyne) are working together on formulating a strategy leading to the development of a small GTD (~7.5 – 16.5 klb_f) NTR engine in the early 2020' s followed by a FTD mission using a small NTP stage (SNTPS) around 2025
- 10-years to a ground tested “qualification engine” by 2024 will require immediate, serious financial commitment along with a streamlined management and acquisition approach – *DOE*
- Graphite-based “composite fuel” is the baseline; an engine using this fuel type can be built sooner than one using another less established / less tested fuel at relevant conditions – *DOE*
- Testing should be conducted at the NTS using existing bore holes and/or tunnels; should maximize the use of existing facilities and consider temporary new facilities as required; new nuclear infrastructure is a long lead item – *DOE*
- If graphite-based fuel and borehole testing are not used, years of additional schedule and significant additional dollars will be required – *DOE*
- The FTD mission proposed by GRC is a single-burn “lunar flyby” mission to keep it simple and more affordable; small size engine and stage can also reduce development costs & allowing utilization of existing, flight proven engine hardware (e.g., hydrogen pumps and nozzles) – *Aerojet Rocketdyne*

If NASA wants to go somewhere soon they need to get moving now - DOE