

International Docking System Standard (IDSS) Interface Definition Document (IDD)

Revision E

October 2016

This page intentionally left blank.

REVISION AND HISTORY

REV.	DESCRIPTION	PUB. DATE
-	Initial Release	09-21-10
A	Revised, rearranged, and added text to nearly all sections of document. Revised & renumbered figures. Added requirements on mechanical soft capture, soft capture sensors, HCS seals, hook stiffness, separation system, electrical bonding, environments, and materials. Added Docking Performance section, and Appendix A.	05-13-11
B	Document Hard Capture System parameter values, figure updates, separation system force addition, editorial correction and updates.	11-15-12
C	Document the narrow ring Soft Capture System (SCS) geometric parameters and update applicable figures. Added Appendix B on Magnetic Soft Capture.	11-20-13
D	<p>Revision D is the first version of the document under NASA configuration control and released by NASA ERU. Revision D includes the following DCNs:</p> <p>DCN 001 DCN 002 DCN 003 DCN 004C DCN 005 DCN 006 DCN 007 DCN 008A DCN 009B DCN 010 DCN 011 DCN 012 DCN 013</p>	08-04-15
E	<p>Revision E includes the following DCNs:</p> <p>DCN 014 DCN 015A DCN 017 DCN 018 DCN 020 DCN 021</p>	XX-XX-XX

REVISION AND HISTORY

REV.	DESCRIPTION	PUB. DATE
	DCN 022 DCN 023 DCN 024 DCN 025 DCN 027A DCN 029 DCN 032 DCN 033 DCN 037 DCN 038 DCN 039	

This page intentionally left blank.

PREFACE

**INTERNATIONAL DOCKING SYSTEM STANDARD (IDSS)
INTERFACE DEFINITION DOCUMENT (IDD)**

This International Docking System Standard (IDSS) Interface Definition Document (IDD) establishes a standard docking interface to enable on-orbit crew rescue operations and joint collaborative endeavors utilizing different spacecraft.

Configuration control of this document is the responsibility of the International Space Station (ISS) Multilateral Control Board (MCB), which is comprised of the international partner members of the ISS. The National Aeronautics and Space Administration (NASA) will maintain the IDSS IDD under ISS Configuration Management. Any revisions to this document will be approved by the ISS MCB.

CONCURRENCE

William H. Gerstenmaier
Associate Administrator Human Exploration and
Operations
NASA

Date

Sergey Krikalev
Executive Director of Human Spaceflight of
State Corporation Roscosmos

Date

David Parker
Director of Human Spaceflight and Robotic Exploration
European Space Agency

Date

Gilles Leclerc
Director General, Space Exploration
Canadian Space Agency

Date

Ryuichiro Shirama
Deputy Director-General
Research and Development
Ministry of Education, Culture, Sports, Science, and
Technology

Date

This page intentionally left blank.

TABLE OF CONTENTS

PARAGRAPH		PAGE
1.0	INTRODUCTION	1-1
1.1	PURPOSE AND SCOPE	1-1
1.2	RESPONSIBILITY AND CHANGE AUTHORITY.....	1-2
2.0	DOCUMENTS	2-1
2.1	APPLICABLE DOCUMENTS.....	2-1
2.2	REFERENCE DOCUMENTS	2-1
3.0	INTERNATIONAL DOCKING SYSTEM STANDARD.....	3-1
3.1	GENERAL	3-1
3.1.1	SYSTEM DESCRIPTION	3-1
3.1.1.1	DOCKING.....	3-1
3.1.1.2	BERTHING	3-2
3.1.1.3	NOTES TO IDSS REQUIREMENTS	3-2
3.1.2	ENGINEERING UNITS OF MEASURE	3-3
3.2	MATING INTERFACE DEFINITION	3-3
3.2.1	TRANSFER PASSAGEWAY	3-6
3.2.2	SOFT CAPTURE SYSTEM	3-6
3.2.2.1	GUIDE PETAL SYSTEM.....	3-9
3.2.2.2	SOFT CAPTURE RING	3-12
3.2.2.3	(DELETED).....	3-12
3.2.2.4	MECHANICAL CAPTURE LATCH SYSTEM.....	3-13
3.2.2.5	SOFT CAPTURE SENSOR ACTUATION	3-16
3.2.2.6	SOFT CAPTURE SENSOR STRIKERS.....	3-16
3.2.3	HARD-CAPTURE SYSTEM	3-17
3.2.3.1	TUNNEL	3-20
3.2.3.2	SEAL	3-20
3.2.3.3	GUIDE PINS AND RECEPTACLES	3-20
3.2.3.4	HARD CAPTURE HOOKS	3-23
3.2.3.5	HARD CAPTURE STRIKER AREAS.....	3-29
3.2.3.6	SEPARATION SYSTEM - GENERAL	3-29
3.2.3.6.1	SEPARATION SYSTEM – FORCE LIMITS.....	3-29
3.2.3.6.2	SEPARATION SYSTEM – ENERGY.....	3-29
3.2.3.7	HCS COMPRESSIVE FORCE RESISTANCE DURING SCS RETRACTION.....	3-29
3.2.4	ELECTRICAL BONDING.....	3-30
3.2.4.1	SOFT CAPTURE SYSTEM	3-30
3.2.4.2	HARD CAPTURE SYSTEM.....	3-30
3.2.5	ENVIRONMENTS.....	3-30
3.2.6	MATERIALS AND SURFACE FINISHES	3-30
3.3	DOCKING PERFORMANCE	3-30
3.3.1	SOFT CAPTURE SYSTEM	3-31
3.3.1.1	INITIAL CONTACT CONDITIONS AND COORDINATE SYSTEMS	3-31
3.3.1.2	VEHICLE MASS PROPERTIES	3-35

IDSS IDD Revision E
October 2016

3.3.1.3	VEHICLE MOTION LIMITS	3-35
3.3.1.4	LOADS	3-35
3.3.2	HARD CAPTURE SYSTEM.....	3-36
3.3.2.1	MATED LOADS.....	3-36
3.4	RESOURCE TRANSFER UMBILICALS.....	3-38
3.4.1	POWER AND DATA TRANSFER UMBILICAL.....	3-39
3.4.1.1	FRAM CONNECTOR PART NUMBER	3-39
3.4.1.2	PDTU CONNECTOR OPERATION.....	3-39
3.4.1.3	CONNECTOR LOCAL COORDINATE SYSTEM	3-40
3.4.1.4	LOCATING REQUIREMENTS	3-41
3.4.1.4.1	LATERAL MOUNTING REQUIREMENTS	3-41
3.4.1.4.2	ROTATIONAL MOUNTING REQUIREMENTS	3-42
3.4.1.4.3	CENTERLINE ANGULAR MOUNTING REQUIREMENTS	3-42
3.4.1.4.4	ENGAGEMENT MECHANISM	3-43
3.4.1.4.4.1	RETRACTED POSITION	3-45
3.4.1.4.4.2	EXTENDED POSITION.....	3-45
3.4.1.5	COMPENSATION OF MISALIGNMENT	3-45
3.4.1.5.1	PLANAR MISALIGNMENT COMPLIANCE	3-45
3.4.1.5.1.1	LATERAL MISALIGNMENT COMPLIANCE.....	3-46
3.4.1.5.1.2	ROTATIONAL MISALIGNMENT COMPLIANCE	3-46
3.4.1.5.1.3	RE-CENTERING CAPABILITY.....	3-47
3.4.1.5.1.3.1	RE-CENTERING LATERAL POSITION	3-47
3.4.1.5.1.3.2	RE-CENTERING ROTATIONAL POSITION	3-47
3.4.1.5.1.3.3	RE-CENTERING FORCE.....	3-47
3.4.1.5.2	AXIAL MISALIGNMENT COMPLIANCE	3-47
3.4.1.5.2.1	AXIAL COMPLIANCE.....	3-47
3.4.1.5.2.2	MINIMUM RESISTIVE FORCE	3-48
3.4.1.5.2.3	MAXIMUM CONNECTOR INSERTION FORCE	3-48
3.4.1.5.2.4	ANGULAR COMPLIANCE.....	3-48
3.4.1.5.3	MISALIGNMENT KEEP OUT ZONE	3-49
3.4.1.6	STRUCTURAL REQUIREMENTS.....	3-49
3.4.1.6.1	STRUCTURAL STIFFNESS REQUIREMENT	3-49
3.4.1.6.2	STRUCTURAL LOAD REQUIREMENT	3-49
3.4.1.7	DATA BUS SWITCH STRIKER	3-50
3.4.1.7.1	PLANAR MOUNTING REQUIREMENTS.....	3-50
3.4.1.7.2	AXIAL MOUNTING REQUIREMENTS	3-50
3.4.1.7.3	AXIAL LOAD CAPABILITY	3-50
3.4.1.8	PDTU CONNECTOR SHELL CONFIGURATION	3-50
3.4.1.8.1	PDTU RECEPTACLE SHELL DIMENSIONS.....	3-51
3.4.1.8.2	PDTU PLUG SHELL DIMENSIONS	3-51
3.4.1.9	PDTU PIN CONFIGURATION.....	3-54
3.4.1.9.1	POWER TRANSFER PINS	3-58
3.4.1.9.2	DATA TRANSFER PINS	3-59
3.4.1.9.3	PDTU CONNECTOR MATED INDICATION.....	3-59

**IDSS IDD Revision E
October 2016**

3.4.2	WATER TRANSFER	3-59
3.4.3	FUEL TRANSFER	3-59
3.4.4	PRESSURANT TRANSFER.....	3-59
3.4.5	OXIDIZER TRANSFER	3-59
3.5	NAVIGATION AND ALIGNMENT AIDS.....	3-59
3.5.1	PERIMETER REFLECTOR TARGETS	3-63
3.5.1.1	PRT PLACEMENT	3-63
3.5.1.1.1	NUMBER OF PRT RETRO REFLECTORS	3-64
3.5.1.1.2	PRT HEMISPHERICAL RETRO REFLECTOR FIELD OF VIEW	3-64
3.5.1.1.3	PRT PLANAR RETRO REFLECTOR FIELD OF VIEW.....	3-65
3.5.1.1.4	PRT RETRO REFLECTOR FIELD OF VIEW ORIENTATION.....	3-66
3.5.1.1.5	PRT PLANAR RETRO REFLECTOR BORESIGHT ALIGNMENT	3-66
3.5.1.1.6	PRT REFLECTOR DEPTH.....	3-66
3.5.1.1.7	RETRO REFLECTOR ASSEMBLY RESTRICTIONS	3-66
3.5.1.2	REFLECTOR CHARACTERISTICS	3-67
3.5.1.2.1	TYPE OF RETRO REFLECTOR.....	3-67
3.5.1.2.2	DIAMETER OF CORNER CUBE.....	3-67
3.5.1.2.3	SURFACE FINISH.....	3-67
3.5.1.2.4	ENTRY/EXIT SURFACE REFLECTIVITY	3-68
3.5.1.2.5	ENTRY/EXIT SURFACE COATING	3-68
3.5.1.2.6	BEAM DEVIATION.....	3-68
3.5.1.2.7	SCRATCH-DIG.....	3-68
3.5.1.2.8	NUMBER OF RETRO REFLECTOR ELEMENTS FOR THE HEMISPHERICAL ASSEMBLY	3-68
3.5.1.2.9	RETRO REFLECTOR ELEMENT POSITIONING ON THE HEMISPHERICAL ASSEMBLY	3-68
3.5.1.2.10	NUMBER OF RETRO REFLECTOR ELEMENTS FOR THE PLANAR ASSEMBLY	3-68
3.5.2	CENTERLINE DOCKING TARGET.....	3-68
3.5.2.1	CDT COORDINATE SYSTEM.....	3-69
3.5.2.2	CENTERLINE VISUAL TARGET.....	3-71
3.5.2.2.1	CVT COMPONENTS.....	3-71
3.5.2.2.2	CDT BACKPLATE LATERAL POSITION MOUNTING TOLERANCE	3-71
3.5.2.2.3	CDT BACKPLATE ANGULAR MOUNTING TOLERANCE	3-72
3.5.2.2.4	CVT STANDOFF ELEMENT HEIGHT.....	3-72
3.5.2.2.5	CVT STANDOFF CROSS LOCATION	3-72
3.5.2.2.6	CVT STANDOFF PARALLELISM.....	3-73
3.5.2.2.7	CVT STANDOFF ELEMENT ROLL ALIGNMENT	3-73
3.5.2.2.8	CDT BACKPLATE DEPTH WITHIN VESTIBULE.....	3-73
3.5.2.2.9	CVT STANDOFF CROSS VISUAL MARKINGS.....	3-73
3.5.2.2.10	CVT VISUAL MARKINGS	3-74
3.5.2.2.11	CVT VISUAL MARKINGS SURFACE	3-76
3.5.2.2.12	CVT COLORS	3-76
3.5.2.2.13	SURFACE SPECULAR REFLECTANCE	3-76
3.5.2.3	CENTERLINE REFLECTOR TARGET.....	3-77
3.5.2.3.1	NUMBER OF CRT REFLECTIVE ELEMENTS	3-77

IDSS IDD Revision E
October 2016

3.5.2.3.2	CRT PATTERN	3-77
3.5.2.3.3	CRT REFLECTOR SIZING.....	3-78
3.5.2.3.4	CRT FIELD OF VIEW OBSCURATION.....	3-79
3.5.2.3.5	CRT REFLECTIVE ELEMENT MATERIAL PEAK LUMINANCE FACTOR	3-79
3.5.2.3.6	CRT REFLECTIVE ELEMENT HALF LUMINANCE ANGLE	3-79
3.5.2.3.7	CRT REFLECTIVE ELEMENT GAIN	3-80
3.5.2.3.8	CRT REFLECTIVE ELEMENT HALF POWER ANGLE	3-80
3.5.2.3.9	CRT REFLECTOR FILTERS.....	3-80
3.5.2.3.9.1	REFLECTIVE FILTER OPERATIONAL WAVELENGTH.....	3-80
3.5.2.3.9.2	MINIMUM RATE OF TRANSMISSION – OPERATIONAL WAVELENGTH	3-80
3.5.2.3.9.3	MAXIMUM RATE OF TRANSMISSION – NON-OPERATIONAL WAVELENGTH	3-80
3.5.2.3.10	KEY FEATURE MEASUREMENTS AFTER CDT INSTALLATION	3-80
3.5.3	PERIPHERAL DOCKING TARGET.....	3-81
3.5.3.1	PDT COORDINATE SYSTEM FRAMES.....	3-83
3.5.3.1.1	TARGET A PDT COORDINATE SYSTEM.....	3-84
3.5.3.1.2	TARGET B PDT COORDINATE SYSTEM.....	3-84
3.5.3.2	PERIPHERAL VISUAL TARGET.....	3-85
3.5.3.3	PERIPHERAL INFRARED TARGET	3-85
3.5.3.4	DEFINITION OF AN INDICATING SURFACE.....	3-85
3.5.3.5	SHORT RANGE REFLECTOR TARGET	3-85
3.5.3.6	PDT STANDOFF POST POSITIONAL MOUNTING TOLERANCE.....	3-85
3.5.3.7	PVT STANDOFF POSTS	3-86
3.5.3.7.1	PVT STANDOFF CIRCLE POSITIONAL MISALIGNMENT	3-86
3.5.3.7.2	PVT STANDOFF CIRCLE ANGULAR MISALIGNMENT.....	3-86
3.5.3.8	PVT VISUAL NAVIGATION FEATURES PLACEMENT	3-87
3.5.3.9	PVT CIRCULAR NAVIGATION FEATURE INDICATING SURFACE OUTER DIAMETER... ..	3-87
3.5.3.10	PVT CIRCULAR NAVIGATION FEATURE INDICATING SURFACE INNER DIAMETER	3-88
3.5.3.11	PVT CIRCULAR NAVIGATION FEATURE INNER DIAMETER CONCENTRICITY.....	3-88
3.5.3.12	PVT STANDOFF CIRCULAR NAVIGATION FEATURE THICKNESS.....	3-88
3.5.3.13	PVT CIRCULAR NAVIGATION FEATURE HEIGHT	3-89
3.5.3.14	PVT CIRCULAR NAVIGATION FEATURE TRANSITION.....	3-89
3.5.3.15	PVT CIRCULAR NAVIGATION FEATURE MAXIMUM RADIUS OF THE EDGES	3-89
3.5.3.16	PVT CROSSHAIR LENGTH.....	3-89
3.5.3.17	PVT CROSSHAIR WIDTH.....	3-89
3.5.3.18	PVT CROSSHAIR PLACEMENT	3-89
3.5.3.19	PVT CROSSHAIR ALIGNMENT	3-90
3.5.3.20	INDICATING SURFACE CONTINUITY	3-90
3.5.3.21	SHORT RANGE REFLECTOR TARGET REQUIREMENTS	3-90
3.5.3.21.1	NUMBER OF SRRT REFLECTIVE ELEMENTS	3-91
3.5.3.21.2	SRRT REFLECTIVE ELEMENT MATERIAL PEAK LUMINANCE FACTOR.....	3-91
3.5.3.21.3	SRRT REFLECTIVE ELEMENT HALF LUMINANCE ANGLE.....	3-91
3.5.3.21.4	SRRT REFLECTIVE ELEMENT GAIN	3-91
3.5.3.21.5	SRRT REFLECTIVE ELEMENT HALF POWER ANGLE	3-91
3.5.3.21.6	SRRT REFLECTIVE ELEMENT LOCATION.....	3-91

**IDSS IDD Revision E
October 2016**

3.5.3.21.7	SRRT FIELD OF VIEW OBSCURATION	3-91
3.5.3.21.8	SRRT REFLECTOR FILTERS	3-92
3.5.3.21.8.1	REFLECTIVE FILTER OPERATIONAL WAVELENGTH.....	3-92
3.5.3.21.8.2	MINIMUM RATE OF TRANSMISSION – OPERATIONAL WAVELENGTH	3-92
3.5.3.21.8.3	MAXIMUM RATE OF TRANSMISSION – NON-OPERATIONAL WAVELENGTH	3-92
3.5.3.21.9	SRRT REFLECTOR FILTERS MISALIGNMENT	3-93
3.5.3.21.10	SRRT OUT-OF-PLANE REFLECTIVE ELEMENT	3-93
3.5.3.22	PERIPHERAL INFRARED TARGET REQUIREMENTS	3-93
3.5.3.23	PDT STANDOFF ELEMENT HEIGHT.....	3-93
3.5.3.24	SURFACE COLORS	3-93
3.5.3.25	THERMAL EMITTANCE CONTRAST	3-93
3.5.3.26	SURFACE SPECULAR REFLECTANCE	3-93
3.5.3.27	KEY FEATURE MEASUREMENTS AFTER PDT INSTALLATION	3-94

APPENDIX

A	ACRONYMS, ABBREVIATIONS AND SYMBOLS DEFINITION	A-1
B	GLOSSARY <RESERVED>	B-1
C	OPEN WORK	C-1
D	LEGACY HARDWARE	D-1
E	TECHNICAL AND REFERENCE INFORMATION.....	E-1
F	BERTHING COMPATIBILITY REQUIREMENTS	F-1

TABLE

3.3.1.1-1	COORDINATE SYSTEMS USED FOR DOCKING MOTION DESCRIPTION.....	3-32
3.3.1.1-2	INITIAL CONTACT CONDITIONS.....	3-34
3.3.1.2-1	VEHICLE MASS PROPERTIES	3-35
3.3.1.3-1	VEHICLE MOTION LIMITS	3-35
3.3.1.4-1	SCS MAXIMUM INTERFACE LOADS	3-36
3.3.1.4-2	SCS MAXIMUM COMPONENT LOADS	3-36
3.3.2.1-1	HCS MAXIMUM MATED LOADS	3-37
3.3.2.1-2	HCS MATED LOAD SETS	3-37
3.4.1.1-1	FRAM CONNECTOR PART NUMBER	3-39
3.4.1.9-1	IDSS PDTU CONNECTOR PINOUTS (2 PAGES).....	3-54
3.4.1.9-2	IDSS PDTU CONNECTOR PINOUTS DEFINITIONS (2 PAGES)	3-55
3.4.1.9-3	UNASSIGNED IDSS PDTU CONNECTOR PINOUTS.....	3-56
3.5.2.3.2-1	CRT REFLECTIVE ELEMENTS LOCATION IN CDT COORDINATE SYSTEM	3-78
C-1	TO BE DETERMINED ITEMS	C-1
C-2	TO BE RESOLVED ISSUES	C-1
D.2.1-1	IDA PDTU CONNECTOR PINOUTS (2 PAGES)	D-5
D.2.1-2	IDA PDTU CONNECTOR PINOUTS DEFINITIONS (2 PAGES).....	D-6
D.2.1-3	UNASSIGNED AND UNPOPULATED IDA PDTU CONNECTOR PINOUTS.....	D-8
D.3.2-1	DIFFERENCES BETWEEN IDSS AND THE ISS CDT IMPLEMENTATION.....	D-15
D.3.2-2	CRT REFLECTIVE ELEMENT LOCATIONS IN THE CDT COORDINATE SYSTEM	D-16
E.2.0-1	CONTACT WIRE SIZE SUMMARY.....	E-4
F.2.1.2-1	IDSS-B SCS STIFFNESS WHILE IN BERTHING MODE	F-3

FIGURE

3.1.1.1-1	ANDROGYNOUS DOCKING INTERFACE – AXIAL VIEW	3-4
3.1.1.1-2	SECTION A-A (CROSS-SECTION THROUGH MID-PLANE OF TWO PETALS)	3-5
3.1.1.1-3	DETAILED SECTION OF PETAL	3-5
3.2-1	NAMING CONVENTION FOR HOOKS, GUIDE PINS, PETALS, LATCHES AND LATCH STRIKERS.....	3-6
3.2.2-1	CAPTURE SYSTEM OVERVIEW	3-7
3.2.2-2	STRIKER ZONE DETAIL	3-8
3.2.2.1-1	SCS INTERFACE – GUIDE PETAL SYSTEM OVERVIEW	3-9
3.2.2.1-2	PETAL DETAIL.....	3-10
3.2.2.1-3	PETAL PROFILE DETAIL	3-10
3.2.2.1-4	VIEW E-E - GUIDE PETAL OUTLINE	3-11
3.2.2.1-5	SCS INTERFACE – CAPTURE RING PROFILE.....	3-12
3.2.2.3-1	(DELETED).....	3-12
3.2.2.4-1	CROSS SECTIONAL VIEW THROUGH CENTERLINE OF MECHANICAL LATCH STRIKER.....	3-13
3.2.2.4-2	RADIAL VIEW	3-14
3.2.2.4-3	TOP VIEW	3-15
3.2.2.4-4	ACTIVE MECHANICAL SOFT CAPTURE LATCH INTERFACE.....	3-16
3.2.3-1	HCS INTERFACE - AXIAL VIEW	3-18
3.2.3-2	HCS INTERFACE - SENSOR STRIKER ZONE	3-19
3.2.3.3-1	GUIDE PIN	3-21
3.2.3.3-2	SECTION C-C	3-21
3.2.3.3-3	GUIDE PIN RECEPTACLE	3-22
3.2.3.3-4	SECTION D-D	3-22
3.2.3.4-1	READY TO DOCK CONFIGURATION	3-23
3.2.3.4-2	READY TO HOOK CONFIGURATION.....	3-24
3.2.3.4-3	FULLY MATED CONFIGURATION.....	3-24
3.2.3.4-4	HCS ACTIVE HOOK	3-25
3.2.3.4-5	PASSIVE HOOK.....	3-26
3.2.3.4-6	PASSIVE HOOK DETAIL VIEW	3-27
3.2.3.4-7	HCS ACTIVE HOOK MOTION ENVELOPE	3-27
3.2.3.4-8	LOAD RESPONSE OF ACTIVE HOOK MECHANISM.....	3-28
3.2.3.4-9	LOAD RESPONSE OF PASSIVE HOOK MECHANISM (INCLUDING SPRING WASHER STACK)	3-29
3.3.1.1-1	COORDINATE SYSTEMS OF DOCKING SYSTEM	3-33
3.3.1.1-2	COORDINATE SYSTEM OF DOCKING OBJECTS (ACTIVE AND PASSIVE).....	3-34
3.4-1	UMBILICAL CONNECTOR KEEP-OUT ZONES	3-38
3.4.1.2-1	PDTU ELECTRO-MECHANICAL ACTUATOR CONCEPT OF OPERATION	3-40
3.4.1.3-1	PDTU CONNECTOR LOCAL COORDINATE SYSTEM DEFINITION	3-41
3.4.1.4.1-1	STANDARD POWER/DATA TRANSFER UMBILICAL CONNECTORS	3-42
3.4.1.4.3-1	CENTERLINE ANGULAR MOUNTING REQUIREMENTS	3-43
3.4.1.4.4-1	PDTU MATING OPERATION WITH ACTIVE PLUG	3-44
3.4.1.4.4-2	PDTU MATING OPERATION WITH ACTIVE RECEPTACLE	3-45
3.4.1.5.1.1-1	PLUG LATERAL COMPLIANCE IN X DIRECTION.....	3-46

IDSS IDD Revision E
October 2016

3.4.1.5.1.1-2	PLUG LATERAL COMPLIANCE IN Y DIRECTION.....	3-46
3.4.1.5.1.2-1	PLUG ROTATIONAL COMPLIANCE ABOUT THE Z AXIS	3-47
3.4.1.5.2.1-1	RECEPTACLE AXIAL COMPLIANCE	3-48
3.4.1.5.2.4-1	RECEPTACLE ANGULAR COMPLIANCE ABOUT X AND Y-AXES	3-49
3.4.1.7.1-1	DATA BUS SWITCH STRIKER GEOMETRY.....	3-50
3.4.1.8.1-1	PDTU RECEPTACLE DIMENSIONS	3-52
3.4.1.8.2-1	PDTU PLUG DIMENSIONS	3-53
3.4.1.9-1	RECEPTACLE (SOCKETS) - FRONT FACE	3-57
3.4.1.9-2	PLUG (PINS) - FRONT FACE	3-58
3.5-1	IDSS TARGET SYSTEMS.....	3-60
3.5-2	AVAILABILITY OF NAVIGATION AND ALIGNMENT AIDS	3-61
3.5-3	REFLECTOR FIELDS OF VIEW	3-62
3.5.1.1-1	PRT LOCATIONS.....	3-64
3.5.1.1.2-1	PERIMETER HEMISPHERICAL REFLECTOR TARGET ASSEMBLY BORESIGHT	3-65
3.5.1.1.3-1	PERIMETER PLANAR REFLECTOR TARGET ASSEMBLY BORESIGHT	3-65
3.5.1.1.4-1	PERIMETER REFLECTOR TARGET ORIENTATION	3-66
3.5.1.1.7-1	RETRO REFLECTOR VISIBILITY RESTRICTIONS	3-67
3.5.2-1	CENTERLINE DOCKING TARGET.....	3-69
3.5.2.1-1	CDT COORDINATE SYSTEM.....	3-70
3.5.2.2.2-1	CVT ALIGNMENT	3-72
3.5.2.2.9-1	STANDOFF CROSS VISUAL MARKINGS DIMENSIONS	3-74
3.5.2.2.10-1	CDT BACKPLATE VISUAL ALIGNMENT MARKINGS	3-75
3.5.2.2.10-2	CDT BACKPLATE POLYGON MARKINGS	3-76
3.5.2.3.2-1	LOCATIONS OF CRT REFLECTIVE ELEMENTS	3-78
3.5.2.3.4-1	CRT UNOBSCURED FIELD OF VIEW DEFINITION	3-79
3.5.2.3.10-1	CDT KEY FEATURES.....	3-81
3.5.3-1	PERIPHERAL DOCKING TARGET.....	3-82
3.5.3-2	PERIPHERAL DOCKING TARGET COMPONENTS AND FUNCTIONS.....	3-83
3.5.3.1-1	PDT COORDINATE SYSTEM FRAMES.....	3-84
3.5.3.6-1	LOCATION OF THE TARGET A PDT STANDOFF POST WITH RESPECT TO THE PASSIVE SCS RING COORDINATE SYSTEM	3-86
3.5.3.8-1	CIRCULAR NAVIGATION FEATURE LOCATIONS IN PDT (A) AND PDT (B) COORDINATES	3-87
3.5.3.9-1	CIRCULAR NAVIGATION FEATURE DETAILS.....	3-88
3.5.3.16-1	PDT CROSSHAIR DETAILS	3-89
3.5.3.18-1	PVT CROSSHAIR LOCATIONS IN PDT (A) AND PDT (B) COORDINATES.....	3-90
3.5.3.21.7-1	SRRT UNOBSCURED FIELD OF VIEW DEFINITION.....	3-92
3.5.3.27-1	PDT KEY FEATURES	3-94
D.1.1-1	HCS COMPONENT STRIKER ZONE REFERENCE NUMBERS	D-2
D.1.1-2	APAS FEATURES WITHIN STRIKER ZONES	D-3
D.1.1-3	NDS FEATURES WITHIN STRIKER ZONES	D-4
D.3.1.2-1	LOCATION OF THE PDT STANDOFF POSTS WITH RESPECT TO THE PASSIVE SCS RING COORDINATE SYSTEM FOR IDA	D-9
D.3.1.3-1	CIRCULAR NAVIGATION FEATURE LOCATIONS FOR IDA	D-10
D.3.1.4-1	CIRCULAR NAVIGATION FEATURE DETAILS FOR IDA	D-11

IDSS IDD Revision E
October 2016

D.3.1.7-1	PVT CROSSHAIR LOCATIONS FOR IDA	D-12
D.3.1.9-1	PDT BACKPLATE ENVELOPE DIMENSIONS FOR IDA	D-13
D.3.2-1	GENERAL ISS PMA CDT DIFFERENCES	D-14
D.3.2-2	CDT BACKPLATE DEPTH WITHIN VESTIBULE ON ISS PMA2 & 3	D-15
E.1.0-1	CROSS SECTIONAL VIEW THROUGH CENTERLINE OF MAGNETIC LATCH STRIKER.	E-2
E.1.0-2	RADIAL VIEW	E-3
E.2.0-1	CONTACT WIRE SIZE PARAMETERS	E-4

1.0 INTRODUCTION

This International Docking System Standard (IDSS) Interface Definition Document (IDD) is the result of a collaboration by the International Space Station membership to establish a standard docking interface to enable on-orbit crew rescue operations and joint collaborative endeavors utilizing different spacecraft.

This IDSS IDD details the physical geometric mating interface and design loads requirements. The physical geometric interface requirements must be strictly followed to ensure physical spacecraft mating compatibility. This includes both defined components and areas that are void of components. The IDD also identifies common design parameters as identified in section 3.0, e.g., docking initial conditions and vehicle mass properties. This information represents a recommended set of design values enveloping a broad set of design reference missions and conditions, which if accommodated in the docking system design, increases the probability of successful docking between different spacecraft.

This IDD does not address operational procedures or off-nominal situations, nor does it dictate implementation or design features behind the mating interface. It is the responsibility of the spacecraft developer to perform all hardware verification and validation, and to perform final docking analyses to ensure the needed docking performance and to develop the final certification loads for their application.

While there are many other critical requirements needed in the development of a docking system such as fault tolerance, reliability, and environments (e.g. vibration, etc.), it is not the intent of the IDSS IDD to mandate all of these requirements; these requirements must be addressed as part of the specific developer's unique program, spacecraft and mission needs. This approach allows designers the flexibility to design and build docking mechanisms to their unique program needs and requirements.

1.1 PURPOSE AND SCOPE

The purpose of the IDSS IDD is to provide basic common design parameters to allow developers to independently design compatible docking systems. The IDSS is intended for uses ranging from crewed to autonomous space vehicles, and from Low Earth Orbit (LEO) to deep-space exploration missions.

This document defines docking system interface definitions supporting the following missions:

- A. International Space Station (ISS) visitation
- B. Exploration missions beyond LEO
- C. Crew rescue
- D. International cooperative missions

Vehicles using this interface may include light vehicles in the range of 5-8 tonnes, and medium vehicles in the range of 8-25 tonnes. These vehicles will dock to each other, to large space complexes in the range of 100-375 tonnes, and to large earth departure stages in the range of 33-170 tonnes. The figures and tables in this document depict the

IDSS IDD Revision E
October 2016

features of the docking interface that are standardized. Some docking features (e.g. sensors, separation systems) are not standardized and are left to the discretion of docking system designers, though they must follow the designated striker zone requirements. Resource transfer umbilicals and docking navigation aids (targets) are also included in this standard.

1.2 RESPONSIBILITY AND CHANGE AUTHORITY

Any proposed changes to the IDSS by the participating partners of this agreement shall be brought forward to the IDSS committee for review.

Configuration control of this document is the responsibility of the International Space Station (ISS) Multilateral Control Board (MCB), which is comprised of the international partner members of the ISS. The National Aeronautics and Space Administration (NASA) will maintain the IDSS IDD under ISS Configuration Management, until an appropriate International Standards Body is identified and mutually agreed.

2.0 DOCUMENTS

2.1 APPLICABLE DOCUMENTS

The following documents include specifications, models, standards, guidelines, handbooks, and other special publications. The documents listed in this paragraph are applicable to the extent specified herein.

SSQ 22680 (current issue)	Connectors, Rectangular, (ORU), Space Quality, General Specification For
------------------------------	--

2.2 REFERENCE DOCUMENTS

The following documents contain supplemental information to guide the user in the application of this document. These reference documents may or may not be specifically cited within the text of this document.

AMS 2700	Passivation of Corrosion Resistant Steels
AMS-4027	Aluminum Alloy, Sheet and Plate, 1.0Mg - 0.60Si - 0.28Cu - 0.20Cr (6061; -T6 Sheet, -T651 Plate), Solution and Precipitation Heat Treated
AMS QQ-A-200/8	Aluminum Alloy 6061, Bar, Rod, Shapes, Tube and Wire, Extruded
ASME B46.1	Surface Texture (Surface Roughness, Waviness and Lay)
ASTM A582	Standard Specification for Free-Machining Stainless Steel Bars
IEC 60228	International Electrotechnical Commission's international standard on conductors of insulated cables
ISO 1151-1:1988	Flight Dynamics – Concepts, quantities and symbols – 4th edition, Part 1: Aircraft motion relative to the air
JSC 65795	NASA Docking System (NDS) Interface Definitions Document (IDD)
MIL-C-26074	Electroless Nickel Coatings
MIL-DTL-5002	Surface Treatments And Inorganic Coatings For Metal Surfaces Of Weapons Systems
MIL-L-46010	Lubricant, Solid Film, Heat Cured, Corrosion Inhibiting

3.0 INTERNATIONAL DOCKING SYSTEM STANDARD

3.1 GENERAL

The following subsections describe the system interfaces for the IDSS.

3.1.1 SYSTEM DESCRIPTION

3.1.1.1 DOCKING

The IDSS IDD presumes a pre-docking rendezvous phase along with a 2-stage approach to docking. The rendezvous stage involves an active docking vehicle navigating to the passive docking vehicle to align their docking interfaces for the docking stage. The passive vehicle provides three types of targets to assist the active vehicle in performing the precise alignment needed to mesh the mechanical interfaces at the start of the docking stage. Targets are available for longer to mid-range operations, as well as for short-range operations when the active vehicle is on the docking axis of the passive vehicle. These shorter range targets are available to the active vehicle for alignment to within the capture envelope specified by the docking system's Initial Contact Condition requirements. This completes the rendezvous stage.

The first stage of docking establishes the initial capture of the docking vehicles, and is performed by the Soft Capture System (SCS). During the capture phase, the active docking mechanism's SCS aligns with and latches to the passive docking mechanism, then stabilizes the newly joined spacecraft relative to each other. The soft capture system then pulls the docking spacecraft together in order to initiate the second stage of docking, performed by the Hard Capture System (HCS). The HCS performs structural latching and sealing at the docking interface in order to transfer structural loads between the spacecraft and to create a transfer tunnel which can be pressurized for crew and cargo transfer for joint mission operations. The docking operation needs to be completed within a maximum time to ensure a safe docking operation.

The IDSS docking interface is fully androgynous about one axis, meaning the interface configuration is capable of mating to an identical configuration. During docking, one androgynous soft capture interface must be active (active mode), while the other androgynous soft capture interface remains retracted and locked in place, or passive (passive mode). The active interface controls the soft capture function and all sequences of docking through hard capture. Figure 3.1.1.1-1, Androgynous Docking Interface – Axial View and the Androgynous Docking Interface – Cross Sections [Figures 3.1.1.1-2, Section A-A (Cross-section through mid-plane of two petals) and 3.1.1.1-3, Detailed Section of Petal] depict the Androgynous IDSS interface.

The androgynous SCS interface consists of a capture ring, guide petals, mechanical latches, mechanical latch strikers, sensors and sensor strikers. The term "striker" refers to the area on the passive side of the mating interface which is intended to be a contact surface for an active component on the active side of the mating interface. During docking soft capture, the guide petals are the first element to make contact; this is referred to as initial contact. The SCS then responds to correct the lateral and angular misalignment between the two opposing interfaces. Soft capture is complete when the

**IDSS IDD Revision E
October 2016**

two capture rings are in full contact and the active mechanical capture latches are fully engaged with the mechanical latch strikers on the opposing vehicle.

The SCS then aligns the two mating vehicles and retracts to bring the two hard capture interfaces into hard capture range. Fine alignment is accomplished by a combination of SCS retraction and HCS guide pins.

The HCS uses active hooks to engage opposing passive hooks to provide the structural connection and pressure seal compression. The HCS interface consists of a tunnel, 12 active/passive hook pairs on each side, dual concentric pressure seals, fine alignment guide pins and guide pin receptacles, sensors, sensor strikers, separation system, and resource umbilicals.

The docking operation is complete when the mechanical hooks and resource umbilicals are fully engaged.

3.1.1.2 BERTHING

Berthing spacecraft together using a manipulator/mechanical robot arm has been a crucial capability for spaceflight operations. This capability has been used extensively as part of the United States Space Shuttle and ISS programs to support the capture and installation of visiting vehicles. Unberthing, the separation of two vehicles using a manipulator, has also been used extensively to disconnect a vehicle and release it for departure or relocate it to another berthing port. This international docking standard interface will not preclude manipulator assisted berthing and unberthing by the ISS Space Station Remote Manipulator System (SSRMS) or a similar future manipulator system.

The set of additional requirements that provide a berthing compatible IDSS implementation (IDSS-B) are documented in Appendix F. Meeting these additional requirements permits the IDSS implementation to be used for either docking or manipulator berthing.

Note that due to other constraints and considerations (mass, operations), it may be preferable to have a dedicated berthing-only interface. In this scenario, an accepted international berthing interface may be utilized that employs some combination of peripheral active controlled devices and passive capture mechanisms (e.g. the ISS Common Berthing Mechanism (CBM), Probe-Cone, etc.). For clarity, note that the IDSS and IDSS-B standards do not define or address these berthing only interfaces.

3.1.1.3 NOTES TO IDSS REQUIREMENTS

Docking system can be developed under specific mission requirements:

- A. Only for docking (Appendix F requirements are not obligatory)
- B. Only for berthing (Appendix F requirements are obligatory)
- C. Both for docking and berthing (Appendix F requirements are obligatory)

3.1.2 ENGINEERING UNITS OF MEASURE

All dimensions are in millimeters. All angular dimensions are in degrees. Unless otherwise specified, the dimensional tolerances shall be as follows:

xx implies $xx \pm 1$ mm

xx.x implies $xx.x \pm 0.5$ mm

xx^o implies $xx^o \pm 30'$

3.2 MATING INTERFACE DEFINITION

An overview of the IDSS interface is shown in Figure 3.1.1.1-1. The IDSS docking interface shall conform to the definition as shown in Figure 3.1.1.1-2 and Figure 3.1.1.1-3. The HCS Mating Plane is defined as the seal plane between two vehicles' HCS tunnels when structurally mated.


Two reference lines are a Line of Androgyny and a Line of Symmetry as shown in Figure 3.1.1.1-1. The Docking Axis is defined as shown in Figure 3.1.1.1-2.

Figure 3.2-1, Naming Convention for Hooks, Guide Pins, Petals, Latches and Latch Strikers, defines the naming convention for the Docking system principal components.

The SCS Mating plane is defined as the plane normal to the Soft Capture Ring's axis which intersects the conic outline of the Guide Petals at a diameter of 1200 mm.


The SCS mating plane is the top surface of the capture ring for both active and passive modes.

Unless otherwise stated, the dimensions and features called out in section 3.2 and its subsections shall be implemented on IDSS-compatible systems; these are requirements which must be met to ensure docking interface compatibility. Each requirement dimension is specified only once with its required value and tolerance. For increased clarity, some requirement dimensions are repeated elsewhere without tolerance, and are marked with "REF". "REF" stands for "REFERENCE", and denotes a repeated callout of a primary requirement dimension that can be found elsewhere in this document. Some dimensions in the figures are enclosed in braces, i.e. "{ }". These dimensions are not a requirement of the standard, but are dimensions from existing proven heritage systems. Deviations from these dimensions may be possible. A complete list of drawing symbols used throughout the document is identified in Appendix A.

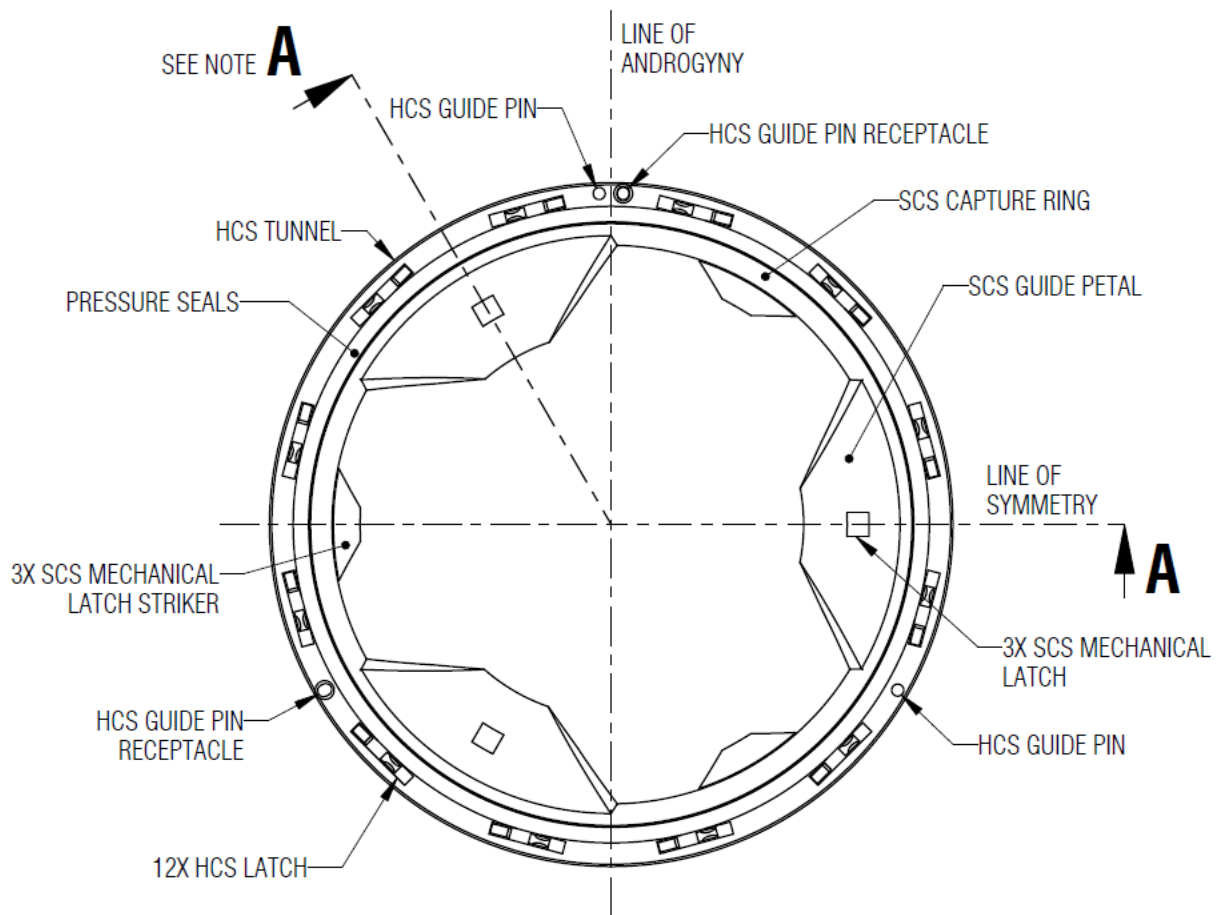

Note: Refer to Figure 3.1.1.1-2 for Section A-A.

FIGURE 3.1.1.1-1 ANDROGYNOUS DOCKING INTERFACE – AXIAL VIEW

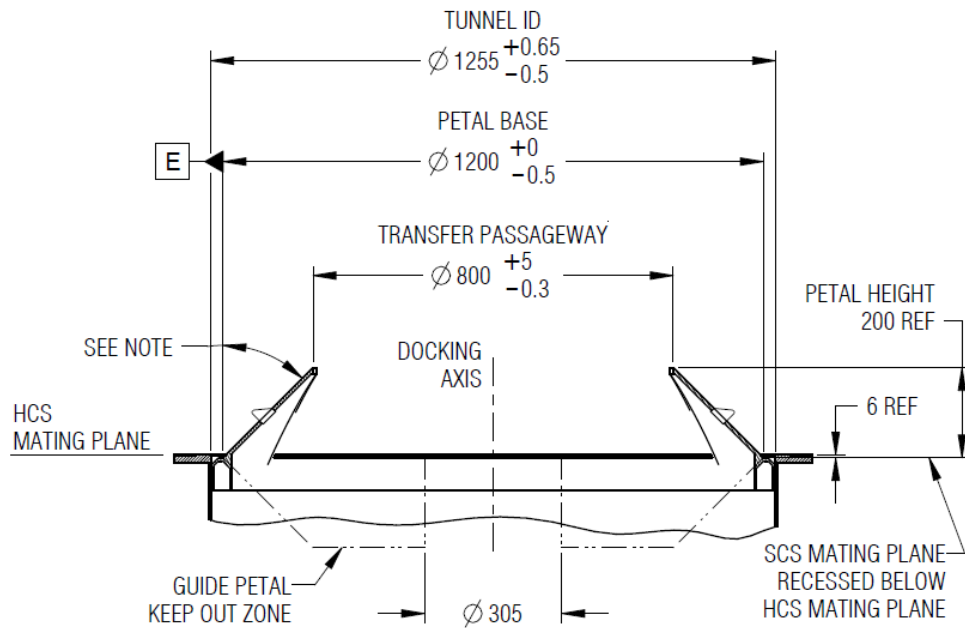

Note: Refer to Figure 3.1.1.1-3 for details

FIGURE 3.1.1.1-2 SECTION A-A (CROSS-SECTION THROUGH MID-PLANE OF TWO PETALS)


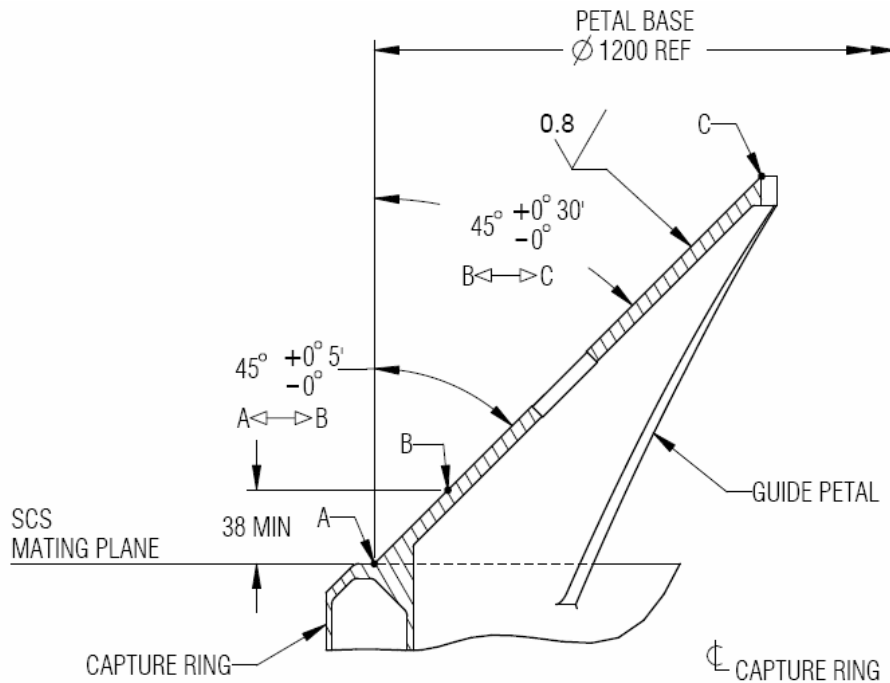


FIGURE 3.1.1.1-3 DETAILED SECTION OF PETAL

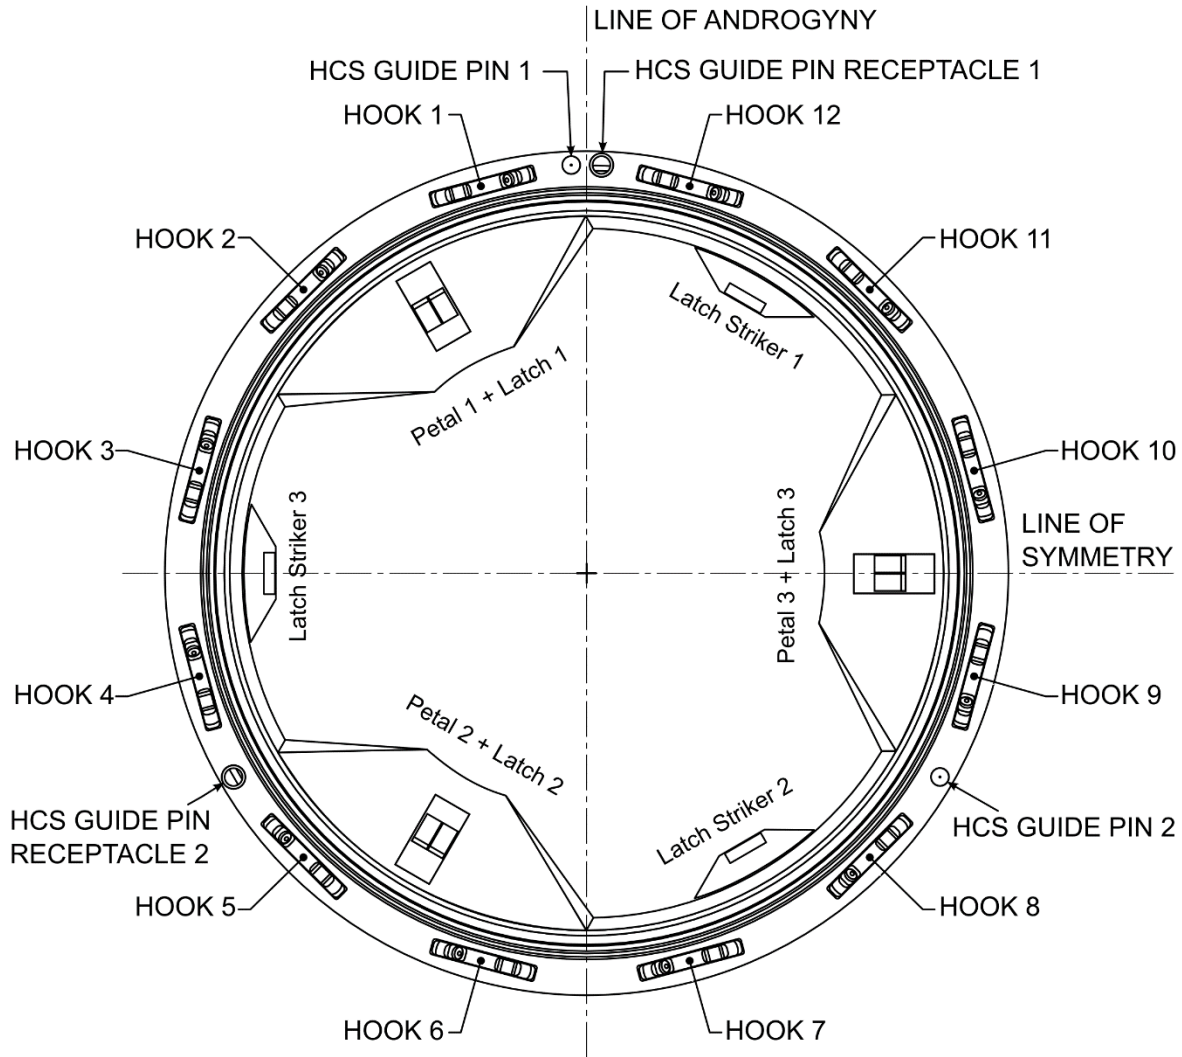

Note: The naming convention given here is to provide a common way to reference these items, and it is the designer's choice whether, or how, to place physical labels on the items themselves.

FIGURE 3.2-1 NAMING CONVENTION FOR HOOKS, GUIDE PINS, PETALS, LATCHES AND LATCH STRIKERS

3.2.1 TRANSFER PASSAGEWAY


The docking system shall maintain the minimum transfer passageway diameter as shown in Figure 3.1.1.1-2.

3.2.2 SOFT CAPTURE SYSTEM

The SCS performs soft capture using mechanical capture latches with mechanical strikers. The capture system shall conform to the definition as shown in the SCS Interface - Capture System [Figure 3.2.2-1, Capture System Overview, and Figure 3.2.2-2, Striker Zone Detail]. Soft capture is the initial mechanical mating between the


docking systems. It is the first stage of attachment in the docking sequence for the purpose of soft capture system docking interface alignment, capture, arrest and stabilization of dynamic motion between the spacecraft, and finally, interface alignment prior to hard capture system engagement.

An alternative concept for a capture system based on magnetic capture - which would be compatible with mechanical latches - is described in Appendix E, E.1.0. In case of using mechanical capture latches with mechanical strikers, Appendix E, E.1.0 requirements are not obligatory.

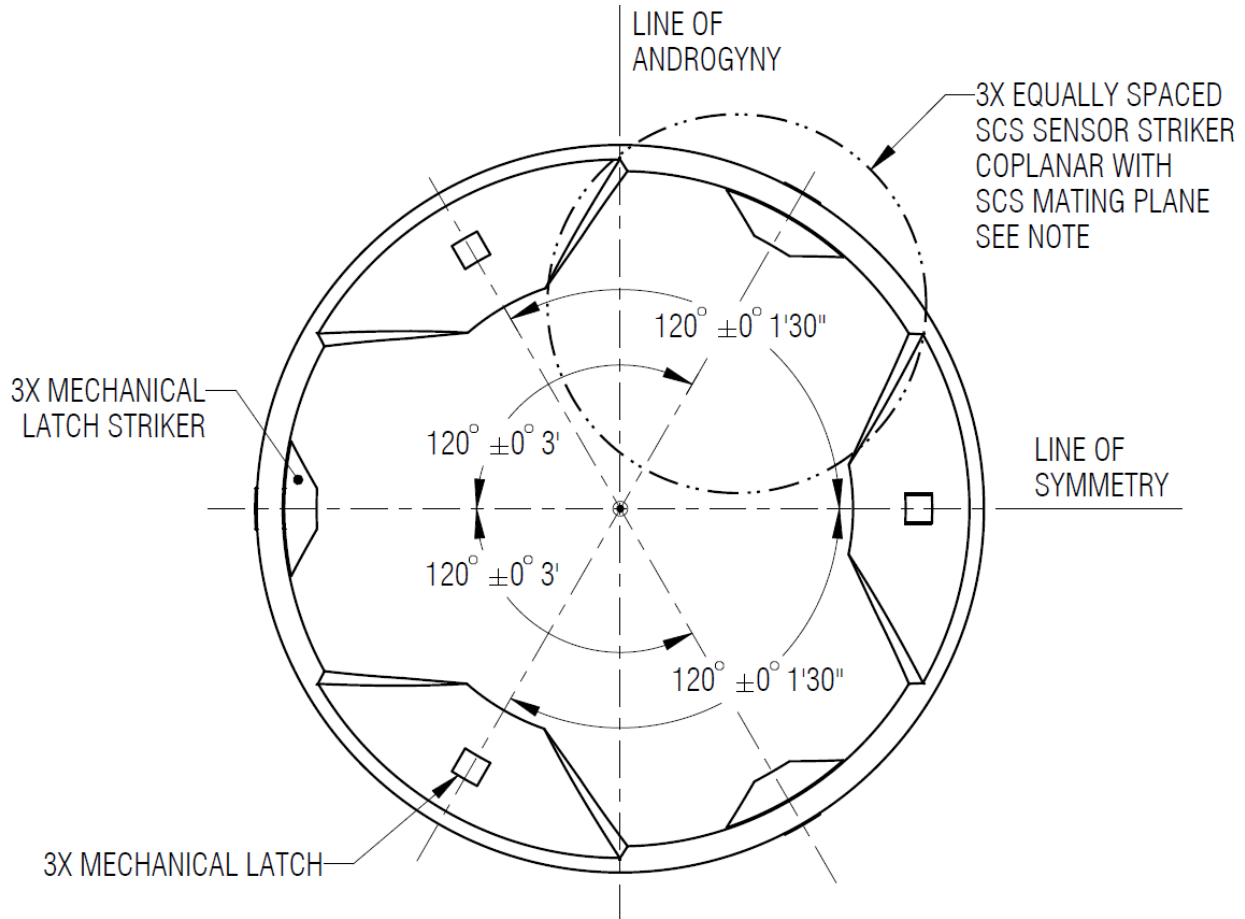

Note: Refer to Figure 3.2.2-2 for Striker Zone details

FIGURE 3.2.2-1 CAPTURE SYSTEM OVERVIEW

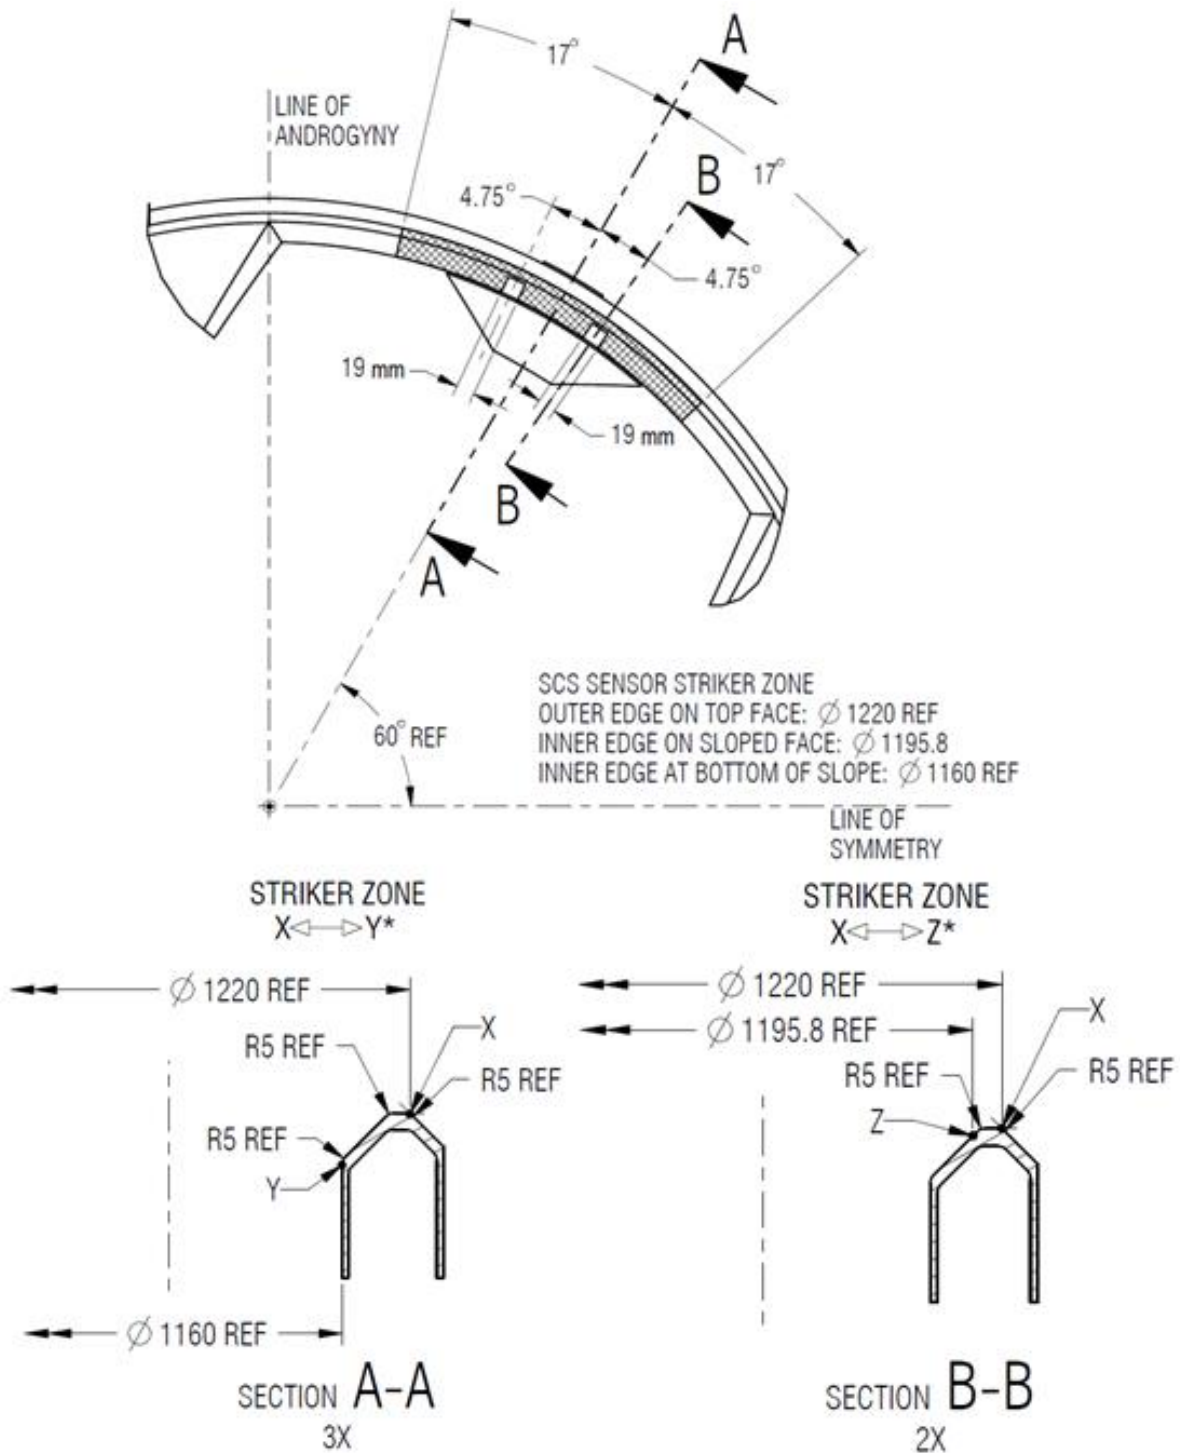


* SCS sensor striker zone is the actual contour of the capture ring surfaces as shown.

FIGURE 3.2.2-2 STRIKER ZONE DETAIL


3.2.2.1 GUIDE PETAL SYSTEM

IDSS compliant systems shall implement three inward pointing guide petals integrated on the soft capture ring. The petals shall be equally spaced around the circumference of the soft capture docking ring as shown in Figure 3.2.2.1-1, SCS Interface – Guide Petal System Overview. Additional SCS interface details that shall be implemented are shown in the SCS Interface – Guide Petal System Details [Figures 3.2.2.1-2, Petal Detail, 3.2.2.1-3, Petal Profile Detail, and 3.2.2.1-4, View E-E – Guide Petal Outline] and Figure 3.2.2.1-5, SCS Interface – Capture Ring Profile.

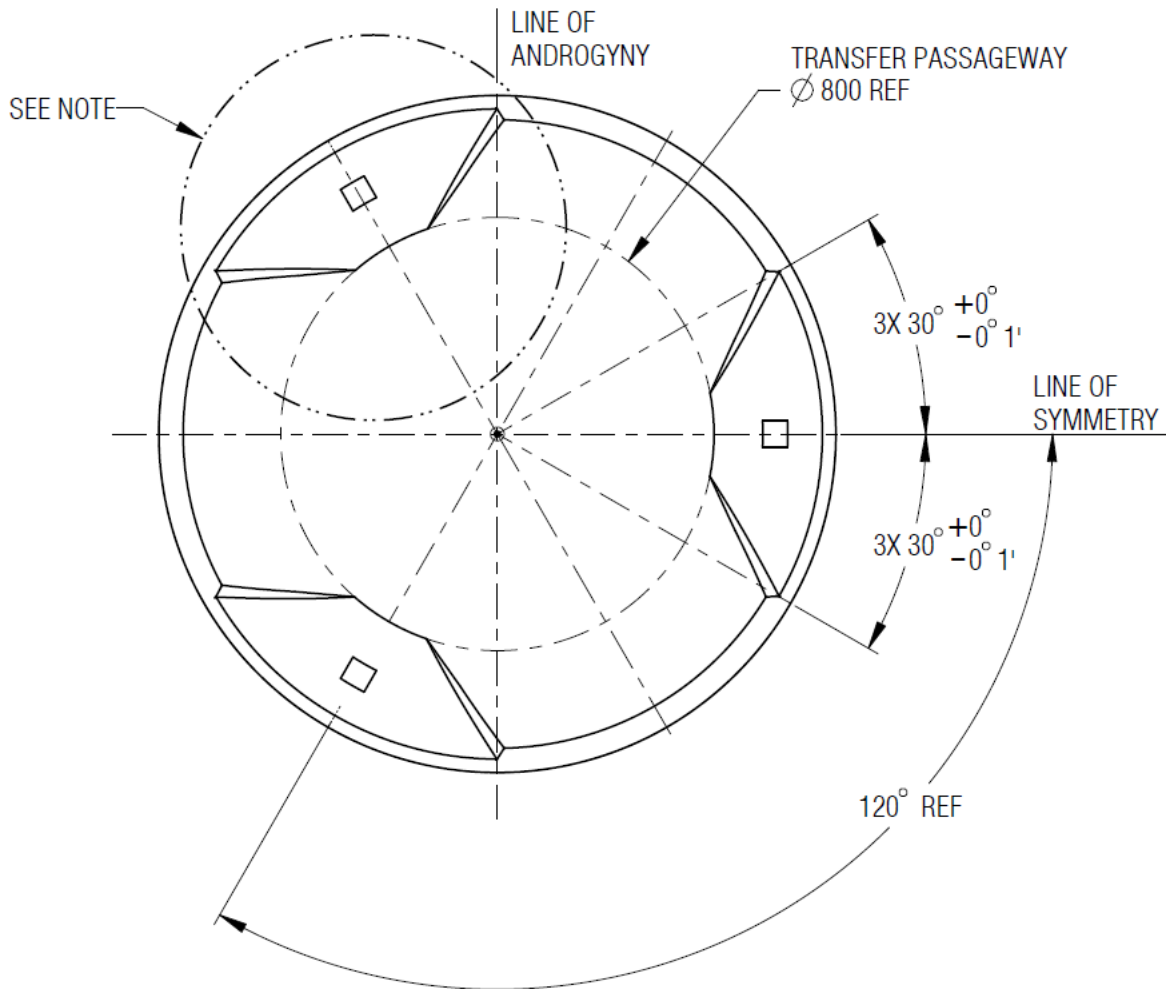

Note: Refer to Figure 3.2.2.1-2 and Figure 3.2.2.1-3 for Petal details.

FIGURE 3.2.2.1-1 SCS INTERFACE – GUIDE PETAL SYSTEM OVERVIEW

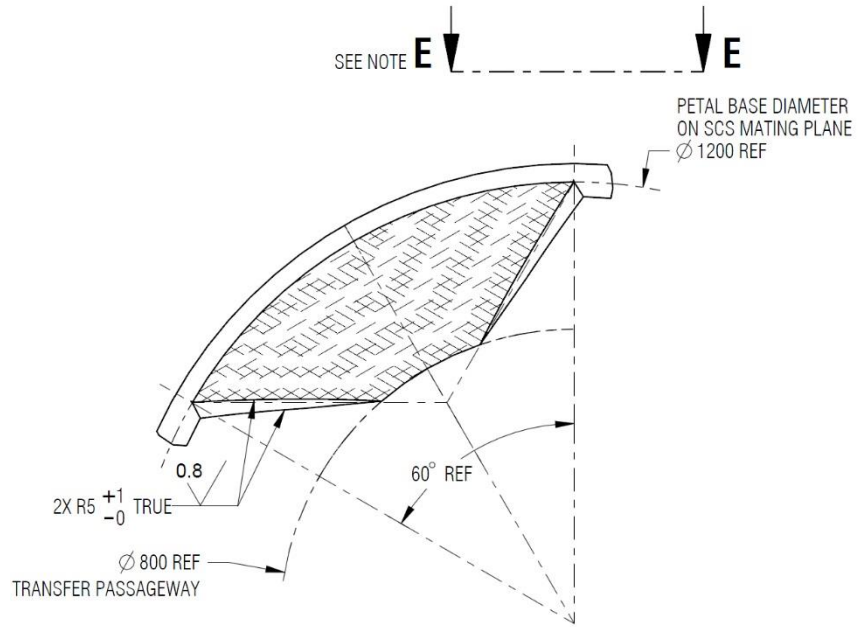

Note: Refer to Figure 3.2.2.1-4 for View E-E

FIGURE 3.2.2.1-2 PETAL DETAIL


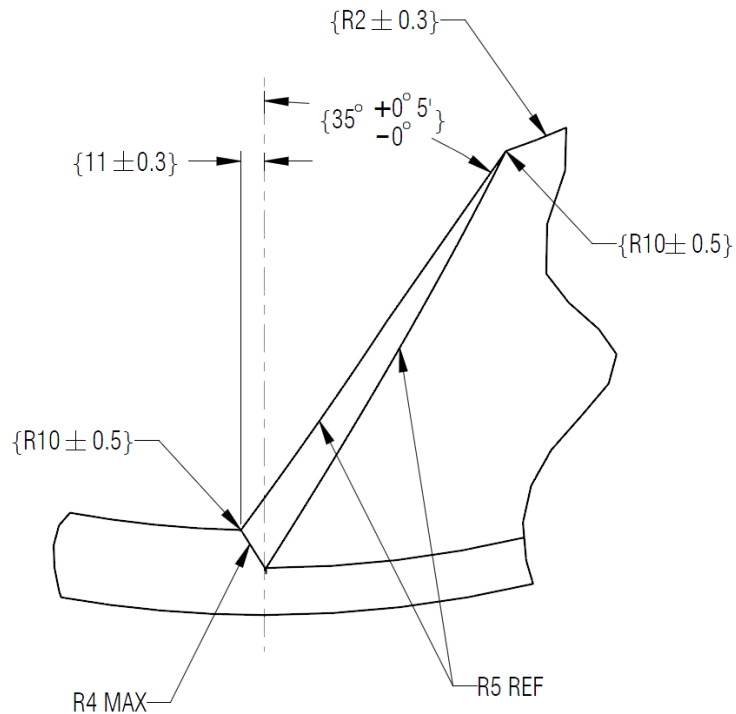



FIGURE 3.2.2.1-3 PETAL PROFILE DETAIL

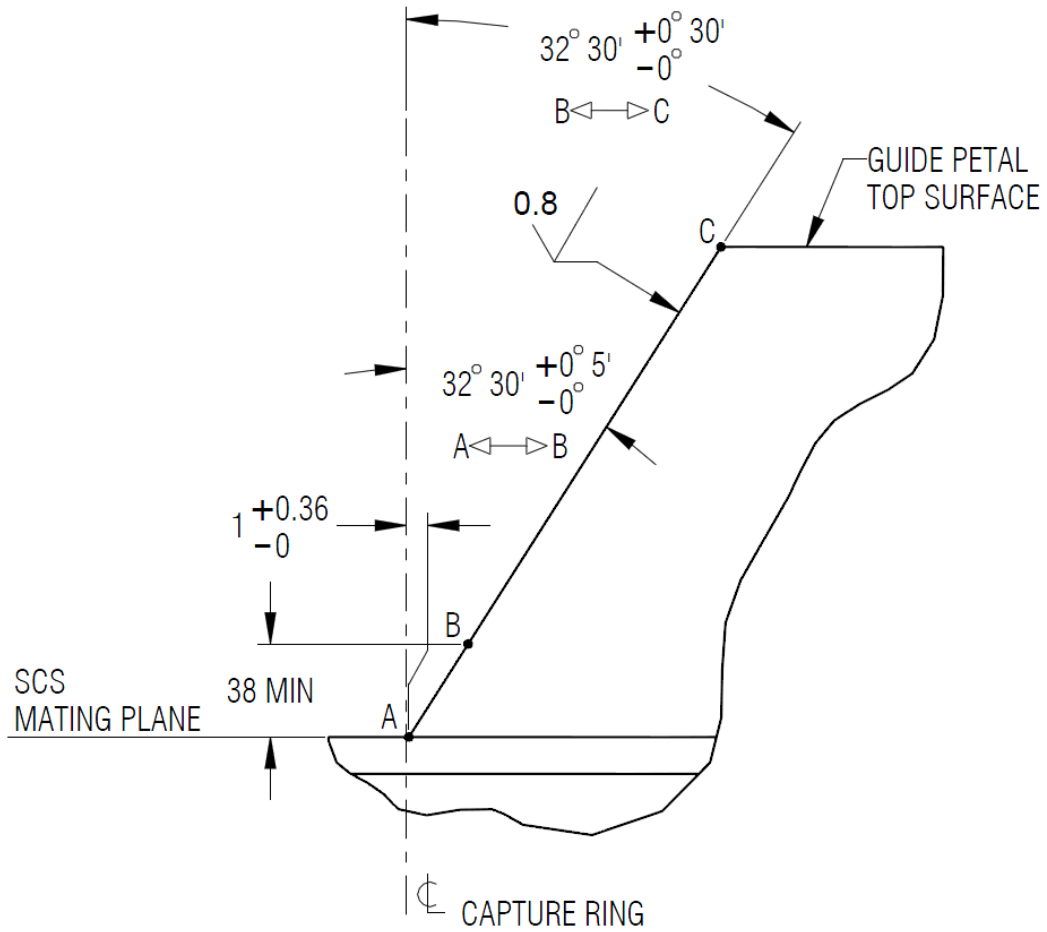

Notes: In Petal Detail view, dimensions projected on the SCS mating plane are shown.

Petal outline shown is on the external conic surface of the petal system.

FIGURE 3.2.2.1-4 VIEW E-E - GUIDE PETAL OUTLINE

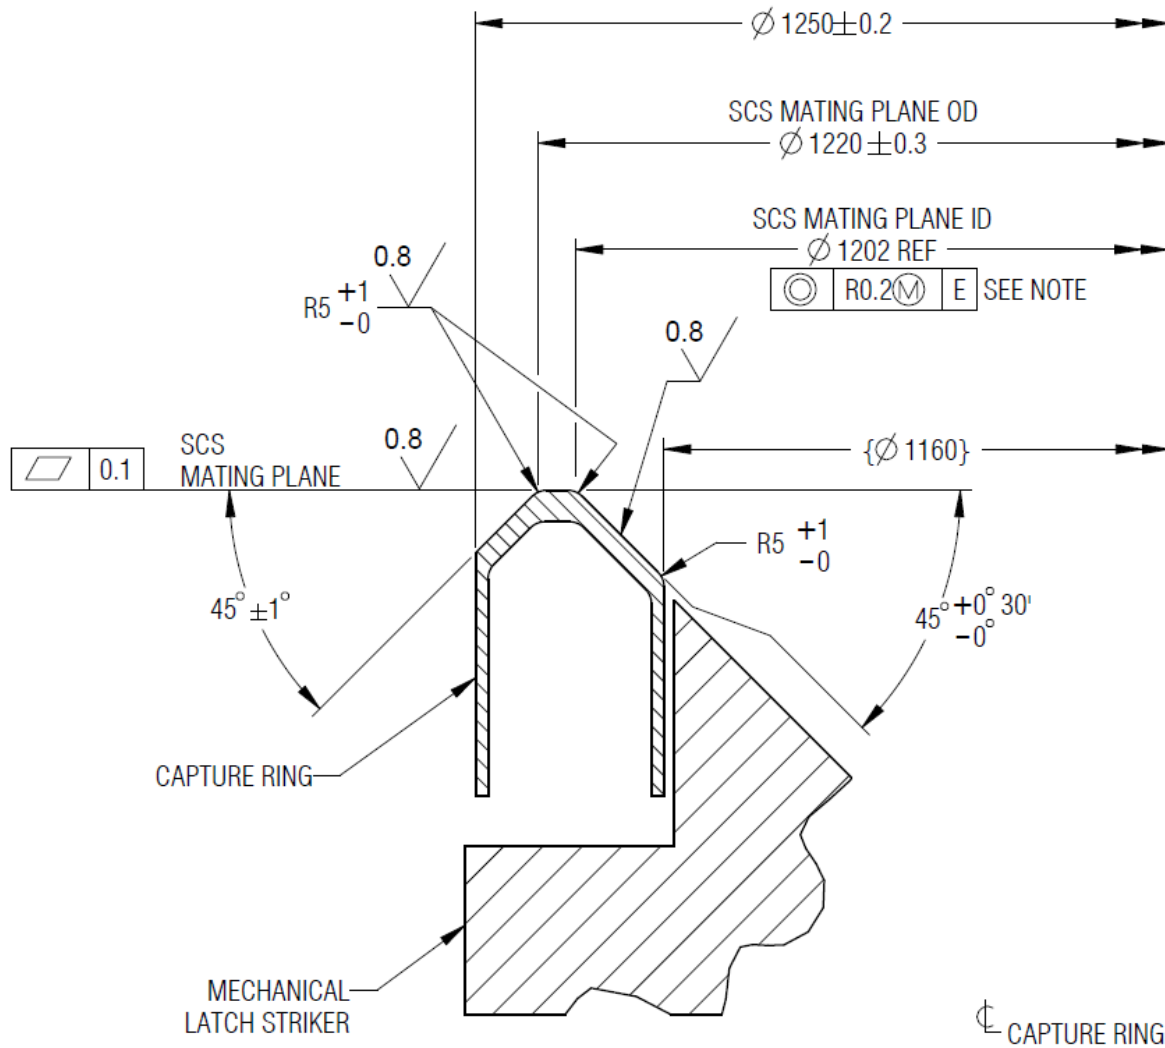

Note: Datum E is defined in Figure 3.1.1.1-2.

Cross Section View of Capture Ring in Passive Mode through the Striker

FIGURE 3.2.2.1-5 SCS INTERFACE – CAPTURE RING PROFILE

3.2.2.2 SOFT CAPTURE RING

The SCS Ring is retracted and held firmly in place below the HCS mating plane when in passive mode. In active mode, the SCS Ring is actuated above the HCS mating plane to perform soft capture.

3.2.2.3 (DELETED)

FIGURE 3.2.2.3-1 (DELETED)

3.2.2.4 MECHANICAL CAPTURE LATCH SYSTEM

The IDSS SCS interface includes three mechanical latch strikers to accommodate mechanical latching systems as shown in Figures 3.2.2-1 and 3.2.2-2. The mechanical latches and strikers shall conform to the definition of the Latch Striker for Mechanical Systems shown in Figures 3.2.2.4-1, Cross Sectional View through Centerline of Mechanical Latch Striker; 3.2.2.4-2, Radial View; and 3.2.2.4-3, Top View; and Figure 3.2.2.4-4, Active Mechanical Soft Capture Latch Interface.


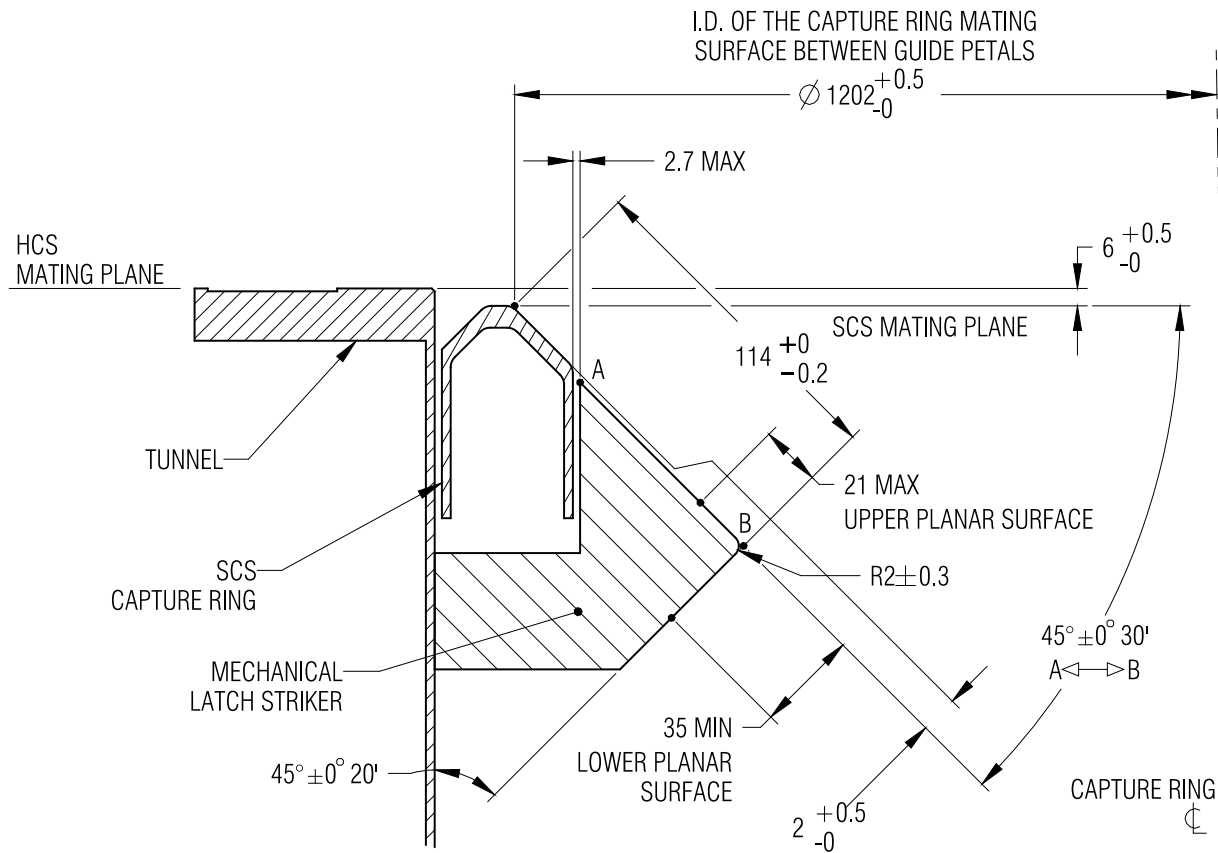


FIGURE 3.2.2.4-1 CROSS SECTIONAL VIEW THROUGH CENTERLINE OF MECHANICAL LATCH STRIKER

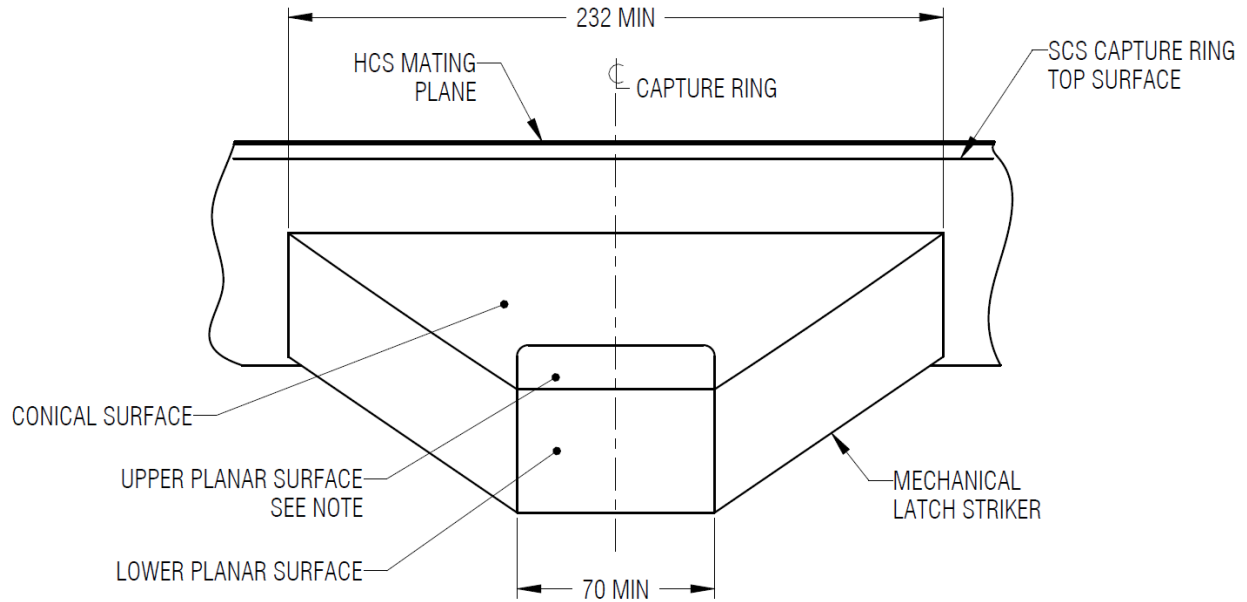

Notes:

1. All dimensions are linear dimensions.
2. Two orthogonal planar surfaces are required to form a straight edge at nose. The upper planar surface transitions into the Striker conical surface as required in such a way that the upper planar surface is either flush or slightly recessed below the conical surface. This will ensure there is no obstruction on the striker during SCS capture.

FIGURE 3.2.2.4-2 RADIAL VIEW


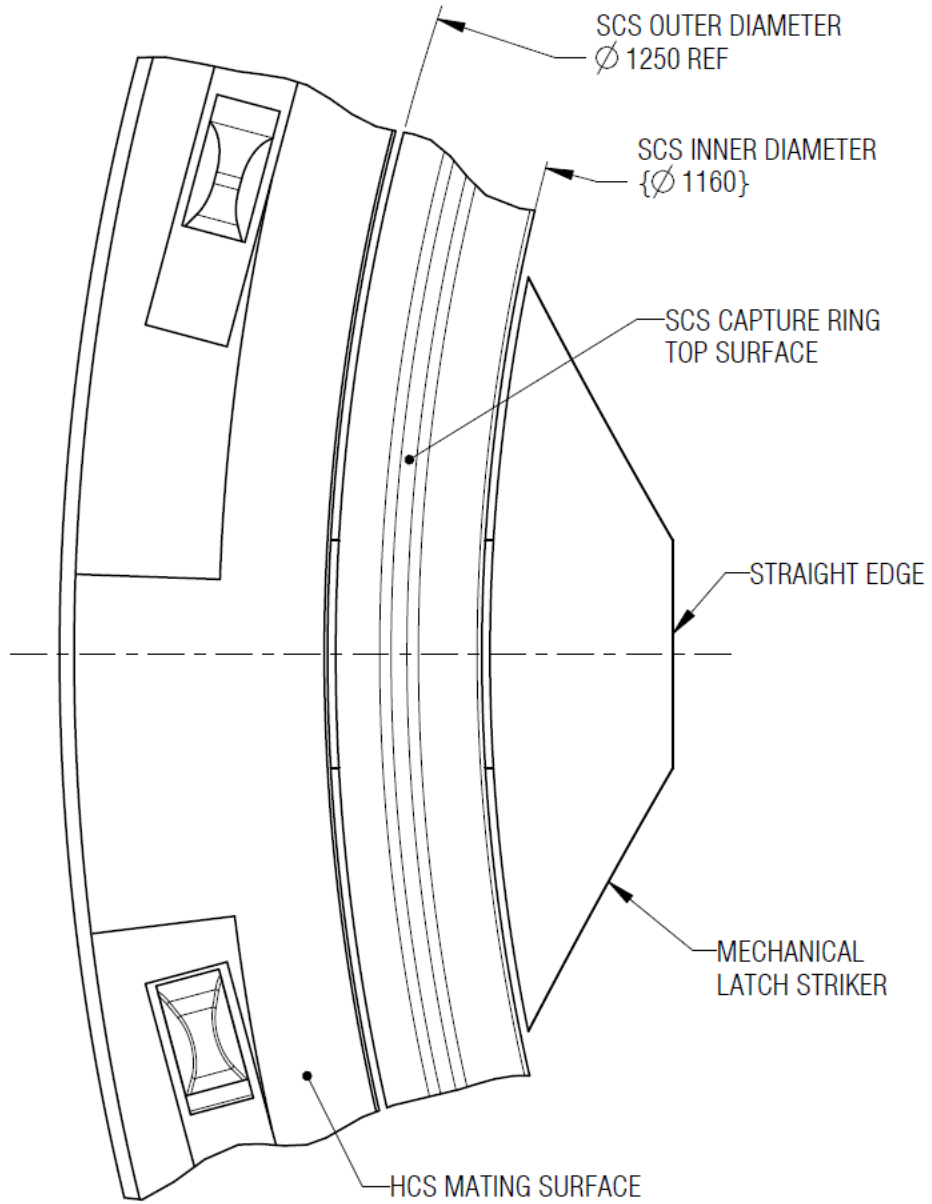


FIGURE 3.2.2.4-3 TOP VIEW

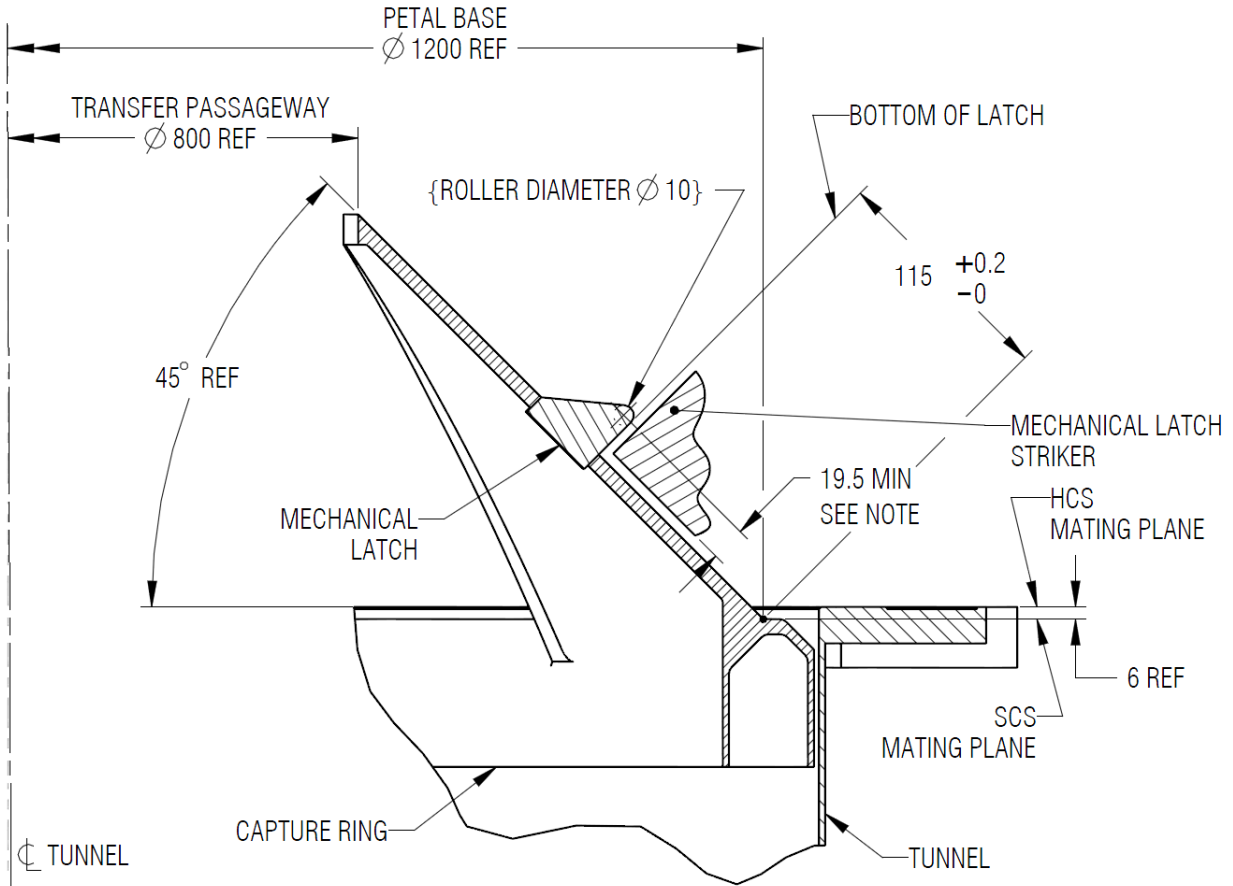

Note: Nominal minimum latch engagement.

FIGURE 3.2.2.4-4 ACTIVE MECHANICAL SOFT CAPTURE LATCH INTERFACE

3.2.2.5 SOFT CAPTURE SENSOR ACTUATION

To ensure successful soft capture performed by various active docking systems that may utilize different technologies, a limit on the total resistance force produced by a passive SCS, including force to simultaneously actuate all SCS sensors (Example: Capture sensors), is to be defined as follows:

The total actuation force due to all passive SCS sensors shall be $\leq 50\text{N}$ <TBR 3-1>.


3.2.2.6 SOFT CAPTURE SENSOR STRIKERS

Designated areas for striker zones used by all SCS sensors from the opposing docking system are defined as shown in Figures 3.2.2-1 and 3.2.2-2. Active system shall place their sensors such that they will strike the passive IDSS interface within these zones. Passive system shall provide a smooth striking surface within these zones to accommodate active system sensors.

3.2.3 HARD-CAPTURE SYSTEM

The Hard Capture System (HCS) performs the final structural mating between the two vehicles, establishing a connection capable of withstanding atmospheric pressure combined with the loads from planned mated operations of the two spacecraft.


The HCS interface shall conform to the definition as shown in Figure 3.2.3-1, HCS Interface – Axial View, and Figure 3.2.3-2, HCS Interface – Sensor Striker Zone. HCS components that are not critical for transferring mated loads or maintaining pressurization are intentionally omitted from these figures for clarity. Designated striker regions are identified for participants to configure peripheral hardware (e.g. separation system and sensors).

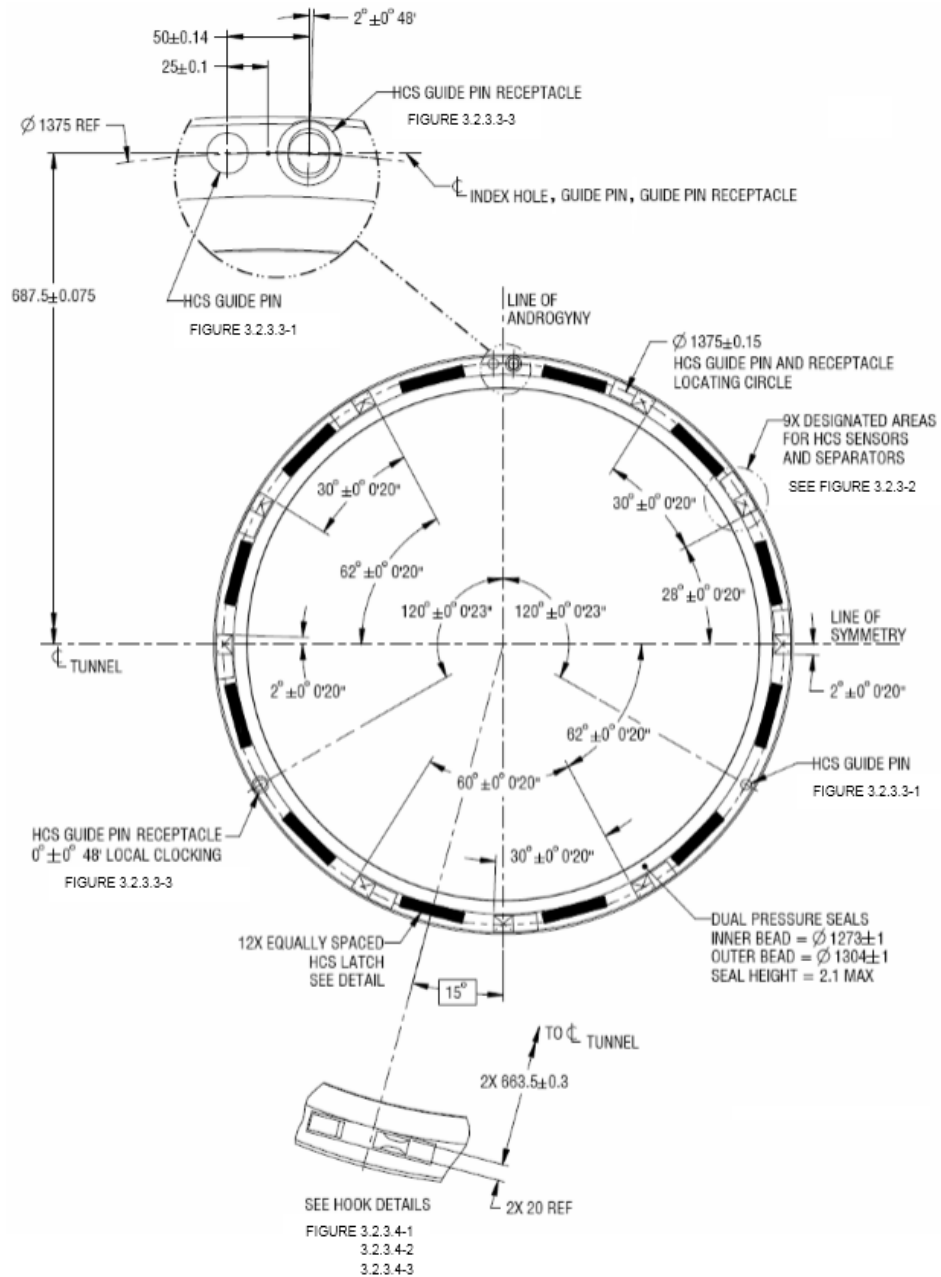


Notes:

1. Boxed angular dimensions are shown as Basic Dimensions that illustrate the theoretical construction lines.
 No dimensional tolerances are to be applied to the Basic Dimensions.
2. Separation systems shall be retracted below the HCS mating plane prior to closure of HCS interface.

FIGURE 3.2.3-1 HCS INTERFACE - AXIAL VIEW

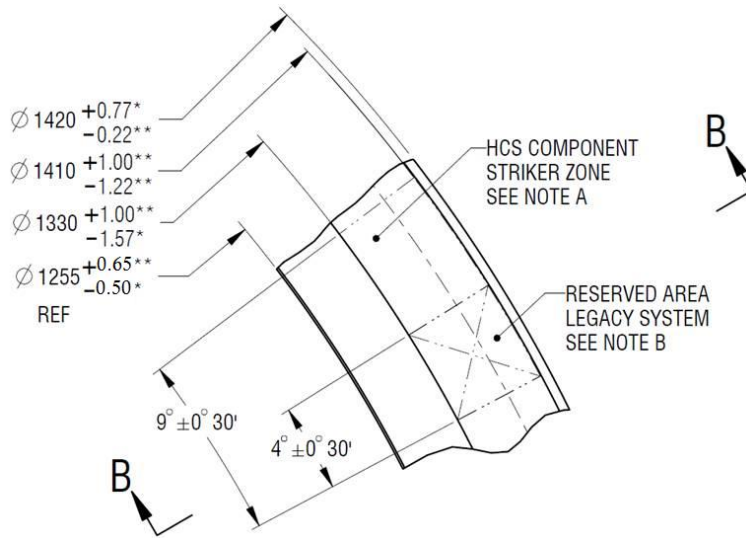

Sensor Striker Zone

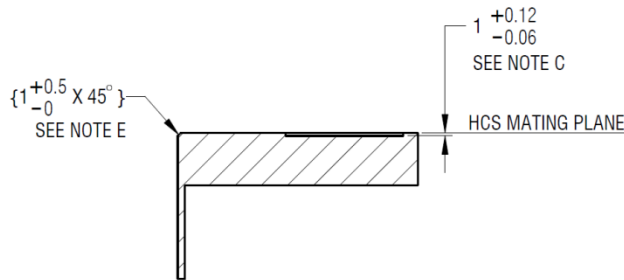

Section B-B

Notes:

* To accommodate NDS legacy

** To accommodate APAS legacy

- a) "HCS Component Striker Zone" is to depict the area for any international partner's components to strike. This zone provides the area for HCS sensors and separation mechanisms to contact.
- b) "Reserved Area" is the area inside the "HCS Component Striker Zone" for legacy HCS components and strikers. Refer to Appendix D, D.1.1 for details.
- c) "HCS Component Striker Zone" and "Reserved Area" are recessed from HCS mating plane as shown in Section B-B.
- d) HCS Component Striker Zone may contain features that require accommodation. See Appendix D, D.1.1 for details.
- e) A chamfer is shown as a required minimum clearance cutout all around the circumference. The cutout may have a different form and size as long as it meets the above minimum material removal requirement.

FIGURE 3.2.3-2 HCS INTERFACE - SENSOR STRIKER ZONE

3.2.3.1 TUNNEL

The tunnel is the main housing of the docking system that includes the interface flange for structural mating.

3.2.3.2 SEAL

The HCS shall implement two concentric pressure seals that accommodate seal-on-seal mating. For seal diametral dimensions, refer to Figure 3.2.3-1. The pressure seals are located internally with respect to the tangential hook location. Seal parameters shall be as defined below. Also see Table 3.3.2.1-1, HCS Maximum Mated Loads, for seal closure (compression) force.

Total seal adhesion force for both concentric seals ≤ 900 N

Seal protrusion height in a free state above the HCS mating plane ≤ 2.1 mm

“Seal adhesion force” is defined as the force that is required to pull the docking pressure seals apart after they have been pressed together.

3.2.3.3 GUIDE PINS AND RECEPTACLES

The HCS shall implement two guide pins and two guide pin receptacles, as shown in the Guide Pin Details [Figures 3.2.3.3-1, Guide Pin, and 3.2.3.3-2, Section C-C] and the Guide Pin Receptacle Details [Figures 3.2.3.3-3, Guide Pin Receptacle, and 3.2.3.3-4, Section D-D] for final alignment features of the hard-mate interface. The dimensions shown are for the final interface contour surfaces of the docking system assembly, disregarding any specific design of the insert.

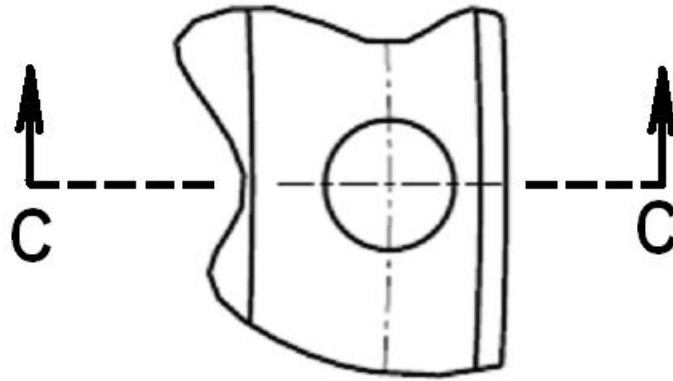


FIGURE 3.2.3.3-1 GUIDE PIN

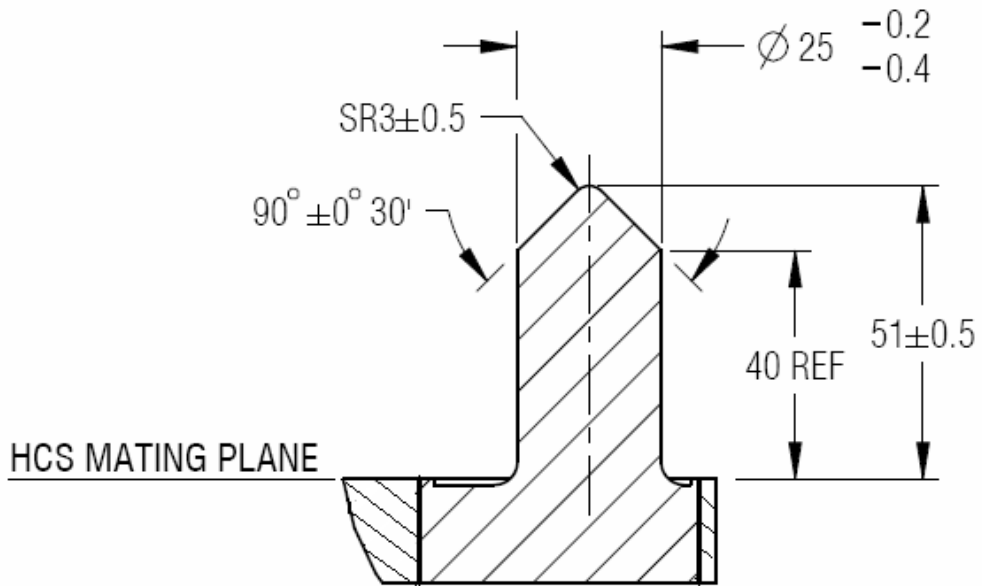


FIGURE 3.2.3.3-2 SECTION C-C


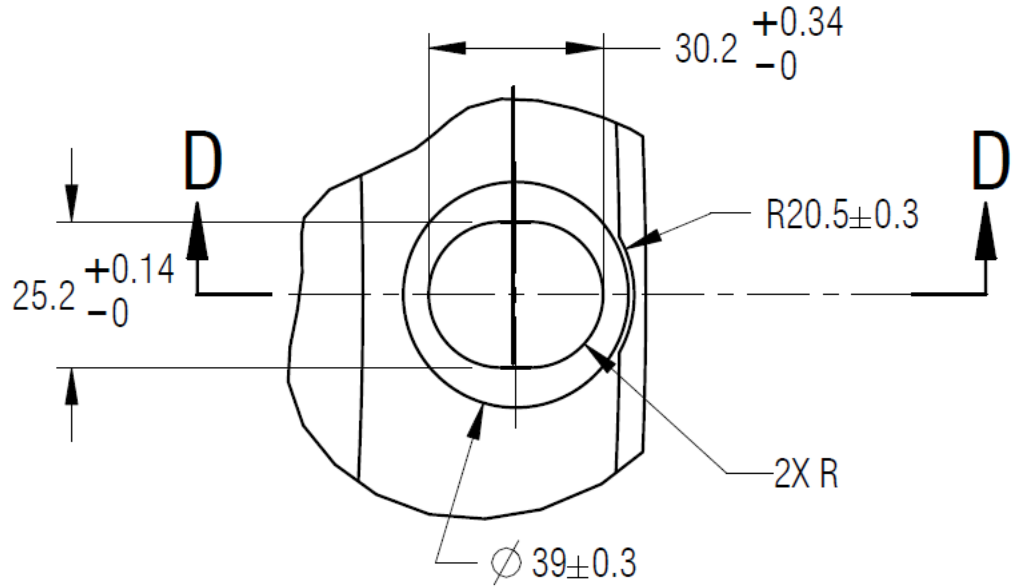


FIGURE 3.2.3.3-3 GUIDE PIN RECEPTACLE

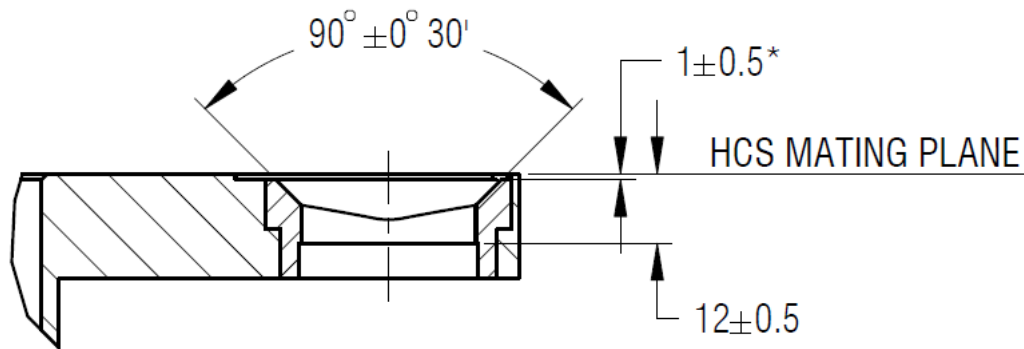

***Note:** As the Guide Pin Receptacle is located in a recessed area, this dimension depicts the distance from the HCS Mating Plane to the start of the hole chamfer.

FIGURE 3.2.3.3-4 SECTION D-D

3.2.3.4 HARD CAPTURE HOOKS

The HCS shall incorporate 12 pairs of active and passive hooks, located as shown in Figure 3.2.3-1. To carry nominal loads, 12 active hooks on one docking system shall engage 12 passive hooks on an opposing docking system interface. On a fully androgynous system, the 12 active hooks on each side of the interface may be engaged with the 12 passive hooks on the opposing interface for a total of 24 active hook engagements. Although engaging 24 hooks is not a requirement, this capability can be used to carry additional mated interface loads. The HCS implements a passively compliant passive hook. The hooks shall conform to the definition as shown in the HCS Hooks – Side Views [Figures 3.2.3.4-1, Ready to Dock Configuration, 3.2.3.4-2, Ready to Hook Configuration, and 3.2.3.4-3, Fully Mated Configuration], Figure 3.2.3.4-4, HCS Active Hook, and the HCS Passive Hook [Figures 3.2.3.4-5, Passive Hook, and 3.2.3.4-6, Passive Hook Detail View]. The motion of the active hook shall be bounded by the envelope shown in Figure 3.2.3.4-7, HCS Active Hook Motion Envelope.

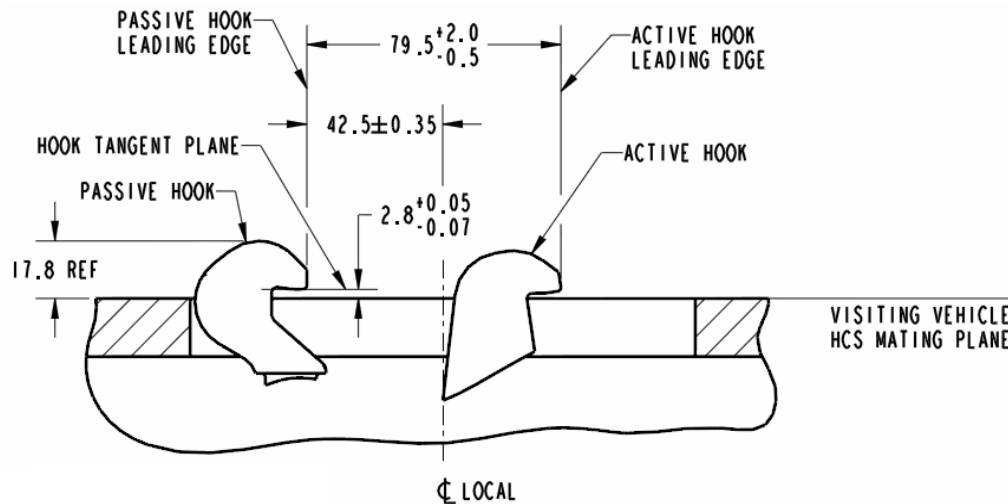


FIGURE 3.2.3.4-1 READY TO DOCK CONFIGURATION

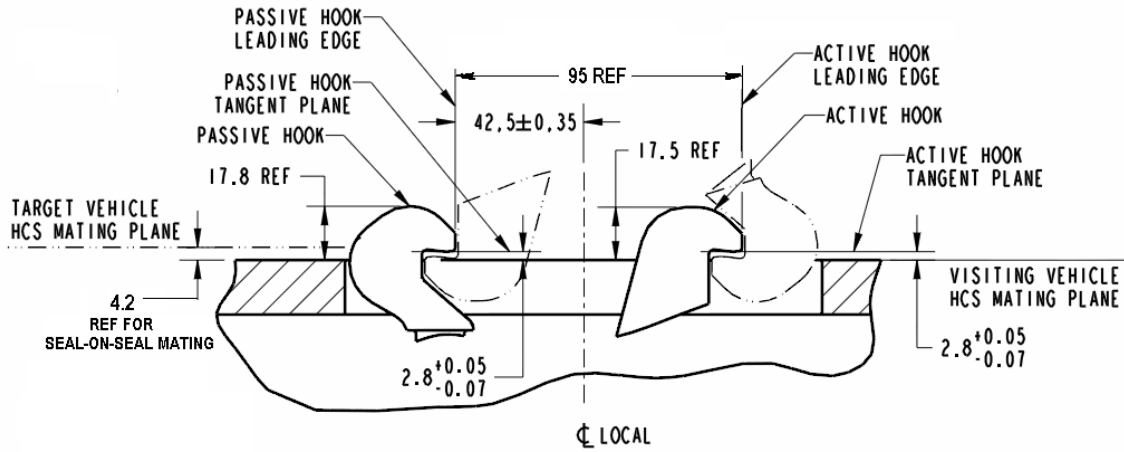


FIGURE 3.2.3.4-2 READY TO HOOK CONFIGURATION

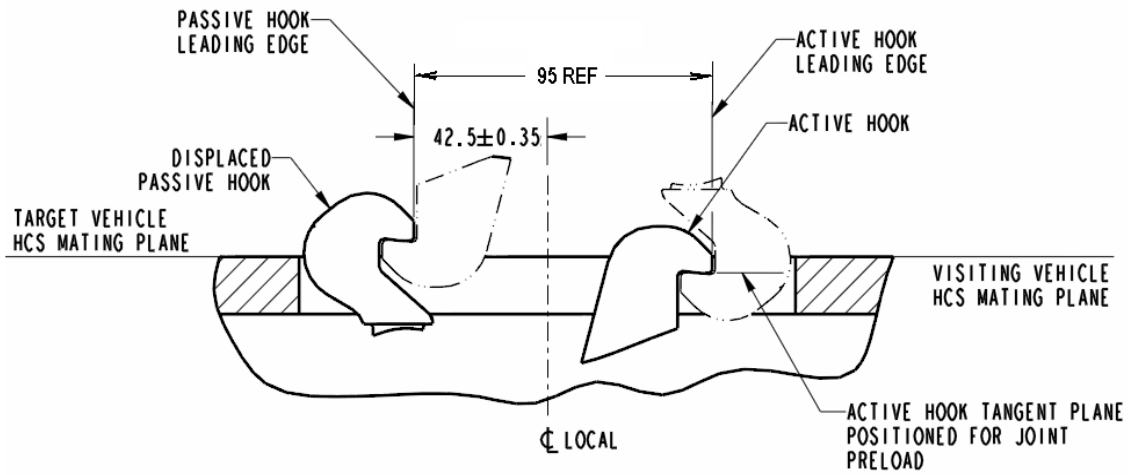


FIGURE 3.2.3.4-3 FULLY MATED CONFIGURATION

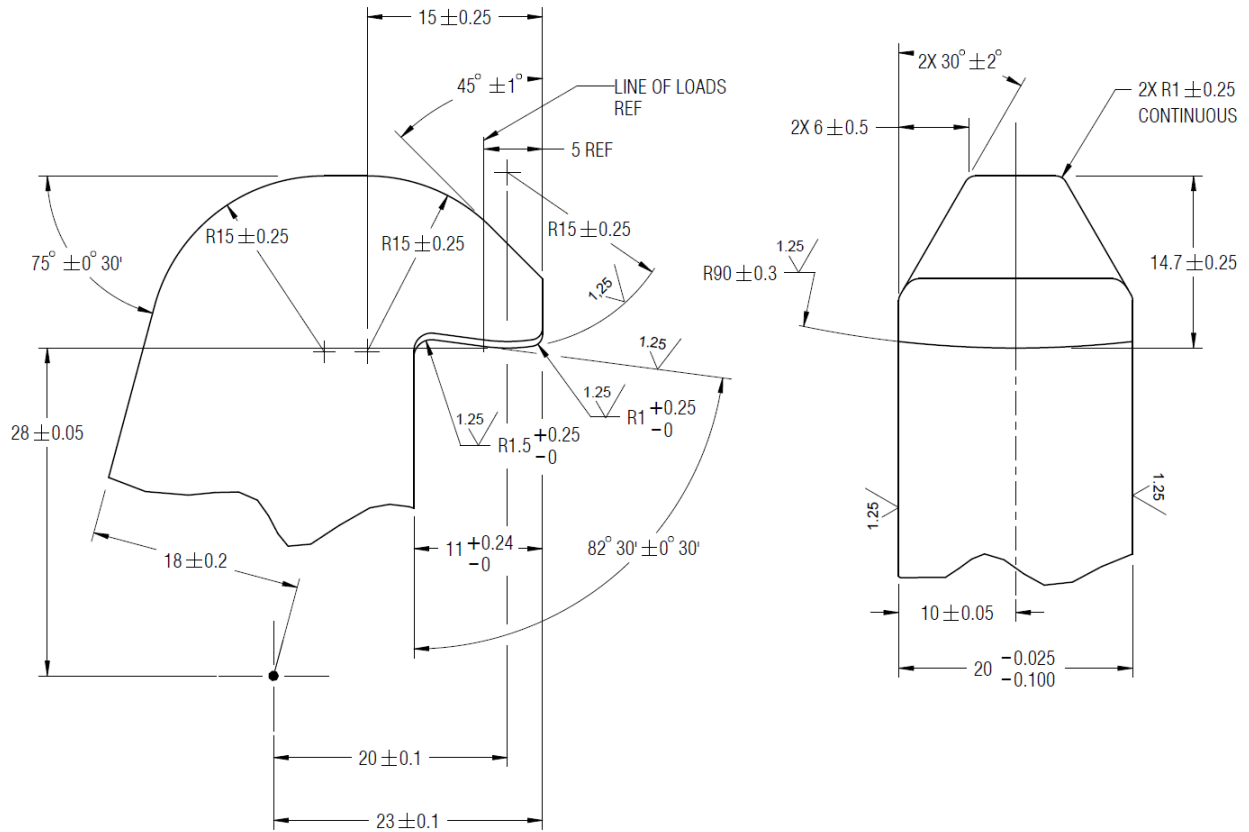


FIGURE 3.2.3.4-4 HCS ACTIVE HOOK

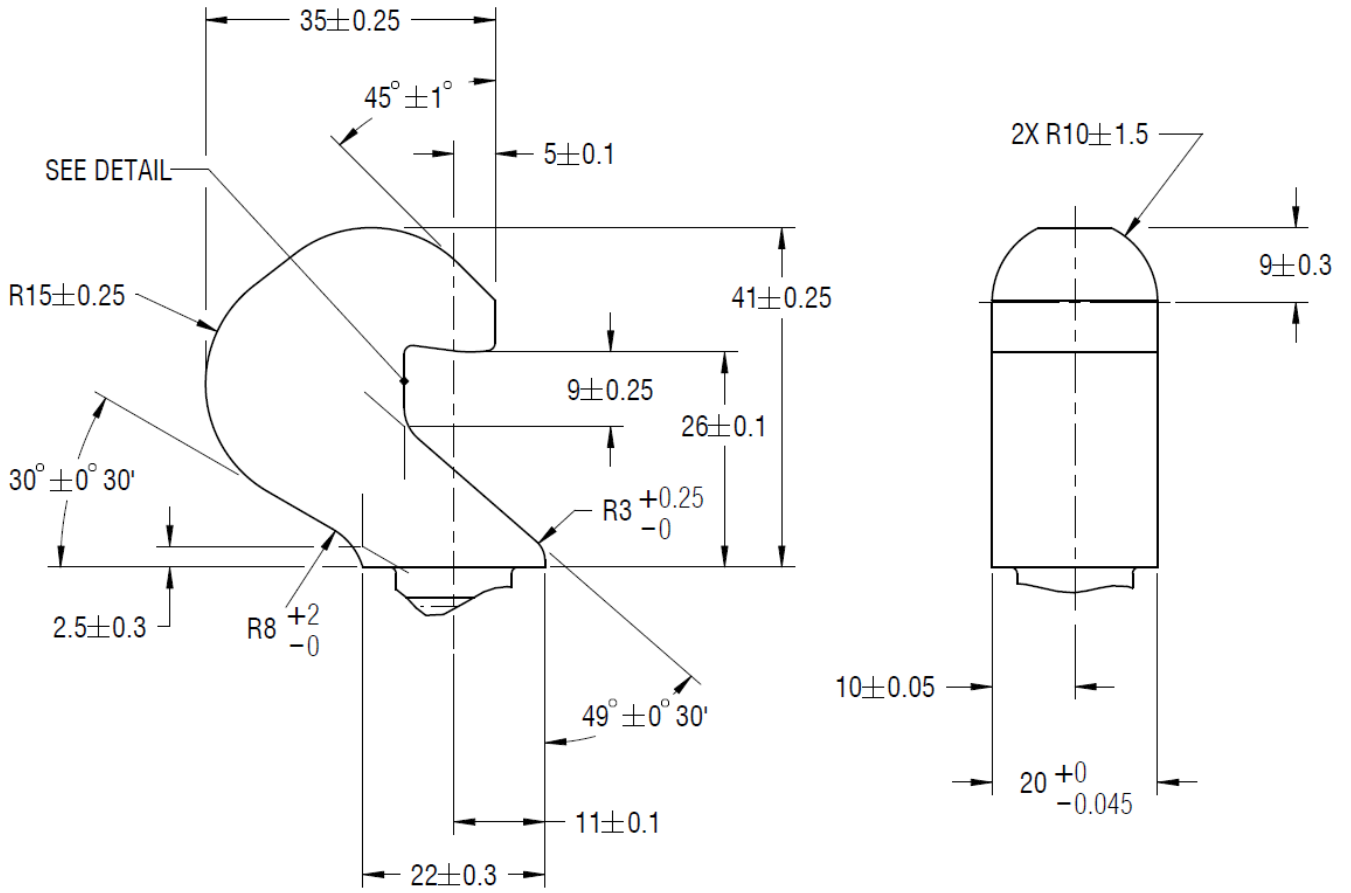


FIGURE 3.2.3.4-5 PASSIVE HOOK

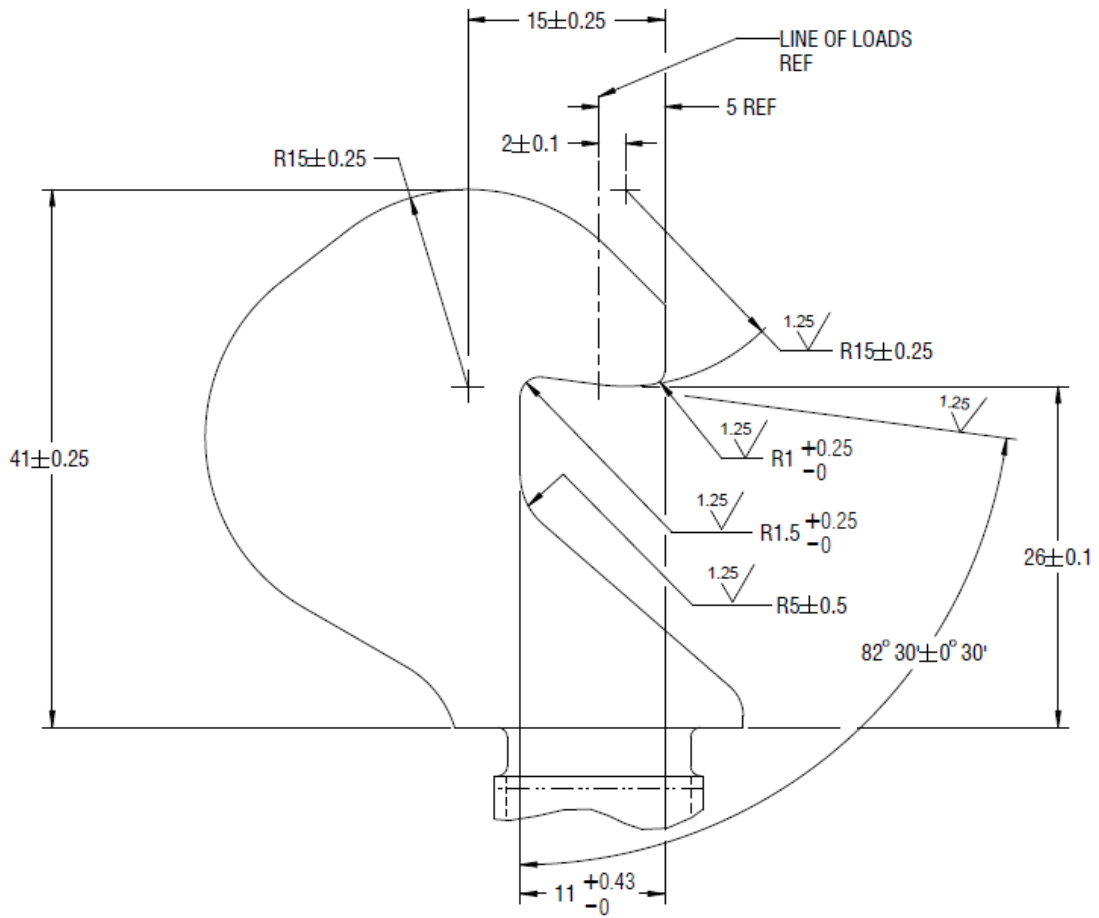


FIGURE 3.2.3.4-6 PASSIVE HOOK DETAIL VIEW

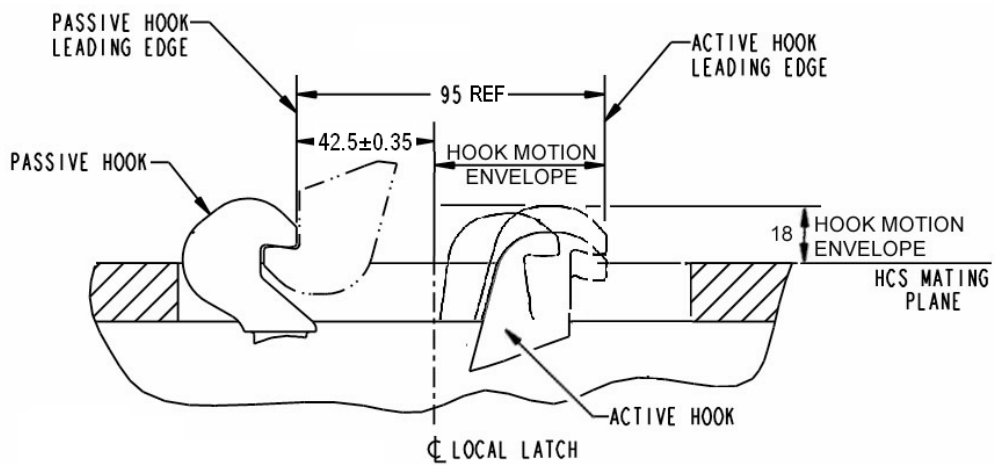


FIGURE 3.2.3.4-7 HCS ACTIVE HOOK MOTION ENVELOPE

IDSS IDD Revision E
October 2016

The Hook System is defined as the serial combination of the Active Hook Mechanism, Passive Hook Mechanism and the structural elements that are in compression.

A. The Preload of the Hook System after locking shall be between the following values:

Minimum Preload of Hook System after locking = 31 300 N

Maximum Preload of Hook System after locking = 44 340 N

B. The Design Limit Capability of the Active and Passive Hook element shall be = 50 000 N

C. The load response (stiffness) of the Active Hard Capture Hook Mechanism shall be between the upper and lower curves as defined Figure 3.2.3.4-8, Load Response of Active Hook Mechanism.

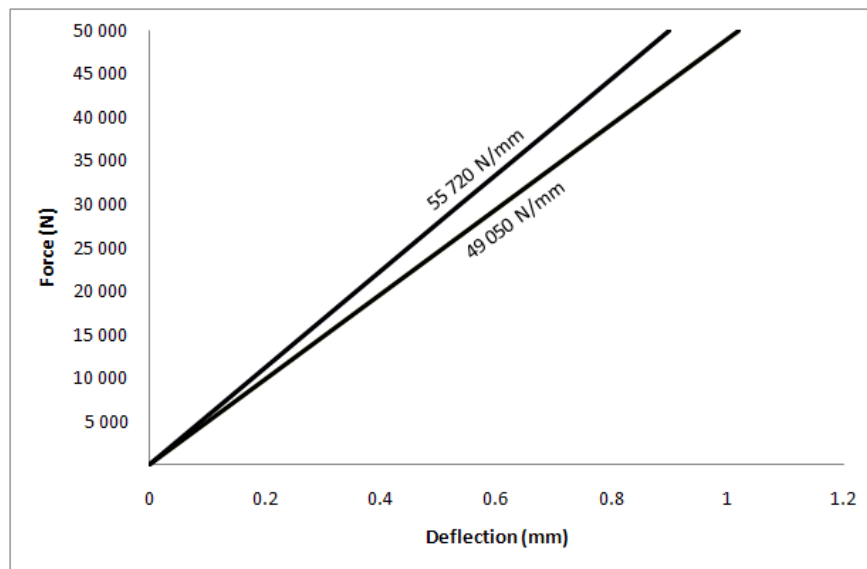


FIGURE 3.2.3.4-8 LOAD RESPONSE OF ACTIVE HOOK MECHANISM

D. The load response (stiffness) of the Passive Hard Capture Hook Mechanism shall be between the upper and lower curves as defined in Figure 3.2.3.4-9, Load Response of Passive Hook Mechanism (including Spring Washer Stack).

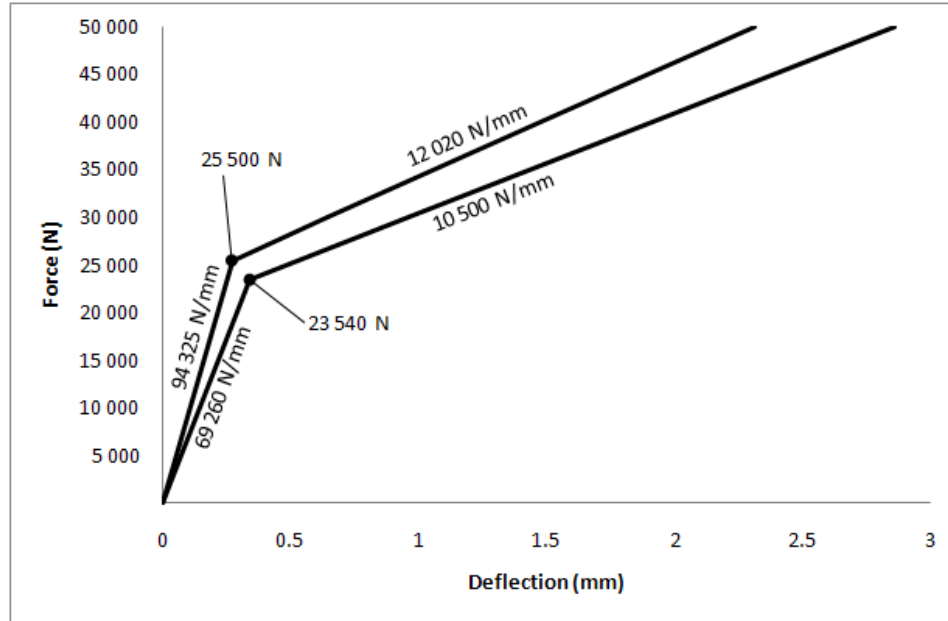


FIGURE 3.2.3.4-9 LOAD RESPONSE OF PASSIVE HOOK MECHANISM (INCLUDING SPRING WASHER STACK)

3.2.3.5 HARD CAPTURE STRIKER AREAS

The HCS has designated areas for striker zones used by the opposing docking system. These striker areas can be used for various HCS sensory components or other subsystems such as separation system push-off devices. IDSS compliant systems shall abide by the designated striker zones defined in Figure 3.2.3-1 and Figure 3.2.3-2.

3.2.3.6 SEPARATION SYSTEM - GENERAL

IDSS compliant systems shall implement a retractable separation system that can be remotely commanded to fully retract below the interface plane without application of external forces. The separation system shall provide a symmetric undocking separation force. The number of separators is a choice left to the docking system designer, provided that they comply with the Hard Capture Striker designated areas (see 3.2.3.5).

3.2.3.6.1 SEPARATION SYSTEM – FORCE LIMITS

- A. Total separation force shall be < 2670 N when the HCS interface is fully mated.
- B. Total separation force shall be ≥ 1778 N at 4.2 mm above the HCS Mating Plane.

3.2.3.6.2 SEPARATION SYSTEM – ENERGY

Total energy available from the separation system shall be between 39.2 N-m and 47.5 N-m when the HCS interface is fully mated.

3.2.3.7 HCS COMPRESSIVE FORCE RESISTANCE DURING SCS RETRACTION

During the SCS retraction for hard mate, sensors on the mating HCS mechanisms, such as “Ready-to-Hook” or “Undocking-Complete” indicators, will be compressed. A limit on

the total resistance force produced by all sensors on the passive HCS system during SCS retraction is to be defined as follows:

The total resistance force contributed by all HCS sensors on the passive side shall be ≤ 85 N at a separation of ≥ 4.2 mm between the HCS Mating Planes.

3.2.4 ELECTRICAL BONDING

3.2.4.1 SOFT CAPTURE SYSTEM

IDSS compliant systems shall establish bond paths to mitigate electrical hazards on the integrated subsystem interfaces.

IDSS compliant mechanisms protect against electrostatic discharge through the soft capture system. The bond path may be through any metal to metal contact provisions for this purpose. The requirement is from initial contact to hard capture during the docking operation.

Bonding resistance for the SCS after soft capture shall be 1 ohm or less TBC.

<TBC 3-1>

3.2.4.2 HARD CAPTURE SYSTEM

IDSS compliant mechanisms are to be protected against RF emissions. The bond path is through metal to metal contact on the seal interface between two IDSS compliant HCS mechanisms.

Bonding resistance for the HCS after latching shall be 2.5 milliohms or less.

3.2.5 ENVIRONMENTS

Materials used in the construction of the docking interface shall allow proper mating while experiencing the following conditions:

- A. Temperature difference between the two mating interfaces of up to 55°C
- B. External pressure environment $< 1.0 \times 10^{-4}$ Pa

3.2.6 MATERIALS AND SURFACE FINISHES

In general, the interface features defined herein, except for the pressure seals, should have stiffness and hardness comparable to that of metal alloys commonly used in aerospace vehicle primary structures, and which do not significantly impede relative motion. Interface surfaces which slide against each other to assist in docking interface alignment should incorporate a surface coating or finish that has low friction characteristics. The resultant coefficient of friction between two mating systems is an integrated performance characteristic which affects soft capture success.

Specific material selection for the pressure seals will be at the designer's discretion.

3.3 DOCKING PERFORMANCE

In addition to the physical geometric interface requirements, a set of common design parameters enveloping the reference missions and conditions is provided. For the SCS,

this set includes interface loads, vehicle mass properties, and initial contact conditions. For the HCS, this set includes mated loads. Of these common design parameters, only the loads have been defined as requirements. The other common design parameters, if accommodated in the docking system design, increase the probability of successful docking between different spacecraft.

3.3.1 SOFT CAPTURE SYSTEM

The SCS docking performance is defined by the mechanism's ability to capture and attenuate. During the capture phase, the mechanism is contending with the spacecraft misalignment to achieve capture. During the attenuation phase, the mechanism is limiting the relative motion and limiting the loads.

3.3.1.1 INITIAL CONTACT CONDITIONS AND COORDINATE SYSTEMS

Initial contact conditions are instantaneous relative states of the active docking interface with respect to the passive docking interface at docking interface first contact (first physical touch). They are used to define the lateral and angular misalignment, and translational and angular velocity errors when compared to perfect alignment and zero relative velocity at the docking interfaces.

The coordinate systems of docking units and docking objects are used to define the motion during docking and Initial Contact Conditions. An overview and description of coordinate systems is provided in Table 3.3.1.1-1, Coordinate Systems Used for Docking Motion Description. Figures 3.3.1.1-1 and 3.3.1.1-2 define the coordinate systems of the Docking system and the Docking objects.

The transition between coordinate systems is achieved by three rotations, performed in order corresponding to ISO 1151-1:1988, Flight Dynamics – Concepts, quantities and symbols – 4th edition, Part 1: Aircraft motion relative to the air.

- A. Yaw – yaw angle Ψ_z is defined positive about +Z-axis, using right-handed rule;
- B. Pitch – pitch angle θ_y is defined positive about +Y-axis, using right-handed rule;
- C. Roll – roll angle ϕ_x is defined positive about +X-axis, using right-handed rule;

To increase the probability of successful docking between different spacecraft, it is recommended that IDSS-compliant mechanisms capture and attenuate vehicles within initial contact conditions shown in Table 3.3.1.1-2, Initial Contact Conditions.

The set of limiting initial contact conditions provided in Table 3.3.1.1-2 represents the values used in the derivation of the loads defined in Table 3.3.1.4-1, SCS Maximum Interface Loads, and Table 3.3.1.4-2, SCS Maximum Component Loads, and represents the achievable capture envelope provided by IDSS-compatible mechanism's passive interface.

TABLE 3.3.1.1-1 COORDINATE SYSTEMS USED FOR DOCKING MOTION DESCRIPTION

#	Name	Symbol	Position	Orientation	Purpose
1. Coordinate systems of docking system interfaces					
1.1	Active SCS ring coordinate system	$X_{AR}Y_{AR}Z_{AR}$	Active ring center	+ X_{AR} : closing direction, + Y_{AR} : line of symmetry, through petal number 3 + Z_{AR} : make right coordinate system, (see Figure 3.3.1.1-2)	<ul style="list-style-type: none"> • Docking mechanism motion description • Description of ring contact interaction
1.2	Passive SCS ring coordinate system	$X_{PR}Y_{PR}Z_{PR}$	Passive ring center	$X_{PR}Y_{PR}Z_{PR}$ – according to $X_{AR}Y_{AR}Z_{AR}$	<ul style="list-style-type: none"> • Description of ring contact interaction
1.3	Coordinate system of initial position of active docking mechanism	$X_{AI}Y_{AI}Z_{AI}$	Active ring center before first contact	+ X_{AI} : closing direction, + Y_{AI} : line of symmetry, through petal number 3 + Z_{AI} : make right coordinate system, (see Figure 3.3.1.1-1)	<ul style="list-style-type: none"> • Description of initial position for docking
1.4	Coordinate system of active docking mechanism base	$X_{AB}Y_{AB}Z_{AB}$	Center of active docking mechanism base	$X_{AB}Y_{AB}Z_{AB}$ – according to $X_{AD}Y_{AD}Z_{AD}$, (see Figure 3.3.1.1-1)	<ul style="list-style-type: none"> • Docking mechanism motion description
1.5	Coordinate system of active docking/HCS mating plane	$X_{AD}Y_{AD}Z_{AD}$	Center of active docking plane	+ X_{AD} : closing direction, + Y_{AD} : line of symmetry, through petal number 3 + Z_{AD} : make right coordinate system, (see Figure 3.3.1.1-1)	<ul style="list-style-type: none"> • Docking mechanism movement description relative to active docking/HCS mating plane • Contact interaction analysis of HCS elements
1.6	Coordinate system of passive docking/HCS mating plane	$X_{PD}Y_{PD}Z_{PD}$	Center of passive docking plane	$X_{PD}Y_{PD}Z_{PD}$ – according to $X_{AD}Y_{AD}Z_{AD}$	
2. Coordinate systems of docking objects					
2.1	Motion coordinate system of active object (1)	$X_1Y_1Z_1$	At the active object CG	+ X_1 : closing direction, + Y_1 : according to + Y_{AD} + Z_1 : make right coordinate system, (see Figure 3.3.1.1-1 and Figure 3.3.1.1-2)	<ul style="list-style-type: none"> • Objects motion description relative to inertial coordinate system • Active object motion description relative to passive object
2.2	Motion coordinate system of passive object (2)	$X_2Y_2Z_2$	At the passive object CG	$X_2Y_2Z_2$ – according $X_1Y_1Z_1$ by zero mis-alignments	

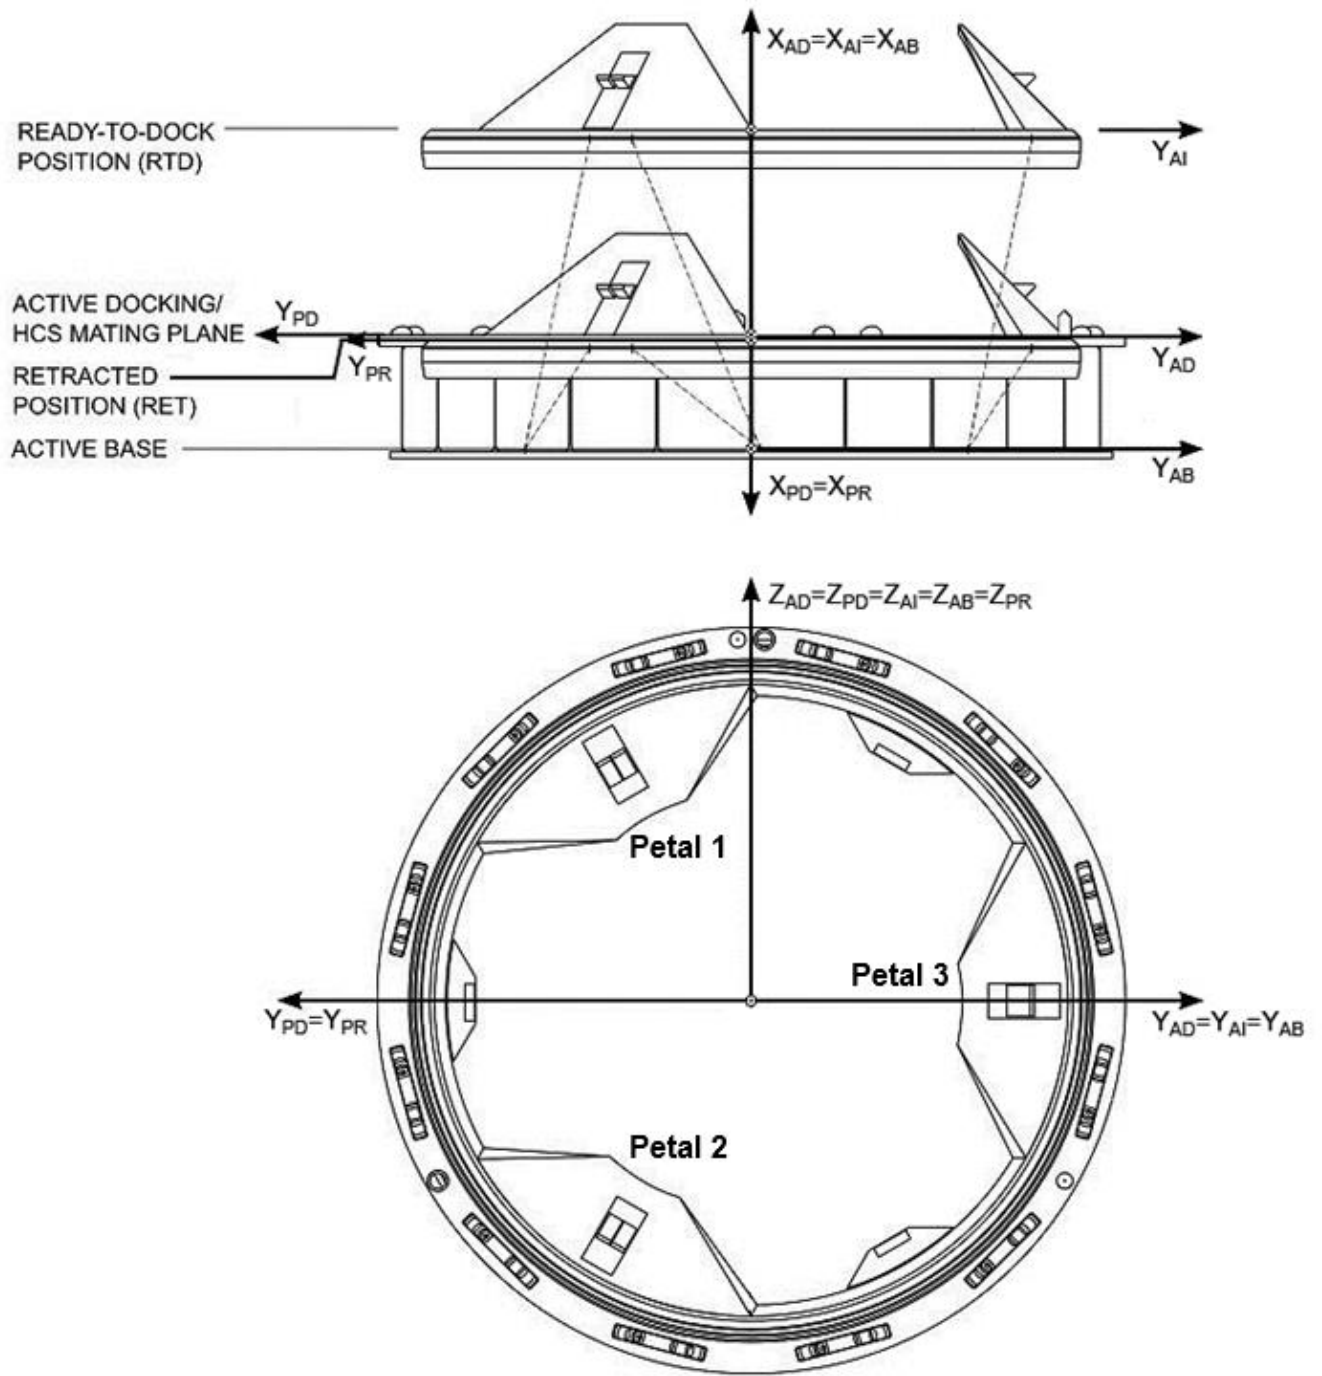


FIGURE 3.3.1.1-1 COORDINATE SYSTEMS OF DOCKING SYSTEM

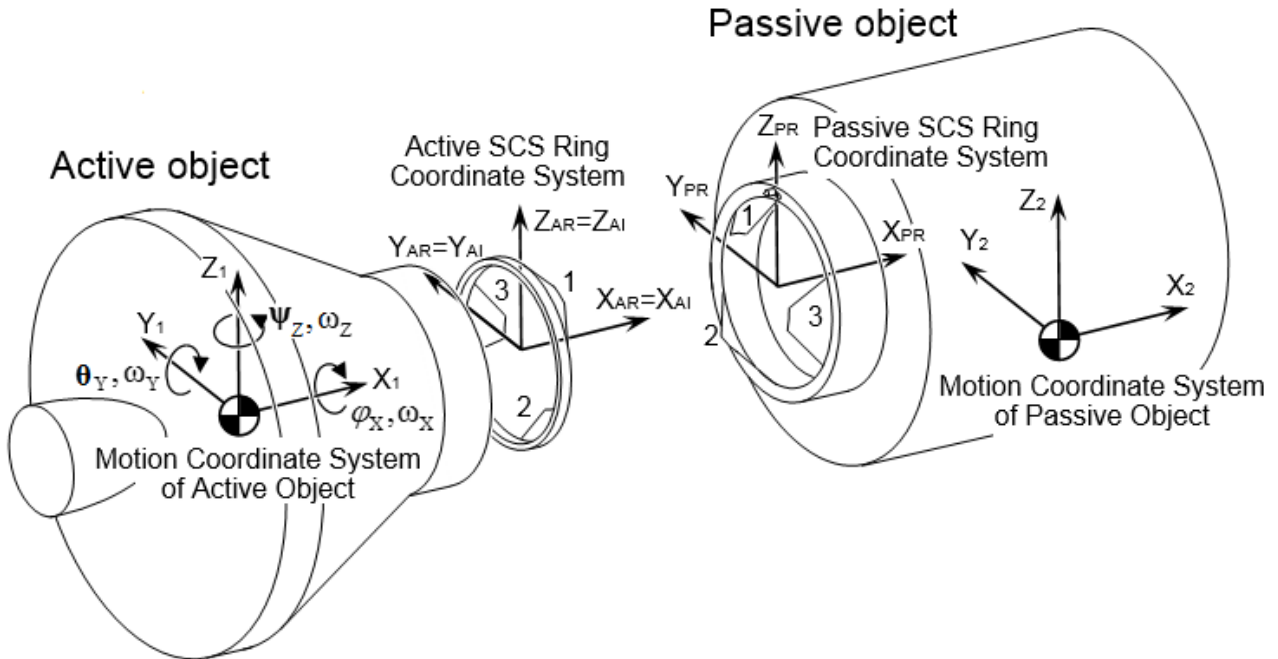


FIGURE 3.3.1.1-2 COORDINATE SYSTEM OF DOCKING OBJECTS (ACTIVE AND PASSIVE)

TABLE 3.3.1.1-2 INITIAL CONTACT CONDITIONS

Initial Condition	Limiting Value
Closing (axial) rate	0.05 to 0.10 m/sec
Lateral (radial) rate	0.04 m/sec
Pitch/Yaw rate	0.20 deg/sec (vector sum of pitch/yaw rate)
Roll rate	0.20 deg/sec
Lateral (radial) misalignment	0.10 m
Pitch/Yaw misalignment	4.0 deg (vector sum of pitch/yaw)
Roll Misalignment	4.0 deg

Notes:

1. Initial contact conditions are independent and are to be applied simultaneously, with the exception that the lateral rate at the vehicle cg resulting from the combination of lateral (radial) rate and the pitch/yaw angular rate should not exceed the lateral (radial) rate limit.
2. Mean closing (axial) rate may be adjusted depending on vehicle mass combinations. Refer to Table 3.3.1.2-1.
3. Post contact thrust may be used to achieve necessary capture performance.
4. Lateral (radial) misalignment is defined as the minimum distance between the center of the active soft capture ring and the longitudinal axis of the passive soft capture ring at the moment of first contact between the guide petals.

3.3.1.2 VEHICLE MASS PROPERTIES

To increase the probability of successful docking between different spacecraft, it is recommended that IDSS-compliant mechanisms capture and attenuate vehicles with the mass properties shown in Table 3.3.1.2-1, Vehicle Mass Properties. The set of design case vehicle mass properties provided in Table 3.3.1.2-1 represents the values used in the derivation of the loads defined in Table 3.3.1.4-1 and Table 3.3.1.4-2.

TABLE 3.3.1.2-1 VEHICLE MASS PROPERTIES

Article	Mass (kg)	Moment of Inertia (kg*m ²)						Coordinates of the Hard Capture System Mating Plane Center (m)		
		I _{xx}	I _{yy}	I _{zz}	I _{xy}	I _{xz}	I _{yz}	X	Y	Z
IDSS-350T	3.50E+5	1.15E+8	6.20E+7	1.65E+8	-2.30E+6	-5.00E+5	-4.60E+5	20.0	0	2
IDSS-25T	25 000	70 000	169 000	169 000	0	0	0	5.4	0	0
IDSS-20T	20 000	55 000	135 000	135 000	0	0	0	4.3	0	0
IDSS-15T	15 000	41 000	71 000	71 000	0	0	0	4.1	0	0
IDSS-10T	10 000	17 000	42 000	42 000	0	0	0	3.5	0	0
IDSS-5T	5 000	3 400	18 000	18 000	0	0	0	2.3	0	0

Notes:

1. Moments of inertia (MOI) are about center of gravity (CG) and products of inertia (POI) are positive integral.
2. Mass properties defined in coordinate system located at CG with X-axis along vehicle longitudinal axis and positive toward the docking interface.

3.3.1.3 VEHICLE MOTION LIMITS

Reserved.

TABLE 3.3.1.3-1 VEHICLE MOTION LIMITS

Reserved.

3.3.1.4 LOADS

The active SCS of IDSS-compliant mechanisms shall meet all of its functional and performance requirements without exceeding the loads defined in Table 3.3.1.4-1 and Table 3.3.1.4-2.

TABLE 3.3.1.4-1 SCS MAXIMUM INTERFACE LOADS

Load	Limiting Value
Tension	3 900 N
Compression (Static)	3 500 N
Compression (Dynamic, up to 0.1sec)	6 500 N
Shear	3 200 N
Bending	2 800 N*m
Torsion	1 500 N*m
Notes: 1. Values are design limit loads. 2. Values are defined at the center of the SCS mating plane (Figure 3.1.1.1-1). 3. Values are 3σ maxima and are to be applied simultaneously, not to exceed the component values shown in Table 3.3.1.4-2. 4. Shear loads may be applied in any direction in the SCS mating plane. 5. Bending moment may be applied about any axis in the SCS mating plane.	

TABLE 3.3.1.4-2 SCS MAXIMUM COMPONENT LOADS

Load	Limiting Value			
Mechanical Latch Striker Tension	3 000 N			
Magnetic Latch Striker Tension	2 300 N			
Striker (Ring to Ring) Compression	3 000 N			
Petal Edge Length	0%	10%	60%	80%
Petal Contact Loads	3 500 N	2 300 N	2 300 N	1 000 N
Notes: 1. Values are design limit loads. 2. The petal contact load is to be applied to the petal edge from the root of the petal to 80% of the petal length. 3. The petal contact load is to be applied to the outer face of the petal from the root of the petal to 60% of the petal length.				

3.3.2 HARD CAPTURE SYSTEM

3.3.2.1 MATED LOADS

IDSS-compliant mechanisms shall certify to the loads shown in Table 3.3.2.1-1, and Table 3.3.2.1-2, HCS Mated Load Sets, for design loads, as a minimum. These loads are applied at the center of the HCS interface, as defined in Figure 3.2.3-1.

TABLE 3.3.2.1-1 HCS MAXIMUM MATED LOADS

Load Set	Mated ISS	Trans-Lunar
Maximum Design Pressure	1 100 hPa	0 hPa
Seal Closure Force	97 150 N	97 150 N
Compressive Axial Load	17 700 N	300 000 N
Tensile Axial Load	17 700 N	100 000 N
Shear Load	16 700 N	10 000 N
Torsion Moment	15 000 Nm	15 000 Nm
Bending Moment	68 700 Nm	40 000 Nm

TABLE 3.3.2.1-2 HCS MATED LOAD SETS


Load Set	Case 1	Case 2	Case 3	Case 4
Design Pressure	1 100 hPa	1 100 hPa	1 100 hPa	0 hPa
Seal Closure Force	97 150 N	97 150 N	97 150 N	97 150 N
Compressive Axial	5 000 N	17 700 N	13 700 N	300 000 N
Tensile Axial Load	5 000 N	17 700 N	13 700 N	100 000 N
Shear Load	5 000 N	14 800 N	16 700 N	10 000 N
Torsion Moment	15 000 Nm	15 000 Nm	15 000 Nm	15 000 Nm
Bending Moment	65 300 Nm	39 200 Nm	68 700 Nm	40 000 Nm

Notes: (for Table 3.3.2.1-1 and Table 3.3.2.1-2)

- a) Values are design limit loads.
- b) Hard capture hook preload and tunnel stiffness will be such that, when under external loading within limits, there remains metal-to-metal contact in the local vicinity of the hooks.
- c) Shear loads may be applied in any direction in the HCS mating plane.
- d) Bending moment may be applied about any axis in the HCS mating plane.
- e) The outer seal bead is to be used for all pressure calculations.
- f) Load cases are defined in Table 3.3.2.1-2 and Table 3.2.2.1-1 is a summary of the maximum loads.
- g) Case descriptions:
 Case 1 – Attitude control by Orbiter-sized vehicle, combined with crew activity.
 Case 2 – Interface loads due to ISS segment berthing.
 Case 3 – Orbiter-sized vehicle translation with payload attached to ODS.
 Case 4 – Unpressurized high axial tension load case; modified from Constellation Trans-lunar Injection loads analysis.

3.4 RESOURCE TRANSFER UMBILICALS

The IDSS umbilical connectors transfer resources between two docked vehicles. Currently, connectors are only defined to transfer power, data, and a ground safety wire. Future revisions of this IDD may add other resources such as water source and water return capability, fuel, tank pressurization, and oxidizer transfer capability. All umbilical connectors shall be mechanized such that they are recessed below the docking mating plane during docking, and then are driven to mate after docking hard capture occurs. During undocking, the connectors are nominally deactivated and driven to the unmated state prior to unlatching the hooks. Keep Out Zones (KOZ) for legacy, current, and future umbilical hardware, as shown in Figure 3.4-1, Umbilical Connector Keep-Out Zones, shall be honored.

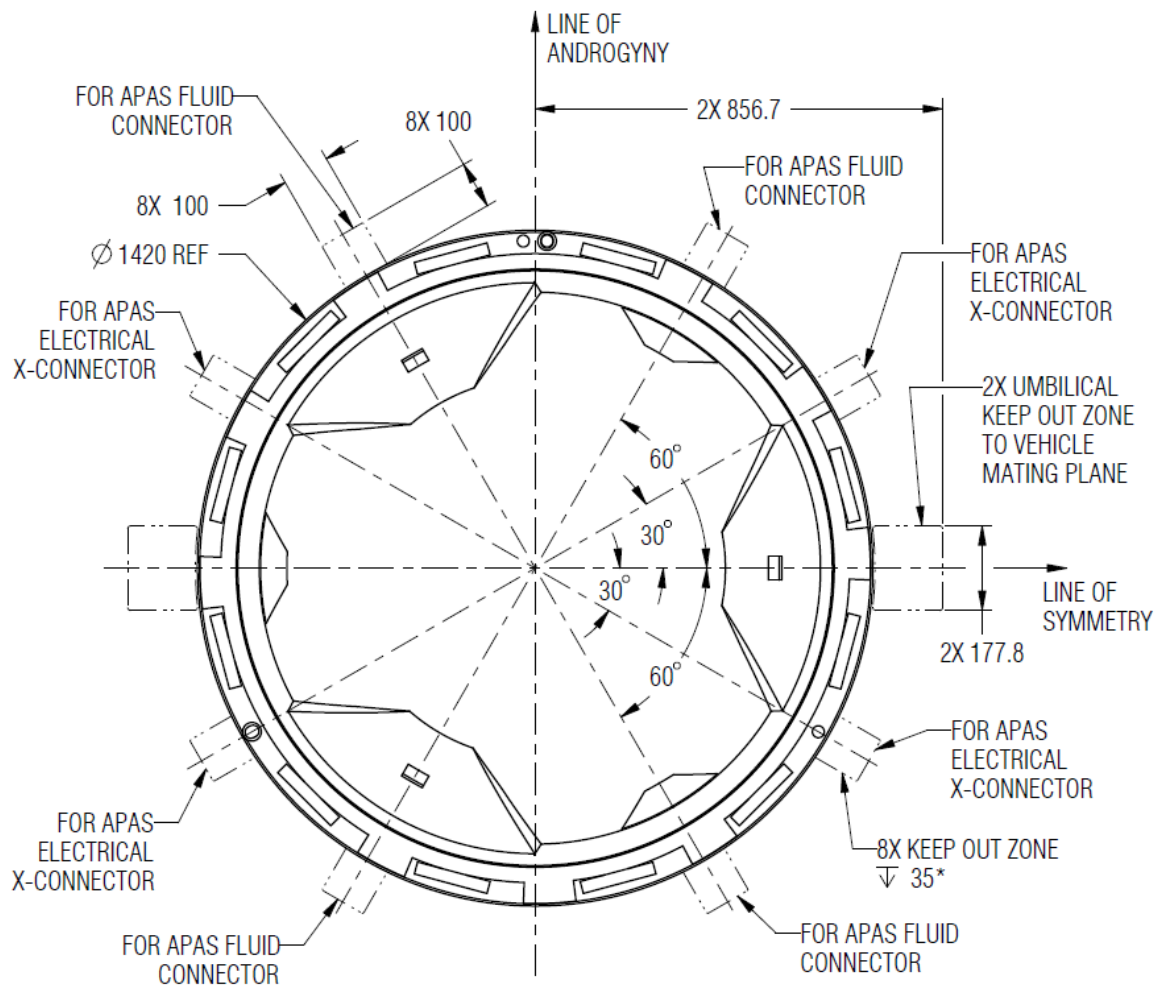

* The KOZ extends 35 mm below the HCS Mating Plane as a minimum. This depth is to accommodate the protrusion of 30mm of connectors on legacy systems.

FIGURE 3.4-1 UMBILICAL CONNECTOR KEEP-OUT ZONES

3.4.1 POWER AND DATA TRANSFER UMBILICAL

The standard Power/Data Transfer Umbilical (PDTU) transfers power and data in the same connector shell. The PDTU function is nominally accomplished using two connector systems for redundancy, and arranged to allow for androgynous operation.

3.4.1.1 FRAM CONNECTOR PART NUMBER

PDTU connectors are to be designed, manufactured, and tested to meet the ISS specification SSQ 22680, Connectors, Rectangular, (ORU), Space Quality, General Specification For, commonly called a Flight Releasable Attachment Mechanism (FRAM) connector. The FRAM connector part numbers which correspond to this PDTU definition are shown in Table 3.4.1.1-1, FRAM Connector Part Number. IDSS compliant systems shall use connectors that are, as a minimum, compatible with the interface dimensions and interface performance of these part numbers.

TABLE 3.4.1.1-1 FRAM CONNECTOR PART NUMBER

PART NUMBER	DESCRIPTION
SSQ 22680-021	Plug (Pins), FRAM Using Insert Arrangement K
SSQ 22680-022	Receptacle (Sockets), FRAM Using Insert Arrangement K

3.4.1.2 PDTU CONNECTOR OPERATION

The Plug PDTU Connector and Receptacle PDTU Connector (across the docking interface) shall be designed to mate to and demate from the opposing Plug PDTU Connector and Receptacle PDTU Connector as represented in Figure 3.4.1.2-1, PDTU Electro-Mechanical Actuator Concept of Operation.

NOTE: During docking operations, either a Plug PDTU Electro-Mechanical Actuator (EMA) or a Receptacle PDTU EMA is driven to mate the Electrical Resource Connector and trigger the Data Bus Switches.

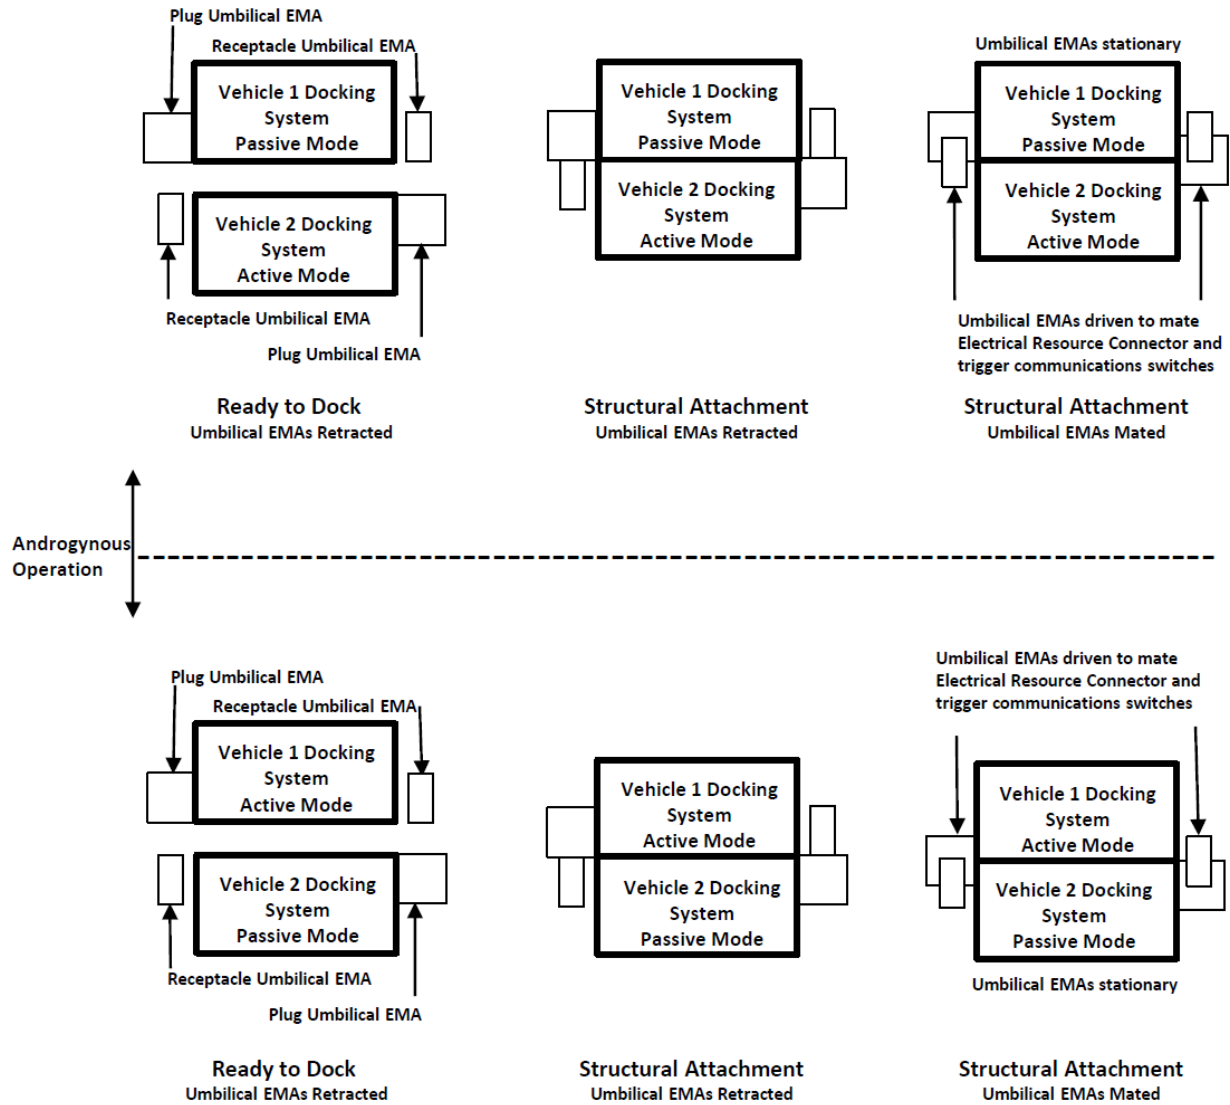


FIGURE 3.4.1.2-1 PDTU ELECTRO-MECHANICAL ACTUATOR CONCEPT OF OPERATION

3.4.1.3 CONNECTOR LOCAL COORDINATE SYSTEM

Each PDTU connector has an individual local coordinate system as represented in Figure 3.4.1.3-1, PDTU Connector Local Coordinate System Definition.


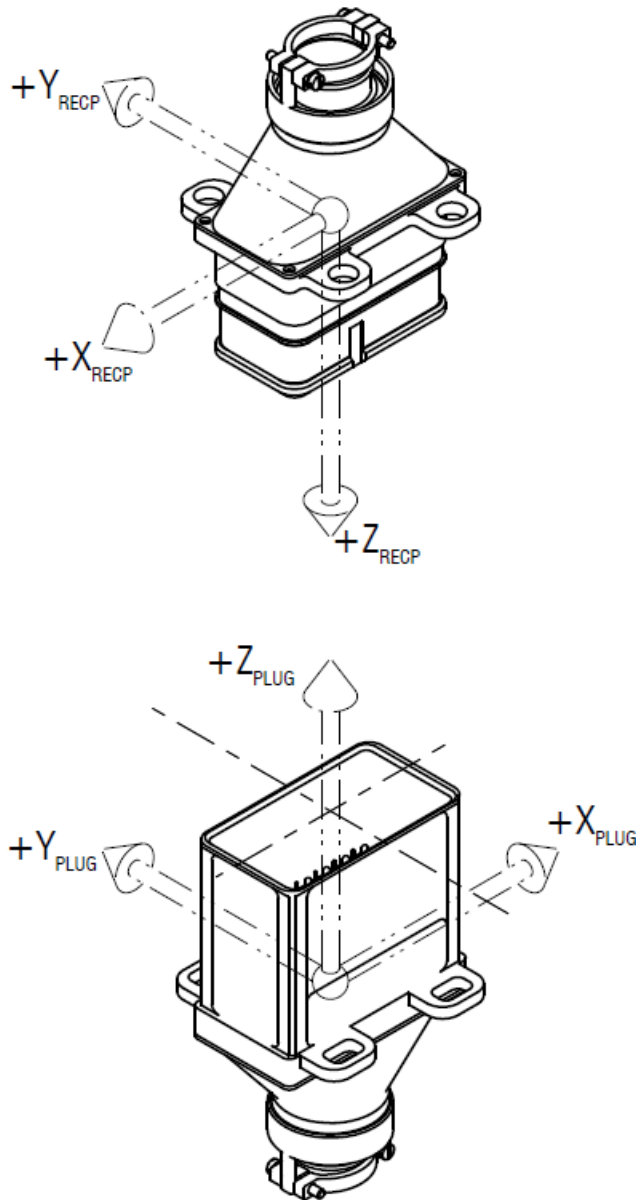


FIGURE 3.4.1.3-1 PDTU CONNECTOR LOCAL COORDINATE SYSTEM DEFINITION

3.4.1.4 LOCATING REQUIREMENTS

3.4.1.4.1 LATERAL MOUNTING REQUIREMENTS

Docking systems which implement the standard PDTU function shall locate two PDTU connectors, one receptacle and one plug, as shown in Figure 3.4.1.4.1-1, Standard Power/Data Transfer Umbilical Connectors.

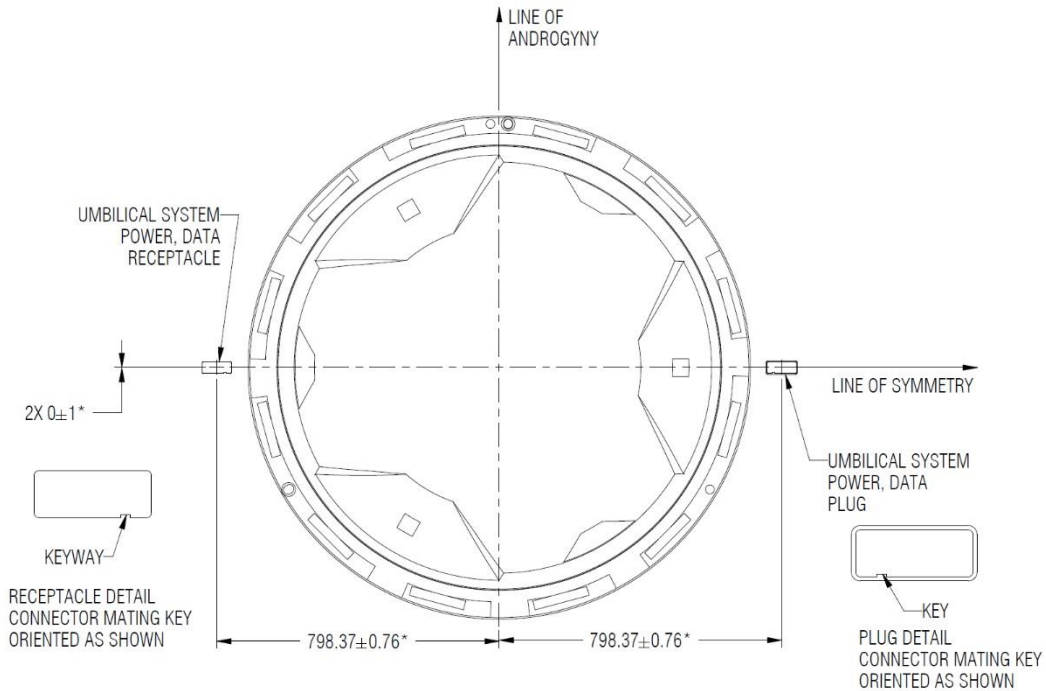

* Connector positional tolerances with respect to Line of Symmetry or Line of Androgyny.

FIGURE 3.4.1.4.1-1 STANDARD POWER/DATA TRANSFER UMBILICAL CONNECTORS

3.4.1.4.2 ROTATIONAL MOUNTING REQUIREMENTS

The Plug and Receptacle Connectors shall have a planar rotational tolerance of $\pm 1^\circ$ about the Z-axis.

3.4.1.4.3 CENTERLINE ANGULAR MOUNTING REQUIREMENTS

The Plug and Receptacle Connectors shall be mounted such that the connector centerline (Z-axis) is within a conic tolerance zone. The centerline shall be within 1° about the Z-axis with the apex of the cone being at the coordinate system origin as shown in Figure 3.4.1.4.3-1, Centerline Angular Mounting Requirements.


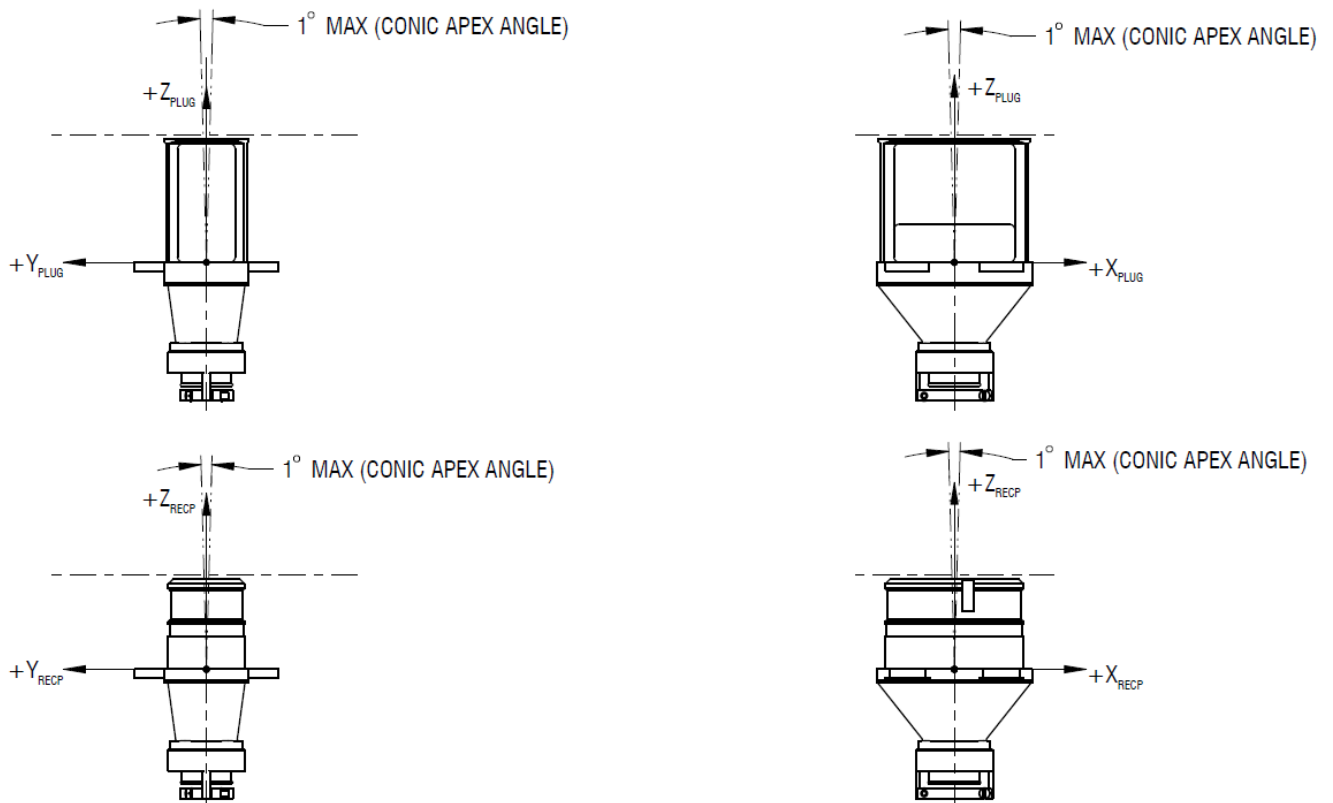


FIGURE 3.4.1.4.3-1 CENTERLINE ANGULAR MOUNTING REQUIREMENTS

3.4.1.4.4 ENGAGEMENT MECHANISM


The connector system mechanism translates the connector and a data bus switch striker to engage with the opposing side as shown in Figure 3.4.1.4.4-1, PDTU Mating Operation with Active Plug, and Figure 3.4.1.4.4-2, PDTU Mating Operation with Active Receptacle.

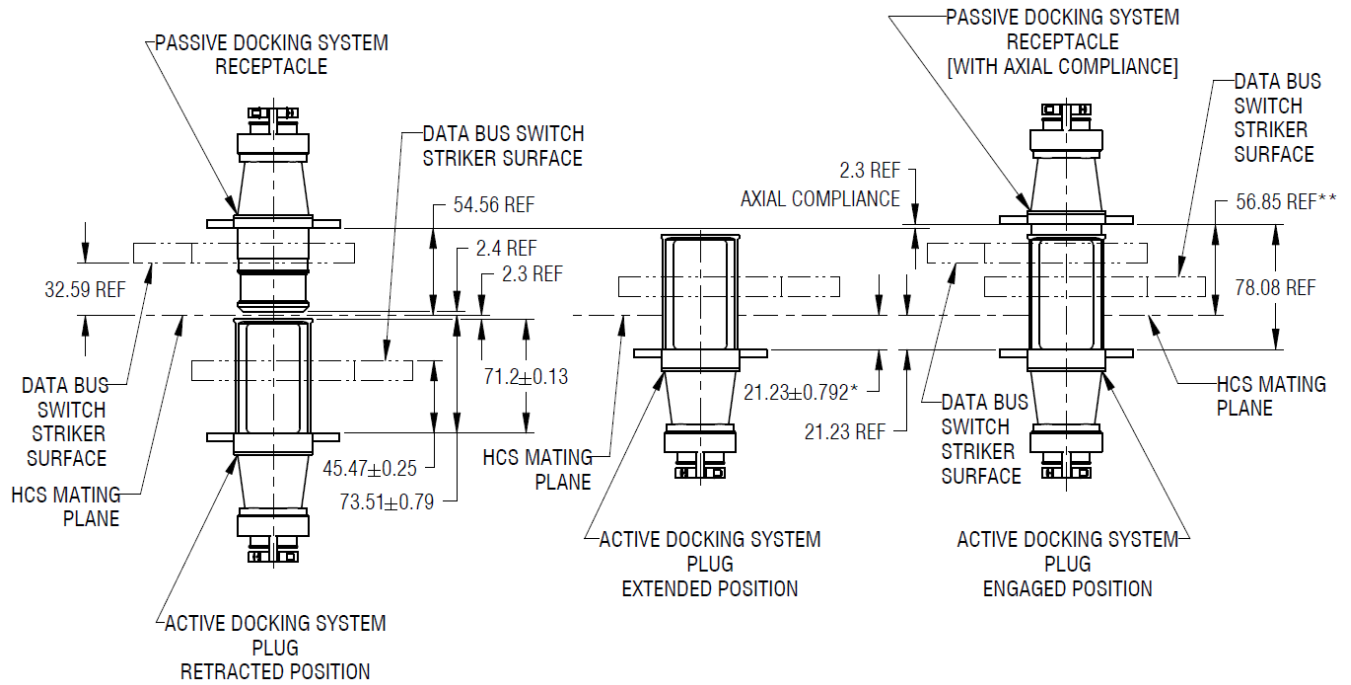

* Mechanism end of travel requirement with no mating connector present

** Final position for engaged receptacle including axial compliance

FIGURE 3.4.1.4.4-1 PDTU MATING OPERATION WITH ACTIVE PLUG

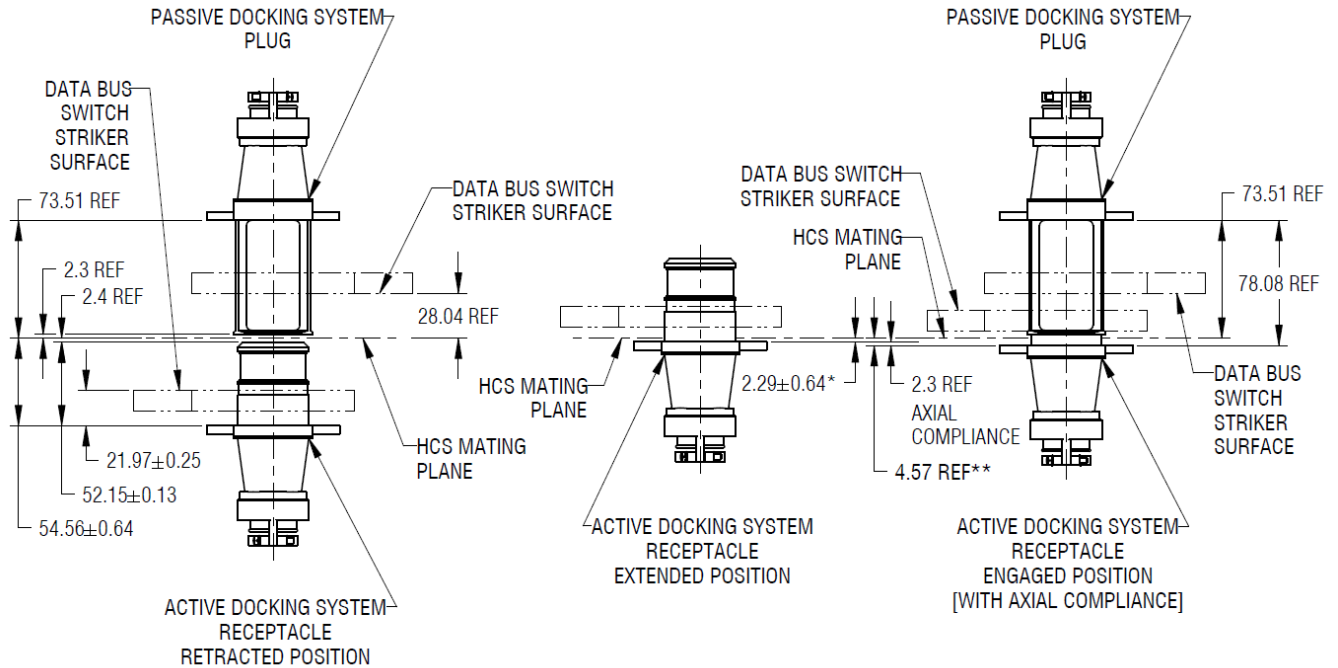

* Mechanism end of travel requirement with no mating connector present

** Final position for engaged receptacle including axial compliance

FIGURE 3.4.1.4.4-2 PDTU MATING OPERATION WITH ACTIVE RECEPTACLE

3.4.1.4.4.1 RETRACTED POSITION

The mechanism shall locate the active and passive connectors in the retracted position as shown in Figure 3.4.1.4.4-1 and Figure 3.4.1.4.4-2 prior to commencing docking or undocking operations.

3.4.1.4.4.2 EXTENDED POSITION

The mechanism shall provide sufficient stroke to meet the extended position in order to activate the axial compliance in the engaged position as shown in Figure 3.4.1.4.4-1 and Figure 3.4.1.4.4-2 after structural connection is achieved.

3.4.1.5 COMPENSATION OF MISALIGNMENT

During mating operations of the PDTU connectors, planar, angular, and axial system level (across the docking interface) misalignments may be present. The PDTU will have misalignment mechanisms that compensate for combinations of lateral and axial misalignments via mechanical compliance, and provide re-centering of the connector when the PDTU is disconnected.

3.4.1.5.1 PLANAR MISALIGNMENT COMPLIANCE

The Plug Connector shall possess a 3 degree of freedom (3-DOF) planar misalignment mechanism to compensate for lateral and rotational misalignments.

3.4.1.5.1.1 LATERAL MISALIGNMENT COMPLIANCE

The planar misalignment mechanism shall provide a minimum lateral misalignment compliance in both the X and Y directions when subject to zero rotational misalignment. See Figure 3.4.1.5.1.1-1, Plug Lateral Compliance in X Direction, and Figure 3.4.1.5.1.1-2, Plug Lateral Compliance in Y Direction.

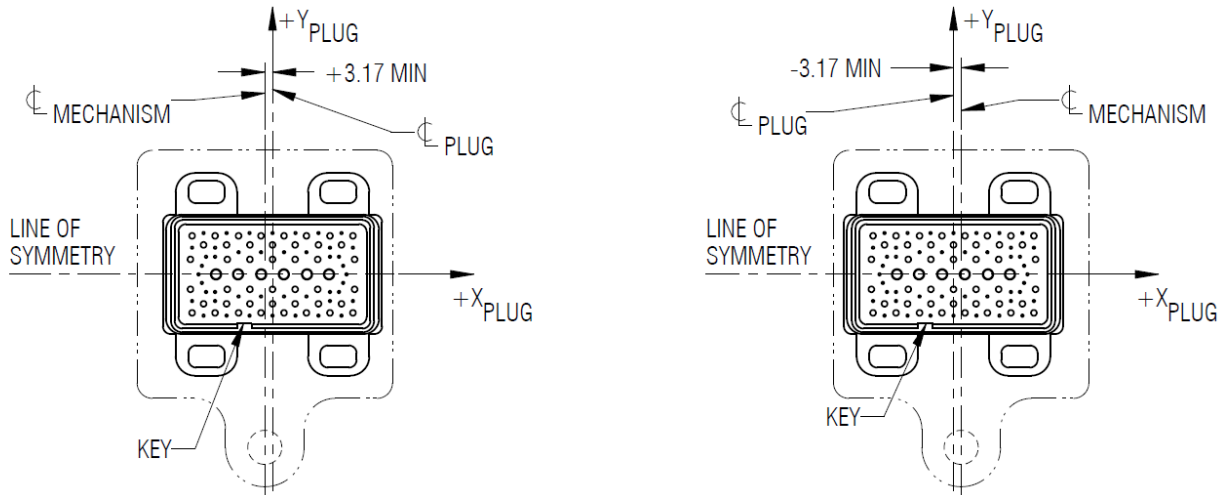


FIGURE 3.4.1.5.1.1-1 PLUG LATERAL COMPLIANCE IN X DIRECTION

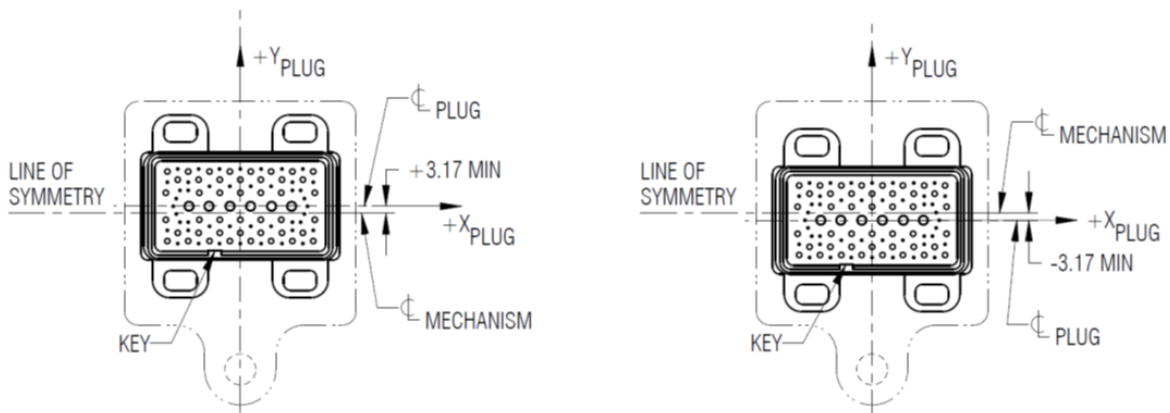


FIGURE 3.4.1.5.1.1-2 PLUG LATERAL COMPLIANCE IN Y DIRECTION

3.4.1.5.1.2 ROTATIONAL MISALIGNMENT COMPLIANCE

The planar misalignment mechanism shall provide a minimum rotational misalignment compliance when subject to zero lateral misalignment. See Figure 3.4.1.5.1.2-1, Plug Rotational Compliance about the Z axis.

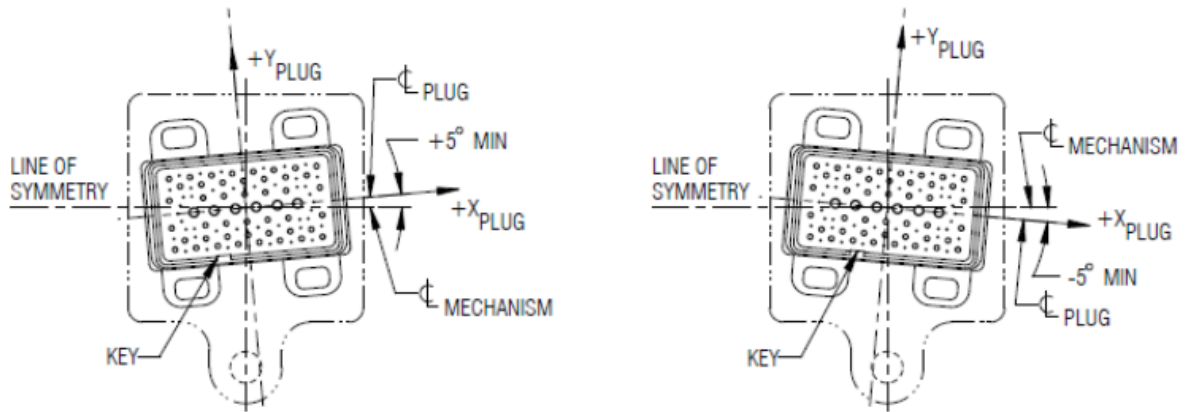


FIGURE 3.4.1.5.1.2-1 PLUG ROTATIONAL COMPLIANCE ABOUT THE Z AXIS

3.4.1.5.1.3 RE-CENTERING CAPABILITY

3.4.1.5.1.3.1 RE-CENTERING LATERAL POSITION

The planar misalignment mechanism shall return the PDTU Connector to its neutral position within the positional tolerance shown in Figure 3.4.1.4.1-1.

3.4.1.5.1.3.2 RE-CENTERING ROTATIONAL POSITION

The planar misalignment mechanism shall return the PDTU Connector to its neutral position within $\pm 1^{\circ}$ as measured from the Plug PDTU mechanism's centerline.

3.4.1.5.1.3.3 RE-CENTERING FORCE

The planar misalignment mechanism lateral re-centering force, at the maximum displacement, and while engaging with the opposing connector, shall be < 64 N.

3.4.1.5.2 AXIAL MISALIGNMENT COMPLIANCE

The Receptacle Connector shall possess a 3-DOF axial misalignment mechanism to accommodate the need for additional stroke along the insertion axis (Z-axis), and rotational misalignments about the X and Y-axes.

3.4.1.5.2.1 AXIAL COMPLIANCE

The axial misalignment mechanism shall provide axial compliance as shown in Figure 3.4.1.5.2.1-1, Receptacle Axial Compliance, to ensure the proper connector engagement per SSQ 22680 Figure 2g (and shown as reference in Figure 3.4.1.4.4-1 and Figure 3.4.1.4.4-2).

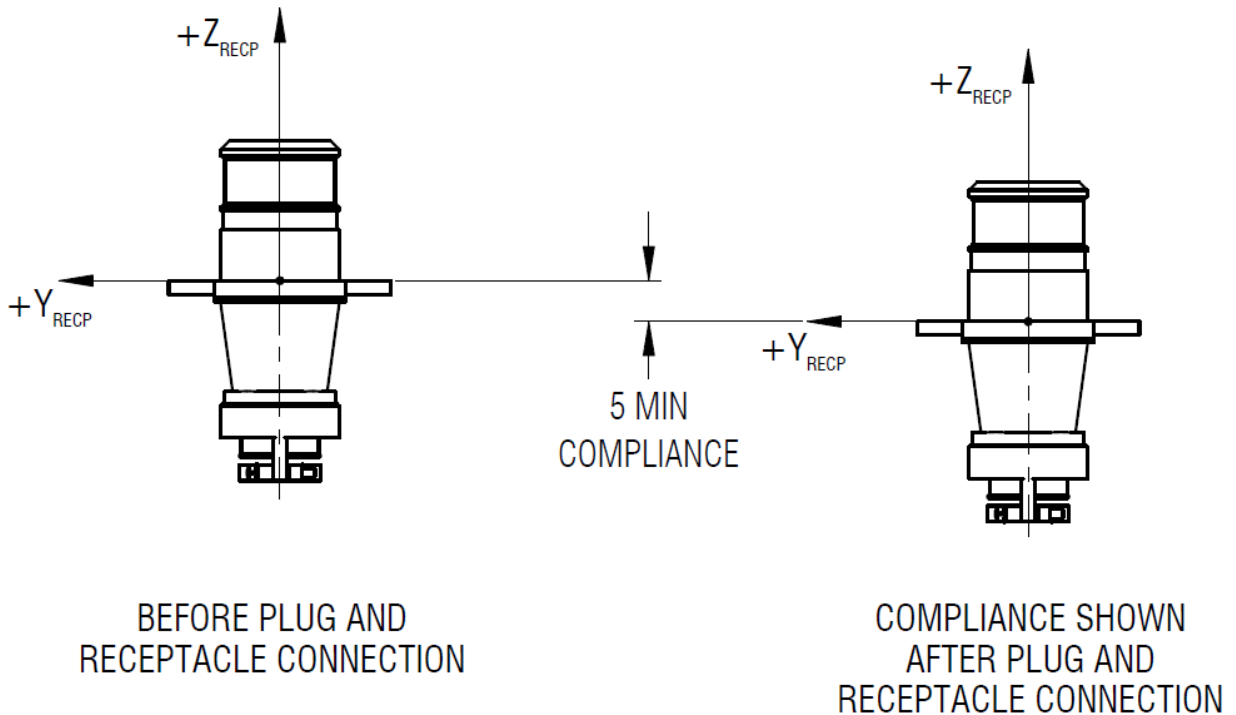


FIGURE 3.4.1.5.2.1-1 RECEPTACLE AXIAL COMPLIANCE

3.4.1.5.2.2 MINIMUM RESISTIVE FORCE

The axial misalignment mechanism must provide a minimum resistive force to ensure sufficient insertion force. The minimum resistive force shall be 20% greater than the maximum force required for the set of pins in the connector as determined from SSQ 22680 Table 4. For example, the minimum resistive force requirement for an IDSS IDD compliant connector is 148 N, while the requirement for a fully populated connector is 406 N.

3.4.1.5.2.3 MAXIMUM CONNECTOR INSERTION FORCE

The axial misalignment mechanism must provide the maximum connector insertion force at the minimum compliance limit of the mechanism per paragraph 3.4.1.5.2.1. The maximum connector insertion force shall be < 650 N at a compliance of 5 mm. This force is 60% greater than the minimum resistive force for of a fully populated connector to assure mating under differential temperature conditions as specified in SSQ 22680 paragraph 3.3.10.2.

3.4.1.5.2.4 ANGULAR COMPLIANCE

The axial misalignment mechanism shall provide the capability to align the connectors for proper mating when angular misalignment exists between connector insertion axes. The maximum angular misalignment is defined as a conic tolerance zone where the centerline is within $\pm 1^\circ$ about the Z-axis with the apex being at the coordinate system origin. See Figure 3.4.1.5.2.4-1, Receptacle Angular Compliance about X and Y-axes.

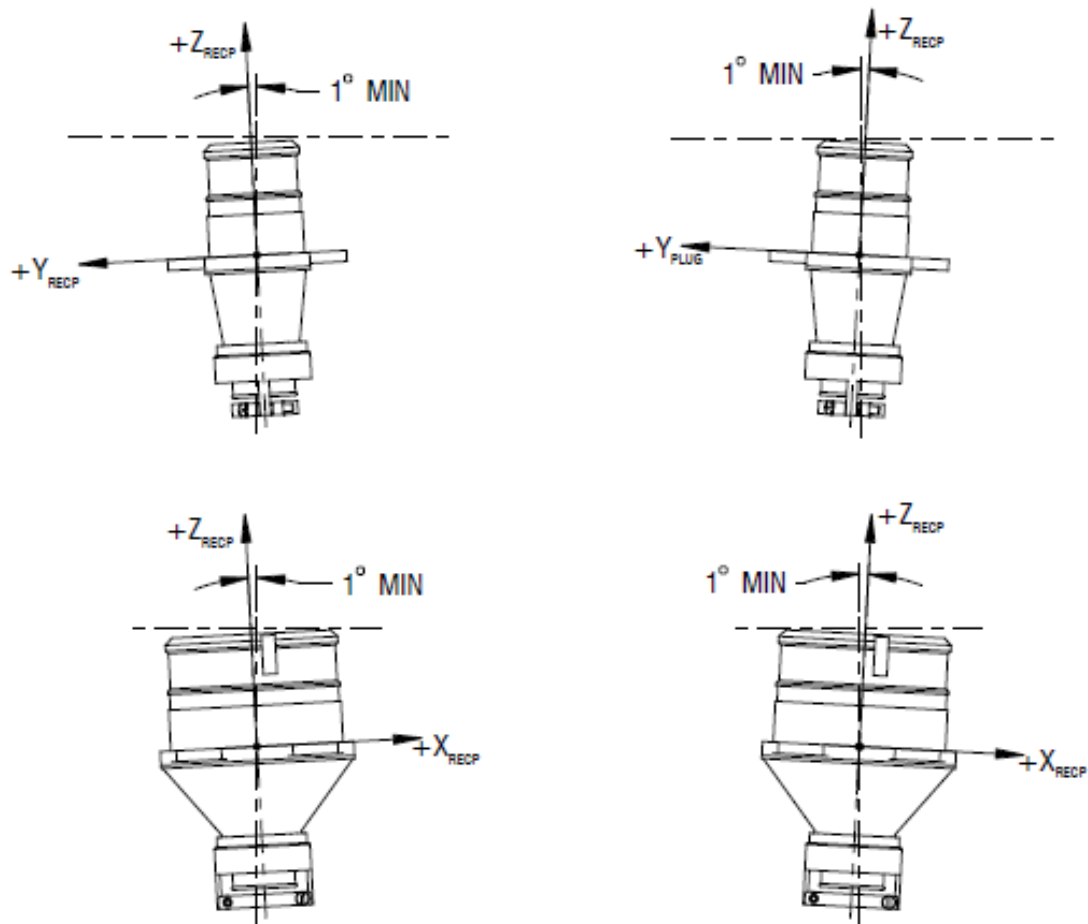


FIGURE 3.4.1.5.2.4-1 RECEPTACLE ANGULAR COMPLIANCE ABOUT X AND Y-AXES

3.4.1.5.3 MISALIGNMENT KEEP OUT ZONE

Any hardware location or mechanism behavior designed to satisfy misalignment compensation requirements shall not exceed the KOZ shown in Figure 3.4-1.

3.4.1.6 STRUCTURAL REQUIREMENTS

3.4.1.6.1 STRUCTURAL STIFFNESS REQUIREMENT

The mechanism assembly must have sufficient structural stiffness to ensure the opposing connectors can engage properly. The connector origin shall deflect ≤ 0.13 mm axially ($-Z_{RECP}$ and $-Z_{PLUG}$ direction per Figure 3.4.1.3-1) when subjected to the maximum insertion force of 650 N.

3.4.1.6.2 STRUCTURAL LOAD REQUIREMENT

The mechanism assembly must have sufficient structural strength when subjected to the highest compression force exerted by the mating active mechanism. The

mechanism assembly shall be capable of accommodating a maximum axial force of 3025 N.

3.4.1.7 DATA BUS SWITCH STRIKER

The PDTU connector carrier shall provide a strike surface to trigger a plunger-style switch on the opposing PDTU connector carrier.

Note: The striker is mounted to the axial translation carriage, and does not move as the connector complies during insertion.

3.4.1.7.1 PLANAR MOUNTING REQUIREMENTS

The Data Bus Switch Striker shall be located laterally per Figure 3.4.1.7.1-1, Data Bus Switch Striker Geometry.



* Minimum diameter required for the striker at the theoretical location

** The boxed dimension is a basic dimension to indicate the theoretical position of the striker

FIGURE 3.4.1.7.1-1 DATA BUS SWITCH STRIKER GEOMETRY

3.4.1.7.2 AXIAL MOUNTING REQUIREMENTS

The Data Bus Switch Striker shall be located axially with respect to the associated connector as shown in Figure 3.4.1.4.4.1-1.

3.4.1.7.3 AXIAL LOAD CAPABILITY

The data bus striker shall accommodate a maximum force of 54 N from the data bus switch.

3.4.1.8 PDTU CONNECTOR SHELL CONFIGURATION

The FRAM connector is legacy hardware whose specification was generated and analyzed using U.S. Customary Units to specify dimensional fits and tolerances. The

connector plug, shell, and pin dimensions are given in the U.S. Customary Unit system in order to retain the accuracy of these fits, as specified in SSQ 22680. Conversion to metric dimensions and fits is up to each implementer.

3.4.1.8.1 PDTU RECEPTACLE SHELL DIMENSIONS

The PDTU receptacle docking interface shall meet the dimensions specified in Figure 3.4.1.8.1-1, PDTU Receptacle Dimensions.

3.4.1.8.2 PDTU PLUG SHELL DIMENSIONS

The PDTU plug docking interface shall meet the dimensions specified in Figure 3.4.1.8.2-1, PDTU Plug Dimensions.

IDSS IDD Revision E
October 2016

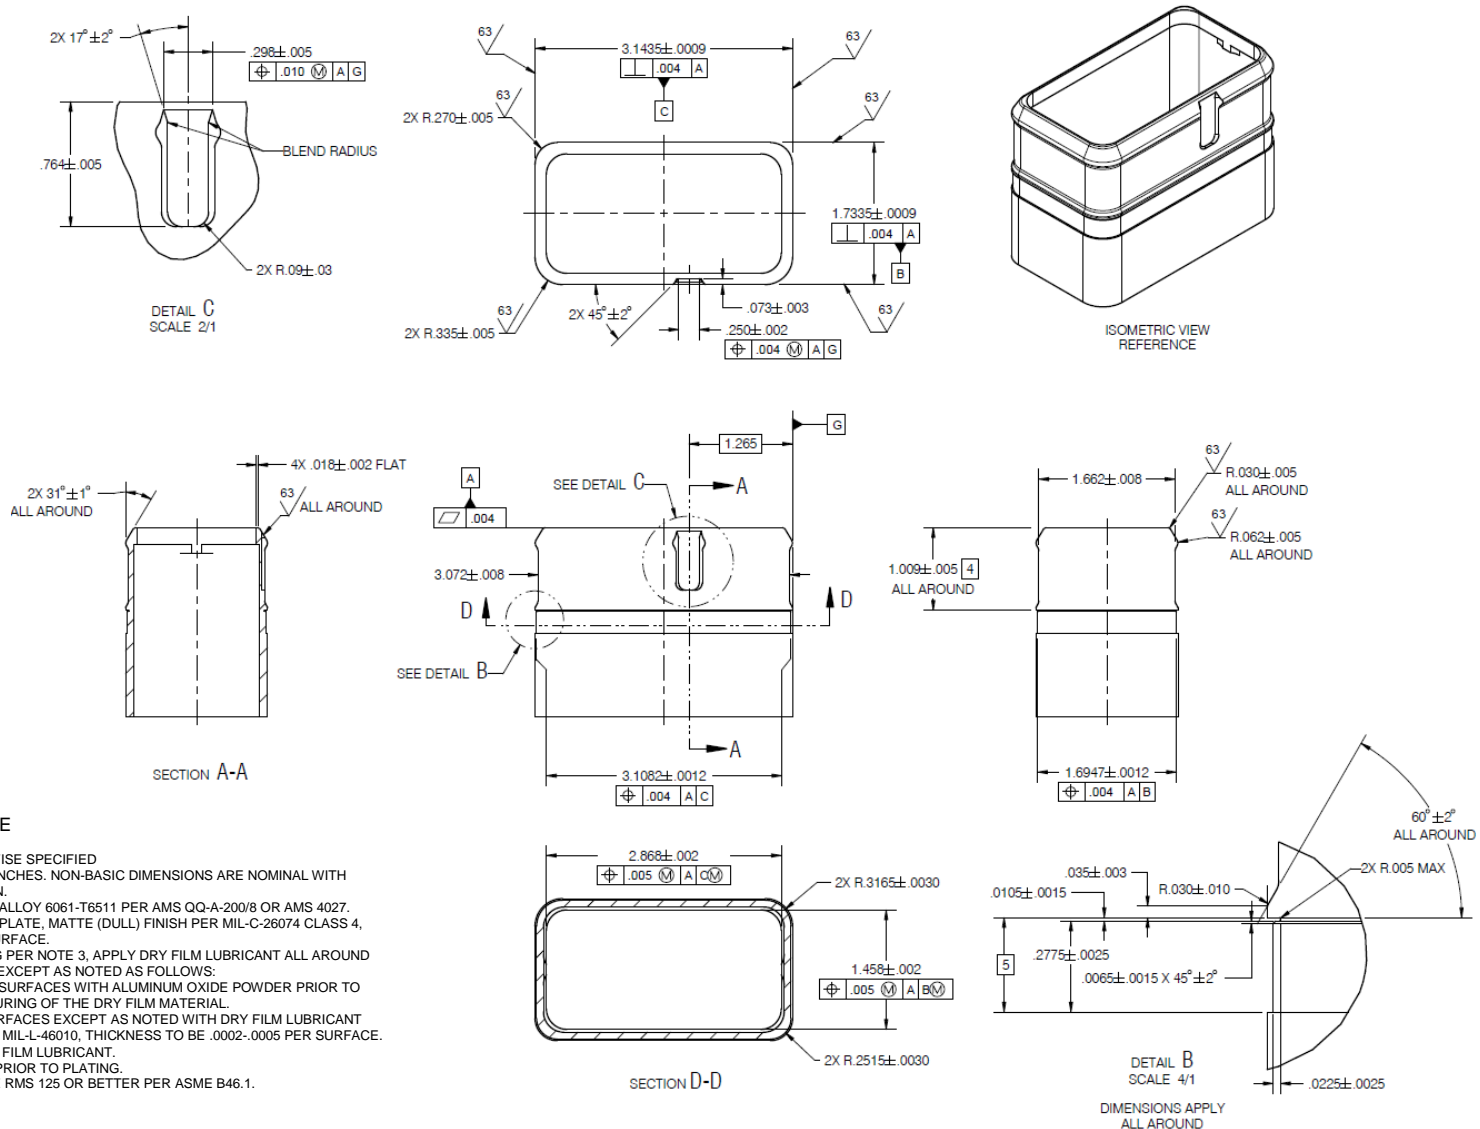


FIGURE 3.4.1.8.1-1 PDTU RECEPTACLE DIMENSIONS

IDSS IDD Revision E October 2016

PDTU PLUG

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS ARE INCHES. NON-BASIC DIMENSIONS ARE NOMINAL WITH TOLERANCE TBD.
2. MATERIAL: ALUMINUM ALLOY 6061-T6511 PER AMS QQ-A-200/8 OR AMS 4027.
3. ELECTROLESS NICKEL PLATE, MATTE (DULL) FINISH PER MIL-C-26074 CLASS 4, .0015-.0018 THK PER SURFACE.
4. DIMENSIONS APPLIED PRIOR TO PLATING.
5. SURFACE FINISH TO BE RMS 125 OR BETTER PER ASME B46.1.
- 6 MATERIAL: STAINLESS STEEL TYPE 303 CONDITION A PER ASTM A582. CLEAN AND PASSIVATE PER MIL-DTL-5002 AND AMS 2700 TYPE 2.

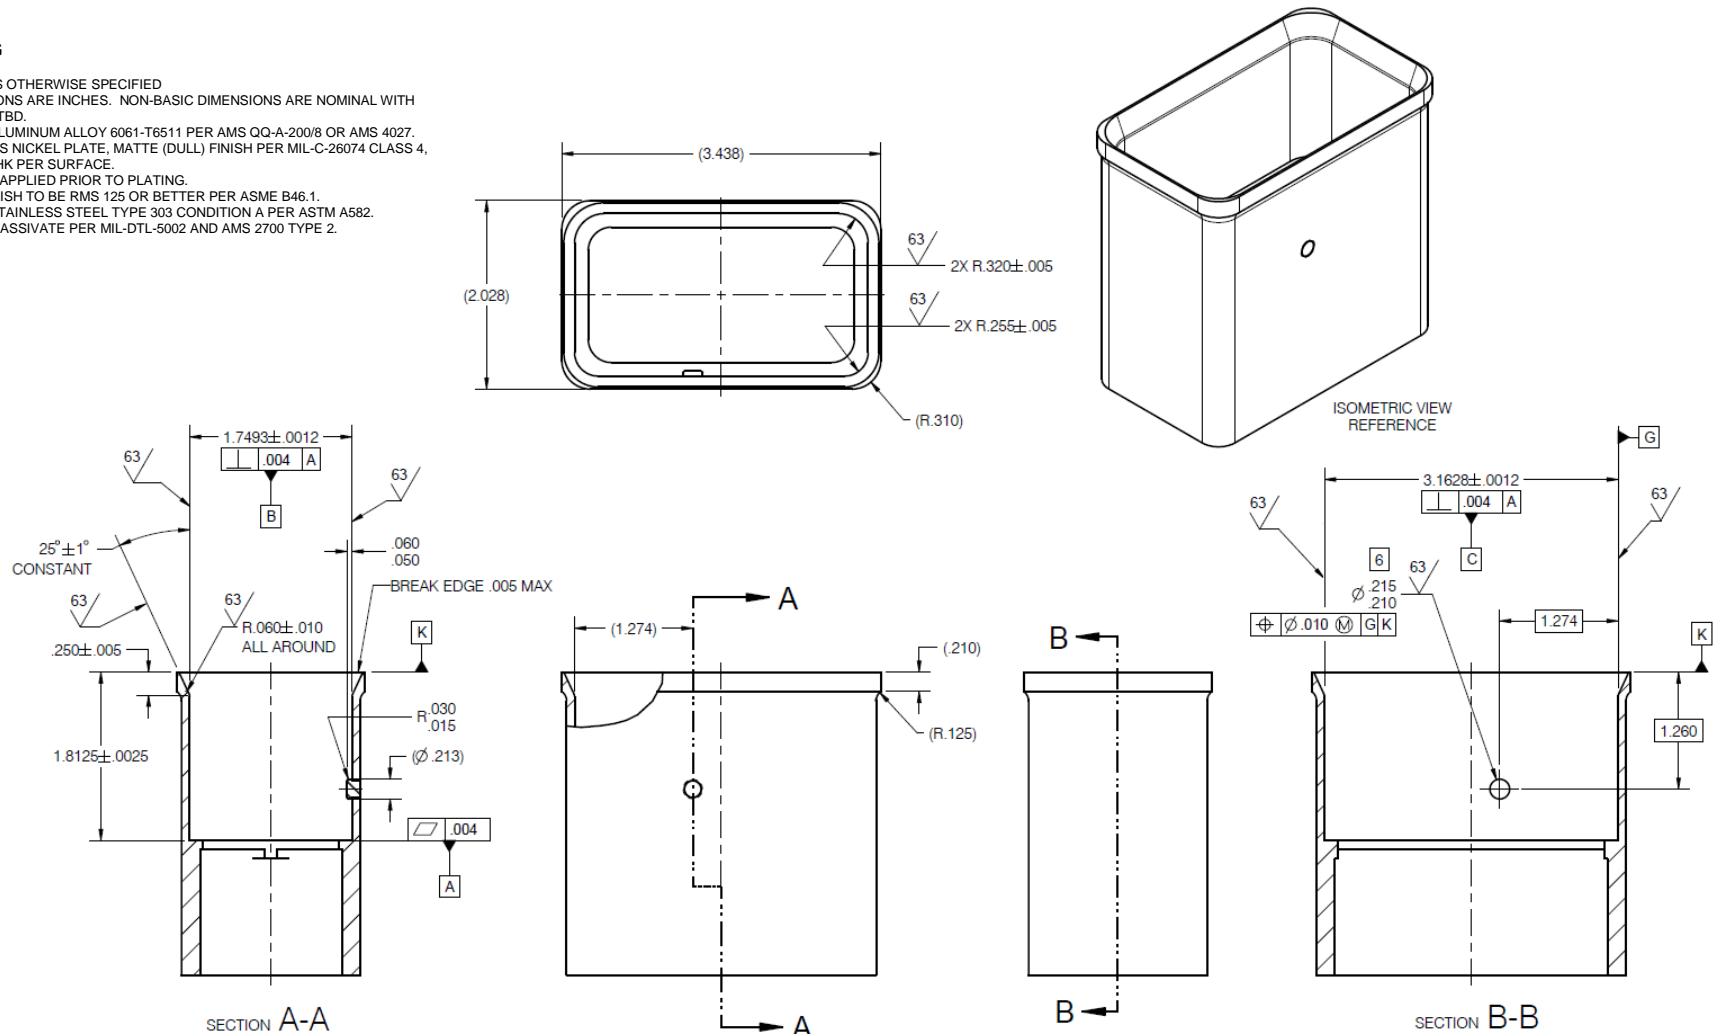


FIGURE 3.4.1.8.2-1 PDTU PLUG DIMENSIONS

3.4.1.9 PDTU PIN CONFIGURATION

The IDSS PDTU connectors shall utilize the connector pinout assignments, as designated in Table 3.4.1.9-1, IDSS PDTU Connector Pinouts, Table 3.4.1.9-2, IDSS PDTU Connector Pinouts Definitions, and in Figure 3.4.1.9-1, Receptacle (Sockets) – Front Face, and Figure 3.4.1.9-2, Plug (Pins) – Front Face. All pins and receptacles identified in Table 3.4.1.9-1 shall be installed. Designers may choose to not install individual pins and their receptacles that are not assigned. Individual pins which are not assigned may be utilized for other mission-specific purposes mutually agreed to by the docking spacecraft partners, while verifying that the signals do not cause issues (for example, electromagnetic interference, thermal, etc.) with the standard IDSS functionality, and are shown in Table 3.4.1.9-3, Unassigned IDSS PDTU Connector Pinouts. For convenience, metric equivalents of key pin and receptacle dimensions can be found in Appendix E, E.2.0.

Note that specific functions must be coordinated and documented between the two vehicles (e.g., available power and energy supplied from and to each vehicle, electrical loads, EMI suppression, which vehicle is the MIL-STD-1553 bus master, etc.).

The NASA ISS International Docking Adapter (IDA) utilizes a PDTU pin configuration which pre-dates the IDSS standard agreement, but it is still compatible with this IDSS standard. Details of the differences are given in Appendix D, D.2.1.

TABLE 3.4.1.9-1 IDSS PDTU CONNECTOR PINOUTS (2 PAGES)

Plug Umbilical Power+Data			Receptacle Umbilical Power+Data		
PIN #	Size	SIGNAL	PIN #	Size	SIGNAL
42	8	120VDC_SysB	42	8	120VDC_SysA
43	8	120VDC_RTN_SysB	43	8	120VDC_RTN_SysA
44	8	User_Def_VDC_SysB	44	8	User_Def_VDC_SysA
45	8	User_Def_VDC_RTN_SysB	45	8	User_Def_VDC_RTN_SysA
46	8	Ground Safety Wire_SysB	46	8	Ground Safety Wire_SysA
16	12	28VDC_SysB	16	12	28VDC_SysA
29	12	28VDC_RTN_SysB	29	12	28VDC_RTN_SysA
28	12	28VDC_SysB	28	12	28VDC_SysA
41	12	28VDC_RTN_SysB	41	12	28VDC_RTN_SysA
40	12	28VDC_SysB	40	12	28VDC_SysA
39	12	28VDC_RTN_SysB	39	12	28VDC_RTN_SysA
48	12	28VDC_SysB	48	12	28VDC_SysA
61	12	28VDC_RTN_SysB	61	12	28VDC_RTN_SysA
60	12	28VDC_SysB	60	12	28VDC_SysA
73	12	28VDC_RTN_SysB	73	12	28VDC_RTN_SysA
13	20	SysB_100BaseT_RX_P_BI_DB_P	13	20	SysA_100BaseT_TX_P_BI_DA_P

TABLE 3.4.1.9-1 IDSS PDTU CONNECTOR PINOUTS (2 PAGES)

Plug Umbilical Power+Data			Receptacle Umbilical Power+Data		
PIN #	Size	SIGNAL	PIN #	Size	SIGNAL
27	20	SysB_100BaseT_RX_N_BI_DB_N	27	20	SysA_100BaseT_TX_N_BI_DA_N
86	20	SysB_100BaseT_TX_P_BI_DA_P	86	20	SysA_100BaseT_RX_P_BI_DB_P
72	20	SysB_100BaseT_TX_N_BI_DA_N	72	20	SysA_100BaseT_RX_N_BI_DB_N
14	20	SysB_1GEth_BI_DC_P	14	20	SysA_1GEth_BI_DD_P
15	20	SysB_1GEth_BI_DC_N	15	20	SysA_1GEth_BI_DD_N
87	20	SysB_1GEth_BI_DD_P	87	20	SysA_1GEth_BI_DC_P
88	20	SysB_1GEth_BI_DD_N	88	20	SysA_1GEth_BI_DC_N
25	20	SysB_1553_BUS1_P	25	20	SysA_1553_BUS1_P
38	20	SysB_1553_BUS1_N	38	20	SysA_1553_BUS1_N
70	20	SysB_1553_BUS2_P	70	20	SysA_1553_BUS2_P
57	20	SysB_1553_BUS2_N	57	20	SysA_1553_BUS2_N
19	20	SysB_1553_BUS3_P	19	20	SysA_1553_BUS3_P
32	20	SysB_1553_BUS3_N	32	20	SysA_1553_BUS3_N
51	20	SysB_1553_BUS4_N	51	20	SysA_1553_BUS4_N
64	20	SysB_1553_BUS4_P	64	20	SysA_1553_BUS4_P
21	20	SysB_Umb_Plug_LoopBack_P	21	20	Short_to_pin_34
34	20	SysB_Umb_Plug_LoopBack_N	34	20	Short_to_pin_21
53	20	Short_to_pin_66	53	20	SysA_Umb_Receptacle_LoopBack_P
66	20	Short_to_pin_53	66	20	SysA_Umb_Receptacle_LoopBack_N

Notes:

- 1) System A will be crossed to System B when identically configured vehicles are mated.
- 2) Cable shields are intended to be grounded to backshell.

TABLE 3.4.1.9-2 IDSS PDTU CONNECTOR PINOUTS DEFINITIONS (2 PAGES)


PIN #	DEFINITION
13	100 Base TX (IEEE 802.3u Ethernet) Receive/Transmit positive wire (also used as BI_DB_P/BI_DA_P for gigabit Ethernet)
14	Gigabit Ethernet (IEEE 802.3ab) BI_DC_P/BI_DD_P wire
15	Gigabit Ethernet (IEEE 802.3ab) BI_DC_N/BI_DD_N wire
16	28 Volts Direct Current from System A or B; sinks or sources voltage between vehicles
19	MIL-STD-1553 Bus 3 positive
21	Umbilical loopback positive is shorted with pin 34 on system A; this allows the B system to detect mating
25	MIL-STD-1553 Bus 1 positive
27	100 Base TX (IEEE 802.3u Ethernet) Receive/Transmit negative wire (also used as BI_DB_N/BI_DA_N for gigabit Ethernet)

TABLE 3.4.1.9-2 IDSS PDTU CONNECTOR PINOUTS DEFINITIONS (2 PAGES)


PIN #	DEFINITION
28	28 Volts Direct Current from System A or B; sinks or sources voltage between vehicles
29	28 Volts Direct Current from System A or B; return line for 28 volt line
32	MIL-STD-1553 Bus 3 negative
34	Umbilical loopback negative is shorted with pin 21 on system A; this allows the B system to detect mating
38	MIL-STD-1553 Bus 1 negative
39	28 Volts Direct Current from System A or B; return line for 28 volt line
40	28 Volts Direct Current from System A or B; sinks or sources voltage between vehicles
41	28 Volts Direct Current from System A or B; return line for 28 volt line
42	120 Volts Direct Current from System A or B; sinks or source voltage between vehicles
43	120 Volts Direct Current Return from System A or B; return for 120 volt
44	Direct Current (user-defined voltage) from System A or B; sinks or sources voltage between vehicles; also serves as mating guide for connector
45	Direct Current (user-defined voltage) from System A or B; return line for pin 44; also serves as mating guide for connector
46	Ground Safety Wire provides bonding ground connection between vehicles
48	28 Volts Direct Current from System A or B; sinks or sources voltage between vehicles
51	MIL-STD-1553_Bus 4 negative
53	Umbilical loopback positive is shorted with pin 66 on system B; this allows the A system to detect mating
57	MIL-STD-1553_Bus 2 negative
60	28 Volts Direct Current from System A or B; sinks or sources voltage between vehicles
61	28 Volts Direct Current from System A or B; return line for 28 volt line
64	MIL-STD-1553 Bus 4 positive
66	Umbilical loopback positive is shorted with pin 53 on system B; this allows the A system to detect mating
70	MIL-STD-1553 Bus 2 positive
72	100 Base TX (IEEE 802.3u Ethernet) Transmit/Receive positive wire (also used as BI_DA_N/BI_DB_N for gigabit Ethernet)
73	28 Volts Direct Current from System A or B; return line for 28 volt line
86	100 Base TX (IEEE 802.3u Ethernet) Transmit/Receive positive wire (also used as BI_DA_P/BI_DB_P for gigabit Ethernet)
87	Gigabit Ethernet (IEEE 802.3ab) BI_DD_P/BI_DC_P wire
88	Gigabit Ethernet (IEEE 802.3ab) BI_DC_N/BI_DC_N wire

TABLE 3.4.1.9-3 UNASSIGNED IDSS PDTU CONNECTOR PINOUTS

Size	Pin Numbers
8	47
12	5, 7, 9, 11, 18, 20, 22, 24, 26, 30, 31, 33, 35, 37, 49, 50, 52, 54, 56, 58, 59, 63, 65, 67, 69, 71, 78, 80, 82, 84
20	1, 2, 3, 4, 6, 8, 10, 12, 17, 23, 36, 55, 62, 68, 74, 75, 76, 77, 79, 81, 83, 85

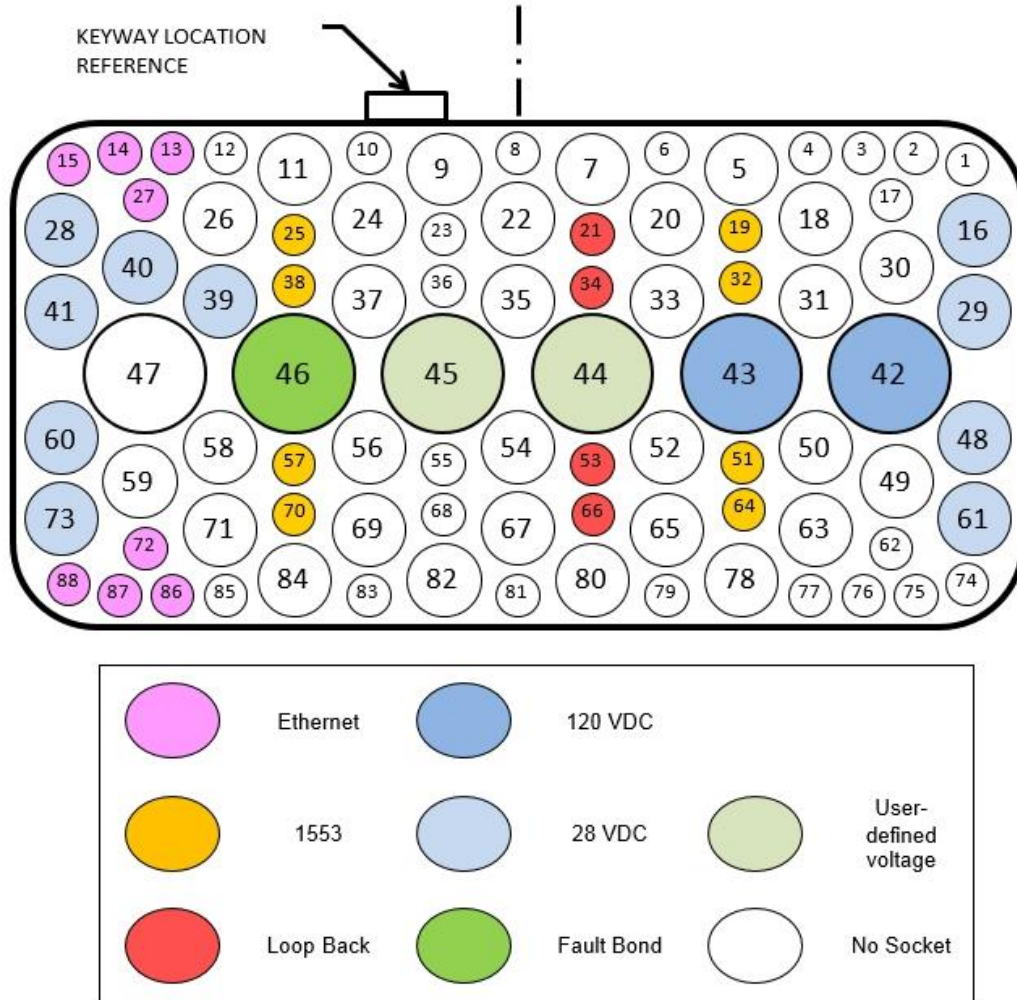

FRONT FACE OF RECEPTACLE INSERT SHOWN, PLUG OPPOSITE
FIGURE 3.4.1.9-1 RECEPTACLE (SOCKETS) - FRONT FACE

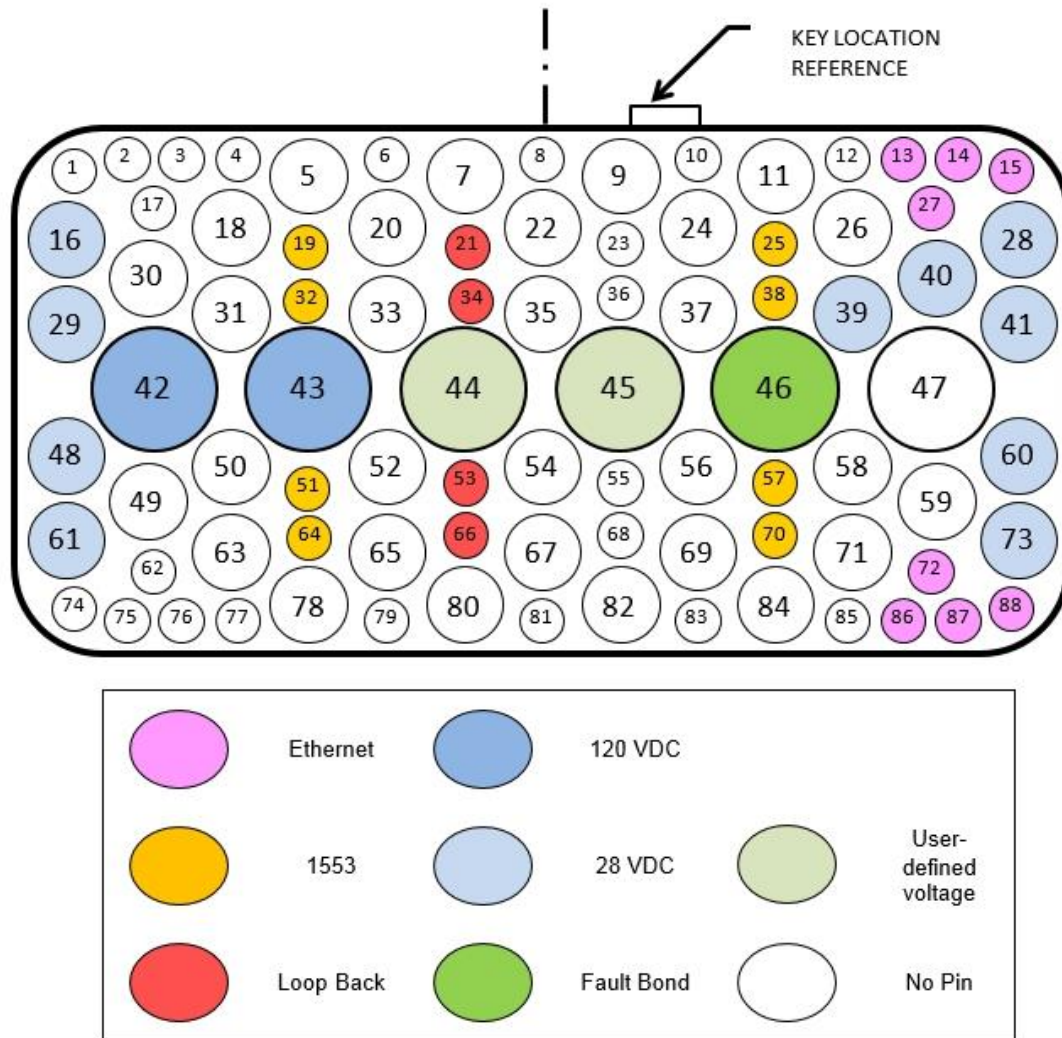

FRONT FACE OF PLUG INSERT SHOWN, RECEPTACLE OPPOSITE

FIGURE 3.4.1.9-2 PLUG (PINS) - FRONT FACE

3.4.1.9.1 POWER TRANSFER PINS

Each PDTU connector has six size 8 pins (as defined in SSQ 22680), but utilizes only five of these pins for power transfer. Two of these pins are designated as 120 VDC, two are open to be defined by the user (as coordinated with the mating vehicle), and the 5th pin provides for a ground safety wire connection.

Additionally, pins 44 and 45 are required to serve as a mating guide for the connectors even if they are not otherwise used.

In addition to the size 8 pins, 5 pairs of size 12 pins are provided for additional 28VDC power transfer capability.

The actual power transfer possible depends on the ambient temperature, the source and load characteristics, and wiring factors that are not part of the PDTU interface. As specified in SSQ 22680 section 3.2.1.6, the electrical current passing through all pins on the connector must not cause the shell, the contacts, or the insert to exceed +200 °C (+392 °F) at the maximum anticipated ambient temperature. Mating vehicles must prearrange which vehicle will supply power, how much can be supplied, the voltage range, power source and load characteristics, and any electromagnetic interference-related parameters.

3.4.1.9.2 DATA TRANSFER PINS

The PDTU has provisions for two independent U.S. MIL-STD-1553B busses (each with an A and B bus) and wired Ethernet for data transfer between the docked vehicles. It is permissible to use pins 13, 27, 72, and 86 for 802.3u 100 Base TX Ethernet data transfer. If Gigabit (IEEE 802.3ab 1000 Base T) Ethernet is desired, pins 13, 14, 15, 27, 72, 86, 87, and 88 are used. The two vehicles must agree on the standard, protocols, address assignment, routing, and all other network details.

If an implementing organization chooses to use a 1553 bus termination switch as part of their avionics architecture (making use of the Data Bus Switch Striker defined in section 3.4.1.7), that organization is responsible for the design and installation of the switch on the active bus side of the interface per their own standards.

3.4.1.9.3 PDTU CONNECTOR MATED INDICATION

IDSS compliant systems shall short together the two pairs of pins in the PDTU connector in accordance with Table 3.4.1.9-1. When the connectors mate, this short can be sensed by the docking vehicles using the Loop Back pins. This is an independent indication that the connectors are seated and the pins have engaged, which signifies that power and data can be exchanged.

3.4.2 WATER TRANSFER

Reserved

3.4.3 FUEL TRANSFER

Reserved

3.4.4 PRESSURANT TRANSFER

Reserved

3.4.5 OXIDIZER TRANSFER

Reserved

3.5 NAVIGATION AND ALIGNMENT AIDS

The IDSS includes three different types of target systems to support docking, as shown in Figure 3.5-1, IDSS Target Systems: the Perimeter Reflector Targets (PRT), the Peripheral Docking Target (PDT), and the Centerline Docking Target (CDT). These

targets work together to support short range as well as longer-range operations and allow for different types of sensor systems or technologies that may be available on the active vehicle during proximity operations and docking, as described in Figure 3.5-2, Availability of Navigation and Alignment Aids.

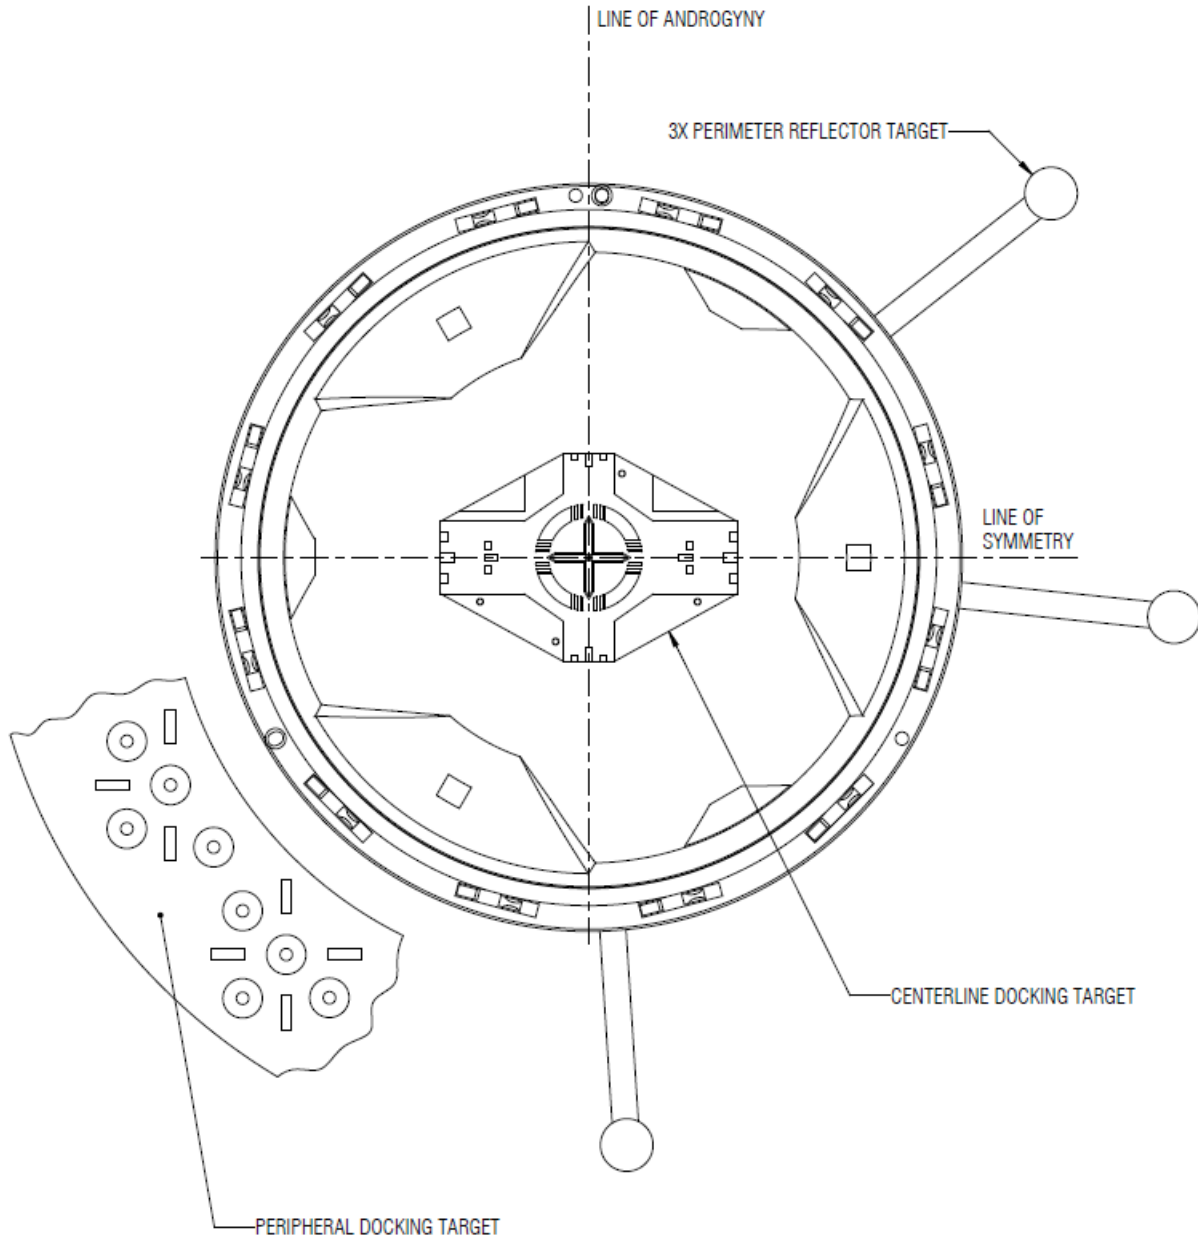


FIGURE 3.5-1 IDSS TARGET SYSTEMS


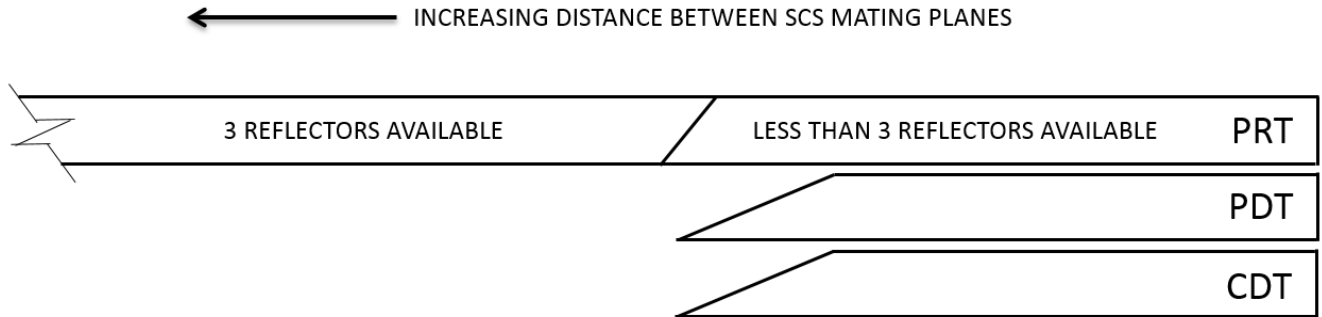


FIGURE 3.5-2 AVAILABILITY OF NAVIGATION AND ALIGNMENT AIDS

The PRTs consist of three retro-reflector assemblies which have been located around the perimeter of the docking system to allow for unobstructed line-of-sight viewing from longer ranges. Two of the retro-reflectors are hemispherical (that is, they have a hemispherical field of view) and allow for sensor tracking coverage above and below the docking axis to provide support in docking axis acquisition. The third retro-reflector (with a ± 30 degree field of view) provides support for maintaining the docking axis during approach. The field of view of all the reflective elements are shown together in Figure 3.5-3, Reflector Fields of View. The PDT and the CDT provide references to allow the active vehicle to measure its alignment relative to the docking interface. The vehicle can use either the CDT or the PDT.

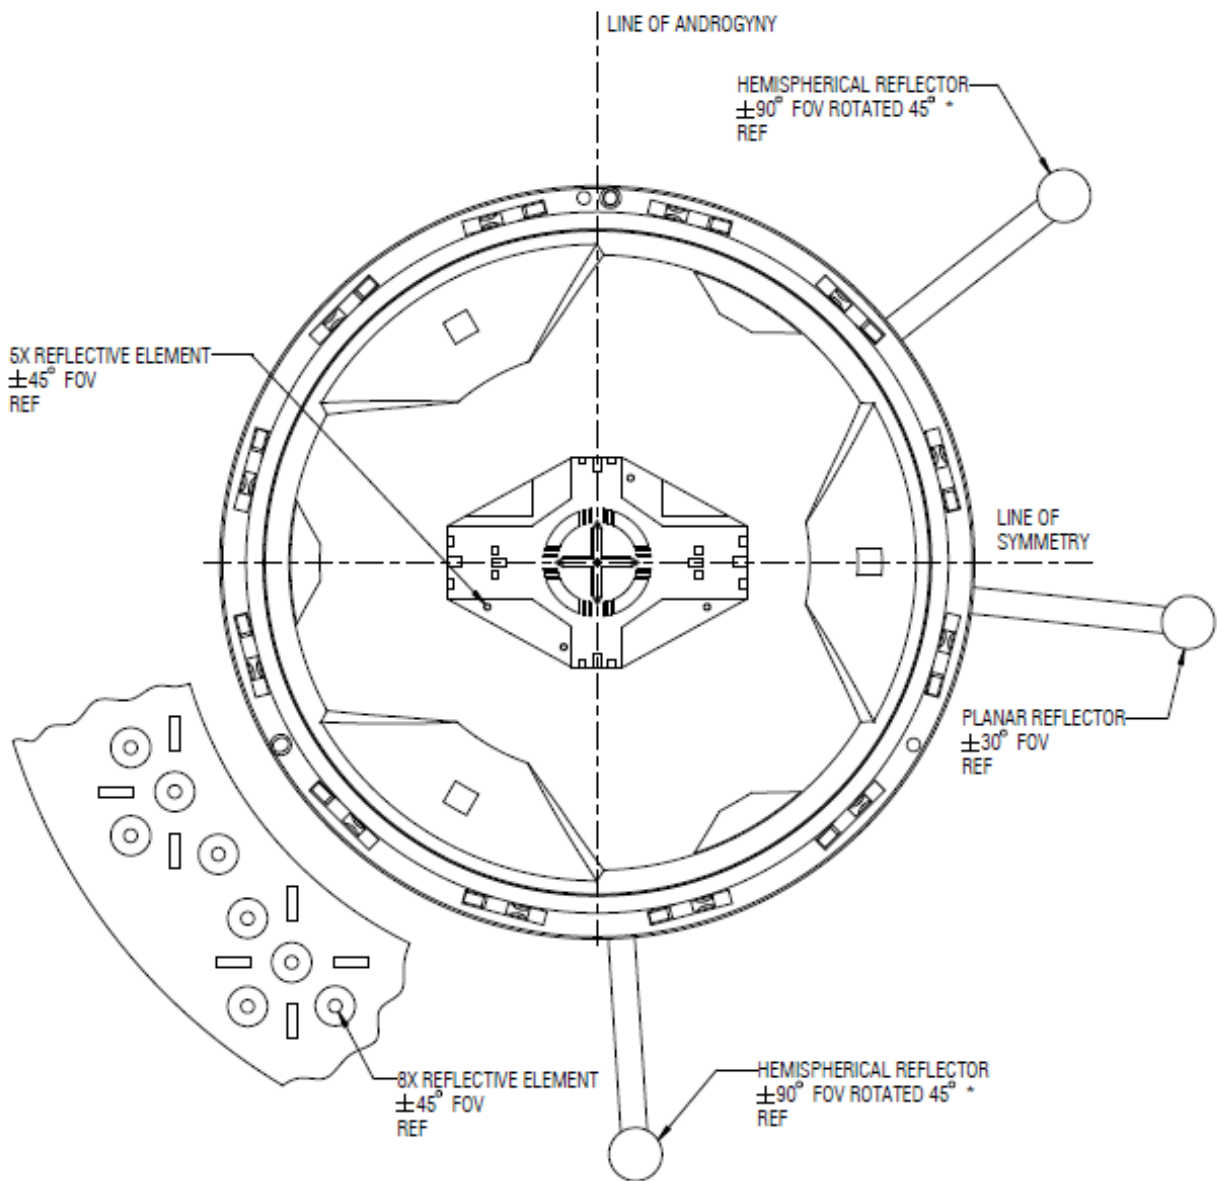

* See Figure 3.5.1.1.4-1 for rotation details.

FIGURE 3.5-3 REFLECTOR FIELDS OF VIEW

The CDT is compatible for use with optical and laser sensors. The backplate is printed with markings designed to allow for reading of the lateral and angular alignment cues on the docking target. The CDT includes reflectors under filter glass that are compatible with laser sensors.

The PDT is compatible for use with visible cameras, thermal imagers, or laser sensors. The PDT includes reflectors under filter glass that are compatible with optical and laser sensors.

The combination of the PRT, PDT, and CDT provide navigation support for active vehicle operations at long, mid, and short ranges. These three target systems allow for the use of various relative sensor technologies and therefore provide flexibility in sensor selection. Multiple options exist for sensor redundancy in providing a relative navigation estimate suitable for final approach and docking operations. Updates to target standards will be considered as new relative sensor technologies develop.


Dimensions given in section 3.5 show assembly-level design tolerances. Having accurate knowledge of the final as installed docking target feature locations is critical in achieving the Guidance Navigation & Control (GN&C) performance required for successful docking capture.

3.5.1 PERIMETER REFLECTOR TARGETS

The PRTs are a series of retro-reflector assemblies located around the perimeter of the passive docking vehicle's docking port and are shown in Figure 3.5-1. The reflectors are precision passive optical targets and do not require power. Two types of reflector assemblies are used, hemispherical (with a hemispherical field of view) and planar (with a narrower field of view). Both types use corner cubes.

3.5.1.1 PRT PLACEMENT

Each PRT shall be located as defined in Figure 3.5.1.1-1, PRT Locations.

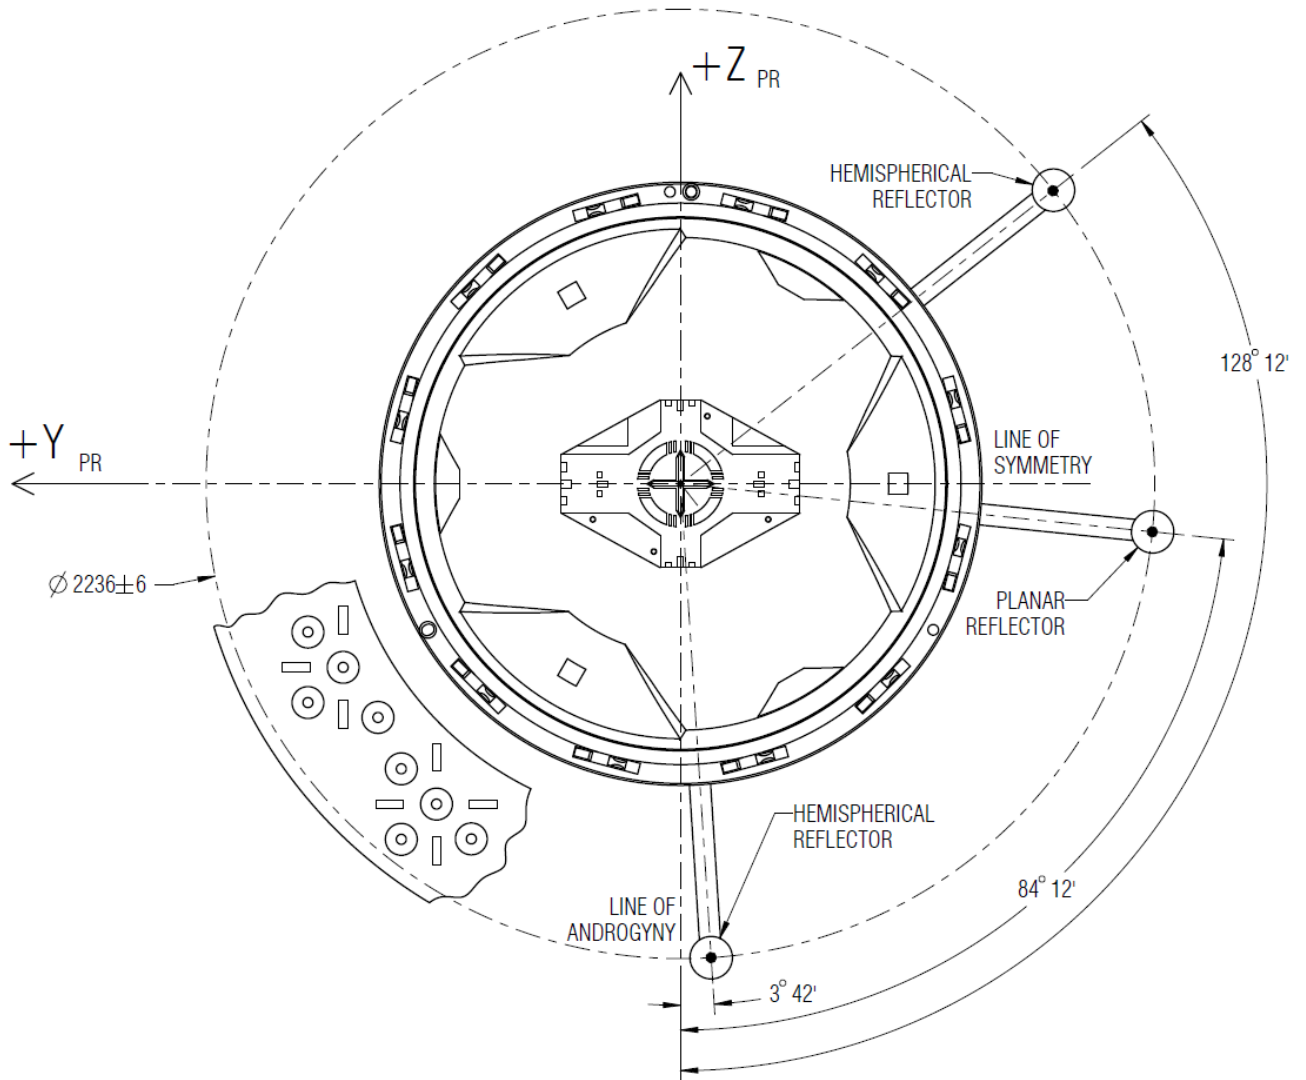

NOTE: The point of reference in specifying the mounting location of the reflector assemblies is at the intersection between the boresight centerline and the outer reflector surface (see also Figure 3.5.1.1.4-1, Perimeter Reflector Target Orientation).


FIGURE 3.5.1.1-1 PRT LOCATIONS

3.5.1.1.1 NUMBER OF PRT RETRO REFLECTORS

The PRT shall have three (3) retro reflectors.

3.5.1.1.2 PRT HEMISPHERICAL RETRO REFLECTOR FIELD OF VIEW

The hemispherical retro reflectors shall provide a reflector field of view as defined in Figure 3.5.1.1.2-1, Perimeter Hemispherical Reflector Target Assembly Boresight.

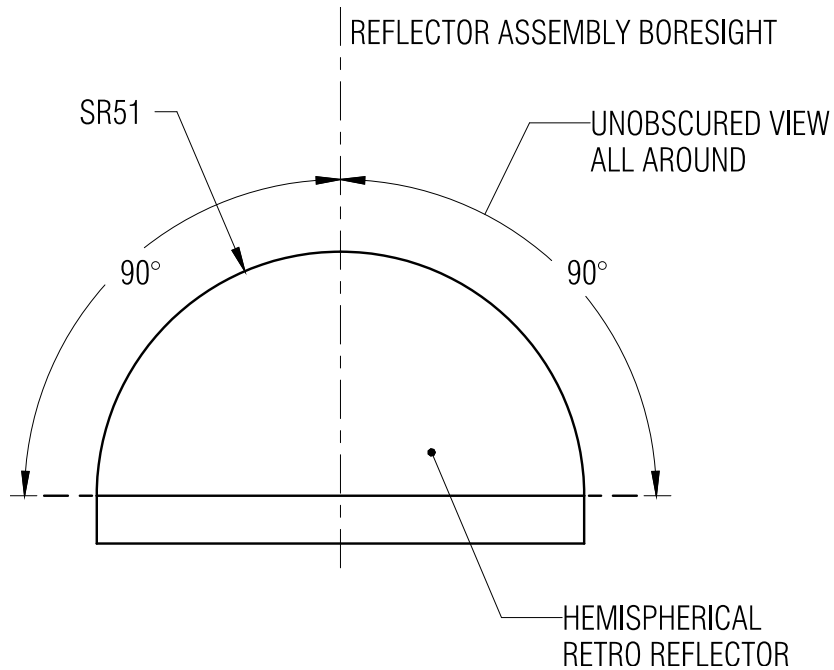

NOTE: Field of view shown is local to the retro reflector, and does not consider surrounding vehicle structure.

FIGURE 3.5.1.1.2-1 PERIMETER HEMISPHERICAL REFLECTOR TARGET ASSEMBLY BORESIGHT

3.5.1.1.3 PRT PLANAR RETRO REFLECTOR FIELD OF VIEW

The planar retro reflector shall provide a reflector field of view as defined in Figure 3.5.1.1.3-1, Perimeter Planar Reflector Target Assembly Boresight.


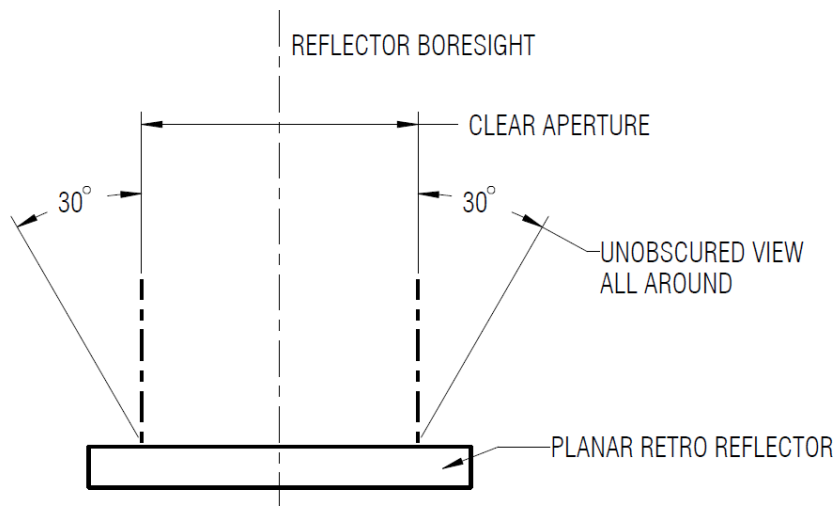


FIGURE 3.5.1.1.3-1 PERIMETER PLANAR REFLECTOR TARGET ASSEMBLY BORESIGHT

3.5.1.1.4 PRT RETRO REFLECTOR FIELD OF VIEW ORIENTATION

The PRT retro reflectors fields of view shall be oriented with respect to the docking axis as shown in Figure 3.5.1.1.4-1, Perimeter Reflector Target Orientation.

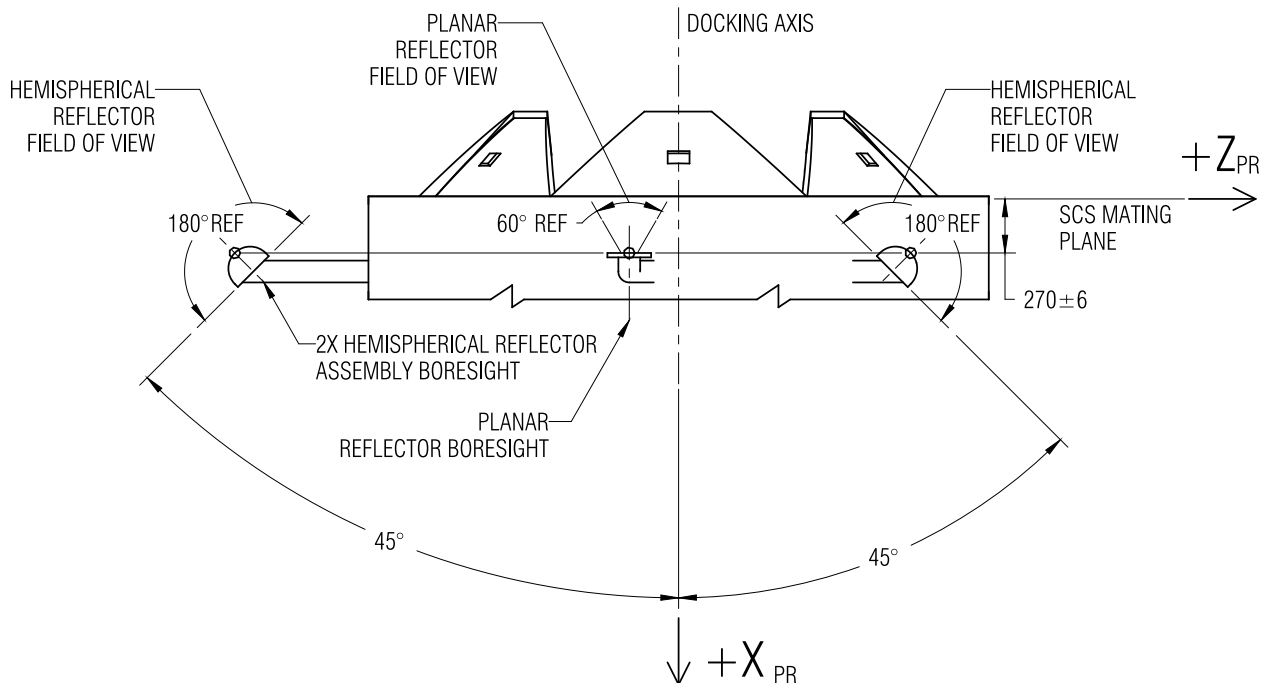

NOTE: The point of reference in specifying the mounting location of the reflector assemblies is at the intersection between the boresight centerline and the outer reflector surface.

FIGURE 3.5.1.1.4-1 PERIMETER REFLECTOR TARGET ORIENTATION

3.5.1.1.5 PRT PLANAR RETRO REFLECTOR BORESIGHT ALIGNMENT

The planar retro reflector boresight shall be co-aligned with the docking axis.


3.5.1.1.6 PRT REFLECTOR DEPTH

The PRT reflectors shall be located with respect to the SCS mating plane as shown in Figure 3.5.1.1.4-1.

3.5.1.1.7 RETRO REFLECTOR ASSEMBLY RESTRICTIONS

There shall be no more than the 3 specified PRT retro reflector assemblies visible within the volume defined by the Retro Reflector Visibility Zone as shown in Figure 3.5.1.1.7-1, Retro Reflector Visibility Restrictions.

NOTE: In architectures with adjacent IDSS ports, it is allowable to reduce the IDSS PRT hemispherical retro reflector assembly FOV by blocking or shielding it to conform to the Retro Reflector Visibility Zone. In order to maintain sufficient overlap between hemispherical retro reflectors on adjacent docking ports, the retro reflector shield shall not impinge on the shielded hemispherical retro reflector FOV in the region within 30 degrees from the reflector boresight.

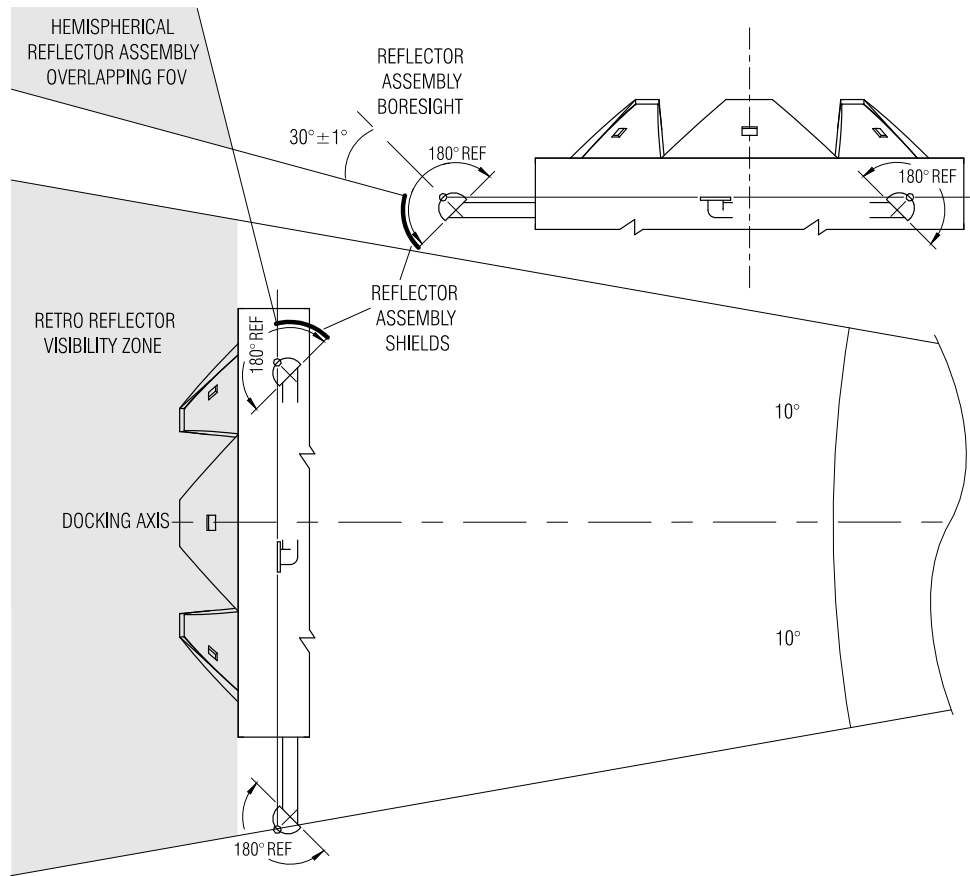

NOTE: The cone that defines the Reflector Visibility Zone is centered about the docking port centerline and its apex is located 6340 mm behind the SCS Mating Plane.

FIGURE 3.5.1.1.7-1 RETRO REFLECTOR VISIBILITY RESTRICTIONS

3.5.1.2 REFLECTOR CHARACTERISTICS

This section includes optical characteristics of the individual retro reflective cells along with retro reflector assembly configuration information for both the planar and hemispherical retro reflector assemblies.

3.5.1.2.1 TYPE OF RETRO REFLECTOR

All retro reflective cells used in the planar and hemispherical assembly shall be corner cubes.

3.5.1.2.2 DIAMETER OF CORNER CUBE

The entry face diameter of each retro reflective cell shall be 25.4mm +/- 0.1mm.

3.5.1.2.3 SURFACE FINISH

Each retro reflective cell shall be lambda/8 or better over 90% of the surface.

3.5.1.2.4 ENTRY/EXIT SURFACE REFLECTIVITY

Reflectance of the retro reflective cells at the entry/exit face shall be less than 0.25% for an operating range between 800nm to 1600nm.

3.5.1.2.5 ENTRY/EXIT SURFACE COATING

The retro reflective cell entry face shall not be coated.

3.5.1.2.6 BEAM DEVIATION

The beam deviation of each retro reflective cell shall be +/-5 arc second or less.

3.5.1.2.7 SCRATCH-DIG

The scratch-dig of each retro reflective cell shall be a maximum of 60-40.

3.5.1.2.8 NUMBER OF RETRO REFLECTOR ELEMENTS FOR THE HEMISPHERICAL ASSEMBLY

The hemispherical retro reflector assembly shall consist of seven (7) individual retro reflective cells.

3.5.1.2.9 RETRO REFLECTOR ELEMENT POSITIONING ON THE HEMISPHERICAL ASSEMBLY

The retro reflective cells shall be positioned on the hemispherical assembly such that each retro reflective cell entry face surface is pointing radial outward and is placed at a radius of 46 +/- 1 mm from a common center point located at the center of the hemispherical assembly base, with one retro reflective cell centered along the hemispherical assembly boresight.

3.5.1.2.10 NUMBER OF RETRO REFLECTOR ELEMENTS FOR THE PLANAR ASSEMBLY

The planar retro reflector assembly shall consist of one (1) retro reflector.

3.5.2 CENTERLINE DOCKING TARGET

The CDT shall consist of the Centerline Visual Target (CVT) and the Centerline Reflector Target (CRT). The major features of the CDT are shown in Figure 3.5.2-1, Centerline Docking Target. The IDA utilizes a CDT configuration which pre-dates the IDSS standard agreement, but it is still compatible with this IDSS standard. Details of the differences are given in Appendix D, D.3.2.


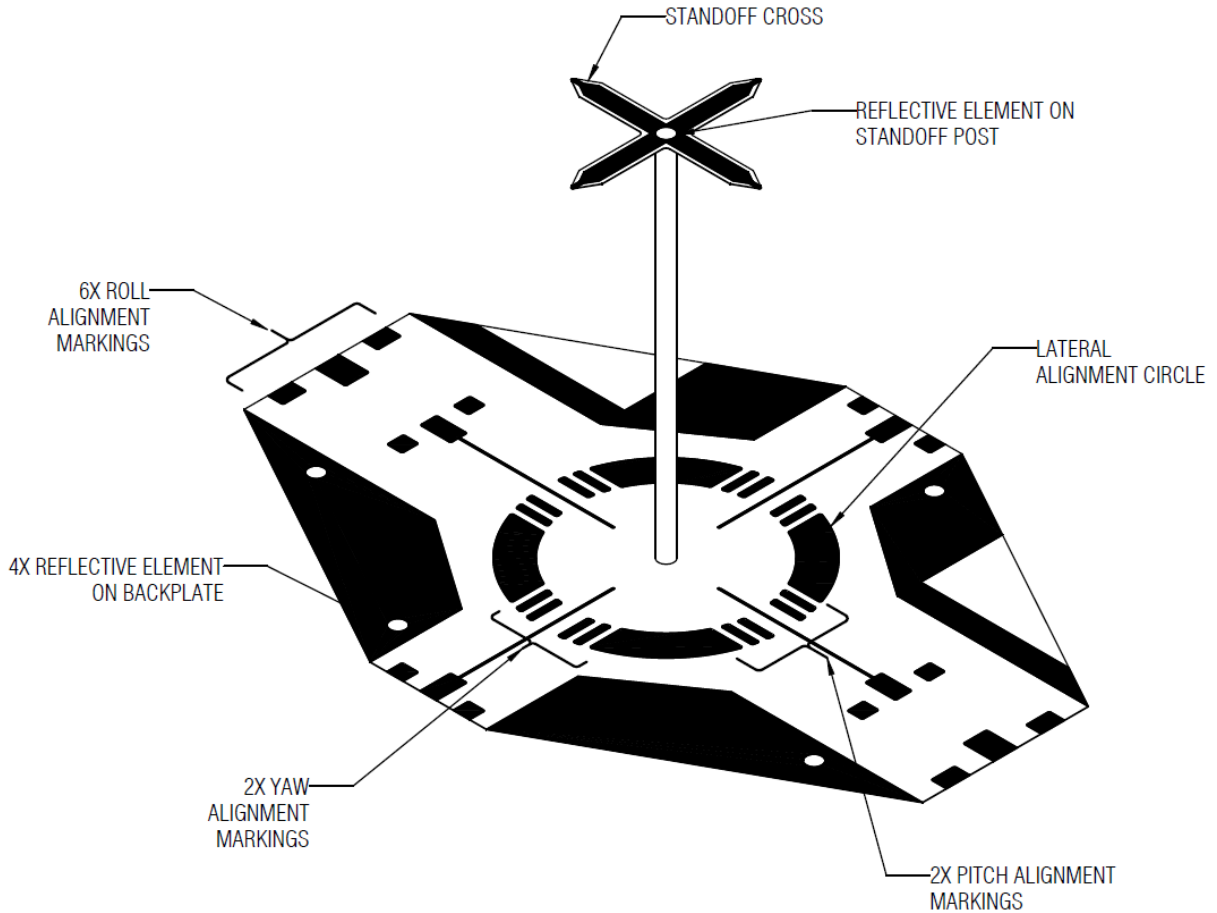


FIGURE 3.5.2-1 CENTERLINE DOCKING TARGET

3.5.2.1 CDT COORDINATE SYSTEM

The CDT Coordinate System is a right-handed Cartesian system, and is shown in Figure 3.5.2.1-1, CDT Coordinate System. Its origin is the center of the CDT Backplate on the plane of the CDT Backplate front surface. The CDT Coordinate System axes are aligned with the Passive SCS Ring Coordinate System axes.

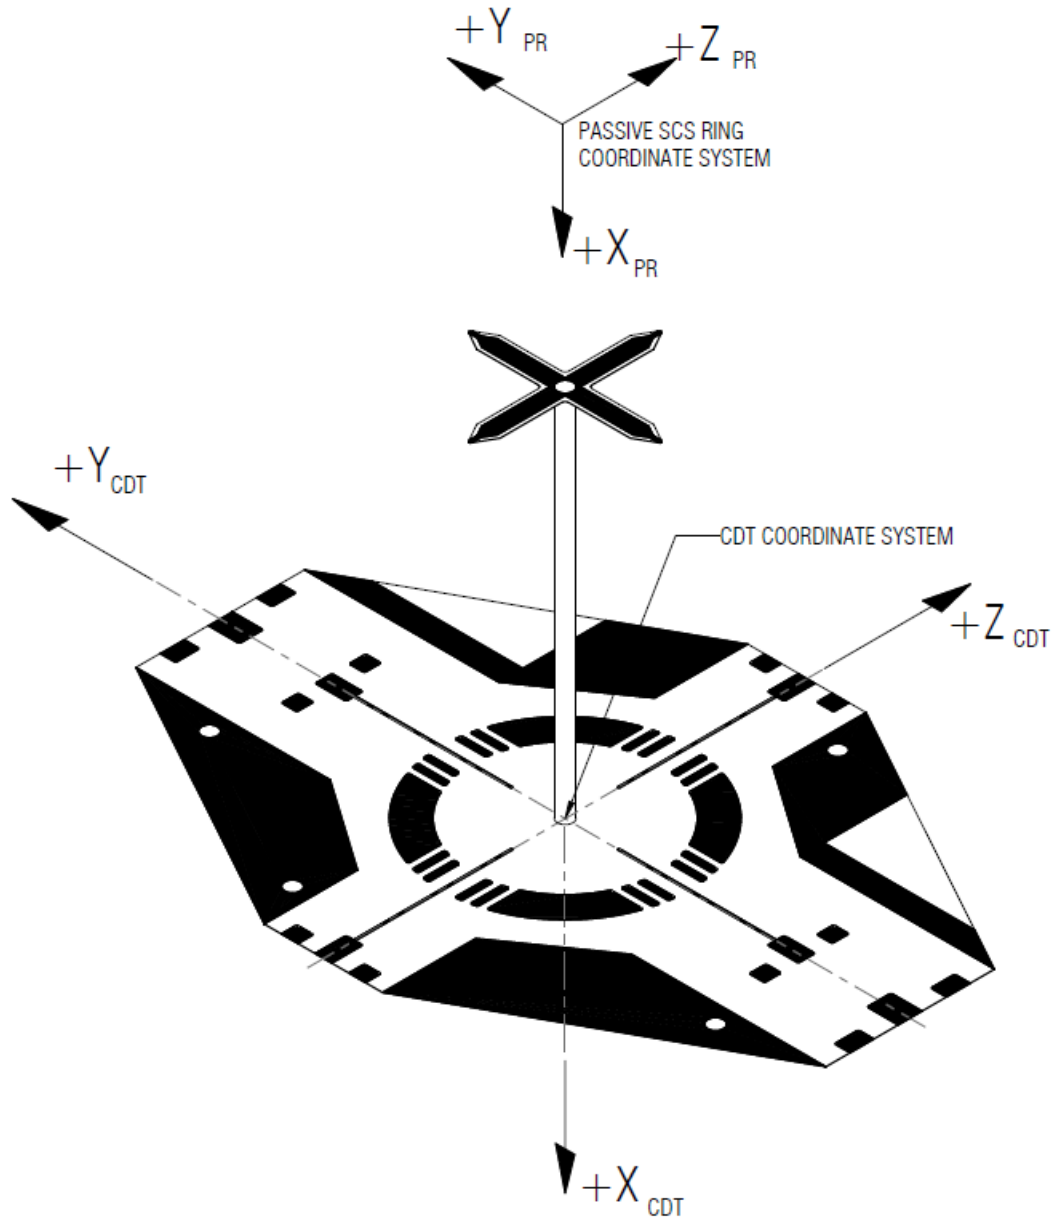

NOTES:

1. The CDT Backplate shall be mounted so that each axis of the CDT Coordinate System is within an angular tolerance of $\pm 0^{\circ}6'$ with respect to each axis of the Passive SCS Ring Coordinate System.
2. The CVT Standoff Element shall have a roll tolerance of $\pm 0^{\circ}15'$ about the X-axis of the CDT Coordinate System.

FIGURE 3.5.2.1-1 CDT COORDINATE SYSTEM

3.5.2.2 CENTERLINE VISUAL TARGET


The CVT provides visual cues to estimate lateral position misalignments as well as angular misalignments in three axes. The markings on the backplate allow an estimation of the angular misalignments to within 1 degree per axis. The CVT is designed to provide alignment cues when viewing the target in the visible wavelengths.

3.5.2.2.1 CVT COMPONENTS

The CVT shall consist of a backplate and Standoff Cross Assembly. The Standoff Element, defined by the Cross Element and the attached reflector, and the Standoff Rod are components of the Standoff Cross Assembly.

3.5.2.2.2 CDT BACKPLATE LATERAL POSITION MOUNTING TOLERANCE

The center of the CDT backplate shall be mounted with a positional mounting tolerance with respect to the Passive SCS Ring X-axis as shown in Figure 3.5.2.2.2-1, CVT Alignment.

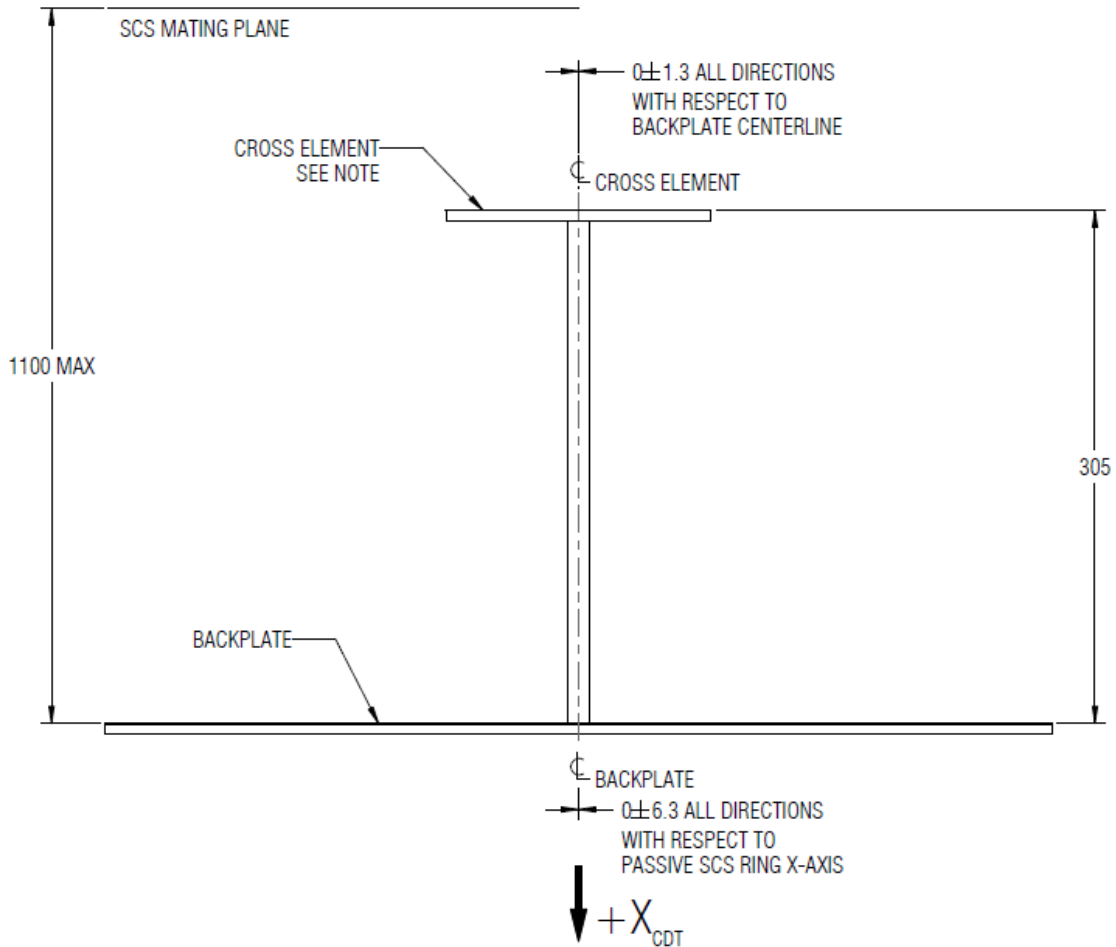

NOTE: The front face of the Standoff Cross shall be parallel to the front face of the Backplate with an angular tolerance of $\pm 0^{\circ}01'30''$ in any direction.

FIGURE 3.5.2.2.2-1 CVT ALIGNMENT

3.5.2.2.3 CDT BACKPLATE ANGULAR MOUNTING TOLERANCE

The CDT Backplate shall be mounted with a maximum angular mounting tolerance as described in Figure 3.5.2.1-1.

3.5.2.2.4 CVT STANDOFF ELEMENT HEIGHT

The CVT shall have a standoff element extending from the surface of the Backplate, as shown in Figure 3.5.2.2.2-1.

3.5.2.2.5 CVT STANDOFF CROSS LOCATION

The center of the cross element shall be located with a maximum positional mounting tolerance with respect to the CDT Backplate centerline as shown in Figure 3.5.2.2.2-1.

3.5.2.2.6 CVT STANDOFF PARALLELISM

The CVT Standoff Element shall be parallel to the CDT Backplate as described in Figure 3.5.2.2.2-1.

3.5.2.2.7 CVT STANDOFF ELEMENT ROLL ALIGNMENT


The CVT Standoff Element shall have a roll misalignment about the center of the Backplate as described in Figure 3.5.2.1-1.

3.5.2.2.8 CDT BACKPLATE DEPTH WITHIN VESTIBULE

- A. The CDT shall be mounted within the vestibule such that no part of the Standoff Cross Assembly, including the reflective element, extends past the SCS mating plane.
- B. The CDT shall be mounted such that the center of the front surface of the CDT backplate is no further back from the SCS mating plane than is shown in Figure 3.5.2.2.2-1.

3.5.2.2.9 CVT STANDOFF CROSS VISUAL MARKINGS

The visual markings for the standoff cross shall be as depicted in Figure 3.5.2.2.9-1, Standoff Cross Visual Markings Dimensions.

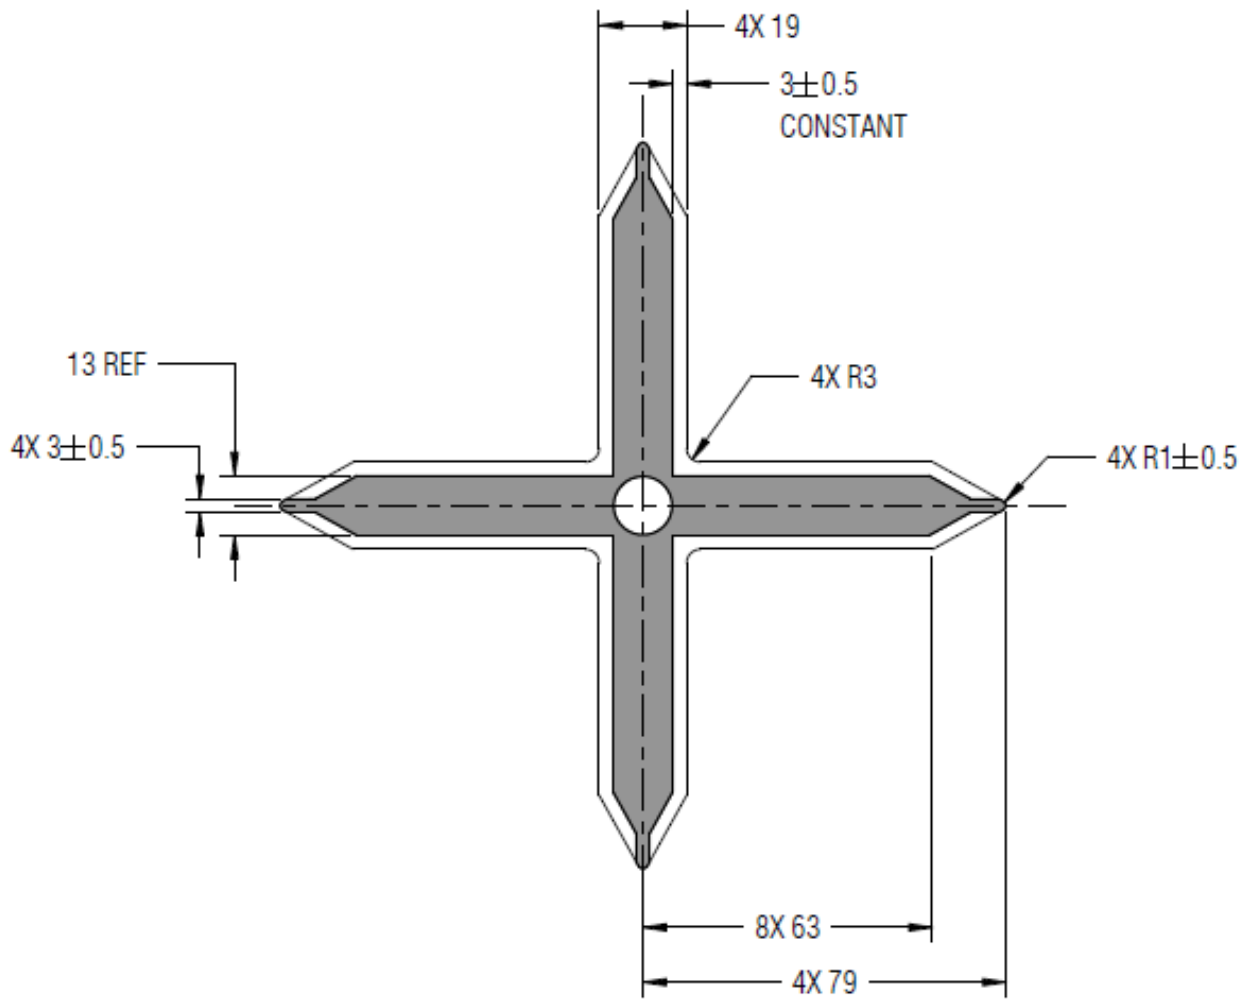


NOTE: Black areas of the target are shown in this figure as gray for clarity.

FIGURE 3.5.2.2.9-1 STANDOFF CROSS VISUAL MARKINGS DIMENSIONS

3.5.2.2.10 CVT VISUAL MARKINGS

- A. The visual alignment markings for the CDT backplate shall be as depicted in Figure 3.5.2.2.10-1, CDT Backplate Visual Alignment Markings.
- B. Each quadrant of the CDT backplate shall include a black trapezoidal polygon as depicted in Figure 3.5.2.2.10-2, CDT Backplate Polygon Markings.

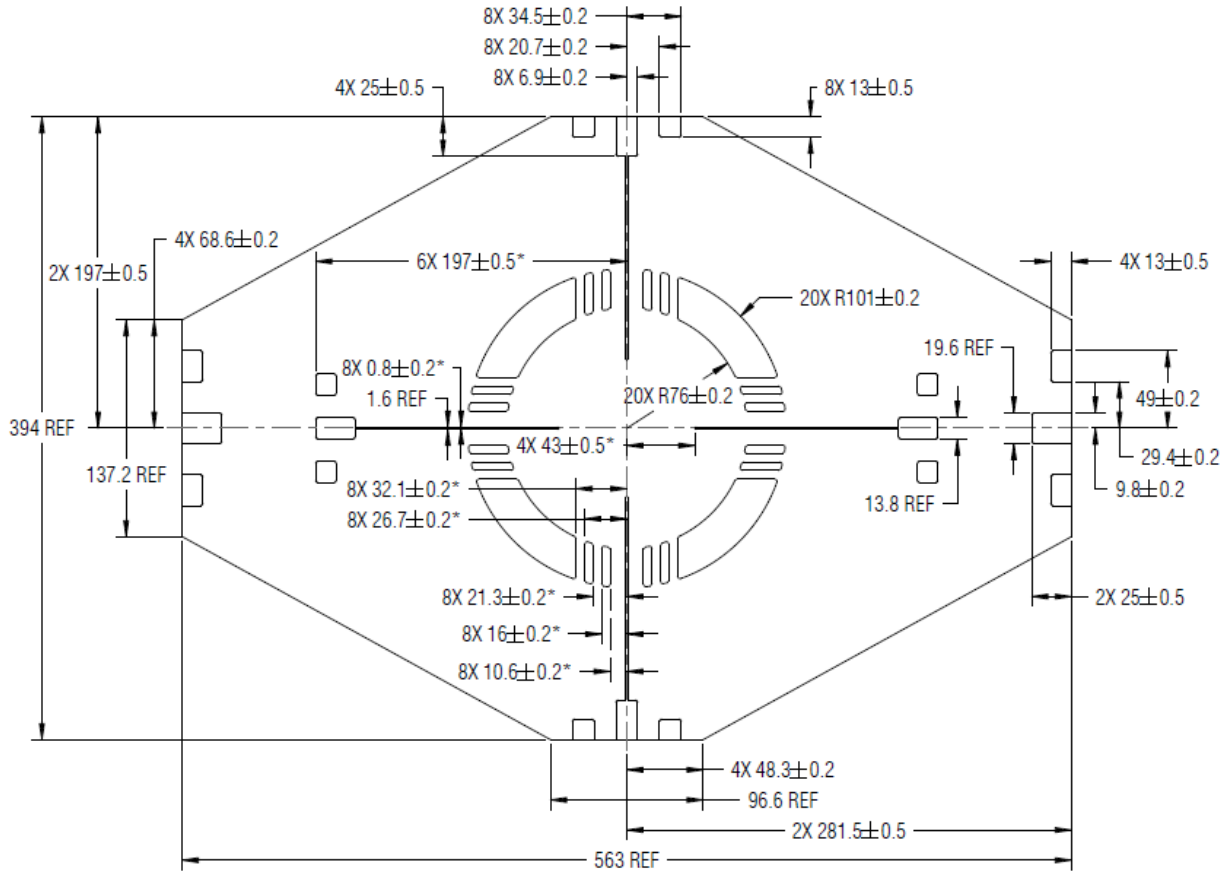

NOTES:

* The dimensions shown are from the theoretical backplate centerline.

1. Black areas of the target are not shaded in this figure for clarity.

FIGURE 3.5.2.2.10-1 CDT BACKPLATE VISUAL ALIGNMENT MARKINGS

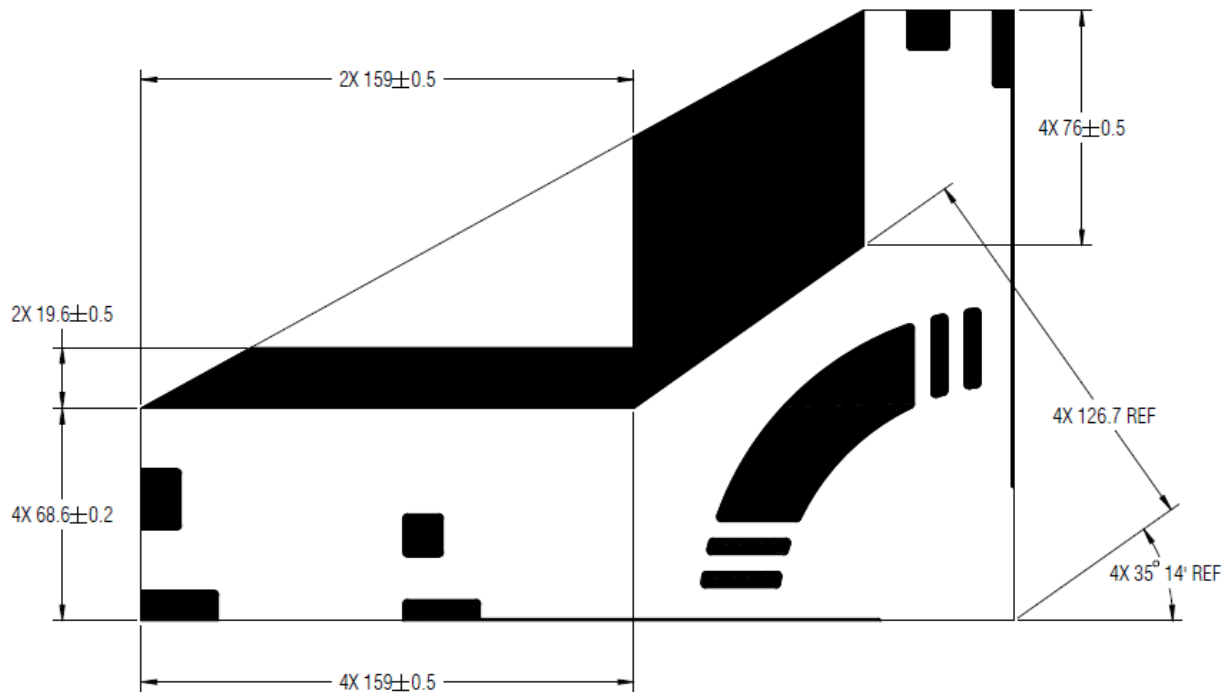


FIGURE 3.5.2.2.10-2 CDT BACKPLATE POLYGON MARKINGS

3.5.2.2.11 CVT VISUAL MARKINGS SURFACE

The CVT visual markings surface shall be flat with no raised surfaces/features.

3.5.2.2.12 CVT COLORS

The black and white color scheme on the backplate achieves a Michelson contrast of 85% or greater in the visible spectrum, and supports use by a human operator, by meeting the following requirements:

- A. All areas shown as black in Figure 3.5.2.2.9-1, Figure 3.5.2.2.10-1, and Figure 3.5.2.2.10-2 shall have a total integrated reflectance $\leq 7\%$ in the waveband from 380 to 780 nm at normal incidence.
- B. The unshaded areas, with the exception of the reflective elements, shown in Figure 3.5.2.2.9-1, Figure 3.5.2.2.10-1, and Figure 3.5.2.2.10-2 shall have a total integrated reflectance $\geq 85\%$ in the waveband from 380 to 780 nm at normal incidence.

3.5.2.2.13 SURFACE SPECULAR REFLECTANCE

The entire surface of the CDT Backplate, the CRT housings, and the surface of the CVT Standoff Cross shall have a specular reflectance $\leq 20\%$ in the waveband 380 to 780 nm.

3.5.2.3 CENTERLINE REFLECTOR TARGET

The CRT consists of five reflective element and long pass filter subassemblies. Each CRT reflective element shall be comprised of a filter glass and a reflective film/material. The filter glass material is oriented to the exterior, with the reflective material “protected” by the filter glass. There are four reflective elements attached to the backplate of the CVT, and one out-of-plane element attached to the standoff cross of the CVT.

Filter glass is used to cover the reflective material in the center of the reflective elements. It serves to filter out undesired wavelengths and protects the reflective material from the space environment.


3.5.2.3.1 NUMBER OF CRT REFLECTIVE ELEMENTS

The CRT shall have five (5) reflective elements on the docking target.

3.5.2.3.2 CRT PATTERN

The CRT reflective element pattern is depicted in Figure 3.5.2.3.2-1, Locations of CRT Reflective Elements.

- A. The CRT reflective elements shall be located with respect to the CDT Coordinate System as specified in Table 3.5.2.3.2-1, CRT Reflective Elements Location in CDT Coordinate System. The point of reference is the center of the reflective element on the top surface of the filter glass.
- B. The CRT reflective elements shall have a positional location tolerance of ± 0.3 mm in the y and z axes; and a maximum height of 10 mm above the mounting surface for all reflective elements.
- C. The x-axis location of CRT reflective elements 2, 3, 4, and 5 (as listed in Table 3.5.2.3.2-1) shall differ from each other by ≤ 0.7 mm.

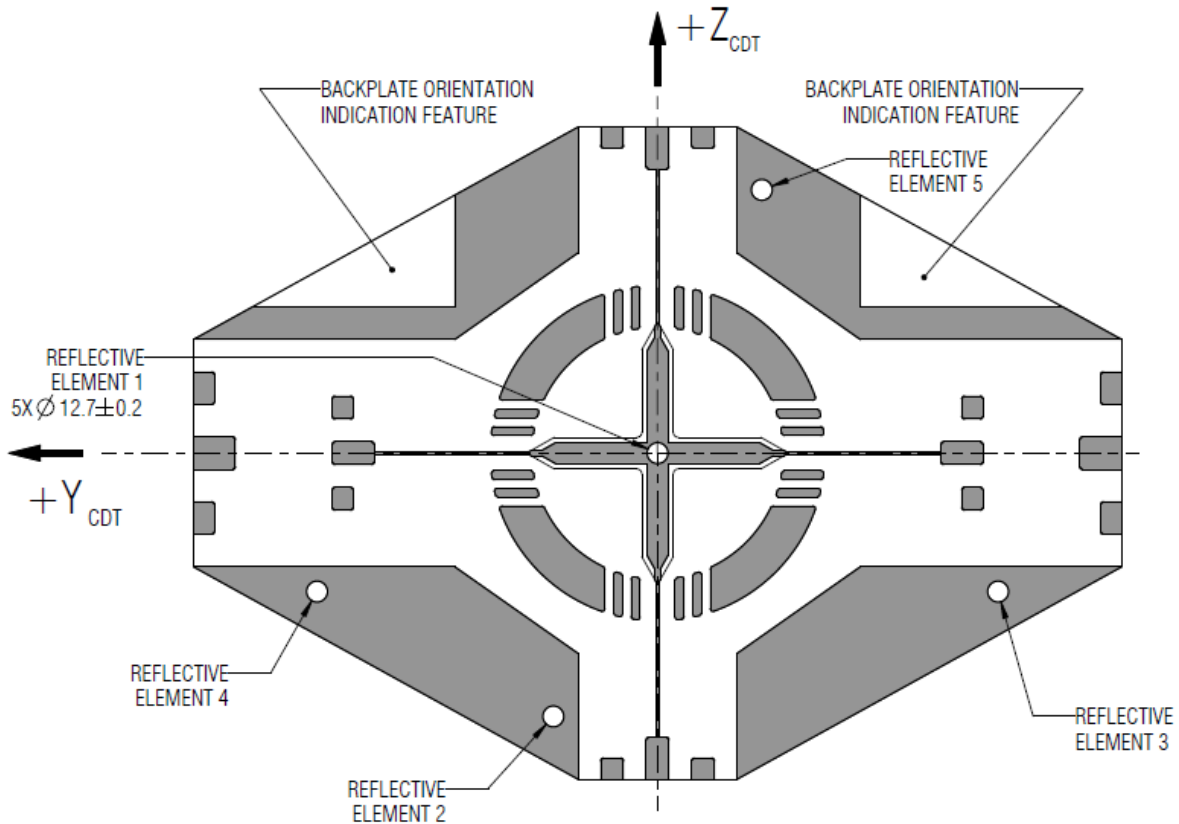

NOTE: Black areas of the target are shown in this figure as gray for clarity.

FIGURE 3.5.2.3.2-1 LOCATIONS OF CRT REFLECTIVE ELEMENTS

TABLE 3.5.2.3.2-1 CRT REFLECTIVE ELEMENTS LOCATION IN CDT COORDINATE SYSTEM


Reflective Element	X_{CDT}	Y_{CDT}	Z_{CDT}
	mm	mm	mm
1 (standoff)	-305	0	0
2	0	64	-169
3	0	-226	-80
4	0	226	-80
5	0	-64	169

3.5.2.3.3 CRT REFLECTOR SIZING

Each CRT reflective element shall have a clear aperture diameter as shown in Figure 3.5.2.3.2-1.

3.5.2.3.4 CRT FIELD OF VIEW OBSCURATION

Each CRT reflective element shall have an unobscured field of view from the top surface of the filter glass of the reflective element originating from the edge of the clear aperture defined in Section 3.5.2.3.3 and shown in Figure 3.5.2.3.4-1, CRT Unobscured Field of View Definition.

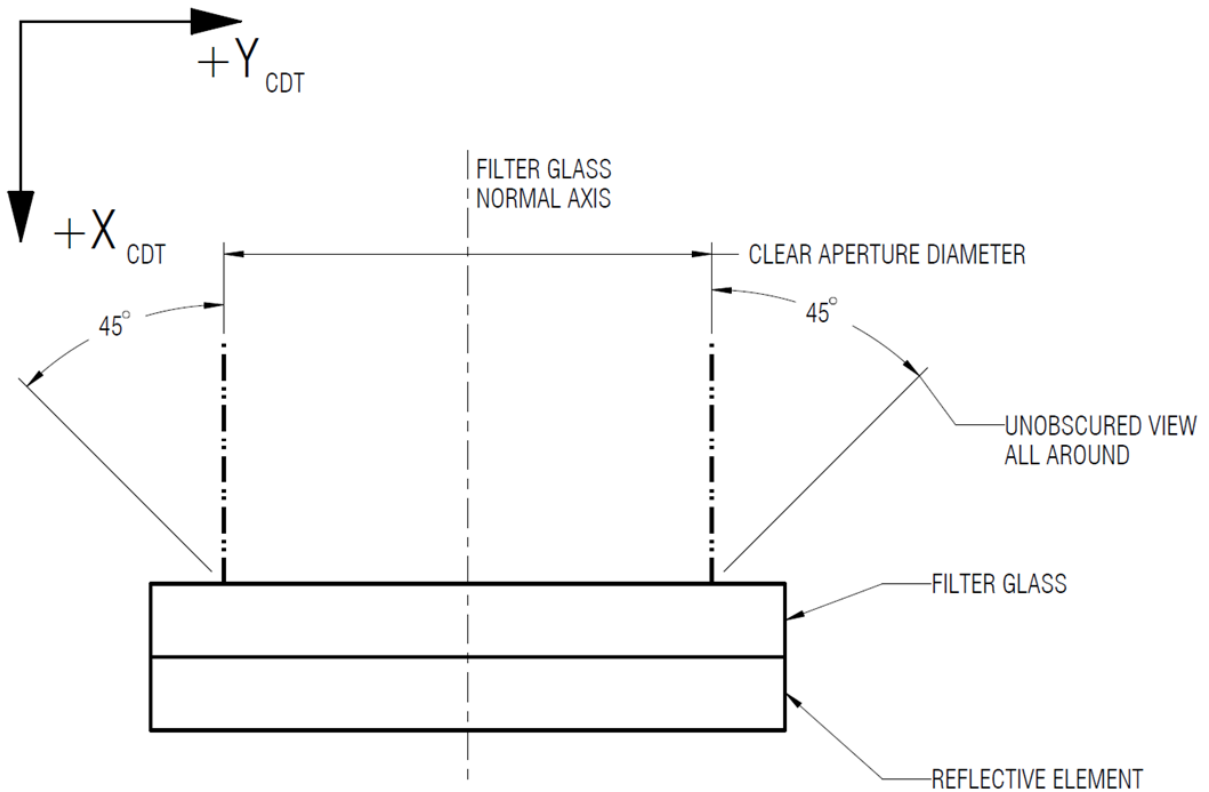

Note: Field of view shown is local to each reflective element, and does not consider surrounding vehicle structure.

FIGURE 3.5.2.3.4-1 CRT UNOBSCURED FIELD OF VIEW DEFINITION

3.5.2.3.5 CRT REFLECTIVE ELEMENT MATERIAL PEAK LUMINANCE FACTOR

The CRT reflective element shall have a peak luminance factor of > 2900.

Note: Luminance factor is defined as the ratio of the luminance of a surface to the luminance of a diffuse white surface.

3.5.2.3.6 CRT REFLECTIVE ELEMENT HALF LUMINANCE ANGLE

The CRT reflective element shall have a half luminance angle of ≥ 25 degrees.

Note: The half luminance angle is the angle with respect to the normal to the reflective element at which the luminance factor is half of its peak value. Luminance factor is defined as the ratio of the luminance of a surface to the luminance of a diffuse white surface.

3.5.2.3.7 CRT REFLECTIVE ELEMENT GAIN

The CRT reflective element shall have a gain of ≥ 2200 .

Note: Gain is defined as the power return from a laser pointing normal to the reflective element normalized by the power return from a laser pointing normal to an ideal Lambertian scatterer.

3.5.2.3.8 CRT REFLECTIVE ELEMENT HALF POWER ANGLE

The CRT reflective element shall have a half power angle of $\geq 0^\circ 15'$ degrees.

Note: The half power angle is defined as the angle with respect to the normal to the reflective element where the returned laser power is half of what it is at the normal.

3.5.2.3.9 CRT REFLECTOR FILTERS

Each CRT reflective element shall have a filter glass to secure the reflective material in place.

3.5.2.3.9.1 REFLECTIVE FILTER OPERATIONAL WAVELENGTH

The total operational wavelength of the filter glass shall include at least the wavelength 380 nm to 1600 nm.

3.5.2.3.9.2 MINIMUM RATE OF TRANSMISSION – OPERATIONAL WAVELENGTH

The minimum rate of transmission in the operational wavelength shall be greater than 80 %/cm for the operational wavelength specified in 3.5.3.9.1.

3.5.2.3.9.3 MAXIMUM RATE OF TRANSMISSION – NON-OPERATIONAL WAVELENGTH

The maximum rate of transmission in the operational wavelength outside the operational wavelength shall be less than 30 %/cm for wavelengths outside of the operational range (less than 380 nm, and greater than 1600 nm).

3.5.2.3.10 KEY FEATURE MEASUREMENTS AFTER CDT INSTALLATION

Accurate knowledge of the location of key target features on the CDT is important to producing accurate relative navigation estimates during target use. This is generally accomplished by collecting measurements of the as-installed flight target (on the ground or on-orbit). After CDT installation, the location of key target features shall be known (by either measurement or fabrication tolerance) to within an uncertainty of ± 1 mm per axis with respect to the SCS Passive Ring (PR) coordinate frame. The key feature locations to be made available to users, as shown in Figure 3.5.2.3.10-1, CDT Key Features, are:

- A. X, Y, Z location of the center of each CRT reflective element at the top surface of the filter glass
- B. Diameter of each CRT reflective element aperture
- C. X locations of the top surface of the standoff cross at each tip of the cross along the horizontal and vertical centerlines

- D. X locations of the top surface of the backplate at the outer edge of backplate along the horizontal and vertical centerlines

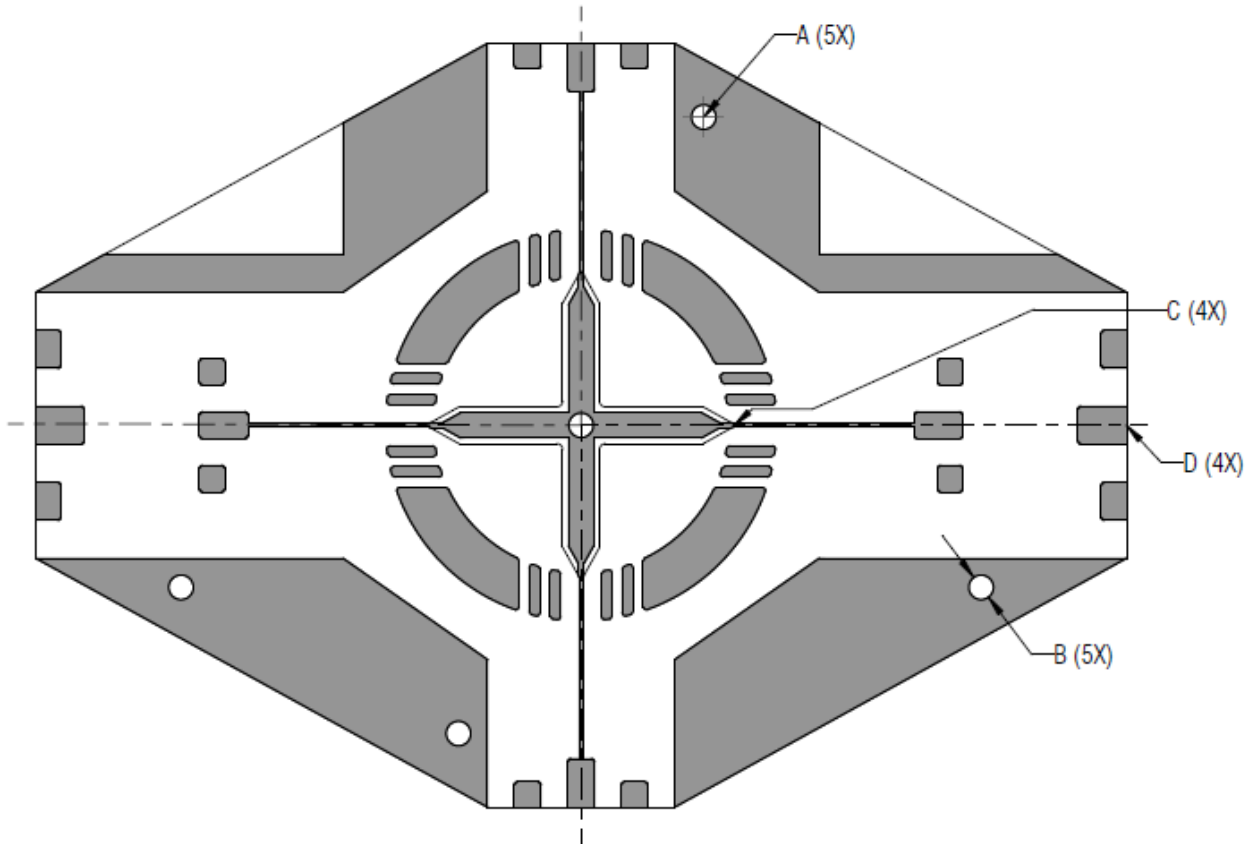


FIGURE 3.5.2.3.10-1 CDT KEY FEATURES

3.5.3 PERIPHERAL DOCKING TARGET

The Peripheral Docking Target as defined in Figure 3.5.3-1, Peripheral Docking Target, is designed to be compatible with multiple relative navigation sensor technologies: visible cameras, thermal imagers, and lasers. Thus the PDT consists of a Peripheral Visual Target (PVT), Peripheral Infrared Target (PIT), and Short Range Reflector Target (SRRT), with some pieces of hardware serving multiple purposes for the PVT, PIT, or SRRT, as defined in Figure 3.5.3-2, Peripheral Docking Target Components and Functions.

Filter glass is used to cover the reflective material in the center of the circular navigation features. It serves to protect the reflective material from the space environment and to filter out undesired wavelengths.

The NASA ISS IDA utilizes a PDT which pre-dates the IDSS standard agreement, but it is still compatible with this IDSS standard. Details of the differences are given in Appendix D, D.3.1.


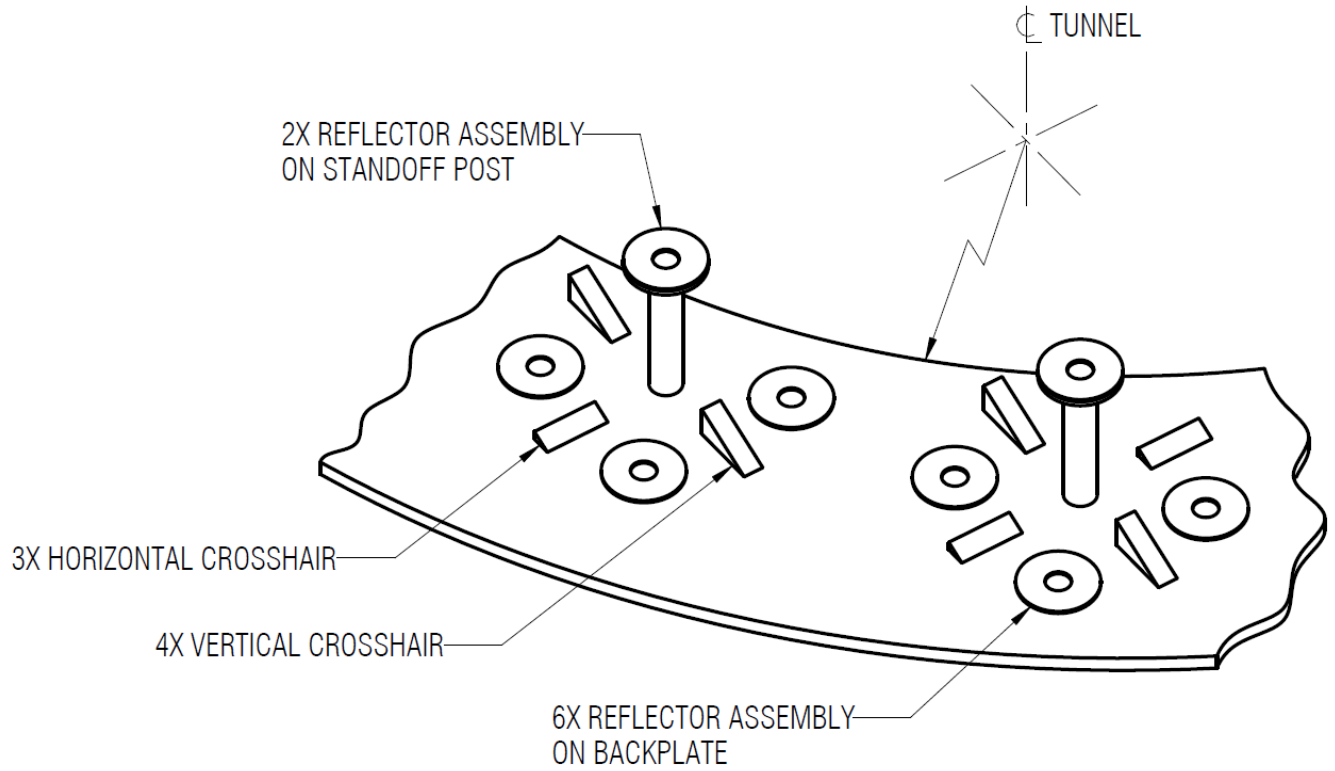


FIGURE 3.5.3-1 PERIPHERAL DOCKING TARGET

(For Reference Only)

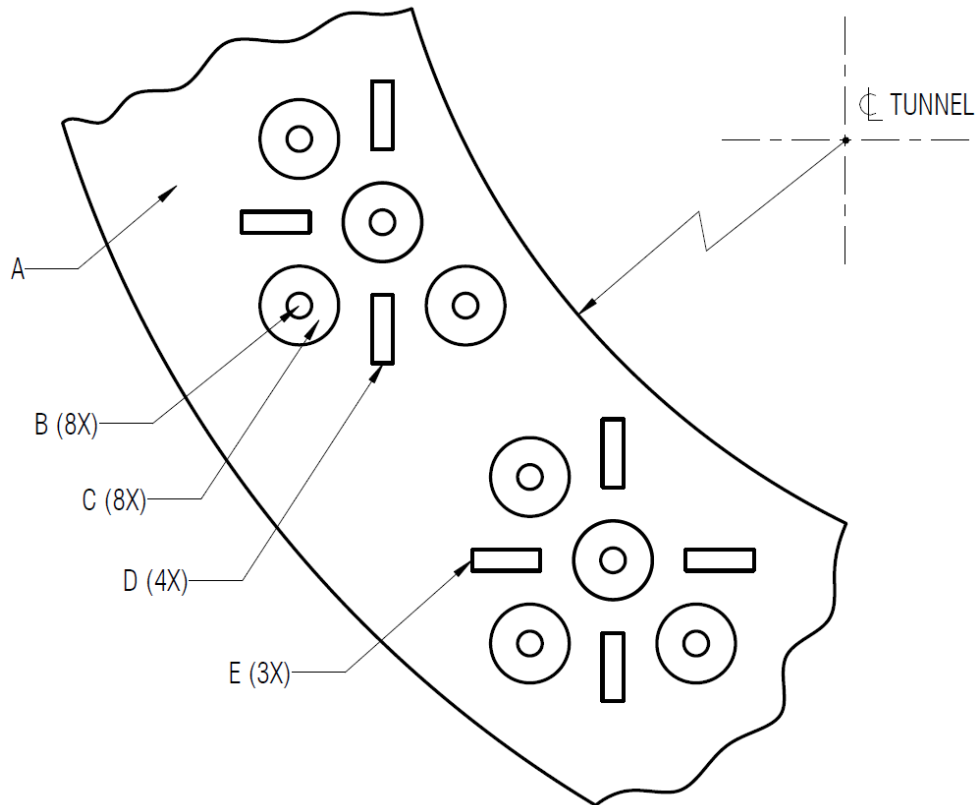


Part	Label	PVT	PIT	SRRT
Backplate	A	X	X	
Reflectors	B	X	X	X
Circular Navigation Features	C	X	X	
Vertical Crosshairs	D	X	X	
Horizontal Crosshairs	E	X	X	

FIGURE 3.5.3-2 PERIPHERAL DOCKING TARGET COMPONENTS AND FUNCTIONS

3.5.3.1 PDT COORDINATE SYSTEM FRAMES

Two coordinate systems are used to describe the PDT, as shown in Figure 3.5.3.1-1, PDT Coordinate System Frames.

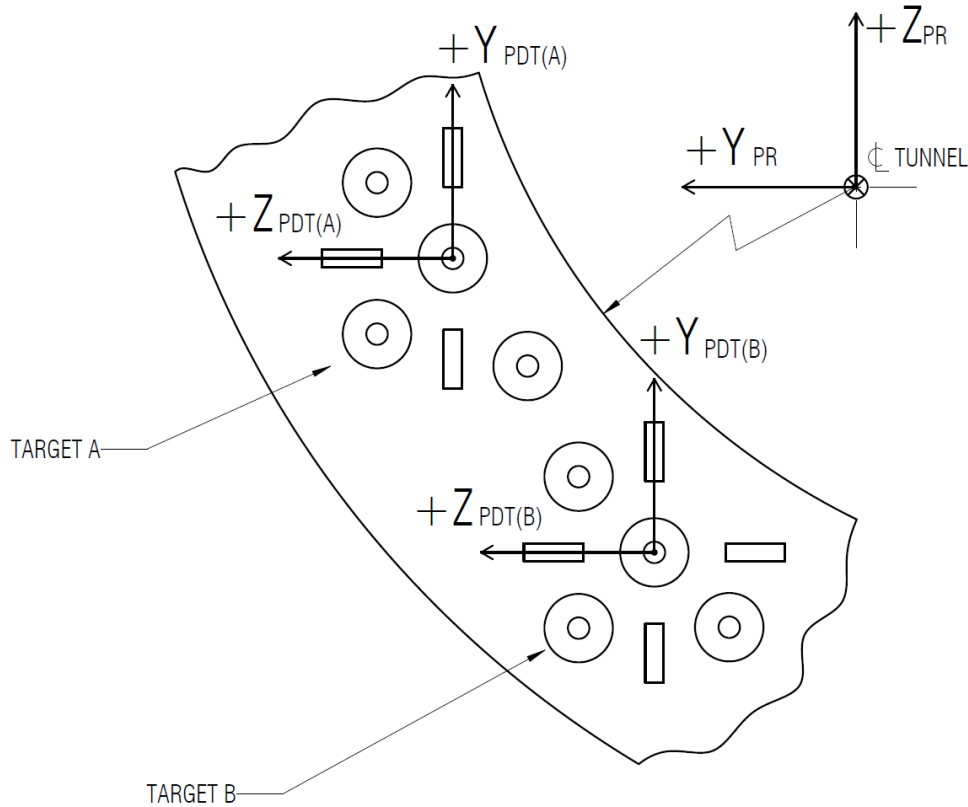

NOTES:

1. The PDT Backplate shall be mounted so that the Y-Z plane of the Target A PDT Coordinate System shall be within an angular tolerance of $\pm 1^\circ$ with respect to the Y-Z plane of the Passive SCS Ring Coordinate System.
2. The +Y axis of Target A PDT Coordinate System shall be within $\pm 1^\circ$ with respect +Z axis of the Passive SCS Ring Coordinate System, in the Y-Z plane of the Passive SCS Ring Coordinate System.
3. The Target B PDT Coordinate System shall be oriented so that each axis is within an angular tolerance of $\pm 0^\circ 6'$ with respect to each axis of the Target A PDT Coordinate System.

FIGURE 3.5.3.1-1 PDT COORDINATE SYSTEM FRAMES

3.5.3.1.1 TARGET A PDT COORDINATE SYSTEM

The Target A PDT Coordinate System is a right-handed Cartesian coordinate system. Its origin is at the geometric center of the standoff post of the target A PDT at the surface of the backplate facing the active docking vehicle. The coordinate system axis directions are defined as shown in Figure 3.5.3.1-1.

3.5.3.1.2 TARGET B PDT COORDINATE SYSTEM

The Target B PDT Coordinate System is a right-handed Cartesian coordinate system. Its origin is at the geometric center of the standoff post of the target B PDT at the

surface of the backplate facing the active docking vehicle. The coordinate system axis directions are defined as shown in Figure 3.5.3.1-1.

3.5.3.2 PERIPHERAL VISUAL TARGET

The Peripheral Visual Target consists of features to provide relative navigation or monitoring cues to a visible light camera. The PVT provides a high-contrast between the backplate and the circles and crosshairs, and another high contrast between the circular navigation features and the filter glass. The surface characteristics of the PVT features are given in sections 3.5.3.24 and 3.5.3.25.

3.5.3.3 PERIPHERAL INFRARED TARGET

The Peripheral Infrared Target consists of features to provide relative navigation or monitoring cues to a thermal imager. The PIT provides a high-thermal-contrast between the backplate and the circles and crosshairs, and another high contrast between the circular navigation features and the filter glass. The backplate and glass have high-emissivity surfaces, and the circular navigation features and crosshairs have low-emissivity surfaces.

3.5.3.4 DEFINITION OF AN INDICATING SURFACE

An Indicating Surface is a surface that is used for dual function as a visual navigation feature for the PVT and as a low-emissivity thermal feature for the PIT. The Circular Navigation Features and the crosshairs contain indicating surfaces. The reflective elements and the glass are not considered indicating surfaces.

3.5.3.5 SHORT RANGE REFLECTOR TARGET

The Short Range Reflector Target consists of assets to provide cues to a relative sensor. The SRRT is designed to provide reflective elements (under filter glass) at known locations on the backplate and standoff.

3.5.3.6 PDT STANDOFF POST POSITIONAL MOUNTING TOLERANCE

The centerline of the Target A PDT standoff post shall be located as shown in Figure 3.5.3.6-1, Location of the Target A PDT Standoff Post With Respect To the Passive SCS Ring Coordinate System.

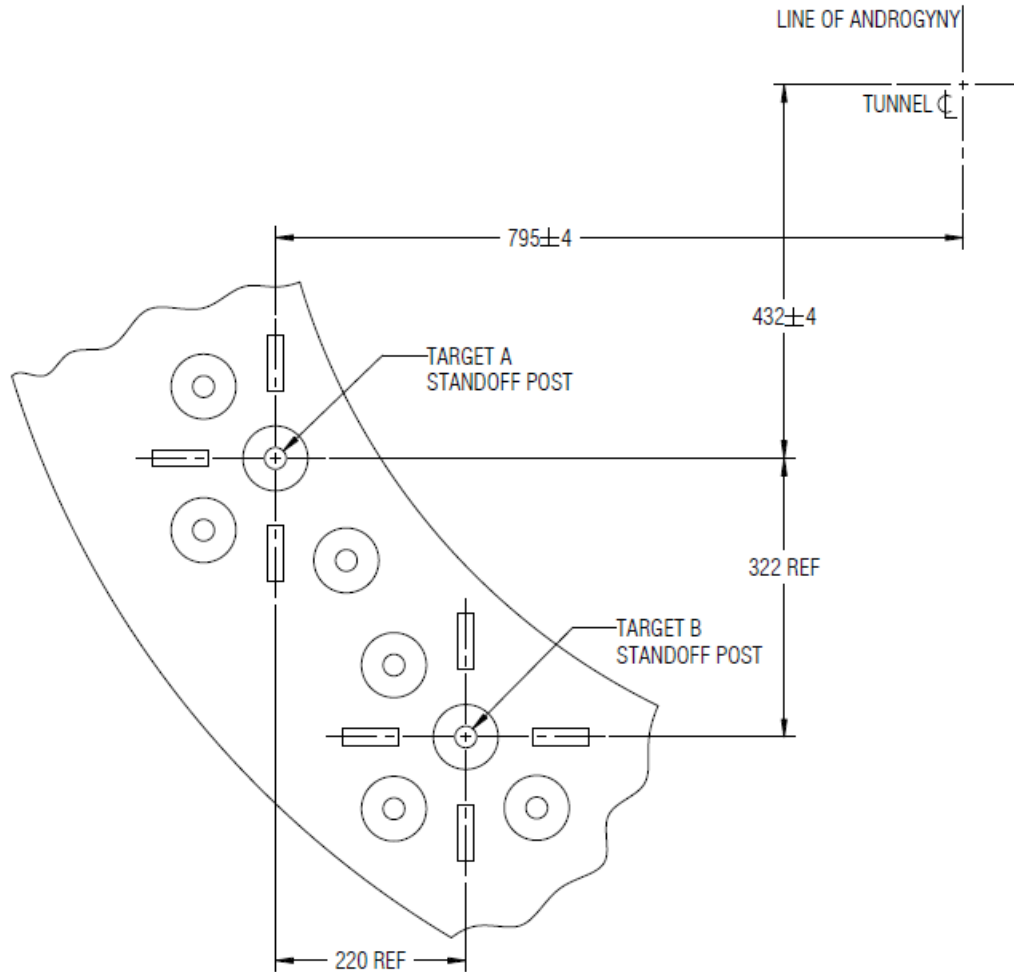


FIGURE 3.5.3.6-1 LOCATION OF THE TARGET A PDT STANDOFF POST WITH RESPECT TO THE PASSIVE SCS RING COORDINATE SYSTEM

3.5.3.7 PVT STANDOFF POSTS

The PVT shall have two standoff posts.

3.5.3.7.1 PVT STANDOFF CIRCLE POSITIONAL MISALIGNMENT

Each PVT standoff circle shall have a positional misalignment with respect to the local PDT coordinate system $\leq \pm 1$ mm within the y-z plane from the origin of the local PDT Coordinate System.

3.5.3.7.2 PVT STANDOFF CIRCLE ANGULAR MISALIGNMENT

Each PVT standoff circle shall have an angular misalignment with respect to the local PDT coordinate system $\leq \pm 1.0$ degree in wobble (RSS of pitch and yaw).

Note: As viewed from a camera, there should be no perceptible foreshortening of the standoff circle when viewed from a direction normal to backplate.

3.5.3.8 PVT VISUAL NAVIGATION FEATURES PLACEMENT

- A. The circular navigation features shall be located as shown in Figure 3.5.3.8-1, Circular Navigation Feature Locations in PDT (A) and PDT (B) Coordinates.
- B. There shall be at least 32 mm of backplate between the edge of any circular visual navigation feature and the edge of the backplate.

Note: A minimum border around each visual navigation feature must be maintained even in the presence of transition areas from light to dark where the raised backplate features meet the backplate.


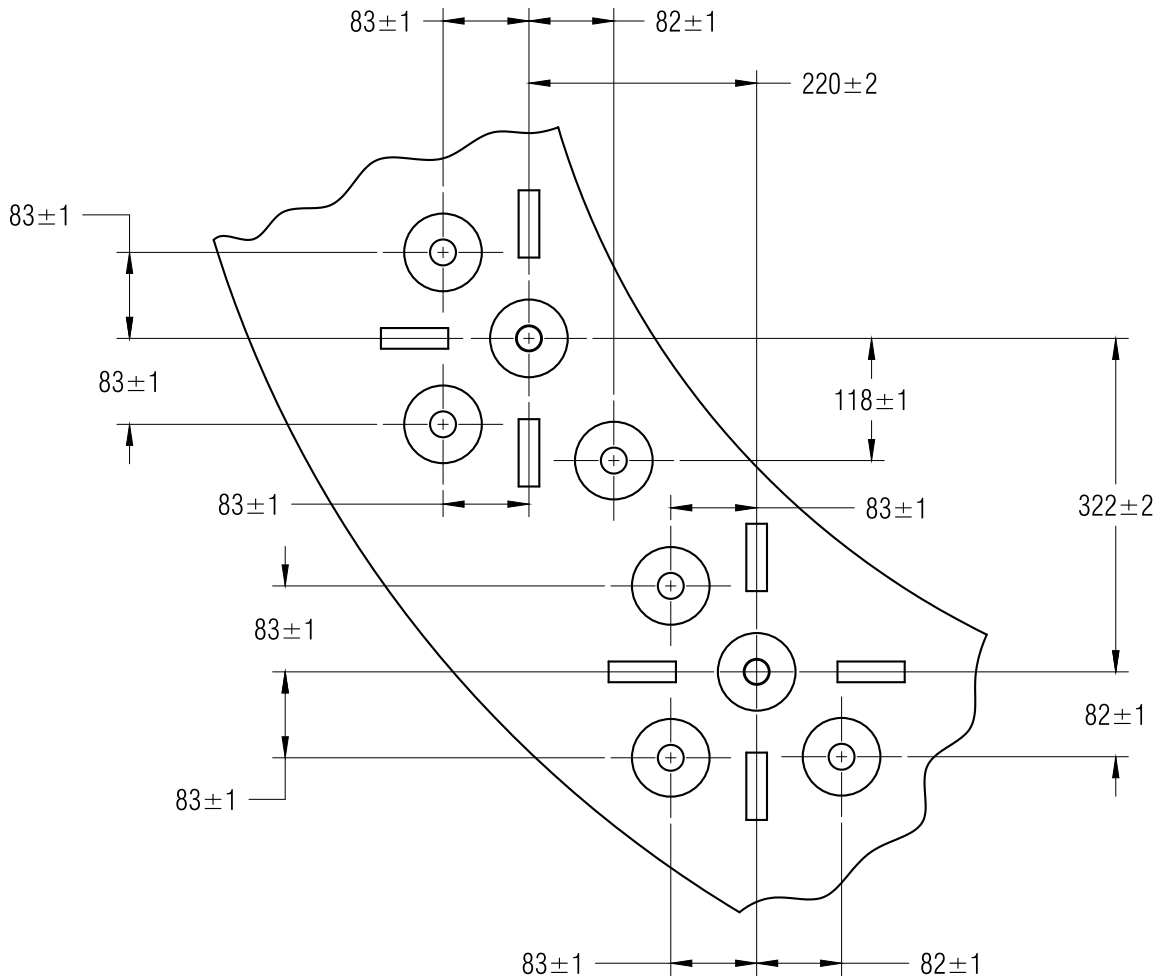


FIGURE 3.5.3.8-1 CIRCULAR NAVIGATION FEATURE LOCATIONS IN PDT (A) AND PDT (B) COORDINATES

3.5.3.9 PVT CIRCULAR NAVIGATION FEATURE INDICATING SURFACE OUTER DIAMETER

The outer diameter of the indicating surface of each circular navigation feature on the PVT backplate and the standoff post shall have a diameter as shown in Figure 3.5.3.9-1, Circular Navigation Feature Details.

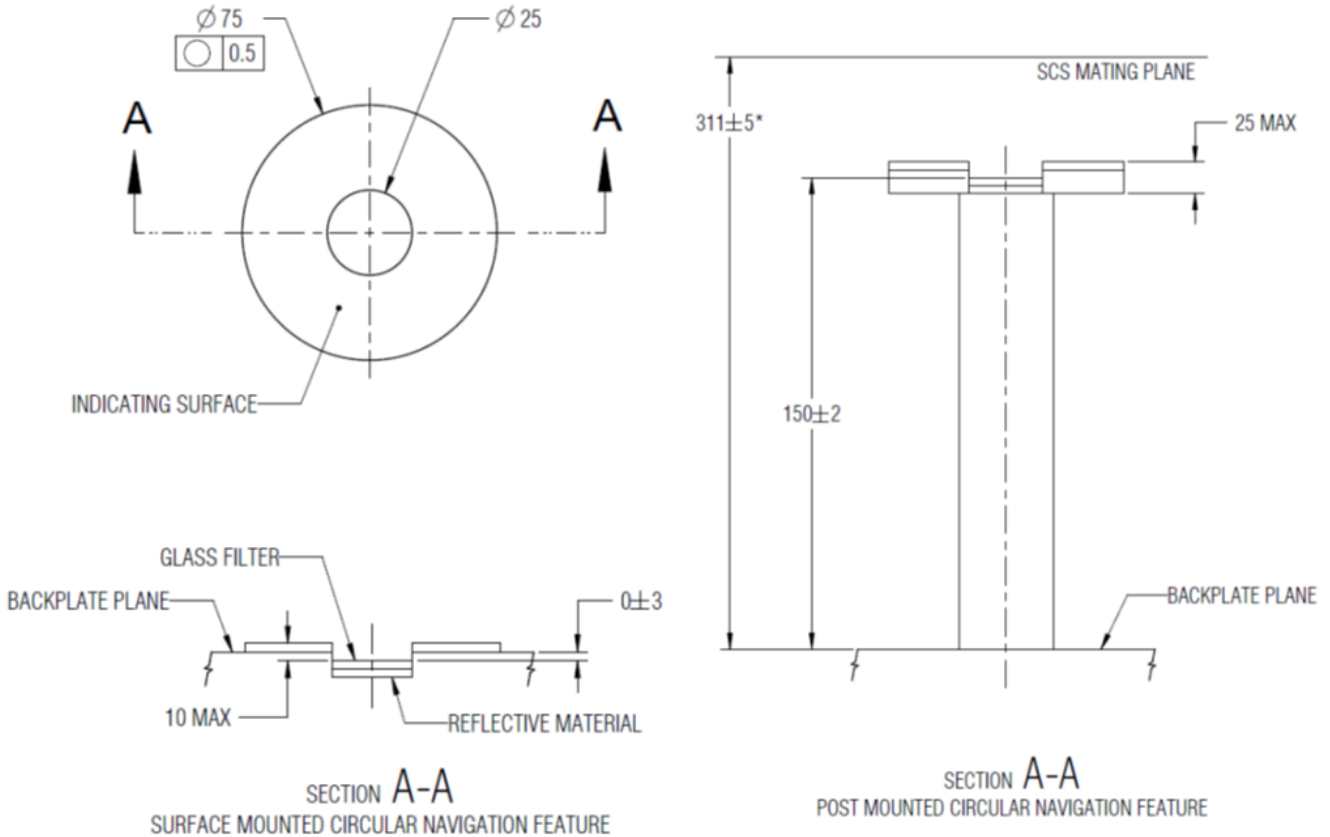

* NOTE: This dimension only applies to PDT Target A standoff post

FIGURE 3.5.3.9-1 CIRCULAR NAVIGATION FEATURE DETAILS

3.5.3.10 PVT CIRCULAR NAVIGATION FEATURE INDICATING SURFACE INNER DIAMETER

The inner diameter of the indicating Surface of each circular navigation feature on the PVT backplate and the standoff post shall have a diameter as shown in Figure 3.5.3.9-1.

3.5.3.11 PVT CIRCULAR NAVIGATION FEATURE INNER DIAMETER CONCENTRICITY

The inner diameter of each circular navigation feature on the PVT backplate and the standoff post shall be concentric with respect to the outer diameter with a circular deviation ≤ 0.76 mm.

3.5.3.12 PVT STANDOFF CIRCULAR NAVIGATION FEATURE THICKNESS

The circular navigation feature on each standoff post shall have a thickness from the PDT +X surface of the circular navigation feature to the PDT -X surface of the circular navigation feature as shown in Figure 3.5.3.9-1.

Note: There is no need for tight control on the thickness of the standoff circular navigation feature.

3.5.3.13 PVT CIRCULAR NAVIGATION FEATURE HEIGHT

Each circular navigation feature shall be placed such that the distance between the circular navigation feature top surface, center of the filter glass at the PDT +X (active docking vehicle-facing) surface, and the PDT Y-Z plane is as shown in Figure 3.5.3.9-1.

3.5.3.14 PVT CIRCULAR NAVIGATION FEATURE TRANSITION


The transition and circularity between Indicating Surfaces of the PVT and the backplate shall be as shown in Figure 3.5.3.9-1.

3.5.3.15 PVT CIRCULAR NAVIGATION FEATURE MAXIMUM RADIUS OF THE EDGES

The edges of the circular navigation features shall have a maximum radius of 2 mm <TBC 3-11>.

3.5.3.16 PVT CROSSHAIR LENGTH

The indicating surface of the crosshairs on the PVT backplate shall have a length as shown in Figure 3.5.3.16-1, PDT Crosshair Details.

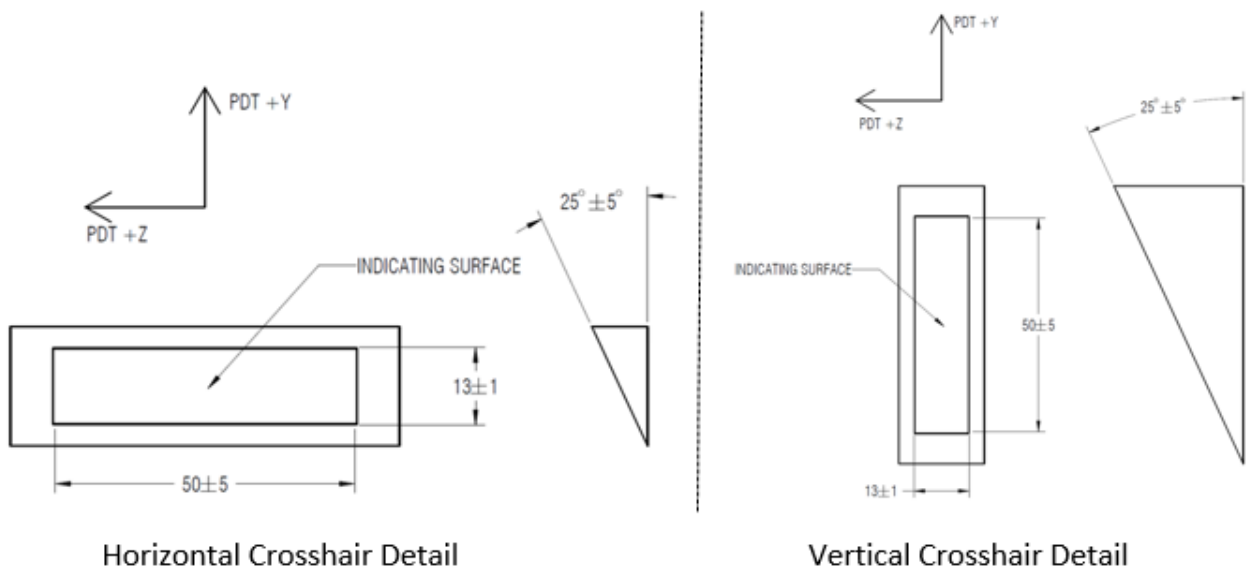

Maximum radius of the edges = 2 mm

FIGURE 3.5.3.16-1 PDT CROSSHAIR DETAILS

3.5.3.17 PVT CROSSHAIR WIDTH

The indicating surface of the crosshairs on the PVT backplate shall have a width as shown in Figure 3.5.3.16-1.

3.5.3.18 PVT CROSSHAIR PLACEMENT

The crosshairs shall be placed on the PVT backplate as shown in Figure 3.5.3.18-1, PVT Crosshair Locations in PDT (A) and PDT (B) Coordinates.

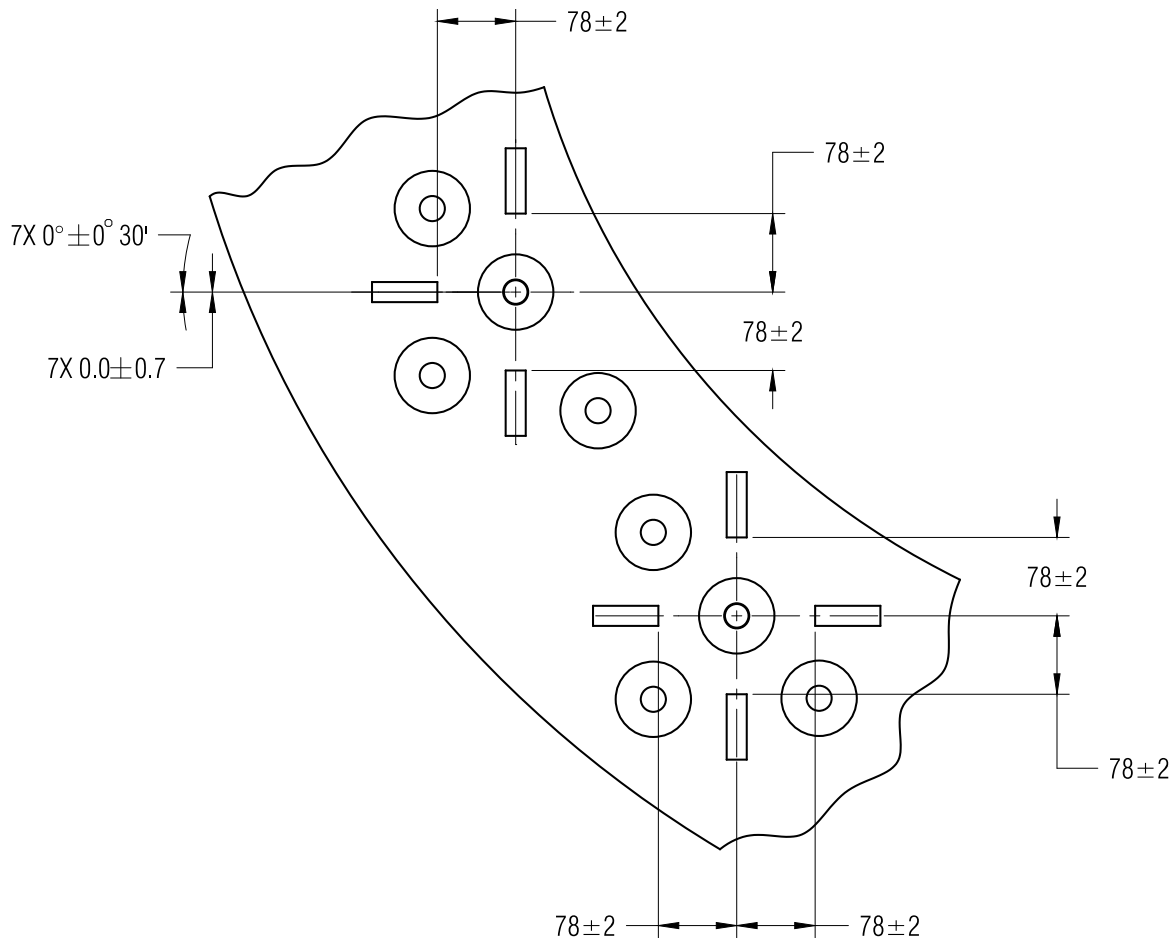


FIGURE 3.5.3.18-1 PVT CROSSHAIR LOCATIONS IN PDT (A) AND PDT (B) COORDINATES

3.5.3.19 PVT CROSSHAIR ALIGNMENT

The crosshairs shall be placed on the PVT backplate such that the longitudinal centerline is aligned with respect to a principal axis in the PDT coordinate system as shown in Figure 3.5.3.18-1.

3.5.3.20 INDICATING SURFACE CONTINUITY

The Indicating Surfaces of the circular navigation features and crosshairs shall be uninterrupted.

3.5.3.21 SHORT RANGE REFLECTOR TARGET REQUIREMENTS

The reflective elements are used by an active vehicle's laser sensor to provide relative measurements to the vehicle's navigation system. The SRRT reflectors shall be placed inside the circular navigation features, such that the reflective material is visible through their inner diameter. Each SRRT Reflective Element shall be comprised of a filter glass and reflective film/material. The filter glass material is oriented to exterior, with reflective material "protected" by the filter glass.

3.5.3.21.1 NUMBER OF SRRT REFLECTIVE ELEMENTS

The SRRT shall have eight (8) reflective elements on the docking target.

3.5.3.21.2 SRRT REFLECTIVE ELEMENT MATERIAL PEAK LUMINANCE FACTOR

The SRRT reflective element shall have a peak luminance factor > 2900 .

Note: Luminance factor is defined as the ratio of the luminance of a surface to the luminance of a diffuse white surface.

3.5.3.21.3 SRRT REFLECTIVE ELEMENT HALF LUMINANCE ANGLE

The SRRT reflective element shall have a half luminance angle ≥ 25 degrees.

Note: The half luminance angle is the angle with respect to the normal to the reflective element at which the luminance factor is half of its peak value. Luminance factor is defined as the ratio of the luminance of a surface to the luminance of a diffuse white surface.

3.5.3.21.4 SRRT REFLECTIVE ELEMENT GAIN

The SRRT reflective element shall have a gain ≥ 2200 .

Note: Gain is defined as the power return from a laser pointing normal to the reflective element normalized by the power return from a laser pointing normal to an ideal Lambertian scatterer.

3.5.3.21.5 SRRT REFLECTIVE ELEMENT HALF POWER ANGLE

The SRRT reflective element shall have a half power angle ≥ 0.25 degrees.

Note: The half power angle is defined as the angle with respect to the normal to the reflective element where the returned laser power is half of what it is at the normal.


3.5.3.21.6 SRRT REFLECTIVE ELEMENT LOCATION

An SRRT reflective element shall be located within the inner diameter of each circular navigation feature such that it is visible through the aperture of the inner diameter.

Note: The reflective elements should share a centroid with the circular navigation features.

3.5.3.21.7 SRRT FIELD OF VIEW OBSCURATION

Each SRRT reflective element shall have an unobscured field of view from the top surface of the filter glass originating from the edge of the clear aperture defined by the inner diameter in Paragraph 3.5.3.10 and shown in Figure 3.5.3.21.7-1, SRRT Unobscured Field of View Definition.

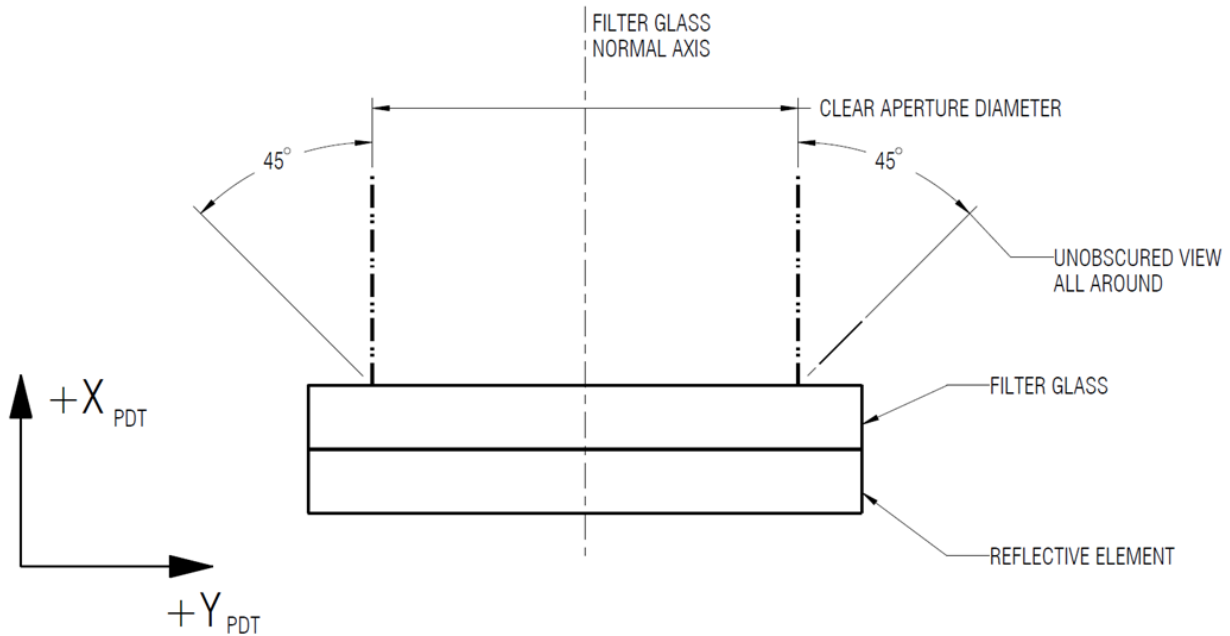

Note:

1. The normal axis of the filter glass shall be parallel to the X-Axis of the local Target A or Target B PDT coordinate system within $\pm 5^\circ$.
2. Field of view shown is local to each reflective element, and does not consider surrounding vehicle structure.

FIGURE 3.5.3.21.7-1 SRRT UNOBSCURED FIELD OF VIEW DEFINITION

3.5.3.21.8 SRRT REFLECTOR FILTERS

Each SRRT reflective element shall have a filter glass cover to secure the reflective material in place.

3.5.3.21.8.1 REFLECTIVE FILTER OPERATIONAL WAVELENGTH

The total operational wavelength of the filter glass shall include at least the wavelength 380 nm to 1600 nm.

3.5.3.21.8.2 MINIMUM RATE OF TRANSMISSION – OPERATIONAL WAVELENGTH

The minimum rate of transmission in the operational wavelength shall be greater than 80 %/cm for the operational wavelength specified in 3.5.3.21.8.1.

3.5.3.21.8.3 MAXIMUM RATE OF TRANSMISSION – NON-OPERATIONAL WAVELENGTH

The maximum rate of transmission in the operational wavelength outside the operational wavelength shall be less than 30 %/cm for wavelengths outside of the operational range (less than 380 nm, and greater than 1600 nm).

3.5.3.21.9 SRRT REFLECTOR FILTERS MISALIGNMENT

Each SRRT filter cover shall be perpendicular to the x-axis of the local Target A or Target B PDT coordinate system as shown in Figure 3.5.3.21.7-1.

3.5.3.21.10 SRRT OUT-OF-PLANE REFLECTIVE ELEMENT

The SRRT shall have one reflective element on each of the two (2) standoff posts.

3.5.3.22 PERIPHERAL INFRARED TARGET REQUIREMENTS

The PIT will provide infrared markings to allow the active docking vehicle relative navigation system to determine the lateral offset, and the pitch, yaw, and roll relative to the centerline of soft capture interface plane using a thermal imager.

The indicating surface of the crosshairs shall be angled towards the PDT -Y direction with respect to the PDT Y-Z plane, as shown in Figure 3.5.3.16-1.

3.5.3.23 PDT STANDOFF ELEMENT HEIGHT

The PDT shall have a standoff element as shown in Figure 3.5.3.9-1 extending from the local PDT coordinate system y-z plane to the surface of the filter glass covering the reflective element.

3.5.3.24 SURFACE COLORS

The surface colors on all indicating surfaces and the PDT +X (active docking vehicle-facing) surface of the backplate achieve a Michelson contrast of 85% or greater in the visible spectrum, and support use by a human operator, by meeting the following requirements:

- A. All crosshair and circular navigation features indicating surfaces Figure 3.5.2.2.9-1, Figure 3.5.3.9-1, and Figure 3.5.3.16-1 shall have a total integrated reflectance $\leq 7\%$ in the waveband from 380 to 780 nm at normal incidence.
- B. The PDT +X (active docking vehicle-facing) surface of the backplate shown in Figure 3.5.3.8-1 and Figure 3.5.3.18-1 shall have a total integrated reflectance $\geq 85\%$ in the waveband from 380 to 780 nm at normal incidence.

3.5.3.25 THERMAL EMITTANCE CONTRAST

All indicating surfaces and the PDT +X (active docking vehicle-facing) surface of the backplate shall have the thermal emittance (the ratio of radiant emittance of heat of an object to that of a standard blackbody) contrasts as follows:

Crosshairs and circular navigation features:

- A. emittance contrast with respect to backplate $\Delta \geq 0.3$
- B. emittance contrast with respect to reflective element with glass $\Delta \geq 0.3$


3.5.3.26 SURFACE SPECULAR REFLECTANCE

All indicating surfaces and the PDT +X (active docking vehicle-facing) surface of the backplate shall have a specular reflectance $\leq 20\%$ in the waveband 380 to 780 nm.

3.5.3.27 KEY FEATURE MEASUREMENTS AFTER PDT INSTALLATION

Accurate knowledge of the location of key target features on the PDT is important to producing accurate relative navigation estimates during target use. This is generally accomplished by collecting measurements of the as-installed flight target (on the ground or on-orbit). After PDT installation, the location of key target features shall be known (by either measurement or fabrication tolerance) to within an uncertainty of ± 1 mm per axis with respect to the SCS Passive Ring coordinate frame. The key feature locations to be made available to users, as shown in Figure 3.5.3.27-1, PDT Key Features, are:

- A. X, Y, Z location of the center of each circular navigation feature at the top surface of the filter glass
- B. Inner and outer diameter of each circular navigation feature
- C. X location of the indicating surface of each circular navigation feature
- D. Length and width of each crosshair
- E. Y, Z location of the center of each crosshair
- F. X location of the top surface of the backplate at the outer edge of each crosshair where it intersects the crosshair centerline

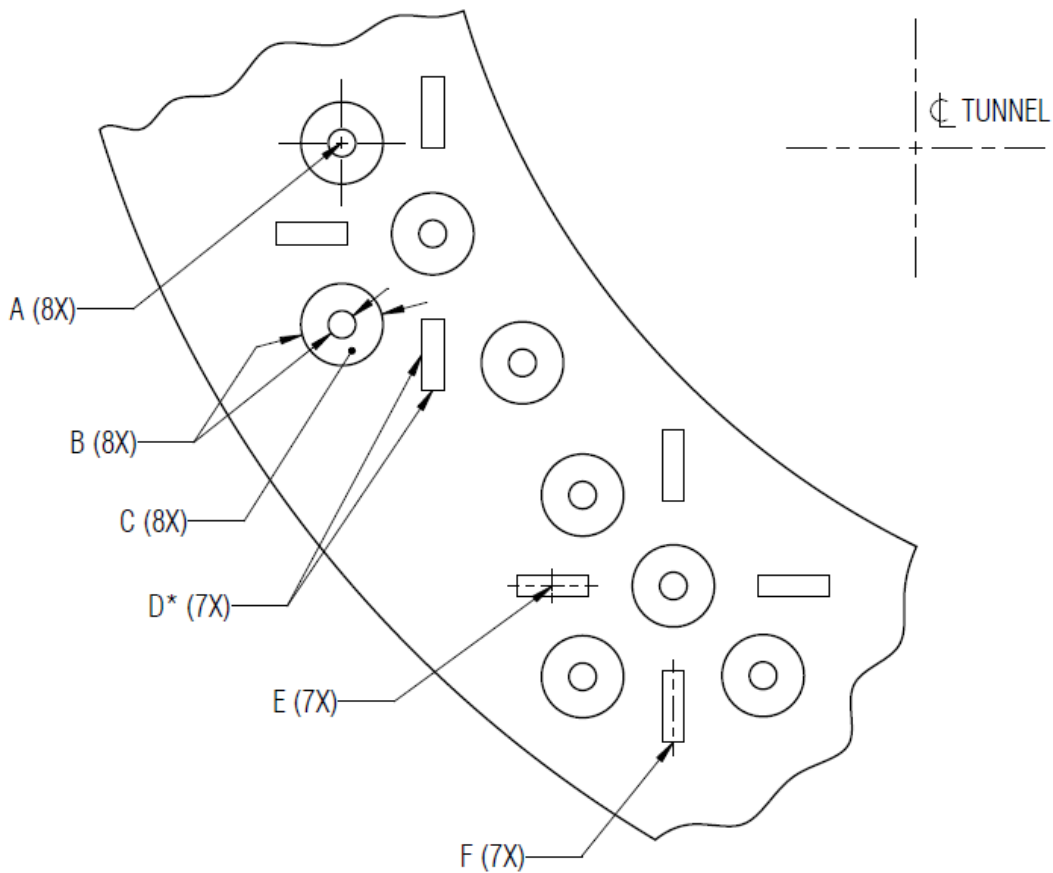

* NOTE: Need to measure length and width.

FIGURE 3.5.3.27-1 PDT KEY FEATURES















APPENDIX A - ACRONYMS, ABBREVIATIONS AND SYMBOLS DEFINITION

APAS	Androgynous Peripheral Assembly System
AWG	American Wire Gauge
C	Celsius
CBM	Common Berthing Mechanism
CC&DH	Command, Control and Data Handling
CDT	Centerline Docking Target
CG	Center of Gravity
cm	centimeter
CRT	Centerline Reflector Target
CVT	Centerline Visual Target
DC	Direct Current
deg	degree
DOF	Degree of Freedom
e.g.	for example
EMA	Electro-Mechanical Actuator
EMI	Electromagnetic Interference
F	Fahrenheit
FOV	Field of View
FRAM	Flight Releasable Attachment Mechanism
GN&C	Guidance Navigation and Control
HCS	Hard Capture System
hPa	Hecto Pascal(s)
IBDM	International Berthing and Docking Mechanism
IDA	International Docking Adapter
IDD	Interface Definition Document
IDS	International Docking System
IDSS	International Docking System Standard
IDSS-B	Berthing compatible IDSS implementation
IEEE	Institute of Electrical and Electronic Engineers
in	inches
ISS	International Space Station
kg	kilogram
kgf	kilograms force
KOZ	Keep Out Zone
LEO	Low Earth Orbit
m	meters
MAX	Maximum

**IDSS IDD Revision E
October 2016**

MCB	Multilateral Control Board
MIL	Military
MIN	Minimum
mm	Millimeters
MOI	Moments of inertia
N	Newton(s)
NASA	National Aeronautics and Space Administration
NDS	NASA Docking System
nm	nanometers
Nm	Newton-Meter(s)
ODS	Orbiter Docking System
ohm	Ohms
Pa	Pascal
PDT	Peripheral Docking Target
PDTU	Power/Data Transfer Umbilical
PIT	Peripheral Infrared Target
PMA	Pressurized Mating Adapter
POI	Products of inertia
PR	Passive Ring
PRT	Perimeter Reflector Target
PVT	Peripheral Visual Target
R	Radius
rad	Radian
RECP	Receptacle
REF	Reference
RF	Radio Frequency
RMS	Root Mean Square
RSS	Root Sum Square
RTN	Return
RX	Receive
SCS	Soft Capture System
sec	second
SR	Spherical Radius
SRRT	Short Range Reflector Target
SSRMS	Space Station Remote Manipulator System
STD	Standard
Sys	System
TBC	To Be Confirmed
TBD	To Be Determined
TBR	To Be Resolved
TBS	To Be Supplied
THK	Thick

**IDSS IDD Revision E
October 2016**

tonne	metric ton = 1000 kilograms
TX	Transmit
US	United States
VDC	Volts Direct Current
$\omega = [\omega_x, \omega_y, \omega_z]^T$	Angular Velocity Vector
	Basic (Theoretical) Dimension
	Between
	Centerline
	Circularity
	Concentricity
	Datum Feature
	Depth / Deep
	Diameter
	Difference
TRUE	Dimension in a view that does not show true feature shape
	Flatness
	Maximum Material Condition
	Perpendicularity
θ_y	Pitch Angle (relative to Y Axis)
	Position
ϕ_x	Roll Angle (relative to X Axis)
SR	Spherical Radius
	Surface Finish
ψ_z	Yaw Angle (relative to Z Axis)

APPENDIX B - GLOSSARY <RESERVED>

APPENDIX C - OPEN WORK

Table C-1 lists the specific To Be Determined (TBD) items in the document that are not yet known. The TBD is inserted as a placeholder wherever the required data is needed and is formatted in bold type within brackets. The TBD item is numbered based on the section where the first occurrence of the item is located as the first digit and a consecutive number as the second digit (i.e., <TBD 4-1> is the first undetermined item assigned in Section 4 of the document). As each TBD is solved, the updated text is inserted in each place that the TBD appears in the document and the item is removed from this table. As new TBD items are assigned, they will be added to this list in accordance with the above described numbering scheme. Original TBDs will not be renumbered.

TABLE C-1 TO BE DETERMINED ITEMS

TBD	Section	Description
<TBC 3-1>	3.2.4.1	Value to be confirmed
<TBC 3-11>	3.5.3.15	Maximum radius of 2 mm is to be confirmed
<TBD D-1>	Table D.3.2-2	PMA3 CRT reflective element locations to be determined.
<TBD F-1>	Table F.2.1.2-1	Axial/compression, lateral, bending, and torsion values are to be determined

Table C-2 lists the specific To Be Resolved (TBR) issues in the document that are not yet known. The TBR is inserted as a placeholder wherever the required data is needed and is formatted in bold type within brackets. The TBR issue is numbered based on the section where the first occurrence of the issue is located as the first digit and a consecutive number as the second digit (i.e., <TBR 4-1> is the first unresolved issue assigned in Section 4 of the document). As each TBR is resolved, the updated text is inserted in each place that the TBR appears in the document and the issue is removed from this table. As new TBR issues are assigned, they will be added to this list in accordance with the above described numbering scheme. Original TBRs will not be renumbered.

TABLE C-2 TO BE RESOLVED ISSUES

TBR	Section	Description
<TBR 3-1>	3.2.2.5, F.2.2	SCS sensors total actuation force to be resolved based on as-built data to identify if there is excessive margin in this requirement
<TBR F-1>	F.1.2	Minimum extension height to be established once minimum stiffness values are established (Table F2.1.2-1)
<TBR F-2>	F.2.1.1	Active SCS mode of operation to support berthing to be resolved
<TBR F-3>	F.2.2, F.2.3	The total berthing force to actuate the extended SCS latches and all of its sensors to be resolved based on as-built data to identify if it is sufficient or if there is excessive margin in this requirement

APPENDIX D - LEGACY HARDWARE

D.1.0 DOCKING SYSTEM

D.1.1 HARD CAPTURE SYSTEM HERITAGE STRIKER ZONES

To maintain simplicity for the standard, a set of generic zones, called the HCS Component Striker Zones, are defined on the HCS mating flange (shown in Figure 3.2.3-1) as striker zones for various peripheral components and sensors. These zones are the passive flat surface that a docking system designer may choose to use as striker areas for the corresponding devices.

The HCS Component Striker Zones are nine identical segments around the circumference of the HCS. A reference numbering scheme for the segments is shown in Figure D.1.1-1, HCS Component Striker Zone Reference Numbers. Each segment consists of a Free Area and a Reserved Area.

For both the Free Area and the Reserved Area, the striker area is a flat surface with a few local exceptions. These exceptions are various small holes used for the underlying subsystems (such as attach points for the Latching System), and for other purposes. Many times, these small holes will not interfere with the striking device. The details of these small holes and other features are provided herein for a designer to consider when utilizing the striker zone.

In the Free Area, the same small exceptions occur repeatedly, and these features should be easier to work around to place striking components. The Reserved Area is where legacy systems, such as APAS or NDS, have already located components which will be difficult to work around in some locations, and the use of these areas will require careful, detailed coordination with those designs to assure no interference. These features within the striker zones are shown in Figure D.1.1-2, APAS Features within Striker Zones, and Figure D.1.1-3, NDS Features within Striker Zones.

In summary, using the Free Areas is recommended, though the locations of some small holes must be considered. Using the Reserved Areas will require collaboration with the relevant legacy system and/or mission specific information.



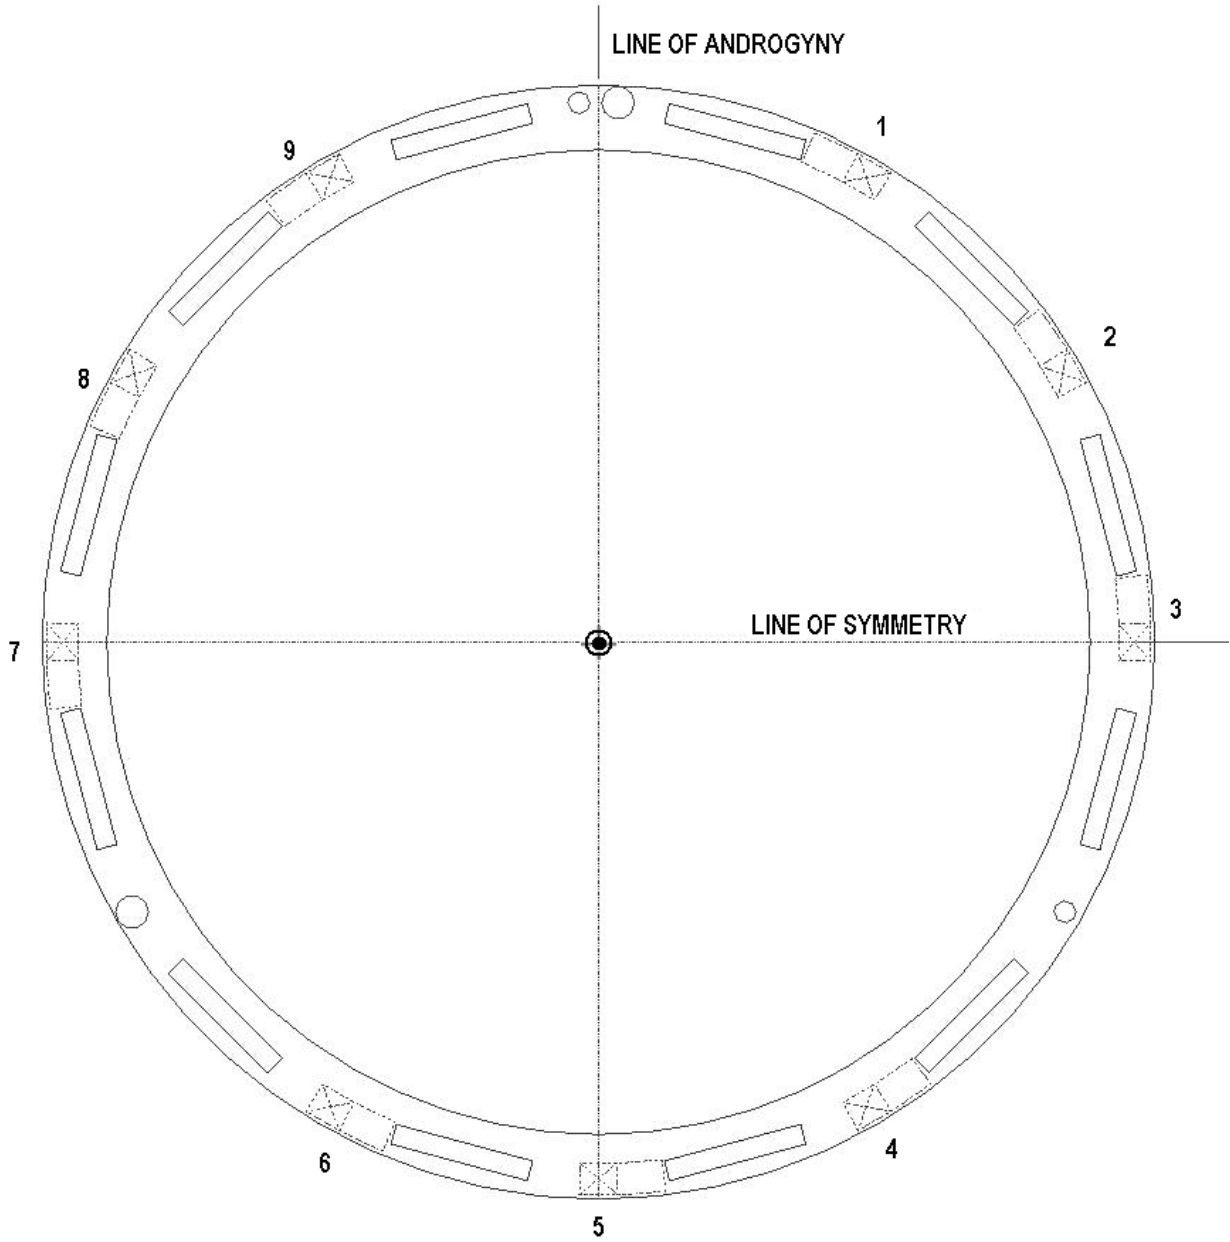



FIGURE D.1.1-1 HCS COMPONENT STRIKER ZONE REFERENCE NUMBERS

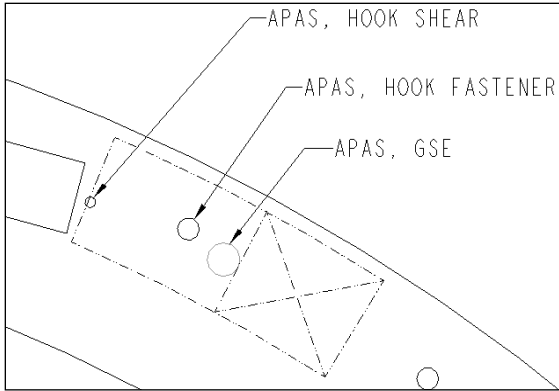


Detail applies at the following locations:
 1, 3, 4, 7, 9

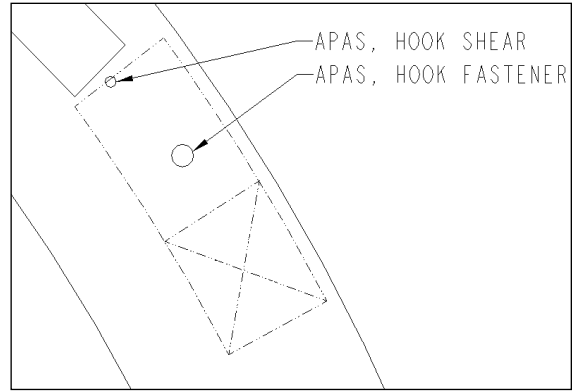

Detail Applies at the following locations:
 2, 6

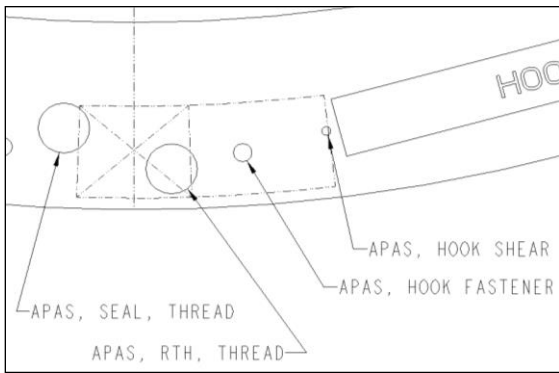


Detail applies at the following location:
 5

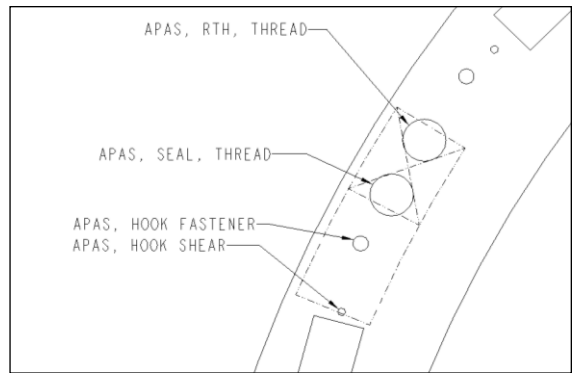

Detail Applies at the following location:
 8

FIGURE D.1.1-2 APAS FEATURES WITHIN STRIKER ZONES

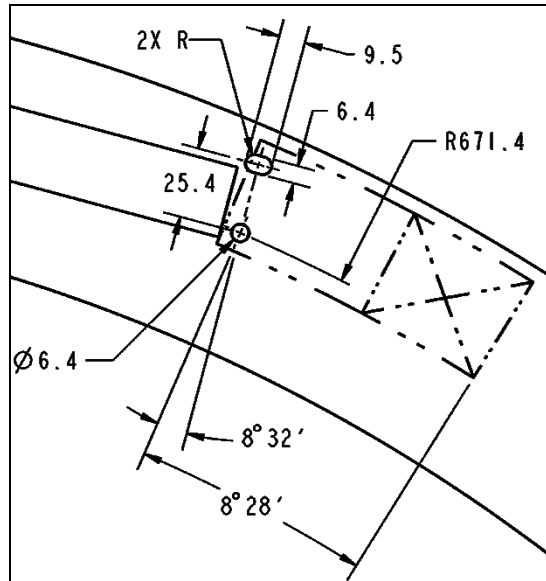

Detail applies at all locations.

FIGURE D.1.1-3 NDS FEATURES WITHIN STRIKER ZONES

D.2.0 PDTU

D.2.1 IDA PDTU CONNECTOR IMPLEMENTATION

The IDA PDTU is largely IDSS-compliant, with certain restrictions documented in this appendix. This appendix documents the differences between IDSS IDD Revision D section 3.4.1.9 and the IDA PDTU interface described in JSC 65795 Revision J, NASA Docking System (NDS) Interface Definitions Document (IDD), section 4.2.3.1. The primary differences are:

- IDA chose 28 VDC as the User-Defined voltage level for pins 44 and 45, these 8 gauge pins are populated in the connector, and the 28 VDC wiring is installed back to a bulkhead. However, no 28 VDC power is currently provided by ISS for these feeds.
- IDA added pins that allow contingency operation of the IDA-side active hooks from a mated vehicle.
- None of the 12 gauge 28 VDC power pins are installed or wired.

The following tables, Table D.2.1-1, IDA PDTU Connector Pinouts, Table D.2.1-2, IDA PDTU Connector Pinouts Definitions, Table D.2.1-3, Unassigned and Unpopulated IDA PDTU Connector Pinouts, show the differences between the PDTU described in Tables 3.4.1.9-1, 3.4.1.9-2, and 3.4.1.9-3 and the IDA PDTU. The rows shaded in blue correspond to IDA pins that are in addition to the IDSS. The green shading indicates IDSS pins that are not present on the IDA.

TABLE D.2.1-1 IDA PDTU CONNECTOR PINOUTS (2 PAGES)

Plug Umbilical Power+Data			Receptacle Umbilical Power+Data		
PIN #	Size	SIGNAL	PIN #	Size	SIGNAL
42	8	120VDC_SysB	42	8	120VDC_SysA
43	8	120VDC_RTN_SysB	43	8	120VDC_RTN_SysA
44	8	User_Def_VDC_SysB	44	8	User_Def_VDC_SysA
45	8	User_Def_VDC_RTN_SysB	45	8	User_Def_VDC_RTN_SysA
46	8	Ground Safety Wire_SysB	46	8	Ground Safety Wire_SysA
16	12	28VDC_SysB	16	12	28VDC_SysA
29	12	28VDC_RTN_SysB	29	12	28VDC_RTN_SysA
28	12	28VDC_SysB	28	12	28VDC_SysA
41	12	28VDC_RTN_SysB	41	12	28VDC_RTN_SysA
40	12	28VDC_SysB	40	12	28VDC_SysA
39	12	28VDC_RTN_SysB	39	12	28VDC_RTN_SysA
48	12	28VDC_SysB	48	12	28VDC_SysA
61	12	28VDC_RTN_SysB	61	12	28VDC_RTN_SysA
60	12	28VDC_SysB	60	12	28VDC_SysA
73	12	28VDC_RTN_SysB	73	12	28VDC_RTN_SysA
13	20	SysB_100BaseT_RX_P_BI_DB_P	13	20	SysA_100BaseT_TX_P_BI_DA_P
27	20	SysB_100BaseT_RX_N_BI_DB_N	27	20	SysA_100BaseT_TX_N_BI_DA_N
86	20	SysB_100BaseT_TX_P_BI_DA_P	86	20	SysA_100BaseT_RX_P_BI_DB_P
72	20	SysB_100BaseT_TX_N_BI_DA_N	72	20	SysA_100BaseT_RX_N_BI_DB_N
14	20	SysB_1GEth_BI_DC_P	14	20	SysA_1GEth_BI_DD_P
15	20	SysB_1GEth_BI_DC_N	15	20	SysA_1GEth_BI_DD_N
87	20	SysB_1GEth_BI_DD_P	87	20	SysA_1GEth_BI_DC_P
88	20	SysB_1GEth_BI_DD_N	88	20	SysA_1GEth_BI_DC_N
25	20	SysB_1553_BUS1_P	25	20	SysA_1553_BUS1_P
38	20	SysB_1553_BUS1_N	38	20	SysA_1553_BUS1_N
70	20	SysB_1553_BUS2_P	70	20	SysA_1553_BUS2_P
57	20	SysB_1553_BUS2_N	57	20	SysA_1553_BUS2_N
19	20	SysB_1553_BUS3_P	19	20	SysA_1553_BUS3_P
32	20	SysB_1553_BUS3_N	32	20	SysA_1553_BUS3_N
51	20	SysB_1553_BUS4_N	51	20	SysA_1553_BUS4_N
64	20	SysB_1553_BUS4_P	64	20	SysA_1553_BUS4_P
21	20	SysB_Umb_Plug_LoopBack_P	21	20	Short_to_pin_34
34	20	SysB_Umb_Plug_LoopBack_N	34	20	Short_to_pin_21
53	20	Short_to_pin_66	53	20	SysA_Umb_Receptacle_LoopBack_P
66	20	Short_to_pin_53	66	20	SysA_Umb_Receptacle_LoopBack_N

TABLE D.2.1-1 IDA PDTU CONNECTOR PINOUTS (2 PAGES)

Plug Umbilical Power+Data			Receptacle Umbilical Power+Data		
PIN #	Size	SIGNAL	PIN #	Size	SIGNAL
1	20	ISS- ICP_HOOK_GANG1_OP_VV_CMD_SIG	1	20	HOOK_GANG1_OP_VV_CMD_P
6	20	ISS- ICP_HOOK_GANG1_OP_VV_CMD_RTN	6	20	HOOK_GANG1_OP_VV_CMD_N
74	20	ISS- ICP_HOOK_GANG1_CL_VV_CMD_SIG	74	20	HOOK_GANG1_CL_VV_CMD_P
75	20	ISS- ICP_HOOK_GANG1_CL_VV_CMD_RTN	75	20	HOOK_GANG1_CL_VV_CMD_N
3	20	ISS- ICP_TO_VV_MON_HOOK_GANG1A/B_OP_MTR_POS_SIG	3	20	HOOK_GANG1A/B_OP_MTR_POS_P
4	20	ISS- ICP_TO_VV_MON_HOOK_GANG1A/B_OP_MTR_POS_RTN	4	20	HOOK_GANG1A/B_OP_MTR_POS_N
76	20	ISS- ICP_TO_VV_MON_HOOK_GANG1A/B_CL_MTR_POS_SIG	76	20	HOOK_GANG1A/B_CL_MTR_POS_P
77	20	ISS- ICP_TO_VV_MON_HOOK_GANG1A/B_CL_MTR_POS_RTN	77	20	HOOK_GANG1A/B_CL_MTR_POS_N

Legend:

IDSS Item not present on IDA

Item Unique to IDA PDTU

TABLE D.2.1-2 IDA PDTU CONNECTOR PINOUTS DEFINITIONS (2 PAGES)

PIN #	DEFINITION
1	+28V signal to drive IDA hooks to the open position
3	Sensor indicating IDA hooks are open
4	Ground return for pin 3
6	Ground return for pin 1
13	100 Base TX (IEEE 802.3u Ethernet) Receive/Transmit positive wire (also used as BI_DB_P/BI_DA_P for gigabit Ethernet)
14	Gigabit Ethernet (IEEE 802.3ab) BI_DC_P/BI_DD_P wire
15	Gigabit Ethernet (IEEE 802.3ab) BI_DC_N/BI_DD_N wire
16	28 Volts Direct Current from System A or B; sinks or sources voltage between vehicles
19	MIL-STD-1553 Bus 3 positive
21	Umbilical loopback positive is shorted with pin 34 on system A; this allows the B system to detect mating
25	MIL-STD-1553 Bus 1 positive
27	100 Base TX (IEEE 802.3u Ethernet) Receive/Transmit negative wire (also used as BI_DB_N/BI_DA_N for gigabit Ethernet)

TABLE D.2.1-2 IDA PDTU CONNECTOR PINOUTS DEFINITIONS (2 PAGES)

PIN #	DEFINITION
28	28 Volts Direct Current from System A or B; sinks or sources voltage between vehicles
29	28 Volts Direct Current from System A or B; return line for 28 volt line
32	MIL-STD-1553 Bus 3 negative
34	Umbilical loopback negative is shorted with pin 21 on system A; this allows the B system to detect mating
38	MIL-STD-1553 Bus 1 negative
39	28 Volts Direct Current from System A or B; return line for 28 volt line
40	28 Volts Direct Current from System A or B; sinks or sources voltage between vehicles
41	28 Volts Direct Current from System A or B; return line for 28 volt line
42	120 Volts Direct Current from System A or B; sinks or source voltage between vehicles
43	120 Volts Direct Current Return from System A or B; return for 120 volt
44	Direct Current (user-defined voltage) from System A or B; sinks or sources voltage between vehicles; also serves as mating guide for connector
45	Direct Current (user-defined voltage) from System A or B; return line for pin 44; also serves as mating guide for connector
46	Ground Safety Wire provides bonding ground connection between vehicles
48	28 Volts Direct Current from System A or B; sinks or sources voltage between vehicles
51	MIL-STD-1553_Bus 4 negative
53	Umbilical loopback positive is shorted with pin 66 on system B; this allows the A system to detect mating
57	MIL-STD-1553_Bus 2 negative
60	28 Volts Direct Current from System A or B; sinks or sources voltage between vehicles
61	28 Volts Direct Current from System A or B; return line for 28 volt line
64	MIL-STD-1553 Bus 4 positive
66	Umbilical loopback positive is shorted with pin 53 on system B; this allows the A system to detect mating
70	MIL-STD-1553 Bus 2 positive
72	100 Base TX (IEEE 802.3u Ethernet) Transmit/Receive positive wire (also used as BI_DA_N/BI_DB_N for gigabit Ethernet)
73	28 Volts Direct Current from System A or B; return line for 28 volt line
74	+28V signal to drive IDA hooks to the closed position
75	Ground return for pin 74
76	Sensor indicating IDA hooks are closed
77	Ground return for pin 76
86	100 Base TX (IEEE 802.3u Ethernet) Transmit/Receive positive wire (also used as BI_DA_P/BI_DB_P for gigabit Ethernet)
87	Gigabit Ethernet (IEEE 802.3ab) BI_DD_P/BI_DC_P wire
88	Gigabit Ethernet (IEEE 802.3ab) BI_DC_N/BI_DC_N wire

Legend:

IDSS Item not present on IDA	Item Unique to IDA PDTU
-------------------------------------	--------------------------------

TABLE D.2.1-3 UNASSIGNED AND UNPOPULATED IDA PDTU CONNECTOR PINOUTS

Size	Pin Numbers
8	47
12	5, 7, 9, 11, 16, 18, 19, 20, 22, 24, 26, 28, 29, 30, 31, 32, 33, 35, 37, 39, 40, 41, 48, 49, 50, 51, 52, 54, 56, 58, 59, 60, 61, 63, 64, 65, 67, 69, 71, 73, 78, 80, 82, 84
20	2, 8, 10, 12, 17, 23, 36, 55, 62, 68, 79, 81, 83, 85

D.3.0 TARGETS


D.3.1 IDA PDT IMPLEMENTATION

D.3.1.1 IDA PDT OVERVIEW

The characteristics of the PDT as implemented on the ISS IDA are contained in this appendix. The material properties and physical dimensions for the IDA PDT are IDSS-compliant per the requirements defined in section 3.5.3, Peripheral Docking Target, except where noted in this appendix.

D.3.1.2 IDA PDT STANDOFF POST POSITIONAL MOUNTING TOLERANCE

The centerlines of the Target A and Target B PDT standoff posts for IDA are mounted as shown in Figure 3.5.3.6-1 except where noted in Figure D.3.1.2-1, Location of the PDT Standoff Posts With Respect To the Passive SCS Ring Coordinate System for IDA.

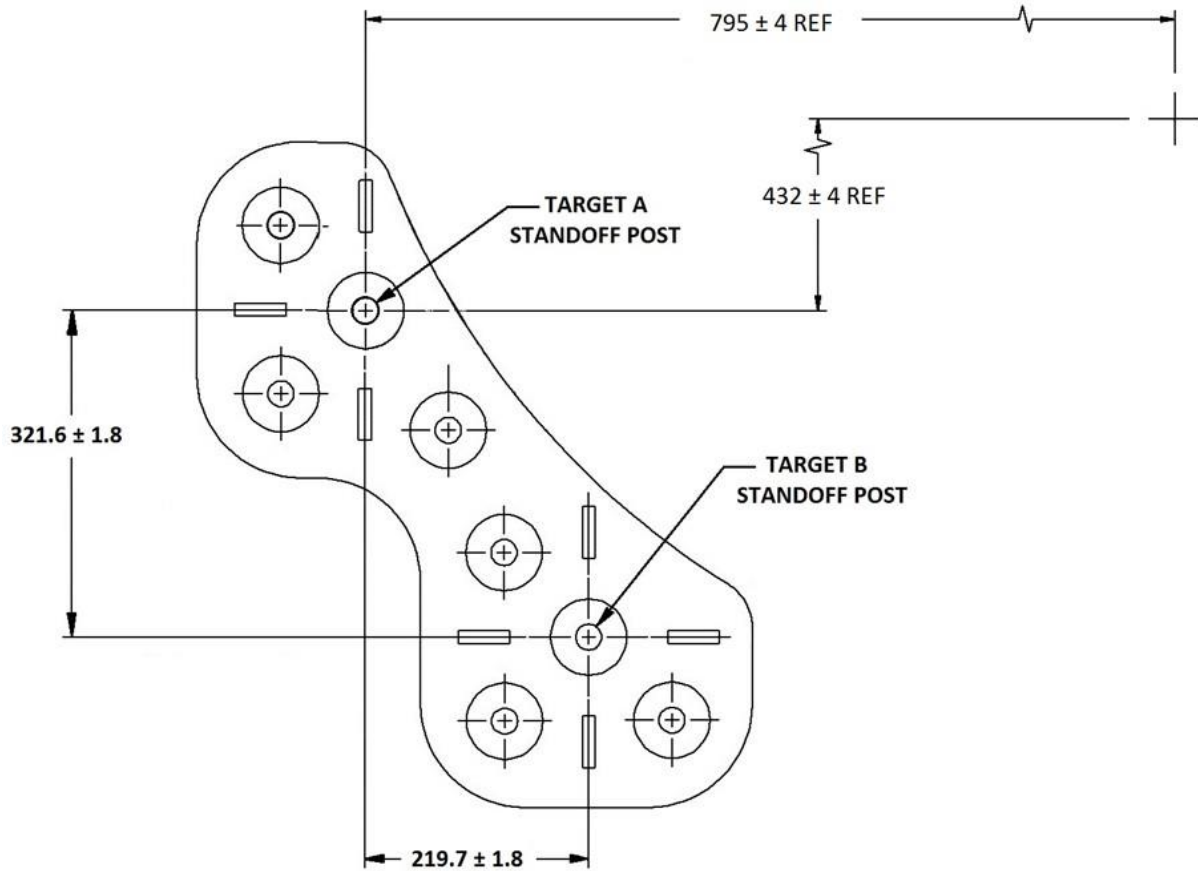

Note: REF dimensions are defined in Figure 3.5.3.6-1.

FIGURE D.3.1.2-1 LOCATION OF THE PDT STANDOFF POSTS WITH RESPECT TO THE PASSIVE SCS RING COORDINATE SYSTEM FOR IDA

D.3.1.3 IDA PVT VISUAL NAVIGATION FEATURES PLACEMENT

The placement of the IDA PVT visual circular navigation features is as defined in section 3.5.3.8, except feature locations defined in subparagraph A are as shown in Figure D.3.1.3-1, Circular Navigation Feature Locations for IDA.

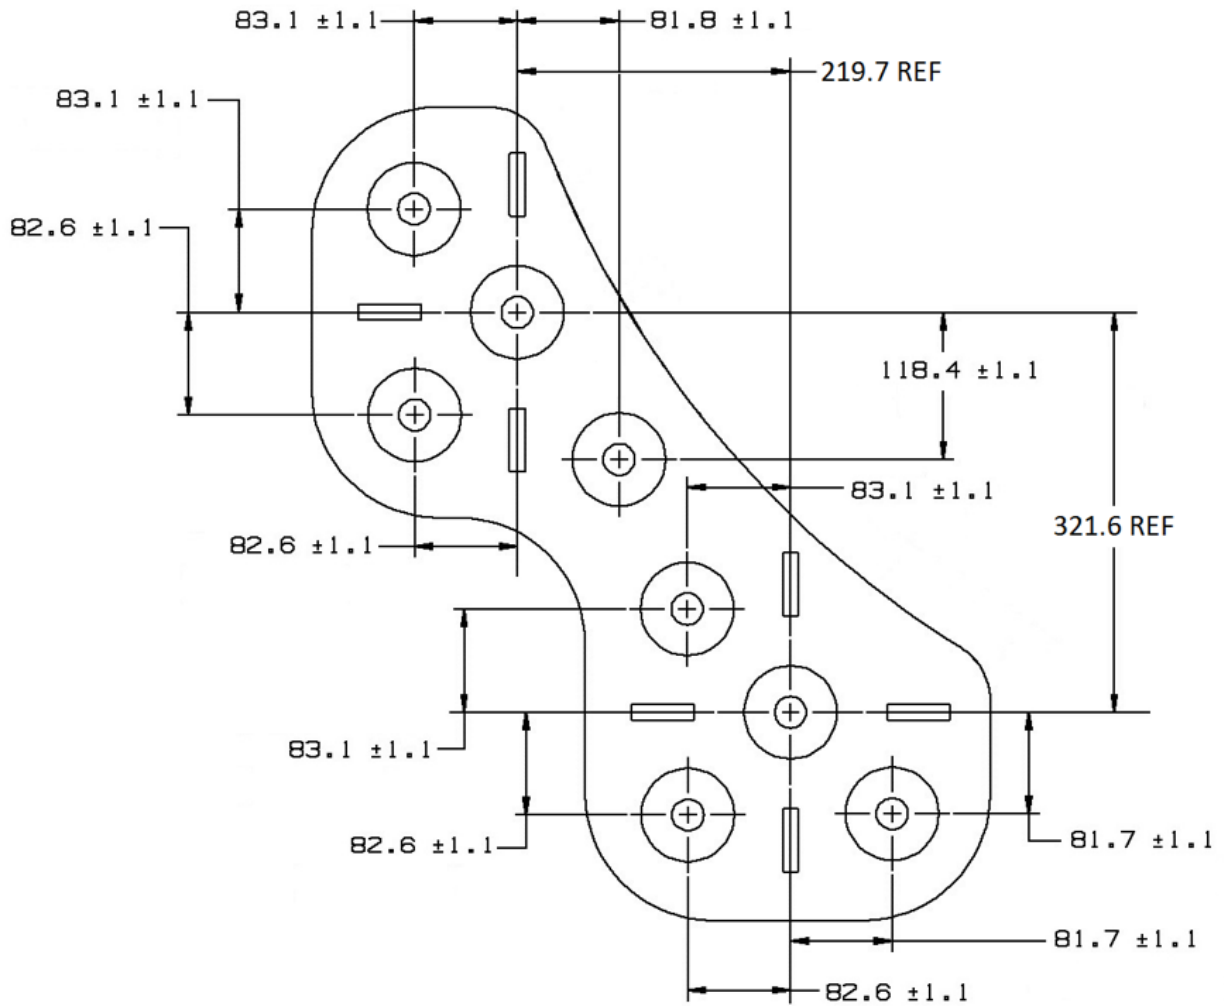


FIGURE D.3.1.3-1 CIRCULAR NAVIGATION FEATURE LOCATIONS FOR IDA

D.3.1.4 IDA PVT CIRCULAR NAVIGATION FEATURE INDICATING SURFACE OUTER DIAMETER

The IDA PVT circular navigation feature dimensions are as defined in Section 3.5.3.9 and Figure 3.5.3.9-1, except the setback distance of the target backplate with respect to SCS mating plane is as shown in Figure D.3.1.4-1, Circular Navigation Feature Details for IDA.

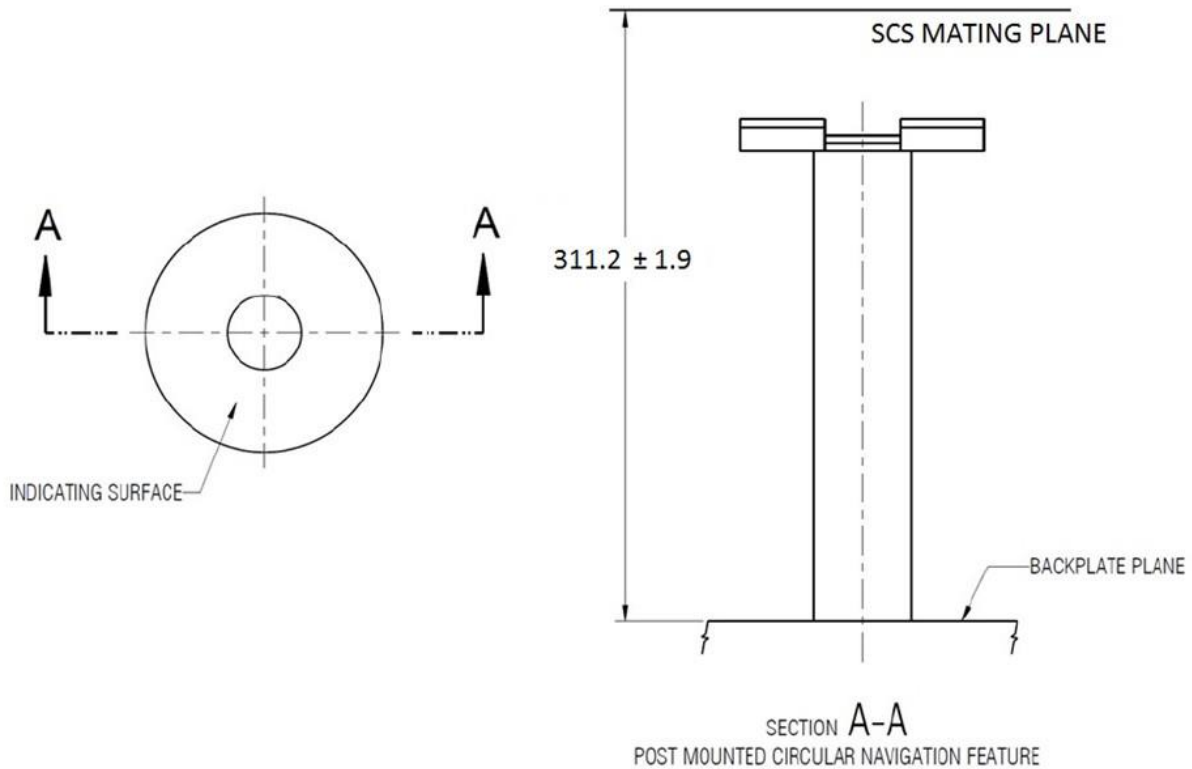


FIGURE D.3.1.4-1 CIRCULAR NAVIGATION FEATURE DETAILS FOR IDA

D.3.1.5 IDA PVT CIRCULAR NAVIGATION FEATURE MAXIMUM RADIUS OF THE EDGES

Reference section 3.5.3.15. The edges of the PVT circular navigation features for IDA have a maximum radius of 2.54 mm.

D.3.1.6 IDA PVT CROSSHAIR LENGTH

The crosshair length is as defined in Section 3.5.3.16 and as shown in Figure 3.5.3.16-1, except the IDA PVT backplate edges have a maximum radius of 2.54 mm.

D.3.1.7 IDA PVT CROSSHAIR PLACEMENT

Reference Figure 3.5.3.18-1. The crosshairs are placed on the IDA PVT Backplate as shown in Figure D.3.1.7-1, PVT Crosshair Locations for IDA.

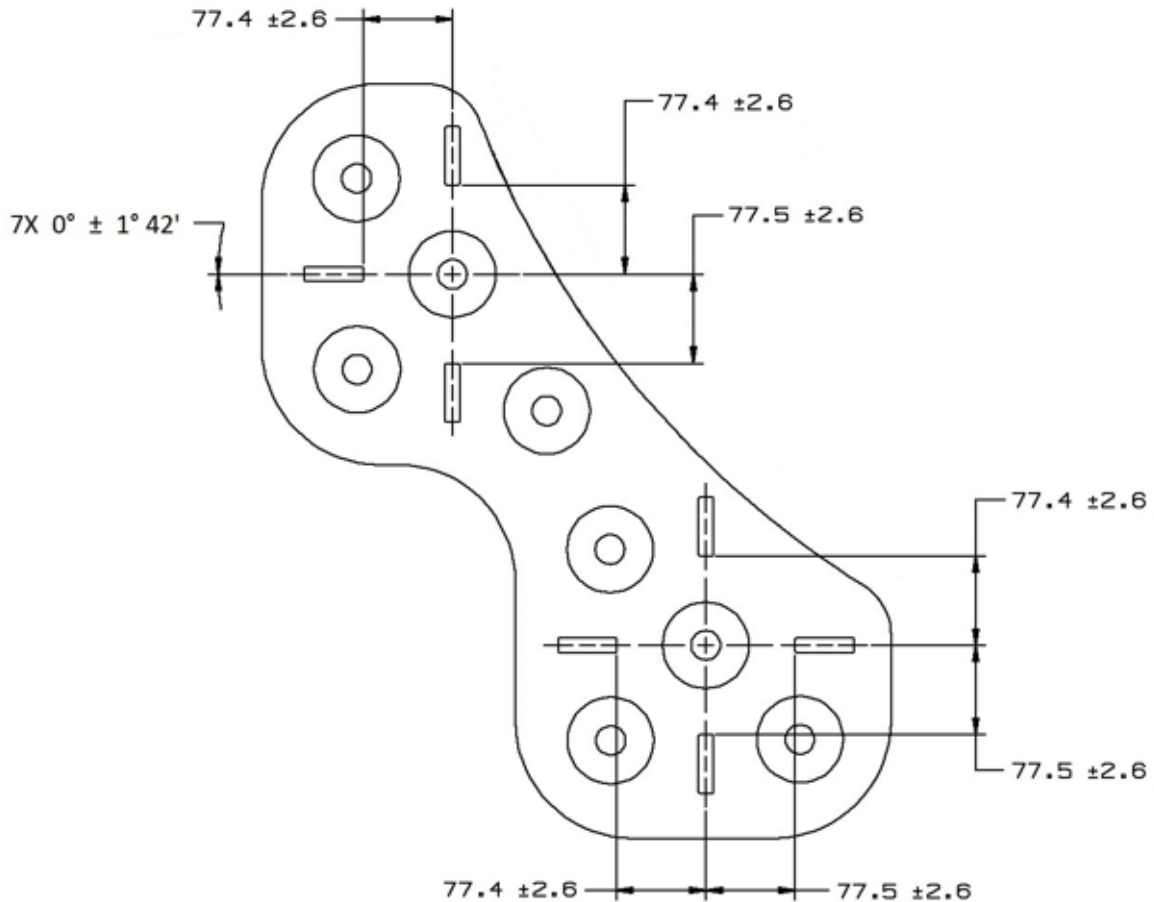


FIGURE D.3.1.7-1 PVT CROSSHAIR LOCATIONS FOR IDA

D.3.1.8 IDA SHORT RANGE REFLECTOR TARGET CHARACTERISTICS

The IDA PDT incorporates SRRT reflector elements as defined in section 3.5.3.21. The implementation of SRRT reflectors on IDA is through the use of 3000X material tape manufactured by the 3M Corporation. Requirements of subsections of 3.5.3.21 are met by the IDA PDT except as noted below.

D.3.1.8.1 IDA REFLECTIVE FILTER OPERATIONAL WAVELENGTH


Reference section 3.5.3.21.8.1. The total operational wavelength of the Schott filter glass used on IDA includes the wavelengths 400 nm to 2800 nm.

D.3.1.8.2 IDA MAXIMUM RATE OF TRANSMISSION – NON-OPERATIONAL WAVELENGTH FOR IDA

Reference section 3.5.3.21.8.3. For IDA, the maximum rate of transmission for wavelengths outside of the range 400 nm to 2800 nm is 30 %/cm.

D.3.1.9 PDT BACKPLATE ENVELOPE FOR IDA

The envelope dimensions used to describe the backplate for IDA are depicted in Figure D.3.1.9-1, PDT Backplate Envelope Dimensions for IDA.

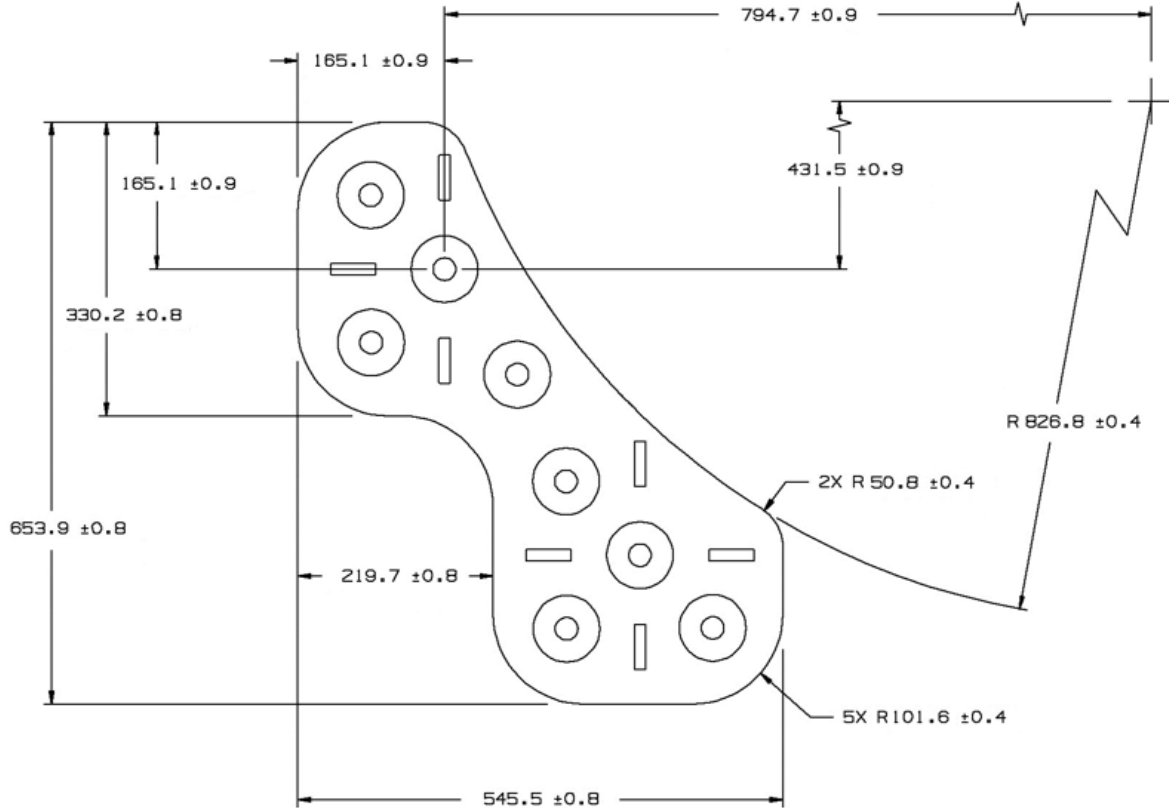

Note: Radius and linear dimensions and tolerances shown from the radius center point represent theoretical locations for a soft capture system tunnel center and are used for fabrication of the PDT Backplate for IDA and are not to be confused with dimensions used for locating the PDT relative to the docking system tunnel.

FIGURE D.3.1.9-1 PDT BACKPLATE ENVELOPE DIMENSIONS FOR IDA

D.3.2 ISS PMA CDT IMPLEMENTATION

This appendix details the differences between the CDT standard, as described in section 3.5.2, and the installed CDT hardware on the ISS Pressurized Mating Adapter (PMA)2 and PMA3 docking hatches.

These heritage CDTs were originally installed to support United States (US) Space Shuttle dockings. They were then modified on-orbit to add reflective elements during later phases of the ISS program. These targets pre-date the IDSS standard agreement, but are still compatible with this IDSS standard.

Each ISS PMA CDT backplate front surface is a thin metal photo decal with alignment markings. This metal decal is adhered to a thicker aluminum plate that is bolted to the PMA hatch. Figure D.3.2-1, General ISS PMA CDT Differences, shows the general differences visible between the CDT on the ISS PMAs and the CDT in the IDSS. Labeled items are not present in the IDSS IDD, but are present on the PMA CDTs. Figure D.3.2-2, CDT Backplate Depth Within Vestibule on ISS PMA2 & 3, shows the

depth the PMA CDT is with respect to the SCS Mating Plane. Table D.3.2-1, Differences Between IDSS and the ISS CDT Implementation, is a list of specific differences between the IDSS and the ISS PMA CDTs. Table D.3.2-2, CRT Reflective Element Locations in the CDT Coordinate System, shows the CRT reflective element locations in the CDT coordinate system.

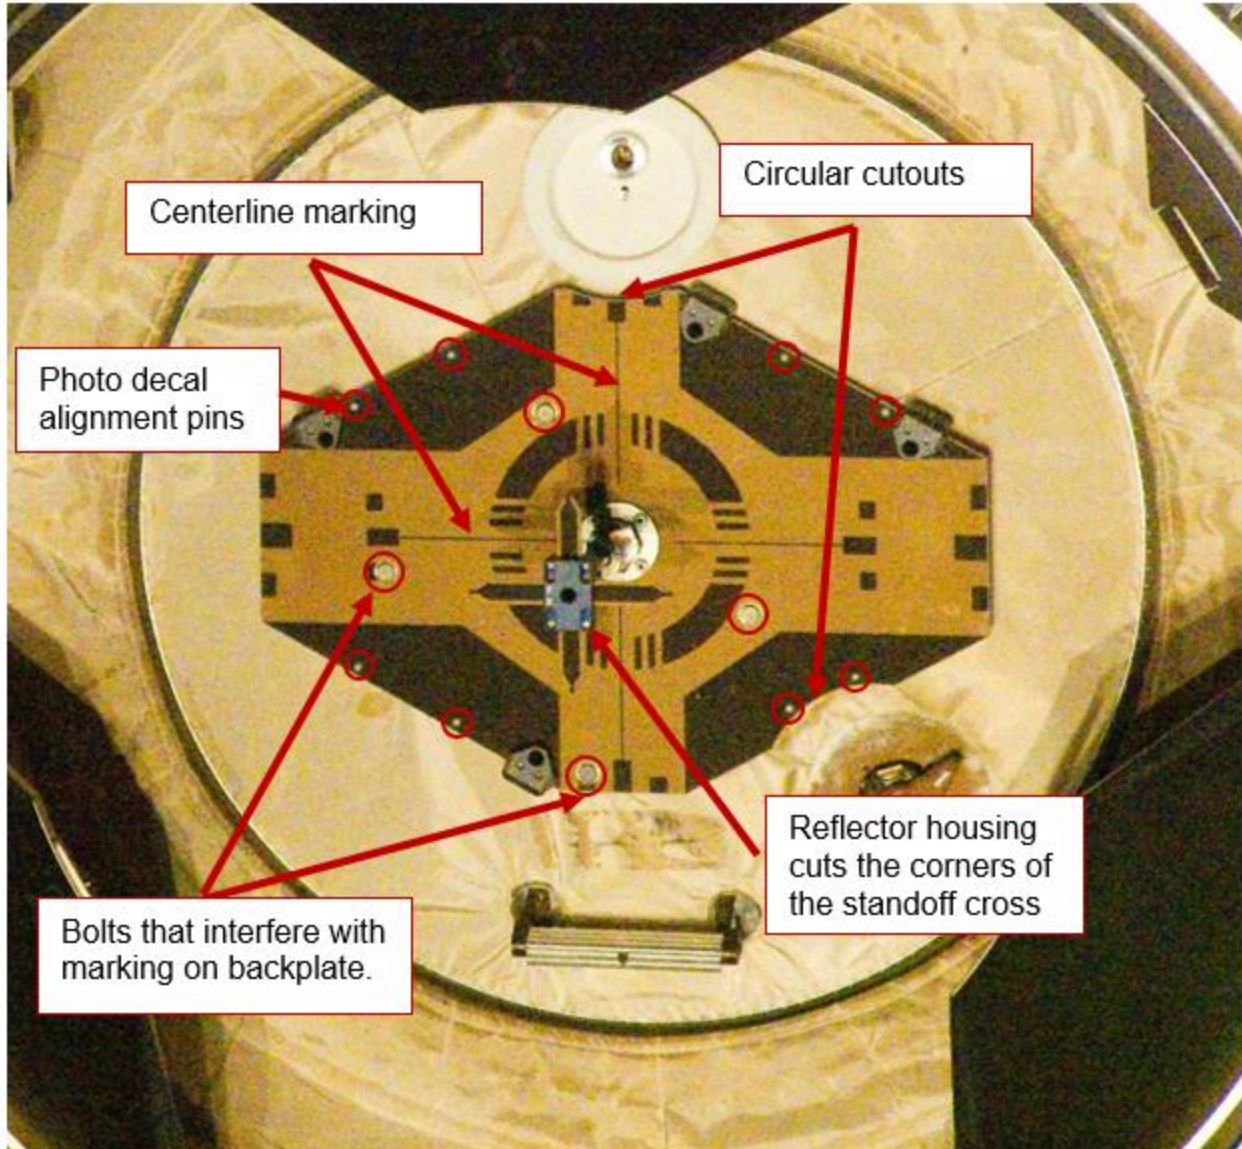


FIGURE D.3.2-1 GENERAL ISS PMA CDT DIFFERENCES

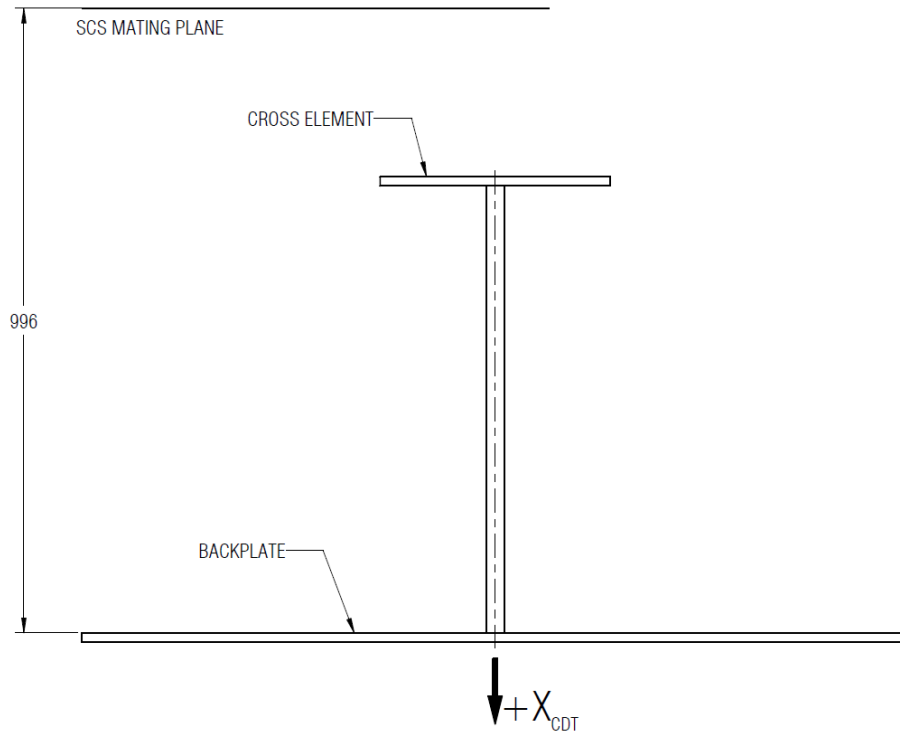


FIGURE D.3.2-2 CDT BACKPLATE DEPTH WITHIN VESTIBULE ON ISS PMA2 & 3

TABLE D.3.2-1 DIFFERENCES BETWEEN IDSS AND THE ISS CDT IMPLEMENTATION

IDSS Requirement	ISS CDT Implementation
3.5.2.2.8, CDT BACKPLATE DEPTH WITHIN VESTIBULE, item B	The as-designed distance from the SCS mating plane to the PMA2 backplate is shown in Figure D.3.2-2.
3.5.2.2.12, CVT COLORS, item B	The white on the backplate has yellowed since being on orbit. See Figure D.3.2-1.
3.5.2.3.2, CRT PATTERN, item A	The measured location of the reflective elements are different than the nominal location. See Table D.3.2-2.
3.5.2.3.2, CRT PATTERN, item B	All of the reflective elements are greater than the 10 mm above the mounting surface. See Table D.3.2-2.
FIGURE 3.5.2.3.2-1, LOCATIONS OF CRT REFLECTIVE ELEMENTS	There is no backplate orientation mark on ISS CDTs. See Figure D.3.2-1.
3.5.2.3.9.1, REFLECTIVE FILTER OPERATIONAL WAVELENGTH	The operational wavelength of the filter glass used is 1100 nm to 2700 nm.

TABLE D.3.2-2 CRT REFLECTIVE ELEMENT LOCATIONS IN THE CDT COORDINATE SYSTEM

Reflective Element	PMA2			PMA3		
	X _{CDT}	Y _{CDT}	Z _{CDT}	X _{CDT}	Y _{CDT}	Z _{CDT}
1 (Standoff)	-317.4	0.1	0.9	<TBD D-1>	<TBD D-1>	<TBD D-1>
2	-18.3	63.4	-169.2	<TBD D-1>	<TBD D-1>	<TBD D-1>
3	-18.2	-225.7	-79.9	<TBD D-1>	<TBD D-1>	<TBD D-1>
4	-18.3	226.3	-79.1	<TBD D-1>	<TBD D-1>	<TBD D-1>
5	-18.6	-64.6	168.6	<TBD D-1>	<TBD D-1>	<TBD D-1>

APPENDIX E - TECHNICAL AND REFERENCE INFORMATION

E.1.0 MAGNETIC CAPTURE LATCH SYSTEM

In order to allow developers and participating partners to this standard the flexibility to design and build docking mechanisms to their program needs and requirements, this Section E.1.0 describes a preliminary concept for a Magnetic Capture Latch System, geometrically compatible with the Mechanical Capture Latch System described in Section 3.2.2.4.

The Magnetic Capture Latch System is expected to offer the following features in comparison to the Mechanical Capture Latch System:

- no latch activation force is required to engage the Magnetic Capture Latch System, thereby favoring berthing,
- the activation of the Magnetic Capture Latch System is independent of the masses and approaching speeds of the mating vehicles,
- it avoids the disturbance introduced by activation load of some Mechanical Latch Capture System implementations to the sensing elements of an Actively Controlled SCS measuring the interface contact forces during the docking process,
- it allows expedited release of the Magnetic Capture Latch System, no need for re-setting of the Magnetic Capture Latch System for a new docking attempt.

Based on the above features, the Magnetic Capture Latch System is expected to be suitable for a wide range of docking/berthing vehicles as required for future Exploration missions, while reducing the number of movable parts.

Upon agreement by the interested partners, this Magnetic Capture Latch System may be implemented as an option for a specific collaborative mission, in conjunction with, or as a replacement of the Mechanical Capture Latch System.

The Magnetic Capture Latch System described in this Section may be realized in combination with the Mechanical Capture Latch System described in Section 3.2.2.4. Therefore a docking system implementing the strikers of both the Magnetic Capture Latch System and the Mechanical Capture Latch System can successfully mate with an active docking system implementing either the Magnetic Capture Latch System or the Mechanical Capture Latch System. The implementation of a magnetic latching system shall not impact the performance of the mechanical latching system.

For optimal soft capture magnetic force, the magnetic capture latch system shall provide each striker with surface compliance to the mating magnet. This will ensure maximum surface contact to obtain maximum magnetic force. This compliance is to account for hardware fabrication and assembling tolerances. In addition, the material selection for the striker is crucial for obtaining the required magnetic force.

In case the optional Magnetic Capture Latch System is used, Figure E.1.0-1, Cross Sectional View Through Centerline of Magnetic Latch Striker, and Figure E.1.0-2, Radial

View, replace Figure 3.2.2.4-1 and Figure 3.2.2.4-2 respectively and provide the information required to develop it.

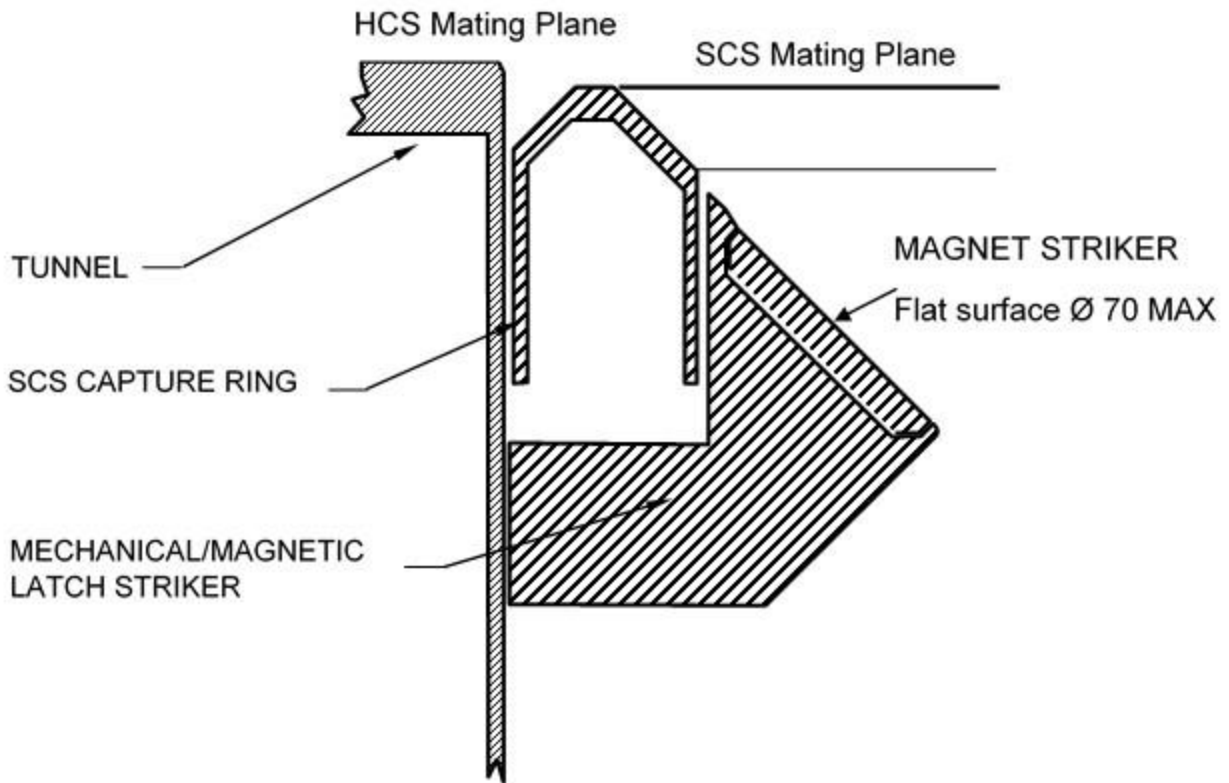


FIGURE E.1.0-1 CROSS SECTIONAL VIEW THROUGH CENTERLINE OF MAGNETIC LATCH STRIKER

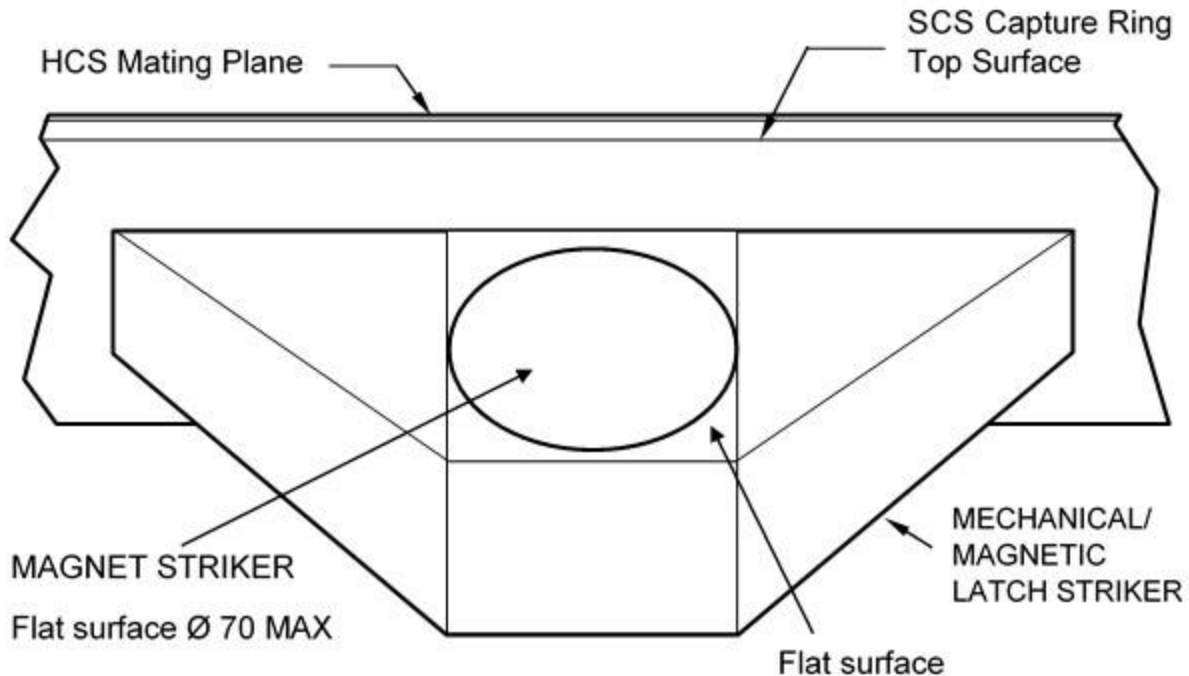


FIGURE E.1.0-2 RADIAL VIEW

Note: Dimensions on Figure E.1.0-1 and Figure E.1.0-2 are identical to those in Figure 3.2.2.4-1 and Figure 3.2.2.4-2 other than those explicitly indicated in this Section.

E.2.0 METRIC WIRE SIZES FOR PDTU

In this standards document, only the mating parts of the interface are specified, and they are called out using metric units. However, the FRAM connector chosen for the PDTU is legacy hardware that was originally designed and certified in US Customary Units. Therefore, this interface remains in US Customary Units in order to preserve the verification pedigree of the hardware. This Appendix contains reference information to assist in converting from the units used by the legacy specification to metric wire sizes, to be consistent with providing users metric interface information.

The contacts described in SSQ 22680 are sized to accept wires that use the American Wire Gauge (AWG) number that corresponds to the contact size (that is, the #8 contact is sized for AWG #8 wire). This size is dimension G in Figures II.1 and II.2 of SSQ 22680.

By necessity, dimension G is larger than the wire size and allows for a wide variation in the outside diameter of wire gauges. Implementers may want to use similar-sized wire based on one of a number of metric standards. For example, IEC 60228, International Electrotechnical Commission's international standard on conductors of insulated cables, specifies wire size by cross section in millimeters. Table E.2.0-1, Contact Wire Size Summary, summarizes the wire dimensions allowed in SSQ 22680 and, their metric equivalents, for convenience. Note: The measurements in Table E.2.0-1 are diameters,

not cross sectional areas. Figure E.2.0-1, Contact Wire Size Parameters, illustrates the contact wire size parameters shown in Table E.2.0-1.

TABLE E.2.0-1 CONTACT WIRE SIZE SUMMARY

AWG/Contact Size	Finished Wire Diameter (min/max) A*		Required Strip Length (min/max) B*		Maximum Insulation to Contact Gap (min/max) C*	
	in	mm	in	mm	in	mm
8	0.124/0.260	3.15/6.60	0.515/0.535	13.08/13.59	0.010/0.050	0.25/1.27
12	0.074/0.124	1.88/3.15	0.260/0.300	6.60/7.62	0.010/0.050	0.25/1.27
20	0.048/0.070	1.22/1.78	0.180/0.193	4.57/4.90	0.010/0.030	0.25/0.76

* see Figure E.2.0-1

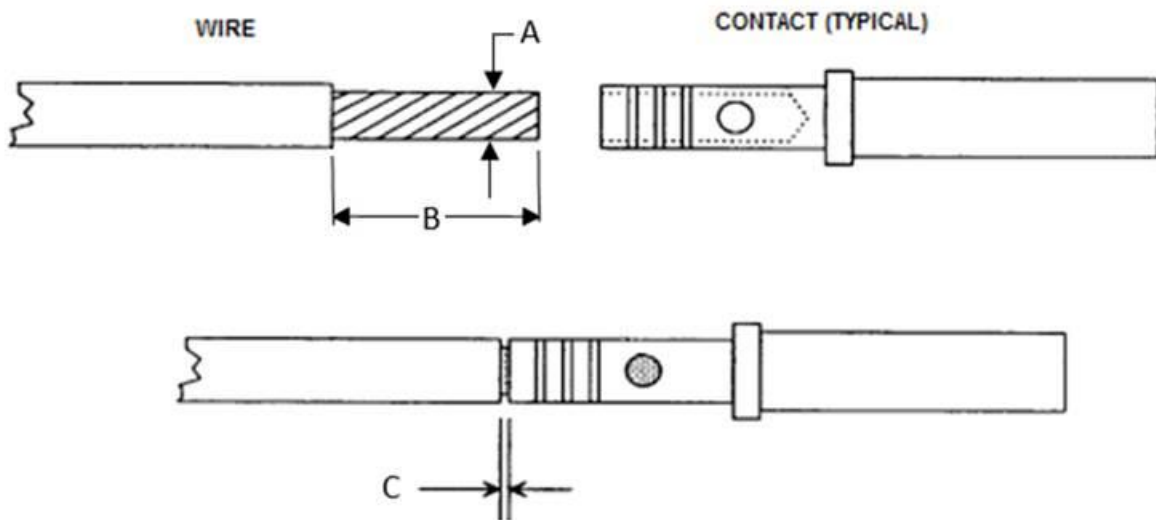


FIGURE E.2.0-1 CONTACT WIRE SIZE PARAMETERS

The metric dimensions are included in this section for reference only. When using metric dimensions it is incumbent on the implementer to ensure compatibility with connectors made using the US Customary measurement system. Rounding error stack up may alter total dimensions. It is, of course, also necessary for implementers to ensure sufficient connection (for example, mating with a crimp barrel) and current handling capability.

APPENDIX F - BERTHING COMPATIBILITY REQUIREMENTS

This Appendix defines the set of additional requirements which, when met, provide an IDSS-B implementation of the IDSS that can be used for either docking or manipulator berthing.

F.1.0 OPERATION OVERVIEW

F.1.1 BERTHING OPERATION METHODS

There are several possible methods for manipulator berthing of an International Docking System (IDS). The options are as follows:

Berthing Method 1: Manipulator SCS Alignment and Engagement

One method for berthing a pair of IDS interfaces utilizes an SCS that is extended axially and made passive to allow the manipulator control system to perform the interface alignment function and berth the interfaces. Either of the IDS interfaces may be configured as the extended receiving half.

The first stage of berthing establishes the initial soft capture of the vehicle. During the capture phase, the manipulator replaces the function of the docking vehicle's GN&C system and the SCS alignment system, and aligns the IDS using one or more of the available IDS target systems as detailed in section 3.5. The manipulator then pushes into the IDS interface with sufficient force to engage the SCS latches.

Once successful soft capture has been established, berthing is completed and the manipulator will release the vehicle. The SCS will then retract and pull the active/passive halves of the interfaces together to initiate the second stage of berthing, performed by the HCS. The HCS performs structural latching and sealing at the docking interface.

Berthing Method 2: Active SCS Alignment and Engagement

An alternate method for berthing with IDS is performed by having the manipulator place the berthing vehicle within the capture envelope of the active SCS. Either side of the IDS interface may be configured as the active half. The active SCS would then extend and complete interface alignment and provide the required push force for soft capture while the manipulator is limped or maintains position with brakes engaged.

Once successful soft capture has been established, initial berthing is completed and the manipulator will release the vehicle. The SCS will then retract and pull the active/passive halves of the interfaces together to initiate the second stage of berthing, performed by the HCS. The HCS performs structural latching and sealing at the docking interface.

Berthing Method 3: Manipulator HCS Alignment and Engagement

Future IDS implementations may require manipulator berthing of a passive IDS to a passive IDS. Berthing of a passive IDS to a passive IDS will require the manipulator to align and seat the interfaces within the capture envelope of the HCS. Once HCS Ready to Hook has been achieved, the HCS performs structural latching and sealing at the docking interface. After the HCS completes structural latching, the manipulator releases.

F.1.2 UNBERTHING OPERATIONS

The primary method for unberthing utilizes a fully functional IDS soft capture system. The first stage of unberthing involves having the active soft capture extend to recapture the body mounted soft capture latches. Once soft capture is confirmed, the structural hooks are then commanded to open. After hooks are opened, the soft capture ring is commanded to extend allowing interface seals to unseat. The soft capture system should be extended sufficiently to clear the fine alignment guide pins with margin **<TBR F-1>**. Next, the manipulator arm will grapple the vehicle and proceed with completing the unberthing sequence by moving the two IDS interfaces clear of each other.

A soft capture latch system that does not require a force to be applied to engage or disengage (e.g. a Magnetic Capture Latch system as described in Appendix E) is preferred for use with manipulator berthing/unberthing due to decreased actuation loads and increased operational robustness. For an IDS with a Mechanical Capture Latch system, the manipulator may be required to apply a pull force to disengage the SCS latches before the interfaces can be separated during unberthing.

F.2.0 IDSS-B REQUIREMENTS

F.2.1 SOFT CAPTURE SYSTEM BERTHING MODE CAPABILITY

For berthing that uses the option of having the manipulator perform the alignment function to achieve soft capture (Berthing Method 1), the active SCS will be required to provide a mode of operation that will not interact with the control system of a manipulator and will provide sufficient stiffness to safely react the berthing forces.

F.2.1.1 SOFT CAPTURE SYSTEM BERTHING CONTROL MODE

To enable the manipulator to align the IDS and engage the soft-capture latch system, the active SCS shall provide an open loop mode of operation that allows the SCS to behave like a passive spring/damper system to avoid control system interactions with the manipulator (e.g. International Berthing and Docking Mechanism (IBDM) safe mode.) **<TBR F-2>**

F.2.1.2 SOFT CAPTURE SYSTEM STIFFNESS

To enable the manipulator to align the IDS and engage the soft-capture latch system, the active soft capture system, while in the extended position, shall provide a minimum interface stiffness as defined in Table F.2.1.2-1, IDSS-B SCS Stiffness While in Berthing Mode.

TABLE F.2.1.2-1 IDSS-B SCS STIFFNESS WHILE IN BERTHING MODE

Stiffness	Min Value
Axial/Compression	<TBD F-1> N/m
Lateral	<TBD F-1> N/m
Bending	<TBD F-1> Nm/rad
Torsion	<TBD F-1> Nm/rad

F.2.2 CAPTURE LATCH SYSTEM ACTUATION

A capture latch system that does not require a force application to engage is preferred for use with manipulator berthing due to decreased actuation loads and increased operational robustness. To ensure the IDS interface does not preclude berthing by a manipulator, a limit on the total resistance force produced by the SCS, including force to simultaneously actuate all SCS sensors and activate the capture latches (mechanical or magnetic), is to be defined as follows:

The total berthing force to actuate the extended SCS latches and all of its sensors shall be $\leq 100\text{N}$ <TBR F-3>.

Note that per section 3.2.2.5, the sensors on the passive side of the interface will require $\leq 50\text{N}$ <TBR 3-1>. During berthing, the manipulator will therefore be required to provide $\geq 150\text{N}$ <TBR F-3>. The manipulator performing the berthing operation will need to apply this berthing force while overcoming sliding friction from IDS guide petals and reaction forces imparted during interface alignment.

F.2.3 MECHANICAL CAPTURE LATCH SYSTEM RELEASE

A capture latch system that does not require a force application to disengage is preferred for use with manipulator unberthing due to decreased actuation loads and increased operational robustness.

If a mechanical capture latch system is used, to ensure the IDS interface does not preclude unberthing by a manipulator, a limit on the total resistance force produced by the SCS latches, is to be defined as follows:

The total force to disengage the IDSS-B SCS latches and sensors shall be $\leq 150\text{N}$ <TBR F-3>.

F.2.4 INTERNATIONAL DOCKING SYSTEM/MANIPULATOR SENSING

The IDS shall provide the capture system indications indicated for routing to manipulator control software to support automated berthing capability. Sensing may originate from either the active or passive IDS interface.

F.2.4.1 SOFT CAPTURE SYSTEM SENSING

For active IDS to passive IDS berthing implementations (Berthing Methods 1 and 2), the IDS shall provide an indication to the Command, Control and Data Handling (CC&DH) for routing to the manipulator control software to positively indicate when the IDS soft capture latches have engaged/disengaged.

F.2.4.2 HARD CAPTURE SYSTEM READY TO HOOK SENSING

For passive IDS to passive IDS berthing implementations (Berthing Method 3), the IDS shall provide Ready-to-Hook indication to the CC&DH for routing to the manipulator control software to positively indicate when the two halves of the IDS are placed within the hard capture system hooks' capture envelope.

F.2.4.3 HARD CAPTURE SYSTEM SENSING

For passive IDS to passive IDS berthing implementations (Berthing Method 3), the IDS shall provide an indication to the CC&DH for routing to the manipulator control software to positively indicate when the hard capture system hooks are fully engaged/disengaged.