

# *Ka-band Technologies for Small Spacecraft Communications via Relays and Direct Data Downlink*

National Aeronautics and  
Space Administration



SPACE COMMUNICATIONS AND NAVIGATION

CubeSat Workshop – 30th Annual AIAA/USU Conference on Small Satellites  
NASA Glenn Research Center, Cleveland Ohio/James M. Budinger  
Session VII Communications 07 August 2016

[www.nasa.gov](http://www.nasa.gov)





# Outline



- Objectives
- Ka-band background
- Software defined radios
- Ka-band antennas
- Potential data return in Ka-band
- Summary



Ka-band Communications

# OBJECTIVES



# Objectives



- Develop affordable technologies to ease transition into Ka-band for significantly higher data rates with minimal impact on near Earth missions
  - Ka-band/multi-band **software defined radios (SDRs)** and standards for a range of space missions
  - **Portable waveforms** for SDRs to reduce cost of development and increase flexibility
  - **Electronically steered high gain antennas** to increase data return and eliminate mechanisms and vibration
  - Leverage **large and small business and university** capabilities to address unique needs of small spacecraft



NASA Ka-band Communications Infrastructure


# KA-BAND BACKGROUND



# TDRS Ka-band Single Access Service



- NASA's Tracking and Data Relay Satellite (TDRS)
  - Three generations of spacecraft provide high bandwidth, low latency communications to multiple simultaneous mission spacecraft
  - S-band, Ku-band, and ***Ka-band Single Access (KaSA)*** and S-band Multiple Access services
- KaSA Service via large steerable antennas in auto-track mode
  - ***Return*** (from spacecraft) of mission data and spacecraft telemetry; ***G/T: 26.5 dB/K***; 25.25-27.5 GHz
  - Forward (toward) command and control EIRP: 63.0 dBW; 22.55-23.55 GHz
  - Field of View  $\pm 76.8^\circ$  E-W;  $\pm 30.5^\circ$  N-S

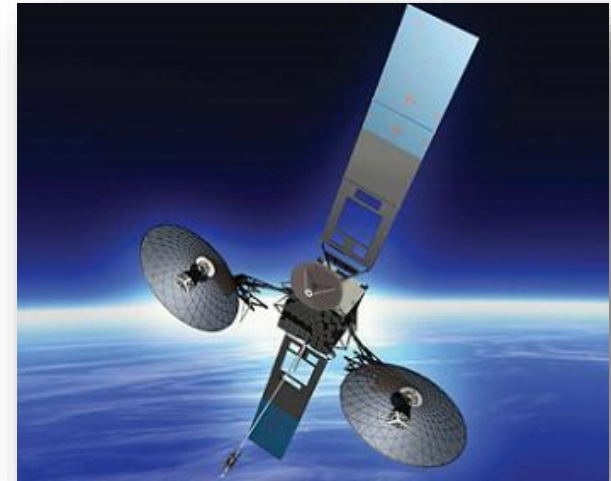

***Third Generation TDRS K, L, M***





# NASA Near Earth Network (NEN) Ka-band Tracking Terminal Examples



*WS-1 at White Sands New Mexico*

- WS-1
  - White Sand Complex
  - 18 m
  - S-, X- and Ka-bands
  - Ka-band ***G/T of 46 dB/k***



*AS-3 and AS-1 at Fairbanks Alaska*

- AS-3
  - Alaska Satellite Facility
  - 11 m
  - S- and X-bands operational
  - Provisions for Ka-band capability in ~2020
  - Expected Ka-band ***G/T of 40 dB/k***



# Commercial Ka-band Tracking Terminal Example




*Type 2 Ground Mount on Roof*

- Comtech TCS 2.4m X/Y Tracking Terminal
  - Eliminates “keyhole” when spacecraft is overhead
- Ka-band operation
  - 25.5 to 27.0 GHz
  - G/T of **27 dB/K**



Source: [http://www.telecomsys.com/Libraries/Collateral\\_Documents/XY\\_Overview\\_Brochure.sflb.ashx](http://www.telecomsys.com/Libraries/Collateral_Documents/XY_Overview_Brochure.sflb.ashx)





# NASA Near-Earth Mission Frequency Spectrum and Typical Channel Bandwidths



Mission Links	Via <b>TDRS Relays</b> (GHz)			
Space-Space	Forward	Bandwidth	Return	Bandwidth
• S-band	2.025-2.110	0.028	2.200-2.290	0.018
• Ku-band	13.775±.070	0.065	15.0034+.1125	0.250
• Ka-band	22.55-23.55	0.065	25.25-27.50	0.250, >0.650

Mission Links	Via <b>NEN Direct to Ground Links</b> (GHz)			
Space-Earth	Uplink/ Command	Bandwidth	Downlink/ Telemetry	Bandwidth
• S-band	2.025-2.110	0.085	2.200-2.290	0.090
• X-band Earth Science	N/A	N/A	8.025-8.400	0.375
• X-band Space Science	7.190-7.235	0.045	8.450-8.500	0.050
• Ka-band	N/A	N/A	25.50-27.0	0.500 to 1.500

*Overlap* (between 25.25-27.50 and 25.50-27.0)

*Up to 4x* (between 0.250, >0.650 and 0.500 to 1.500)



STRS and Ka-band SDRs

# SOFTWARE DEFINED RADIOS




# NASA Standard for Software Defined Radios (SDR) for Space Applications



- **Space Telecommunications Radio System (STRS) Architecture and Standard ([NASA-STD-4009](#))**


- Enables independence of applications from software defined radio platform/hardware
- Reduces effort to develop, port and share applications waveforms and documentation via repository
- Applicable to all categories of spacecraft from large platforms to SmallSats and CubeSats
- Multiple vendors have STRS compliant SDRs or platforms in their product line
- Others under development via partners and NASA SBIR/STTR Program
- See <https://strs.grc.nasa.gov/>

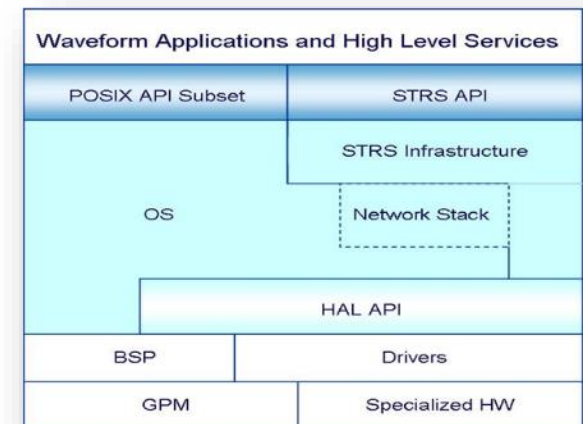

**STRS Layers Model** 11



# SCaN Testbed on ISSs is Flying Multiple STRS-Compliant SDRs from 3 Vendors

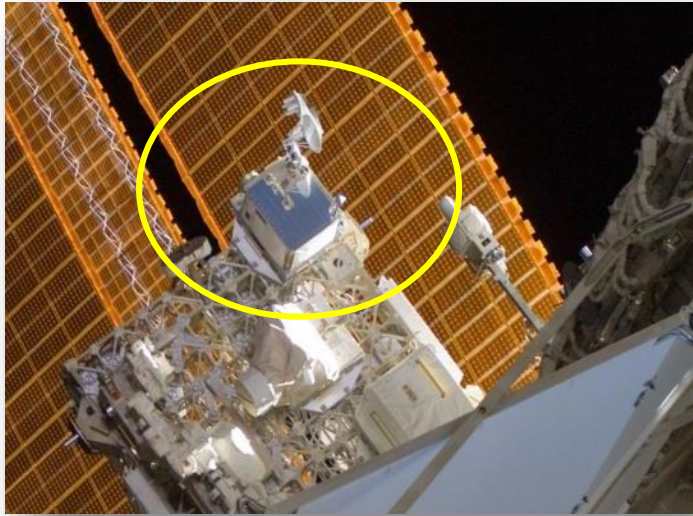

## JPL/L-3 CE

- S-band SDR; 6 MHz channel
- 10 Mbps Class
- L-band receive (GPS)
- Virtex II, Sparc Processor, RTEMs




## Harris

- **Ka-band SDR; 225 MHz**
- **>500 Mbps Class**
- Virtex IV, PowerPC Proc, DSP (1 GFLOP), VxWorks
- STRS adopted for use in [Harris AppSTAR™](#) software-defined payload architecture



## General Dynamics

- S-band SDR; 6 MHz channel
- 10 Mbps Class
- Virtex II, ColdFire Processor (60 MIPS), VxWorks, CRAM (Chalcogenide RAM) Memory



✓ *SDRs offer economies-of-scale via common hardware, tailored to mission needs via STRS-compliant software*



# SBIR/STTR Contracts for STRS-Compliant SDR Technologies




- SBIR-14 Commercialization Readiness Program
  - Software Defined Near Earth Space Transceiver (SD-NEST) [Space Micro]
- STTR-15 Phase I
  - Wideband Autonomous Cognitive Radios for Networked Satellite Systems [Bluecom Systems/U. of New Mexico]
- SBIR-16 Phase I Selections
  - OpenSWIFT-SDR for STRS [Tethers Unlimited]
  - Plug-In Architecture for Software-Defined Radios [Blue Sun]
- [Earlier SBIR SDR Contracts non-STRS Compliant]
  - [https://www.nasa.gov/sites/default/files/files/SBIR\\_SDR.pdf](https://www.nasa.gov/sites/default/files/files/SBIR_SDR.pdf)

✓ Watch for the 2017 SBIR/STTR call for proposals in November 2016



# Software-Defined Near Earth Space Transceiver (SD-NEST)

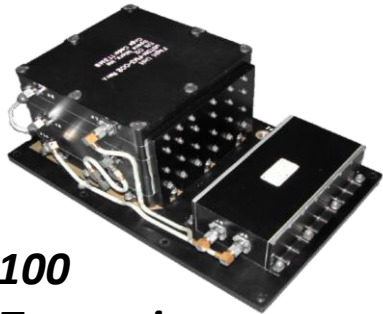

**μSTDN-100  
S-band Transceiver**

- NASA IRIS, LADEE Missions

**STRS Waveforms  
(From Legacy Repository)**





**μXTx-100 / 200 X-Band  
Transmitter**

- NASA IRIS Mission



**Proton 400k Rad-Hard  
Processor**

- NASA MISSE-X Mission

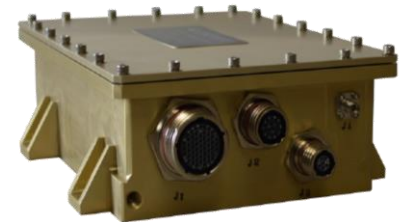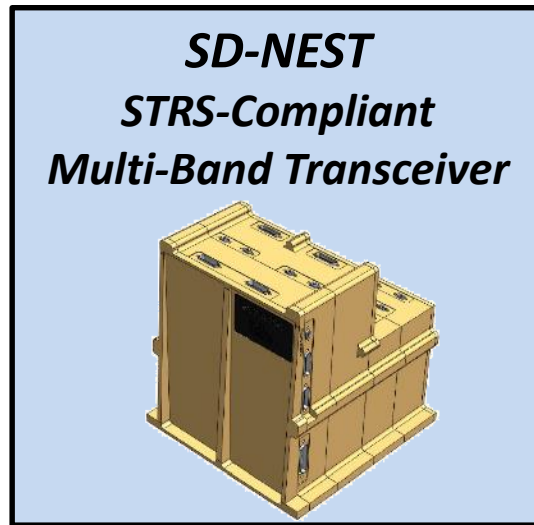

**μKaTx-300 Ka-band  
Transmitter**

- NASA TESS Mission

**X/Ka Wideband Receivers  
(New Development)**







# Software-Defined Near Earth Space Transceiver (SD-NEST)



- **Frequency agile, multi-band transceiver**
  - Narrowband TT&C over any frequency S-, X- or Ka-bands
  - Wideband data return and forward over X-band (375 MHz) or Ka-band (>650 MHz)
- **Flexible waveform processing**
  - Low-power mode for TT&C alone
  - High-performance mode for high-rate mission data return (>1.2 Gbps)
- **STRS Operating Environment**
  - General-purpose processor available (e.g. P400K) for high-level control algorithms

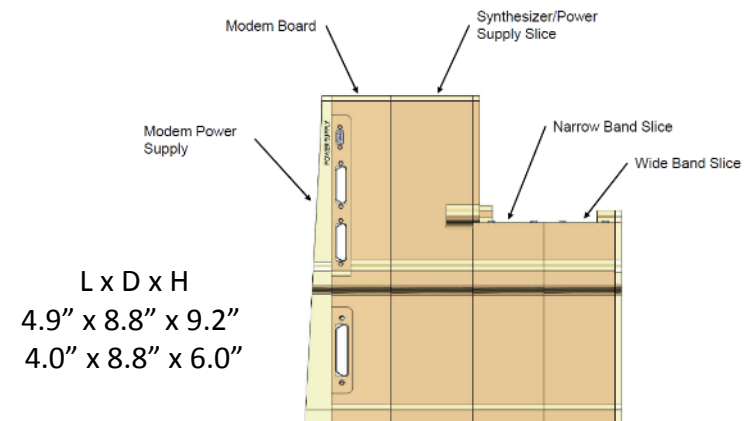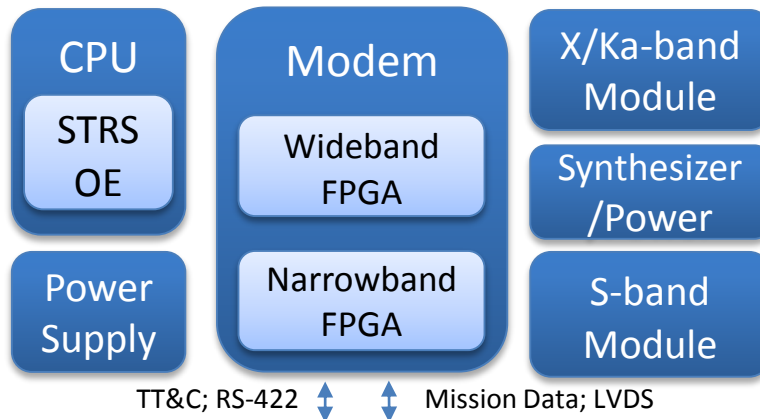


✓ Engineering Model Completion in FY17  
✓ *Seeking partners for contract option (with cost sharing) for proto-flight model*



Alternatives to Mechanically Deployed or Steered Antennas

# KA-BAND ANTENNAS







# Mechanically Steered High Gain Antenna Examples



*SCaN Testbed Ka-band and S-band Antenna Positioning System (APS)*

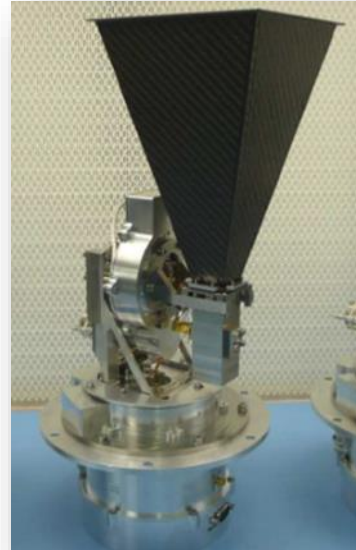


*Surrey Satellite X-band (COTS) and Ka-band (Under development) Antenna Pointing Mechanisms (APM)*

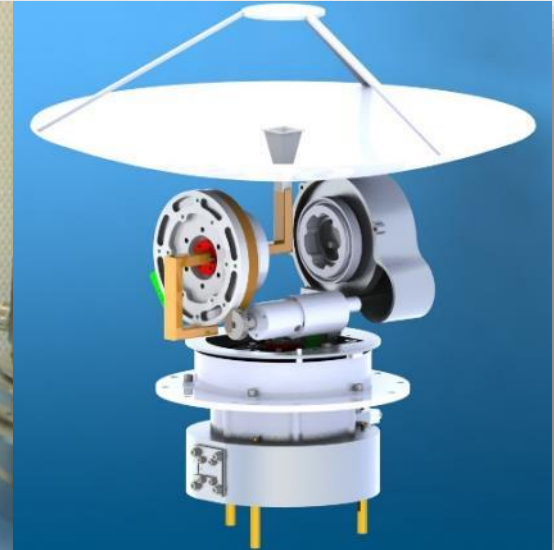



	SCaN Testbed APS on ISS		SSTL X-APM	SSTL Ka-APM
Frequency	25.5 – 27.0 GHz	2.025-2.11 GHz	8.0 – 8.5 GHz	25.5 – 27.0 GHz
Gain	39.8 dBi	13 dBi	18 dBi	30 dBi
Antenna diameter	~46 cm	~25 cm		~30 cm
Overall Dimensions	57 cm x 30 cm x 71 cm		Ø 27.4 x 30 cm	TBD



# GRC 3-D Printed Ka-band Faceted Dome Array – Concept and Prototype

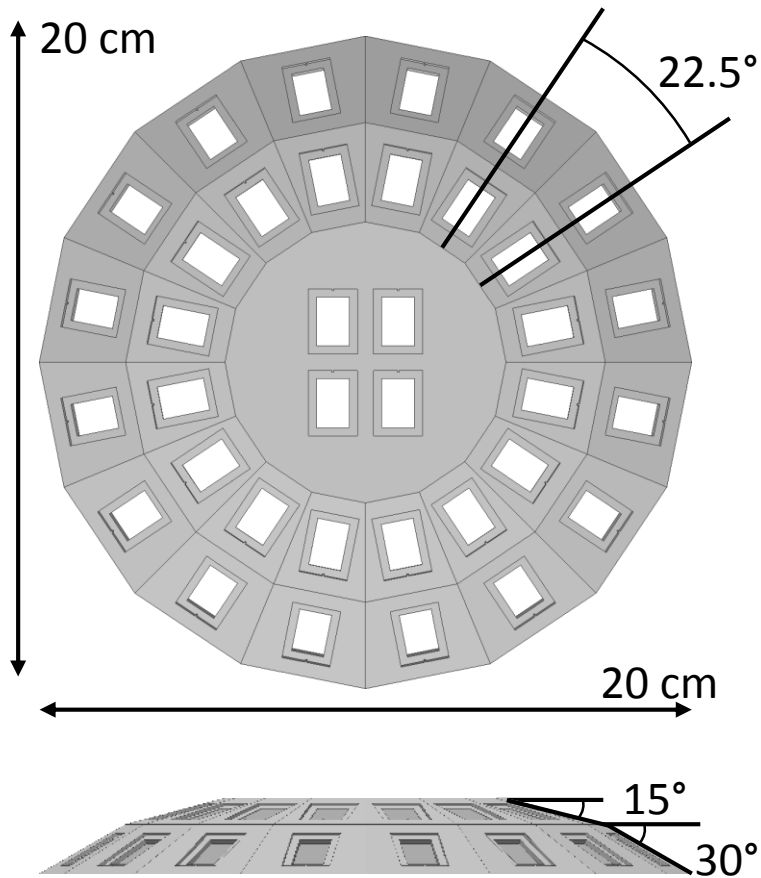

- 36 Elements (16 at 30°, 16 at 15°, 4 at 0°)
- ~90 degree field of regard (~30° beamwidth)
- Probe Fed Elements 14.4 dBi, 256 MHz BW

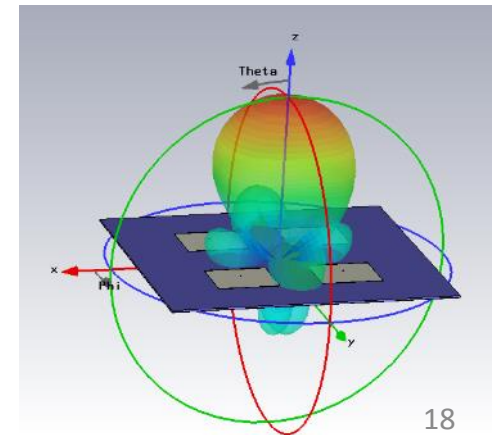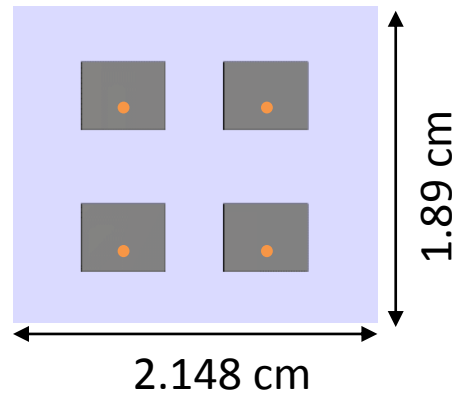



# SBIR/STTR SmallSat Antenna Technologies Examples



- STTR-14 Phase II
  - Fully Printed Flexible 4x4 Element Graphene–Based Phased Array Antenna; [Omega Optics/U. Texas Austin]
- STTR-16 Phase I Selection
  - Deployable Ka-band Reflect Array Antenna; [Tyvak Nano-Satellite Systems/UCLA]
- SBIR-16 Phase I Selection
  - Space Environment Design and Testing; [Kymeta Government Solutions, Seattle, WA]

✓ Watch for the 2017 SBIR/STTR call for proposals in November 2016



# Graphene Based, Flexible, Fully-Printed 2D-Scanning Phased Array – Omega Optics and Texas State University



- **Goal**



- Develop a flexible ink-jet printed Graphene-based 4-bit 4x4 phased array antenna (PAA) at S-band

- **Development Approach**


- Grow Graphene nano-flakes via CVD and incorporate into Graphene ink
- Print multi-layer integrated circuits and interconnections on flexible substrates
- Print Rx/Rx modules from Graphene transistors, phase shifters and amplifiers
- Test a prototype printed PAA

- **Applications**


- CubeSat and SmallSat antennas
- Large deployable phased array antennas
- Reconfigurable, deployable, conformal, and/or wearable active antennas

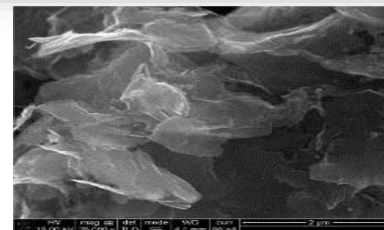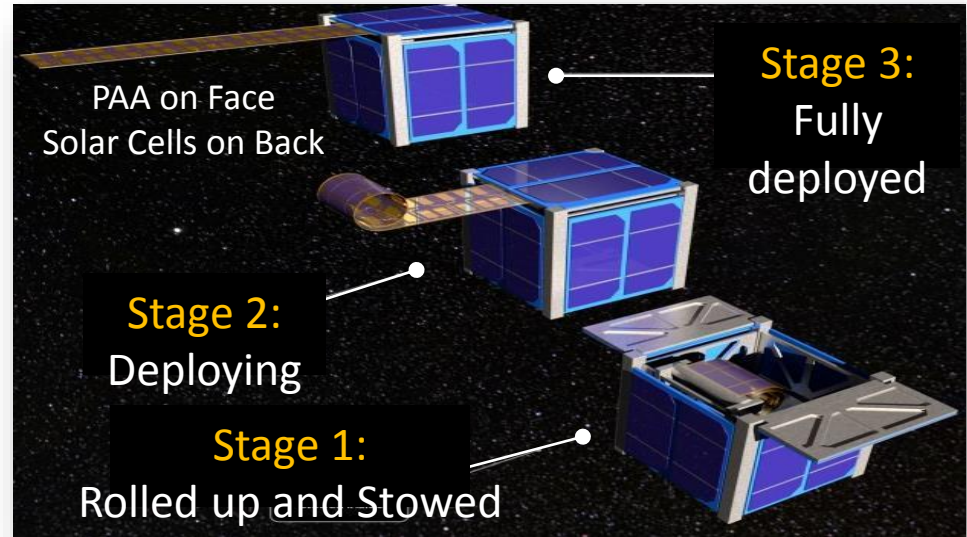


Graphene flakes

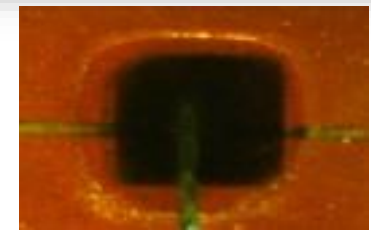


Inkjet printed transistor

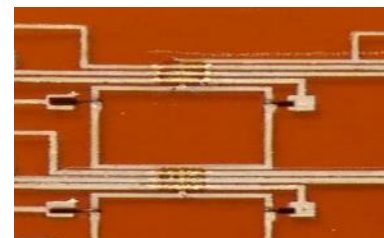

Multilayer interconnect

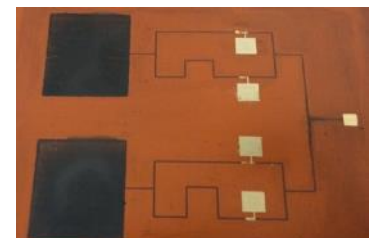

Printed Graphene PAA



# Kymeta Government Solutions, Inc. (KGS) Meta-material Phased Array



## CubeSat Antenna

- Frequency: Optimized for 27.0 GHz
- Gain: ~24 dBiC over scan volume
- Electronically steerable;  $\pm 45^\circ$  range
- Power: <5W

### *Maturity*

- Designed, built, tested, delivered
- Next steps: Modifications for space (SBIR Phase I), flight qualification testing and demonstration mission




## SmallSat Antenna

- Simultaneous transmit and receive out of same aperture for X, Ku, and Ka bands
- Capability at Q, V and W bands
- Technology creates potential for economical 6U, 12U, and larger form factors

### *Maturity*

- Initial design target sets identified
- Early modeling and simulation complete
- Seeking a development partner to fund detailed design, build, and test

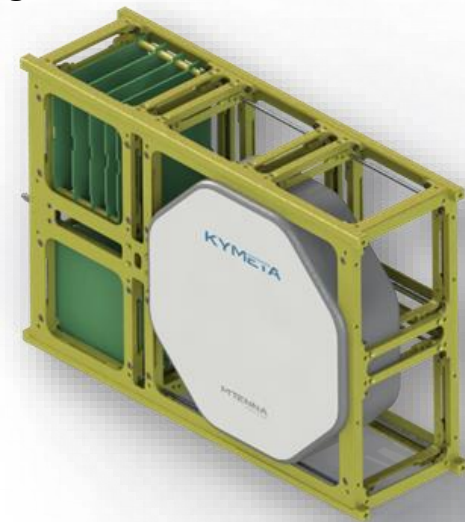

**KYMETA™**  
GOVERNMENT SOLUTIONS




# Current NASA Activities with Kymeta Meta-material Phased Array




## KGS SBIR Phase I (GSFC)

- Seeks to space qualify CubeSat antenna
  - Define requirements
  - Hardware redesign
  - Antenna redesign
  - Thermal characterization
- All of which seek to make the SmallSat antenna space flight-qualifiable

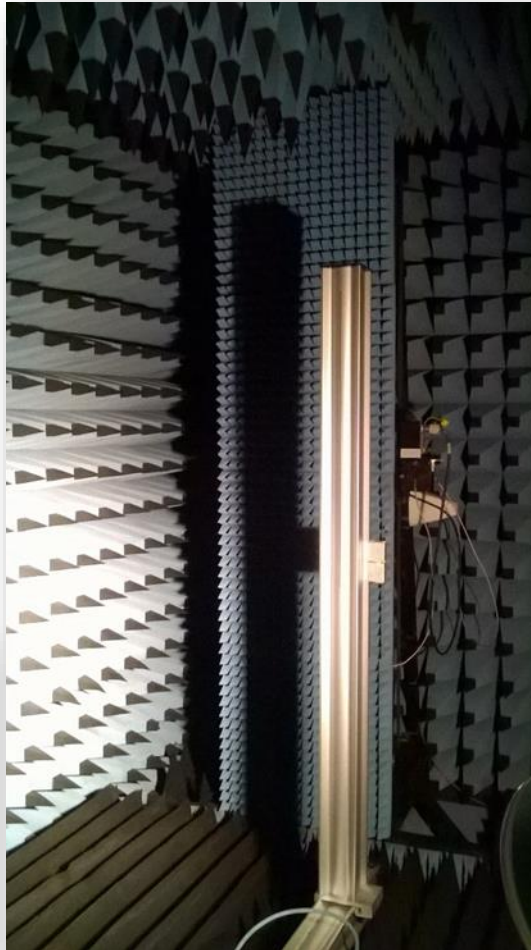


## Cubesat Antenna Measurements (GRC)

- Seeks to characterize the metamaterial-based technology beyond its design parameters gain insight into what it can do
  - Leverage antenna measurement systems and talent at GRC to obtain high quality pattern, polarization, power, and steering measurements.
  - Compare against other Ka-band antenna technologies for potential for use on CubeSat and SmallSat missions.



# Boeing 256-Element Ka-Band Transmit Phased Array Antenna for GRC and ONR

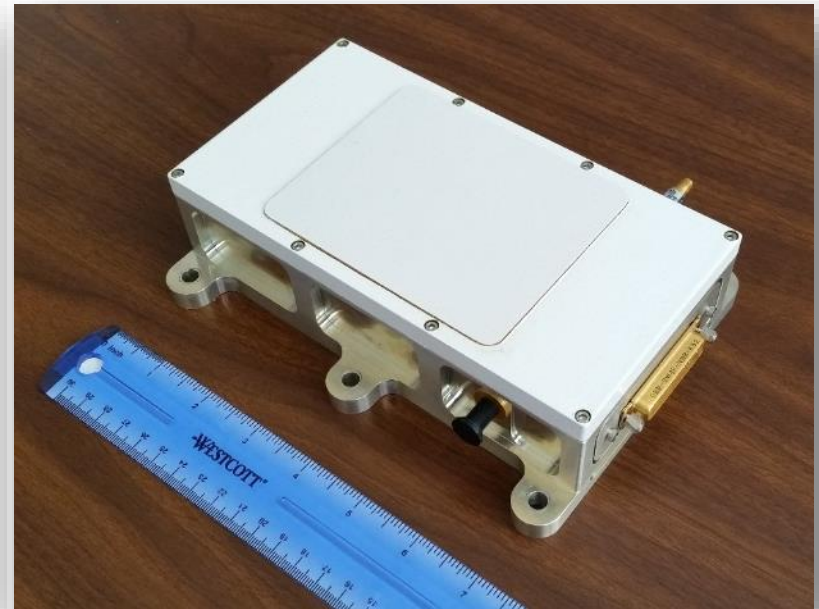

**Array Number of Elements:** 256 Elements  
**Band:** 25.5-27.5 GHz; > 1 GHz Bandwidth  
**Beam width:** Nominal 5 degrees at -3dB  
**Gain (CP):** 28 dBi  
**EIRP:** Peak 36.5 dBW; 33 dBW@ 60 Degrees  
**Array Total DC Power:** 90 Watts (per beam)  
**Dimensions:** 19 cm x 10.2 cm x 6.5 cm  
**Mass:** 1.8 kg

## Limitations:

- Lab model over 10 year old design; many components obsolete
- Rad-hard Triquint GaAs MMIC design kit and foundry process retired
- “Brick” design is more expensive to manufacture than “tile” approach






# Scalable Ka-band Active Phased Array Antenna (PAA) Design



- Space qualifiable tile PAA design
  - Based on Boeing Wideband Communication and RF Systems Group airborne product line
  - Tile packaging significantly reduces costs and offers higher efficiency than brick design
  - SiGe 0.15 um process; rad-hard by design MMICs to 300 krad (Si)
- Ka-band: 25.25 to 27.5 GHz
  - Right-or left-hand circular polarized
- Wide field of regard:  $\pm 70^\circ$ 
  - LEO mission to GEO relay or direct to ground
- Easily scalable implementation
  - **Select 64, 128 or 256 elements for EIRP of 24-, 30- or 36-dBW respectively**
  - Range of user needs, budgets, SWaP constraints
- Potential for data rates up to 3.2 Gbps
  - Performance with DVB-S2 MODCOD to be validated

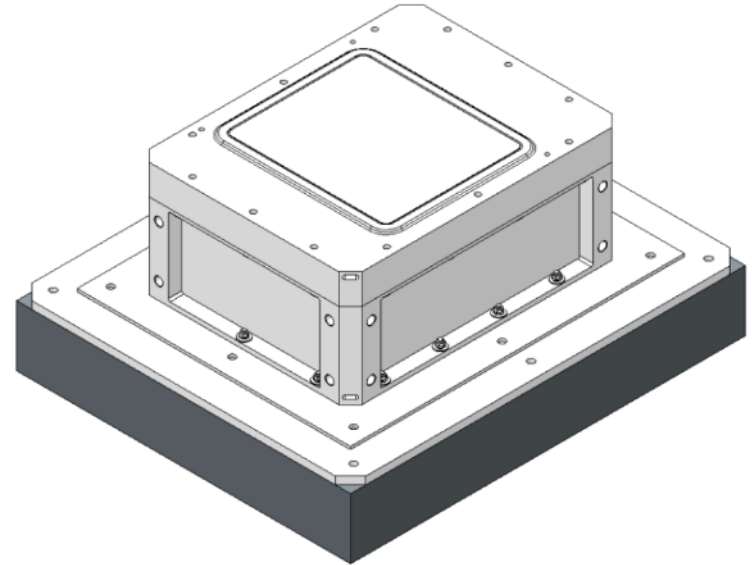

*SmallSat Design Shown with Optional Enclosure for Beam Controller, Power Supply and Thermal Control*




*Prototype Tile PAA in Airborne Packaging*






- 25.5-27.0 GHz
- $\pm 70$  degree FOR
- 24-, 30- or 36 dBW
- 22.9 cm x 17.8 cm x 9.6 cm
- 1.8 kg
- <150 W depending on # elements and drive level
- Rad-hard by design
- 8 year design life

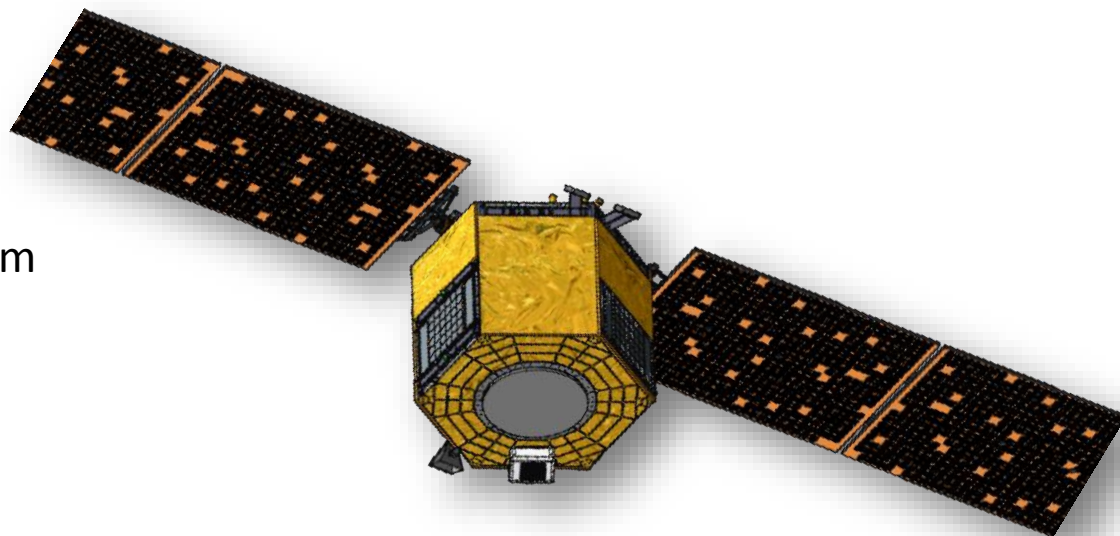

***Ka-band PAA Shown on  
Boeing 502M SmallSat Bus***

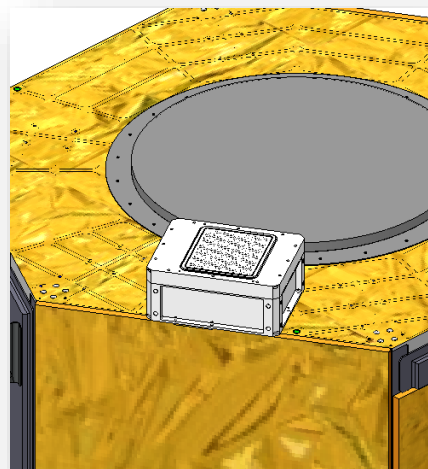

- ✓ 10s to 100s Mbps data rates in affordable, modular PAA packages optimized for SmallSat missions
- ✓ Available with integrated beam controller, power supply and thermal management



Comparisons Via GEO Relay and Direct to Ground (DTG)

# POTENTIAL DATA RETURN IN KA-BAND



# Potential Minimum Data Rates/Return Using Future Tile Phased Array Antenna



Data Return via	Bandwidth	Future Boeing Ka-band Tile Phased Array Antenna		
		64 Element	128 Element	256 Element
TDRS, 26.5 dB/K	225 MHz	900 kbps	3.5 Mbps	14 Mbps
<b>WS-1 Terminal</b> 18.3m, 46 dB/K	500 MHz	830 Mbps	1.1 Gbps	1.1 Gbps
	1.5 GHz	1.5 Gbps	2.9 Gbps	3.3 Gbps
AS-3 Terminal 11m, 40 dB/K	500 MHz	520 Mbps	990 Mbps	1.1 Mbps
	1.5 GHz	940 Mbps	1.9 Gbps	3.1 Gbps
<b>Comtech TCS</b> 2.4m, 27 dB/K	500 MHz	64 Mbps	230 Mbps	500 Mbps
	1.5 GHz	64 Mbps	250 Mbps	820 Mbps

- 1000 km, 98.5° mission, max ranges 38000 km, 2800 km, DVB-S2 MODCOD
- SmallSat DTG data rate ~70x higher than via TDRS; **~38 Gb/ 10 minute pass**
- Large mission DTG data rate ~235x higher than via TDRS; **~2Tb/10 minute pass**



Summary and Co-Authors and Contributors

# CLOSING COMMENTS



# Summary



- Affordable Ka-band communications technologies will enable a new generation of science and exploration missions through increased data return
  - Mission data return rates from 10s of Mbps to Gbps are feasible for range of small and large satellites
- NASA is working with industry and SBIR/STTR program to:
  - Develop STRS-compliant waveforms
  - Advance the technology readiness level of Ka-band SDRs
  - Develop and demonstrate Ka-band space-qualifiable electronically steered antennas



# Co-Authors and Contributors



- NASA Glenn Research Center, Cleveland OH
  - Charles Niederhaus, Richard Reinhart, Joe Downey, Anthony Roberts, Michael Zemba, James Nessel, Bryan Welch
- Space Micro, San Diego CA
  - Bert Vermeire
- Boeing Satellite Systems El Segundo, CA and Boeing Research & Technology, Seattle WA
  - Mario Pavlovic, Nathan Mintz, Tony Monk, Tuan Ha
- Kymeta Government Solutions, Seattle WA
  - Tom Boyer
- Comtech TSC, Torrance CA
  - Jay Moody



# For More Information



- Contact: James Budinger
  - 21000 Brookpark Road, Mail Stop 54-1
  - Cleveland OH 44135
  - [james.m.budinger@nasa.gov](mailto:james.m.budinger@nasa.gov)
  - 216.433.3496



For your kind attention

**THANK YOU!**