



Designing for Outer Space: Design and Evaluation Methods for NASA's Next Generation Space Suit

Ian Meginnis

Space Suit Engineer

NASA Johnson Space Center

Role of the Space Suit

- Protects astronaut from hazards during various phases of mission
- Launch/Entry Space Suit
 - Normally unpressurized
 - Pressurizes if spacecraft loses cabin pressure
 - Some mobility is required when suit is pressurized in emergency scenario
 - Provides additional protection against:
 - No breathable atmosphere
 - Toxic substances
- Extra-Vehicular Activity (EVA) Space Suit
 - Used to perform spacewalks
 - Normally pressurized
 - Pressurized mobility is required when astronaut performs EVAs
 - Provides additional protection against:
 - No breathable atmosphere
 - Micrometeoroids
 - Thermal extremes
 - Radiation




Launch/Entry Space Suit



EVA Space Suit

History of Space Suits

Apollo Space Suit

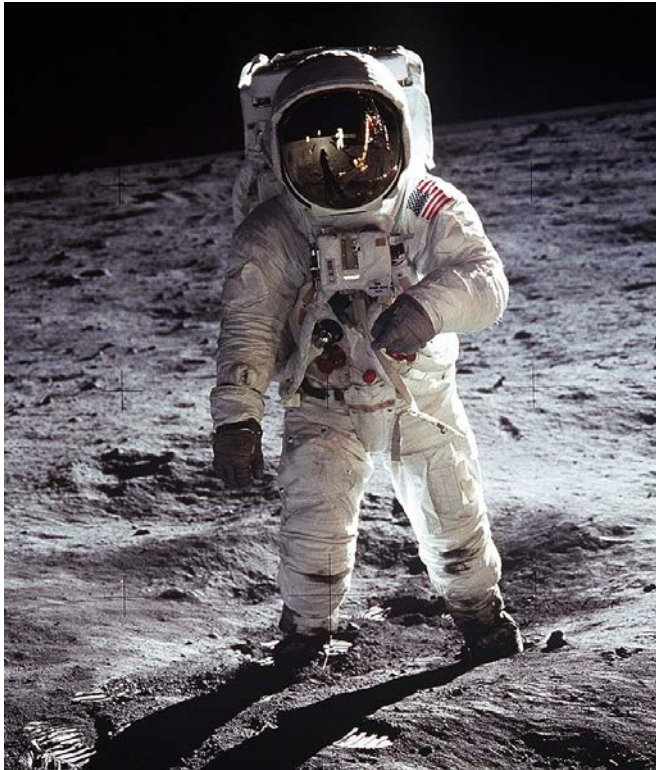


1960s

Shuttle ACES Space Suit



1980s

Shuttle/ISS EMU Space Suit

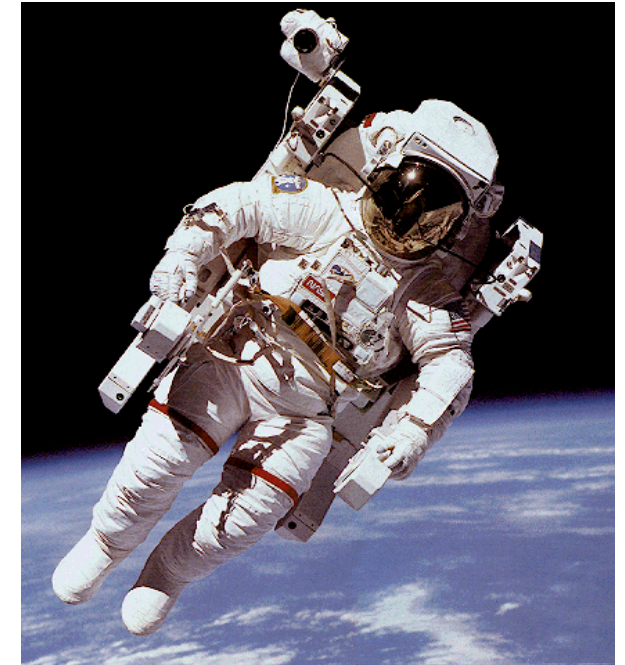

1990s



Z-2 Space Suit

- Z-2 space suit is NASA's newest prototype, micro-gravity and planetary walking suit
- Z-2 is a part of a development effort to build a suit for NASA missions in low-earth orbit (micro-gravity) and on Mars or other planetary surfaces
- Culmination of knowledge from 20 years of space suit research and development
- Flight-like version of Z-2 will be constructed after Z-2 has been extensively evaluated in various environments (lab environment, micro-gravity environment)



Z-2 Space Suit



Z-2 Space Suit Development

- Goal of project was to validate pressure garment mobility architecture and sizing approach for smaller sized crew
- Design of upper torso was meant to address most common complaints about the current EMU space suit
 - Lack of overhead mobility
 - Reduced work envelope for those with short arms and/or narrow shoulders
 - Reduced visibility for those with shorter torsos
 - Contact with shoulder bearings during task completion
- Budget and schedule only permitted single build of upper torso
 - Anthropometric requirements reduced to target smaller range
 - Selected specific maximum and minimums based off anthropometries of identified crew and engineering test subjects

Z-2 Space Suit Development – Sizing

- Suit sizing is critical to the performance of the suit
- A bad suit fit can lead to injuries or poor suit performance
- Z-2 is first use of 3-D human laser scans and 3-D printed hardware for suit development and sizing
- Used 3-D computer models to perform digital fit checks with body scans of test subjects
- Created a 3-D printed prototype to validate models



Z-2 Computer Model Fit Check



3-D Printed Z-2 Suit

How does NASA evaluate space suits?

- Space suit evaluations consist of unmanned and manned tests
 - Unmanned Tests
 - Joint cycle testing
 - Joint torque testing
 - Environmental testing (radiation, dust, thermal, sharp edges, etc.)
 - Manned Tests
 - Joint cycle testing
 - Task evaluations
- A space suit is designed for operation with a human subject, so we ultimately need to understand how a person performs with the suit



Z-2 NBL Testing – Overview

- Unmanned testing occurred during development of Z-2
- Z-2 was designed to enable manned exploration missions in low-earth orbit and beyond, so we needed to do manned testing to evaluate Z-2
 - First envisioned use would be during demonstration of the Deep Space Gateway (DSG) orbiting Earth's moon
- Neutral Buoyancy Laboratory (NBL) provides closest analog to DSG missions
 - Large pool where space suits are made neutrally buoyant to simulate micro-gravity
 - Existing ISS mock-ups submerged in pool for ISS training provide approximation of tasks anticipated for DSG and Mars transit
- Goal of Z-2 NBL Testing: Evaluate performance of Z-2 space suit, relative to the current state-of-the-art space suit (EMU) in a simulated micro-gravity environment



ISS EMU Space Suit


VS.




Z-2 Space Suit

Z-2 NBL Testing – Overview

- Z-2 NBL test series consisted of 2 engineering subjects and 5 astronaut subjects (end users)
- 17 evaluations were performed in NBL
- Subjects performed critical tasks that would need to be performed on the International Space Station
- Subjects performed the same tasks in Z-2 and EMU space suit to gain relative comparisons between the space suits

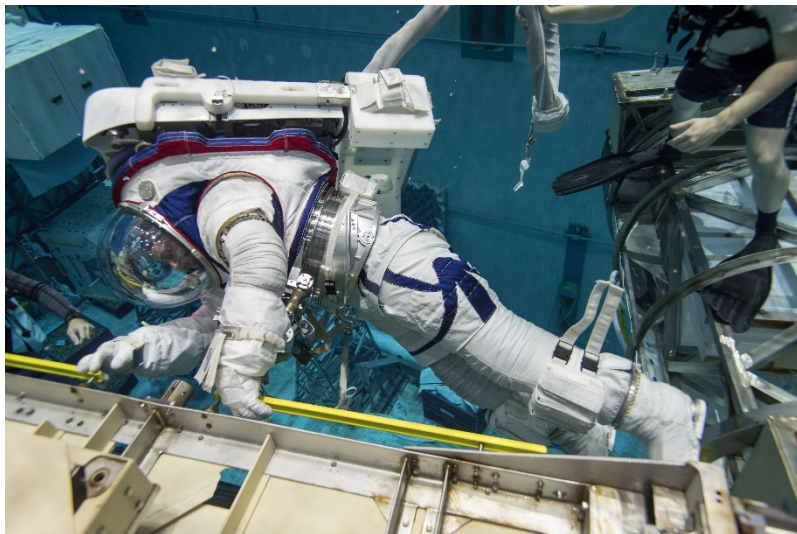

Z-2 Subject Translating in NBL

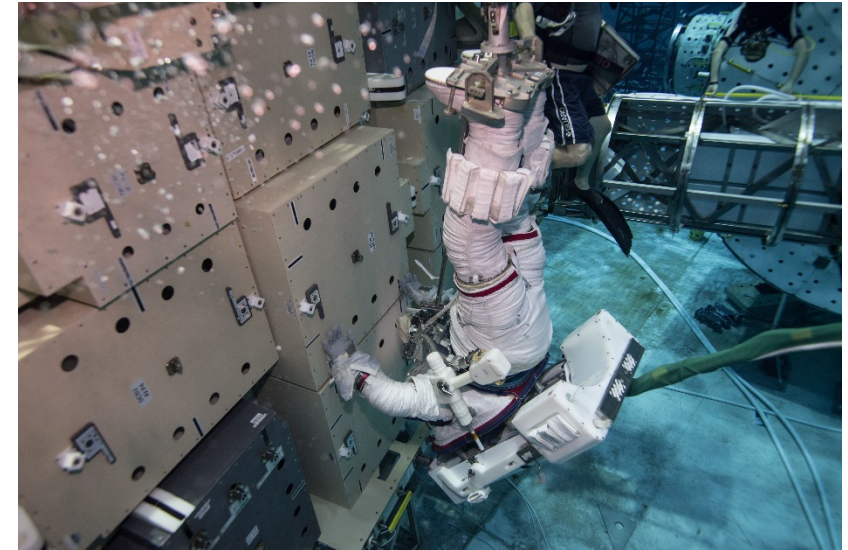

Z-2 Subject Performing Task in NBL




Space Suit Data Metrics

- A challenge in evaluating space suits with human test subjects is how to obtain objective data
- Subjective feedback from test subjects is the primary data that we collect during suit tests (eg: comments)
 - Advantage: Subjects can provide open-ended responses (responses are not constrained)
 - Disadvantages:
 - Test subject comments can be difficult to interpret
 - Subject may not know how a space suit can be improved – they just want to perform work with minimal effort
 - Subjects may not be able to articulate their comments in a way that engineers can use to improve the design of the suit
 - Comments can be difficult to coalesce to identify trends
- Other evaluation metrics:
 - Rating scales
 - Objective task performance
 - Subject's reach envelope while in space suit
 - Subject's work rate
 - Life cycle/fatigue of suit components
 - Internal suit forces on human body

Z-2 NBL Testing – Evaluation Metrics

- Subjective Metrics
 - Subject comments
 - Rating scales
- Objective Metrics
 - Objective task performance
 - Subject's subject work rate
 - Subject's reach envelope

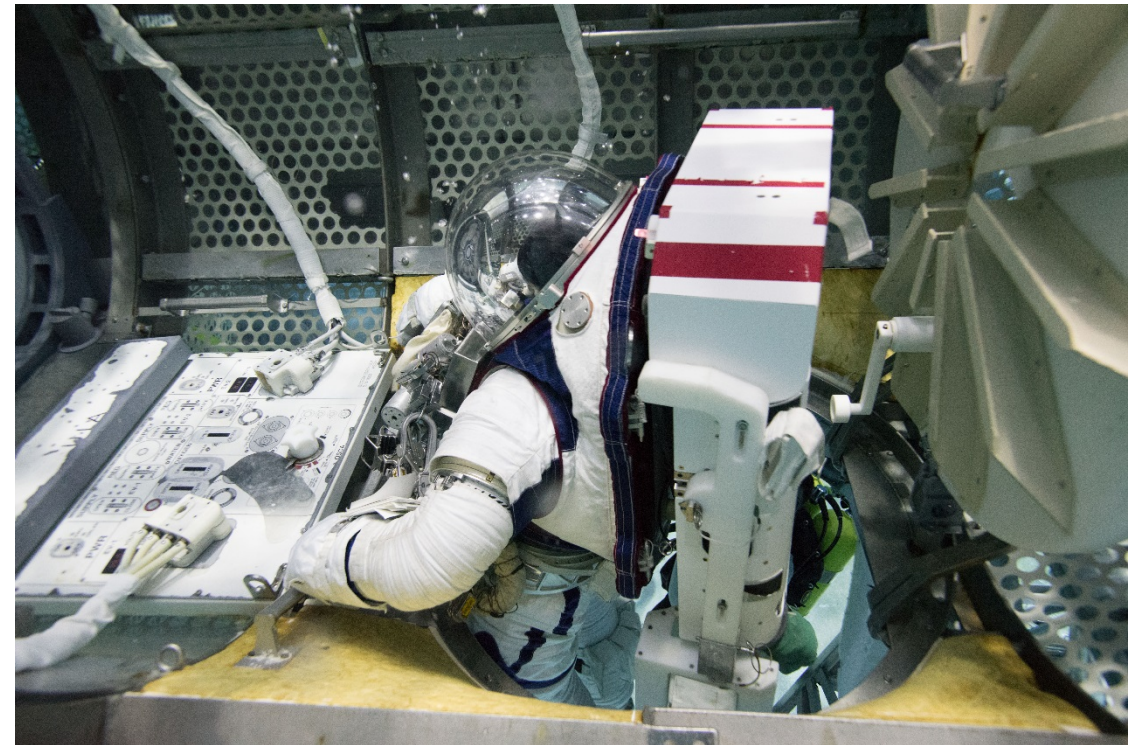


Z-2 Subject Ingressing Airlock in NBL



Subjective Data – Rating Scales

- For space suit testing, rating scales are often unique to each test because they are developed to provide specific data to suit engineers
 - Are you trying to determine pass/fail criteria?
 - Are you trying to refine the design of a joint?
 - Are you trying to compare performances of different space suits?
- Rating scales were used to assess: Acceptability, Discomfort, Muscle Fatigue, Exertion, Simulation Quality
 - Provides measure of absolute suit performance
 - Provides clear delineation between suits
 - Easy for test subjects to interpret

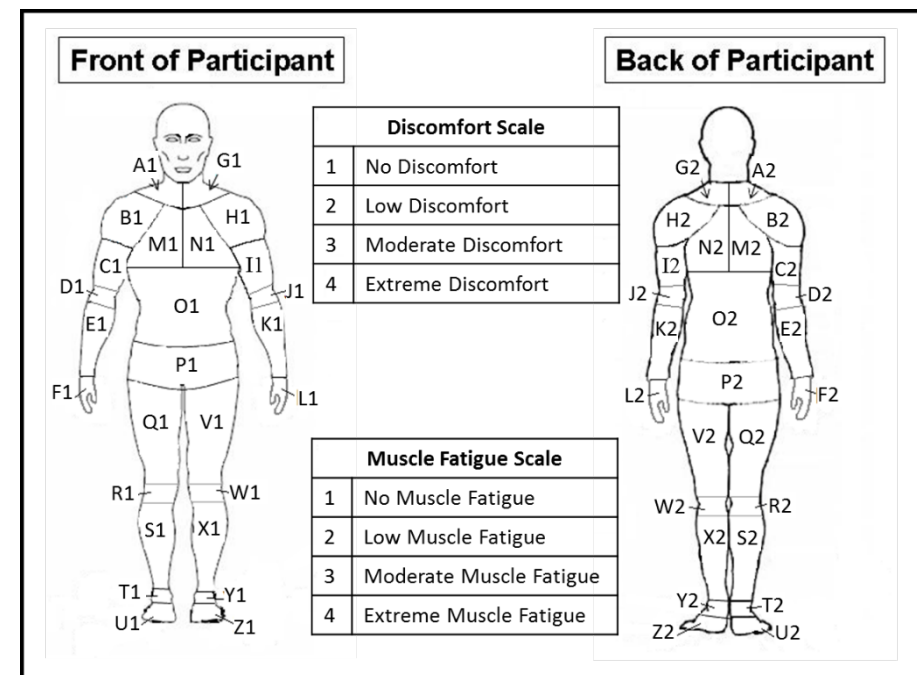

Example of Discomfort/Fatigue Scales for Z-2 NBL Testing

Totally Acceptable	Acceptable		Unacceptable	
No improvements necessary	Minor improvements desired	Major improvements desired	Minor improvements required	Major improvements required
1	2	3	4	5


Example of Acceptability Scale for Z-2 NBL Testing

Objective Data – Work Rate

- Subject's work rate provides measure of how hard subject is working inside space suit
- Work rate is correlated to carbon dioxide that is generated by test subject inside space suit

Subject Work Rate \approx [suit gas flow rate] * [percent of carbon dioxide generated by test subject]

- Test subjects in EMU and Z-2 performed identical tasks

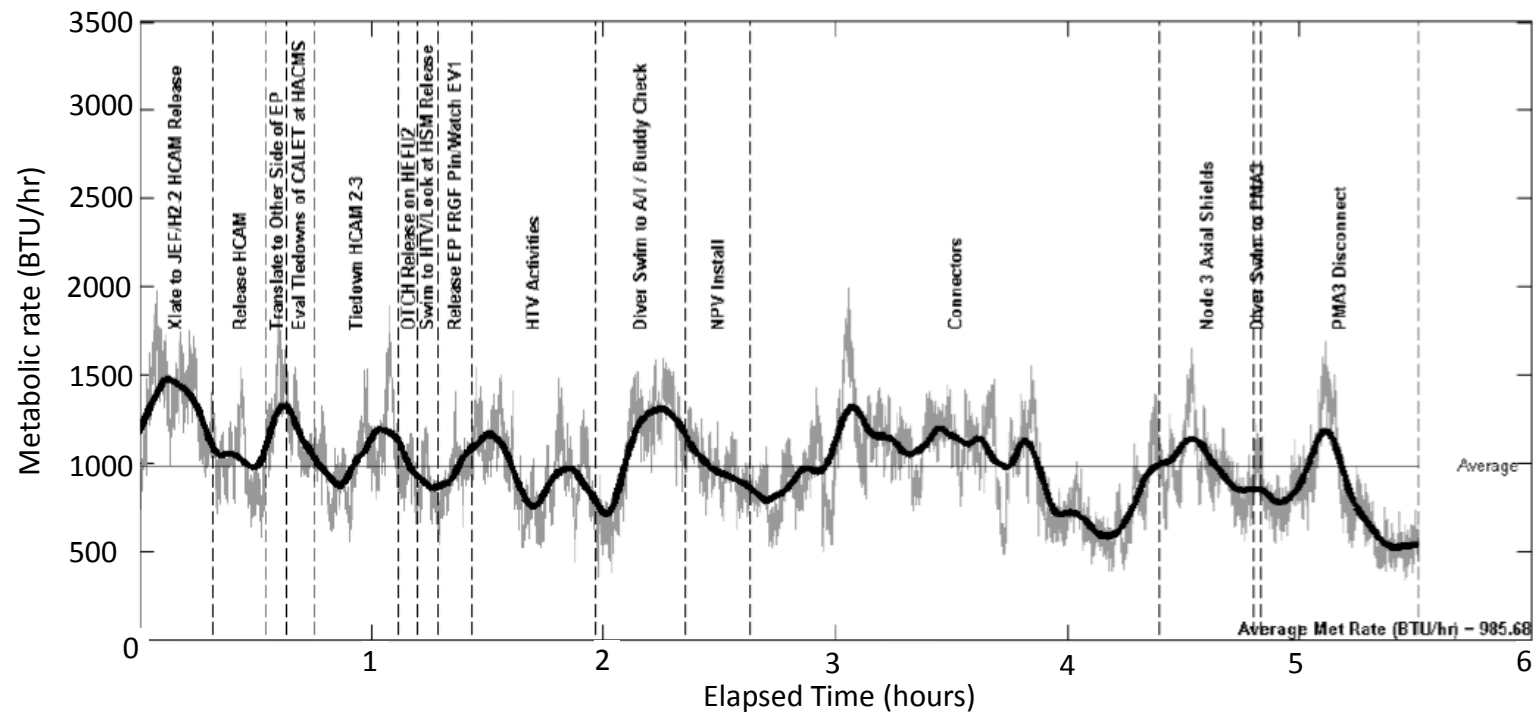

Example of Task-Based Work Rate Data




Objective Data – Work Rate


- Advantages
 - Data can be viewed in real time
 - Data is related to on-orbit consumables required for suit
 - Data can help interpret subjective data (acceptability, comfort, etc.)
- Disadvantages
 - Task timelines must be rigidly controlled, which may not be possible for research and development tests
 - Poor simulation quality can adversely affect data

Objective Data – Reach Envelope

- Motion capture is commonly used in laboratory environments to evaluate and compare mobility of different space suits
- Prior to NBL test series, underwater motion capture system for space suits was not available
- Underwater motion capture system was developed for NBL test series
 - Four GoPro cameras
 - Calibration targets
- Subjects performed prescribed motions in space suits to identify all “reachable” areas
- Post-test processing provided digital reach envelopes of Z-2 space suit and EMU space suit
- Metrics derived from motion capture data
 - Reach envelope (where you can reach)
 - Range of motion angles
 - Reach volume

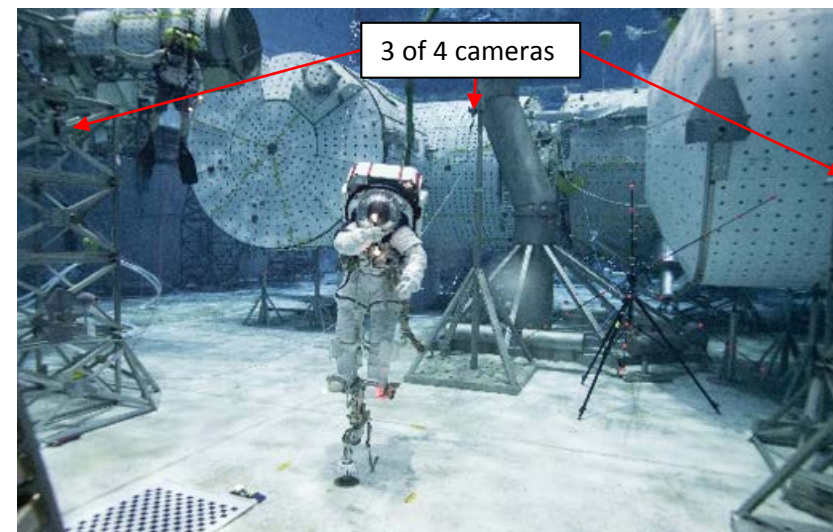


Motion Capture System Test Setup

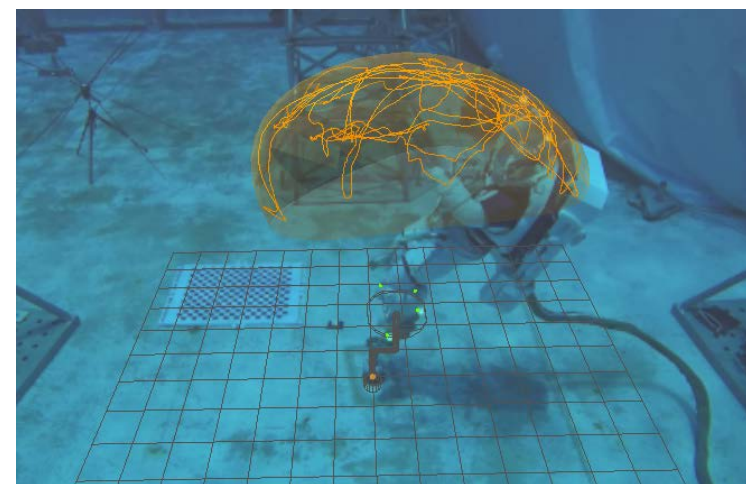


Full Body Reach Envelope

Objective Data – Reach Envelope

- Underwater motion capture system provided quantifiable data for comparing reach of Z-2 and EMU space suits
- Z-2 subjects commented that Z-2 provided better overhead reach and rotational reach than EMU – this was confirmed by motion capture data
- Advantages of System
 - Provides comparative data between suits
 - Enables suit engineers to better understand suit mobility
 - Data can help interpret subjective data (acceptability, comfort, etc.)
- Disadvantages of System
 - Subjects must be fixed to location on pool floor
 - Post-test data processing is time-consuming and labor intensive
 - Data cannot be viewed in real time
 - Motion capture system required periodic re-calibration

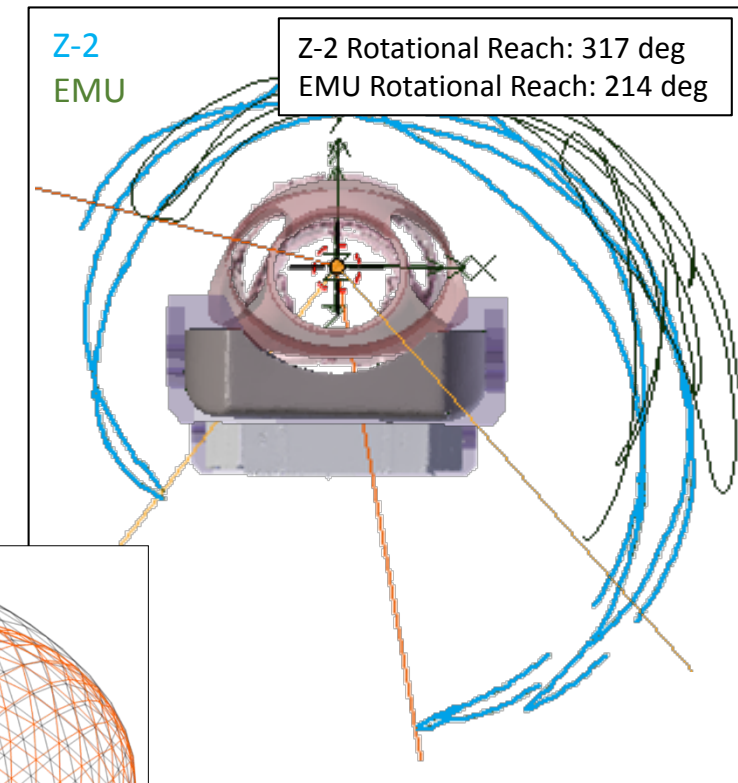

Z-2 and EMU Waist Rotation

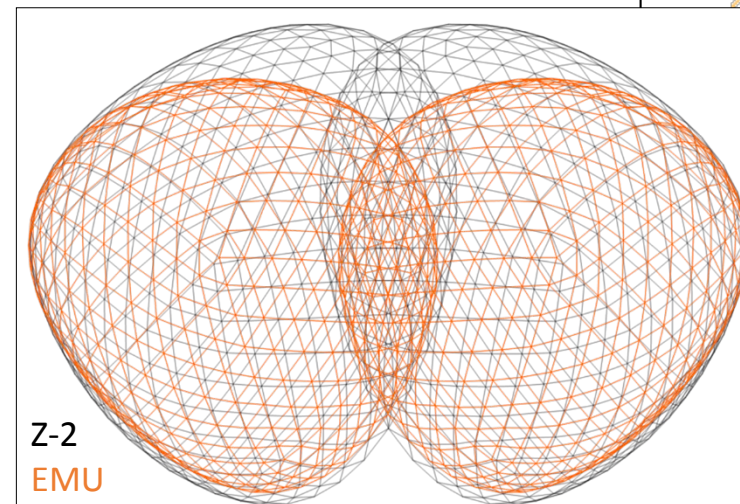

Z-2 and EMU Cross-Reach



Forward Work

- Complete analysis of Z-2 NBL test data
 - Evaluate motion capture data to better understand mobility differences between Z-2 and EMU space suits
 - Analyze work rate data to quantify energy differences between the suits when performing micro-gravity tasks
 - Assess task performance data to quantify functional capabilities of Z-2 and differences between Z-2 and the EMU
- Use results from Z-2 NBL test series to make design changes to advanced space suit architecture in support of NASA's Deep Space Gateway program



Discussion Topics

- Questions for automotive industry
 - What types of testing does industry perform to evaluate HMI technologies?
 - What metrics does automotive industry consider when evaluating HMI technologies?
 - Does industry primarily rely on objective data or subjective data when evaluating HMI technologies?
 - How does industry evaluate HMI designs with different sizes of people?

Questions?

