



Blockage Testing in the NASA Glenn 225 Square Centimeter Supersonic Wind Tunnel*




Abigail Sevier, Case Western Reserve University

Dr. David O. Davis, NASA Glenn Research Center



Mark Schoenenberger, NASA Langley Research Center

*This work was supported by a NASA Space Technology Research Fellowship


- Project to Support Magnetic Suspension System for Testing Dynamic Stability of Blunt Body Entry Vehicles
- Past Test Methods for vehicle include Ballistic Range Testing
 - Use shadowgraph technique to capture model's position and angle down test range
 - Accurate flight dynamics from free-flying test, but simulation fit to trajectory provides no good options for data reduction
- Exploring use of Magnetic Suspension System in Supersonic Wind Tunnel
 - Still provides free-flying test set-up, but more controlled environment
 - Electronic Positioning System provides 3 DOF control, allowing model to oscillate around center of gravity

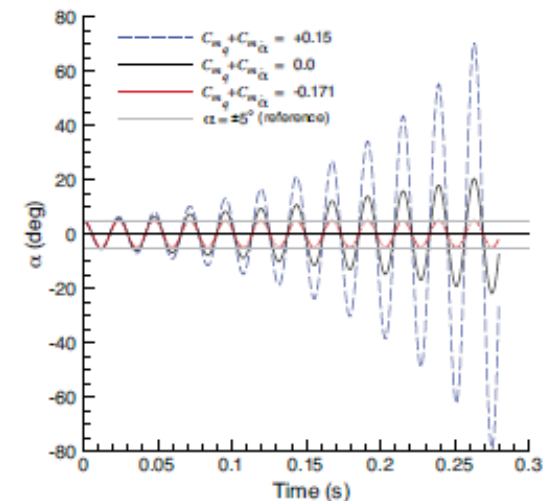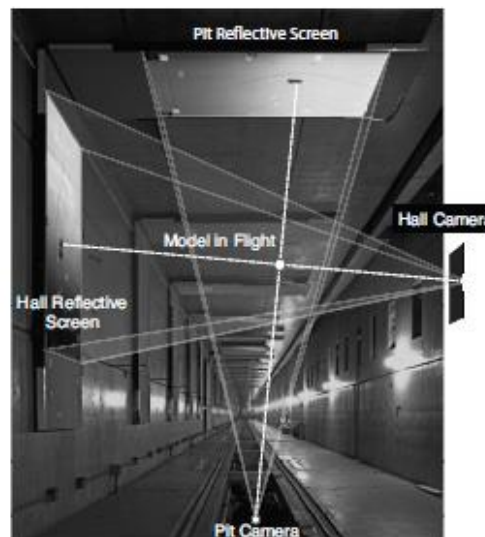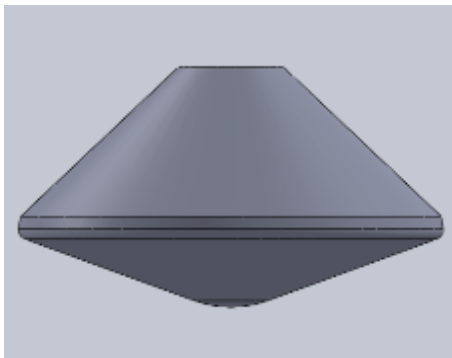

- Magnetic Suspension System will react against aerodynamic and gravitational forces to suspend model
- MIT proposed Magnetic Suspension System at NASA Langley HFA Tunnel at Mach 10, 1966
 - Typical test models: Cones with semi vertex angles ranging from 10-40 degrees
 - 6 DOF magnetic control and EPS position feedback
- NASA LaRC/GRC will use tunnel for measuring dynamic stability of blunt bodies
 - Model will be comprised of spherical iron core surrounded by non-magnetic materials
 - EPS System well suited for position feedback, difficult to optically track blunt body
 - Flight dynamics will be recorded with high speed cameras
- Subsonic tunnel pathfinder for supersonic magnetic balance design

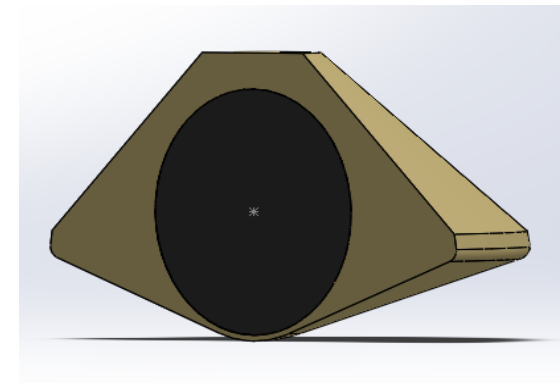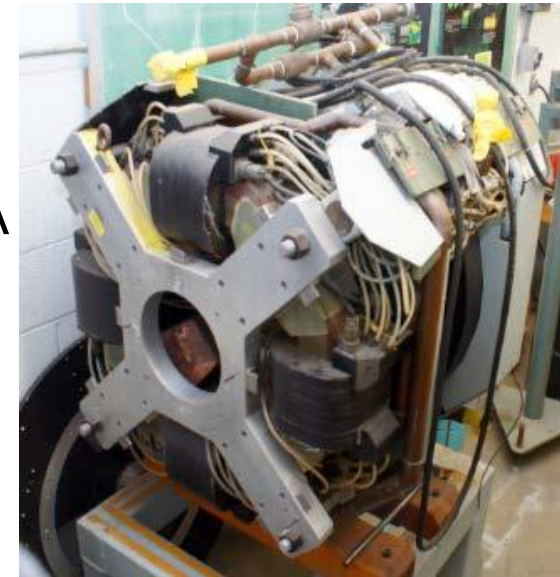

- NASA GRC 225 cm² Supersonic Wind Tunnel
 - Total Pressure: .276 MPa
 - Vacuum Pressure: 88 kPa
 - Continuous Flow Facility
- Contains nozzle and blocks for:
 - Mach 2, 2.5, and 3 w/ Square Test Section (15 cm side)
 - Mach 2.5 Axisymmetric Test Section (17 cm diameter)
- Square Test Sections contain windows allowing for Schlieren capability

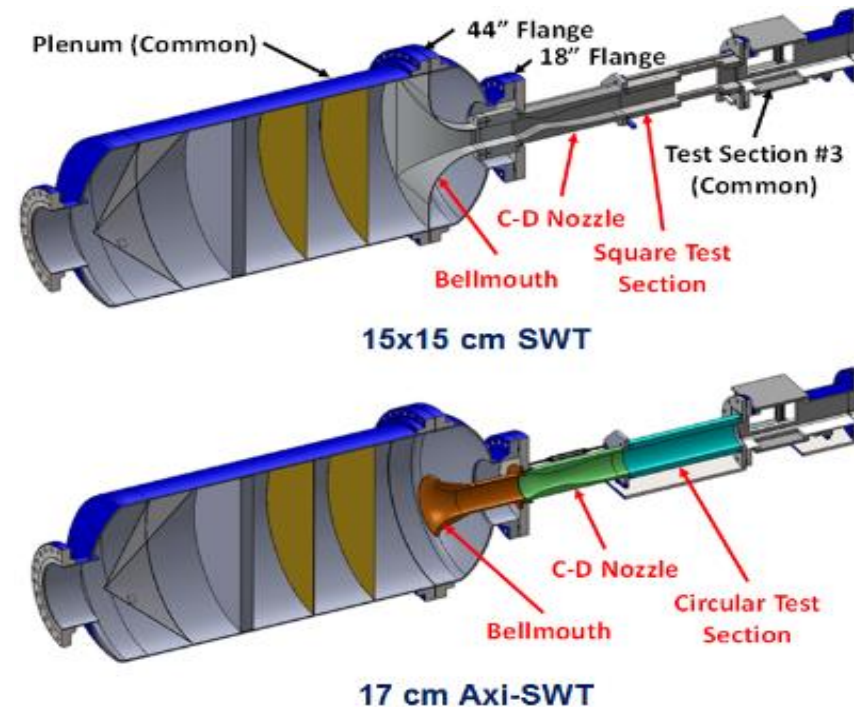





- Minimizing Magnetic Field Strength
 - Sizing Test Models with Blockage Tests
 - $F_{Drag} = qSC_D$
 - $F_{Magnetic} = V(m \times \nabla)H$
 - Tunnel Start
 - Determine largest model possible ($F_{magnetic} \sim r^3$ and $F_{drag} \sim r^2$)
 - Determining Lowest Possible Dynamic Pressure (decreases Drag)



Literature Review

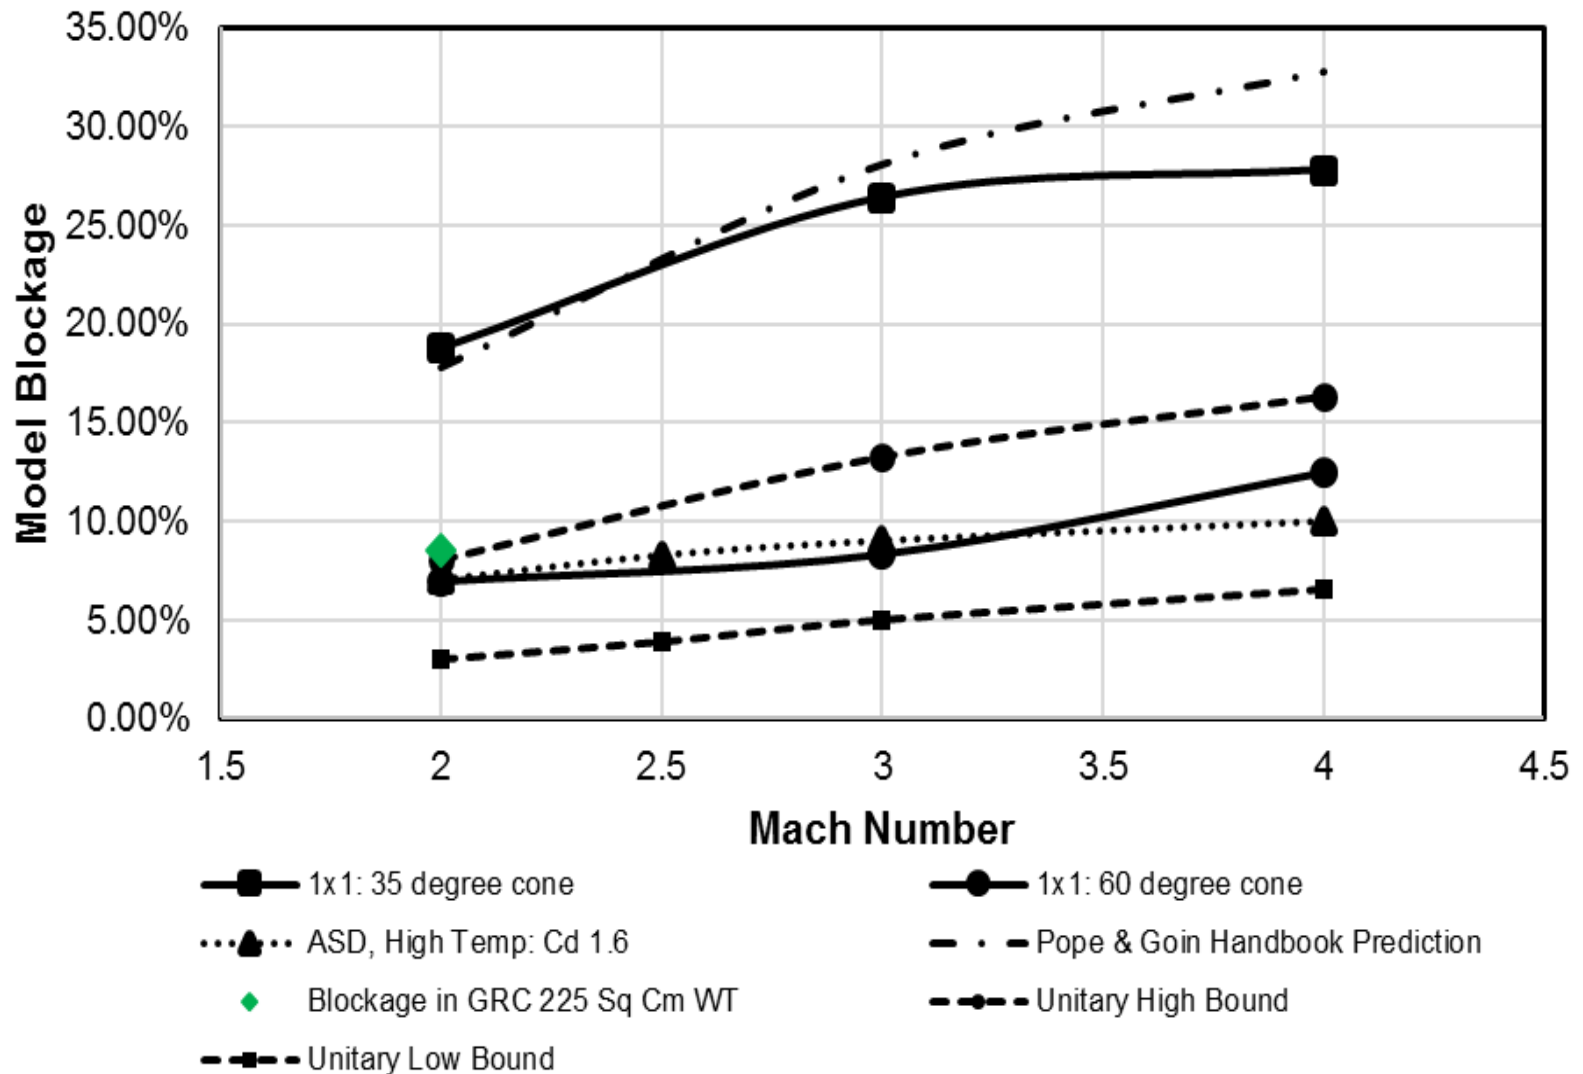


- 3D printed test matrix of varying model sizes and cone angles
- Cone angles selected to be 45, 60 and 70 degree models
- Models were tested at Mach 2, 2.5 and 3 with Square Test Section and at Mach 2.5 with Axisymmetric Test Section
- Total Pressure increased incrementally until model started
 - Maximum Reynolds Number corresponded to 310 kPa or 45 psia or a mass flow of 5.4 kg/s or 12 lb/s
- After start occurred, total pressure decreased incrementally until model unstopped

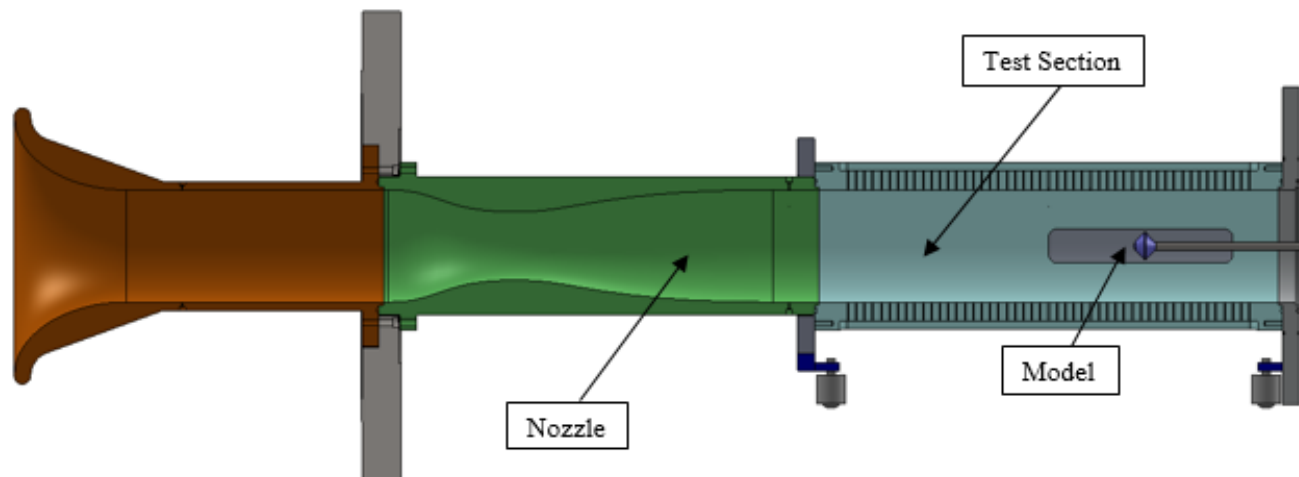




Blockage Tests: Wall Pressure Tap Data

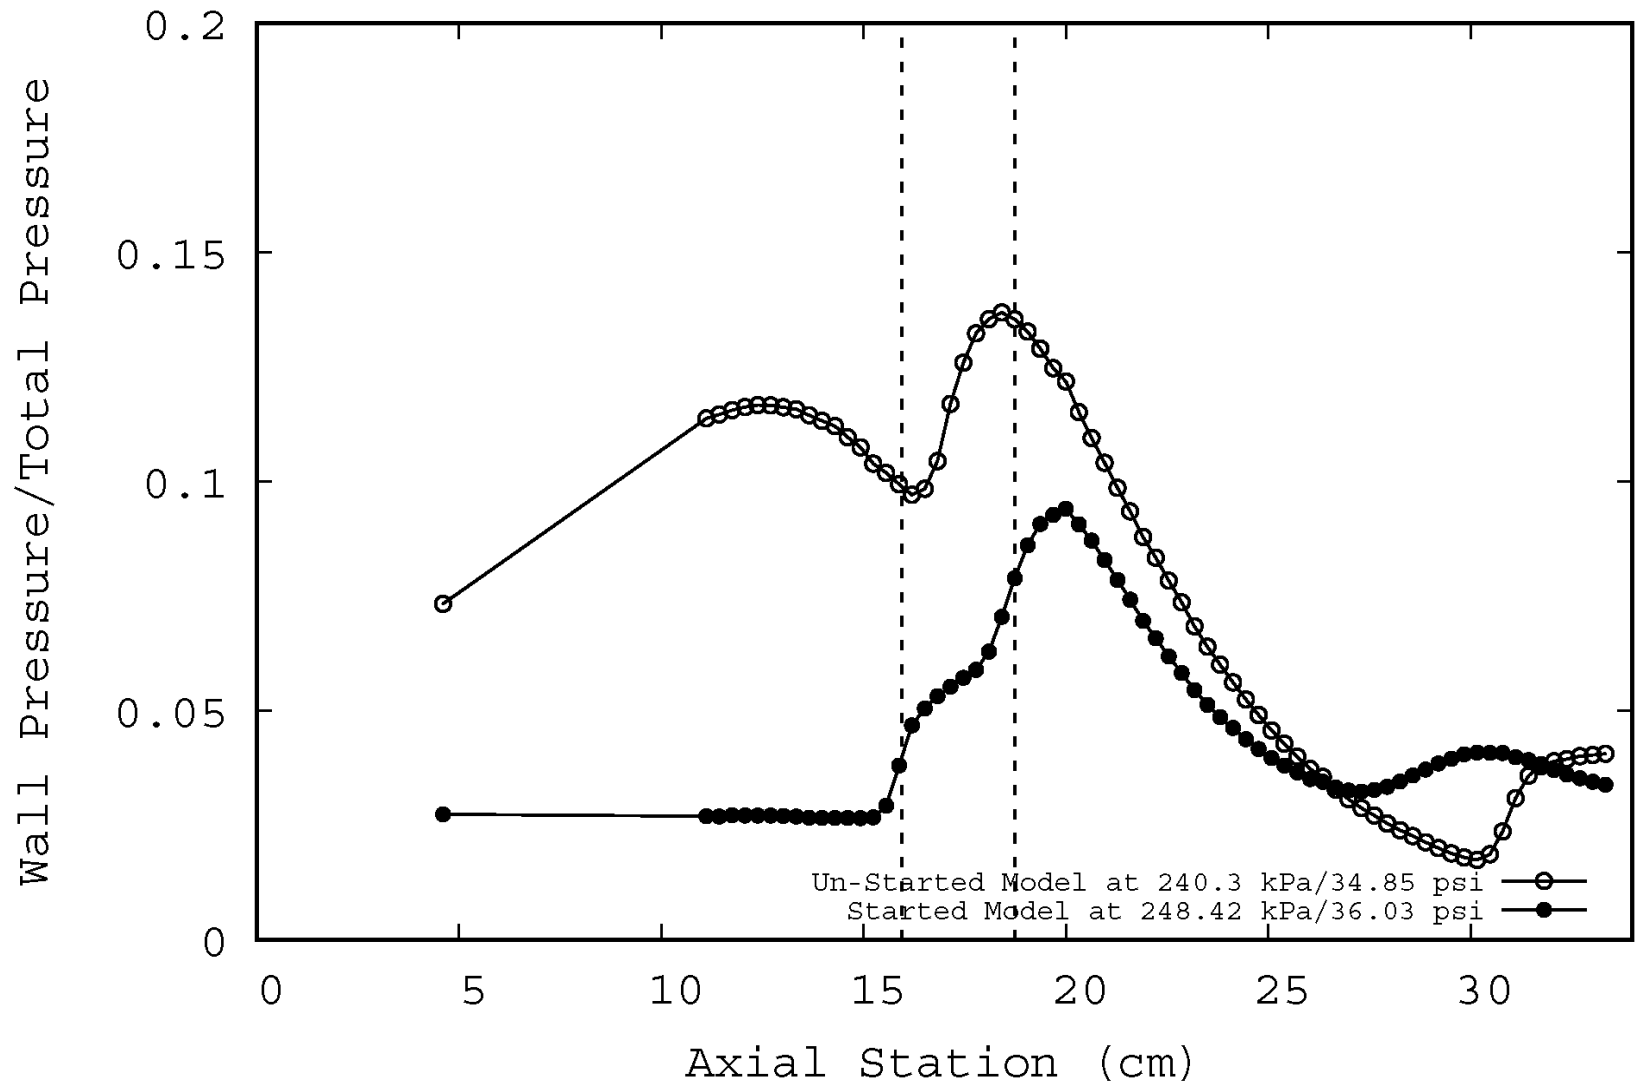

Model 6007.5 at Mach 3



Blockage Tests: Schlieren Data

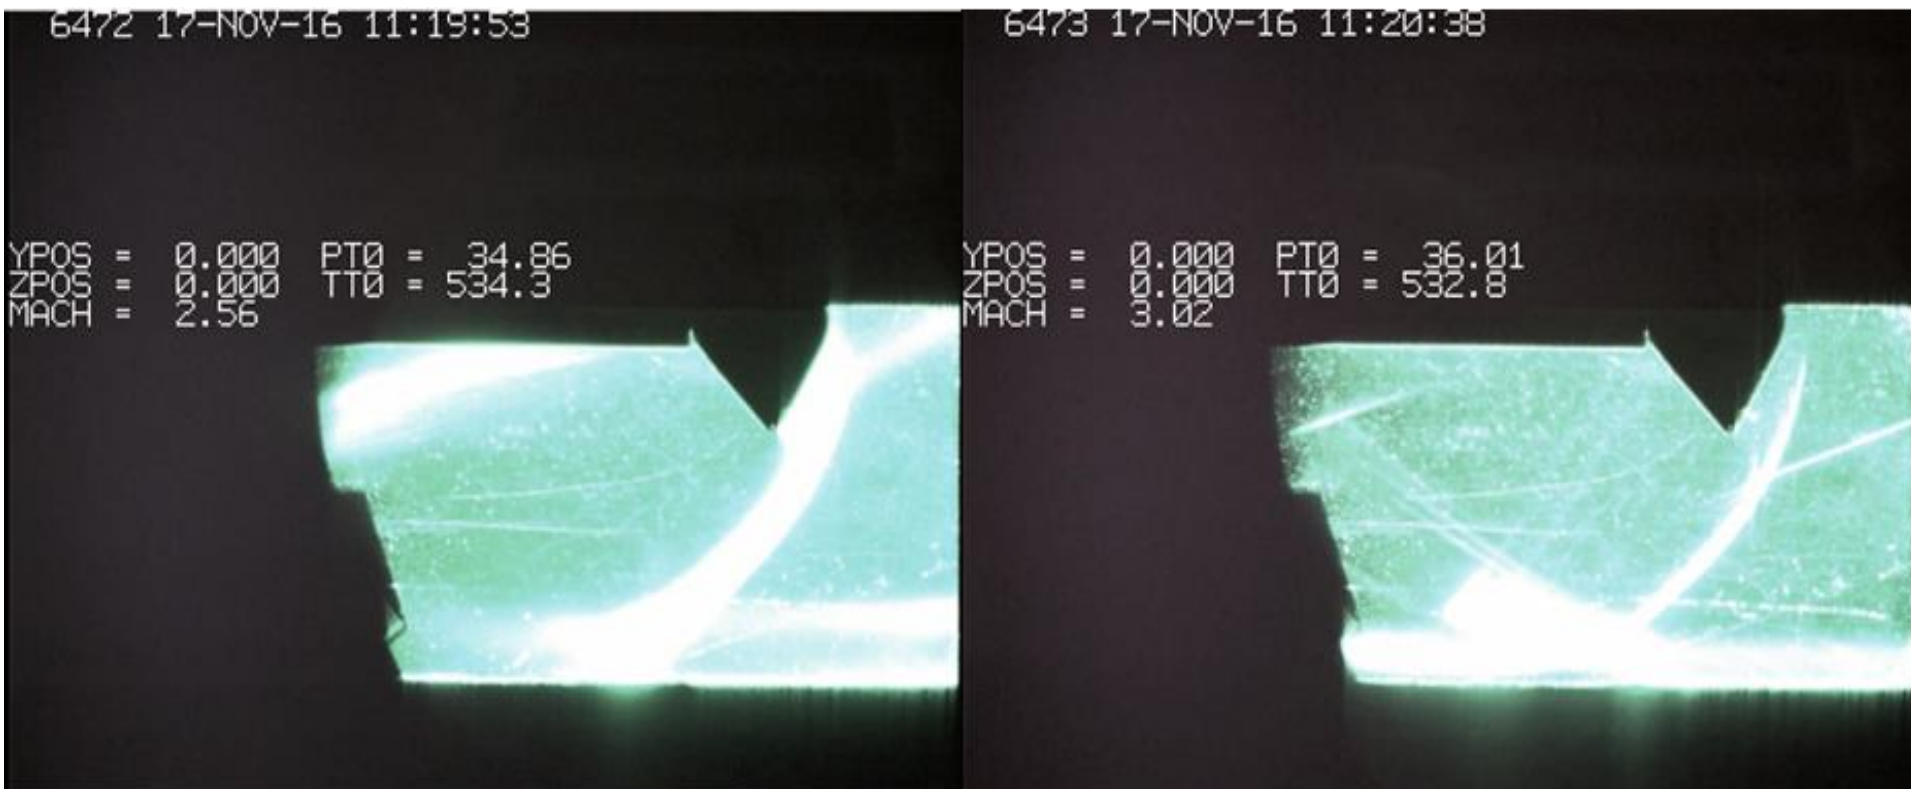


Model 6007.5 at Mach 3
(L) Unstarted, (R) Started




Blockage Test: Mach 2.5 Axisymmetric Nozzle

50.8 cm

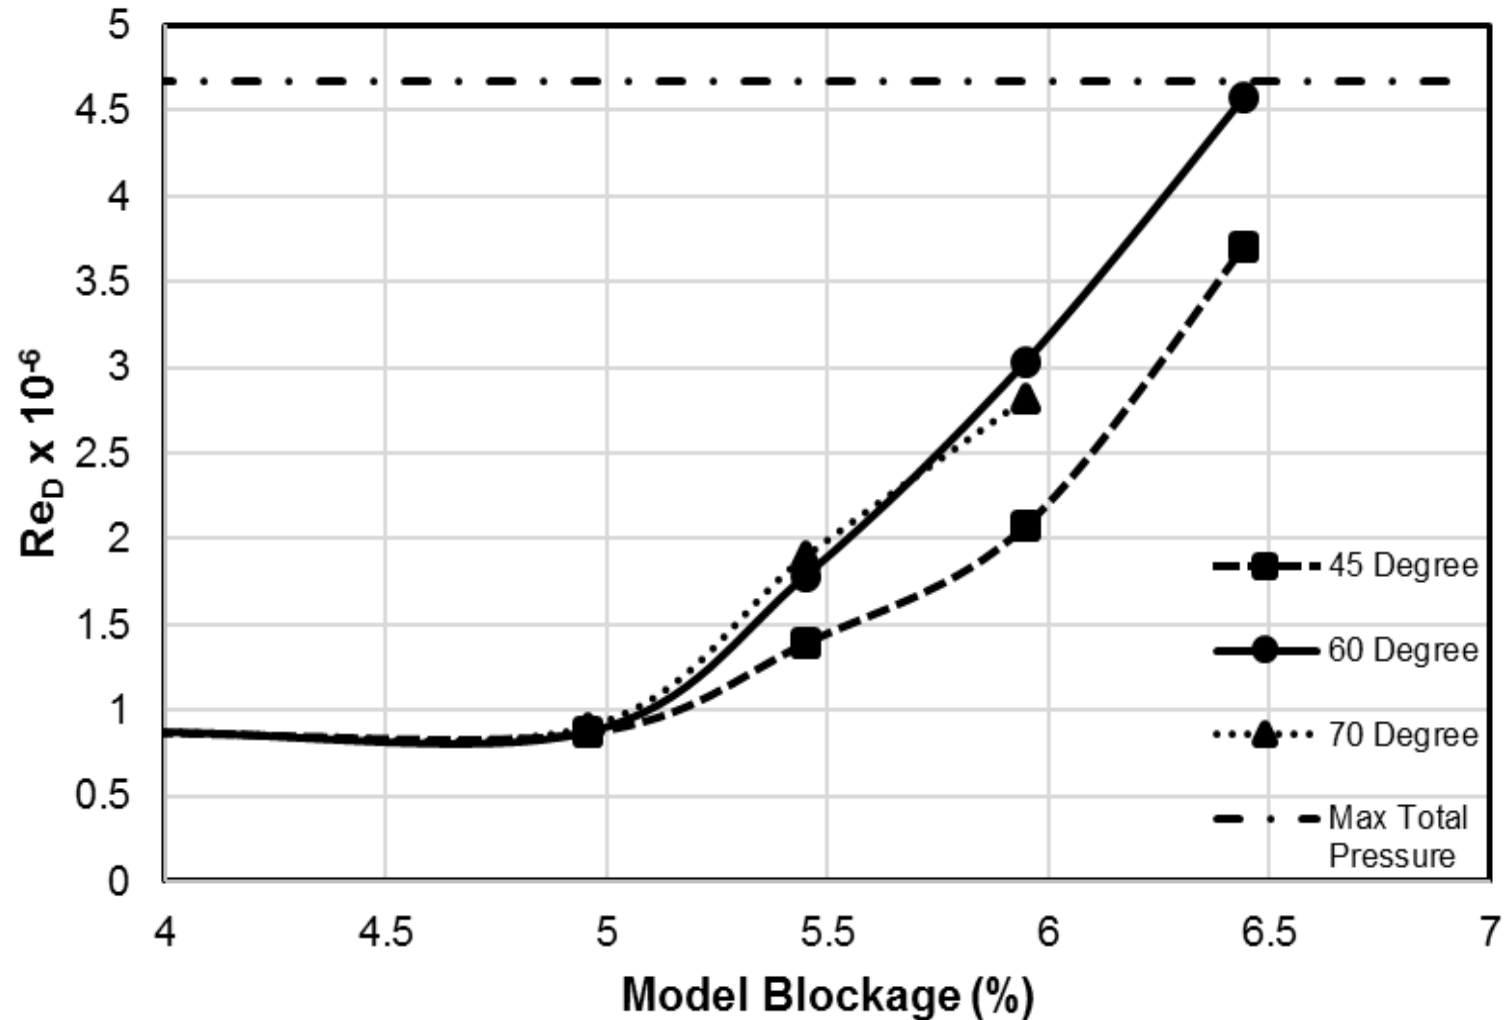



Blockage Test: Mach 2.5 Axisymmetric Nozzle: 10.2 cm

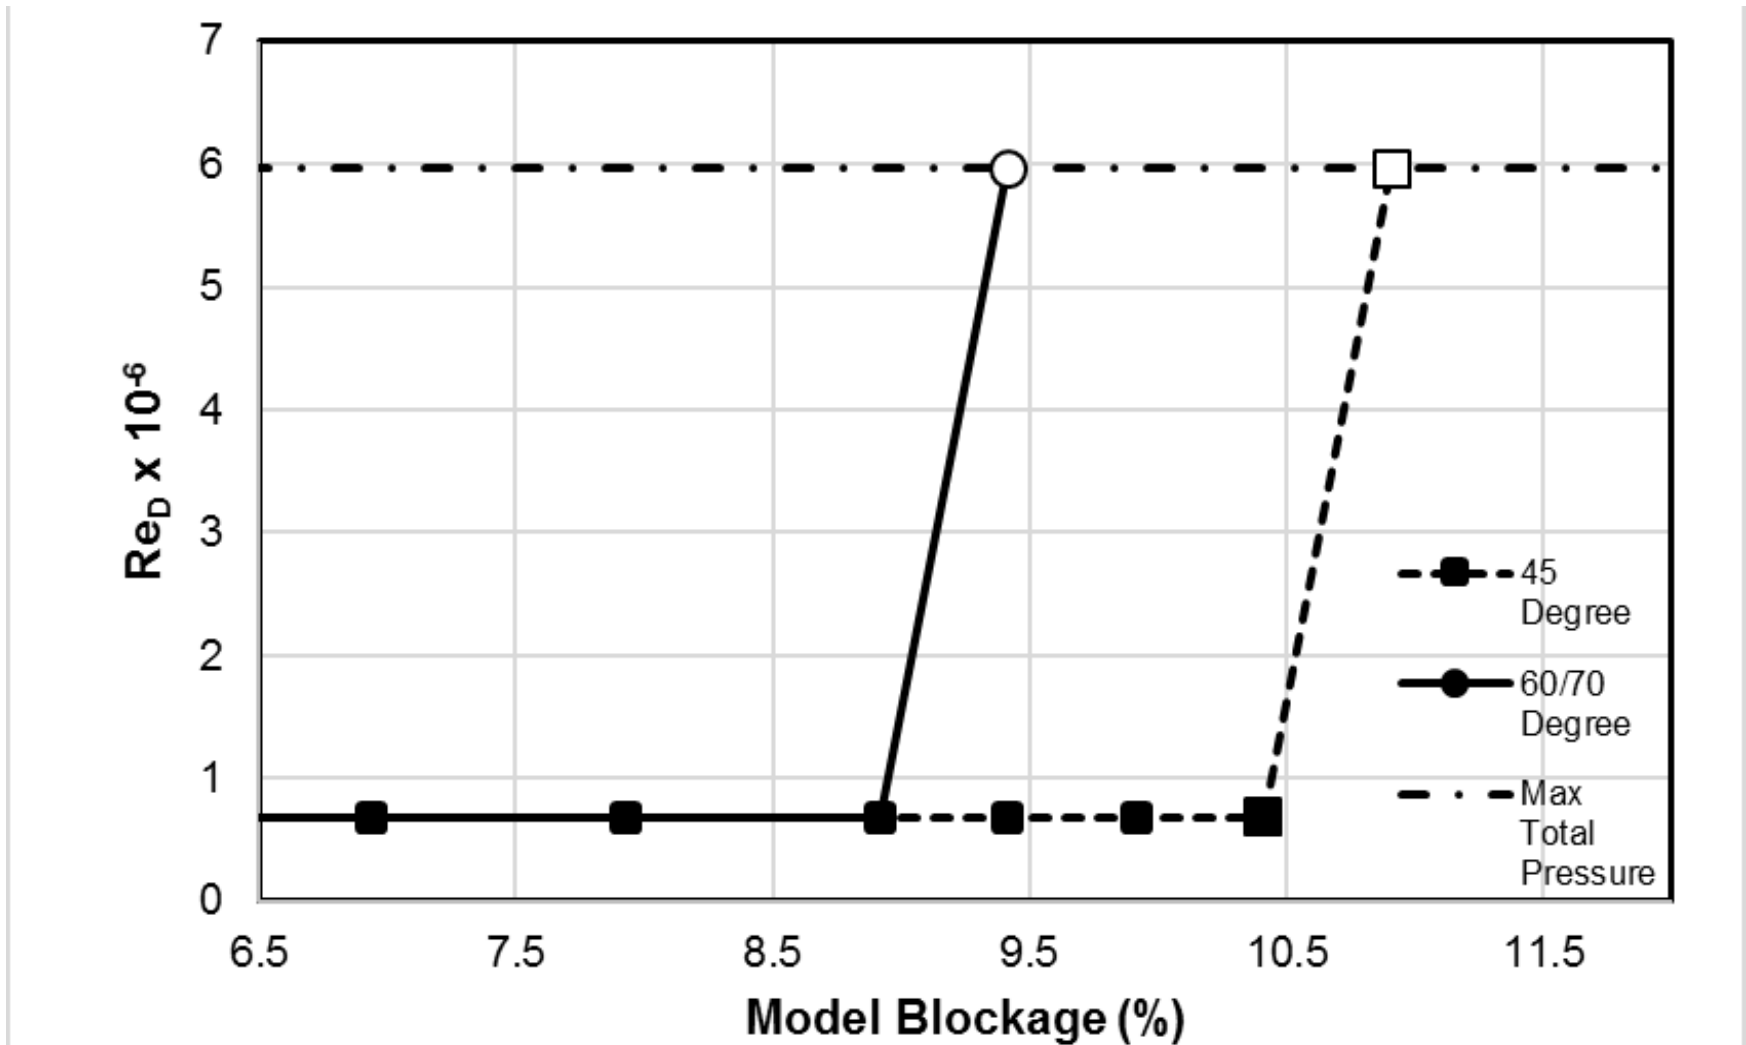


- Model Same Size for 60 and 70 degree model



Boundary Layer Correlation Depending on Axial Location

- Data taken in former study in Mach 2.5 Axisymmetric Test Section

Model Distance	Disp Thickness	BL Blockage
(cm)	(cm)	(cm ²)
8.573	0.214	11.298
49.213	0.346	18.108


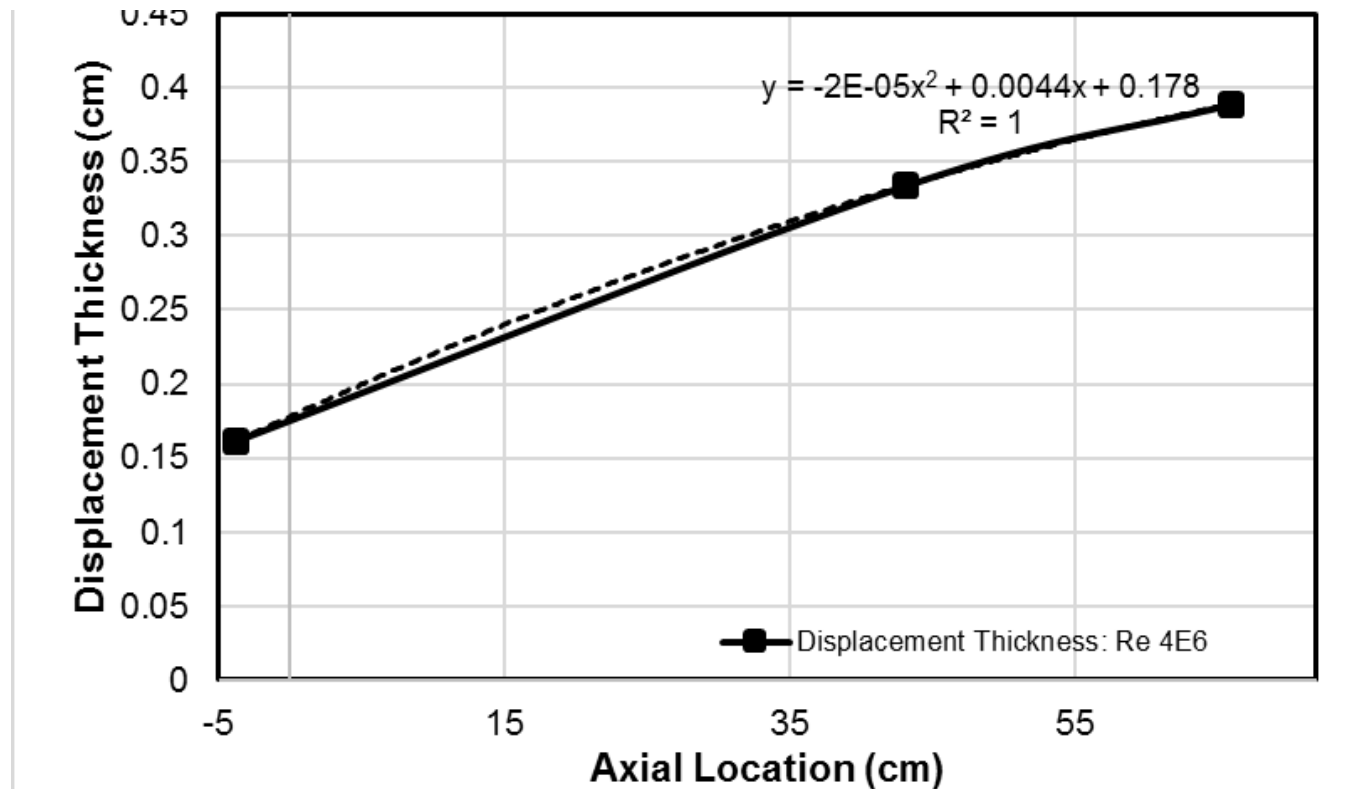




Boundary Layer Correlation Depending on Axial Location

- Previous data taken at different Reynolds number than blockage testing Re_D of 4×10^6
- Data taken in another study in Mach 2.5 Square Test Section that compares Re_D vs displacement thickness

$Re x 10^6$	δ^* (cm)
0.984	0.392
1.89	0.357
2.46	0.344

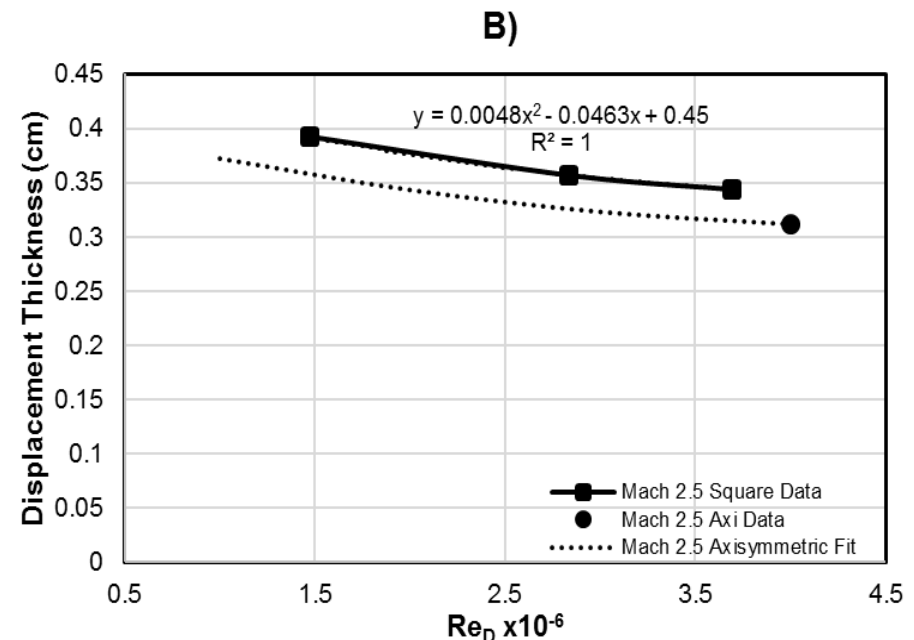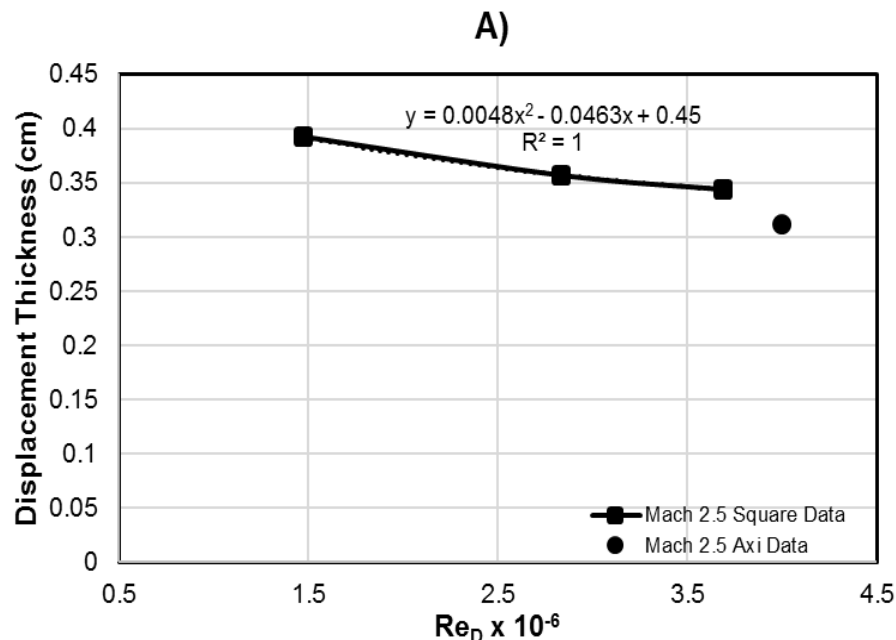



Boundary Layer Correlation Depending on Axial Location

		$\times 10^6$	cm	cm	%
Back	Model	Re	δ^* at 36.56 cm	δ^* at 50.8 cm	Blockage
70	6.0%	2.822	0.3232	0.359	8.269%
60	6.5%	4.573	0.3011	0.3345	7.715%
45	6.5%	3.706	0.3089	0.3432	7.913%

Front	Model	Re	δ^* at 36.56 cm	δ^* at 10.2 cm	Blockage
70	9.0%	0.68	0.38355	0.2192	5.090%
60	9.0%	0.68	0.38355	0.2192	5.090%
45	10.5%	0.68	0.38355	0.2192	5.090%

$$\frac{A_{BL}}{A_{test}} = \frac{2R\delta^* - \delta^{*2}}{R^2}$$




Boundary Layer Correlation Depending on Axial Location

Location	Cone	Model	BL Blockage	Total Blockage
10.2 cm	70	9.0%	5.09%	14.01%
50.8 cm	70	6.0%	8.27%	14.22%
10.2 cm	60	9.0%	5.09%	14.01%
50.8 cm	60	6.5%	7.72%	14.16%
10.2 cm	45	10.5%	5.09%	15.50%
50.8 cm	45	6.5%	7.91%	14.36%

- Much larger models can be tested at front of test section due to reduced boundary layer blockage
- Test section can be designed to be shorter in length because of likely testing location near front



Blockage Test: Mach 2.5 Square Test Section: 18.7 cm from Nozzle

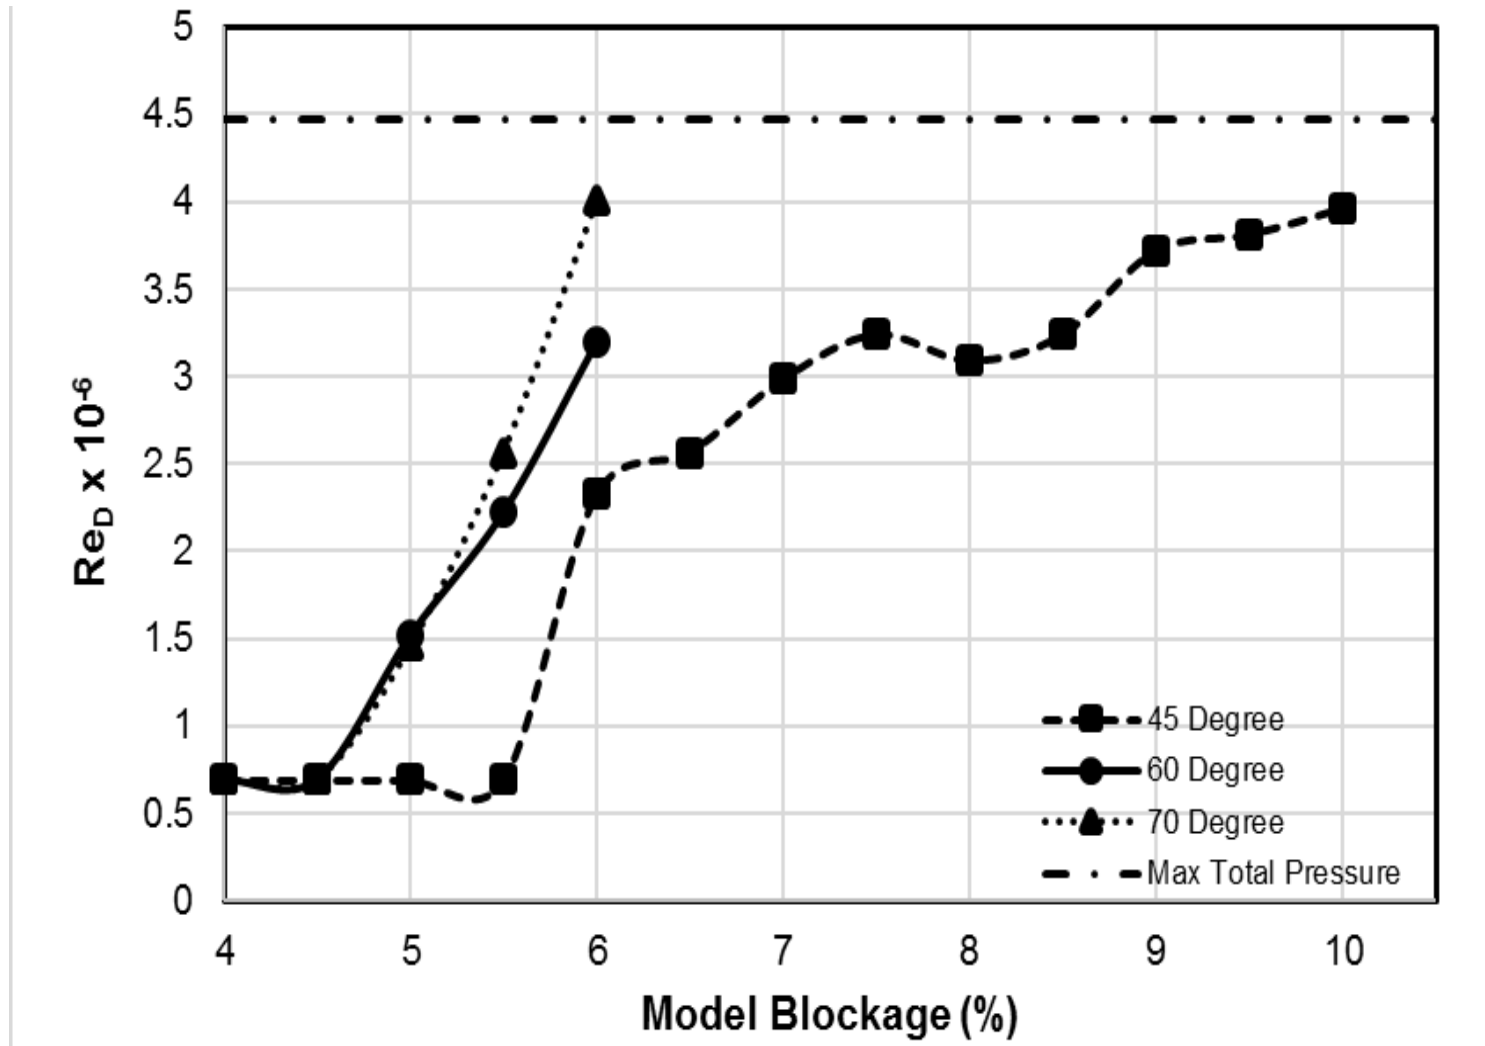



Comparison of Boundary Layer Blockage between Mach 2.5 Square and Axisymmetric Test Sections

- C_{CG} is “corner growth coefficient” approximates boundary layer blockage at corners
 - Adjusted to be 1.087 or 8.7% to match total blockage of 60 degree model


$$\frac{A_{BL \text{ Blockage}}}{A_{test \ section}} = C_{CG} \frac{L_{test}^2 - (L_{test} - 2 \delta^*)^2}{L_{test}^2}$$

Location	Cone	Model	BL Blockage	Total Blockage
Axi-10.2 cm	70	9.0%	5.09%	14.01%
Axi-50.8 cm	70	6.0%	8.27%	14.22%
Square	70	6.0%	7.87%	13.87%
Axi-10.2 cm	60	9.0%	5.09%	14.01%
Axi-50.8 cm	60	6.5%	7.72%	14.16%
Square	60	6.0%	8.09%	14.09%
Axi-10.2 cm	45	10.5%	5.09%	15.50%
Axi-50.8 cm	45	6.5%	7.91%	14.36%
Square	45	10.0%	7.88%	17.88%

- Square test section has comparable boundary layer blockage as 50.8 cm in Axisymmetric Test Section




Blockage Test: Mach 2 Square Test Section: 18.7 cm from Nozzle

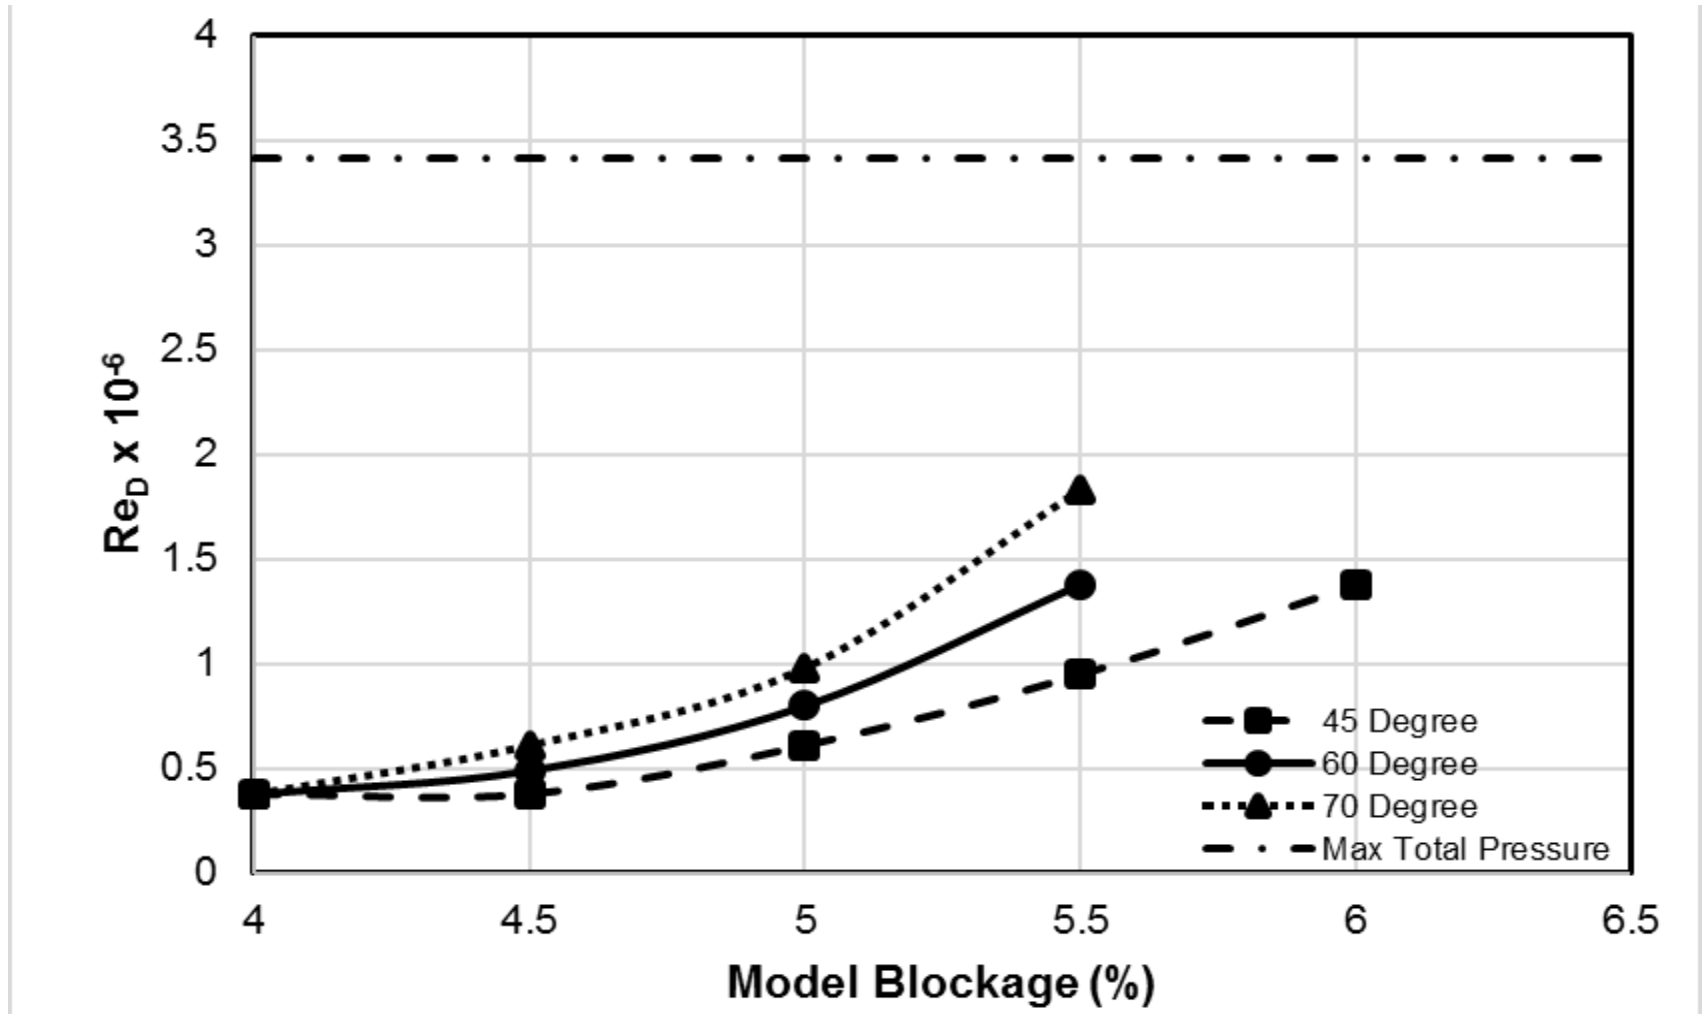




Blockage Test: Mach 3 Square Test Section: 18.7 cm from Nozzle

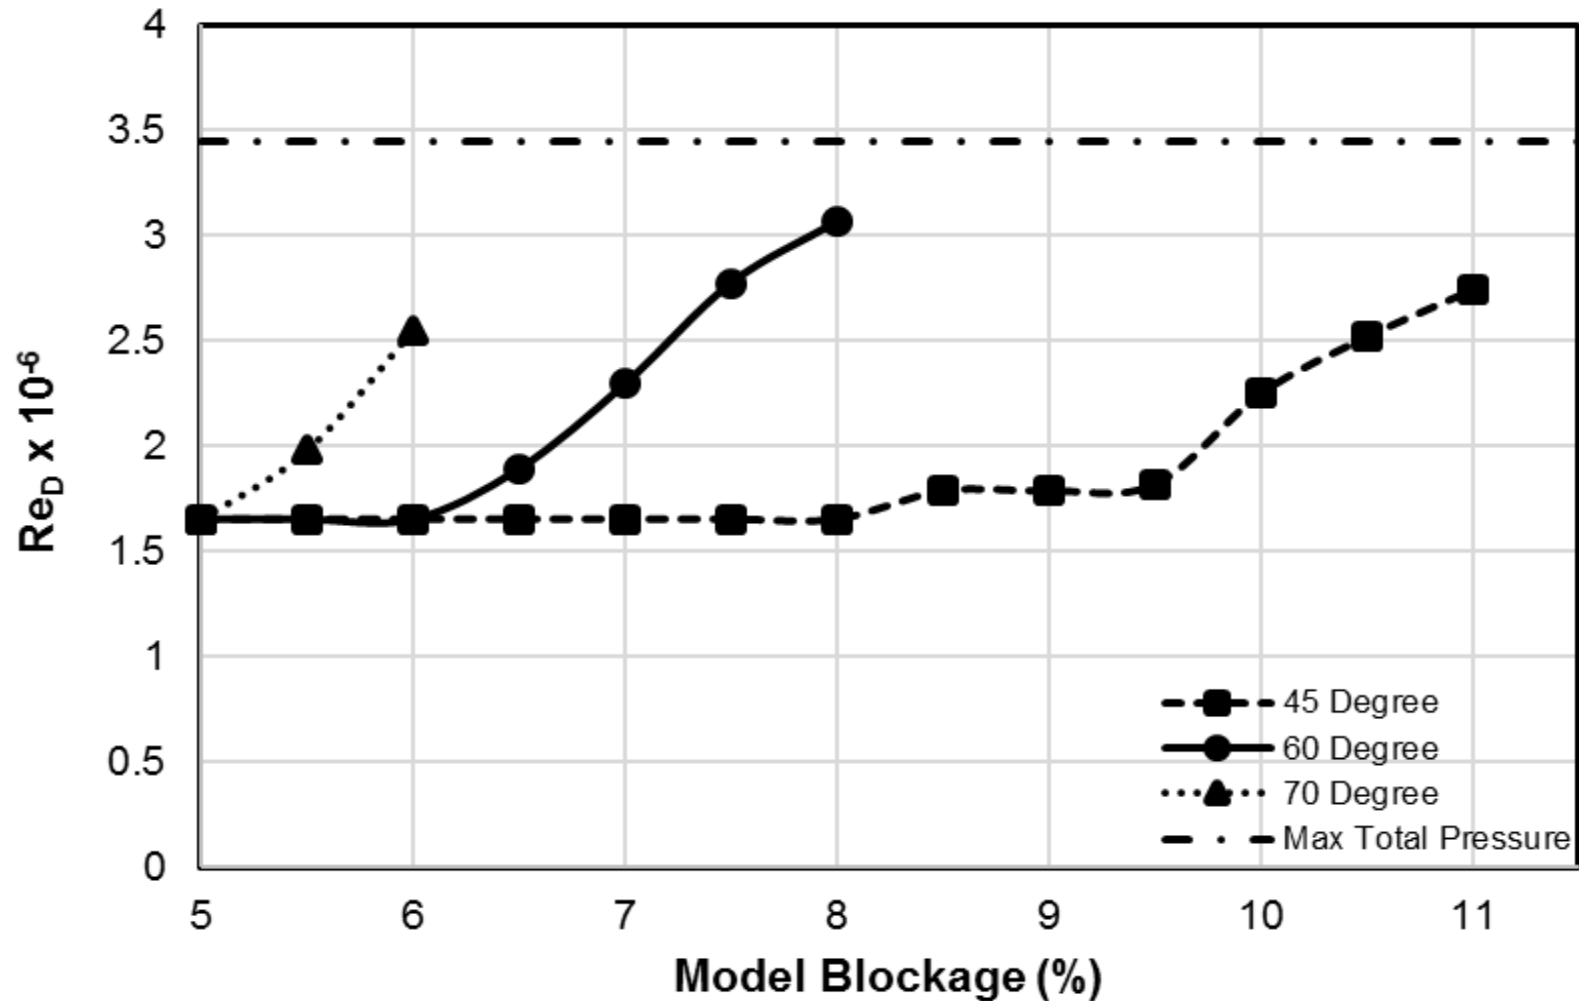




Literature Study Revisited

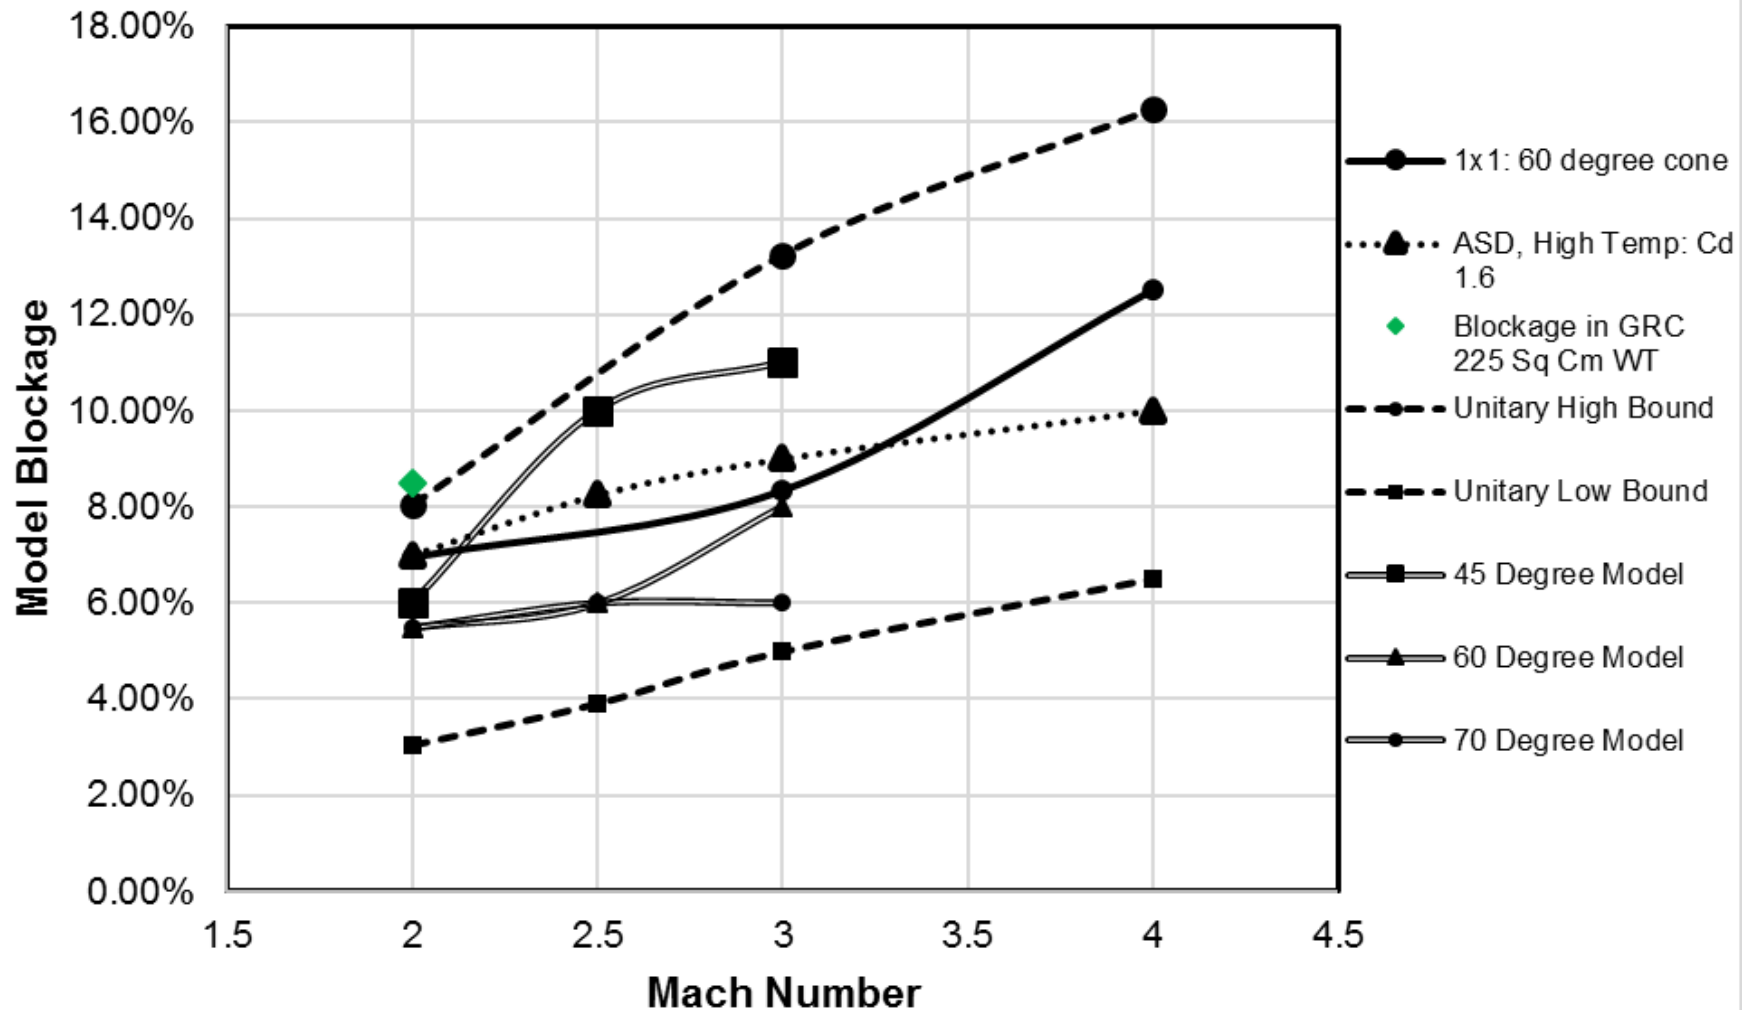



Blockage vs Mach Number

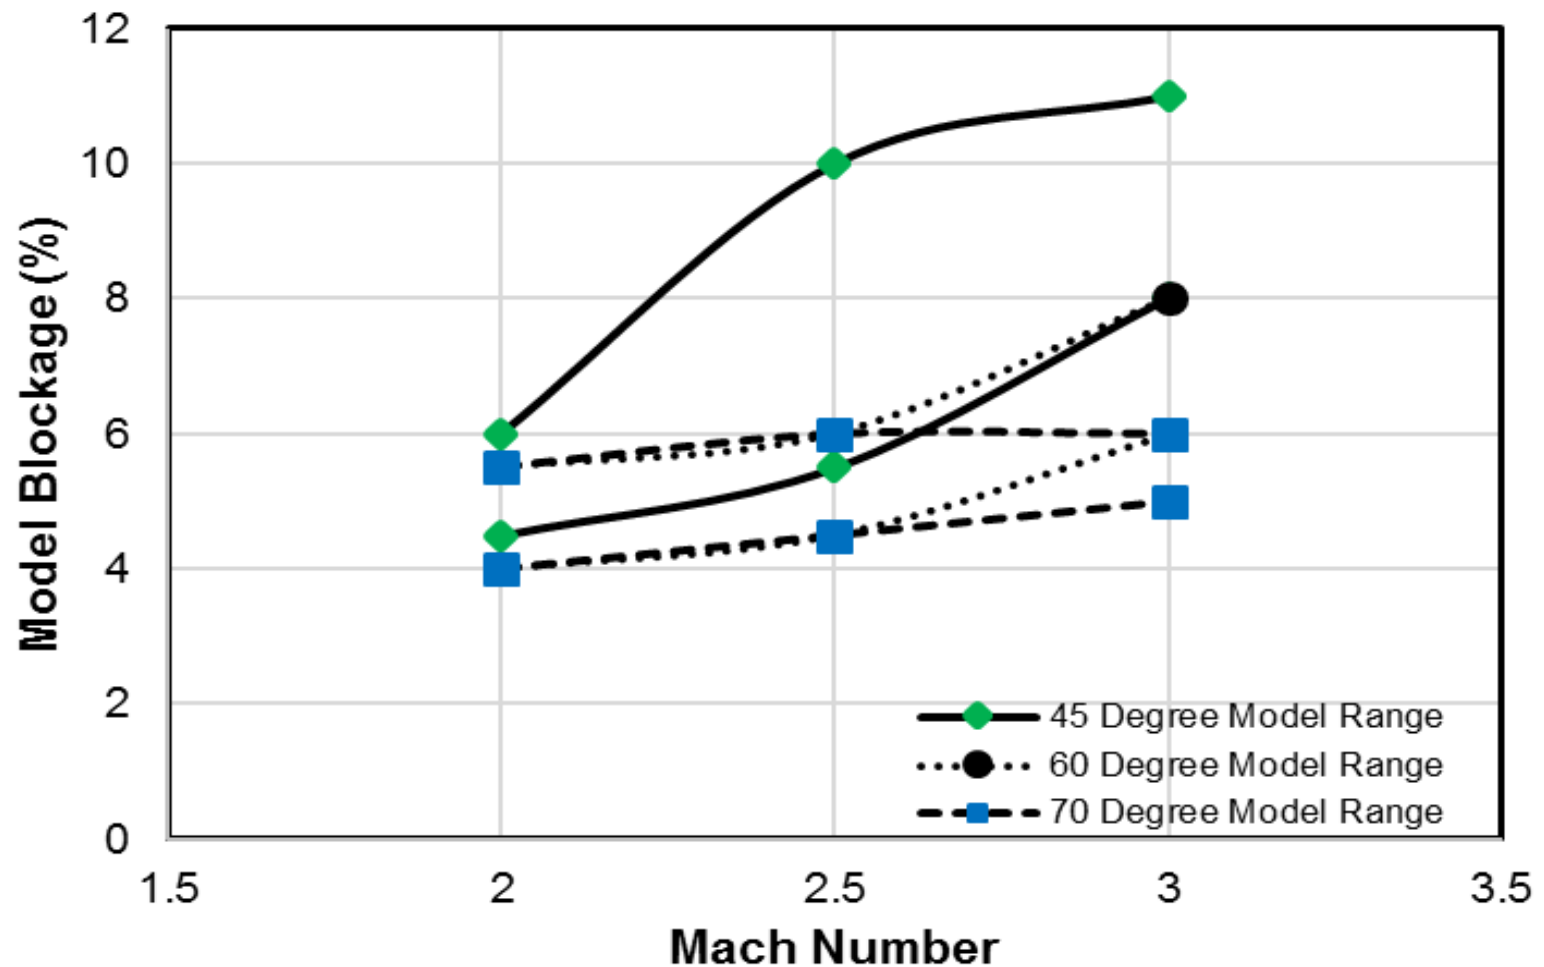



Lowest Re_D Before Unstart For Blockage Testing

Configuration	$Re_D \times 10^6$
Mach 2 Square	.56-.66
Mach 2.5 Axi at 50.8 cm	.68-.75
Mach 2.5 Square	.6-1.14
Mach 3 Square	.68-.81

- Mach 2.5 Axisymmetric at 10.2 cm Re_D couldn't be decreased further since it started at the lowest possible Re_D
- Mach 2.5 Square tested over two days 2 weeks apart which had differing total temperatures from ~10 R
- Re_D can be reduced greatly after tunnel start occurs which indicates starting Re_D will likely not be operating Re_D



Starting Loads Analysis

Test Section	Mach	Cone Angle	Size	kPa	N	
				q	Cd	Fdrag
Square	2	70	5.5%	19.71	1.58	38.53
Square	2	60	5.5%	15.91	1.46	28.75
Square	2	45	6.0%	19.71	1.3	34.59
Square	2.5	70	6.0%	20.18	1.58	43.05
Square	2.5	60	6.0%	16.42	1.46	32.36
Square	2.5	45	10.0%	20.53	1.3	60.05
Axi-50.8cm	2.5	70	6.0%	19.60	1.58	41.80
Axi-50.8cm	2.5	60	6.5%	21.72	1.46	46.37
Axi-50.8cm	2.5	45	6.5%	17.64	1.3	33.53
Axi-10.2cm	2.5	70	9.0%	3.23	1.58	10.34
Axi-10.2cm	2.5	60	9.0%	3.23	1.46	9.55
Axi-10.2cm	2.5	45	10.5%	3.23	1.3	9.92
Square	3	70	6.0%	10.14	1.58	21.63
Square	3	60	8.0%	12.52	1.46	32.91
Square	3	45	11.0%	10.95	1.3	35.24

- Loading calculations approximates bow shock in front of model as normal shock



Steady State Load Analysis

Test Section	Mach	Cone Angle	Size	kPa	N	
				q	Cd	Fdrag
Square	2	70	5.5%	6.477	1.58	12.66
Square	2	60	5.5%	6.477	1.46	11.70
Square	2	45	6.0%	6.477	1.3	11.37
Square	2.5	70	5.5%	4.767	1.58	10.17
Square	2.5	60	5.5%	4.767	1.46	9.40
Square	2.5	45	6.5%	4.767	1.3	13.94
Axi-50.8cm	2.5	70	6.0%	4.767	1.58	10.17
Axi-50.8cm	2.5	60	6.5%	4.767	1.46	10.18
Axi-50.8cm	2.5	45	6.5%	4.767	1.3	9.06
Axi-10.2cm	2.5	70	9.0%	4.767	1.58	15.25
Axi-10.2cm	2.5	60	9.0%	4.767	1.46	14.09
Axi-10.2cm	2.5	45	10.5%	4.767	1.3	14.64
Square	3	70	6.0%	3.679	1.58	7.85
Square	3	60	8.0%	3.679	1.46	9.67
Square	3	45	11.0%	3.679	1.3	11.84

- Steady State Total Pressure Determined to be 48.2 kPa (7 psi) for Mach 2, 62.05 kPa (9 psi) for Mach 2.5, and 82.74 kPa (12 psi) for Mach 3



Conclusions

- 1) Provided blockage chart that can be used for approximate sizing of test models and magnetic suspension system during design
- 2) Determined it is advantageous to test near nozzle to reduce boundary layer blockage and increase allowable model blockage
- 3) Determined axisymmetric test section has less significant boundary layer blockage compared with square test section
- 4) Proved it was possible to significantly decrease total pressure after start occurred which will lower performance requirements for the magnetic suspension system



Thanks to:

- Mark Schoenenberger (LaRC)
- David Davis (GRC)
- Paul Barnhart (Case Western)
- NASA Science Technology Research Fellowship