



Unmanned Aircraft System Traffic Management (UTM):

Defining the future of the drone industry

NEXTGEN

Dr. Marcus Johnson

FAA Small UAS forecast – 7M total, 2.6M commercial by 2020

Vehicles are automated and airspace integration is necessary

New entrants desire access and flexibility for operations

Current users want to ensure safety and continued access

Regulators need a way to put safety structures in airspace

Operational concept being developed to address beyond-visual-line-of-sight (BVLOS) UAS operations at low altitude in uncontrolled airspace using UTM construct



Challenges with Expanding Operations



Visual Line of Sight

14 CFR Part 101(e) [Hobbyists]
14 CFR Part 107 [Commercial]



No Operations over People
Daylight Only
Up to 400 ft AGL
Operation in controlled
airspace allowed



Beyond Visual Line of Sight

Operations Near Airports



Separation



Weather

Command and Control



Awareness



Aircraft Performance

Operations over People

Tracking and UAS Identification





What is UAS Traffic Management? _____

UTM is an “air traffic management” ecosystem for uncontrolled airspace


UTM utilizes industry’s ability to supply services under FAA’s regulatory authority where these services do not exist

UTM development will ultimately identify services, roles/responsibilities, information architecture, data exchange protocols, software functions, infrastructure, and performance requirements to enable the management of low-altitude uncontrolled UAS operations

UTM addresses critical gaps associated with lack of support for UAS operations in uncontrolled airspace

UTM Architecture

v2017.08.31

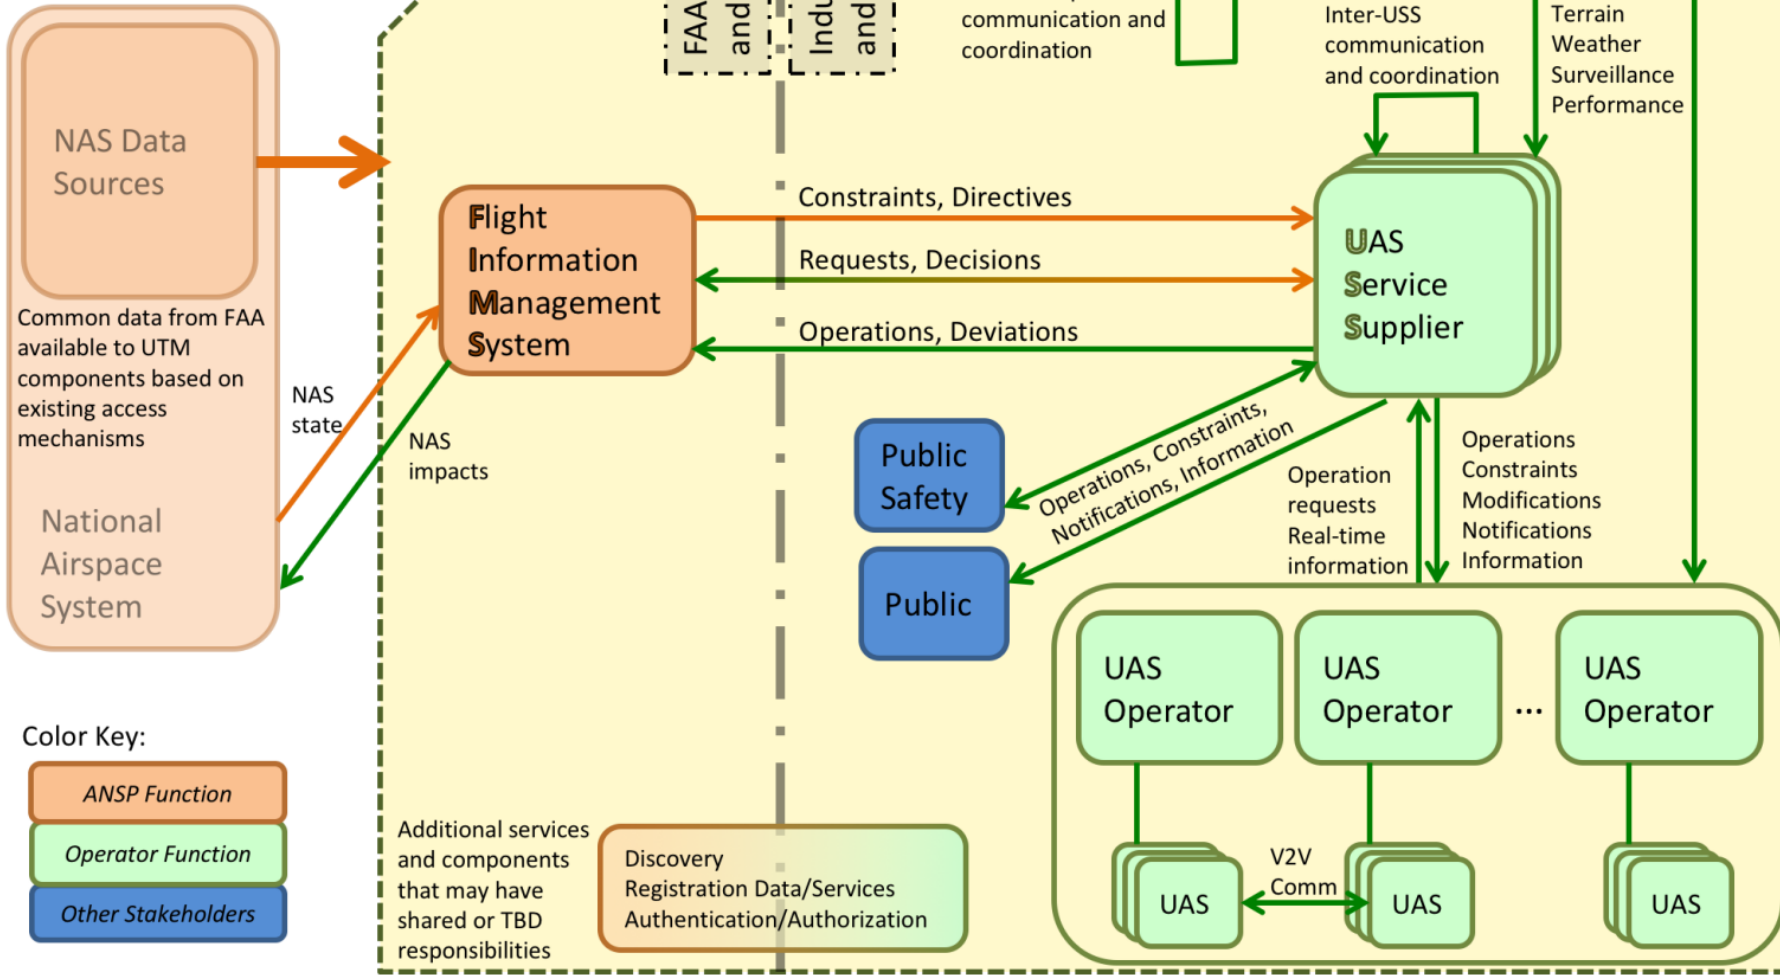

Flight Information Management System

- Enables airspace controls
- Facilitates requests
- Supports response in emergencies impacting NAS

UAS Service Supplier


- Federated Structure
- Cloud-based system
- Automated System
- Supports UAS with services (e.g. separation, weather, flight planning, contingency management,, etc.)

Supplemental Data Service Provider

- Supplies supplemental data to USS and UAS Operator to support operations

UAS / UAS Operator

- Individual Operator
- Fleet Management
- On-board capabilities to support safe operations



Principles

- Only authenticated UAS operations allowed
- UAS stay clear of each other
- UAS and manned aircraft stay clear of each other
- UAS operator has awareness of airspace and other constraints
- Public safety UAS have priority over other UAS

Key UAS-related services

- Authorization/Authentication
- Airspace configuration and static and dynamic geo-fence definitions
- Track and locate
- Communications and control (spectrum)
- Weather and wind prediction and sensing
- Conflict avoidance (e.g., airspace notification)
- Demand/capacity management
- Large-scale contingency management (e.g., GPS or cell outage)

Technical Capability Level (TCL) Progression



TCL1: *multiple VLOS*

- Networked Operations
- Info sharing

TCL2: *multiple BVLOS, rural*


- Initial BVLOS
- Intent sharing
- Separation by geo-fencing

TCL3: *multiple BVLOS, near airports, suburban*

- Routine BVLOS
- Detect and Avoid (DAA) / Vehicle to Vehicle (V2V)
- Avoid static obstacles

TCL4: *complex urban BVLOS*

- BVLOS to doorstep
- Track and locate
- Avoiding dynamic obstacles
- Large scale contingencies



Technical Capability Level 2 Flight Test

Evaluate the feasibility of multiple BVLOS operations using a UTM research platform

Flight Test Overview

Operational Area



Reno-Stead Airport

UAS Range

Elevation: 5050 feet


Desert Terrain

Missions up to 500 ft

Operations at 5 Locations



SRHawk Radar




Weather Equipment




LSTAR Radar

Nevada UAS Test Range

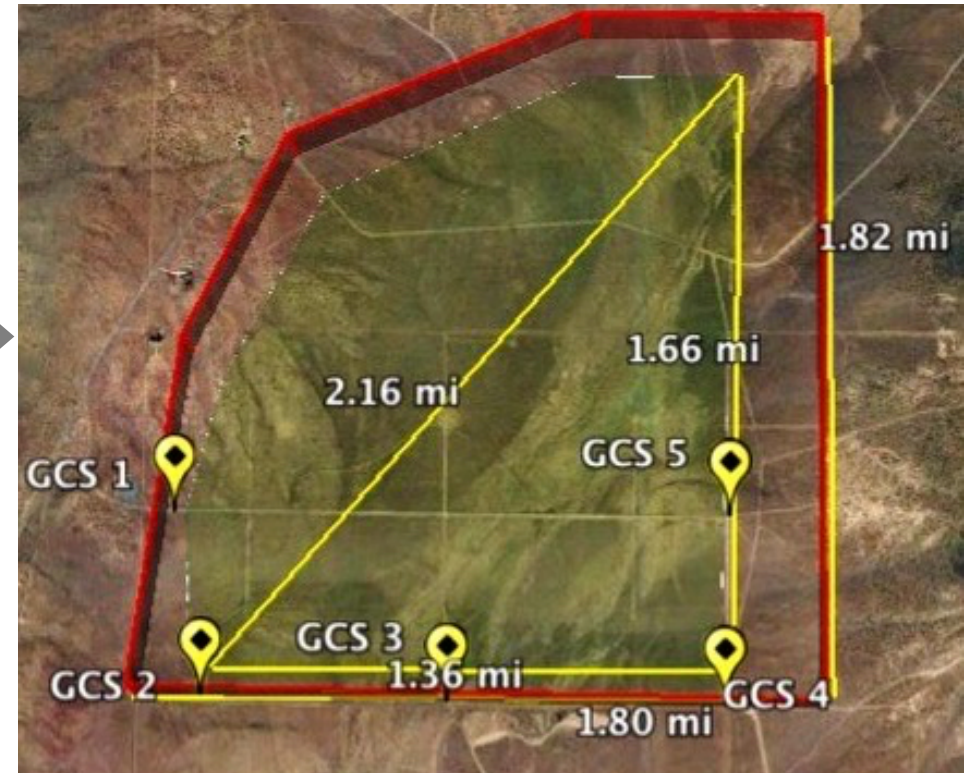


October 2016

TCL 2 UTM Functionality

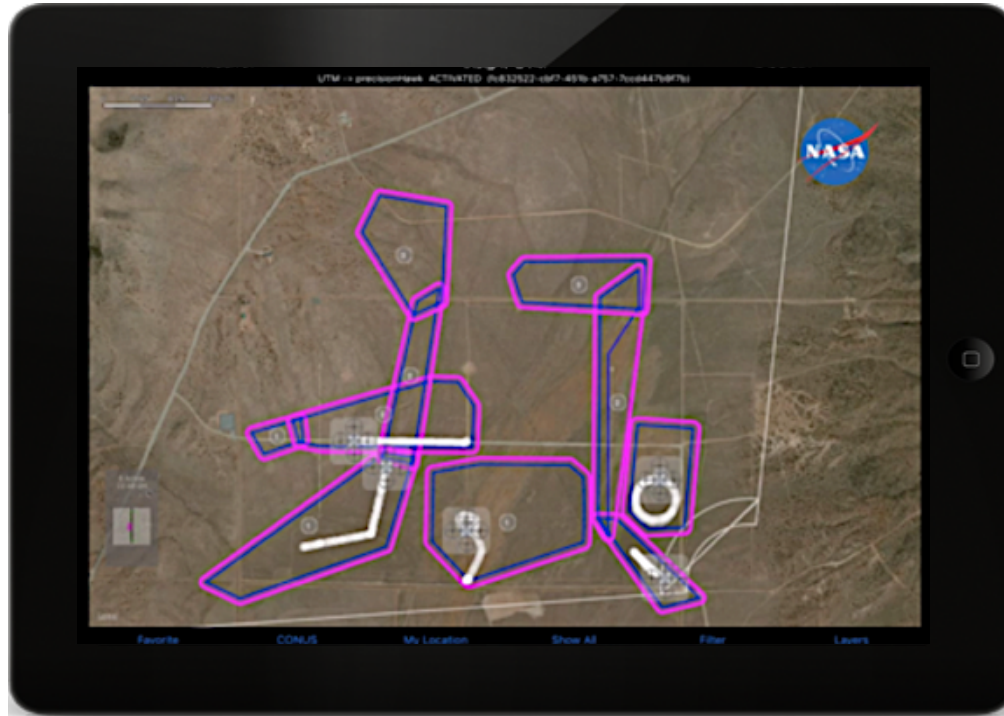

UTM Mobile Application

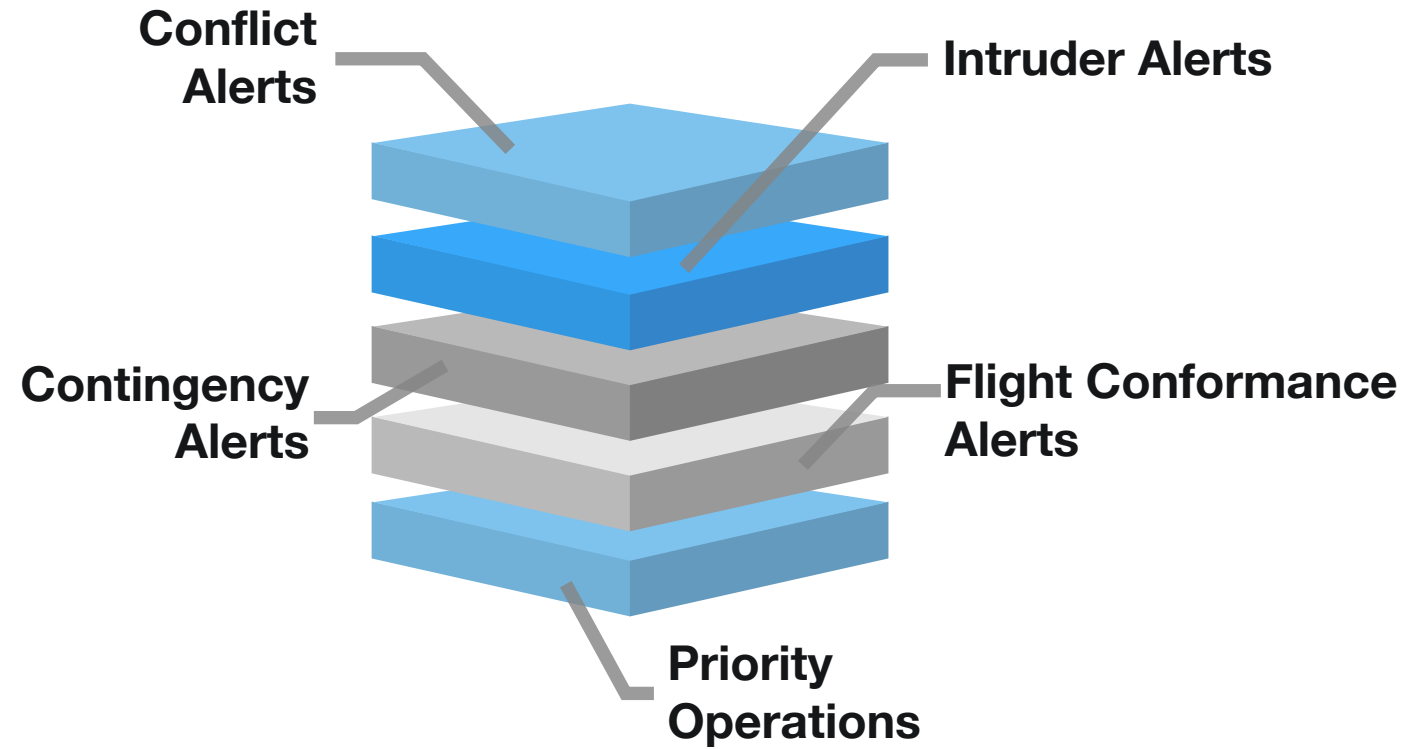

Scheduling and Planning, Tracking, and Contingency Management

Flight Test Highlights




Situation Awareness Displays

Critical alerts, operational plan information and map displays



Live-Virtual Constructive Environment



BVLOS



Visual Line of Sight



Simultaneous Operations





Flights




UAS Vehicles



Partnerships

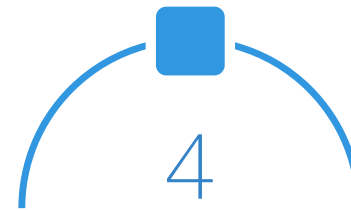

Scenarios






TCL 2 Flight Test Lessons Learned

Inconsistent Altitude Reporting

Increased risk of controlled flight into terrain and airborne collision hazard

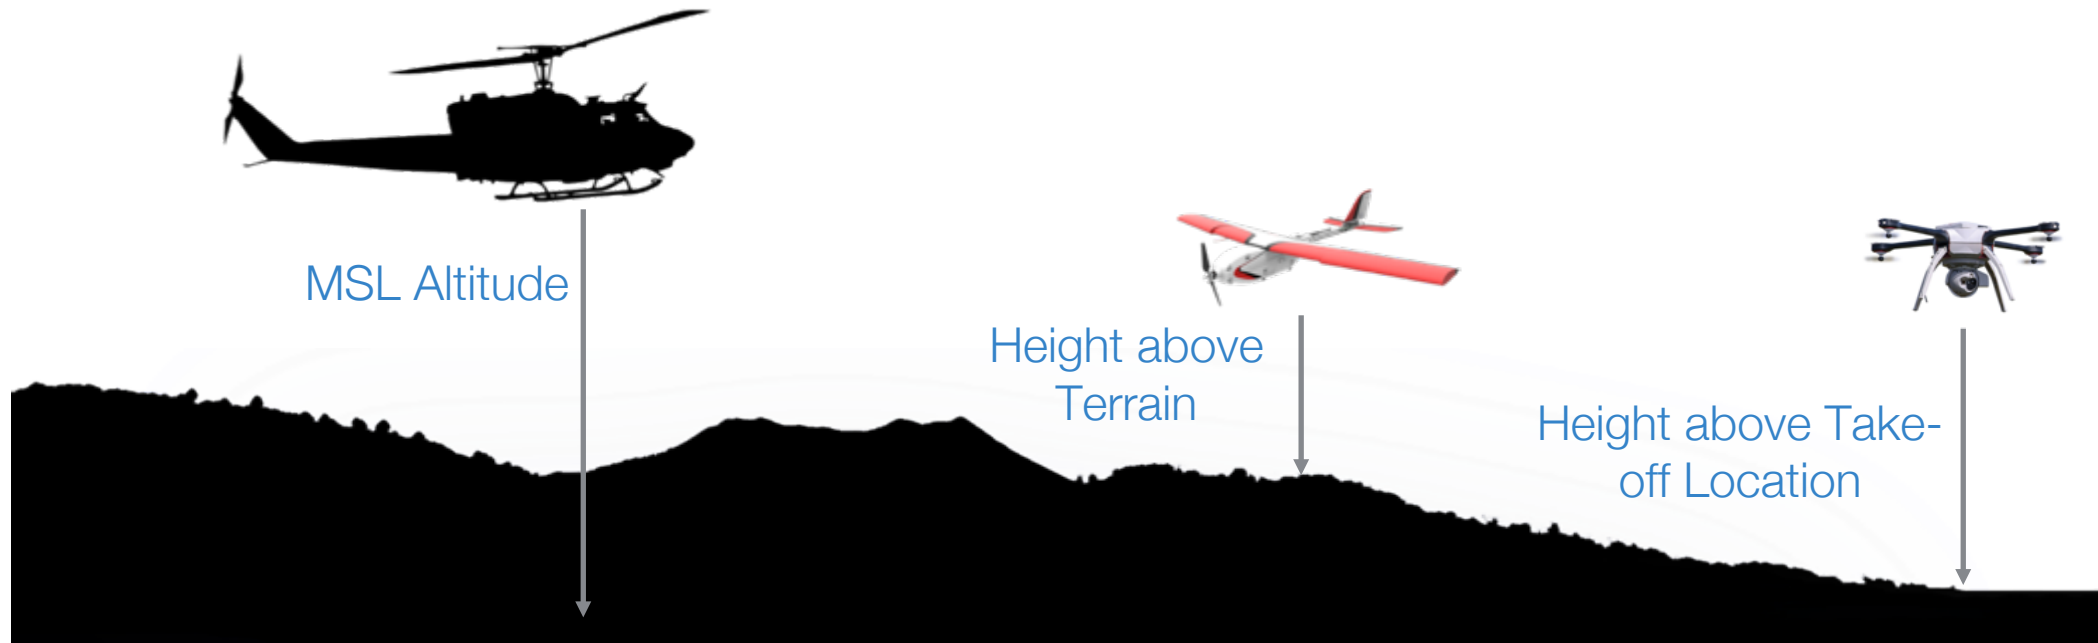

Altitude reporting should be consistent or translatable across airspace users

Weather Impact on UAS



Nominal Aircraft Endurance

Multi-Rotors: 20-40 minutes

Fixed-Wing: 45-200+ minutes

Reno-Stead Elevation: 5,050 ft





Cool Temperatures

Density Altitude: 4,000 ft

Winds: 5-35 knots

Aircraft encountered **thermals**, **microbursts** and **high winds** which resulted in **reduced endurance** and degraded flight plan conformance

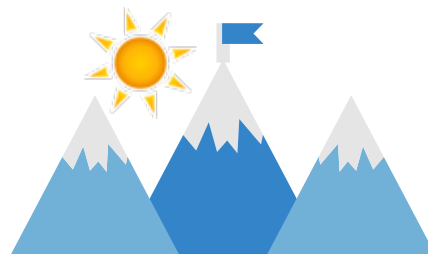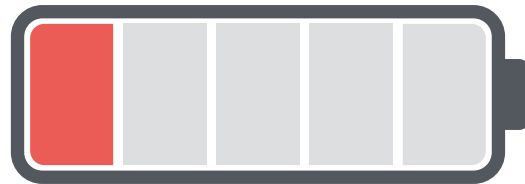

Warm Temperatures

Density Altitude: 9,000+ ft

Winds: 5-15 knots

Aircraft experienced substantially **shorter endurance**

UAS should be tested and rated against different operational environments

Recommendations for BVLOS Operations

- 1 Operators should **display airspace information** and have access to other operator's operational intent and contingency actions in off-nominal conditions



- 2 **Altitude reporting** should be **standardized** and consistent/translatable to current airspace users

- 3 In the absence of acceptable weather products, **atmospheric conditions** should be **self-reported from GCS and UAS**



- 4 Initial BVLOS should **avoid altitude stratification**, until improved position sharing (e.g. V2V) and weather products

- 5 **Flight trajectories** should be **contained within geo-fence boundaries** that are shared with the UTM research platform **to support separation**






TCL 2 National Campaign

May 15th – June 9th 2017

- ❑ ~40 partners total across 6 testing locations
- ❑ 6 USS Implementers (Amazon Prime Air, Google Project Wing, Airmap, Simulyze, ANRA, NASA)
- ❑ NASA USS and FIMS run in the cloud
- ❑ Data feeds monitored in UTM lab and at each location
- ❑ Multiple Media days

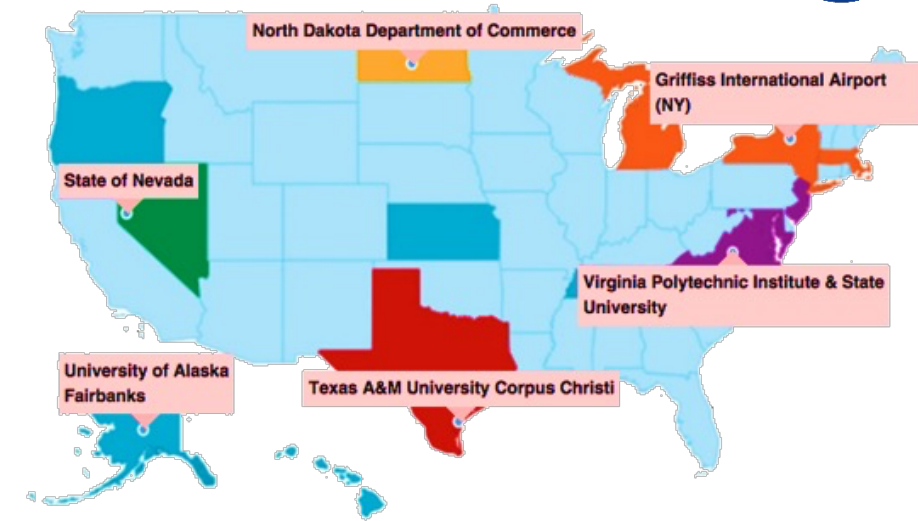


Test Sites	USS Technology	Geofence Technology	Ground-based Sense & Avoid	Airborne Sense & Avoid	Communication, Navigation, Surveillance	Human Factors
Alaska	✓	✓	✓	✓	✓	✓
Nevada	✓	✓	✓	✓	✓	✓
New York		✓			✓	
North Dakota	✓	✓	✓		✓	✓
Texas				✓		
Virginia	✓		✓	✓		✓




Multiple BVLOS operations near airports
and suburban areas (TCL 3)

Operations over populated areas

Operations near airports

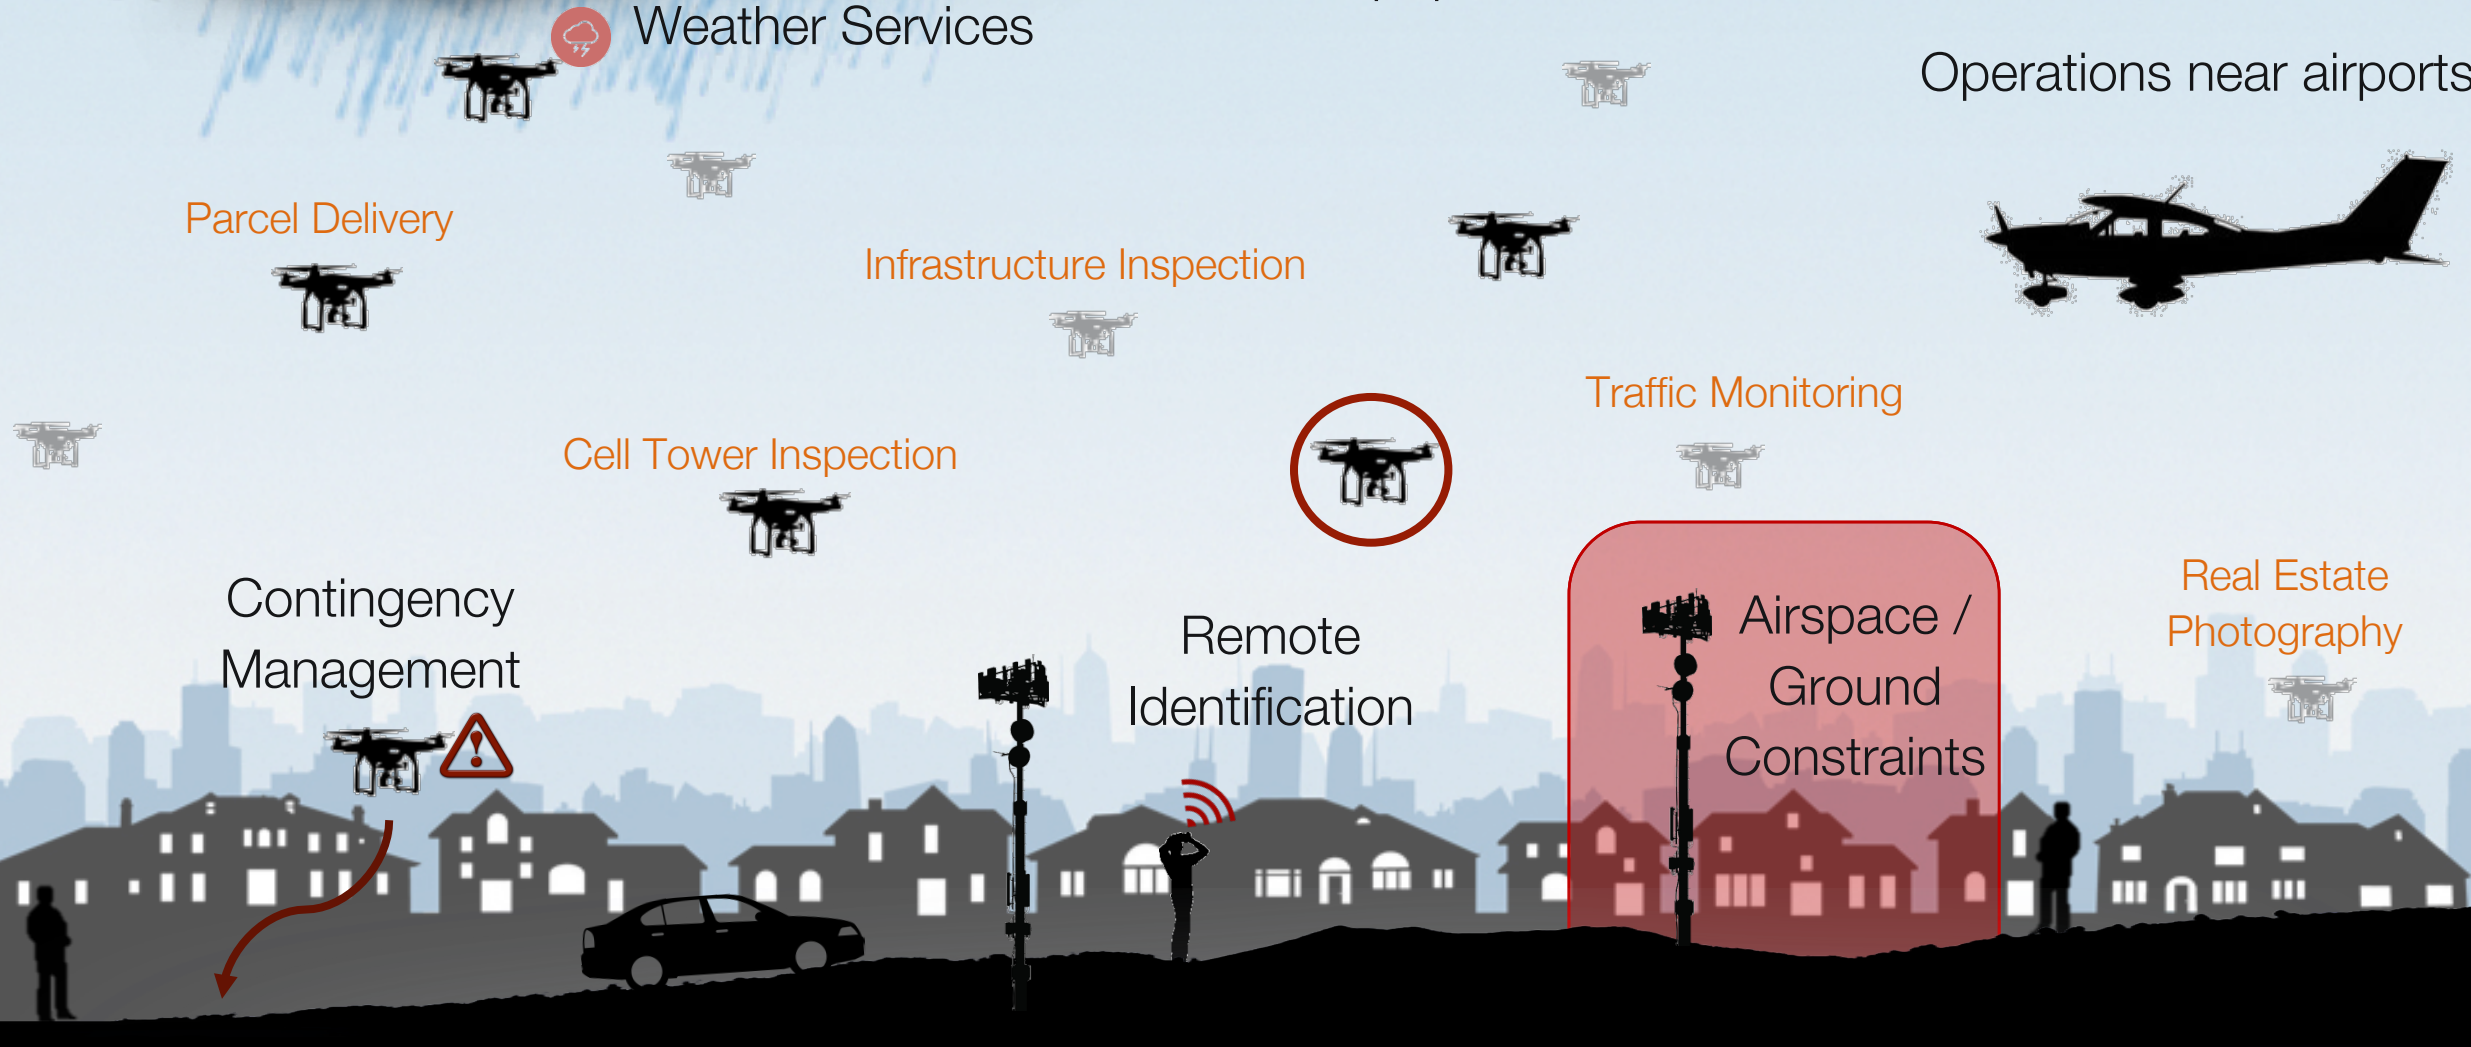

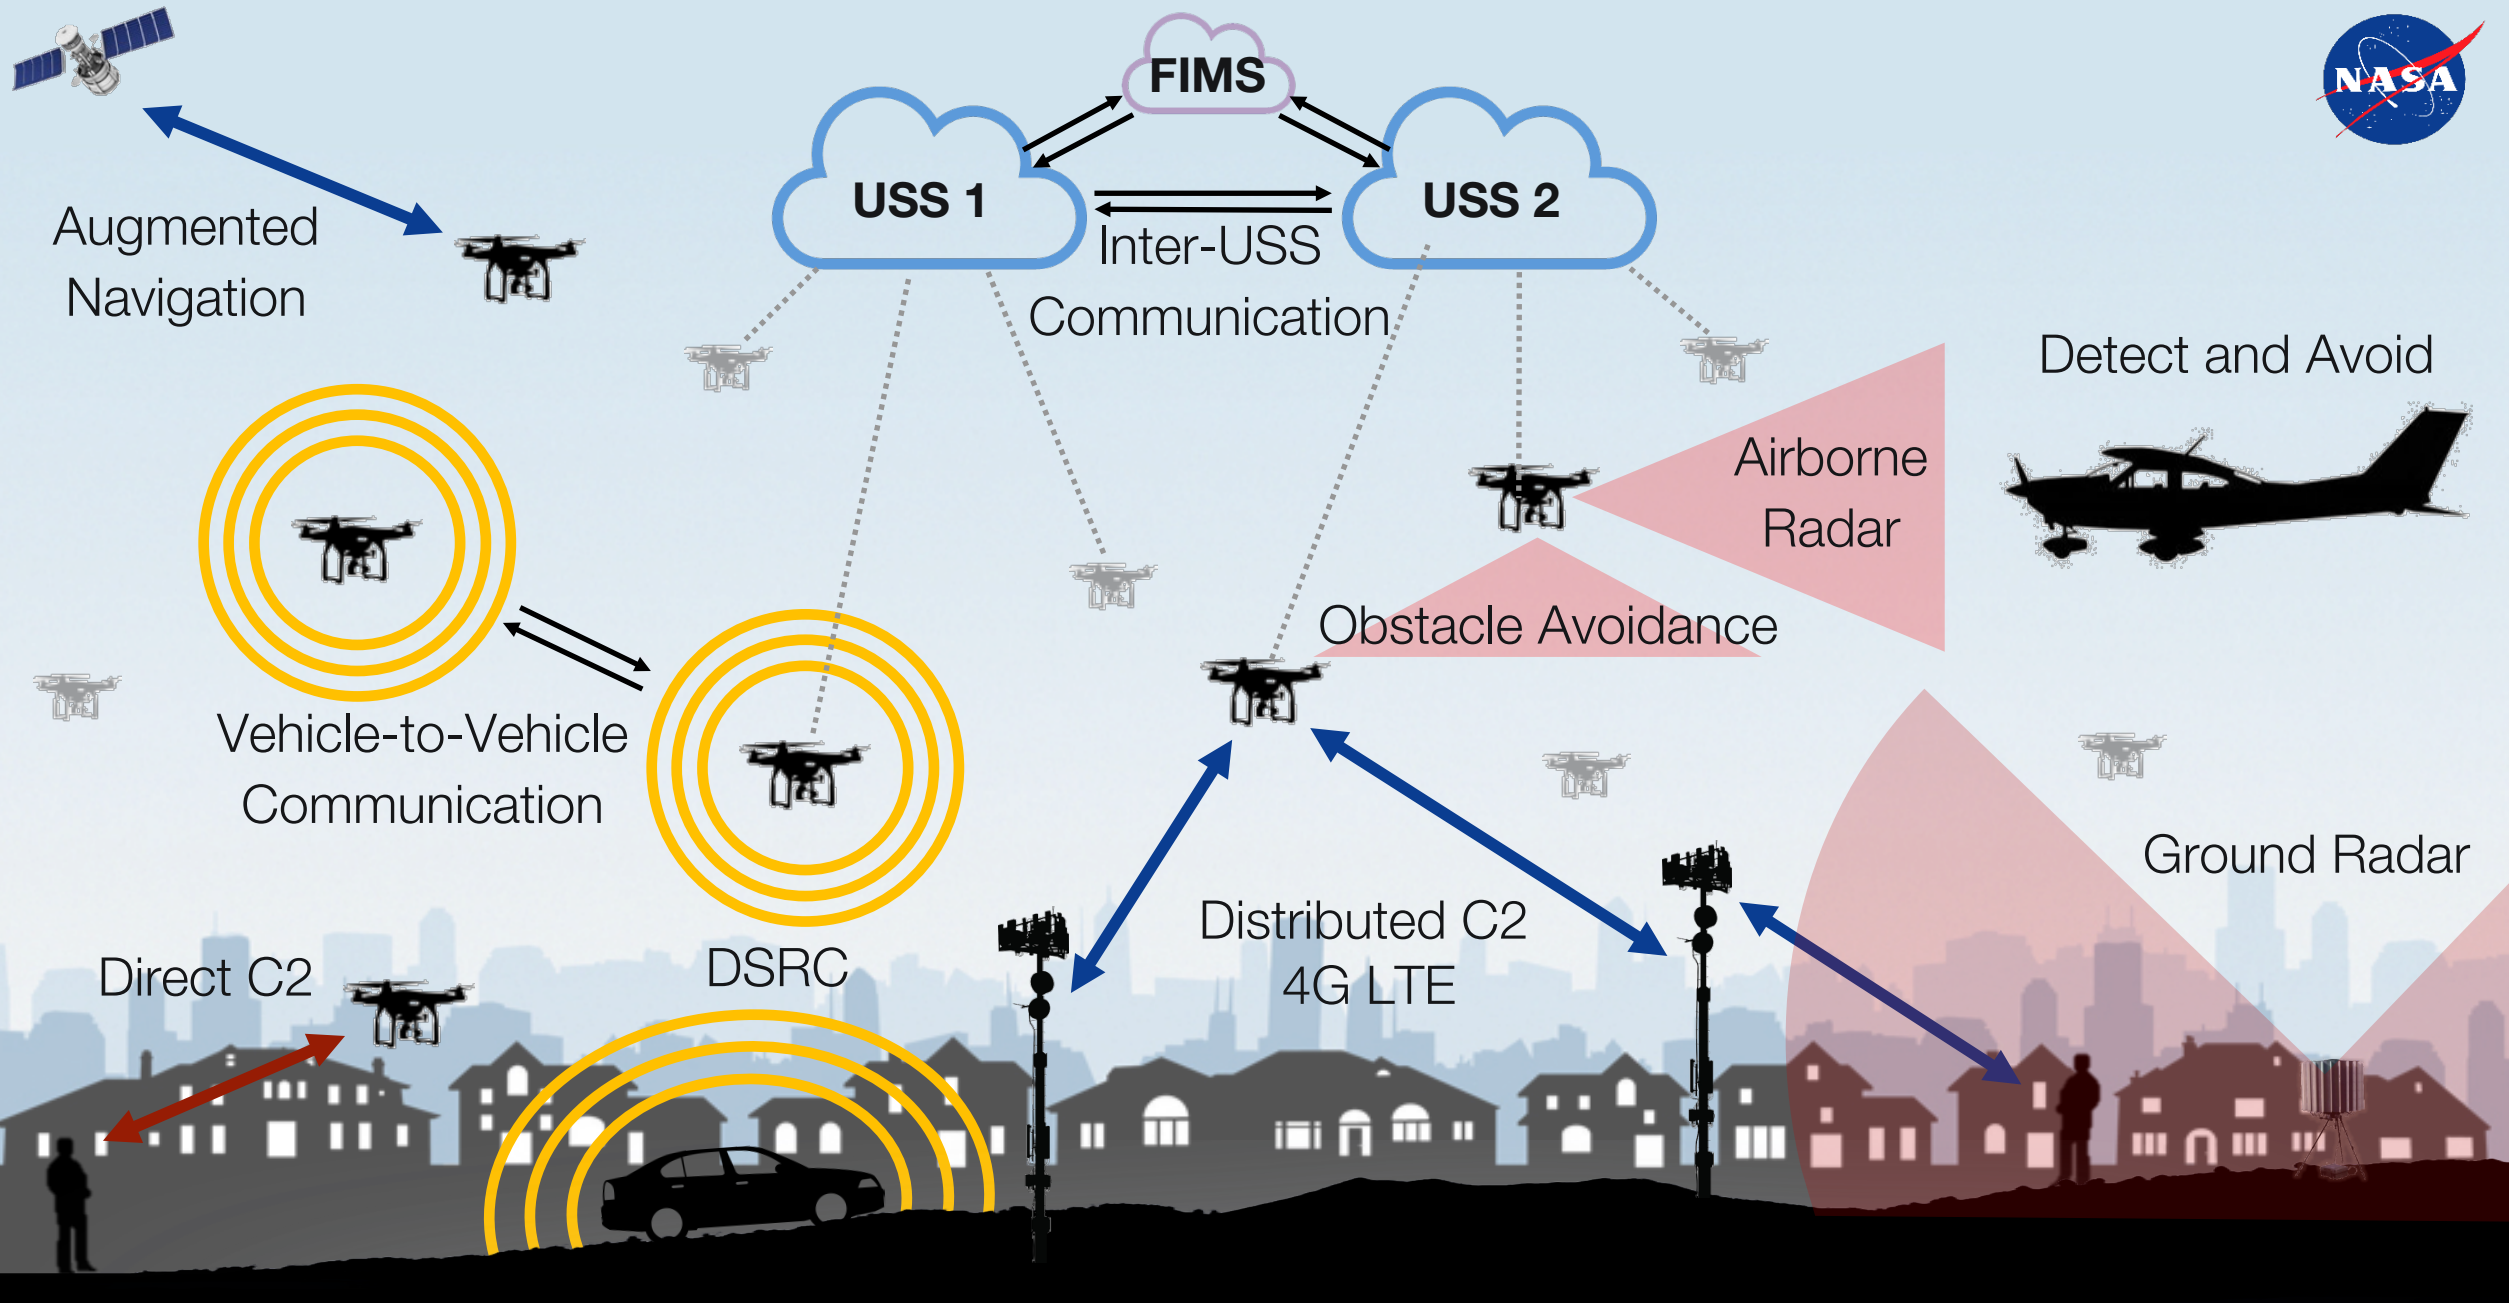




Summary

UAS Traffic Management is an automated cloud-based “air traffic management” ecosystem for uncontrolled airspace where services do not exist

TCL 2 Demonstration and TCL 2 National Campaign successfully showed the feasibility of supporting multiple BVLOS operations in a rural environment, engaged industry to contribute to the development of UTM and highlighted areas of future research

Next Steps will evaluate the effectiveness and interoperability of technologies to support separation, communication, navigation, data-exchange, and airspace management in more complex operational environments (suburban and urban)



Thank You