



# A Consistent EPIC Visible Channel Calibration using VIIRS and MODIS as a Reference



C. O. Haney<sup>1</sup>, D. R. Doelling<sup>2</sup>, P. Minnis<sup>1</sup>, R. Bhatt<sup>1</sup>, B. R. Scarino<sup>1</sup>, A. Gopalan<sup>1</sup>

<sup>1</sup>Science Systems & Applications, Inc.  
Hampton, VA

<sup>2</sup>NASA Langley Research Center  
Hampton, VA

## Introduction

- EPIC onboard the DSCOVR satellite at L1 lacks onboard calibration
- Filter wheels radiometrically calibrated against the moon to monitor stability
- EPIC's constant view of the sunlit-disk of Earth provides unique opportunity for inter-calibration of EPIC channels using well-calibrated instruments on low Earth orbit (LEO) satellites
- Inter-calibration is performed by ray-matching with MODIS on Aqua satellite and VIIRS on NPP-Suomi
- EPIC bands 1-4 are in the ultraviolet wavelengths and have no MODIS/VIIRS channel counterparts, and therefore are not considered here


## Data

- EPIC L1B, bands 5-10
- Version 02 is used for most of this study
- Version 01 is briefly used for navigation analysis
- Aqua-MODIS Collection 6 L1B
- ~Nominal 1-km resolution subsampled to 2-km
- NPP-VIIRS Land PEATE L1B version 001
- ~M-bands at 750-m resolution
- ~I-bands nominally at 350-m but subsampled to 750-m


EPIC Band ID	λ (nm)	MODIS Band ID	λ (nm)	VIIRS Band ID	λ (nm)
E5	443	B1	645	M3	488
E6	551	B2	865	M4	555
E7	680	B3	470	M5	672
E8	688	B4	555	I1	640
E9	764			M7	865
E10	780				

Table listing the different band and wavelengths used among the different instruments in this analysis

## EPIC Navigation Correction using MODIS or VIIRS Imagers

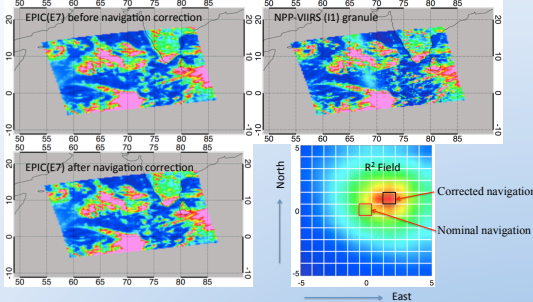


- Spatially average the EPIC (E7) and VIIRS (I1) imager pixels into 0.25° x 0.25° latitude by longitude grid for images within 15 minutes
- Linearly regress the corresponding grid location and compute R<sup>2</sup>
- Shift the EPIC grid ±5 gridded regions in both the latitude and longitude directions to find the highest R<sup>2</sup>

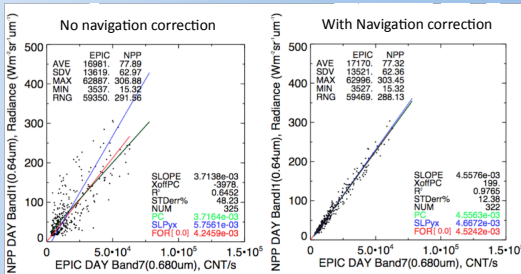

MODIS/VIIRS-based navigation correction improves the navigation dramatically


## Version 01 to 02: Navigation Improvement

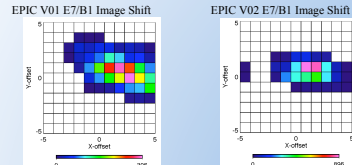


Total EPIC image shifts from navigation correction for E7/B1 matching up through June 2016, using EPIC version 01 (LEFT) and version 02 (RIGHT)

- Image shift analysis indicates that navigation could still be improved, although in V02 it does appear more consistent than in V01
- The most common shift seems to be +1 East and +1 North, with +2E/+1N also in high frequency
- All other channel channel pairings show similar shift frequency
- Shifts using both MODIS and VIIRS show similar results

## Spectral Band Adjustment Factor (SBAF)

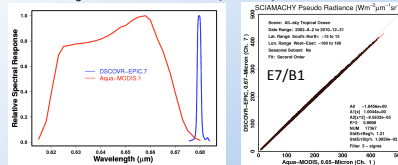


- Spectral band differences must be taken into account when inter-calibrating EPIC with MODIS/VIIRS bands
- Use SCIAMACHY hyper-spectral footprint convolved with spectral response function pseudo radiance pairs and apply a 2<sup>nd</sup> order fit to estimate the SBAF over the all-sky ocean domain
- The 2<sup>nd</sup> order fit allows the SBAF to be a function of scene type, dark radiances will differ from bright radiances

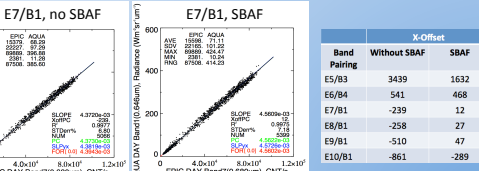


- All-sky tropical ocean (ATO) gridded (0.5° x 0.5°) ray-matching, linearly regresses the E7/B1 radiance pairs over tropical oceans
- The SBAF correction brings the offset of the linear regression closer to zero
- SBAFs are available on the NASA LaRC SBAF Webtool (<https://satcorps.larc.nasa.gov/sbaf>)

## Version 01 to 02: Stray-light Improvement

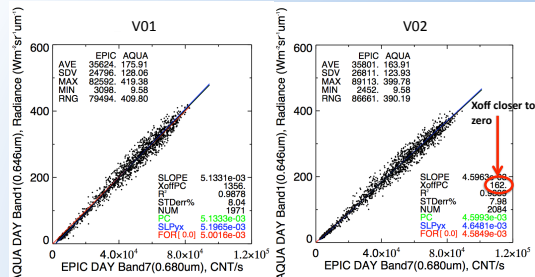

- Stray-light correction implemented in V02 has improved the regression by reducing the radiance of the clear-sky points and moving them closer to the zero offset

## Comparison of ATO and DCC Ray-matched Calibration

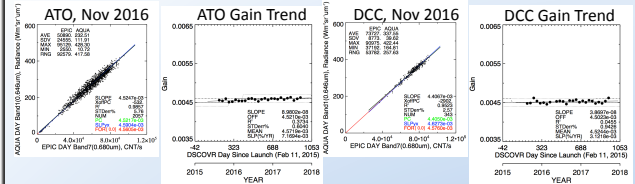

- All-sky tropical ocean (ATO) gridded (0.5° x 0.5°) ray-matching, linearly regressed E7/B1 radiance pairs over tropical oceans
- Deep convective cloud (DCC) (0.25° x 0.25°) ray-matching, linearly regressed E7/B1 radiance pairs that have BT < 220K
- The DCC and ATO have their own unique SBAFs

EPIC/MODIS	DCC			ATO			Gain DCC/ATO (%)
	Mean Gain	σ (%)	Trend %/yr	Mean Gain	σ (%)	Trend %/yr	
E5/B3	5.126e-3	0.8	+0.006	5.128e-3	0.4	+0.008	-0.04
E6/B4	3.947e-3	0.9	+0.005	3.965e-3	0.5	+0.007	-0.5
E7/B1	4.524e-3	0.9	+0.003	4.572e-3	0.6	+0.007	-1.0
*E8/B1	1.083e-3	1.1	+0.007	1.125e-2	2.5	+0.009	-3.7
*E9/B1	1.067e-3	1.9	+0.007	1.082e-2	4.5	+0.014	-1.4
E10/B1	5.245e-3	1.2	+0.003	5.280e-3	1.0	+0.006	-0.7

EPIC/VIIRS	DCC			ATO			Gain DCC/ATO (%)
	Mean Gain	σ (%)	Trend %/yr	Mean Gain	σ (%)	Trend %/yr	
E5/M3	5.284e-3	0.8	+0.007	5.264e-3	0.5	+0.006	+0.4
E6/M4	4.108e-3	0.9	+0.006	4.104e-3	0.5	+0.007	+0.1
E7/I1	4.607e-3	1.0	+0.004	4.615e-3	0.7	+0.005	-0.2
E7/M5	4.667e-3	1.0	+0.003	4.684e-3	0.7	+0.004	-0.4
*E8/I1	1.082e-2	1.2	+0.004	1.126e-2	2.3	+0.004	-3.9
*E8/M1	1.095e-2	1.2	+0.003	1.143e-2	2.4	+0.003	-4.2
*E9/I1	1.042e-2	2.2	+0.003	1.089e-2	3.8	+0.008	-4.3
*E9/M5	1.056e-2	2.2	+0.002	1.107e-2	4.0	+0.007	-4.6
*E9/M7	1.034e-2	2.2	+0.002	1.071e-2	4.2	+0.005	-3.5
E10/I1	5.332e-3	1.1	+0.002	5.325e-3	1.1	+0.005	+0.1
E10/M5	5.404e-3	1.1	+0.002	5.404e-3	1.0	+0.005	0.0
E10/M7	5.338e-3	1.1	+0.002	5.342e-3	0.9	+0.003	-0.1

\* Visible absorption bands

- The DCC and ATO temporal trends for all non-absorption band pairings are very similar, with their mean gains within 1%
- Gains derived from MODIS and from VIIRS will be slightly different due to differences in absolute calibration
- All bands appear to be very stable, with the largest degradation only being 0.014%/year.
- The absorption in bands E8 and E9 make them more difficult to calibrate, and therefore further study is required for confidence in the results for those bands

## Conclusions

- EPIC Version 02 shows navigation improvement over version 01, but still could be further improved
- SBAF accounts for spectral differences and brings the x-offsets closer to zero
- The stray-light improvements in V02 also bring the x-offsets closer to zero
- ATO an DCC temporal trends for non-absorption band pairings are within 1% of each other
- All bands appear to be very stable, which is expected since the distance between Earth and DSCOVR is so vast

## References

• Doelling, D. R., A. Wu, X. Xiong, B. R. Scarino, R. Bhatt, C. O. Haney, D. Minnis, and A. Gopalan, 2015, "The radiometric stability and scaling of collection 6 Terra and Aqua-MODIS VIS, NIR, and SWIR spectral bands," *IEEE Trans. Geosci. Remote Sens.*, Vol. 53, No. 8, 4528-4535. DOI: 10.1109/TGRS.2015.2409929.

• Bhatt, R. D., D. Doelling, A. Wu, X. Xiong, B. R. Scarino, C. O. Haney, and A. Gopalan, 2014, "Total Stability Assessment of S-NPP VIIRS Reflective Solar Band Calibration using Invariant Desert and Deep Convective Cloud Targets," *Remote Sens.*, 2014, 6, 2809-2826. doi:10.3390/rs6042809.

• Minnis, P. L., Nguyen, D. R., Doelling, D. F., Young, and W. Miller, 2002, "Empirical Calibration of Operational and Research Meteorological Satellite Imagers. Part I: Evaluation of Research Satellite Visible Channels as References," *J. Atmos. Oceanic Technol.*, 19, 1213-1249.

• Minnis, P. L., D. R. Doelling, R. Bhatt, and B. Scarino, 2011, "The CERES calibration strategy of the geostationary visible-channel of CERES cloud and flux products," *Proc. of SPIE, Earth Observing Syst. XVI*, 815316.

• Doelling, D. R., C. O. Haney, B. R. Scarino, A. Gopalan, and R. Bhatt, 2016, "Improvements to the geostationary imager ray-matching calibration algorithm for CERES Edition 4," *IPY: J. Atmos. Oceanic Technol.*, June 2016.

• Doelling, D. R., R. Bhatt, D. Minnis, 2011, "Algorithm Theoretical Basis Document (ATBD) for ray-matching technique of calibrating GEO Sensors with Aqua-MODIS Via GMSX," <https://nasa.gov/epic/atbd>.

• Scarino, B. R., D. R. Doelling, P. Minnis, A. Gopalan, T. Choe, R. Bhatt, C. Lakshmi, and C. O. Haney, 2014, "A web-based tool for calculating spectral band difference adjustment factors derived from SCIAMACHY hyper-spectral data," *IEEE Trans. Geosci. Remote Sens.*, vol. 54, no. 5, pp. 2525-2542.

• Doelling, D. R., D. Minnis, B. Scarino, R. Bhatt, and A. Gopalan, 2013, "The Characterization of Deep Convective Clouds as an Invariant Calibration Target and as a Visible Calibration Technique," *IEEE Trans. Geosci. Remote Sens.*, 51, 1147-1159. doi:10.1109/TGRS.2012.2226066.