


NASA/TP-2015-218751



**NDARC**

**NASA Design and Analysis of Rotorcraft**

**Input**

Appendix 6  
Release 1.12  
August 2017

*Wayne Johnson*  
*NASA Ames Research Center, Moffett Field, CA*

---

**August 2017**

## The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the Lead Center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.
- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.

- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.


- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized databases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to [help@sti.nasa.gov](mailto:help@sti.nasa.gov)
- Fax your question to the NASA Access Help Desk at (301) 621-0134
- Telephone the NASA Access Help Desk at (301) 621-0390
- Write to:  
NASA Access Help Desk  
NASA Center for AeroSpace Information  
7115 Standard Drive  
Hanover, MD 21076-1320

**NASA/TP-2015-218751**



**NDARC**

**NASA Design and Analysis of Rotorcraft**

**Input**

*Wayne Johnson  
NASA Ames Research Center, Moffett Field, CA*

National Aeronautics and  
Space Administration

Ames Research Center  
Moffett Field, California 94035-1000

---

**August 2017**

Available from:

NASA Center for AeroSpace Information  
7115 Standard Drive  
Hanover, MD 21076-1320  
(301) 621-0390

National Technical Information Service  
5285 Port Royal Road  
Springfield, VA 22161  
(703) 487-4650

## Contents

---

1.	Data Structures and Input .....	1
2.	Input Based on Configuration .....	13
3.	Parameters and Constants .....	21
4.	<b>Job</b> .....	25
5.	<b>Design</b> .....	32
6.	<b>Cases</b> .....	34
7.	<b>Size</b> .....	38
8.	SizeParam .....	39
9.	<b>OffDesign</b> .....	45
10.	OffParam .....	46
11.	<b>Performance</b> .....	47
12.	PerfParam .....	48
13.	<b>MapEngine</b> .....	49
14.	<b>MapAero</b> .....	52
15.	<b>FltCond</b> .....	55
16.	<b>Mission</b> .....	61
17.	MissParam .....	62
18.	MissSeg .....	69
19.	<b>FltState</b> .....	78
20.	FltAircraft .....	79

21. FltFuse .....	97
22. FltGear .....	98
23. FltRotor .....	99
24. FltWing .....	105
25. FltTail .....	108
26. FltTank .....	109
27. FltProp .....	111
28. FltEngn .....	113
29. FltJet .....	116
30. FltChrg .....	119
<hr/>	
31. <b>Solution</b> .....	122
<hr/>	
32. <b>Cost</b> .....	126
33. CostCTM .....	128
34. <b>Emissions</b> .....	130
<hr/>	
35. <b>Aircraft</b> .....	132
36. XAircraft .....	149
37. <b>Systems</b> .....	151
38. WFltCont .....	158
39. WDeIce .....	160
40. <b>Fuselage</b> .....	161
41. AFuse .....	165
42. WFuse .....	168
43. <b>LandingGear</b> .....	170
44. AGear .....	172

45. WGear .....	173
46. <b>Rotor</b> .....	174
47. PRotorInd .....	190
48. PRotorPro .....	194
49. PRotorTab .....	197
50. DRotor .....	199
51. IRotor .....	201
52. WRotor .....	203
53. <b>Wing</b> .....	206
54. AWing .....	214
55. WWing .....	217
56. WWingTR .....	218
57. <b>Tail</b> .....	220
58. ATail .....	223
59. Wtail .....	225
<hr/>	
60. <b>FuelTank</b> .....	226
61. WTank .....	229
62. <b>Propulsion</b> .....	231
63. WDrive .....	236
64. <b>EngineGroup</b> .....	238
65. DEngSys .....	247
66. WEngSys .....	248
67. <b>JetGroup</b> .....	249
68. DJetSys .....	255
69. WJetSys .....	256
70. <b>ChargeGroup</b> .....	257

71. DChrgSys .....	261
72. WChrgSys .....	262
<hr/>	
73. <b>EngineModel</b> .....	263
74. <b>EngineParamN</b> .....	269
75. <b>EngineTable</b> .....	271
76. <b>RecipModel</b> .....	274
77. <b>CompressorModel</b> .....	278
78. <b>MotorModel</b> .....	280
79. <b>JetModel</b> .....	283
80. <b>FuelCellModel</b> .....	286
81. <b>SolarCellModel</b> .....	289
82. <b>BatteryModel</b> .....	291
<hr/>	
83. <b>Location</b> .....	293
84. <b>Weight</b> .....	295

## Chapter 1

---

### Data Structures and Input

#### 1–1 Overview

The NDARC code performs design and analysis tasks. The design task involves sizing the rotorcraft to satisfy specified design conditions and missions. The analysis tasks can include off-design mission performance analysis, flight performance calculation for point operating conditions, and generation of subsystem or component performance maps. Figure 1-1 illustrates the tasks. The principal tasks (sizing, mission analysis, flight performance analysis) are shown in the figure as boxes with heavy borders. Heavy arrows show control of subordinate tasks.

The aircraft description (figure 1-1) consists of all the information, input and derived, that defines the aircraft. The aircraft consists of a set of components, including fuselage, rotors, wings, tails, and propulsion. This information can be the result of the sizing task; can come entirely from input, for a fixed model; or can come from the sizing task in a previous case or previous job. The aircraft description information is available to all tasks and all solutions (indicated by light arrows).

The sizing task determines the dimensions, power, and weight of a rotorcraft that can perform a specified set of design conditions and missions. The aircraft size is characterized by parameters such as design gross weight, weight empty, rotor radius, and engine power available. The relations between dimensions, power, and weight generally require an iterative solution. From the design flight conditions and missions, the task can determine the total engine power or the rotor radius (or both power and radius can be fixed), as well as the design gross weight, maximum takeoff weight, drive system torque limit, and fuel tank capacity. For each propulsion group, the engine power or the rotor radius can be sized.

Missions are defined for the sizing task, and for the mission performance analysis. A mission consists of a number of mission segments, for which time, distance, and fuel burn are evaluated. For the sizing task, certain missions are designated to be used for design gross weight calculations; for transmission sizing; and for fuel tank sizing. The mission parameters include mission takeoff gross weight and useful load. For specified takeoff fuel weight with adjustable segments, the mission time or distance is adjusted so the fuel required for the mission (burned plus reserve) equals the takeoff fuel weight. The mission iteration is on fuel weight or energy.

Flight conditions are specified for the sizing task, and for the flight performance analysis. For the sizing task, certain flight conditions are designated to be used for design gross weight calculations; for transmission sizing; for maximum takeoff weight calculations; and for antitorque or auxiliary thrust rotor sizing. The flight condition parameters include gross weight and useful load.

For flight conditions and mission takeoff, the gross weight can be maximized, such that the power required equals the power available.

A flight state is defined for each mission segment and each flight condition. The aircraft performance can be analyzed for the specified state, or a maximum effort performance can be identified. The maximum effort is specified in terms of a quantity such as best endurance or best range, and a variable such as speed, rate of climb, or altitude. The aircraft must be trimmed, by solving for the controls and motion that produce equilibrium in the specified flight state. Different trim solution definitions are required for various flight states. Evaluating the rotor hub forces may require solution of the blade flap equations of motion.

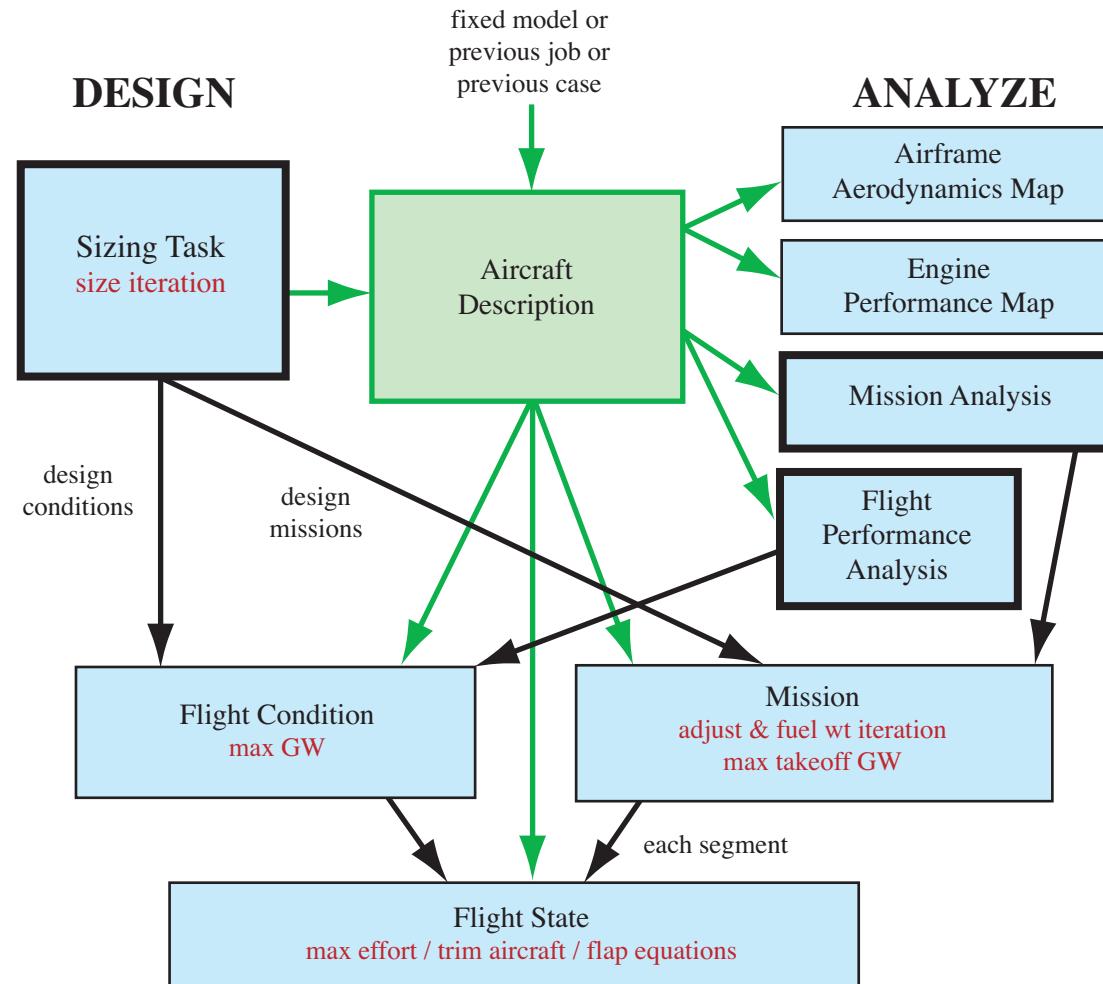


Figure 1-1 Outline of NDARC tasks.

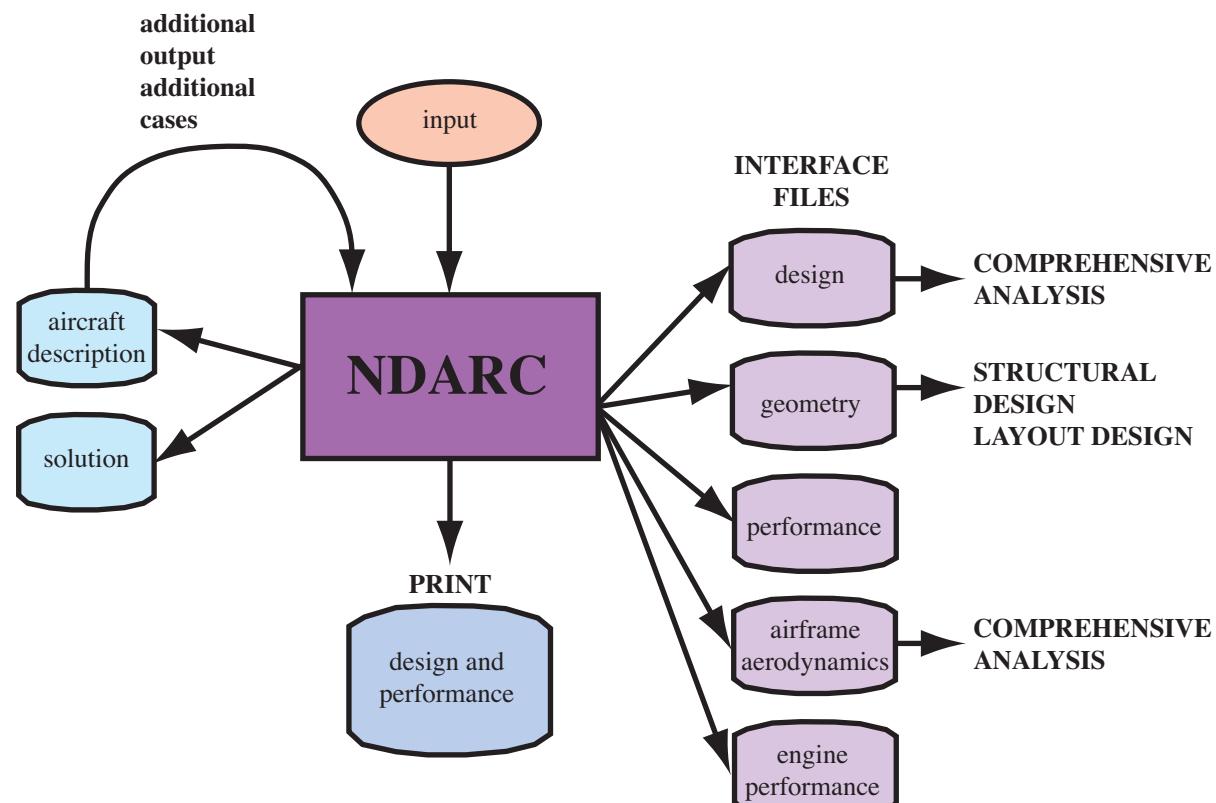


Figure 1-2 NDARC Interfaces.

```
&JOB INIT_input=0,INIT_data=0,&END
&DEFN action='ident',created='time-date',title='standard input',&END
!#####
&DEFN action='read file',file='engine.list',&END
&DEFN action='read file',file='helicopter.list',&END
!=====
&DEFN quant='Cases',&END
&VALUE title='Helicopter',TASK_size=0,TASK_mission=1,TASK_perf=1,&END
&DEFN quant='Size',&END
&VALUE nFltCond=0,nMission=0,&END
!=====
&DEFN quant='OffDesign',&END
&VALUE title='mission analysis',nMission=1,&END
&DEFN quant='OffMission',&END
&VALUE
    (one mission, mission segment parameters as arrays)
&END
!=====
&DEFN quant='Performance',&END
&VALUE title='performance analysis',nFltCond=2,&END
&DEFN quant='PerfCondition',&END
&VALUE
    (one condition)
&END
&DEFN quant='PerfCondition',&END
&VALUE
    (one condition)
&END
!=====
&DEFN action='endofcase',&END
!#####
&DEFN action='endofjob',&END
```

Figure 1-3a Illustration of NDARC input (primary input).

```
&DEFN action='ident',created='time-date',title='Helicopter',&END
!#####
! default helicopter
&DEFN action='configuration',&END
&VALUE config='helicopter',rotate=1,&END
!=====
&DEFN quant='Cases',&END
&VALUE title='Helicopter',FILE_design='helicopter.design',&END
&DEFN quant='Size',&END
&VALUE
    title='Helicopter',
    SIZE_perf='none',SET_rotor='radius+Vtip+sigma','radius+Vtip+sigma',
    FIX_DGW=1,SET_tank='input',SET_SDGW='input',SET_WMTO='input',
&END
&DEFN quant='Solution',&END
&VALUE &END
!=====
&DEFN quant='Aircraft',&END
&VALUE (Aircraft parameters) &END
&DEFN quant='Geometry',&END
&VALUE (geometry) &END
&DEFN quant='Rotor 1',&END
&VALUE (Rotor 1 parameters) &END
!=====
        (other parameters in other structures)
!=====
&DEFN quant='TechFactors',&END
&VALUE (technology factors) &END
!#####
&DEFN action='endoffile',&END
```

Figure 1-3b Illustration of NDARC input (secondary input file).

## **1-2 NDARC Input and Output**

Figure 1-2 illustrates the input and output environment of NDARC. Table 1-1 lists the possible input and output files. A job reads input from one or more files. The primary input is obtained from standard input (perhaps redirected to a file). The primary input can direct the code to read other files, identified by file name or logical name. The input data are read in namelist format. Unit numbers are part of the job input. Output file names are part of the case input. Input files names are defined in the input itself.

Table 1-1. Input and output files.

	file logical name	unit number (and default)
<b>INPUT</b>		
Primary Input	standard input	nuin = 5
Secondary Input File	FILE	nufile = 40
Aircraft Description	FILE	nufile = 40
Solution	FILE	nufile = 40
<b>OUTPUT</b>		
Output	standard output	nuout = 6
Design	DESIGNn	nudesign = 41
Performance	PERF <sub>n</sub>	nuperf = 42
Airframe Aerodynamics	AERON	nuaero = 43
Engine Performance	ENGINE <sub>n</sub>	nuengine = 44
Geometry	GEOMETRY <sub>n</sub>	nuggeom = 45
Aircraft Description	AIRCRAFT <sub>n</sub>	nuacd = 46
Solution	SOLUTION <sub>n</sub>	nusoln = 47
Sketch	SKETCH <sub>n</sub>	nusketch = 48
Errors	ERROR <sub>n</sub>	nuerror = 49

### **1-2.1 Input**

Figure 1-3 illustrates NDARC input. The primary input starts with a **JOB** namelist, then **DEFN** namelists are read to define the action and contents of the subsequent information. The job parameters include initialization control, error action, and input/output unit numbers. Job parameters can be read during case input using **QUANT='Job'**. The initialization takes place before case input, so changed initialization parameters in **QUANT='Job'** input take effect for the next case. The **DEFN** namelist has the following parameters.

- a) ACTION: character string (length = 32; case independent).
- b) QUANT: character string (length = 32, case independent); corresponds to data structure in input; string includes structure number (1 or next condition/mission if absent).
- c) SOURCE: integer; for copy action.
- d) FILE: file name or logical name (length = 256).
- e) CREATED: character string of creation time and date (length = 20).
- f) TITLE: character string of title identifying input file (length = 80).
- g) VERSION: code version number as character string (length = 6).
- h) MODIFICATION: character string of code modification (length = 32).

Table 1-2 describes the options for the ACTION variable in the DEFN namelist. The code searches for the keyword in the ACTION character string. A solution file (text or binary) can be written by an NDARC job and then read by a subsequent job, restoring the solution to the state that existed when the file was created. Then additional output and additional cases can be obtained. An aircraft description file can be written by an NDARC job and then read by a subsequent job, restoring the aircraft model (but not the solution). A secondary input file has DEFN namelists to define action and contents. When ACTION='end' (or EOF) is encountered in a secondary input file, the file is closed and the code returns to primary input.

A DEFN namelist with ACTION='ident' identifies the file; probably there is only one identification per file, and only the last occurrence is stored. The identification consists of the CREATED, TITLE, VERSION, MODIFICATION variables. CREATED and TITLE are written when a file is created by NDARC, and read and stored for each input file. If present, VERSION and MODIFICATION are compared with the version and modification of the code, and input continues only if they match.

The parameter QUANT identifies the data structure to be read (namelist format), initialized, or copied. Table 1-3 describes the options. The input corresponds to the data structures of the analysis. The QUANT string includes the structure number; if absent, the number is 1, or the next condition or mission. Note that each mission, with the mission segment parameters as arrays, is input with QUANT='SizeMission' or QUANT='OffMission'; and each condition is input with QUANT='SizeCondition' or QUANT='PerfCondition'.

A case inherits input for flight conditions and missions from the previous case if INIT\_input = last-case-input (default). A DEFN namelist with ACTION='delete' deletes this input as specified by QUANT='SizeCondition n', QUANT='SizeMission n', QUANT='OffMission n', or QUANT='PerfCondition n'. ACTION='delete all' deletes all (ignore structure number); ACTION='delete one' deletes structure n (all if number absent); ACTION='delete last' deletes structure n and subsequent structures (all if number absent).

For ACTION='nosize', input variables in the Size structure are set for no size iteration: SIZE\_perf='none', SIZE\_engine='none', SIZE\_jet='none', SIZE\_charge='none', SET\_rotor='radius+Vtip+sigma', SET\_wing='area+span', FIX\_DGW=1, SET\_tank='input', SET\_limit\_ds='input', SET\_SDGW='input', SET\_WMTO='input'.

Table 1-2. ACTION options.

ACTION	keyword	QUANT	function
<b>Primary Input Only</b>			
blank	—	blank	open and read secondary input file, name = FILE
'open file'	file, open		open and read secondary input file, name = FILE
'load aircraft'	aircraft, desc		load aircraft description file, name = FILE
'read solution'	solution	'text'	read complete solution file, name = FILE (text)
'read solution'	solution	not 'text'	read complete solution file, name = FILE (binary)
'end of case'	end+case		stop case input, execute case
'end of job'	end+job, quit		stop job input, execute case, exit code
<b>Primary or Secondary Input</b>			
blank	—	'structure'	read VALUE namelist
'read namelist'	list	'structure'	read VALUE namelist
'copy input'	copy	'structure'	copy input from source (same structure), SOURCE=SRCnumber
'initialize'	init	'structure'	set structure variables to default values
'delete all'	del+all	'structure'	delete all conditions or missions
'delete one'	del+one	'structure'	delete one condition or mission
'delete last'	del+last	'structure'	delete last conditions or missions
'configuration'	config		set input based on aircraft configuration
'nosize'	nosize		set input for no size iteration
'identification'	ident		identify file
'end'	end (or EOF)		Secondary: close file, return to primary input
'end'	end (or EOF)		Primary: same as ACTION='endofjob'

Table 1-3. QUANT options.

QUANT	data structures read	maximum n
'Job'	Job	
'Cases'	Cases	
'Size'	SizeParam	
'SizeCondition n'	one FltCond+FltState	nFltCond
'SizeMission n'	one MissParam, MissSeg+FltState as array	nMission
'OffDesign'	OffParam	
'OffMission n'	one MissParam, MissSeg+FltState as array	nMission
'Performance'	PerfParam	
'PerfCondition n'	one FltCond+FltState	nFltCond
'MapEngine'	MapEngine	
'MapAero'	MapAero	
'Solution'	Solution	
'Cost'	Cost, CostCTM	
'Emissions'	Emissions	
'Aircraft'	Aircraft	
'Systems'	Systems, WFltCont, WDlcce	
'Fuselage'	Fuselage, AFuse, WFuse	
'LandingGear'	LandingGear, AGear, WGear	
'Rotor n'	Rotor, PRotorInd, PRotorPro, PRotorTab, IRotor, DRotor, WRotor	nRotor
'Wing n'	Wing, AWing, WWing, WWingTR	nWing
'Tail n'	Tail, ATail, WTail	nTail
'FuelTank n'	FuelTank, WTank	nTank
'Propulsion n'	Propulsion, WDrive	nPropulsion
'EngineGroup n'	EngineGroup, DEngSys, WEngSys	nEngineGroup
'JetGroup n'	JetGroup, DJetSys, WJetSys	nJetGroup
'ChargeGroup n'	ChargeGroup, DChrgSys, WChrgSys	nChargeGroup
'EngineModel n'	EngineModel	nEngineModel
'EngineParamN n'	EngineParamN	nEngineParamN
'EngineTable n'	EngineTable	nEngineTable
'RecipModel n'	RecipModel	nRecipModel
'CompressorModel n'	CompressorModel	nCompressorModel
'MotorModel n'	MotorModel	nMotorModel
'JetModel n'	JetModel	nJetModel
'FuelCellModel n'	FuelCellModel	nFuelCellModel
'SolarCellModel n'	SolarCellModel	nSolarCellModel
'BatteryModel n'	BatteryModel	nBatteryModel
'TechFactors'	all TECH_xxx	
'Geometry'	all Location	

### 1-2.2 Formats

Namelist input has the following format (see also figure 1-3).

```
&DEFN action='IDENT',created='time-date',title='xxx',version='n.n',modification='xxx',&END
&DEFN quant='STRUCTURE n',&END
&VALUE param=value,&END
&DEFN action='NAMELIST',quant='STRUCTURE n',&END
&VALUE param=value,&END
&DEFN action='COPY',quant='STRUCTURE n',source=#,&END
```

An aircraft description file is written in a separate file by NDARC, from theDesign(kcase):

```
&DEFN action='IDENT',created='time-date',title='xxx',version='n.n',modification='xxx',&END
&VALUE_ADIMEN nrotor=m,nwing=m,ntail=m,ntank=m,npropulsion=m,nenginegroup=m,njetgroup=m,nchargegroup=m,
    nenginemodel=m,nengineparamn=m,nenginetable=m,nrecipmodel=m,ncompressormodel=m,nmotormodel=m,njetmodel=m,
    nfuelcellmodel=m,nsolarcellmodel=m,nbatterymodel=m,&END
&VALUE theStructure%xxx,&END
&VALUE theStructure%xxx,&END
&VALUE theStructure%xxx,&END
```

This aircraft description file is read by identifying it in the primary input:

```
&DEFN action='AIRCRAFT',file='aircraft.acd',&END
```

A solution file is written in a separate file by NDARC, from theDesign(kcase), in binary or text format:

```
&DEFN action='IDENT',created='time-date',title='xxx',version='n.n',modification='xxx',&END
&VALUE_ADIMEN nrotor=m,nwing=m,ntail=m,ntank=m,npropulsion=m,nenginegroup=m,njetgroup=m,nchargegroup=m,
    nenginemodel=m,nengineparamn=m,nenginetable=m,nrecipmodel=m,ncompressormodel=m,nmotormodel=m,njetmodel=m,
    nfuelcellmodel=m,nsolarcellmodel=m,nbatterymodel=m,&END
&VALUE_SDIMEN nsizecond=m,nsizemiss=m,nperfcond=m,noffmiss=m,&END
&VALUE theStructure%xxx,&END
&VALUE theStructure%xxx,&END
&VALUE theStructure%xxx,&END
```

This solution file is read by identifying it in the primary input, with QUANT identifying the file as text or binary:

```
&DEFN action='SOLUTION',quant='TEXT',file='aircraft.soln'&END
```

### 1-2.3 Conventions

Each flight condition (`FltCond` and `FltState` variables) is input in a separate `SizeCondition` or `PerfCondition` namelist.

Each mission (`MissParam`, `MissSeg`, and `FltState` variables) is input in a separate `SizeMission` or `OffMission` namelist. All mission segments are defined in this namelist, so `MissSeg` and `FltState` variables are arrays. Each variable gets one more dimension, with the first array index always segment number.

Geometry input includes Location variables, which are read as elements of the data structure (for example, `loc_rotor%SL`).

Variables can appear in more than one namelist. Specifically there are separate namelists for all technology factors (all `TECH_XXX` variables), and all geometry (all Location variables), with corresponding options for output. A variable that is a scalar in the `Rotor`, `Wing`, `Tail`, `Propulsion`, `EngineGroup`, `JetGroup`, or `ChargeGroup` input becomes an array in the `TechFactors` or `Geometry` input. Note that it is the Location variable that is the array (for example, `loc_rotor(1)%SL`).

Case is not important in character string input. Character string input consists of keywords; the code searches for the keywords in the string.

Default values are specified in the dictionary (blank implies a default of zero); all elements of arrays have the same default value.

Tasks, aircraft, and components have title variables. There are also notes variables (long character string) to record information about the input.

### 1-3 Software Tool

All information about data structures is contained in a dictionary file. This information includes the parameter name, dimension, type, default value, description, identification as input, and formats for write of the parameter. A software tool was created to manage the data, including construction of the module of data structures. The software tool reads this dictionary file and creates subroutines for the input process: namelist read, copy, print of input, initialization, set to default. This software tool is a program that manipulates character strings, to produce compilable module and subroutines for NDARC.

### 1-4 Data Structures

Table 1-4 outlines the data structures used for NDARC. The following chapters describe the contents of each structure. Note that a "+" sign in the column between the type and description identifies input variables. Input variables can be changed by the analysis, so may not be the same at the end of a case as at the beginning. All variables, input and other, are initialized to zero or blank. If default values exist (only for input variables), they supersede that initialization.

Table 1-4. NDARC data structures.

Design	Fuselage	FuelTank(ntankmax)	FltState(nfltmax)
Cases	[Location]loc_fuselage	[Location]loc_auxtank(nauxtankmax)	FltAircraft
Size	AFuse	Weight	FltFuse
SizeParam	Weight	WTank	FltGear
FltCond(nfltmax)	WFuse	Propulsion(npropmax)	FltRotor(nrotormax)
FltState(nfltmax)	LandingGear	Weight	FltWing(nwingmax)
Mission(nmissmax)	[Location]loc_gear	WDrive	FltTail(ntailmax)
MissParam	AGear	EngineGroup(nengmax)	FltTank(ntankmax)
MissSeg(nsegmax)	Weight	[Location]loc_engine	FltProp(npropmax)
FltState(nsegmax)	WGear	DEngSys	FltEngn(nengmax)
OffDesign	Rotor(nrotormax)	Weight	FltJet(njetmax)
OffParam	[Location]loc_rotor	WEngSys	FltChrg(nchrgmax)
Mission(nmissmax)	[Location]loc_pylon	JetGroup(njetmax)	
MissParam	[Location]loc_pivot	[Location]loc_jet	
MissSeg(nsegmax)	[Location]loc_nac	DJetSys	
FltState(nsegmax)	PRotorInd	Weight	
Performance	PRotorPro	WJetSys	
PerfParam	PRotorTab	ChargeGroup(nchrgmax)	
FltCond(nfltmax)	IRotor	[Location]loc_charger	
FltState(nfltmax)	DRotor	DChrgSys	
MapEngine	Weight	Weight	
MapAero	WRotor	WChrgSys	
Solution	Wing(nwingmax)	EngineModel(nengmax)	
Cost	[Location]loc_wing	EngineParamN(nengpmax)	
CostCTM	AWing	EngineTable(nengmax)	
Emissions	Weight	RecipModel(nengmax)	
Aircraft	VWing	CompressorModel(nengmax)	
	VWingTR	MotorModel(nengmax)	
[Location]loc_cg	Tail(ntailmax)	JetModel(njetmax)	
Weight	[Location]loc_tail	FuelCellModel(nchrgmax)	
XAircraft	ATail	SolarCellModel(nchrgmax)	
Systems	Weight	BatteryModel(ntankmax)	
Weight	WTail		
WFltCont			
WDelce			

## Chapter 2

---

### Input Based on Configuration

The rotorcraft configuration is identified by the variable config in the QUANT='Aircraft' input. With ACTION='configuration', the analysis defines a number of input parameters in order to facilitate modelling of conventional configurations. The input required to execute ACTION='configuration' is:

```
&DEFN action='configuration',&END
&VALUE config='aaaa',nRotor=#,rotate=#,#,overlap_tandem=#,#,ang_multicopter=#,#,&END
```

The VALUE namelist contains only the parameters Aircraft%config (rotorcraft configuration), Aircraft%nRotor (number of rotors, only for multicopter), Rotor%rotate (direction of rotation, each rotor), Rotor%overlap\_tandem (each rotor, only for tandem helicopter), and Rotor%ang\_multicopter (each rotor, only for multicopter). The convention is that the first rotor is the main rotor for the helicopter or compound configuration; the front rotor for the tandem configuration; the right rotor for the tiltrotor configuration. This capability has been implemented for rotorcraft, helicopter, tandem, coaxial, tiltrotor, compound, multicopter, and airplane configurations. The analysis creates the following input, through the code in the file `input_config.f90`. Note that default values are defined for all input quantities.

#### 2–1 All Configurations

a) Components: nRotor=2 (except multicopter), nWing=0, nTail=2; nPropulsion=1, nEngineGroup=1, nEngineModel=1, nJetGroup=0, nChargeGroup=0

b) Aircraft

Aircraft controls: ncontrol=7, IDENT\_control='coll','latcyc','lngcyc','pedal','tailinc','elevator','rudder'

Control states: nstate\_control=1

Trim states: nstate\_trim=10, selected by FltAircraft%STATE\_trim=IDENT\_trim; compound state not active

	IDENT_trim	mtrim	trim_quant	trim_var
6-variable	'free'	6	'force x','force y','force z','moment x','moment y','moment z'	'coll','latcyc','lngcyc','pedal','pitch','roll'
longitudinal	'long'	4	'force x','force z','moment y','moment z'	'coll','lngcyc','pitch','pedal'
symmetric 3-variable	'symm'	3	'force x','force z','moment y'	'coll','lngcyc','pitch'
weight and drag	'force'	2	'force x','force z'	'coll','pitch'
hover thrust and torque	'hover'	2	'force z','moment z'	'coll','pedal'
hover thrust	'thrust'	1	'force z'	'coll'
hover rotor $C_T/\sigma$	'rotor'	1	'CTs rotor 1'	'coll'
wind tunnel	'windtunnel'	3	'CTs rotor 1','betac 1','betas 1'	'coll','latcyc','lngcyc'
full power	'power'	1	'P margin 1'	'coll'
ground run	'ground'	1	'force x'	'coll'
compound	'comp'	6	'force x','force y','force z','moment x','moment y','moment z'	'coll','latcyc','lngcyc','pedal','prop','roll'

c) Systems: MODEL\_FWfc=0, MODEL\_CVfc=0 (no fixed wing flight controls, no conversion controls)

d) Landing Gear: KIND\_LG=0 (fixed gear), Wgear%LG=3

e) Fuel Tank: place=1 (internal tank), Mauxtanksize=1, WTank%ntank\_int=1, WTank%nplumb=2

f) Rotor

First rotor is primary: kPropulsion=1, KIND\_xmsn=1

Second and other rotors are dependent: kPropulsion=1, KIND\_xmsn=0, INPUT\_gear=1 (input quantity is tip speed)

Configuration: direction='main'

Drag: SET\_aeroaxes=1 (helicopter), ldrag=0. (not tilt); DRotor%SET\_Dspin=1, DRotor%DoQ\_spin=0. (no spinner drag)

Weight: WRotor%MODEL\_config=1 (rotor), WRotor%KIND\_rotor=2 (not tilting)

Control:

INPUT\_coll=0, INPUT\_cyclic=0, INPUT\_incid=0, INPUT\_cant=0, INPUT\_diam=0 (no connection to aircraft controls)

T\_coll=0., T\_latcyc=0., T\_lngcyc=0., T\_incid=0., T\_cant=0., T\_diam=0. (all controls, all states)

KIND\_control=1 (1 for thrust and TPP command)

KIND\_coll=2 (1 for thrust, 2 for  $C_T/\sigma$ )

KIND\_cyclic=1 (1 for TPP tilt, 2 for hub moment, 3 for lift offset)

KIND\_tilt=0 (fixed shaft)

g) Wing

Control:

INPUT\_flap=0, INPUT\_flaperon=0, INPUT\_aileron=0, INPUT\_incid=0 (no connection to aircraft controls)

T\_flap=0., T\_flaperon=0., T\_aileron=0., T\_incid=0. (all controls, all states, all panels)

Drag: ldrag=0. (not tilt)

h) Tail

First tail is horizontal tail: KIND\_tail=1, WTail%MODEL\_Htail=1 (helicopter)

Second tail is vertical tail: KIND\_tail=2, WTail%MODEL\_Vtail=1 (helicopter)

Configuration: KIND\_TailVol=2, TailVolRef=1 (rotor reference)

Control:

INPUT\_cont=1 (tail control connection to aircraft controls), INPUT\_incid=0 (no connection of tail incidence to aircraft controls)

T\_cont=0., T\_incid=0. (all controls, all states)

i) Propulsion: nGear=1, STATE\_gear\_wt=1, INPUT\_DN=0

## j) Engine Group

Configuration: kPropulsion=1, INPUT\_gear=1 (gear ratio from N\_spec), SET\_power=0 (sized), fPsize=1., direction='x', SET\_geom=0 (standard position)  
 Drag: MODEL\_drag=1, ldrag=0. (not tilt)

## k) Engine Group, Jet Group, Charge Group

Control:

INPUT\_amp=0, INPUT\_incid=0, INPUT\_yaw=0 (no connection to aircraft controls)  
 $T_{amp}=0.$ ,  $T_{incid}=0.$ ,  $T_{yaw}=0.$  (all controls, all states)

**2-2 Helicopter**

## a) Rotor

First rotor is main rotor: config='main', fDGW=1., fArea=1., SET\_geom='standard'

rotation:  $r = 1$ ; if ( $\text{Rotor}(1)\%rotate < 0$ )  $r = -1$   
 control: INPUT\_coll=1, INPUT\_latcyc=1, INPUT\_lngcyc=1 (rotor control connection to aircraft controls)  
 $T_{coll}(1,1)=1.$ ,  $T_{latcyc}(2,1)=-r$ ,  $T_{lngcyc}(3,1)=-1.$

Second rotor is tail rotor: config='tail+antiQ', fThrust=1., fArea=0., SET\_geom='tailrotor', mainRotor=1

direction='tail', WRotor%MODEL\_config=2 (tail rotor)  
 rotation:  $r = 1$ ; if ( $\text{Rotor}(1)\%rotate < 0$ )  $r = -1$   
 control: KIND\_control=2 (thrust and NFP command); INPUT\_coll=1,  $T_{coll}(4,1)=-r$  (rotor collective connection to aircraft control 'pedal')

Performance: PRotorInd%MODEL\_twin='none'

Drag: SET\_Sspin=1, Swet\_spin=0., DRotor%SET\_Dspin=1, DRotor%DoQ\_spin=0., DRotor%CD\_spin=0. (no spinner drag)

## b) Tail

Control: INPUT\_incid=1 (tail incidence connection to aircraft controls)

Horizontal tail:  $T_{incid}(5,1)=1.$  (incidence connection to aircraft control 'tailinc'),  $T_{cont}(6,1)=1.$  (elevator direct control)

Vertical tail:  $T_{cont}(7,1)=1.$  (rudder direct control)

c) Propulsion: WDrive%ngearbox=2, WDrive%ndriveshaft=1, WDrive%fShaft=0.1, WDrive%fTorque=0.03, WDrive%fPower=0.15

**2-3 Tandem**

a) Components: nTail=0 (no tail)

b) Fuel Tank: place=2 (sponson)

## c) Rotor

Configuration: config='main+tandem', fDGW=.5, SET\_geom='tandem', fRadius=1.  
 $fArea = 1 - m/2$ , from  $m = (2/\pi)(\cos^{-1} h - h\sqrt{1-h^2})$ ,  $h = 1 - overlap\_tandem$

First rotor is front rotor: otherRotor=2, PositionOfRotor=1

rotation:  $r = 1$ , if ( $Rotor(1)\%rotate < 0$ )  $r = -1$   
control: INPUT\_coll=1, INPUT\_latcyc=1 (rotor control connection to aircraft controls)  
control: T\_coll(1,1)=1., T\_coll(3,1)=-1., T\_latcyc(2,1)=-r, T\_latcyc(4,1)=-r  
Second rotor is aft rotor: otherRotor=1, PositionOfRotor=-1, rotate=-Rotor(1)%rotate  
rotation:  $r = 1$ , if ( $Rotor(1)\%rotate < 0$ )  $r = -1$ ;  $r = -r$   
control: INPUT\_coll=1, INPUT\_latcyc=1 (rotor control connection to aircraft controls)  
control: T\_coll(1,1)=1., T\_coll(3,1)=1., T\_latcyc(2,1)=-r, T\_latcyc(4,1)=r

Performance: PRotorInd%MODEL\_twin='tandem', PRotorInd%Kh\_twin=1., PRotorInd%Kf\_twin=0.85, IRotor%MODEL\_int\_twin=2

Drag: SET\_Sspin=1, Swet\_spin=0., DRotor%SET\_Dspin=1, DRotor%DoQ\_spin=0., DRotor%CD\_spin=0. (no spinner drag)

d) Propulsion: WDrive%ngearbox=2, WDrive%ndriveshaft=1, WDrive%fShaft=0.1; WDrive%fTorque=0.6, WDrive%fPower=0.6

**2-4 Coaxial**

## a) Rotor

Configuration: config='main+coaxial', fDGW=.5, fArea=.5, SET\_geom='coaxial', fRadius=1.

First rotor is lower rotor: otherRotor=2, PositionOfRotor=1

rotation:  $r = 1$ , if ( $Rotor(1)\%rotate < 0$ )  $r = -1$   
control: INPUT\_coll=1, INPUT\_latcyc=1, INPUT\_lngcyc=1 (rotor control connection to aircraft controls)  
control: T\_coll(1,1)=1., T\_coll(4,1)=r, T\_latcyc(2,1)=-r, T\_lngcyc(3,1)=-1.  
Second rotor is upper rotor: otherRotor=1, PositionOfRotor=-1, rotate=-Rotor(1)%rotate  
rotation:  $r = 1$ , if ( $Rotor(1)\%rotate < 0$ )  $r = -1$ ;  $r = -r$   
control: INPUT\_coll=1, INPUT\_latcyc=1, INPUT\_lngcyc=1 (rotor control connection to aircraft controls)  
control: T\_coll(1,1)=1., T\_coll(4,1)=r, T\_latcyc(2,1)=-r, T\_lngcyc(3,1)=-1.

Performance: PRotorInd%MODEL\_twin='coaxial', PRotorInd%Kh\_twin=1., PRotorInd%Kf\_twin=0.85, IRotor%MODEL\_int\_twin=2

Drag: SET\_Sspin=1, Swet\_spin=0., DRotor%SET\_Dspin=1, DRotor%DoQ\_spin=0., DRotor%CD\_spin=0. (no spinner drag)

## b) Tail

Horizontal tail: T\_cont(6,1)=1. (elevator direct control)

Vertical tail: T\_cont(7,1)=1. (rudder direct control)

c) Propulsion: WDrive%ngearbox=1, WDrive%ndriveshaft=0, WDrive%fShaft=0.1; WDrive%fTorque=0.6, WDrive%fPower=0.6

## 2-5 Tiltrotor

a) Components: nWing=1, nEngineGroup=2 (engine at each nacelle)

b) Aircraft

Aircraft controls: ncontrol=10, IDENT\_control='coll','latcyc','Ingcyc','pedal','tilt','flap','flaperon','elevator','aileron','rudder'

Control states: nstate\_control=2 (state 1 for helicopter mode, state 2 for airplane mode)

Control state in conversion: kcont\_hover=1, kcont\_conv=1, kcont\_cruise=2

Drive state in conversion: kgear\_hover(1)=1, kgear\_conv(1)=1, kgear\_cruise(1)=1

c) Systems: MODEL\_FWfc=1, MODEL\_CVfc=1 (fixed wing flight controls, conversion control)

d) Landing Gear: KIND\_LG=1 (retractable)

e) Fuel Tank: place=3 (wing), fFuelWing(1)=1.

f) Rotor

Configuration: config='main+tiltrotor', fDGW=.5, fArea=1.; SET\_geom='tiltrotor', KIND\_TRegeom=1 (from clearance), fRadius=1., WingForRotor=1

First rotor is right rotor: otherRotor=2, PositionOfRotor=1

helicopter mode control: INPUT\_coll=1, INPUT\_Ingcyc=1 (rotor control connection to aircraft controls)

helicopter mode control: T\_coll(1,1)=1., T\_coll(2,1)=-1., T\_Ingcyc(3,1)=-1., T\_Ingcyc(4,1)=1.

Second rotor is left rotor: otherRotor=1, PositionOfRotor=-1, rotate=-Rotor(1)%rotate; INPUT\_gear=2 (input quantity is gear ratio)

helicopter mode control: INPUT\_coll=1, INPUT\_Ingcyc=1 (rotor control connection to aircraft controls)

helicopter mode control: T\_coll(1,1)=1., T\_coll(2,1)=1., T\_Ingcyc(3,1)=-1., T\_Ingcyc(4,1)=-1.

Airplane mode control state: T\_coll(1,2)=1. (collective connection to aircraft control 'coll')

Tilt: KIND\_tilt=1 (shaft control = incidence), incid\_ref=90. (helicopter mode reference), SET\_Wmove=1, fWmove=1. (wing tip weight move)

control: INPUT\_incid=1, T\_incid(5,1)=1., T\_incid(5,2)=1. (incidence connection to aircraft control 'tilt')

Performance: PRotorInd%MODEL\_twin='tiltrotor', PRotorInd%Kh\_twin=1., PRotorInd%Kf\_twin=1., IRotor%MODEL\_int\_twin=2

Weight: WRotor%KIND\_rotor=1 (tilting)

Drag: SET\_aeroaxes=2 (tiltrotor), Idrag=90. (tiltrotor)

DRotor%SET\_Dhub=1, DRotor%DoQ\_hub=0., DRotor%CD\_hub=0., DRotor%SET\_Vhub=1, DRotor%DoQV\_hub=0., DRotor%CDV\_hub=0. (no hub drag)

g) Wing

Configuration: fDGW=1., nRotorOnWing=2, RotorOnWing(1)=1, RotorOnWing(2)=2, SET\_ext=0

Control: KIND\_flaperon=3 (independent), nVincid=1

INPUT\_flap=1, INPUT\_flaperon=1, INPUT\_aileron=1 (wing control connection to aircraft controls)

T\_aileron(2,2)=-1. (airplane mode aileron connection to aircraft control 'latcyc')

$T_{flap}(6,1)=1.$ ,  $T_{flap}(6,2)=1.$  (flap direct control)  
 $T_{flaperon}(7,1)=1.$ ,  $T_{flaperon}(7,2)=1.$  (flaperon direct control)  
 $T_{aileron}(9,1)=1.$ ,  $T_{aileron}(9,2)=1.$  (aileron direct control)  
 Weight:  $WWing\%MODEL\_wing=3$  (tiltrotor)

#### h) Tail

Configuration:  $KIND\_TailVol=1$ ,  $TailVolRef=1$  (wing reference);  $Wtail\%MODEL\_Htail=2$ ,  $Wtail\%MODEL\_Vtail=2$  (tiltrotor)

Horizontal tail control:  $nVincid=1$

$T_{cont}(3,2)=1.$  (airplane mode elevator connection to aircraft control 'lncyc')

$T_{cont}(8,1)=1.$ ,  $T_{cont}(8,2)=1.$  (elevator direct control)

Vertical tail control:  $nVincid=1$

$T_{cont}(4,2)=1.$  (airplane mode rudder connection to aircraft control 'pedal')

$T_{cont}(10,1)=1.$ ,  $T_{cont}(10,2)=1.$  (rudder direct control)

i) Propulsion:  $WDrive\%ngearbox=2$ ,  $WDrive\%ndriveshaft=1$ ,  $WDrive\%fShaft=0.1$ ;  $WDrive\%fTorque=0.6$ ,  $WDrive\%fPower=0.6$

#### j) Engine Group

Configuration:  $fPsize=0.5$ ,  $SET\_geom=1$  (tiltrotor)

First engine group:  $RotorForEngine=1$

Second engine group:  $RotorForEngine=2$

Control:  $INPUT\_incid=1$ ;  $T\_incid(5,1)=1.$ ,  $T\_incid(5,2)=1.$  (nacelle incidence connection to aircraft control 'tilt')

Drag:  $SET\_Swet=1$ ,  $Swet=0.$ ,  $MODEL\_drag=0$ ,  $Idrag=90.$  (no engine nacelle drag)

$DEngSys\%SET\_drag=1$ ,  $DEngSys\%DoQ=0.$ ,  $DEngSys\%CD=0.$ ;  $DEngSys\%SET\_Vdrag=1$ ,  $DEngSys\%DoQV=0.$ ,  $DEngSys\%CDV=0.$

## 2–6 Compound

a) Components:  $nRotor=3$ ,  $nWing=1$

#### b) Aircraft

Aircraft controls:  $ncontrol=10$ ,  $IDENT\_control='coll', 'latcyc', 'lncyc', 'pedal', 'tailinc', 'elevator', 'rudder', 'prop', 'aileron', 'flap'$

Trim states:  $nstate\_trim=11$ ; compound state active

#### c) Rotor

First rotor is main rotor:  $config='main'$ ,  $fDGW=1.$ ,  $fArea=1.$ ,  $SET\_geom='standard'$

rotation:  $r = 1$ ; if ( $Rotor(1)\%rotate < 0$ )  $r = -1$

control:  $INPUT\_coll=1$ ,  $INPUT\_latcyc=1$ ,  $INPUT\_lncyc=1$  (rotor control connection to aircraft controls)

control:  $T_{\text{coll}}(1,1)=1.$ ,  $T_{\text{latcyc}}(2,1) = -r$ ,  $T_{\text{lngcyc}}(3,1)=-1$ .  
 Second rotor is tail rotor: config='tail+antiQ', fThrust=1., fArea=0., SET\_geom='tailrotor', mainRotor=1  
 direction='tail', WRotor%MODEL\_config=2 (tail rotor)  
 rotation:  $r = 1$ ; if ( $\text{Rotor}(1)\%rotate < 0$ )  $r = -1$   
 control: KIND\_control=2 (thrust and NFP command); INPUT\_coll=1,  $T_{\text{coll}}(4,1) = -r$  (rotor collective connection to aircraft control 'pedal')  
 Third rotor is propeller: config='prop+auxT', fThrust=1., fArea=0., SET\_geom='standard'  
 direction='prop', WRotor%MODEL\_config=3 (auxiliary thrust)  
 control: KIND\_control=2 (thrust and NFP command); INPUT\_coll=1,  $T_{\text{coll}}(8,1)=1.$  (rotor collective connection to aircraft control 'prop')  
 Performance: PRotorInd%MODEL\_twin='none'  
 Drag: SET\_Sspin=1, Swet\_spin=0., DRotor%SET\_Dspin=1, DRotor%DoQ\_spin=0., DRotor%CD\_spin=0. (no spinner drag)

#### d) Wing

Configuration: fDGW=1.

Control: nVincid=1

INPUT\_flap=1, INPUT\_flaperon=1, INPUT\_aileron=1 (wing control connection to aircraft controls)

$T_{\text{aileron}}(9,1)=1.$  (aileron direct control)

$T_{\text{flap}}(10,1)=1.$  (flap direct control)

Weight: WWing%MODEL\_wing=2 (parametric)

#### e) Tail

Control: INPUT\_incid=1 (tail incidence connection to aircraft controls)

Horizontal tail:  $T_{\text{incid}}(5,1)=1.$  (incidence connection to aircraft control 'tailinc'),  $T_{\text{cont}}(6,1)=1.$  (elevator direct control)

Vertical tail:  $T_{\text{cont}}(7,1)=1.$  (rudder direct control)

f) Propulsion: WDrive%ngearbox=3, WDrive%ndriveshaft=1, WDrive%fShaft=0.1, WDrive%fTorque=0.03, WDrive%fPower=0.15

## 2–7 Multicopter

---

a) Components: nTail=0 (no tail)

#### b) Rotor

Configuration: config='main', fDGW=1/nRotor, fArea=1., SET\_geom='multicopter'

Control: KIND\_control=2 (thrust and NFP command); INPUT\_coll=1

rotation:  $r = 1$ ; if ( $\text{rotate} < 0$ )  $r = -1$ ;  $a = \text{ang\_multicopter}$

$T_{\text{coll}}(1,1)=1.$ ,  $T_{\text{coll}}(2,1)=-\sin(a)$ ,  $T_{\text{coll}}(3,1)=\cos(a)$ ,  $T_{\text{coll}}(4,1)=r$  (rotor collective connection to aircraft controls)

Performance: PRotorInd%MODEL\_twin='multirotor'; xh\_multi=0., xf\_multi=0., except 1.0 for this rotor

Drag: SET\_Sspin=1, Swet\_spin=0., DRotor%SET\_Dspin=1, DRotor%DoQ\_spin=0., DRotor%CD\_spin=0. (no spinner drag)

c) Propulsion: WDrive%ngearbox=nRotor, WDrive%ndriveshaft=nRotor-1, WDrive%fShaft=0.1; WDrive%fTorque=0.6, WDrive%fPower=0.6

## **2-8 Airplane**

a) Components: nRotor=1, nWing=1

b) Solution: KIND\_Lscale=2 (wing span reference)

c) Aircraft

Geometry: INPUT\_geom=2, KIND\_scale=2, kScale=1 (geometry scaled with wing span); KIND\_Ref=2, kRef=1 (wing reference)

Aircraft controls: ncontrol=9, IDENT\_control='coll', 'latcyc', 'lNgcyc', 'pedal', 'tailinc', 'elevator', 'rudder', 'aileron', 'flap'

coll = propeller, latcyc = lateral stick, lNgcyc = longitudinal stick

d) Systems: MODEL\_FWfc=1 (fixed wing flight controls)

e) Rotor

Propeller: config='prop+auxT', fThrust=1., fDGW=0., SET\_geom='standard'  
direction='prop', WRotor%MODEL\_config=3 (auxiliary thrust)

Control: KIND\_control=2 (thrust and NFP command); INPUT\_coll=1, T\_coll(1,1)=1. (rotor collective connection to aircraft control 'coll')

f) Wing

Configuration: fDGW=1.

Control: nVincid=1

INPUT\_flap=1, INPUT\_aileron=1 (wing control connection to aircraft controls)

T\_aileron(2,1)=1. (lateral stick), T\_aileron(8,1)=1. (aileron direct control)

T\_flap(9,1)=1. (flap direct control)

Weight: WWing%MODEL\_wing=2 (parametric)

g) Tail: KIND\_TailVol=1, TailVolRef=1 (wing reference)

Control: INPUT\_incid=1 (tail incidence connection to aircraft controls)

Horizontal tail: T\_incid(5,1)=1. (incidence connection to aircraft control 'tailinc'), T\_cont(3,1)=1. (longitudinal stick), T\_cont(6,1)=1. (elevator direct control)

Vertical tail: T\_cont(4,1)=1. (pedal), T\_cont(7,1)=1. (rudder direct control)

h) Propulsion: WDrive%ngearbox=1, WDrive%ndriveshaft=1, WDrive%fShaft=0.1

## Chapter 3

**Parameters and Constants**

Parameters	Value				
ncasemax	10	ndesignmax	41	ngetab2max	20
nfilemax	40	ncontmax	20	npanelmax	5
nrotormax	8	nsweepmax	200	nauxtankmax	4
npropmax	8	qsweepmax	4	ngearmax	8
nengmax	8	ntrimstatemax	20	nratemax	20
njetmax	4	mtrimmax	16	nengtmax	20
nchrgmax	4	nvnemax	32	nengxmax	100
nstatemax	10	niasmax	40	nengkmax	6
nwingmax	8	nvelmax	20	nengrmax	40
ntailmax	6	ntablemax	32	nengpmax	20
ntankmax	4	nrmax	51	nengcmax	80
nmissmax	20	mrrmax	40	nspeedmax	8
nsegmax	40	mpsimax	36	nrowmax	4000
nfltmax	21	ngetabmax	40	naeromax	100

Constants	Value				
ACTION_error	0	SET_takeoff_rotation	5	TRIM_QUANT_Cmargin	18
ACTION_file	1	SET_takeoff_transition	6	TRIM_QUANT_tank	19
ACTION_ident	2	SET_takeoff_climb	7	TRIM_QUANT_Bmargin	20
ACTION_list	3	SET_takeoff_brake	8	TRIM_QUANT_rotorL	21
ACTION_copy	4	MAX_QUANT_none	0	TRIM_QUANT_rotorfL	22
ACTION_init	5	MAX_QUANT_end	1	TRIM_QUANT_CLs	23
ACTION_delete	6	MAX_QUANT_range	2	TRIM_QUANT_rotorV	24
ACTION_delone	7	MAX_QUANT_rangelow	3	TRIM_QUANT_rotorX	25
ACTION_dellast	8	MAX_QUANT_range100	4	TRIM_QUANT_rotorfX	26

ACTION_config	9	MAX_QUANT_climb	5	TRIM_QUANT_CXs	27
ACTION_nosize	10	MAX_QUANT_angle	6	TRIM_QUANT_XoQ	28
ACTION_desc	11	MAX_QUANT_power	7	TRIM_QUANT_CTs	29
ACTION_soln	12	MAX_QUANT_PoV	8	TRIM_QUANT_Tmargs	30
ACTION_endfile	13	MAX_QUANT_alt	9	TRIM_QUANT_Tmargt	31
ACTION_endcase	14	MAX_QUANT_Pmargin	10	TRIM_QUANT_Tmarge	32
ACTION_endjob	15	MAX_QUANT_Qmargin	11	TRIM_QUANT_betac	33
STATE_newcase	1	MAX_QUANT_PQmargin	12	TRIM_QUANT_betas	34
STATE_onecase	2	MAX_QUANT_Jmargin	13	TRIM_QUANT_hubMx	35
STATE_endofjob	3	MAX_QUANT_PJmargin	14	TRIM_QUANT_hubMy	36
STATE_init	1	MAX_QUANT_QJmargin	15	TRIM_QUANT_hubQ	37
STATE_size	2	MAX_QUANT_PQJmargin	16	TRIM_QUANT_wingL	38
STATE_miss	3	MAX_QUANT_Bmargin	17	TRIM_QUANT_wingfL	39
STATE_perf	4	MAX_QUANT_Lmargin	18	TRIM_QUANT_CL	40
STATE_maps	5	MAX_QUANT_Tmargs	19	TRIM_QUANT_Lmargin	41
STATE_out	6	MAX_QUANT_Tmargt	20	TRIM_QUANT_tailL	42
SIZE_perf_engine	1	MAX_QUANT_Tmarge	21	TRIM_VAR_not_found	0
SIZE_perf_rotor	2	MAX_VAR_none	0	TRIM_VAR_pitch	-1
SIZE_perf_none	3	MAX_VAR_vel	-1	TRIM_VAR_roll	-2
SIZE_engine_engn	1	MAX_VAR_ROC	-2	TRIM_VAR_ROC	-3
SIZE_engine_none	2	MAX_VAR_side	-3	TRIM_VAR_side	-4
SIZE_jet_jet	1	MAX_VAR_alt	-4	TRIM_VAR_speed	-5
SIZE_jet_none	2	MAX_VAR_turn	-5	TRIM_VAR_turn	-6
SIZE_charge_chrg	1	MAX_VAR_pullup	-6	TRIM_VAR_pullup	-7
SIZE_charge_none	2	MAX_VAR_xaccF	-7	TRIM_VAR_Vtip	-8
SIZE_rotor_none	1	MAX_VAR_yaccF	-8	TRIM_VAR_Nspec	-9
SIZE_rotor_radius	2	MAX_VAR_zaccF	-9	AERO_VAR_none	0
SIZE_rotor_thrust	3	MAX_VAR_xaccI	-10	AERO_VAR_not_found	-1
SET_rotor_radius	1	MAX_VAR_yaccI	-11	AERO_VAR_alpha	-2
SET_rotor_DL	2	MAX_VAR_zaccI	-12	AERO_VAR_beta	-3
SET_rotor_ratio	3	MAX_VAR_xaccG	-13	RCCONFIG_rotorcraft	0
SET_rotor_scale	4	MAX_VAR_yaccG	-14	RCCONFIG_helicopter	1
SET_rotor_not_radius	5	MAX_VAR_zaccG	-15	RCCONFIG_tandem	2
SET_wing_area	1	MAX_VAR_pitch	-16	RCCONFIG_coaxial	3

SET_wing_WL	2	MAX_VAR_roll	-17	RCCONFIG_tiltrotor	4
SET_wing_not_area	3	MAX_VAR_Vtip	-18	RCCONFIG_compound	5
SET_wing_span	4	MAX_VAR_Nspec	-19	RCCONFIG_multicopter	6
SET_wing_ratio	5	SET_vel_general	1	RCCONFIG_airplane	7
SET_wing_radius	6	SET_vel_hover	2	ROTORCONFIG_main	1
SET_wing_width	7	SET_vel_vert	3	ROTORCONFIG_tail	2
SET_wing_hub	8	SET_vel_right	4	ROTORCONFIG_prop	3
SET_wing_panel	9	SET_vel_left	5	ROTORCONFIG_tandem	4
SET_wing_not_span	10	SET_vel_rear	6	ROTORCONFIG_coaxial	5
SET_tank_input	1	SET_vel_Vfwd	7	ROTORCONFIG_tiltrotor	6
SET_tank_miss	2	SET_vel_Vmag	8	ROTORCONFIG_not_twin	7
SET_tank_misspower	3	SET_vel_climb	9	SET_geom_standard	0
SET_tank_fmiss	4	SET_vel_VNE	10	SET_geom_tiltrotor	1
SET_SDGW_input	1	SET_vel_takeoff	11	SET_geom_coaxial	2
SET_SDGW_fDGW	2	SET_vel2_TAS	1	SET_geom_tandem	3
SET_SDGW_fWMTO	3	SET_vel2_CAS	2	SET_geom_tailrotor	4
SET_SDGW_maxfuel	4	SET_vel2_IAS	3	SET_geom_multicopter	5
SET_SDGW_perf	5	SET_vel2_Mach	4	MODEL_twin_none	0
SET_WMTO_input	1	SET_atmos_input	-1	MODEL_twin_sidebyside	1
SET_WMTO_fDGW	2	SET_atmos_dens	-2	MODEL_twin_coaxial	2
SET_WMTO_fSDGW	3	SET_atmos_notair	-3	MODEL_twin_tandem	3
SET_WMTO_maxfuel	4	SET_atmos_std	1	MODEL_twin_multirotor	4
SET_WMTO_perf	5	SET_atmos_std_dtemp	2	tablevar_none	0
SET_limit_input	1	SET_atmos_std_temp	3	tablevar_V	1
SET_limit_Ratio	2	SET_atmos_polar	4	tablevar_Vh	2
SET_limit_Pav	3	SET_atmos_polar_dtem	5	tablevar_mu	3
SET_limit_Preq	4	SET_atmos_polar_temp	6	tablevar_muz	4
SET_GW_DGW	1	SET_atmos_trop	7	tablevar_alpha	5
SET_GW_SDGW	2	SET_atmos_trop_dtemp	8	tablevar_muTPP	6
SET_GW_WMTO	3	SET_atmos_trop_temp	9	tablevar_muzTPP	7
SET_GW_fDGW	4	SET_atmos_hot	10	tablevar_alphaTPP	8
SET_GW_fSDGW	5	SET_atmos_hot_dtemp	11	tablevar_CTs	9
SET_GW_fWMTO	6	SET_atmos_hot_temp	12	tablevar_Mx	10
SET_GW_input	7	SET_atmos_hot_table	13	tablevar_Mtip	11

SET_GW_maxP	8	SET_Vtip_input	1	tablevar_Mat	12
SET_GW_maxQ	9	SET_Vtip_ref	2	SET_panel_free	0
SET_GW_maxPQ	10	SET_Vtip_speed	3	SET_panel_span	1
SET_GW_maxJ	11	SET_Vtip_conv	4	SET_panel_bratio	2
SET_GW_maxPJ	12	SET_Vtip_hover	5	SET_panel_edge	3
SET_GW_maxQJ	13	SET_Vtip_cruise	6	SET_panel_station	4
SET_GW_maxPQJ	14	SET_Vtip_man	7	SET_panel_radius	5
SET_GW_source	15	SET_Vtip_OEI	8	SET_panel_width	6
SET_GW_fsource	16	SET_Vtip_xmsn	9	SET_panel_hub	7
SET_GW_payfuel	17	SET_Vtip_mu	10	SET_panel_adjust	8
SET_GW_paymiss	18	SET_Vtip_Mtip	11	SET_panel_area	9
SET_UL_pay	1	SET_Vtip_Mat	12	SET_panel_Sratio	10
SET_UL_fuel	2	SET_Vtip_Nrotor	13	SET_panel_chord	11
SET_UL_payfuel	3	STATE_LG_default	0	SET_panel_cratio	12
SET_UL_miss	4	STATE_LG_extend	1	SET_panel_taper	13
SET_UL_paymiss	5	STATE_LG_retract	2	SET_tail_area	1
SET_pay_none	1	TRIM_QUANT_not_found	0	SET_tail_vol	2
SET_pay_input	2	TRIM_QUANT_forcex	1	SET_tail_span	3
SET_pay_delta	3	TRIM_QUANT_forcey	2	SET_tail_AR	4
SET_pay_scale	4	TRIM_QUANT_forcez	3	SET_tail_chord	5
KIND_MissSeg_taxi	1	TRIM_QUANT_momentx	4	MODEL_engine_RPTEM	1
KIND_MissSeg_dist	2	TRIM_QUANT_momenty	5	MODEL_engine_table	2
KIND_MissSeg_time	3	TRIM_QUANT_momentz	6	MODEL_engine_recip	3
KIND_MissSeg_hold	4	TRIM_QUANT_nz	7	MODEL_engine_comp	4
KIND_MissSeg_climb	5	TRIM_QUANT_nx	8	MODEL_engine_compreact	5
KIND_MissSeg_spiral	6	TRIM_QUANT_ny	9	MODEL_engine_motor	6
KIND_MissSeg_fuel	7	TRIM_QUANT_power	10	MODEL_engine_gen	7
KIND_MissSeg_burn	8	TRIM_QUANT_Pmargin	11	MODEL_engine_motorgen	8
KIND_MissSeg_takeoff	9	TRIM_QUANT_Qmargin	12	MODEL_engine_motorcell	9
SET_takeoff_none	0	TRIM_QUANT_powerEG	13	MODEL_jet_RPJEM	1
SET_takeoff_start	1	TRIM_QUANT_Emargin	14	MODEL_jet_react	2
SET_takeoff_grounderun	2	TRIM_QUANT_thrust	15	MODEL_jet_simple	3
SET_takeoff_enginfail	3	TRIM_QUANT_Jmargin	16	MODEL_charge_fuelcell	1
SET_takeoff_liftoff	4	TRIM_QUANT_charge	17	MODEL_charge_solarcell	2

## Chapter 4

**Common: Job**

Variable	Type	Description	Default
version	c*6	NDARC Version (set by main program) number n.n	
modification	c*32	modification	
versionout	c*64	string for headers ( <code>Version n.n, modification "xxx"</code> )	
INIT_input	int	+ Initialization + input parameters (0 default, 1 last case input, 2 last case solution)	1
INIT_data	int	+ other parameters (0 default, 1 start of last case, 2 end of last case)	0
		 <b>INIT_input:</b> if default, all input variables set to default values if last-case-input, then case inherits input at beginning of previous case if last-case-solution, then case inherits input at end of previous case use INIT_input=2 to analyze case #1 design in subsequent cases <b>INIT_data:</b> if always start-last-case, then case starts from default if default, all other variables set to default values	
ACT_error	int	+ Errors + action on error (0 none, 1 exit)	1
ACT_version	int	+ action on version mismatch in input (0 none, 1 exit)	0
OPEN_status	int	+ File open + status keyword for write (0 unknown, 1 replace, 2 new, 3 old)	2

		+ Input/output unit numbers	
		+ input	
nuin	int	+ standard input	5
nufile	int	+ secondary file input	40
		+ output	
nuout	int	+ standard output	6
nudesign	int	+ design (DESIGNn)	41
nuperf	int	+ performance (PERFn)	42
nuaero	int	+ airframe aerodynamics (AEROn)	43
nuengine	int	+ engine performance (ENGINEn)	44
nuggeom	int	+ geometry output (GEOMETRYn)	45
nuacd	int	+ aircraft description (AIRCRAFTn)	46
nusoln	int	+ solution (SOLUTIONn)	47
nusketch	int	+ sketch output (SKETCHn)	48
nuerror	int	+ errors (ERRORn)	49

---

default input/output unit numbers usually acceptable

default OPEN\_status can be changed as appropriate for computer OS

---

		Analysis	
kcase	int	current case number	
ncase	int	number of cases (maximum ncasemax)	
case_state	int	case state	
job_state	int	job state	
out_design_state	int	design output state (1 file open)	
out_perf_state	int	performance output state (1 file open)	
out_geom_state	int	geometry output state (1 file open)	
out_error_state	int	errors output state (1 file open)	
nuinit	int	nuout or nuerror	
fscratch	FltState	scratch structure	
		Input	
kind_input	int	file input status (0 for primary file, 1 for secondary file, 2 for aircraft or solution file)	
nread	int	unit number for input (nuin for primary file, nufile for secondary file)	

ninputfile	int	Input file identification (stored from action=IDENT data)
input_title(nfilemax)	c*80	number of identifications (maximum nfilemax; first is standard input)
input_created(nfilemax)	c*20	title creation date
theDesign(ncasemax)	Design	Design
theInput	Design	Input
theLastCaseInput	Design	Input from last case
		system data = Job + theDesign(ncase) + theInput + theLastCaseInput
		all data structure parameters = input (can be changed by analysis) or other (generated by analysis)
		theInput used for input (not changed by analysis)
		theLastCaseInput used to print only what changed from last case
		after case input concluded, kcase incremented and theInput copied to theDesign(kcase)

CPUtime_case_start(ncasemax)	real	CPU time
CPUtime_case_end(ncasemax)	real	case start
CPUtime_case(ncasemax)	real	case end
CPUtime_job	real	case
		job
		Clock time
DateTime_case_start(8,ncasemax)	int	case start
DateTime_case_end(8,ncasemax)	int	case end
ElapsedTime_case(ncasemax)	real	case
ElapsedTime_job	real	job

Case dimensions	
nrotor_case	int
nwing_case	int
ntail_case	int
ntank_case	int
npropulsion_case	int
nenginegroup_case	int
njetgroup_case	int
nchargegroup_case	int
nenginemodel_case	int
nengineparamn_case	int
nenginetable_case	int
nrecipmodel_case	int
ncompressormodel_case	int
nmotormodel_case	int
njetmodel_case	int
nfuelcellmodel_case	int
nsolarcellmodel_case	int
nbatterymodel_case	int
ncontrol_case	int
nstate_control_case	int
npanel_case(nwingmax)	int
mauxtanksizes_case(ntankmax)	int
ngear_case(npropmax)	int
nstate_trim_case	int
mtrim_case(ntrimstatemax)	int
nwoful_case	int
Job constants	
pi	real
twopi	real
halfpi	real
degrad	real
raddeg	real

number of rotors (Aircraft)  
 number of wings (Aircraft)  
 number of tails (Aircraft)  
 number of fuel tank systems (Aircraft)  
 number of propulsion groups (Aircraft)  
 number of engine groups (Aircraft)  
 number of jet groups (Aircraft)  
 number of charge groups (Aircraft)  
 number of engine models (Aircraft)  
 number of engine model parameters (Aircraft)  
 number of engine tables (Aircraft)  
 number of reciprocating engine models (Aircraft)  
 number of compressor models (Aircraft)  
 number of motor models (Aircraft)  
 number of jet models (Aircraft)  
 number of fuel cell models (Aircraft)  
 number of solar cell models (Aircraft)  
 number of battery models (Aircraft)  
 number of controls (Aircraft)  
 number of control states (Aircraft)  
 number of wing panels (Wing)  
  
 number of aux tank sizes (FuelTank)  
 number of drive system states (Propulsion)  
 number of trim states (Aircraft)  
 number of trim variables (Aircraft)  
 number of other fixed useful load categories (System)

$\pi$   
 $2\pi$   
 $\pi/2$   
 degree/radian =  $180/\pi$   
 radian/degree =  $\pi/180$

		Case constants
gravity	real	gravity $g$ (ft/sec <sup>2</sup> or m/sec <sup>2</sup> )
density_sls	real	SLS density $\rho_0$ (slug/ft <sup>3</sup> or kg/m <sup>3</sup> )
csound_sls	real	SLS speed of sound $c_s$ (ft/sec or m/sec)
		Conversion factors
powerconv	real	power (hp from ft-lb/sec; kW from m-N/sec)
knotsconv	real	speed (knots from ft/sec or m/sec)
nmconv	real	range (nm from ft or m)
weightconv	real	weight (lb from lb; kg from N)
massconv	real	mass (slug from lb; kg from kg)
volumeconv	real	volume (gal from ft <sup>3</sup> ; liter from m <sup>3</sup> )
		Conversion factors for scaled $D/q$
DoQconv23	real	$D/q = kW^{2/3}$ (ft <sup>2</sup> from $k=m^2/kg^{2/3}$ ; m <sup>2</sup> from $k=ft^2/lb^{2/3}$ ; depending on Units_Dscale)
DoQconv12	real	$D/q = kW^{1/2}$ (ft <sup>2</sup> from $k=m^2/kg^{1/2}$ ; m <sup>2</sup> from $k=ft^2/lb^{1/2}$ ; depending on Units_Dscale)
		Conversion factors for mission and flight condition input
uconv_vel	real	velocity (knots from input)
uconv_alt	real	altitude (ft or m from input)
uconv_pay	real	payload (lb or kg from input)
uconv_time	real	time (minutes from input)
uconv_dist	real	distance (nm from input)
uconv_drag	real	drag (ft <sup>2</sup> or m <sup>2</sup> from input)
uconv_ROC	real	rate of climb (ft/sec or m/sec from input)
		Conversion factors for weight equations
wtconv_hp	real	power (hp from hp or kW)
wtconv_lb	real	weight (lb from lb or kg)
wtconv_frc	real	force (lb from lb or N)
wtconv_ft	real	length (ft from ft or m)
wtconv_ft2	real	area (ft <sup>2</sup> from ft <sup>2</sup> or m <sup>2</sup> )
wtconv_gal	real	fuel (gal from gal or liter)
wtconv_slug	real	slug (slug/lb or kg/kg)
wtconv_in	real	inches (in/ft or m/m)
wtconv_kW	real	power (kW from hp or kW)
wtconv_m	real	meter (m from ft or m)

Econv_kg	real	Conversion factors for energy weight (kg from lb or kg)
Econv_L	real	volume (liter from gal or liter)
Econv_dE	real	energyflow (MJ/hr from hp or kW)
DLconv	real	Conversion factors disk loading (lb/ft <sup>2</sup> from lb/ft <sup>2</sup> or N/m <sup>2</sup> )
tonconv	real	ton (from lb or kg)
rangeconv	real	range for fuel=1%GW (nm from 1/(lb/hp-hr) or 1/(kg/kW-hr), times ln(1/.99))
endconv	real	endurance for fuel=1%GW (min from hr, times ln(1/.99))
WRITEenergy_case	int	<b>Output</b> write fuel energy for burn weight
Uwrite	int	Units for output analysis units (from Cases)
Uwrite_temp	int	mission units, temperature (from Cases)
Ukts	c*10	speed (knots, mph, kph, ft/sec, m/sec); uconv_vel
UROC	c*10	rate of climb (ft/min, ft/sec, m/sec); uconv_ROC
Udist	c*10	distance (nm, mile, km); uconv_dist
Utime	c*10	time (min, hr); uconv_time
UDoQ	c*10	drag (ft <sup>2</sup> , m <sup>2</sup> ); uconv_drag
Upay	c*10	payload (lb, kg); uconv_pay
Ualt	c*10	altitude (ft, m); uconv_alt
Ulen	c*10	length
Uarea	c*10	area
Uvel	c*10	velocity
Utemp	c*10	temperature
Uwt	c*10	weight
Upwr	c*10	power
Ufuelflow	c*10	fuel flow
Umassflow	c*10	mass flow
Usfc	c*10	sfc
Utsfc	c*10	thrust sfc
Uspecrange	c*10	specific range
Ufueleff	c*10	fuel efficiency
Uproductivity	c*10	productivity

Ufrc	c*10	force
Umom	c*10	moment
Uque	c*10	dynamic pressure
Udens	c*10	density
Udiskload	c*10	disk loading

## Chapter 5

**Structure: Design**

Variable	Type	Description	Default
Cases	Cases	Cases	
Size	Size	Size Aircraft for Design Conditions and Missions	
OffDesign	OffDesign	Mission Analysis	
Performance	Performance	Flight Performance Analysis	
MapEngine	MapEngine	Map of Engine Performance	
MapAero	MapAero	Map of Airframe Aerodynamics	
Solution	Solution	Solution Procedures	
Cost	Cost	Cost	
Emissions	Emissions	Emissions	
Aircraft	Aircraft	Aircraft	
Systems	Systems	Systems	
Fuselage	Fuselage	Fuselage	
LandingGear	LandingGear	Landing Gear	
Rotor(nrotormax)	Rotor	Rotors	
Wing(nwingmax)	Wing	Wings	
Tail(ntailmax)	Tail	Tails	
FuelTank(ntankmax)	FuelTank	Fuel Tank Systems	
Propulsion(npropmax)	Propulsion	Propulsion Groups	
EngineGroup(nengmax)	EngineGroup	Engine Groups	
JetGroup(njetmax)	JetGroup	Jet Groups	
ChargeGroup(nchrgmax)	ChargeGroup	Charge Groups	
EngineModel(nengmax)	EngineModel	Engine Models	
EngineParamN(nengpmmax)	EngineParam	Engine Model Parameters	
EngineTable(nengmax)	EngineTable	Engine Tables	
RecipModel(nengmax)	RecipModel	Reciprocating Engine Models	
CompressorModel(nengmax)	CompressorModel	Compressor Models	
MotorModel(nengmax)	MotorModel	Motor Models	
JetModel(njetmax)	JetModel	Jet Models	

FuelCellModel(nchrgmax)	FuelCellModel
SolarCellModel(nchrgmax)	Fuel Cell Models
BatteryModel(ntankmax)	SolarCellModel
	Solar Cell Models
	BatteryModel
	Battery Models

## Chapter 6

**Structure: Cases**

Variable	Type	Description	Default
		+ Case Description	
title	c*100	+ title	
subtitle1	c*100	+ subtitle	
subtitle2	c*100	+ subtitle	
subtitle3	c*100	+ subtitle	
notes	c*1000	+ notes	
ident	c*32	+ identification	
timedate	c*20	time-date identification	
		+ Case Tasks (0 for none)	
TASK_Size	int	+ size aircraft for design conditions	1
TASK_Mission	int	+ mission analysis	1
TASK_Perf	int	+ flight performance analysis	1
TASK_Map_engine	int	+ map of engine performance	0
TASK_Map_aero	int	+ map of airframe aerodynamics	0
<hr/>			
Turn off all tasks to just initialize and check the model, including geometry and weights			
<hr/>			
		+ Write Input Parameters	
WRITE_input	int	+ selection (0 none, 1 all, 2 first case)	2
WRITE_input_TechFactors	int	+ TechFactors (0 for none)	1
WRITE_input_Geometry	int	+ Geometry (0 for none)	1

		+ Output	
		+ selection (0 for none)	
OUT_design	int	+ design file	0
OUT_perf	int	+ performance file	0
OUT_geometry	int	+ geometry file	0
OUT_aircraft	int	+ aircraft description file	0
OUT_solution	int	+ solution file (1 text, 2 binary)	0
OUT_sketch	int	+ sketch file	0
OUT_error	int	+ errors file	0
		+ file name or logical name (blank for default logical name)	
FILE_design	c*256	+ design file (DESIGNn)	''
FILE_perf	c*256	+ performance file (PERFn)	''
FILE_geometry	c*256	+ geometry file (GEOMETRYn)	''
FILE_aircraft	c*256	+ aircraft description file (AIRCRAFTn)	''
FILE_solution	c*256	+ solution file (SOLUTIONn)	''
FILE_sketch	c*256	+ sketch file (SKETCHn)	''
FILE_engine	c*256	+ engine performance file (ENGINEn)	''
FILE_aero	c*256	+ airframe aerodynamics file (AEROn)	''
FILE_error	c*256	+ errors file (ERRORn)	''
		+ formats	
WRITE_page	int	+ page control (0 none, 1 form feed, 2 extended Fortran)	1
WRITE_design	int	+ design (1 first case only, 2 all cases)	2
WRITE_wt_level	int	+ weight statement, max level (1 to 5)	5
WRITE_wt_long	int	+ weight statement, style (0 omit zero lines, 1 all lines)	0
WRITE_wt_comp	int	+ weight statement, component (0 for none)	1
WRITE_energy	int	+ fuel energy for burn weight (0 for none)	0
WRITE_flight	int	+ flight state, component loads (0 for none)	1
WRITE_files	int	+ design, performance, or geometry (1 single file of all cases)	0
WRITE_sketch_load	int	+ sketch component forces (0 none)	1
WRITE_sketch_cond	int	+ sketch flight condition (0 none, 1 design, 2 performance)	0
ksketch	int	+ flight condition number	0

---

selected files are generated for each case (n = case number in default name)  
 option single file of all cases for design, performance, or geometry (form feed between cases)  
 size and analysis tasks can produce design and performance files  
     same information as in standard output, in tab-delimited form  
 aircraft or solution file can be read by subsequent case or job  
 geometry file has information for graphics and other analyses  
 sketch file has information to check geometry and solution (DXF format)  
     flight condition required to use Euler angles, control and incidence, component forces  
 engine map task (TASK\_Map\_engine) produces engine performance file  
 airframe aerodynamics map task (TASK\_Map\_aero) produces airframe aerodynamics file  
 error messages to standard output (OUT\_error=0) or separate file (OUT\_error=1)

---

		+ Gravity	
SET_grav	int	+ specification (0 standard, 1 input)	0
grav	real	+ input gravitational acceleration $g$	
		+ Environment	
density_ref	real	+ reference density (0. for air at SLS)	0.
csound_ref	real	+ reference speed of sound (0. for air at SLS)	0.
		+ Units	
Units	int	+ analysis units (1 English, 2 SI)	1
		+ units for input of missions and flight conditions	
Units_miss	int	+ override default units (0 no, 1 yes)	0
Units_vel	int	+ velocity units (0 knots; 1 mile/hr, 2 km/hr, 3 ft/sec, 4 m/sec)	0
Units_alt	int	+ altitude units (0 ft or m; 1 ft, 2 m)	0
Units_pay	int	+ payload units (0 lb or kg; 1 lb, 2 kg)	0
Units_time	int	+ time units (0 minutes; 1 hours)	0
Units_dist	int	+ distance units (0 nm; 1 miles; 2 km)	0
Units_temp	int	+ temperature (0 F or C; 1 F, 2 C)	0
Units_drag	int	+ drag units (0 ft <sup>2</sup> or m <sup>2</sup> ; 1 ft <sup>2</sup> , 2 m <sup>2</sup> )	0
Units_ROC	int	+ rate of climb units (0 ft/min; 1 ft/sec, 2 m/sec)	0
		+ units for parameters	
Units_Dscale	int	+ input $D/q$ scaled with gross weight (0 analysis default, 1 English, 2 SI)	0

---

Analysis units: must be same for all cases in job  
 English: ft-slug-sec-F; weights in lb, power in hp (internal units)  
 SI: m-kg-sec-C; weights in kg, power in kW (internal units)  
 Weight in the design description is actually mass  
 pounds converted to slugs using reference gravitational acceleration  
 Default units for flight condition and mission: override with Units\_xxx  
 speed in knots, time in minutes, distance in nm, ROC in ft/min

---

Input for case	
inCases	int
inSize	int
inSizeCondition(nfltmax)	int
inSizeMission(nmissmax)	int
inOffDesign	int
inOffMission(nmissmax)	int
inPerformance	int
inPerfCondition(nfltmax)	int
inMapEngine	int
inMapAero	int
inSolution	int
lastSizeCondition	int
lastSizeMission	int
lastOffMission	int
lastPerfCondition	int

Cases  
 Size  
 SizeCondition  
 SizeMission  
 OffDesign  
 OffMission  
 Performance  
 PerfCondition  
 MapEngine  
 MapAero  
 Solution  
 Last input  
 SizeCondition  
 SizeMission  
 OffMission  
 PerfCondition

---

case input of other structures recorded in Aircraft structure  
 there must be input for systems, fuselage, landing gear, fuel tank  
 there must be input for all structures used

---

## Chapter 7

**Structure: Size**

Variable	Type	Description	Default
SizeParam	SizeParam	Size Aircraft for Design Conditions and Missions Parameters	
FltCond(nfltmax)	FltCond	Sizing Flight Conditions conditions	
FltState(nfltmax)	FltState	conditions	
Mission(nmissmax)	Mission	Design Missions missions	

## Chapter 8

**Structure: SizeParam**

Variable	Type	Description	Default
		+ Size Aircraft for Design Conditions and Missions	
title	c*100	+ title	
notes	c*1000	+ notes	
		+ Sizing Method	
SIZE_perf(npropmax)	c*16	+ quantity sized from performance	'engine'
SIZE_engine(nengmax)	c*16	+ engine group sized from performance	'none'
SIZE_jet(njetmax)	c*16	+ jet group sized from performance	'jet'
SIZE_charge(nchrgmax)	c*16	+ charge group sized from performance	'none'
SIZE_param	int	+ parameter iteration (0 not required)	0
SET_rotor(nrotormax)	c*32	+ rotor parameters	'DL+Vtip+CWs'
SET_wing(nwingmax)	c*16	+ wing parameters	'WL+aspect'
FIX_DGW	int	+ design gross weight (0 calculated, 1 fixed)	0
FIX_WE	int	+ weight empty (0 calculated, 1 fixed, 2 scaled)	0
SET_tank(ntankmax)	c*16	+ fuel tank capacity	'miss'
SET_SDGW	c*16	+ structural design gross weight	'f(DGW)'
SET_WMTO	c*16	+ maximum takeoff weight	'f(DGW)'
SET_limit_ds(npropmax)	c*16	+ drive system torque limit	'ratio'

size task (Cases%TASK\_Size=1): at least one nFltCond or nMission

no size task (Cases%TASK\_Size=0): size input specifies how fixed aircraft determined

SIZE\_perf:

'engine' = power from maximum of power required for all designated conditions and missions

'rotor' = radius from maximum of power required for all designated conditions and missions

'none' = power required not used to size engine/rotor

flight conditions and missions (max GW, max effort, or trim)

that have zero power margin are not used to size engine or rotor

that have zero torque margin are not used to size transmission

## SIZE\_engine:

'engine' = power from maximum of power required for all designated conditions and missions  
 flight conditions and missions (max GW, max effort, or trim)  
 that have zero power margin are not used to size engine group  
 designated only for engine groups that consume power  
 engine groups that produce power sized with propulsion group (SIZE\_perf)  
 'none' = power required not used to size engine group

## SIZE\_jet:

'jet' = thrust from maximum of thrust required for all designated conditions and missions  
 'none' = thrust required not used to size jet group  
 flight conditions and missions (max GW, max effort, or trim)  
 that have zero thrust margin are not used to size jet group

## SIZE\_charge:

'charge' = power from maximum of power required for all designated conditions and missions  
 'none' = power required not used to size charge group

'SIZE\_param': use to force parameter iteration

SET\_rotor, rotor parameters: required for each rotor

rotor parameters: input three or two quantities, others derived

SET\_rotor = input three of ('radius' or disk loading 'DL' or 'ratio'), 'CWs', 'Vtip', 'sigma'  
 except if SIZE\_perf='rotor': SET\_rotor = input two of 'CWs', 'Vtip', 'sigma' for one or more main rotors  
 SET\_rotor = 'ratio+XX+XX' to calculate radius from radius of another rotor  
 tip speed is Vtip\_ref for drive state #1

rotor parameters for an antitorque or aux thrust rotor:

SET\_rotor = input three of ('radius' or 'DL' or 'ratio' or 'scale'), 'CWs', 'Vtip', 'sigma'  
 SET\_rotor = 'scale+XX+XX' to calculate tail rotor radius from parametric equation,  
 using main rotor radius and disk loading  
 thrust from designated sizing conditions and missions (DESIGN\_thrust)

SET\_wing, wing parameters: for each wing; input two quantities, other two derived

SET\_wing = input two of ('area' or wing loading 'WL'), ('span' or 'ratio' or 'radius' or 'width' or 'hub' or 'panel'),  
 'chord', aspect ratio 'aspect'

SET\_wing = 'ratio+XX' to calculate span from span of another wing

SET\_wing = 'radius+XX' to calculate span from rotor radius

SET\_wing = 'width+XX' to calculate span from rotor radius, fuselage width, and clearance (tiltrotor)

SET\_wing = 'hub+XX' to calculate span from rotor hub position (tiltrotor)  
 SET\_wing = 'panel+XX' to calculate span from wing panel widths  
 FIX\_DGW: input DGW restricts SIZE\_perf, SET\_GW parameters  
 FIX\_WE: fixed or scaled weight empty obtained by adjusting contingency weight  
     scaled with design gross weight:  $W_E = dWE + fWE * W_D$   
 SET\_tank, fuel tank sizing: usable fuel capacity Wfuel\_cap (weight) or Efuel\_cap (energy)  
     'input' = input Wfuel\_cap or Efuel\_cap  
     'miss' = calculate from mission fuel used  
         Wfuel\_cap or Efuel\_cap = max(ffuel\_cap\*(maximum mission fuel), (maximum mission fuel)+(reserve fuel))  
         'miss+power' = calculate from mission fuel used and mission battery discharge power  
         'f(miss)' = function of mission fuel used  
         Wfuel\_cap or Efuel\_cap = dfuel\_cap + ffuel\_cap\*((maximum mission fuel)+(reserve fuel))  
 SET\_SDGW, structural design gross weight:  
     'input' = input  
     'f(DGW)' = based on DGW;  $W_{SD} = dSDGW + fSDGW * W_D$   
     'f(WMTO)' = based on WMTO;  $W_{SD} = dSDGW + fSDGW * W_{MTO}$   
     'maxfuel' = based on fuel state;  $W_{SD} = dSDGW + fSDGW * W_G$ ,  $W_G = W_D - W_{fuel\_DGW} + fFuelSDGW * W_{fuel\_cap}$   
     'perf' = calculated from maximum gross weight at SDGW sizing conditions (DESIGN\_sdgw)  
     Aircraft input parameters: dSDGW, fSDGW, fFuelSDGW  
 SET\_WMTO, maximum takeoff weight:  
     'input' = input  
     'f(DGW)' = based on DGW;  $W_{MTO} = dWMTO + fWMTO * W_D$   
     'f(SDGW)' = based on SDGW;  $W_{MTO} = dWMTO + fWMTO * W_{SD}$   
     'maxfuel' = based on maximum fuel;  $W_{MTO} = dWMTO + fWMTO * W_G$ ,  $W_G = W_D - W_{fuel\_DGW} + W_{fuel\_cap}$   
     'perf' = calculated from maximum gross weight at WMTO sizing conditions (DESIGN\_wmto)  
     Aircraft input parameters: dWMTO, fWMTO  
 SET\_limit\_ds, drive system torque limit: input (use Plimit\_xx) or calculate (from fPlimit\_xx)  
     'input' = Plimit\_ds input  
     'ratio' = from takeoff power,  $fPlimit_{ds} \sum(N_{eng} P_{eng})$   
     'Pav' = from engine power available at transmission sizing conditions and missions (DESIGN\_xmsn)  
          $fPlimit_{ds}(\Omega_{ref}/\Omega_{prim}) \sum(N_{eng} P_{av})$   
     'Preq' = from engine power required at transmission sizing conditions and missions (DESIGN\_xmsn)  
          $fPlimit_{ds}(\Omega_{ref}/\Omega_{prim}) \sum(N_{eng} P_{req})$

engine shaft limit also uses EngineGroup%SET\_limit\_es  
 rotor shaft limit also uses Rotor%SET\_limit\_rs, rotor limits only use power required (or input)  
 convergence may be improved if do not apply drive system limits to power available (FltState%SET\_Plimit=off)  
 for transmission sizing conditions and mission segments (DESIGN\_xmsn)

input required to transmit sized rotorcraft to another job (through aircraft description file) or to following case:

turn off sizing: Cases%TASK\_size=0, Cases%TASK\_mission=1, Cases%TASK\_perf=1

fix aircraft: use ACTION='nosize', or

SIZE\_perf='none', SIZE\_engine='none', SIZE\_jet='none', SIZE\_charge='none'

SET\_rotor='radius+Vtip+sigma', SET\_wing='area+span', FIX\_DGW=1

SET\_tank='input', SET\_limit\_ds='input', SET\_SDGW='input', SET\_WMTO='input'

with wing panels: SET\_wing='WL+panel', Wing%SET\_panel='width+taper','span+taper'

---

#### Specification

iSIZE_perf(npropmax)	int	performance (SIZE_perf_engine, rotor, none)
iSIZE_engine(nengmax)	int	performance (SIZE_engine_engn, none)
iSIZE_jet(njetmax)	int	performance (SIZE_jet_jet, none)
iSIZE_charge(nchrgrmax)	int	performance (SIZE_charge_chrg, none)
iSIZE_rotor(nrotormax)	int	rotor sized (SIZE_rotor_radius, thrust, none)
iSET_rotor_radius(nrotormax)	int	rotor radius (SET_rotor_radius, DL, ratio, scale, not_radius)
FIX_rotor_CWs(nrotormax)	int	rotor $C_W/\sigma$ (1 fixed, 0 not)
FIX_rotor_Vtip(nrotormax)	int	rotor $V_{tip}$ (1 fixed, 0 not)
FIX_rotor_sigma(nrotormax)	int	rotor $\sigma$ (1 fixed, 0 not)
iSET_wing_area(nwingmax)	int	wing area (SET_wing_area, WL, not_area)
iSET_wing_span(nwingmax)	int	wing span (SET_wing_span, ratio, radius, width, hub, panel, not_span)
FIX_wing_chord(nwingmax)	int	wing chord (1 fixed, 0 not)
FIX_wing_AR(nwingmax)	int	wing aspect ratio (1 fixed, 0 not)
iSET_tank(ntankmax)	int	fuel tank (SET_tank_input, miss, misspower, fmiss)
iSET_SDGW	int	SDGW (SET_SDGW_input, fDGW, fWMTO, maxfuel, perf)
iSET_WMTO	int	WMTO (SET_WMTO_input, fDGW, fSDGW, maxfuel, perf)
iSET_limit_ds(npropmax)	int	drive system torque limit (SET_limit_input, ratio, Pav, Preq)

nSIZE_perf(npropmax)	int	Number of conditions and missions
nSIZE_engine(nengmax)	int	conditions and missions for size engine or rotor
nSIZE_jet(njetmax)	int	conditions and missions for size engine group
nSIZE_charge(nchrgmax)	int	conditions and missions for size jet group
nDESIGN_GW	int	conditions and missions for size charge group
nDESIGN_xmsn(npropmax)	int	design conditions and missions for DGW
nDESIGN_sdgw	int	design conditions and missions for transmission
nDESIGN_wmto	int	design conditions for SDGW
nDESIGN_tank	int	design conditions for WMTO
nDESIGN_thrust	int	design missions for fuel tank
		design conditions and missions for rotor thrust
kind_iter_size	int	Size aircraft
kind_iter_param	int	kind iteration, performance (0 none, 1 size engine or radius, or engine group, or jet group, or charge group)
issizeconv	int	kind iteration, parameters (0 none, 1 calculate parameters)
count_size	int	converged (0 not)
count_param	int	number of iterations, performance loop
count_total	int	number of iterations, parameter loop
error_engine(nengmax)	real	total number of iterations
error_jet(njetmax)	real	error ratio, engine
error_charge(nchrgmax)	real	error ratio, jet
error_rotor(nrotormax)	real	error ratio, charge
error_DGW	real	error ratio, rotor
error_xmsn(npropmax)	real	error ratio, DGW
error_sdgw	real	error ratio, Plimit
error_wmto	real	error ratio, structural design gross weight
error_tank	real	error ratio, maximum takeoff weight
error_thrust(nrotormax)	real	error ratio, Wfuelcap
error_WE	real	error ratio, thrust
Pratio(npropmax)	real	error ratio, WE
Eratio(nengmax)	real	ratio $P_{reqPG}/P_{avPG}$ (max all sizing conditions and missions)
Jratio(njetmax)	real	ratio $P_{reqEG}/P_{avEG}$ (max all sizing conditions and missions)
Cratio(nchrgmax)	real	ratio $T_{reqJG}/T_{avJG}$ (max all sizing conditions and missions)
nFltCond_out	int	ratio $P_{reqCG}/P_{avCG}$ (max all sizing conditions and missions)
		number of conditions for output

nMission_out	int	number of missions for output	
nFltCond	int	+ Sizing Flight Conditions + number of conditions (maximum nfltmax) + Design Missions	0
nMission	int	+ number of missions (maximum nmissmax)	0

---

input one condition (FltCond and FltState variables) in SizeCondition namelist

input one mission (MissParam, MissSeg, and FltState variables) in SizeMission namelist  
all mission segments are defined in this namelist, so MissSeg and FltState variables are arrays  
each variable gets one more dimension, first array index is always segment number

---

Chapter 9

---

**Structure: OffDesign**

Variable	Type	Description	Default
OffParam	OffParam	Mission Analysis	
Mission(nmissmax)	Mission	Parameters	
		Missions	

## Chapter 10

**Structure: OffParam**

Variable	Type	Description	Default
title	c*100	+ Mission Analysis + title	
notes	c*1000	+ notes	
nMission_out	int	Analyze mission number of missions for output	
nMission	int	+ Missions + number of missions (maximum nmissmax)	0
		mission analysis input required if Cases%TASK_Mission=1	
		input one mission (MissParam, MissSeg, and FltState variables) in OffMission namelist all mission segments are defined in this namelist, so MissSeg and FltState variables are arrays each variable gets one more dimension, first array index is always segment number	

Chapter 11

---

**Structure: Performance**

Variable	Type	Description	Default
PerfParam	PerfParam	Flight Performance Analysis Parameters	
		Performance Flight Conditions	
FltCond(nfltmax)	FltCond	conditions	
FltState(nfltmax)	FltState	conditions	

## Chapter 12

**Structure: PerfParam**

Variable	Type	Description	Default
title	c*100	+ Flight Performance Analysis + title	
notes	c*1000	+ notes	
nFltCond_out	int	Analyze performance	
nsweep_total	int	number of conditions for output (including sweeps) total number of sweep conditions	
nFltCond	int	+ Performance Flight Conditions + number of conditions (maximum nfltmax)	0
<hr/> flight performance analysis input required if Cases%TASK_Perf=1 <hr/> input one condition (FltCond and FltState variables) in PerfCondition namelist			

## Chapter 13

**Structure: MapEngine**

Variable	Type	Description	Default
title	c*100	+ Map of Engine Performance + title	
notes	c*1000	+ notes + Identification	
kEngineGroup	int	+ engine group	1
KIND_map	int	+ Kind (1 performance, 2 model)	1
		engine map only available for RPTEM model and reciprocating engine model (performance only)	
		engine map input required if Cases%TASK_Map_engine=1 only performance parameters or only model parameters used	
SET_var(5)	int	+ Performance + independent variables (0 none, 1 altitude, 2 temperature, 3 flight speed, 4 engine speed, 5 power) + first set	0
SET_var2(5)	int	+ second set	0
WRITE_header	int	+ output format (1 single header, 2 header for inner variable)	2
SET_atmos	c*12	+ atmosphere specification + altitude $h$ (Units_alt)	'std'
altitude_min	real	+ minimum	0.
altitude_max	real	+ maximum	20000.
altitude_inc	real	+ increment	1000.
altitude_base	real	+ baseline	0.

	+	temperature $\tau$ or temperature increment $\Delta T$ (Units_temp)	
temp_min	real	+	minimum 0.
temp_max	real	+	maximum 100.
temp_inc	real	+	increment 10.
temp_base	real	+	baseline 0.
		+	flight speed $V$ (TAS, Units_vel)
Vkts_min	real	+	minimum 0.
Vkts_max	real	+	maximum 200.
Vkts_inc	real	+	increment 50.
Vkts_base	real	+	baseline 0.
SET_rpm	int	+	engine speed $N$ (1 rpm, 2 percent) 2
Nturbine_min	real	+	minimum 90.
Nturbine_max	real	+	maximum 110.
Nturbine_inc	real	+	increment 5.
Nturbine_base	real	+	baseline 100.
SET_power	int	+	power required (1 power, 2 fraction of power available (0. to 1.+)) 2
power_min	real	+	minimum .1
power_max	real	+	maximum 1.
power_inc	real	+	increment .1
power_base	real	+	baseline 1.
STATE_IRS	int	+	IR suppressor system state (0 off, hot exhaust; 1 on, suppressed exhaust) 0
KIND_loss	int	+	installation losses (0 for none) 0

---

independent variables: 1 to 5 variables, last is innermost loop; outer loop is always rating quantities not identified as independent variables fixed at baseline values

SET\_atmos, atmosphere specification:

determines whether temp\_xxx is temperature or temperature increment

'std' = standard day at specified altitude (use altitude\_xxx)

'temp' = standard day at specified altitude, and specified temperature (use altitude\_xxx, temp\_xxx)

'dtemp' = standard day at specified altitude, plus temperature increment (use altitude\_xxx, temp\_xxx)

see FltState%SET\_atmos for other options (polar, tropical, and hot days)

---

		+ Model	
		+ flight speeds $V(\text{TAS}, \text{Units\_vel})$	
nV_model	int	+ number (maximum 10)	1
V_model(10)	real	+ values	0.
V_min	real	+ minimum	0.
V_max	real	+ maximum	400.
V_inc	real	+ increment	.50.
		+ temperature ratio $T/T_0$	
ntheta_model	int	+ number (maximum 10)	1
theta_model(10)	real	+ values	1.
theta_min	real	+ minimum	.8
theta_max	real	+ maximum	1.1
theta_inc	real	+ increment	.02
		+ engine speed, $N/N_{\text{spec}}$ (percent)	
fN_min	real	+ minimum	90.
fN_max	real	+ maximum	110.
fN_inc	real	+ increment	5.
		+ fraction static MCP power, $P/P_{0C}$	
fP_min	real	+ minimum	.1
fP_max	real	+ maximum	2.
fP_inc	real	+ increment	.1

---

RPTEM model

performance: fuel flow, mass flow, net jet thrust, optimum turbine speed  
 vs power fraction and airspeed (use fP and V\_model)  
 turbine speed: power ratio vs turbine speed and airspeed (use fN and V\_model)  
 power available: specific power, mass flow, power, fuel flow  
 vs temperature ratio (use theta and V\_model)  
 vs airspeed (use V and theta\_model)

---

		Specification	
kEngineModel	int	engine model	
iSET_atmos	int	atmosphere (SET_atmos_xxx)	
nSET_var	int	number of independent variable sets	

## Chapter 14

**Structure: MapAero**

Variable	Type	Description	Default
title	c*100	+ title	
notes	c*1000	+ notes + Tables	
KIND_table	int	+ kind (1 one-dimensional, 2 multi-dimensional) + aerodynamic loads (0 for components off)	1
SET_fuselage	int	+ fuselage and landing gear	1
SET_tail	int	+ tails	1
SET_wing	int	+ wings	1
SET_rotor	int	+ rotors	1
SET_engine	int	+ engines and fuel tank	1
airframe aerodynamics map input required if Cases%TASK_Map_aero=1			
multi-dimensional: generate 6 files of three-dimensional tables			
one file for each load=DRAG, SIDE, LIFT, ROLL, PITCH, YAW			
filename=FILE_aero//load or AEROOn//load			
one-dimensional: generate 1 file of all six loads			
function of single independent variable = var_lift(1)			
STATE_control	int	+ Operating Condition + aircraft control state	1
STATE_LG	c*12	+ landing gear state	'retract'
Nauxtank(nauxtankmax,ntankmax)	int	+ number of auxiliary fuel tanks $N_{auxtank}$ (each aux tank size)	0

SET_extkit	int	+	wing extension kit on aircraft (0 none, 1 present)	1
KIND_alpha	int	+	angle of attack and sideslip angle representation (1 conventional, 2 reversed)	1
SET_comp_control	int	+	use component control (0 for $c = Tc_{AC}$ ; 1 for $c = Tc_{AC} + c_0$ )	0
control(ncontmax)	real	+	aircraft controls	0.
tilt	real	+	tilt	0.
alpha	real	+	angle of attack $\alpha$	0.
beta	real	+	sideslip angle $\beta$	0.

---

landing gear state: STATE\_LG='extend', 'retract' (keyword = ext, ret)

---

		+	Independent variables	
var_lift(3)	c*16	+	lift	
var_drag(3)	c*16	+	drag	
var_side(3)	c*16	+	side force	
var_pitch(3)	c*16	+	pitch moment	
var_roll(3)	c*16	+	roll moment	
var_yaw(3)	c*16	+	yaw moment	
		+	Variable range	
		+	angle of attack and sideslip variation	
angle_lowinc	real	+	low range increment (deg)	2.
angle_highinc	real	+	high range increment (deg)	5.
angle_low	real	+	low range value (deg)	40.
angle_max	real	+	maximum value (deg)	180.
		+	control variation	
control_lowinc	real	+	low range increment (deg)	2.
control_highinc	real	+	high range increment (deg)	2.
control_low	real	+	low range value (deg)	45.
control_max	real	+	maximum value (deg)	90.
		+	third independent variable	
gamma_lowinc	real	+	low range increment (deg)	20.
gamma_highinc	real	+	high range increment (deg)	20.
gamma_low	real	+	low range value (deg)	60.
gamma_max	real	+	maximum value (deg)	60.

---

```

var_load identify independent variables
    only var_lift(1) used for KIND_table=one-dimensional
    values: 'alpha', 'beta', IDENT_control(ncontrol)
    var_load(2) blank for 1D table, var_load(3) blank for 2D table
    alpha/beta/controls/tilt fixed if not independent variable (tilt replace control(ktilt))
    assume control system defined so aircraft controls connected to flaperon, elevator, aileron, rudder

angle, control, gamma variation: by lowinc for -low to +low; by highinc to -max and +max
maximum total values = naeromax

```

---

	Operating Condition	
iSTATE_LG	int	landing gear state (STATE_LG_extend, retract)
nvar(6)	int	Independent variables (AERO_VAR_none, alpha, beta, or control number)
ivar(3,6)	int	number of independent variables variables (drag, side, lift, roll, pitch, yaw)
	Tables	
nang	int	number of angles (maximum naeromax)
ang(naeromax)	real	angle values
ncnt	int	number of controls (maximum naeromax)
cnt(naeromax)	real	control values
ngam	int	number of gamma (maximum naeromax)
gam(naeromax)	real	gamma values

## Chapter 15

**Structure: FltCond**

Variable	Type	Description	Default
		+ Sizing or Performance Flight Condition	
title	c*100	+ title	
label	c*8	+ label	
		+ Specification	
SET_GW	c*12	+ gross weight	'DGW'
GW	real	+ input gross weight $W_G$	0.
dGW	real	+ gross weight increment	0.
fGW	real	+ gross weight factor	1.
dPav(npropmax)	real	+ power increment, each propulsion group	0.
fPav(npropmax)	real	+ power factor, each propulsion group	1.
dTav(njetmax)	real	+ thrust increment, each jet group	0.
fTav(njetmax)	real	+ thrust factor, each jet group	1.
SET_alt	int	+ altitude (0 input, 1 from KIND_source) + source for gross weight and altitude	0
KIND_source	int	+ kind (1 size mission, 2 size condition, 3 off design mission, 4 performance condition)	1
kSource	int	+ mission or condition number	0
kSegment	int	+ segment number	0
seg_source	int	+ segment (1 start, 2 midpoint)	1
SET_UL	c*12	+ useful load	'pay'
Wpay	real	+ input payload weight $W_{\text{pay}}$ (Units_pay)	0.
Npass	int	+ number of passengers $N_{\text{pass}}$	0
Wpay_cargo	real	+ cargo $W_{\text{cargo}}$ (Units_pay)	0.
Wpay_extload	real	+ external load $W_{\text{ext-load}}$ (Units_pay)	0.
Wpay_ammo	real	+ ammunition $W_{\text{ammo}}$ (Units_pay)	0.
Wpay_weapons	real	+ weapons $W_{\text{weapons}}$ (Units_pay)	0.

dFuel(ntankmax)	real	+	fuel tank system	
fFuel(ntankmax)	real	+	fuel weight or energy increment	0.
SET_auxtank(ntankmax)	int	+	fuel capacity factor	1.
mauxtank(ntankmax)	int	+	auxiliary fuel tanks (1 adjust Nauxtank, 2 only increase, 0 no change)	1
dNauxtank(ntankmax)	int	+	tank size changed (-1 first, -2 first size already used, $m$ for $m$ -th size)	-1
Nauxtank(nauxtankmax,ntankmax)	int	+	number tanks added or dropped	1
			number of auxiliary fuel tanks $N_{\text{auxtank}}$ (each aux tank size)	
			fixed useful load	
dWcrew	real	+	crew weight increment	0.
dNcrew	int	+	number of crew increment $\delta N_{\text{crew}}$	0
dWoful(10)	real	+	other fixed useful load increment (nWoful categories)	0.
dWequip	real	+	equipment weight increment	0.
dNcrew_seat	int	+	crew seat increment $\delta N_{\text{crew-seat}}$	0
dNpass_seat	int	+	passenger seat increment $\delta N_{\text{pass-seat}}$	0
			kits on aircraft (0 none, 1 present)	
folding kit				1
SET_foldkit	int	+	wing extension kit	1
SET_extkit(nwingmax)	int	+	wing kit on aircraft	1
SET_wingkit(nwingmax)	int	+	other kit on aircraft	0
SET_otherkit	int	+		
DESIGN_engine	int	+	design condition for power (1 to use for engine sizing)	1
DESIGN_jet	int	+	design condition for jet thrust (1 to use for jet group sizing)	1
DESIGN_charge	int	+	design condition for charge power (1 to use for charge group sizing)	1
DESIGN_GW	int	+	design condition for DGW (1 to use for DGW calculation)	1
DESIGN_xmsn	int	+	design condition for transmission (1 to use for transmission sizing)	1
DESIGN_sdgw	int	+	design condition for SDGW (1 to use for SDGW calculation)	1
DESIGN_wmto	int	+	design condition for WMTO (1 to use for WMTO calculation)	1
DESIGN_thrust	int	+	design condition for antitorque or aux thrust (1 to use for rotor sizing)	1
			label is short description for output	
			sizing flight condition: use all parameters except sweep	
			fixed gross weight conditions not used to determine DGW, SDGW, WMTO	
			(set DESIGN_GW=0, DESIGN_sdgw=0, DESIGN_wmto=0)	
			condition not used to size engine or rotor if power margin fixed (max GW, max effort, or trim)	
			condition not used to size transmission if zero torque margin (max GW, max effort, or trim)	

performance flight condition: not use DESIGN\_xx

SET\_GW, SET\_UL values determine which input parameters used

SET\_GW, set gross weight  $W_G$ :

'DGW' = design gross weight  $W_D$ ; input (FIX\_DGW) or calculated

'SDGW' = structural design gross weight  $W_{SD}$  (may depend on DGW)

'WMTO' = maximum takeoff gross weight  $W_{MTO}$  (may depend on DGW)

'f(DGW)' = function DGW:  $f_{GW} * W_D + d_{GW}$

'f(SDGW)' = function SDGW:  $f_{GW} * W_{SD} + d_{GW}$

'f(WMTO)' = function WMTO:  $f_{GW} * W_{MTO} + d_{GW}$

'input' = input (use GW)

'source' = gross weight from specified mission segment or flight condition (KIND\_source)

'f(source)' = function of source:  $f_{GW} * W_{source} + d_{GW}$

'maxP', 'max' = maximum GW for power required equal specified power:  $P_{req} = f_{Pav} P_{av} + d_{Pav}$

$\min((f_{PavPG} + d) - P_{reqPG}) = 0$ , over all propulsion groups

'maxQ' = maximum GW for transmission torque equal limit: zero torque margin

$\min(P_{limit} - P_{req}) = 0$ , over all propulsion groups, engine groups, and rotors

'maxPQ', 'maxQP' = maximum GW for power required equal specified power and transmission torque equal limit most restrictive of power and torque margins

'maxJ' = maximum GW for jet thrust required equal specified thrust:  $T_{req} = f_{Tav} T_{av} + d_{Tav}$

$\min((f_{TavJG} + d) - T_{reqJG}) = 0$ , over all jet groups

'maxPJ', 'maxQJ', 'maxPQJ' = maximum GW for most restrictive of power, torque, and thrust margins

'pay+fuel' = input payload and fuel weights; gross weight fallout

SET\_UL, set useful load: with fixed useful load adjustments in fallout weight

'pay' = input payload weight ( $W_{pay}$ ); fuel weight fallout

'fuel' = input fuel weight ( $d_{Fuel}$ ,  $f_{Fuel}$ ,  $Nauxtank$ ); payload weight fallout

'pay+fuel' = input payload and fuel weights; gross weight fallout

if SET\_GW='pay+fuel', assume SET\_UL same (actual SET\_UL ignored)

KIND\_source, source for gross weight or altitude: source must be solved before this condition calculation order: size missions, size conditions, off design missions, performance conditions

input fuel weight:  $W_{fuel} = \min(d_{Fuel} + f_{Fuel} * W_{fuel\_cap}, W_{fuel\_cap}) + \sum Nauxtank * W_{aux\_cap}$

auxiliary fuel tanks: SET\_auxtank used for fallout fuel weight (SET\_UL='pay')  
 adjust Nauxtank for first fuel tank system with SET\_auxtank > 0  
 otherwise number of auxiliary fuel tanks fixed at input value

payload: only Wpay used if SET\_Wpayload = no details  
 crew: only dWcrew used if SET\_Wcrew = no details  
 equipment: dNcrew\_seat and dNpass\_seat require non-zero weight per seat

---

	+ Parameter sweep	
SET_sweep	int	+ sweep (0 for none, 1 from list, 2 from range) 0
INIT_sweep	int	+ initialize trim (0 for not) 0
nquant_sweep	int	+ number of swept quantities (1 to qsweepmax) 1
nsweep	int	+ list, number of values (maximum nsweepmax)
quant_sweep(qsweepmax)	c*12	+ quantity (parameter name) + range
sweep_first(qsweepmax)	real	+ first parameter value
sweep_last(qsweepmax)	real	+ last parameter value
sweep_inc(qsweepmax)	real	+ parameter increment
	+ list	
sweep(nsweepmax,qsweepmax)	real	+ parameter values

Parameter sweep: only for performance flight conditions, not sizing flight conditions

maximum total number of values for all conditions is nsweepmax

Single sweep, simultaneously varying nquant\_sweep quantities

Sweeps executed from sweep\_last to sweep\_first

sweep analyzed using single data structure, only solution for sweep\_first saved (last value executed)

sweep\_last (first value executed) should be condition that will converge

sign of parameter step determined by sign of (sweep\_last-sweep\_first); sign of sweep\_inc ignored

sweep\_inc of first quantity determines number of values, sweep\_inc of other quantities not used

INIT\_sweep: control/pitch/roll values of trim iteration initialized from previous condition of sweep

Available parameters: quant\_sweep = parameter name  
 GW, dGW, fGW, dPavn, fPavn, dTavn, fTavn, Wpay, dFueln, fFueln, dWcrew, dWequip  
 Vkts, Mach, ROC, climb, side, pitch, roll, rate\_turn, nz\_turn, bank\_turn, rate\_pullup, nz\_pullup  
 ax\_linear, ay\_linear, az\_linear, nx\_linear, ny\_linear, nz\_linear  
 altitude, dtemp, temp, density, csound, viscosity, HAGL  
 controln, coll, latcyc, lngcyc, pedal, tilt, Vtipn, Npecn, fPower, fThrust, fCharge  
 DoQ\_pay, fDoQ\_pay, DoQV\_pay, dSLcg, dBLcg, dWLcg, trim\_targetn  
 n = propulsion group (Vtip, Nspec, dPav, fPav), jet group (dTav, fTav), fuel tank system, control number, or trim quantity;  
 1 if absent  
 for fPower, value is factor on input fPower for all engine groups, all propulsion groups  
 for fThrust, value is factor on input fThrust for all jet groups  
 for fCharge, value is factor on input fCharge for all charge groups

---

parent	int	parent (1 Size, 2 Performance)
kFltCond	int	FltCond number
kcol_out	int	performance output column (first for sweep)
<b>Specification</b>		
iSET_GW	int	gross weight (SET_GW_xxx)
iSET_maxGW	int	max gross weight (0 no iteration; SET_GW_maxP, maxQ, maxPQ, maxJ, maxPJ, maxQJ, maxPQJ)
iSET_UL	int	useful load (SET_UL_pay, fuel, payfuel)
iSETPmargin(npropmax)	int	power margin as quantity (3 max GW, 2 max effort, 1 trim); not used to size engine or rotor
iSETQmargin(npropmax)	int	torque margin as quantity (3 max GW, 2 max effort, 1 trim); not used to size transmission
iSETEmargin(nengmax)	int	power margin as quantity (3 max GW, 2 max effort, 1 trim); not used to size engine group
iSETJmargin(njetmax)	int	jet thrust margin as quantity (3 max GW, 2 max effort, 1 trim); not used to size jet group
iSETCmargin(nchrgmax)	int	charger power margin as quantity (1 trim); not used to size charge group
iSETBmargin(ntankmax)	int	battery power margin as quantity (2 max effort, 1 trim); not used to size fuel tank
isFIX_GW	int	fixed gross weight; DESIGN_GW=0, DESIGN_sdgw=0, DESIGN_wmto=0
<b>Parameter sweep</b>		
kquant_sweep(qsweepmax)	int	quantity number
label_sweep	c*8	quantity column label
vsweep(nsweepmax,qsweepmax)		

	real	parameter values
fPower_original(nengmax)	real	fraction of rated engine power available
fThrust_original(njetmax)	real	fraction of rated jet thrust available
fCharge_original(nchrgmax)	real	fraction of rated charger power available

Chapter 16

---

**Structure: Mission**

Variable	Type	Description	Default
		Mission Profile	
MissParam	MissParam	Parameters	
		Mission Segments	
MissSeg(nsegmax)	MissSeg	mission segments	
FltState(nsegmax)	FltState	flight conditions	

## Chapter 17

**Structure: MissParam**

Variable	Type	Description	Default
		+ Mission Profile	
title	c*100	+ title	
label	c*8	+ label	
		+ Specification	
SET_GW	c*16	+ mission takeoff gross weight $W_G$	'pay+miss'
GW	real	+ input gross weight	0.
dGW	real	+ gross weight increment	0.
fGW	real	+ gross weight factor	1.
SET_UL	c*16	+ useful load	'pay+miss'
Wpay	real	+ input takeoff payload weight $W_{\text{pay}}$ (Units_pay)	0.
Npass	int	+ number of passengers $N_{\text{pass}}$	0
Wpay_cargo	real	+ cargo $W_{\text{cargo}}$ (Units_pay)	0.
Wpay_extload	real	+ external load $W_{\text{ext-load}}$ (Units_pay)	0.
Wpay_ammo	real	+ ammunition $W_{\text{ammo}}$ (Units_pay)	0.
Wpay_weapons	real	+ weapons $W_{\text{weapons}}$ (Units_pay)	0.
SET_pay	c*16	+ payload changes	'delta'
		+ fuel tank systems	
FIX_missfuel(ntankmax)	int	+ mission fuel weight (0 calculated, 1 fixed)	0
dFuel(ntankmax)	real	+ fuel weight or energy increment	0.
fFuel(ntankmax)	real	+ fuel capacity factor	1.
SET_auxtank(ntankmax)	int	+ auxiliary fuel tanks (1 adjust Nauxtank, 2 only increase, 3 increase at start and drop, 0 no change)	1
mauxtank(ntankmax)	int	+ tank size changed (-1 first, -2 first size already used, m for m-th size)	-1
dNauxtank(ntankmax)	int	+ number tanks added or dropped	1
Nauxtank(nauxtankmax,ntankmax)	int	+ number of auxiliary fuel tanks $N_{\text{auxtank}}$ (each aux tank size)	
		+ fixed useful load	
SET_foldkit	int	+ folding kit on aircraft (0 none, 1 present)	1

SET_reserve	int	+	fuel reserve (1 fraction mission fuel, 2 fraction fuel capacity, 3 only mission segments)	1
fReserve	real	+	fuel reserve fraction $f_{res}$	0.
		+	split segments	
dist_inc	real	+	distance increment (Units_dist)	100.
time_inc	real	+	time increment (Units_time)	30.
alt_inc	real	+	altitude increment (Units_alt)	2000.
VTO_inc	real	+	takeoff velocity increment	10.
hTO_inc	real	+	takeoff height increment	10.
DESIGN_engine	int	+	design mission for power (1 to use for engine sizing)	1
DESIGN_jet	int	+	design mission for jet thrust (1 to use for jet group sizing)	1
DESIGN_charge	int	+	design mission for charge power (1 to use for charge group sizing)	1
DESIGN_GW	int	+	design mission for DGW (1 to use for DGW calculation)	1
DESIGN_xmsn	int	+	design mission for transmission (1 to use for transmission sizing)	1
DESIGN_tank	int	+	design mission for fuel tank (1 to use for fuel tank capacity)	1
DESIGN_thrust	int	+	design mission for antitorque or aux thrust (1 to use for rotor sizing)	1

---

label is short description for output

sizing mission: use all parameters

fixed gross weight missions not used to determine DGW (set DESIGN\_GW=0)

mission segment not used to size engine or rotor if power margin fixed (max GW, max effort, or trim)

mission segment not used to size transmission if zero torque margin (max GW, max effort, or trim)

mission segment not used for sizing if set MissSeg%SizeZZZ=0

off design mission: not use DESIGN\_xx

SET\_GW, SET\_UL values determine which input parameters used

SET\_GW, set mission takeoff gross weight  $W_G$ :

'DGW' = design gross weight  $W_D$ ; input (FIX\_DGW) or calculated

'SDGW' = structural design gross weight  $W_{SD}$  (may depend on DGW)

'WMTO' = maximum takeoff gross weight  $W_{MTO}$  (may depend on DGW)

'f(DGW)' = function DGW: fGW\* $W_D$ +dGW

'f(SDGW)' = function SDGW: fGW\* $W_{SD}$ +dGW

'f(WMTO)' = function WMTO: fGW\* $W_{MTO}$ +dGW

'input' = input (use GW)

'maxP', 'max' = maximum GW for power required equal specified power:  $P_{req} = fPavP_{av} + dPav$   
                  at mission segment MaxGW, minimum gross weight of designated segments  
                   $\min((fP_{avPG} + d) - P_{reqPG}) = 0$ , over all propulsion groups  
 'maxQ' = maximum GW for transmission torque equal limit: zero torque margin  
                  at mission segment MaxGW, minimum gross weight of designated segments  
                   $\min(P_{limit} - P_{req}) = 0$ , over all propulsion groups, engine groups, and rotors  
 'maxPQ', 'maxQP' = maximum GW for power required equal specified power and transmission torque equal limit  
                  at mission segment MaxGW, minimum gross weight of designated segments  
                  most restrictive of power and torque margins  
 'maxJ' = maximum GW for jet thrust required equal specified thrust:  $T_{req} = fTavT_{av} + dTav$   
                  at mission segment MaxGW, minimum gross weight of designated segments  
                   $\min((fT_{avJG} + d) - T_{reqJG}) = 0$ , over all jet groups  
 'maxPJ', 'maxQJ', 'maxPQJ' = maximum GW for most restrictive of power, torque, and thrust margins  
 'pay+fuel' = input payload and fuel weights; gross weight fallout  
 'pay+miss' = input payload, fuel weight from mission; gross weight fallout

#### SET\_UL, set useful load:

'pay' = input payload weight (Wpay); fuel weight fallout  
 'fuel' = input fuel weight (dFuel, fFuel, Nauxtank); initial payload weight fallout  
 'miss' = fuel weight from mission; initial payload weight fallout  
 'pay+fuel' = input payload and fuel weights; gross weight fallout  
 'pay+miss' = input payload, fuel weight from mission; gross weight fallout

if SET\_GW='pay+fuel' or 'pay+miss', assume SET\_UL same (actual SET\_UL ignored)

FIX\_missfuel only used for SET\_UL='miss' or 'pay+miss', with more than one fuel tank system

#### SET\_pay, set payload changes: mission segment payload (use of MissSeg%\*Wpay)

'none' = no changes  
 'input' = value; payload = xWpay (not use Wpay)  
 'delta' = increment; payload = (initial payload weight)+(xWPay-xWpay(seg1))  
 'scale' = factor; payload = (initial payload weight)\*(xWPay/xWpay(seg1))

when SET\_GW='max' and SET\_UL='fuel' or 'miss' (so payload is fallout), payload (from SET\_pay and xWpay) must not be zero at the maximum GW segments

payload: only Wpay and xWpay used if SET\_Wpayload = no details

input fuel weight:  $W_{\text{fuel}} = \min(\text{dFuel} + \text{fFuel} * W_{\text{fuel-cap}}, W_{\text{fuel-cap}}) + \sum \text{Nauxtank} * W_{\text{aux-cap}}$   
 for fallout fuel weight, this is the initial value for the mission iteration

auxiliary fuel tanks:

SET\_auxtank options: fixed; or adjust Nauxtank for each segment; or  
 increase at mission start, then constant; or increase at start, then drop  
 for input fuel (SET\_UL = 'fuel' or 'pay+fuel'), start with input Nauxtank, then drop  
 for mission fuel (SET\_UL = 'miss' or 'pay+miss'), fixed  $W_{\text{fuel}}$  or  $E_{\text{fuel}}$  at start  
 for fallout (SET\_UL = 'pay'), adjust  $W_{\text{fuel}}$  with change in Nauxtank (fixed  $W_G - W_{\text{pay}} = W_O + W_{\text{fuel}}$ )  
 for all SET\_UL, adjust  $W_O$  with change in Nauxtank  
 fuel tank design mission: Nauxtank=0, allow  $W_{\text{fuel}}$  or  $E_{\text{fuel}}$  to exceed tank capacity

SET\_reserve: maximum of fuel for designated reserve mission segments  
 and fraction of fuel ( $f_{\text{res}} W_{\text{burn}}$  or  $f_{\text{res}} E_{\text{burn}}$ ) or fraction of fuel capacity ( $f_{\text{res}} W_{\text{fuel-cap}}$  or  $f_{\text{res}} E_{\text{fuel-cap}}$ )

---

KIND_SegInt	+ Segment integration		1
	int	+ method (0 segment start, 1 segment midpoint, 2 trapezoidal)	
		+ Mission iteration (supersede Solution input if nonzero)	
relax_miss	real	+ relaxation factor (mission fuel)	0.
relax_range	real	+ relaxation factor (range credit)	0.
relax_gw	real	+ relaxation factor (max takeoff GW)	0.
toler_miss	real	+ tolerance (fraction reference)	0.
trace_miss	int	+ trace iteration (0 for none)	0
nSeg	+ Mission Segments		1
	int	+ number of mission segments (maximum nsegmax)	

---

input all mission segments as arrays in single mission namelist

---

parent	int	parent (1 Size, 2 OffDesign)
kMission	int	Mission number
kcol_out	int	performance output column

Specification		
iSET_GW	int	gross weight (SET_GW_xxx)
iSET_maxGW	int	max gross weight (SET_GW_maxP, maxQ, maxPQ, maxJ, maxPJ, maxQJ, maxPQJ)
nSET_maxGW	int	number max gross weight segments
iSET_UL	int	useful load (SET_UL_pay, fuel, payfuel, miss, paymiss)
iSET_pay	int	payload changes (SET_pay_none, input, delta, scale)
iSETPmargin(npropmax)	int	power margin as quantity (all mission segments); not used to size engine or rotor
iSETQmargin(npropmax)	int	torque margin as quantity (all mission segments); not used to size transmission
iSETEmargin(nengmax)	int	power margin as quantity (all mission segments); not used to size engine group
iSETJmargin(njetmax)	int	jet thrust margin as quantity (all mission segments); not used to size jet group
iSETCmargin(nchrgmax)	int	charger power margin as quantity (all mission segments); not used to size charge group
iSETBmargin(ntankmax)	int	battery power margin as quantity (all mission segments); not used to size fuel tank
isFIX_GW	int	fixed gross weight; DESIGN_GW=0
Segments		
nreserve	int	number reserve segments
nadjust	int	number adjustable segments
kind_adjust	int	kind adjustable (0 none, 1 distance, 2 time)
kind_range	int	kind range credit (0 none, 1 all forward, 2 all backward, 3 both)
ntakeoff	int	number takeoff segments
Iteration		
kind_iter	int	kind iteration (0 none, 1 calculate mission fuel, 2 adjust mission, 3 only range credit or integration)
ismissconv	int	converged (0 not)
count_miss	int	number of iterations
error_miss(3)	real	error ratio (Wfuel, range credit, takeoff GW)
Mission quantities		
isFirstSol	int	first solution (initialize GW_to and Wfuel_to)
GW_to	real	takeoff gross weight (start of mission)
GW_endmiss	real	gross weight (end of mission, excluding reserve segments; last non-reserve segment)
GW_end	real	gross weight (end of mission; last segment)
Wfuel_to(ntankmax)	real	takeoff fuel weight (start of mission)
Wfuel_add(ntankmax)	real	added fuel weight (fill/add/drop during mission)
Wfuel_endmiss(ntankmax)	real	fuel weight (end of mission, excluding reserve segments; last non-reserve segment)
Wfuel_end(ntankmax)	real	fuel weight (end of mission; last segment)

Wburn(ntankmax)	real	weight fuel burned $W_{\text{burn}}$
Wres(ntankmax)	real	weight reserve fuel $W_{\text{res}}$ (maximum of fraction or reserve segments)
Wfuel_miss(ntankmax)	real	calculated mission fuel weight ( $W_{\text{burn}} + W_{\text{res}}$ )
Efuel_to(ntankmax)	real	takeoff fuel energy (start of mission)
Efuel_add(ntankmax)	real	added fuel energy (fill/add/drop during mission)
Efuel_endmiss(ntankmax)	real	fuel energy (end of mission, excluding reserve segments; last non-reserve segment)
Efuel_end(ntankmax)	real	fuel energy (end of mission; last segment)
Eburn(ntankmax)	real	energy fuel burned $E_{\text{burn}}$
Eres(ntankmax)	real	energy reserve fuel $E_{\text{res}}$ (maximum of fraction or reserve segments)
Efuel_miss(ntankmax)	real	calculated mission fuel energy ( $E_{\text{burn}} + E_{\text{res}}$ )
exceedP	int	exceed power available: any mission segment $P_{\text{reqPG}} > (1 + \epsilon)P_{\text{avPG}}$
exceedQ	int	exceed torque available: any mission segment $P_{\text{reqPG}} > (1 + \epsilon)P_{\text{DSlimit}}$
exceedJ	int	exceed jet thrust available: any mission segment $T_{\text{reqJG}} > (1 + \epsilon)T_{\text{avJG}}$
exceedC	int	exceed charger power available: any mission segment $P_{\text{reqCG}} > (1 + \epsilon)P_{\text{avCG}}$
exceedWf	int	exceed fuel capacity: any mission segment $W_{\text{fuel}} > (1 + \epsilon)W_{\text{fuel-cap}}$ or $E_{\text{fuel}} > (1 + \epsilon)E_{\text{fuel-cap}}$
exceedB	int	exceed battery power: any mission segment $ \dot{E}_{\text{batt}}  > (1 + \epsilon)P_{\text{max}}$
Total mission, excluding reserve segments		
endurance	real	endurance $E$ , block time (min)
range	real	range $R$ (nm)
airdist	real	air distance (nm)
blockspeed	real	block speed (kts; range/endurance)
range_factor	real	range factor $RF = R / \ln(W_{\text{to}} / (W_{\text{to}} - W_{\text{burn}}))$ (nm)
end_factor	real	efficiency factor $EF = E / 2((W_{\text{to}} / (W_{\text{to}} - W_{\text{burn}}))^{3/2} - 1)$ (min)
fuel_eff	real	fuel efficiency $e = W_{\text{pay}}R/W_{\text{burn}}$ (ton-nm/lb or ton-nm/kg)
productivity_o	real	productivity $p = W_{\text{pay}}V/W_O$ (ton-kt/lb or ton-kt/kg)
productivity_f	real	productivity $p = W_{\text{pay}}V/W_{\text{burn}}$ (ton-kt/lb or ton-kt/kg)
Cost		
ASM	real	available seat miles
DOC	real	direct operating cost
Emissions Trading Scheme (kg CO <sub>2</sub> , per mission)		
ETS	real	total
ETS_fuel	real	fuel burned
ETS_energy	real	energy used

		Weight of emissions (kg, per mission)
W_CO2	real	carbon dioxide
W_NOx	real	$\text{NO}_x$
W_H2O	real	water vapor
W_soot	real	soot
W_SO4	real	sulphates
		Average Temperature Response (deg C)
ATR	real	total
ATR_noAIC	real	total without AIC
ATR_CO2	real	carbon dioxide
ATR_CH4	real	$\text{NO}_x$ - methane
ATR_O3L	real	$\text{NO}_x$ - ozone (long life)
ATR_O3S	real	$\text{NO}_x$ - ozone (short life)
ATR_H2O	real	water vapor
ATR_soot	real	soot
ATR_SO4	real	sulphates
ATR_AIC	real	aviation induced cloudiness

## Chapter 18

**Structure: MissSeg**

Variable	Type	Description	Default
kind	c*12	+ Segment definition + kind	'dist'
dist	real	+ distance $D$ (Units_dist)	0.
time	real	+ time $T$ (Units_time) + segment	0.
reserve	int	+ reserve (0 for not)	0
adjust	int	+ adjustable for flexible mission (0 for not)	0
range_credit	int	+ segment number for range credit (0 for no reassignment)	0
ignore	int	+ ignore segment (0 for not)	0
copy	int	+ copy segment (source segment number)	0
split	int	+ split segment (number segments; -1 calculated; 0 for not split)	0
SET_tank(ntankmax)	int	+ segment fuel use or replace	0
dTank(ntankmax)	real	+ fuel increment	0.
fTank(ntankmax)	real	+ fuel factor	1.
SET_refuel(ntankmax)	int	+ refuel (0 not, 1 fill all tanks, 2 add fuel, 3 drop fuel, 4-5 fill/add below rWfuel, 6-7 fill/add below mWfuel)	0
xWfuel(ntankmax)	real	+ fuel weight or energy change	0.
rWfuel(ntankmax)	real	+ threshold fraction	0.
mWfuel(ntankmax)	real	+ threshold weight or energy + gross weight	0.
MaxGW	int	+ maximize gross weight (0 not)	0
dPav(npropmax)	real	+ power increment, each propulsion group	0.
fPav(npropmax)	real	+ power factor, each propulsion group	1.
dTav(njetmax)	real	+ thrust increment, each jet group	0.
fTav(njetmax)	real	+ thrust factor, each jet group + useful load	1.
xWpay	real	+ payload weight change (Units_pay)	0.
xNpass	int	+ number of passengers increment $\delta N_{\text{pass}}$	0

			fixed useful load	
dWcrew	real	+	crew weight increment	0.
dNcrew	int	+	number of crew increment $\delta N_{crew}$	0
dWoful(10)	real	+	other fixed useful load increment (nWoful categories)	0.
dWequip	real	+	equipment weight increment	0.
dNcrew_seat	int	+	crew seat increment $\delta N_{crew-seat}$	0
dNpass_seat	int	+	passenger seat increment $\delta N_{pass-seat}$	0
		+	kits on aircraft (0 none, 1 present)	
SET_extkit(nwingmax)	int	+	wing extension kit	1
SET_wingkit(nwingmax)	int	+	wing kit	1
SET_otherkit	int	+	other kit	0
SET_alt	int	+	altitude at start of segment (0 input, 1 from previous segment, 2 from kSeg_alt)	0
kSeg_alt	int	+	source of altitude	0
SET_wind	int	+	wind specification (0 none, 1 headwind, 2 tailwind)	0
dWind	real	+	wind increment, knots (dWind+fWind*altitude)	0.
fWind	real	+	wind gradient, knots (dWind+fWind*altitude)	0.
		+	design mission (0 to not use segment for sizing)	
SizeEngine	int	+	power	1
SizeJet	int	+	jet thrust	1
SizeCharge	int	+	charger power	1
SizeGW	int	+	DGW	1
SizeXmsn	int	+	transmission	1
SizeThrust	int	+	antitorque or aux thrust	1

---

segment kind

- kind='taxi', 'idle': taxi/warm-up mission segment (use time)
- kind='dist': fly segment for specified distance (use dist)
- kind='time': fly segment for specified time (use time)
- kind='hold', 'loiter': fly segment for specified time (use time), fuel burned but no distance added to range
- kind='climb': climb/descend from present altitude to next segment altitude
- kind='spiral': climb/descend from present altitude to next segment altitude, fuel burned but no dist added to range
- kind='fuel': use or replace specified fuel amount, calculate time and distance
- kind='burn', 'charge': use or replace specified fuel amount, calculate time but no distance added to range
- kind='takeoff', 'TO': takeoff distance calculation

only one of reserve, adjust, range\_credit designations for each segment

reserve: time and distance not included in block time and range

range credit: to facilitate specification of range

range calculated for this segment credited to segment = range\_credit

range\_credit segment must be kind='dist', specified distance is for group of segments

actual distance flown in range\_credit segment is specified dist less distances from other segments

if credit to earlier segment, iteration required

adjustable: for SET\_UL not 'miss', can adjust one or more segments

if more than one segment adjusted, must be all kind='dist' or all kind='time'/'hold'

adjust time or distance based on fuel burn (proportional to initial values)

split segment: number specified, or calculated from MissParam%dest\_inc, time\_inc, alt\_inc

ignore segment: removed from input; segments using MaxGW, range\_credit, FltCond%KIND\_source can not be ignored

SET\_tank: segment fuel use or replace for kind='fuel' or 'burn'

SET\_tank = 0: no requirement

SET\_tank = 1: target  $d_{Tank} + f_{Tank} * W_{fuel\_cap}$  or  $d_{Tank} + f_{Tank} * E_{fuel\_cap}$

SET\_tank = 2: target  $d_{Tank} + f_{Tank} * W_{fuel}$  or  $d_{Tank} + f_{Tank} * E_{fuel}$

SET\_tank = 3: increment  $d_{Tank} + f_{Tank} * W_{fuel\_cap}$  or  $d_{Tank} + f_{Tank} * E_{fuel\_cap}$

SET\_tank = 4: increment  $d_{Tank} + f_{Tank} * W_{fuel}$  or  $d_{Tank} + f_{Tank} * E_{fuel}$

charge if  $\dot{E} < 0$  (not based on keyword, increment always positive)

target limited by capacity, if target already achieved then no requirement

increment limited by current fuel (use) or capacity minus current fuel (replace)

SET\_refuel, refuel: change at start of segment; weight or energy

SET\_refuel = 1: fill all tanks (including any auxiliary tanks installed)

SET\_refuel = 2: add fuel  $xW_{fuel}$

SET\_refuel = 3: drop fuel  $xW_{fuel}$

SET\_refuel = 4: if below fraction  $rW_{fuel}$  of fuel capacity (including auxiliary tanks), fill all tanks

SET\_refuel = 5: if below fraction  $rW_{fuel}$  of fuel capacity (including auxiliary tanks), add  $xW_{fuel}$

SET\_refuel = 6: if below  $mW_{fuel}$ , fill all tanks

SET\_refuel = 7: if below  $mW_{fuel}$ , add  $xW_{fuel}$

added fuel limited by capacity; not used for first segment

$xW_{fuel}$  positive (add or drop determined by SET\_refuel)

maximize gross weight: MaxGW designate segments if SET\_GW='maxP' or 'maxQ' or 'maxPQ'  
 climb/descend or spiral segment: end altitude is that of next segment; last segment kind can not be climb or spiral  
 begin altitude is that input for this segment (SET\_alt=0), or altitude of previous segment (SET\_alt=1),  
 payload: only Wpay and xWpay used if SET\_Wpayload = no details  
 xNpass is change from MissParam%Npass  
 crew: only dWcrew used if SET\_Wcrew = no details  
 equipment: dNcrew\_seat and dNpass\_seat require non-zero weight per seat

---

	+ Takeoff distance calculation	
SET_takeoff	c*12 + takeoff segment kind	'none'
Vkts_takeoff	real + ground speed or climb speed (knots, CAS)	0.
climb_takeoff	real + climb angle relative ground $\gamma$ (deg)	0.
height_takeoff	real + height during climb $h$ (ft or m)	0.
slope_ground	real + slope of ground $\gamma_G$ (+ for uphill; deg)	0.
friction	real + friction coefficient $\mu$	0.04
t_decision	real + decision delay after engine failure $t_1$ (sec)	1.5
t_rotation	real + rotation time $t_R$ (sec)	2.0
nz_transition	real + transition load factor $n_{TR}$	1.2

takeoff distance calculation: set of consecutive kind='takeoff' segments  
 first segment identified by SET\_takeoff='start' ( $V = 0$ )  
 last segment if next segment is not kind='takeoff', or is SET\_takeoff='start'  
 takeoff segment kind  
 SET\_takeoff='start', 'ground run' (keyword = ground or run), 'engine fail' (keyword = eng or fail)  
 SET\_takeoff='liftoff', 'rotation', 'transition', 'climb', 'brake'  
 each segment requires appropriate configuration, trim option, max effort specification  
 not use dist, time, reserve, adjust, range\_credit, SET\_refuel, MaxGW, SET\_alt  
 max\_var='alt' not allowed in maximum effort  
 velocity specification (SET\_vel) and HAGL superseded; SET\_turn=SET\_pullup=0

---

can split segment (except start, rotation, transition): split height for climb, velocity for others  
 splitting liftoff or engine failure segment produces additional ground run segments  
 separate definition of multiple ground run, climb, brake segments allows configuration variations  
 define takeoff profile in terms of velocities  
 integrate acceleration vs velocity to obtain time and distance  
 segments correspond to ends of integration intervals  
 analysis checks for consistency of input velocity and calculated acceleration  
 analysis checks for consistency of input height and input/calculated climb angle

takeoff distance definition: includes SET\_takeoff='liftoff' segment  
 order: start, ground run, engine failure, ground run, liftoff, rotation, transition, climb  
 only one liftoff; only one engine failure, rotation, transition (or none)  
 engine failure before liftoff; all ground run before liftoff, all climb after liftoff

accelerate-stop distance definition: does not have SET\_takeoff='liftoff' segment  
 order: start, ground run, engine failure, brake  
 only one engine failure (or none)

engine failure segment (if present) identifies point for decision delay  
 until t\_decision after engine failure segment, use engine rating, fPower, fraction of engine failure segment  
 so engine failure segment corresponds to conditions before failure  
 number of inoperative engines specified by nEngInop for each segment  
 if engine failure segment present, nEngInop specification must be consistent

---

parent	int	parent (1 Size, 2 OffDesign)
kMission	int	Mission number
kMissSeg	int	MissSeg number
kcol_out	int	performance output column
<b>Specification</b>		
ikind	int	kind (MissSeg_kind_taxi, dist, time, hold, climb, spiral, fuel, burn)
SET_foldkit	int	folding kit on aircraft (0 none, 1 present)

	Segments	
kind_range	int	this segment receives range credit (0 not, 1 source forward, 2 source backward, 3 both)
fadjust	real	adjustment ratio (initial time or dist ratio)
wassplit	int	split segment (number segments; 0 for not split)
ksplit_first	int	first segment after split
ksplit_last	int	last segment after split
dWpay	real	payload increment ( $xWpay - xWpay(seg1)$ ) or factor ( $xWpay/xWpay(seg1)$ )
iSET_maxGW	int	max gross weight (0 no iteration; SET_GW_maxP, maxQ, maxPQ, maxJ, maxPJ, maxQJ, maxPQJ + maxGW)
iSETPmargin(npropmax)	int	power margin as quantity (3 max GW, 2 max effort, 1 trim)
iSETQmargin(npropmax)	int	torque margin as quantity (3 max GW, 2 max effort, 1 trim)
iSETEmargin(nengmax)	int	power margin as quantity (3 max GW, 2 max effort, 1 trim)
iSETJmargin(njetmax)	int	jet thrust margin as quantity (3 max GW, 2 max effort, 1 trim)
iSETCmargin(nchrgmax)	int	charger power margin as quantity (1 trim)
iSETBmargin(ntankmax)	int	battery power margin as quantity (2 max effort, 1 trim)
ismaxgwconv	int	Maximum gross weight converged (0 not)
count_maxgw	int	number of iterations
error_maxgw	real	error ratio
GW_inc	real	gross weight increment
	Takeoff distance calculation	
iSET_takeoff	int	takeoff segment kind (SET_takeoff_xxx)
VCAS_TO	real	ground speed or climb speed (CAS)
V_TO	real	ground speed (ft/sec or m/sec)
climb_TO	real	angle relative ground (deg)
isConsistent_TO	int	consistent acc and V change, climb and h change
FxG_TO	real	net force $T - D$ (ground axes)
FzG_TO	real	net force $W - L$ (ground axes)
FzGmu_TO	real	friction drag $\mu F_{zG}$
acc_TO	real	acceleration (ground axes)
h_TO	real	height (ft or m)
t_TO	real	time (sec)
s_TO	real	distance (ft or m)
time_TO	real	cumulative time (sec)
dist_TO	real	cumulative distance (ft or m)

rating_original(nengmax)	c*12	original value for engine failure decision (from FltAircraft) engine rating
krate_original(nengmax)	int	engine rating
fPower_original(nengmax)	real	fraction of rated engine power available
rating_jet_original(njetmax)	c*12	jet rating
krate_jet_original(njetmax)	int	jet rating
fThrust_original(njetmax)	real	fraction of rated jet thrust available
rating_charge_original(nchrgmax)	c*12	charger rating
krate_charge_original(nchrgmax)	int	charger rating
fCharge_original(nchrgmax)	real	fraction of rated charger power available
friction_original	real	friction coefficient
kSegEF_TO	int	engine failure segment (0 for none)
Performance (from FltState; at start or midpoint)		
speed	real	horizontal speed $V_h$ (knots)
Vclimb	real	climb velocity $V_c$ (ft/sec or m/sec)
fuelflow(ntankmax)	real	fuel flow $\dot{w}$ (lb/hr or kg/hr)
energyflow(ntankmax)	real	energy flow $\dot{E}$ (MJ/hr)
speed_start	real	trapezoidal integration horizontal speed $V_h$
Vclimb_start	real	climb velocity $V_c$
fuelflow_start(ntankmax)	real	fuel flow $\dot{w}$
energyflow_start(ntankmax)	real	energy flow $\dot{E}$
speed_end	real	horizontal speed $V_h$
Vclimb_end	real	climb velocity $V_c$
fuelflow_end(ntankmax)	real	fuel flow $\dot{w}$
energyflow_end(ntankmax)	real	energy flow $\dot{E}$
alt_start	real	altitude $h$ at start of segment (ft or m)
alt_end	real	altitude $h$ at end of segment (from start of next segment, only used for kind='climb' or 'spiral')
Wind	real	Headwind $V_w$ (knots)
groundspeed	real	Ground speed ( $V_h - V_w$ ) (knots)

		Mission segment quantities
T	real	time $T$ (minutes)
D	real	ground distance $D$ (nm)
otherDpast	real	distance from past range credit (nm)
otherDfuture	real	distance from future range credit (nm)
dR	real	range contribution $dR$ (nm)
airdist	real	air distance (nm)
Wburn(ntankmax)	real	fuel burned $W_{\text{burn}}$ (lb or kg)
Wfuel_add(ntankmax)	real	fuel added at start of segment
Wfuel_start(ntankmax)	real	fuel weight $W_{\text{fuel}}$ (segment start)
Eburn(ntankmax)	real	fuel burned $E_{\text{burn}}$ (MJ)
Efuel_add(ntankmax)	real	fuel added at start of segment
Efuel_start(ntankmax)	real	fuel energy $E_{\text{fuel}}$ (segment start)
GW_start	real	gross weight $W_G$ (segment start)
ETS	real	Emissions Trading Scheme (kg CO <sub>2</sub> , per mission)
ETS_fuel	real	total
ETS_energy	real	fuel burned
		energy used
W_CO2	real	Weight of emissions (kg, per mission)
W_NOx	real	carbon dioxide
W_H2O	real	NO <sub>x</sub>
W_soot	real	water vapor
W_SO4	real	soot
		sulphates
ATR	real	Average Temperature Response (deg C)
ATR_noAIC	real	total
ATR_CO2	real	total without AIC
ATR_CH4	real	carbon dioxide
ATR_O3L	real	NO <sub>x</sub> - methane
ATR_O3S	real	NO <sub>x</sub> - ozone (long life)
ATR_H2O	real	NO <sub>x</sub> - ozone (short life)
ATR_soot	real	water vapor
ATR_SO4	real	soot
		sulphates

ATR_AIC	real	aviation induced cloudiness
EI_NOx(ntankmax)	real	$EI_{NO_x} = \sum EI\dot{w} / \sum \dot{w}$ , input or turboshaft calculated, weighted for engine group
fPto(nengmax)	real	$f_P = P_q/P_{to}$ for $\dot{w}$

## Chapter 19

**Structure: FltState**

Variable	Type	Description	Default
FltAircraft	FltAircraft	Flight State Aircraft Components	
FltFuse	FltFuse	fuselage	
FltGear	FltGear	landing gear	
FltRotor(nrotormax)	FltRotor	rotors	
FltWing(nwingmax)	FltWing	wings	
FltTail(ntailmax)	FltTail	tails	
FltTank(ntankmax)	FltTank	fuel tank systems	
FltProp(npropmax)	FltProp	propulsion groups	
FltEngn(nengmax)	FltEngn	engine groups	
FltJet(njetmax)	FltJet	jet groups	
FltChrg(nchrgmax)	FltChrg	charge groups	

## Chapter 20

**Structure: FltAircraft**

Variable	Type	Description	Default
		+ Flight State + Specification	
SET_max	int	+ maximum effort performance (maximum 2, 0 to analyze specified condition)	0
max_quant(2)	c*12	+ quantity	' '
max_var(2)	c*12	+ variable	' '
max_limit(2)	int	+ switch quantity if exceed limit (0 not, 1 power margin, 2 torque margin, 3 both)	0
max_Vlimit(2)	int	+ velocity limited by $V_{NE}$ (0 not)	0
fVel(2)	real	+ flight speed factor	1.
SET_vel	c*12	+ flight speed	'general'
Vkts	real	+ horizontal velocity $V_h$ (TAS or CAS or IAS, Units_vel)	0.
Mach	real	+ horizontal velocity $M$ (Mach number)	0.
ROC	real	+ vertical rate of climb $V_c$ (Units_ROC)	0.
climb	real	+ climb angle $\theta_V$ (deg)	0.
side	real	+ sideslip angle $\psi_V$ (deg)	0.
		+ aircraft motion	
SET_pitch	int	+ pitch motion specification (0 Aircraft value, 1 FltState input)	1
SET_roll	int	+ roll motion specification (0 Aircraft value, 1 FltState input)	1
pitch	real	+ pitch $\theta_F$	0.
roll	real	+ roll $\phi_F$	0.
SET_turn	int	+ turn specification (0 zero, 1 turn rate, 2 load factor, 3 bank angle)	0
rate_turn	real	+ turn rate $\dot{\psi}_F$ (deg/sec)	0.
nz_turn	real	+ load factor $n$ (g)	1.
bank_turn	real	+ bank angle $\phi_F$ (deg)	0.
SET_pullup	int	+ pullup specification (0 zero, 1 pitch rate, 2 load factor)	0
rate_pullup	real	+ pitch rate $\dot{\theta}_F$ (deg/sec)	0.
nz_pullup	real	+ load factor $n$ (g)	1.
SET_acc	int	+ linear acceleration specification (0 zero, 1 acceleration, 2 load factor)	0
ax_linear	real	+ x-acceleration $a_{ACx}$ (ft/sec <sup>2</sup> or m/sec <sup>2</sup> )	0.

ay_linear	real	+	y-acceleration $a_{ACy}$ (ft/sec <sup>2</sup> or m/sec <sup>2</sup> )	0.
az_linear	real	+	z-acceleration $a_{ACz}$ (ft/sec <sup>2</sup> or m/sec <sup>2</sup> )	0.
nx_linear	real	+	x-load factor increment $n_{Lx}$ (g)	0.
ny_linear	real	+	y-load factor increment $n_{Ly}$ (g)	0.
nz_linear	real	+	z-load factor increment $n_{Lz}$ (g)	0.
altitude	real	+	altitude $h$ (Units_alt)	0.
SET_atmos	c*12	+	atmosphere specification	'std'
temp	real	+	temperature $\tau$ (Units_temp)	
dtemp	real	+	temperature increment $\Delta T$ (Units_temp)	0.
density	real	+	density $\rho$	
csound	real	+	speed of sound $c_s$	
viscosity	real	+	viscosity $\mu$	
SET_GE	int	+	ground effect (0 OGE, 1 IGE)	0
HAGL	real	+	height of landing gear above ground level $h_{LG}$	999.
STATE_LG	c*12	+	landing gear state	'default'
STATE_control	int	+	aircraft control state	1
SET_control(ncontmax)	int	+	control specification (0 Aircraft value, 1 FltState input)	1
SET_coll	int	+	collective stick	1
SET_latcyc	int	+	lateral cyclic stick	1
SET_lngcyc	int	+	longitudinal cyclic stick	1
SET_pedal	int	+	pedal	1
SET_tilt	int	+	tilt (0 Aircraft value, 1 FltState input, 2 Aircraft conversion schedule)	1
control(ncontmax)	real	+	aircraft controls	
coll	real	+	collective stick $c_{AC0}$	0.
latcyc	real	+	lateral cyclic stick $c_{ACc}$	0.
lngcyc	real	+	longitudinal cyclic stick $c_{ACs}$	0.
pedal	real	+	pedal $c_{ACP}$	0.
tilt	real	+	tilt $\alpha_{tilt}$	0.
SET_comp_control	int	+	use component control (0 for $c = Tc_{AC}$ ; 1 for $c = Tc_{AC} + c_0$ )	1
SET_cg	int	+	center of gravity specification (0 baseline plus increment, 1 input)	0
dSLcg	real	+	stationline	0.
dBLCg	real	+	buttlne	0.
dWLcg	real	+	waterline	0.

		+ Specification, each propulsion group	
SET_Vtip(npropmax)	c*12	+ rotor tip speed specification	'hover'
Vtip(npropmax)	real	+ tip speed	,
Mtip(npropmax)	real	+ tip Mach number $M_{tip}$	,
mu_Vtip(npropmax)	real	+ tip speed from $\mu$	,
Mat_Vtip(npropmax)	real	+ tip speed from $M_{at}$	,
Nrotor(npropmax)	real	+ rotor speed (rpm)	,
Nspec(npropmax)	real	+ engine speed (rpm)	,
STATE_gear(npropmax)	int	+ drive system state	1
rating_ds(npropmax)	c*12	+ drive system rating	,
SET_Plimit(npropmax)	int	+ drive system limit (0 not applied to power available)	1
SET_Qlimit_rs(npropmax)	int	+ rotor shaft limit (0 not used for torque margin)	1
dPacc(npropmax)	real	+ accessory power increment $dP_{acc}$	0.
		+ Specification, each engine group	
rating(nengmax)	c*12	+ engine rating	'MCP'
fPower(nengmax)	real	+ fraction of rated engine power available $f_P$ (0. to 1.+)	1.
nEngInop(nengmax)	int	+ number of inoperative engines $N_{inop}$	0
SET_Preq(nengmax)	int	+ power required (1 distributed, 2 fixed $A$ , 3 fixed $AP_{av}$ , 4 fixed $AP_{eng}$ )	1
STATE_IRS(nengmax)	int	+ IR suppressor system state (0 off, hot exhaust; 1 on, suppressed exhaust)	0
		+ Specification, each jet group	
rating_jet(njetmax)	c*12	+ jet rating	'MCT'
fThrust(njetmax)	real	+ fraction of rated jet thrust available $f_T$ (0. to 1.+)	1.
nJetInop(njetmax)	int	+ number of inoperative jets $N_{inop}$	0
SET_Jreq(njetmax)	int	+ thrust required (1 from component, 2 fixed $A$ , 3 fixed $AT_{av}$ , 4 fixed $AT_{jet}$ )	2
STATE_IRS_jet(njetmax)	int	+ IR suppressor system state (0 off, hot exhaust; 1 on, suppressed exhaust)	0
		+ Specification, each charge group	
rating_charge(nchrgmax)	c*12	+ charger rating	'MCP'
fCharge(nchrgmax)	real	+ fraction of rated charger power available $f_C$ (0. to 1.+)	1.
nChrgInop(nchrgmax)	int	+ number of inoperative chargers $N_{inop}$	0
SET_Creq(nchrgmax)	int	+ power required (2 fixed $A$ , 4 fixed $AP_{chrg}$ )	2
dPeq(ntankmax)	real	+ Equipment power increment $dP_{eq}$ , each fuel tank	0.
		+ Specification, each fuel tank (battery)	
ffade(ntankmax)	real	+ battery capacity fade factor	1.
Tcell(ntankmax)	real	+ cell temperature (deg C)	20.

fcurrent(ntankmax)	real	+ maximum current (fraction $x_{mbd}$ or $x_{CC\max}$ )	1.
STATE_deice	int	+ Deice system state (0 off)	0
		+ Performance	
DoQ_pay	real	+ payload forward flight drag increment $D/q$ (Units_drag)	0.
fDoQ_pay	real	+ payload drag increment scaling with weight $\Delta(D/q)/W_{pay}$ (Units_drag, Units_pay)	0.
DoQV_pay	real	+ payload vertical drag increment $D/q$ (Units_drag)	0.
		+ Rotor (nonzero to supersede rotor model)	
Ki(nrotormax)	real	+ induced power factor $\kappa$	0.
cdo(nrotormax)	real	+ profile power mean $c_d$	0.
MODEL_Ftp(nrotormax)	int	+ inplane forces, tip-path plane axes (1 neglect, 2 blade-element theory)	0
MODEL_Fpro(nrotormax)	int	+ inplane forces, profile (1 simplified, 2 blade element theory, 3 neglect)	0
KIND_control(nrotormax)	int	+ control mode (1 thrust and TPP, 2 thrust and NFP, 3 pitch and TPP, 4 pitch and NFP)	0
		+ Trim solution	
STATE_trim	c*12	+ aircraft trim state (match IDENT_trim, 'none' for no trim)	'none'
trim_target(mtrimmax)	real	+ trim quantity targets	
		+ Iterations (supersede Solution input if nonzero)	
		+ relaxation factor	
relax_rotor	real	+ all rotors	0.
relax_trim	real	+ trim	0.
relax_fly(2)	real	+ maximum effort	0.
relax_maxgw	real	+ maximum gross weight	0.
		+ tolerance (fraction reference)	
toler_rotor	real	+ all rotors	0.
toler_trim	real	+ trim	0.
toler_fly(2)	real	+ maximum effort	0.
toler_maxgw	real	+ maximum gross weight	0.
		+ reinitialize aircraft controls (0 no, 1 force retrim)	
init_trim	int	+ trim	0
init_fly	int	+ maximum effort	0
		+ variable perturbation amplitude (fraction reference, 0. for no limit)	
perturb_trim	real	+ trim	0.
perturb_fly(2)	real	+ maximum effort	0.
perturb_maxgw	real	+ maximum gross weight	0.

maxderiv_fly(2)	real	+	maximum derivative amplitude (0. for no limit)	
maxderiv_maxgw	real	+	maximum effort	0.
		+	maximum gross weight	0.
		+	maximum increment fraction (0. for no limit)	
maxinc_fly(2)	real	+	maximum effort	0.
maxinc_maxgw	real	+	maximum gross weight	0.
		+	solution method	
method_flymax(2)	int	+	maximum effort	0
		+	trace iteration (0 for none)	
trace_rotor	int	+	all rotors	0
trace_trim	int	+	trim (2 for component controls)	0
trace_fly(2)	int	+	maximum effort	0
trace_maxgw	int	+	maximum gross weight	0

---

maximum effort performance: one or two quantity/variable identified; first is inner loop

two variables must be unique

two variables can be identified for same maximized quantity (endurance, range, climb)

ROC or altitude can be outer loop quantity only if it is also inner loop variable

fVel is only used for max\_var='speed' or 'ROC'

ceiling calculation should use 'Pmargin'/'alt' as inner loop, 'power'/'speed' as outer loop

best range calculation often requires maxinc\_fly=0.1 for convergence

ROC for zero power margin initialized based on level flight power margin if input ROC=0

max\_quant='rotor(s) n' uses Rotor%CTs\_steady, max\_quant='rotor(t) n' uses Rotor%CTs\_tran

max\_quant='rotor(e) n' uses equation for rotor thrust capability (Rotor%K0\_limit and Rotor%K1\_limit)

if energy burned (not weight) or multiple fuels, use equivalent fuel flow obtained from weighted energy flow

max\_var='Vtip' or 'Nspec': requires FltAircraft%SET\_Vtip='input'

if trailing "n" is absent, use first component (n=1)

max\_limit: switch quantity to power and/or torque margin if margin negative; useful for best range

description	max_quant
endurance	'end'
range (high side)	'range'
range	'range(100)'
range (low side)	'range(low)'
climb or descent rate	'climb', 'ROC'
climb rate (power)	'power'
climb or descent angle	'angle'
climb angle (power)	'power/V'
ceiling	'alt'
power margin	'P margin'
torque margin	'Q margin',
jet thrust margin	'J margin',
power and torque margin	'PQ margin',
power and thrust margin	'PJ margin',
torque and thrust margin	'QJ margin',
power, torque, thrust margin	'PQJ margin',
battery power margin	'B margin'
rotor thrust margin	'rotor(t) n'
rotor thrust margin	'rotor(s) n'
rotor thrust margin	'rotor(e) n'
wing lift margin	'stall n'
	maximum (1/fuelflow)
	0.99 maximum (V/fuelflow)
	maximum (V/fuelflow)
	0.99 maximum (V/fuelflow), low side
	maximum (ROC)
	maximum (1/Power)
	maximum (ROC/V)
	maximum (V/Power)
	maximum (altitude)
	$\min(P_{av} - P_{req}) = 0$ (all propulsion groups)
	$\min(Q_{limit} - Q_{req}) = 0$ (all limits)
	$\min(T_{av} - T_{req}) = 0$ (all jet groups)
	most restrictive
	$\min(P_{max} -  \dot{E}_{batt} ) = 0$ (all fuel tanks)
	$(C_T/\sigma)_{max} -  C_T/\sigma  = 0$ (transient)
	$(C_T/\sigma)_{max} -  C_T/\sigma  = 0$ (sustained)
	$(C_T/\sigma)_{max} -  C_T/\sigma  = 0$ (equation)
	$C_{Lmax} - C_L = 0$

description	max_var
horizontal velocity	'speed'
vertical rate of climb	'ROC'
aircraft velocity	'side'
altitude	'alt'
aircraft angular rate	'pullup', 'turn'
aircraft acceleration	'xacc', 'yacc', 'zacc'
aircraft acceleration	'xaccl', 'yaccl', 'zaccl'
	times fVel
	times fVel
	sideslip angle
	Euler angle rates
	linear, airframe axes
	linear, inertial axes

description	max_var	
aircraft acceleration	'xaccG', 'yaccG', 'zaccG'	linear, ground axes
aircraft control	match IDENT_control	
aircraft orientation	'pitch', 'roll'	body axes relative inertial axes
propulsion group tip speed	'Vtip n'	
propulsion group engine speed	'Nspec n'	

SET\_vel, velocity specification:

- 'general' = general (use Vkts=horizontal, ROC, side)
- 'hover' = hover (zero velocity)
- 'vert' = hover or VROC (use ROC; Vkts=0, climb=0/+90/-90)
- 'right' = right sideward (use Vkts, ROC; side=90)
- 'left' = left sideward (use Vkts, ROC; side=-90)
- 'rear' = rearward (use Vkts, ROC, side=180)
- 'Vfwd' = general (use Vkts=forward velocity, ROC, side)
- 'Vmag' = general (use Vkts=velocity magnitude, ROC, side)
- 'climb' = general (use Vkts=velocity magnitude, climb, side)
- 'VNE' = never-exceed speed
- '+Mach' = use Mach not Vkts
- '+CAS' = Vkts is CAS not TAS
- '+IAS' = Vkts is IAS not TAS

velocities: forward  $V_f = V_h \cos(\text{side})$ , side  $V_s = V_h \sin(\text{side})$ , climb  $V_c = V_h \tan(\text{climb})$

aircraft motion:

- orientation velocity relative inertial axes defined by climb and sideslip angles ( $\theta_V, \psi_V$ )
- sideslip positive aircraft moving to right, climb positive aircraft moving up
- specify horizontal velocity, vertical rate of climb, and sideslip angle
- orientation body relative inertial axes defined by Euler angles, yaw/pitch/roll ( $\psi_F, \theta_F, \phi_F$ )
- yaw positive to right, pitch positive nose up, roll positive to right

SET\_PITCH and SET\_roll, pitch and roll motion specification:

- Aircraft values (perhaps function speed) or flight state input
- initial values specified if motion is trim variable; otherwise fixed for flight state
- SET\_turn, bank angle and load factor in turn: use turn rate, load factor, or bank angle
- $\tan(\text{roll}) = \sqrt{n^2 - 1} = (\text{turn})V/g$ ; calculated using input Vkts for flight speed

SET\_pullup, load factor in pullup: use pullup rate or load factor

$$n = 1 + (\text{pullup})V/g; \text{ calculated using input } V\text{kts for flight speed}$$

SET\_acc, linear acceleration: use acceleration or load factor

SET\_atmos, atmosphere specification:

'std' = standard day at specified altitude (use altitude)

'polar' = polar day at specified altitude (use altitude)

'trop' = tropical day at specified altitude (use altitude)

'hot' = hot day at specified altitude (use altitude)

'xxx+dtemp' = specified altitude, plus temperature increment (use altitude, dtemp)

'xxx+temp' = specified altitude, and specified temperature (use altitude, temp)

'hot+table' = hot day table at specified altitude (use altitude)

'dens' = input density and temperature (use density, temp)

'input' = input density, speed of sound, and viscosity (use density, csound, viscosity)

'notair' = input, not air on earth (use density, csound, viscosity)

SET\_GE: use HAGL; out-of-ground-effect (OGE) if rotor more than 1.5Diameter above ground

height rotor = landing gear above ground + hub above landing gear = HAGL + (WL\_hub-WL\_gear+d\_gear)

STATE\_LG: 'default' (based on retraction speed), 'extend', 'retract' (keyword = def, ext, ret)

STATE\_control, aircraft control state: identifies control matrix

STATE\_control=0 to use conversion schedule, STATE\_control=n (1 to nstate\_control) to use state#n

SET\_control, control specification: Aircraft values (perhaps function speed) or flight state input

coll/latcyc/lngcyc/pedal/tilt specification and values put in SET\_control and control, based on IDENT\_control

initial values specified if control is trim variable; otherwise fixed for flight state

SET\_control=0 to use Aircraft%cont and Aircraft%Vcont; 1 to use FltState%control

SET\_tilt: 0 to use Aircraft%tilt and Aircraft%Vtilt; 1 to use FltState%tilt

2 to use conversion speeds Aircraft%Vconv\_hover and Aircraft%Vconv\_cruise

SET\_cg, center of gravity position: input for this flight state; or

baseline cg position plus shift due to nacelle tilt, plus input cg increment

tip speed, engine, transmission: for each propulsion group  
 SET\_Vtip, primary rotor tip speed: for primary rotor of propulsion group  
 'input' = use input Vtip for this flight state  
 'Mtip' = use input Mtip for this flight state  
 'Nrotor' = use input Nrotor (rpm) for this flight state  
 'ref' = use Vtip\_ref (for drive state STATE\_gear)  
 'speed' = use default Vtip(speed)  
 'conv' = use conversion schedule (Vtip\_hover or Vtip\_cruise)  
 'hover' = use default Vtip\_hover = Vtip\_ref(1)  
 'cruise', 'man', 'OEI', 'xmsn' = use default Vtip\_cruise, Vtip\_man, Vtip\_oei, Vtip\_xmsn  
 'mu' = use tip speed from  $\mu$  (mu\_Vtip)  
 'Mat' = use tip speed from  $M_{at}$  (Mat\_Vtip)  
 'xxx+Mat' = for tip speed limited by  $M_{at}$  (Mat\_Vtip)  
 'xxx+diam' = for variable diameter rotor, scale  $V_{tip}$  with radius ratio  
 without rotors, specify engine group speed by SET\_Vtip='input' (use input Nspec) or 'ref'  
 STATE\_gear, drive system state: identifies gear ratio set for multiple speed transmissions  
 state=0 to use conversion schedule, state=n (1 to nGear) to use gear ratio #n  
 drive system rating: match rating designation in propulsion group; blank for same as rating of first engine group  
 rating\_ds='speed' to use schedule with speed  
 if Propulsion%nratge\_ds ≤ 1, drive system rating not used  
 SET\_Plmit: usually should not be applied for flight conditions and mission segments that size transmission  
 engine rating: match rating designation in engine model; e.g. 'ERP','MRP','IRP','MCP'  
 or rating='idle' or rating='takeoff'  
 fPower reduces engine group power available (fPower = 0 to 1; > 1 is an acceptable input)  
 the engine model gives the power available, accounting for installation losses and mechanical limits  
 then the power available is reduced by the factor fPower  
 next torque limits are applied (unless SET\_Plmit=off), first engine shaft limit and then drive system limit  
 for SET\_GW='maxP' or 'maxPQ' (flight condition or mission), the gross weight is determined  
 such that  $P_{reqPG} = fP_{avPG} + d$   
 either fPower or fPav can be used to reduce the available power  
 with identical results, unless the engine group is operating at a torque limit  
 nEngInop, number inoperative engines: 1 for one engine inoperative (OEI), maximum nEngine

**SET\_Preq:** distribution of propulsion group power required among engine groups  
 distributed (SET\_Preq=1):  $P_{reqEG}$  from  $P_{reqPG}$ , proportional  $P_{eng}$   
 except for reaction drive,  $P_{reqEG}$  equals rotor power required  
 fixed options use engine group amplitude control variable  $A$ , for each operable engine  
 engine group that consumes shaft power (generator or compressor) only uses fixed option  
 engine group that produces no shaft power (converted to turbo jet or reaction drive) only uses fixed option  
 $\text{EngineGroup\%SET\_Power}$ , fPsize defines power distribution for sizing

jet rating: match rating designation in jet model; or rating\_jet='idle' or rating\_jet='takeoff'  
 $f_{Thrust}$  reduces jet group thrust available ( $f_{Thrust} = 0$  to  $1$ ;  $> 1$  is an acceptable input)  
 $n_{JetInop}$ , number inoperative jets: 1 for one jet inoperative (OEI), maximum  $n_{Jet}$   
**SET\_Jreq:** fixed options use jet group amplitude control variable  $A$ , for each operable jet  
 from component (SET\_Jreq=1): only for reaction drive,  $T_{reqJG} = F_{react}$  of rotor

charger rating: match rating designation in charger model; or rating\_charge='idle' or rating\_charge='takeoff'  
 $f_{Charge}$  reduces charger group power available ( $f_{Charge} = 0$  to  $1$ ;  $> 1$  is an acceptable input)  
 $n_{ChrgInop}$ , number inoperative chargers: 1 for one charger inoperative (OEI), maximum  $n_{Charge}$   
**SET\_Creq:** use charge group amplitude control variable  $A$ , for each operable charger

**STATE\_trim**, aircraft trim state: match IDENT\_trim, 'none' for no trim  
 identifies trim variables and quantities  
**ACTION='configuration'** defines trim states with following identification:  
 IDENT\_trim='free', 'symm', 'hover', 'thrust', 'rotor', 'windtunnel', 'power', 'ground', 'comp'  
 requirement for trim\_target depends on designation of Aircraft%trim\_quant

---

parent	int	parent (1 SizeCond, 2 SizeMiss, 3 OffMiss, 4 PerfCond)
kMission	int	Mission number
kMissSeg	int	MissSeg number
kFltState	int	FltState number
kcol_out	int	performance output column

		Maximum effort
iMAX_quant(2)	int	quantity (MAX_QUANT_xxx)
iMAX_quantn(2)	int	quantity structure number
iMAX_islope(2)	int	quantity is slope (maximize)
iMAX_var(2)	int	variable (MAX_VAR_xxx, or control number)
iMAX_varn(2)	int	variable structure number
		Specification
iSET_vel	int	velocity (SET_vel_xxx)
iSET_vel2	int	velocity (SET_vel2_TAS, SET_vel2_CAS, SET_vel2_Mach)
isSideward	int	sideward flight (1 for sideward flight)
iSET_atmos	int	atmosphere (SET_atmos_xxx)
iSTATE_LG	int	landing gear state (STATE_LG_default, extend, retract)
iSTATE_trim	int	aircraft trim state (number, 0 for no trim)
		Specification, each propulsion group
iSET_Vtip(npropmax)	int	rotor tip speed (SET_Vtip_input, Nrotor, ref, speed, conv, hover, cruise, man, OEl, xmsn, mu, Mat, Mtip)
iSET_Vtip_Mat(npropmax)	int	rotor tip speed limited by $M_{at}$
iSET_Vtip_VarDiam(npropmax)	int	rotor tip speed for variable diameter rotor (1 to scale $V_{tip}$ with radius ratio)
iSETPmargin(npropmax)	int	power margin as quantity (2 maximum effort, 1 trim)
iSETQmargin(npropmax)	int	torque margin as quantity (2 maximum effort, 1 trim)
krate_ds(npropmax)	int	drive system rating number
		Specification
krate(nengmax)	int	engine rating number
krate_jet(njetmax)	int	jet rating number
krate_charge(nchrgrmax)	int	charger rating number
iSETEmargin(nengmax)	int	power margin as quantity (1 trim)
iSETJmargin(njetmax)	int	jet thrust margin as quantity (2 maximum effort, 1 trim)
iSETCmargin(nchrgrmax)	int	charger power margin as quantity (1 trim)
iSETBmargin(ntankmax)	int	battery power margin as quantity (2 maximum effort, 1 trim)
		Weight
GW	real	gross weight $W_G$
Wfuel_total	real	usable fuel weight $W_{fuel}$
Wfuel(ntankmax)	real	usable fuel weight
Wfuel_std(ntankmax)	real	standard tanks

Wfuel_aux(ntankmax)	real	auxiliary tanks
Wpayload	real	payload weight $W_{\text{pay}}$
Wpay_pass	real	passengers $W_{\text{pass}}$
Wpay_cargo	real	cargo $W_{\text{cargo}}$
Wpay_extload	real	external load $W_{\text{ext-load}}$
Wpay_ammo	real	ammunition $W_{\text{ammo}}$
Wpay_weapons	real	weapons $W_{\text{weapons}}$
Wpay_other	real	other $W_{\text{other}}$
WFixUL	real	fixed useful load $W_{FUL}$
dW_fixUL	real	fixed useful load increment (replace weight statement W_fixUL)
Wcrew	real	crew (replace weight statement W_fixUL_crew)
Wauxtank	real	auxiliary fuel tanks (replace weight statement W_fixUL_auxtank)
W_fixUL_other	real	other fixed useful load (replace weight statement W_fixUL_other)
Woful(10)	real	categories
Wequip	real	equipment increment (replace weight statement W_fixUL_equip)
Wfoldkit	real	folding kit (replace weight statement W_fixUL_foldkit)
Wextkit	real	wing extension kit (replace weight statement W_fixUL_extkit)
Wwingkit	real	wing kit (replace weight statement W_fixUL_wingkit)
Wotherkit	real	other kit (replace weight statement W_fixUL_otherkit)
WO	real	operating weight $W_O$
Ncrew	int	number of crew
Npass	int	number of passengers
Ncrew_seat	int	number of crew seats
Npass_seat	int	number of passenger seats
Efuel_total	real	usable fuel energy $E_{\text{fuel}}$
Efuel(ntankmax)	real	usable fuel energy
Efuel_std(ntankmax)	real	standard tanks
Efuel_aux(ntankmax)	real	auxiliary tanks
GW_start	real	Weight at mission segment start
Wfuel_start(ntankmax)	real	gross weight $W_G$
Wfuel_std_start(ntankmax)	real	usable fuel weight $W_{\text{fuel}}$
Wfuel_aux_start(ntankmax)	real	standard tanks
Efuel_start(ntankmax)	real	auxiliary tanks
		usable fuel energy $E_{\text{fuel}}$

Efuel_std_start(ntankmax)	real	standard tanks
Efuel_aux_start(ntankmax)	real	auxiliary tanks
zcg(3)	real	Center of gravity position
SLcg	real	stationline
BLcg	real	buttlne
WLcg	real	waterline
		Moments of inertia
Ixx	real	$I_{xx}$
Iyy	real	$I_{yy}$
Izz	real	$I_{zz}$
Ixy	real	$I_{xy}$
Iyz	real	$I_{yz}$
Ixz	real	$I_{xz}$

---

weight statement defines fixed useful load and operating weight for design configuration  
so for flight state, additional fixed useful load = auxiliary fuel tank and kits and increments  
gross weight = weight empty + useful load = operating weight + payload + usable fuel  
useful load = fixed useful load + payload + usable fuel  
operating weight = weight empty + fixed useful load

---

Atmosphere		
alt	real	altitude $h$
tmp	real	temperature $\tau$
dtmp	real	temperature increment $\Delta T$
sigma	real	density ratio $\rho/\rho_0$
theta	real	temperature ratio $T/T_0$
delta	real	pressure ratio $p/p_0$
kinvis	real	kinematic viscosity $\nu = \mu/\rho$
altdens	real	density altitude $h_d$
altpress	real	pressure altitude $h_p$

		Flight condition
radius(nrotormax)	real	rotor radius $R$
VNE	real	never-exceed speed $V_{NE}$ (knots TAS)
		rotational speeds
Vtip_trim(nrotormax)	real	rotor tip speed $\Omega R$
rpm_trim(nrotormax)	real	rotor rpm $\Omega$
rN_trim_rotor(nrotormax)	real	rotor $\Omega/\Omega_{ref}$
N_trim(nengmax)	real	engine rpm $N$
rN_trim_eng(nengmax)	real	engine $N/N_{spec}$
rN_trim_ref(npropmax)	real	propulsion group reference speed ratio
		flight speed
speed	real	horizontal speed $V_h$ (knots)
Vclimb	real	climb velocity $V_c$ (ft/sec or m/sec)
side_trim	real	sideslip angle $\psi_V$ (deg)
		derived
Vhoriz	real	horizontal velocity $V_h$ (ft/sec or m/sec)
Mhoriz	real	horizontal Mach number $V_h/c_s$
climb_trim	real	climb angle $\theta_V$ (deg)
Vside	real	sideward velocity $V_s$ (ft/sec or m/sec)
Vmag	real	velocity magnitude $ V $
Vfwd	real	forward velocity $V_f$ (ft/sec or m/sec)
VCAS	real	calibrated airspeed $V_{cal}$ (knots) ( $V\sqrt{\sigma}f(\delta, M)$ )
VIAS	real	indicated airspeed $V_{ind}$ (knots)
VAC(3)	real	velocity $v_{AC}$ in F axes
ed(3)	real	drag vector, $-v_{AC}/ v_{AC} $ in F axes
qAC	real	dynamic pressure $q_{AC}$
		angular velocity
turn_trim	real	turn $\dot{\psi}_F$ (yaw rate)
pullup_trim	real	pullup $\dot{\theta}_F$ (pitch rate)
turnRadius	real	turn radius $R_T$
wAC(3)	real	$\omega_{AC}$ in F axes
		acceleration
aAC(3)	real	$a_{AC}$ in F axes (linear)
nAC(3)	real	load factor $n_{AC}$ (linear acc and angular rate)

KIND_alpha	int	angle of attack and sideslip angle representation (1 conventional, 2 reversed) orientation of body axes relative inertial axes
pitch_trim	real	pitch angle $\theta_F$ (deg)
roll_trim	real	roll angle $\phi_F$ (deg)
		rotation matrices
CFI(3,3)	real	$C^{FI}$ , velocity axes relative inertial axes
CVI(3,3)	real	$C^{VI}$ , body axes relative inertial axes
CFV(3,3)	real	$C^{FV}$ , body axes relative velocity axes
control_trim(ncontmax)	real	aircraft controls
Nauxtank(nauxtankmax,ntankmax)	int	number of auxiliary fuel tanks $N_{auxtank}$ (each aux tank size), from FltCond or MissSeg
SET_extkit(nwingmax)	int	wing extension kit on aircraft (0 none, 1 present)
SET_wingkit(nwingmax)	int	wing kit on aircraft (0 none, 1 present)
Wfuel_cap(ntankmax)	real	total fuel capacity $W_{fuel\_cap}$ , including auxiliary tanks
Efuel_cap(ntankmax)	real	total fuel capacity $E_{fuel\_cap}$ , including auxiliary tanks
slope_ground	real	slope of ground $\gamma_G$ (+uphill; deg), from MissSeg
SET_sweep	int	parameter sweep, from FltCond

---

angle of attack and sideslip angle representation: from Aircraft and isSideward

orientation body relative inertial axes defined by Euler angles, with yaw/pitch/roll sequence ( $\psi_F, \theta_F, \phi_F$ )

yaw positive to right, pitch positive nose up, roll positive to right

$$C^{FI} = X_{\text{roll}}Y_{\text{pitch}}Z_{\text{yaw}}, \text{ yaw angle} = (\text{turn}) * \text{time}$$

orientation velocity relative inertial axes defined by climb and sideslip angles ( $\theta_V, \psi_V$ )

sideslip positive aircraft moving to right, climb positive aircraft moving up

$$C^{VI} = Y_{\text{climb}}Z_{\text{side}}Z_{\text{yaw}}$$

orientation body relative velocity axes:  $C^{FV} = X_{\text{roll}}Y_{\text{pitch}}Z_{-\text{side}}Y_{-\text{climb}}$

---

#### Trim (last)

istrimconv	int	converged (0 not)
count_trim	int	number of iterations
error_trim(mtrimmax)	real	error ratio
gain_trim(mtrimmax,mtrimmax)	real	gain matrix

isflyconv(2,2)	int	Maximum effort (principal iteration, 99% range iteration; inner, outer loops) converged (0 not)
count_fly(2,2)	int	number of iterations
error_fly(2,2)	real	error ratio
isSwitched(2)	int	quantity switched (1 P margin, 2 Q margin, 3 both)
ismaxgwconv	int	Maximum gross weight (flight condition or mission takeoff) converged (0 not)
count_maxgw	int	number of iterations
error_maxgw	real	error ratio
isrotorconv	int	Rotor flap equation (all converged or any not converged) converged (0 not, -1 no iteration)
count_control	int	Solution state count of solution (0 at start, get aircraft controls)
trim_deriv_exist	int	trim derivative matrix exist (0 for not)
 Loads		
forces (F axes, about cg)		
Faero(3)	real	aerodynamic $F_{\text{aero}}^F$ (fuselage, rotor, wing, tail, tank, engine, jet, charger)
Frotor(3)	real	rotor $F_{\text{rotor}}^F$
Fengine(3)	real	engine groups $F_{\text{eng}}^F$ (jet thrust, momentum drag)
Fjet(3)	real	jet groups $F_{\text{jet}}^F$
Fchrg(3)	real	charge groups $F_{\text{charge}}^F$
Fgrav(3)	real	gravitational $F_{\text{grav}}^F$
Finertia(3)	real	inertial $F_{\text{inertial}}^F$ (turn)
moments (F axes, about cg)		
Maero(3)	real	aerodynamic $M_{\text{aero}}^F$ (fuselage, rotor, wing, tail, tank, engine, jet, charger)
Mrotor(3)	real	rotor $M_{\text{rotor}}^F$
Mengine(3)	real	engine groups $M_{\text{engine}}^F$ (jet thrust, momentum drag)
Mjet(3)	real	jet groups $M_{\text{jet}}^F$
Mchrg(3)	real	charge groups $M_{\text{charge}}^F$
Minertia(3)	real	inertial $M_{\text{inertial}}^F$ (turn)
Ftotal(3)	real	total force (F axes, about cg); $F + F_{\text{grav}} - F_{\text{inertia}}$
Mtotal(3)	real	total moment (F axes, about cg); $M - M_{\text{inertia}}$
Download	real	download, aero $F_z$ (I axes); set to 0 if V>10 knots

Thrust	real	rotor thrust, rotor $-F_z$ (I axes; sum Fvert)
DLoT	real	download/thrust $DL/T$
DLoW	real	download/weight $DL/W$
diskloadT	real	aircraft disk loading $T/A_{ref}$ (lb/ft <sup>2</sup> or N/m <sup>2</sup> )
diskloadW	real	aircraft disk loading $W_G/A_{ref}$ (lb/ft <sup>2</sup> or N/m <sup>2</sup> )
Aref	real	reference rotor area $A_{ref} = \sum f_A A$
		Aircraft performance
Preq	real	power required $P_{req}$ (engine groups)
Pmargin	real	power margin, $\min(P_{av} - P_{req})$ (propulsion groups and converted engine groups)
Qmargin	real	torque margin, $\min(P_{limit} - P_{req})$
exceedP	int	exceed power available: any propulsion group $P_{reqPG} > (1 + \epsilon)P_{avPG}$
exceedQ	int	exceed torque available: any propulsion group $P_{reqPG} > (1 + \epsilon)P_{DSlimit}$
Tjet	real	thrust required $T_{jet}$ (jet groups)
Jmargin	real	jet thrust margin, $\min(T_{av} - T_{req})$
exceedJ	int	exceed jet thrust available: any jet group $T_{reqJG} > (1 + \epsilon)T_{avJG}$
Pchrg	real	power required $P_{chrg}$ (charge groups)
Cmargin	real	charger power margin, $\min(P_{av} - P_{req})$
exceedC	int	exceed charger power available: any charge group $P_{reqCG} > (1 + \epsilon)P_{avCG}$
Pequiv	real	equivalent aircraft power required $P = P_{req} + VT_{jet}$
Pclimb	real	climb power, $V_{climb}W$
fuelflow(ntankmax)	real	fuel flow $\dot{w}$
fuelflow_total	real	total fuel flow $\dot{w}$
fuelflow_equiv	real	equivalent fuel flow $\dot{w}_{equiv}$ , from energy flow
energyflow(ntankmax)	real	energy flow $\dot{E}$
energyflow_total	real	total energy flow $\dot{E}$
exceedWf	int	exceed fuel capacity: $W_{fuel} > (1 + \epsilon)W_{fuel-cap}$ or $E_{fuel} > (1 + \epsilon)E_{fuel-cap}$
Bmargin	real	battery power margin, $\min(P_{max} -  \dot{E}_{batt} )$ (MJ/hr)
exceedB	int	exceed battery power: any fuel tank $ \dot{E}_{batt}  > (1 + \epsilon)P_{max}$
sfc	real	sfc, $P_{equiv}/\dot{w}_{equiv}$
spec_range	real	specific range, $V/\dot{w}_{equiv}$

		Performance indices
FM	real	aircraft figure of merit $FM = W \sqrt{W/(2\rho A_{ref})}/P$
LoDe	real	aircraft effective lift-to-drag ratio $L/D_e = WV/P$
Drage	real	aircraft effective drag $D_e = P/V$
DragAC	real	aircraft drag $D_{AC}$
DoQAC	real	aircraft drag area $D/q = D_{AC}/q_{AC}$ ; set to 0 if V<10 knots
WoP	real	power loading $W/P$
range_onepcW	real	range for fuel=1%GW (nm)
fuel_eff	real	fuel efficiency $e = W_{pay}V/\dot{w}_{equiv}$ (ton-nm/lb or ton-nm/kg)
productivity	real	productivity $p = W_{pay}V/W_O$ (ton-kt/lb or ton-kt/kg)
		Operating size
length_op	real	length
width_op	real	width
area_op	real	area

## Chapter 21

**Structure: FltFuse**

Variable	Type	Description	Default
VintR(3,nrotormax)	real	Flight State - Fuselage aerodynamics	
Vaero(3)	real	interference velocity $v_{\text{int}}^F$ , from rotors (F axes)	
VB(3)	real	total velocity relative air $v^F$ (F axes)	
alpha	real	total velocity relative air $v^B$ (B axes)	
beta	real	angle of attack $\alpha$ (deg)	
beta	real	sideslip angle $\beta$ (deg)	
CBA(3,3)	real	$C^{BA}$	
Vmag	real	velocity magnitude	
q	real	dynamic pressure	
DoQ_pay	real	payload $D/q$	
DoQ_cont	real	contingency $D/q$	
CL	real	lift coefficient $C_L$	
CM	real	pitch moment coefficient $C_M$	
CD	real	drag coefficient $C_D$	
CY	real	side force coefficient $C_Y$	
CN	real	yaw moment coefficient $C_N$	
L	real	lift	
M	real	pitch moment	
D	real	drag	
Y	real	side force	
N	real	yaw moment	
		loads	
Faero(3)	real	aerodynamic force $F_{\text{aero}}^F$ (F axes, about cg)	
Maero(3)	real	aerodynamic moment $M_{\text{aero}}^F$ (F axes, about cg)	
Drag	real	drag $e_d^T F_{\text{aero}}^F$	
Download	real	download, aero $F_z$ (I axes)	

## Chapter 22

**Structure: FltGear**

Variable	Type	Description	Default
iSTATE_LG	int	Flight State - Landing Gear aerodynamics	
Vaero(3)	real	landing gear state (STATE_LG_extended, retracted)	
Vmag	real	total velocity relative air $v^F$ (F axes)	
q	real	velocity magnitude	
ed(3)	real	dynamic pressure	
Faero(3)	real	drag vector, $-v/ v $ in F axes	
Maero(3)	real	aerodynamic force $F_{\text{aero}}^F$ (F axes, about cg)	
Drag	real	aerodynamic moment $M_{\text{aero}}^F$ (F axes, about cg)	
Download	real	drag $e_d^T F_{\text{aero}}^F$	
		download, aero $F_z$ (I axes)	

## Chapter 23

**Structure: FltRotor**

Variable	Type	Description	Default
KIND_control_coll	int	Flight State - Rotor control mode control mode	
KIND_control_cyc	int	collective control mode (1 thrust command, 2 pitch command)	
Scoll	real	cyclic control mode (1 TPP command, 2 NFP command)	
Scyc	real	collective $T$ matrix scale factor $S$ ( $1, a/6, \rho V_{\text{tip}}^2 A_{\text{blade}} a/6$ )	
		cyclic $T$ matrix scale factor $S$ (-1 TPP command, 1 NFP command)	
coll	real	controls	
lngcyc	real	collective	
latcyc	real	longitudinal cyclic	
incid	real	lateral cyclic	
cant	real	incidence	
diam	real	cant	
fgear	real	diameter	
		gear ratio factor	
Ccont(3,3)	real	geometry	
CSF(3,3)	real	shaft control, $C_{\text{cont}}$	
zhub(3)	real	shaft relative airframe, $C^{SF}$	
zpylon(3)	real	hub position, $z_{\text{hub}}$	
znac(3)	real	pylon position, $z_{\text{pylon}}$	
CBF(3,3)	real	nacelle cg position, $z_{\text{nac}}$	
		pylon relative airframe, $C^{BF}$	
radius	real	condition	
Vtip	real	radius $R$	
Omega	real	tip speed $V_{\text{tip}} = \Omega R$	
Mtip	real	rotational speed $\Omega$	
Mat	real	tip Mach number $M_{\text{tip}}$	
sigma	real	maximum Mach number $M_{at}$ (advancing tip or helical)	
		solidity $\sigma$ (thrust weighted)	

gamma	real	Lock number $\gamma$
Iblade	real	blade moment of inertia $I_{\text{blade}}$
flapfreq	real	flap frequency $\nu$
conefreq	real	coning frequency $\nu$
Khub	real	hub stiffness $K_{\text{hub}}$
		performance
		shaft axis loads
T	real	thrust
H	real	drag force
Y	real	side force
Mx	real	roll moment
My	real	pitch moment
Q	real	torque
CT	real	thrust coefficient $C_T$
CH	real	drag force coefficient $C_H$
CY	real	side force coefficient $C_Y$
CMx	real	roll moment coefficient $C_{Mx}$
CMy	real	pitch moment coefficient $C_{My}$
CQ	real	torque coefficient $C_Q$
		control and motion
theta75	real	collective pitch $\theta_{0.75}$ (0.75R)
thetas	real	longitudinal cyclic pitch $\theta_s$
thetac	real	lateral cyclic pitch $\theta_c$
beta0	real	coning $\beta_0$
betac	real	longitudinal flapping $\beta_c$
betas	real	lateral flapping $\beta_s$
lambda0	real	inflow $\lambda_0 = \kappa \lambda_i$
CPS(3,3)	real	tip-path plane relative shaft, $C^{PS}$
		velocity and inflow
VoVtip	real	$V/V_{\text{tip}}$
VF(3)	real	total velocity relative air $v^F$ (F axes)
VS(3)	real	total velocity relative air $v^S$ (S axes)
mux	real	$\mu_x$
muy	real	$\mu_y$

muz	real	$\mu_z$
omegaS(3)	real	angular velocity $\omega^S$ (S axes)
dax	real	$\dot{\alpha}_x$
day	real	$\dot{\alpha}_y$
mu	real	$\mu = \sqrt{\mu_x^2 + \mu_y^2}$
alphas	real	$\alpha = \tan^{-1}(\mu_z/\mu)$
fDuctA	real	ducted fan area ratio $f_A$
fDuctT	real	ducted fan thrust ratio $f_T$
fDuctW	real	ducted fan far wake ratio $f_W$
zg	real	height rotor hub above ground, $z_g/D$
zge	real	effective height, $z_g C_g / (D \cos \epsilon)$
fg	real	ground effect inflow ratio $f_g = P/P_\infty$
kappag	real	ground effect thrust ratio $\kappa_g = T/T_\infty$
CTe	real	$C_T$ for inflow solution
lambdah	real	reference $\lambda_h = \sqrt{C_T/2}$
lambda_ideal	real	ideal induced velocity $\lambda_i$
CPideal	real	ideal induced power $C_{P\text{ideal}} = C_T \lambda_i$
kappax	real	inflow gradient $\kappa_x$
kappay	real	inflow gradient $\kappa_y$
kappam	real	inflow gradient $\kappa_m = (\sigma a/8) f_m/U$
diskload	real	disk loading $T/A$ (lb/ft <sup>2</sup> or N/m <sup>2</sup> )
CTs	real	thrust coefficient/solidity, $ C_T/\sigma $
FPpro	real	profile power factor $F_P$
FHpro	real	profile drag factor $F_H$
VintWn(3,nwingmax)	real	interference velocity $v_{\text{int}}^F$ from wings, normal (F axes)
VintWp(3,nwingmax)	real	interference velocity $v_{\text{int}}^F$ from wings, inplane (F axes)
		inplane forces
CHtpp	real	drag force $C_H$ , tpp
CYtpp	real	side force $C_Y$ , tpp
CHO	real	drag force $C_H$ , profile
CYo	real	side force $C_Y$ , profile
fB	real	blockage factor $f_B = \Delta T/T = B f_\mu f_z$
fDL	real	download factor $f_{DL} = 1/(1 - \Delta T/T) = 1/(1 - DL f_\mu f_z)$

		rotor flap equations
isrotorconv	int	converged (0 not, -1 no iteration)
count_rotor	int	iteration count
error_rotor(3)	real	error ratio ( $E_t, E_c, E_s$ )
rotor_deriv_exist	int	rotor derivative matrix exist (0 for not)
		loads
Frotor(3)	real	rotor force $F_{\text{rotor}}^F$ (F axes, about cg)
Mrotor(3)	real	rotor moment $M_{\text{rotor}}^F$ (F axes, about cg)
L	real	lift (wind axis)
X	real	drag (wind axis)
CL	real	lift coefficient $C_L$
CX	real	drag coefficient $C_X$
Fvert	real	vertical force (inertia axes)
CTs_steady	real	max $C_T/\sigma$ (sustained)
CTs_tran	real	max $C_T/\sigma$ (transient)
CTs_eqn	real	max $C_T/\sigma$ (equation)
Tmargin_steady	real	thrust margin, $(C_T/\sigma)_{\text{max}} -  C_T/\sigma $ (sustained)
Tmargin_tran	real	thrust margin, $(C_T/\sigma)_{\text{max}} -  C_T/\sigma $ (transient)
Tmargin_eqn	real	thrust margin, $(C_T/\sigma)_{\text{max}} -  C_T/\sigma $ (equation)
Plimit_rs	real	drive system limit $P_{RS\text{limit}}$ (at rpm_trim and rating_ds)
Qmargin_rs	real	torque margin, $P_{RS\text{limit}} - P$
exceedQ_rs	int	exceed torque available: $P > (1 + \epsilon)P_{RS\text{limit}}$
		power
P	real	rotor power $P$
Pind	real	induced power $P_i$
Ppro	real	profile power $P_o$
Ppar	real	parasite power $P_p$
Pw	real	wing interference power $P_w$
Pd	real	propulsive force efficiency power $P_d$
Pv	real	climb efficient power $P_v$
CP	real	rotor power coefficient $C_P$
CPind	real	induced power coefficient $C_{Pi}$
CPpro	real	profile power coefficient $C_{Po}$
CPpar	real	parasite power coefficient $C_{Pp}$

CPw	real	wing interference power coefficient $P_w$
CPd	real	propulsive force efficiency power coefficient $P_d$
CPv	real	climb efficient power coefficient $P_v$
lambda	real	induced velocity $\lambda$
lambda_dat	real	wing interference velocity $\lambda_t = C_{Pw}/C_F$
Ki	real	induced power factor $\kappa$
cdmean	real	mean drag coefficient $c_{d\text{mean}}$
FM	real	hover figure of merit, $T f_D v / P$
etaprop	real	propulsive efficiency, $TV/P$
etamom	real	momentum efficiency, $T(V + f_D v)/P$
CDe	real	effective drag, $(C_{Pi} + C_{Po})/(V/V_{\text{tip}})$
LoDe	real	effective lift-to-drag, $C_L/C_{De}$
Pshaft	real	shaft power and reaction drive
Preact	real	shaft power $P_{\text{shaft}}$
Freact	real	reaction drive power $P_{\text{react}}$
rOmegaReact	real	reaction drive net force $F_{\text{react}} = P_{\text{react}}/\Omega r_{\text{react}}$
		aerodynamics
		hub
Vaero_hub(3)	real	total velocity relative air $v^F$ (F axes)
Vmag_hub	real	velocity magnitude
q_hub	real	dynamic pressure
ed_hub(3)	real	drag vector, $-v/ v $ in F axes
VB_hub(3)	real	total velocity relative air $v^B$ (B axes)
alpha_hub	real	angle of attack $\alpha$ (deg)
		pylon
Vaero_pylon(3)	real	total velocity relative air $v^F$ (F axes)
Vmag_pylon	real	velocity magnitude
q_pylon	real	dynamic pressure
ed_pylon(3)	real	drag vector, $-v/ v $ in F axes
VB_pylon(3)	real	total velocity relative air $v^B$ (B axes)
alpha_pylon	real	angle of attack $\alpha$ (deg)
CDhub	real	drag coefficient, hub $C_{D\text{hub}}$
CDpylon	real	drag coefficient, pylon $C_{D\text{pylon}}$

CDduct	real	drag coefficient, duct $C_{D\text{duct}}$
Dhub	real	drag, hub $D_{\text{hub}}$
Dpylon	real	drag, pylon $D_{\text{pylon}}$
Dduct	real	drag, duct $D_{\text{duct}}$
Dspin	real	drag, spinner $D_{\text{spin}}$
		loads
Faero(3)	real	aerodynamic force $F_{\text{aero}}^F$ (F axes, about cg)
Maero(3)	real	aerodynamic moment $M_{\text{aero}}^F$ (F axes, about cg)
Drag	real	drag $e_d^T F_{\text{aero}}^F$
Download	real	download, aero $F_z$ (I axes)
		interference
lambda_int	real	ideal induced velocity $\lambda_i$ (from $C_T$ )
vind(3)	real	induced velocity $v_{\text{ind}}^F$ (F axes)
chi_wake	real	wake angle $\chi$
Fint_fus	real	interference factor $f_W f_z f_r f_t$ at fuselage
Fint_wingLp(nwingmax,npanelmax)	real	interference factor $f_W f_z f_r f_t$ at wing, left panel
Fint_wingRp(nwingmax,npanelmax)	real	interference factor $f_W f_z f_r f_t$ at wing, right panel
Fint_tail(ntailmax)	real	interference factor $f_W f_z f_r f_t$ at tail
isInWake_fus	int	fuselage inside wake
isInWake_wingLp(nwingmax,npanelmax)	int	wing inside wake, left panel
isInWake_wingRp(nwingmax,npanelmax)	int	wing inside wake, right panel
isInWake_tail(ntailmax)	int	tail inside wake
ftwin	real	twin rotor factor $f_t$
Aint_wing(nwingmax)	real	induced power interference at wing $\alpha_{\text{int}}$

## Chapter 24

**Structure: FltWing**

Variable	Type	Description	Default
		Flight State - Wing controls	
flap(npanelmax)	real	flap $\delta_F$	
flaperon(npanelmax)	real	flaperon $\delta_f$	
aileron(npanelmax)	real	aileron $\delta_a$	
incid(npanelmax)	real	incidence $i$	
		aerodynamics	
VintR_Lp(3,nrotormax,npanelmax)	real	interference velocity $v_{\text{int}}^F$ at left wing panel, from rotors (F axes)	
VintR_Rp(3,nrotormax,npanelmax)	real	interference velocity $v_{\text{int}}^F$ at right wing panel, from rotors (F axes)	
VintR(3,nrotormax)	real	interference velocity $v_{\text{int}}^F$ (panel area weighted), from rotors (F axes)	
VintW(3,nwingmax)	real	interference velocity $v_{\text{int}}^F$ , from other wings (F axes)	
AintW(nwingmax)	real	interference angle $\alpha_{\text{int}}$ , from other wings	
AintR(nrotormax)	real	induced power interference $\alpha_{\text{int}}$ , from rotors with mean interference	
Vaero(3)	real	total velocity relative air $v^F$ (F axes)	
VB(3)	real	total velocity relative air $v^B$ (B axes)	
alpha	real	angle of attack $\alpha$ (deg)	
beta	real	sideslip angle $\beta$ (deg)	
CBA(3,3)	real	$C^{BA}$	
Vmag	real	velocity magnitude	
q	real	dynamic pressure	
alpha_int	real	angle of attack $\alpha$ , with interference (deg)	
CDV	real	vertical drag coefficient $C_{DV}$	
		left panel	
Vaero_Lp(3,npanelmax)	real	total velocity relative air $v^F$ (F axes)	

VB_Lp(3,npanelmax)	real	total velocity relative air $v^B$ (B axes)
alpha_Lp(npanelmax)	real	angle of attack $\alpha$ (deg)
beta_Lp(npanelmax)	real	sideslip angle $\beta$ (deg)
CBA_Lp(3,3,npanelmax)	real	$C^{BA}$
Vmag_Lp(npanelmax)	real	velocity magnitude
q_Lp(npanelmax)	real	dynamic pressure
CL_Lp(npanelmax)	real	lift coefficient $C_{Lp}$
CDp_Lp(npanelmax)	real	drag coefficient, parasite $C_{Dpp}$
CM_Lp(npanelmax)	real	pitch moment coefficient $C_{Mp}$
CR_Lp(npanelmax)	real	roll moment coefficient $C_{\ell p}$
L_Lp(npanelmax)	real	lift
Dp_Lp(npanelmax)	real	drag, parasite
M_Lp(npanelmax)	real	pitch moment
R_Lp(npanelmax)	real	roll moment
right panel		
Vaero_Rp(3,npanelmax)	real	total velocity relative air $v^F$ (F axes)
VB_Rp(3,npanelmax)	real	total velocity relative air $v^B$ (B axes)
alpha_Rp(npanelmax)	real	angle of attack $\alpha$ (deg)
beta_Rp(npanelmax)	real	sideslip angle $\beta$ (deg)
CBA_Rp(3,3,npanelmax)	real	$C^{BA}$
Vmag_Rp(npanelmax)	real	velocity magnitude
q_Rp(npanelmax)	real	dynamic pressure
CL_Rp(npanelmax)	real	lift coefficient $C_{Lp}$
CDp_Rp(npanelmax)	real	drag coefficient, parasite $C_{Dpp}$
CM_Rp(npanelmax)	real	pitch moment coefficient $C_{Mp}$
CR_Rp(npanelmax)	real	roll moment coefficient $C_{\ell p}$
L_Rp(npanelmax)	real	lift
Dp_Rp(npanelmax)	real	drag, parasite
M_Rp(npanelmax)	real	pitch moment
R_Rp(npanelmax)	real	roll moment
qS	real	$qS$ (sum over panels)
qeff	real	$(qS)/S$ (weighted by panel area)
dCLda3D	real	compressible 3D lift curve slope $C_{L\alpha}$
AoA_max	real	$\alpha_{\max}$

CL	real	lift coefficient $C_L$
CDp	real	drag coefficient, parasite $C_{Dp}$
CDi	real	drag coefficient, induced $C_{Di}$
CM	real	pitch moment coefficient $C_M$
CR	real	roll moment coefficient $C_\ell$
CLmax	real	maximum lift coefficient $C_{L\max}$
L	real	lift
Dp	real	drag, parasite
Di	real	drag, induced
D	real	drag
M	real	pitch moment
R	real	roll moment
Lmargin	real	stall margin, $C_{L\max} - C_L$
loads		
Faero(3)	real	aerodynamic force $F_{\text{aero}}^F$ (F axes, about cg)
Maero(3)	real	aerodynamic moment $M_{\text{aero}}^F$ (F axes, about cg)
Drag	real	drag $e_d^T F_{\text{aero}}^F$
Download	real	download, aero $F_z$ (I axes)
interference		
Vint_tail(3,ntailmax)	real	velocity at tail $v_{\text{int}}^F$ (F axes)
vind(3)	real	induced velocity $v_{\text{ind}}^F$ (F axes)
Vint_wing(3,nwingmax)	real	velocity at other wing $v_{\text{int}}^F$ (F axes)
Aint_wing(nwingmax)	real	angle at other wing ( $\alpha_{\text{int}} = v_{\text{int}}/v^B = K_{\text{int}} v_{\text{ind}}/v^B$ )
Vintn_rotor(3,nrotormax)	real	velocity at rotor $v_{\text{int}}^F$ , normal (F axes)
Vintp_rotor(3,nrotormax)	real	velocity at rotor $v_{\text{int}}^F$ , inplane (F axes)

## Chapter 25

**Structure: FltTail**

Variable	Type	Description	Default
		Flight State - Tail controls	
cont	real	control $\delta$	
incid	real	incidence $i$	
		aerodynamics	
VintR(3,nrotormax)	real	interference velocity $v_{\text{int}}^F$ , from rotors (F axes)	
VintW(3,nwingmax)	real	interference velocity $v_{\text{int}}^F$ , from wings (W axes)	
Vaero(3)	real	total velocity relative air $v^F$ (F axes)	
VB(3)	real	total velocity relative air $v^B$ (B axes)	
alpha	real	angle of attack $\alpha$ (deg)	
beta	real	sideslip angle $\beta$ (deg)	
CBA(3,3)	real	$C^{BA}$	
Vmag	real	velocity magnitude	
q	real	dynamic pressure	
dCLda3D	real	compressible 3D lift curve slope $C_{L\alpha}$	
AoA_max	real	$\alpha_{\text{max}}$	
CL	real	lift coefficient $C_L$	
CDp	real	drag coefficient, parasite $C_{Dp}$	
CDi	real	drag coefficient, induced $C_{Di}$	
CLmax	real	maximum lift coefficient $C_{L\text{max}}$	
L	real	lift	
D	real	drag	
		loads	
Faero(3)	real	aerodynamic force $F_{\text{aero}}^F$ (F axes, about cg)	
Maero(3)	real	aerodynamic moment $M_{\text{aero}}^F$ (F axes, about cg)	
Drag	real	drag $e_d^T F_{\text{aero}}^F$	
Download	real	download, aero $F_z$ (I axes)	

## Chapter 26

**Structure: FltTank**

Variable	Type	Description	Default
		Flight State - Fuel Tank Systems all tanks (standard plus auxiliary)	
Wfuel	real	usable fuel weight	
Efuel	real	usable fuel energy	
Wfuel_cap	real	fuel weight capacity	
Efuel_cap	real	fuel energy capacity	
rWfuel	real	fraction weight capacity	
rEfuel	real	fraction energy capacity = state-of-charge = 1 - depth-of-discharge	
Pfuel_cap	real	battery ( $\dot{E} > 0$ discharge, $\dot{E} < 0$ charge; power and current positive) power capacity $P_{cap} = x_{mbd} E_{fuel-cap}$ (MJ/hr)	
state	int	state (1 discharging, -1 CC charge, -2 CV charge)	
x	real	current $x$ (1/hr)	
xi	real	current $\xi = x/x_{mbd}$	
V	real	voltage $V$	
Edotcomp	real	component energy flow $\dot{E}_{comp}$ (MJ/hr)	
etabatt	real	battery efficiency $\eta_{batt}$	
Ploss	real	power loss $P_{loss}$ (MJ/hr)	
Edotbatt	real	battery energy flow $\dot{E}_{batt}$ (MJ/hr)	
dcrit	real	effective capacity factor $d_{crit}$	
Edoteff	real	effective energy flow $\dot{E}_{eff}$ (MJ/hr)	
xmax	real	maximum current $x_{max}$ (1/hr)	
Pmax	real	maximum power (for $x_{max}$ ) (MJ/hr)	
Bmargin	real	battery power margin $P_{max} -  \dot{E}_{batt} $ (MJ/hr)	
exceedB	int	exceed battery power: $ \dot{E}_{batt}  > (1 + \epsilon)P_{max}$	
Peq	real	equipment power	
fuelflow	real	power loss $P_{eq}$ fuel flow $\dot{w}$	

energyflow	real	energy flow $\dot{E}$
fuelflow_equiv	real	equivalent fuel flow $\dot{w}_{\text{equiv}}$ , from energy flow
		auxiliary tanks
		aerodynamics
Vaero(3,nauxtankmax)	real	total velocity relative air $v^F$ (F axes)
Vmag(nauxtankmax)	real	velocity magnitude
q(nauxtankmax)	real	dynamic pressure
ed(3,nauxtankmax)	real	drag vector, $-v/ v $ in F axes
D(nauxtankmax)	real	drag $D$
DL(nauxtankmax)	real	download, aero $F_z$ (I axes)
		loads
Faero(3)	real	aerodynamic force $F_{\text{aero}}^F$ (F axes, about cg)
Maero(3)	real	aerodynamic moment $M_{\text{aero}}^F$ (F axes, about cg)
Drag	real	drag $e_d^T F_{\text{aero}}^F$
Download	real	download, aero $F_z$ (I axes)

## Chapter 27

**Structure: FltProp**

Variable	Type	Description	Default
STATE_gear	int	Flight State - Propulsion Group drive system state control	
DN_trim	real	rotational speed increment, primary rotor or primary engine (rpm) power	
Pcomp	real	power required $P_{\text{comp}}$ , all components	
Pcomp_rotor	real	rotor	
Pcomp_eng	real	engine groups	
Pxmsn	real	transmission losses $P_{\text{xmsn}}$	
Pacc	real	accessory power $P_{\text{acc}}$	
PreqPG	real	power required $P_{\text{reqPG}} = P_{\text{comp}} + P_{\text{xmsn}} + P_{\text{acc}}$ , propulsion group	
PavPG	real	power available $P_{\text{avPG}}$ , propulsion group (sum all engine groups producing shaft power)	
PavElsum	real	engine installed power available $P_{\text{avEI}}$ (sum all engine groups producing shaft power)	
PavEGsum	real	engine group power available $P_{\text{avEG}}$ (sum all engine groups producing shaft power)	
Pratio	real	$P_{\text{reqPG}}/P_{\text{avPG}}$ , propulsion group	
Plimit_ds	real	drive system limit $P_{\text{DSL}}$ (at rpm_trim(primary) and rating_ds)	
atPlimit_ds	int	at drive system limit ( $P_{\text{avPG}}$ limited by $P_{\text{DSL}}$ )	
Qmargin_ds	real	torque margin, $P_{\text{DSL}} - P_{\text{reqPG}}$	
Pmargin	real	power margin, $P_{\text{avPG}} - P_{\text{reqPG}}$	
exceedP	int	exceed power available: $P_{\text{reqPG}} > (1 + \epsilon)P_{\text{avPG}}$	
exceedQ_ds	int	exceed torque available: $P_{\text{reqPG}} > (1 + \epsilon)P_{\text{DSL}}$	
Qmargin	real	torque margin, min(propulsion group, engine groups, rotors)	
exceedQ	int	exceed torque available: any propulsion group, engine groups, rotors	
propulsion group engines			
fuelflow(ntankmax)	real	fuel flow $\dot{w}$	
fuelflow_total	real	total fuel flow $\dot{w}$	
fuelflow_equiv	real	equivalent fuel flow $\dot{w}_{\text{equiv}}$ , from energy flow	
energyflow(ntankmax)	real	energy flow $\dot{E}$	

energyflow_total	real	total energy flow $\dot{E}$
sfc	real	specific fuel consumption $sfc = \dot{w}_{equiv}/P_{req}$
Fprop(3)	real	jet thrust and momentum drag force $F_{prop}^F$ (F axes, about cg)
Mprop(3)	real	jet thrust and momentum drag moment $M_{prop}^F$ (F axes, about cg)
Faero(3)	real	aerodynamic force $F_{aero}^F$ (F axes, about cg)
Maero(3)	real	aerodynamic moment $M_{aero}^F$ (F axes, about cg)
Drag	real	drag $e_d^T F_{aero}^F$
Download	real	download, aero $F_z$ (I axes)

## Chapter 28

**Structure: FltEngn**

Variable	Type	Description	Default
		Flight State - Engine Group controls	
amp	real	amplitude $A$	
mode	real	mode $B$	
incid	real	incidence $i$	
yaw	real	yaw $\psi$	
fgear	real	gear ratio factor $f_{\text{gear}}$	
		geometry	
CBF(3,3)	real	engine relative airframe, $C^{BF}$	
ef(3)	real	engine direction, $e_f$	
		engine	
Pq	real	uninstalled power required, $P_q$	
Plossq	real	installation loss $P_{\text{loss}}$	
etalossq	real	installation efficiency $\eta_{\text{loss}}$	
Preq_eng	real	installed power required, $P_{\text{req-eng}}$	
N_trim	real	engine rpm $N$	
mdot	real	mass flow $\dot{m}$	
wdot	real	fuel flow $\dot{w}$	
Edot	real	energy flow $\dot{E}$	
FG	real	gross installed jet thrust $F_G$	
Fmom	real	momentum thrust $F_{\text{mom}}$	
FN	real	net installed jet thrust $F_N$	
Daux	real	momentum drag of auxiliary air flow $D_{\text{aux}}$	
Pa	real	uninstalled power available, $P_a$	
Plossa	real	installation loss $P_{\text{loss}}$	
etalossa	real	installation efficiency $\eta_{\text{loss}}$	
Pav_eng	real	installed power available, $P_{\text{av-eng}}$	

Pmech	real	engine mechanical limit $P_{\text{mech}}$ (at $N_{\text{trim}}$ )
atPmech	int	at mechanical limit ( $P_{av-\text{eng}}$ limited by $P_{\text{mech}}$ )
etamotor	real	motor/generator efficiency $\eta_{\text{motor}}$
etacell	real	fuel cell efficiency $\eta_{\text{cell}}$
		engine group
ReactionMode	int	reaction drive mode (MODEL_engine_compreact or converted)
Converted	int	converted (KIND=RPTEM with mode=1; 0 shaft power, 1 reaction, 2 jet)
ProducePower	int	shaft power (0 consumed (generator or compressor), 1 produced)
Pcomp	real	component power $P_{\text{comp}}$ (generator or compressor); ( $N_{\text{engine}} - N_{\text{EngInOp}})P_q K_{ffd}$
Preq	real	power required $P_{reqEG}$
PavEI	real	engine installed power available $P_{avEI}$ ; ( $N_{\text{engine}} - N_{\text{EngInOp}})P_{av-\text{eng}}$
Pav	real	power available, $P_{avEG}$ ; fPower( $N_{\text{engine}} - N_{\text{EngInOp}}$ ) $P_{av-\text{eng}}$
Qreq	real	torque required $Q_{\text{req}}$ (at $N_{\text{trim}}$ )
Pratio	real	$P_{reqEG}/P_{avEG}$
Pmargin	real	power margin, $P_{avEG} - P_{reqEG}$
Plimit_es	real	drive system limit $P_{ES\text{limit}}$ (at $N_{\text{trim}}$ and rating_ds)
atPlimit_es	int	at drive system limit ( $P_{avEG}$ limited by $P_{ES\text{limit}}$ )
Qmargin_es	real	torque margin, $P_{ES\text{limit}} - P_{reqEG}$
exceedQ_es	int	exceed torque available: $P_{reqEG} > (1 + \epsilon)P_{ES\text{limit}}$
fuelflow	real	fuel flow $\dot{w}$ (negative if generated)
energyflow	real	energy flow $\dot{E}$ (negative if generated)
fuelflow_equiv	real	equivalent fuel flow $\dot{w}_{\text{equiv}}$ , from energy flow
sfc	real	specific fuel consumption sfc = $\dot{w}_{\text{equiv}}/P_{\text{req}}$
FNEG	real	net installed jet thrust $F_N$
DauxEG	real	momentum drag of auxiliary air flow $D_{\text{aux}}$
Fjet(3)	real	jet thrust force $F_{\text{jet}}^F$ (F axes, about cg)
Mjet(3)	real	jet thrust moment $M_{\text{jet}}^F$ (F axes, about cg)
Faux(3)	real	momentum drag force $F_{\text{aux}}^F$ (F axes, about cg)
Maux(3)	real	momentum drag moment $M_{\text{aux}}^F$ (F axes, about cg)
		aerodynamics
Vaero(3)	real	total velocity relative air $v^F$ (F axes)
Vmag	real	velocity magnitude
q	real	dynamic pressure
ed(3)	real	drag vector, $-v/ v $ in F axes

VB(3)	real	total velocity relative air $v^B$ (B axes)
alpha	real	angle of attack $\alpha$ (deg)
CD	real	drag coefficient $C_D$
D	real	drag
	load	
Faero(3)	real	aerodynamic force $F_{\text{aero}}^F$ (F axes, about cg)
Maero(3)	real	aerodynamic moment $M_{\text{aero}}^F$ (F axes, about cg)
Drag	real	drag $e_d^T F_{\text{aero}}^F$
Download	real	download, aero $F_z$ (I axes)

## Chapter 29

**Structure: FltJet**

Variable	Type	Description	Default
		Flight State - Jet Group controls	
amp	real	amplitude $A$	
mode	real	mode $B$	
incid	real	incidence $i$	
yaw	real	yaw $\psi$	
		geometry	
CBF(3,3)	real	jet relative airframe, $C^{BF}$	
ef(3)	real	jet direction, $e_f$	
		jet	
Tq	real	uninstalled thrust required, $T_q$	
Tlossq	real	installation loss $T_{\text{loss}}$	
etalossq	real	installation efficiency $\eta_{\text{loss}}$	
Treq_jet	real	installed thrust required, $T_{\text{req-jet}}$	
mdot	real	mass flow $\dot{m}$	
wdot	real	fuel flow $\dot{w}$	
Edot	real	energy flow $\dot{E}$	
FG	real	gross installed jet thrust $F_G$	
Fmom	real	momentum thrust $F_{\text{mom}}$	
FN	real	net installed jet thrust $F_N$	
Daux	real	momentum drag of auxiliary air flow $D_{\text{aux}}$	
Ta	real	uninstalled thrust available, $T_a$	
Tlossa	real	installation loss $T_{\text{loss}}$	
etalossa	real	installation efficiency $\eta_{\text{loss}}$	
Tav_jet	real	installed thrust available, $T_{\text{av-jet}}$	
Tmech	real	jet mechanical limit $T_{\text{mech}}$	
atTmech	int	at mechanical limit ( $T_{\text{av-jet}}$ limited by $T_{\text{mech}}$ )	

		jet group
ReactionMode	int	reaction drive mode (MODEL_jet_react or converted)
Converted	int	converted (RPJEM with mode=1; 0 jet, 1 reaction)
Treq	real	thrust required $T_{reqJG}$
TavJI	real	jet installed thrust available $T_{avJI}$ ; $(N_{jet}-N_{JetInOp})T_{av-jet}$
Tav	real	thrust available, $T_{avJG}$ ; $f_{Thrust}(N_{jet}-N_{JetInOp})T_{av-jet}$
Jratio	real	$T_{reqJG}/T_{avJG}$
Jmargin	real	thrust margin, $T_{avJG} - T_{reqJG}$
exceedJ	int	exceed thrust available: $T_{reqJG} > (1 + \epsilon)T_{avJG}$
fuelflow	real	fuel flow $\dot{w}$ (negative if generated)
energyflow	real	energy flow $\dot{E}$ (negative if generated)
fuelflow_equiv	real	equivalent fuel flow $\dot{w}_{equiv}$ , from energy flow
sfc	real	specific fuel consumption $sfc = \dot{w}_{equiv}/T_{req}$
FNJG	real	net installed jet thrust $F_N$
DauxJG	real	momentum drag of auxiliary air flow $D_{aux}$
Fjet(3)	real	jet thrust force $F_{jet}^F$ (F axes, about cg)
Mjet(3)	real	jet thrust moment $M_{jet}^F$ (F axes, about cg)
Faux(3)	real	momentum drag force $F_{aux}^F$ (F axes, about cg)
Maux(3)	real	momentum drag moment $M_{aux}^F$ (F axes, about cg)
		loads
F(3)	real	force $F_{jet}^F$ (F axes)
M(3)	real	moment $M_{jet}^F$ (F axes)
		aerodynamics
Vaero(3)	real	total velocity relative air $v^F$ (F axes)
Vmag	real	velocity magnitude
q	real	dynamic pressure
ed(3)	real	drag vector, $-v/ v $ in F axes
VB(3)	real	total velocity relative air $v^B$ (B axes)
alpha	real	angle of attack $\alpha$ (deg)
CD	real	drag coefficient $C_D$
D	real	drag
		load
Faero(3)	real	aerodynamic force $F_{aero}^F$ (F axes, about cg)
Maero(3)	real	aerodynamic moment $M_{aero}^F$ (F axes, about cg)

Drag	real	drag $e_d^T F_{\text{aero}}^F$
Download	real	download, aero $F_z$ (I axes)

## Chapter 30

**Structure: FltChrg**

Variable	Type	Description	Default
		Flight State - Charge Group controls	
amp	real	amplitude $A$	
mode	real	mode $B$	
incid	real	incidence $i$	
yaw	real	yaw $\psi$	
		geometry	
CBF(3,3)	real	charger relative airframe, $C^{BF}$	
ef(3)	real	charger direction, $e_f$	
		charger	
Pacell	real	power available $P_{av} = P_{acell} = \dot{E}_{acell}$	
Pqcell	real	cell power required $P_{qcell} = \dot{E}_{qcell}$	
Preq	real	installed power required $P_{req} = P_{reqCG}/(\text{Ncharge}-\text{NChrgInOp})$	
		charger, fuel cell	
deltac	real	compressor pressure ratio $\delta_c$	
iratio	real	power required current ratio $i_q/i_d$	
sfc_burn	real	cell specific fuel consumption $\dot{w}/P_{req}$	
mdot_burn	real	mass flow $\dot{m}$	
wdot_burn	real	fuel flow $\dot{w}$	
FG	real	gross installed jet thrust $F_G$	
Fmom	real	momentum thrust $F_{mom}$	
FN	real	net installed jet thrust $F_N$	
Daux	real	momentum drag of auxiliary air flow $D_{aux}$	
		charger, solar cell	
etachrg	real	charger efficiency $\eta_{chrg}$	
		charge group	
Pchrg	real	power required $P_{reqCG} = \dot{E}_{reqCG}$	

Preqtotal	real	total cell power required $P_{reqtotal}$ ; ( $N_{charge} - N_{ChrgInOp}$ ) $P_{qcell}$
PavCG	real	power available $P_{avCG}$ ; fCharge( $N_{charge} - N_{ChrgInOp}$ ) $P_{av}$
Cratio	real	$P_{reqCG}/P_{avCG}$
Cmargin	real	power margin, $P_{avCG} - P_{reqCG}$
exceedC	int	exceed power available: $P_{reqCG} > (1 + \epsilon)P_{avCG}$
energyflow	real	energy flow $\dot{E}$ (negative if generated)
fuelflow_equiv	real	equivalent fuel flow $\dot{w}_{equiv}$ , from energy flow
charge group, fuel cell		
fuel burn		
fuelflow_burn	real	fuel flow $\dot{w}$
energyflow_burn	real	energy flow $\dot{E}$
fuelflow_equiv_burn	real	equivalent fuel flow $\dot{w}_{equiv}$ , from energy flow
sfc	real	specific fuel consumption sfc = $\dot{w}_{equiv}/P_{req}$
FNCG	real	net installed jet thrust $F_N$
DauxCG	real	momentum drag of auxiliary air flow $D_{aux}$
Fjet(3)	real	jet thrust force $F_{jet}^F$ (F axes, about cg)
Mjet(3)	real	jet thrust moment $M_{jet}^F$ (F axes, about cg)
Faux(3)	real	momentum drag force $F_{aux}^F$ (F axes, about cg)
Maux(3)	real	momentum drag moment $M_{aux}^F$ (F axes, about cg)
loads		
F(3)	real	force $F_{chrg}^F$ (F axes)
M(3)	real	moment $M_{chrg}^F$ (F axes)
aerodynamics		
Vaero(3)	real	total velocity relative air $v^F$ (F axes)
Vmag	real	velocity magnitude
q	real	dynamic pressure
ed(3)	real	drag vector, $-v/ v $ in F axes
VB(3)	real	total velocity relative air $v^B$ (B axes)
alpha	real	angle of attack $\alpha$ (deg)
CD	real	drag coefficient $C_D$
D	real	drag
load		
Faero(3)	real	aerodynamic force $F_{aero}^F$ (F axes, about cg)

Maero(3)	real	aerodynamic moment $M_{\text{aero}}^F$ (F axes, about cg)
Drag	real	drag $e_d^T F_{\text{aero}}^F$
Download	real	download, aero $F_z$ (I axes)

## Chapter 31

**Structure: Solution**

Variable	Type	Description	Default
		+ Solution Procedures	
title	c*100	+ title	
notes	c*1000	+ notes	
		+ Rotor	
		+ convergence control	
niter_rotor(nrotormax)	int	+ maximum number of iterations	40
toler_rotor(nrotormax)	real	+ tolerance (deg)	.01
relax_rotor(nrotormax)	real	+ relaxation factor	.5
deriv_rotor(nrotormax)	int	+ derivative (1 first order, 2 second order)	1
maxinc_rotor(nrotormax)	real	+ maximum increment amplitude (0. for no limit)	4.
trace_rotor(nrotormax)	int	+ trace iteration (0 for none)	0
		+ Trim	
		+ convergence control	
niter_trim	int	+ maximum number of iterations	40
toler_trim	real	+ tolerance (fraction reference)	.001
relax_trim	real	+ relaxation factor	.5
		+ perturbation identification of derivative matrix	
deriv_trim	int	+ perturbation (1 first order, 2 second order)	1
mpid_trim	int	+ number of iterations between identification (0 for never recalculated)	0
perturb_trim	real	+ variable perturbation amplitude (fraction reference)	.002
init_trim	int	+ reinitialize aircraft controls in maximum effort iteration (0 no, 1 force retrim)	0
start_trim	int	+ initialize controls from solution of previous case (0 no)	0
trace_trim	int	+ trace iteration (0 for none, 2 for component controls)	0
<hr/> start_trim=1: initialize FltAircraft%control from FltAircraft%control_trim of previous case require INIT_input=INIT_data=2 or read solution file; and same missions and conditions as previous case requirements not checked			

		+ Maximum effort	
method_fly	int	+ method (1 secant, 2 false position)	1
method_flymax	int	+ maximization method (1 secant, 2 false position, 3 golden section search, 4 curve fit)	3
		+ convergence control	
niter_fly	int	+ maximum number of iterations	80
toler_fly	real	+ tolerance (fraction reference)	.002
relax_fly	real	+ relaxation factor	.5
perturb_fly	real	+ variable perturbation amplitude (fraction reference)	.05
maxderiv_fly	real	+ maximum derivative amplitude (0. for no limit)	0.
maxinc_fly	real	+ maximum increment fraction (0. for no limit)	0.
rfit_fly	real	+ extent of curve fit (fraction maximum)	.98
nfit_fly	int	+ order of curve fit (2 quadradic, 3 cubic)	3
init_fly	int	+ reinitialize aircraft controls (0 no, 1 force retrim)	0
trace_fly	int	+ trace iteration (0 for none)	0
		+ Maximum gross weight (flight condition or mission takeoff)	
method_maxgw	int	+ method (1 secant, 2 false position)	1
		+ convergence control	
niter_maxgw	int	+ maximum number of iterations	40
toler_maxgw	real	+ tolerance (fraction reference)	.002
relax_maxgw	real	+ relaxation factor	.5
perturb_maxgw	real	+ variable perturbation amplitude (fraction reference)	.02
maxderiv_maxgw	real	+ maximum derivative amplitude (0. for no limit)	0.
maxinc_maxgw	real	+ maximum increment fraction (0. for no limit)	0.
trace_maxgw	int	+ trace iteration (0 for none)	0
		+ Mission	
		+ convergence control	
niter_miss	int	+ maximum number of iterations	40
toler_miss	real	+ tolerance (fraction reference)	.01
relax_miss	real	+ relaxation factor (mission fuel)	1.
relax_range	real	+ relaxation factor (range credit)	1.
relax_gw	real	+ relaxation factor (max takeoff GW)	1.
trace_miss	int	+ trace iteration (0 for none)	0

	+ Size aircraft		
	+ convergence control		
niter_size	int +	maximum number of iterations (performance loop)	40
niter_param	int +	maximum number of iterations (parameter loop)	40
toler_size	real +	tolerance (fraction reference)	.01
	+ relaxation factors		
relax_size	real +	power or radius	1.
relax_DGW	real +	gross weight	1.
relax_xmsn	real +	drive system limit	1.
relax_wmto	real +	WMTO and SDGW	1.
relax_tank	real +	fuel tank capacity	1.
relax_thrust	real +	rotor thrust	1.
	+ maximum increment fraction (0. for no limit)		
maxinc_size	real +	power or radius	0.
maxinc_DGW	real +	gross weight	0.
maxinc_xmsn	real +	drive system limit	0.
maxinc_wmto	real +	WMTO and SDGW	0.
maxinc_tank	real +	fuel tank capacity	0.
maxinc_thrust	real +	rotor thrust	0.
trace_size	int +	trace iteration (0 for none, 2 for power)	0

---

with niter\_param=1, parameter iteration is part of performance loop (can be faster than niter\_param > 1)

---

	+ Case		
trace_case	int +	trace operation (0 for none, 1 trace, 2 for all iterations)	1
trace_start	int +	counter at start trace of iterations	0
trace_count	int	counter	

---

use trace\_case=2 to identify point at which analysis diverges

counter written if trace\_case=1 or 2; trace of iterations suppressed until counter > trace\_start  
then turn on trace selectively for mission/segment/condition

---

		+ Flight condition and mission segment	
toler_check	real	+ check Preq, Qlimit, Wfuel (fraction reference)	.005
		+ Tolerance and perturbation scales	
KIND_Wscale	int	+ weight scale (1 design gross weight, 2 nominal $C_T/\sigma$ )	1
KIND_Pscale	int	+ power scale (1 aircraft power, 2 derived from weight scale)	1
KIND_Lscale	int	+ length scale (1 rotor radius, 2 wing span, 3 fuselage length)	1
scaleRotor	int	+ rotor number	1
scaleWing	int	+ wing number	1
		Derived tolerance and perturbation scales	
Wscale	real	weight scale	
Pscale	real	power scale	
Lscale	real	length scale	
Ascale	real	angle scale	
Fscale	real	force scale	
Mscale	real	moment scale	
Vscale	real	horizontal velocity scale	
Rscale	real	vertical velocity scale	
Oscale	real	angular velocity scale	
Tscale	real	$C_T/\sigma$ scale	
Cscale	real	$C_L$ scale	
Hscale	real	altitude scale	
Gscale	real	acceleration scale	
Xscale	real	range scale	

## Chapter 32

**Structure: Cost**

Variable	Type	Description	Default
		+ Cost	
title	c*100	+ title	
notes	c*1000	+ notes	
		+ Inflation	
MODEL_inf	int	+ model (1 only input factor, 2 CPI, 3 DoD)	3
year_inf	int	+ year for internal inflation factor	1994
inflation	real	+ inflation factor (per cent, relative 1994 or year_inf)	100.00
EXTRAP_inf	int	+ year beyond CPI/DoD table data (0 error, 1 extrapolate factor)	1
<p style="text-align: center;">inflation: <math>F_i</math> multiplies airframe purchase price and maintenance cost            factor inflation always used, even with internal table            CPI or DoD table: <math>F_i = \text{inflation}(F_{\text{table}}(\text{year\_inf})/F_{\text{table}}(1994))</math>            input factor: <math>F_i = \text{inflation}</math> (relative 1994)            cost factors and rates include technology and inflation, correspond to year_inf</p>			
		+ Cost	
MODEL_cost	int	+ model (0 none, 1 CTM)	1
CostCTM	CostCTM	CTM cost model	
FuelPrice(ntankmax)	real	+ fuel price $G_{\text{fuel}}$ (\$/gallon or \$/liter)	5.0
EnergyPrice(ntankmax)	real	+ energy price $G_{\text{energy}}$ (\$/MJ)	0.04
EnergyCredit(ntankmax)	real	+ credit for generated energy (\$/MJ)	0.
Npass	int	+ number of passengers $N_{\text{pass}}$	100
<p style="text-align: center;">equivalent energy price for fuel burned: <math>\\$/\text{MJ} \cong (\\$/\text{gal})/126.2</math> (based on 42.8 MJ/kg and 6.5 lb/gal of JP-4/JP-8)            EnergyCredit=0. if no credit for generated energy</p>			

		+ Direct Operating Cost	
BlockHours	real	+ available block hours per year $B$	3751.
NonFlightTime	real	+ non-flight time per trip $T_{NF}$ (min)	12.
DepPeriod	real	+ depreciation period $D$ (years)	15.
LoanPeriod	real	+ loan period $L$ (years)	15.
IntRate	real	+ interest rate $i$ (%)	8.
ResidValue	real	+ residual value $V$ (%)	10.
Spares	real	+ spares per aircraft $S$ (% purchase price)	25.
		+ Technology Factors	
TECH_cost_af	real	+ airframe $\chi_{AF}$	0.87
TECH_cost_maint	real	+ maintenance $\chi_{\text{maint}}$	1.0

## Chapter 33

**Structure: CostCTM**

Variable	Type	Description	Default
MODEL_aircraft	int	+ CTM rotorcraft cost model + Purchase Price + aircraft (1 rotorcraft, 2 turboprop airliner)	1
KIND_engine	int	+ engine (1 turbine, 2 piston) + airframe	1
rComp	real	+ additional cost rate $r_{comp}$ for composite construction (\$/lb or \$/kg)	0.
fWcomp_body	real	+ composite weight in body (fraction body weight)	0.
fWcomp_tail	real	+ composite weight in tail (fraction tail weight)	0.
fWcomp_pylon	real	+ composite weight in pylon (fraction pylon weight)	0.
fWcomp_wing	real	+ composite weight in wing (fraction wing weight) + systems (fixed useful load)	0.
rFCE	real	+ cost factor $r_{FCD}$ , flight control electronics (\$/lb or \$/kg)	10000.
rMEP	real	+ cost factor $r_{MEP}$ , mission equipment package (\$/lb or \$/kg)	10000.
cost factors and rates include technology and inflation, correspond to year_inf rComp negative for cost reduction			

MODEL_maint	int	+ Maintenance + maintenance cost estimate (1 total only, 2 separate components)	2
rLabor	real	+ labor rate (\$ per hour)	160.
MMHperFH	real	+ maintenance man hours per flight hour	0.
Mlabor	real	+ MMH/FH factor $M_{labor}$	0.0017
Mparts	real	+ parts factor $M_{parts}$	34.
Mengine	real	+ engine overhaul factor $M_{engine}$	1.45
Mmajor	real	+ major periodic maintenance factor $M_{major}$	18.

---

labor rate includes inflation, corresponds to year\_inf

current best practice: Mlabor=0.0017, Mparts=34, Mengine=1.45, Mmajor=18

current average practice: Mlabor=0.0027, Mparts=56, Mengine=1.74, Mmajor=28

maintenance man hours per flight hour calculated from sum of fixed term (MMHperFH) and term scaling with weight empty (Mlabor)

---

		+ Direct Operating Cost	
MODEL_doc	int	+ crew+depreciation+insurance estimate (1 total only, 2 separate components)	2
Kcdi	real	+ crew+depreciation+insurance factor $K_{cdi}$	1.0
Kcrew	real	+ crew cost factor $K_{crew}$	1.0

## Chapter 34

**Structure: Emissions**

Variable	Type	Description	Default
		+ Emissions	
title	c*100	+ title	
notes	c*1000	+ notes	
MODEL_emissions	int	+ Emissions model (0 none) + Emissions Trading Scheme (ETS)	1
Kfuel(ntankmax)	real	+ CO <sub>2</sub> emissions from fuel used, $K_{\text{fuel}}$ (kg/kg)	3.75
Kenergy(ntankmax)	real	+ CO <sub>2</sub> emissions from energy used, $K_{\text{energy}}$ (kg/MJ) + Average Temperature Response (ATR)	0.14
H	real	+ aircraft operating lifetime $H$ (yr)	30.
U	real	+ aircraft utilization rate $U$ (missions/yr)	350.
r	real	+ ATR discount rate $r$	0.03
tmax	real	+ ATR integration period $t_{\text{max}}$ (yr) + emission index (kg/kg)	500.
EI_CO2(ntankmax)	real	+ carbon dioxide, $EI_{\text{CO}_2}$	3.16
EI_H2O(ntankmax)	real	+ water vapor, $EI_{\text{H}_2\text{O}}$	1.26
EI_SO4(ntankmax)	real	+ sulphates, $EI_{\text{SO}_4}$	0.0002
EI_soot(ntankmax)	real	+ soot, $EI_{\text{soot}}$	0.00004
EI_NOx(ntankmax)	real	+ nitrogen oxides, $EI_{\text{NO}_x}$	0.01
MODEL_NOx(ntankmax)	int	+ turboshaft engine NOx emission model (0 input $EI_{\text{NO}_x}$ , 1 DLR, 2 Swiss)	1
KIND_NOx(ntankmax)	int	+ model parameters (0 input, 1 low emissions, 2 high emissions)	1
KEI0(ntankmax)	real	+ DLR model, $K_{EI0}$	0.0036739
KEI1(ntankmax)	real	+ DLR model, $K_{EI1}$	0.00748
KEIs(ntankmax)	real	+ Swiss model, $K_{EIs}$	0.004
fAIC	real	+ aviation induced cloudiness factor, $f_{\text{AIC}}$ + energy emission factor (kg/MJ)	1.0
K_CO2(ntankmax)	real	+ carbon dioxide, $K_{\text{CO}_2}$	0.14
K_H2O(ntankmax)	real	+ water vapor, $K_{\text{H}_2\text{O}}$	0.

K_SO4(ntankmax)	real	+	sulphates, $K_{SO_4}$	0.
K_soot(ntankmax)	real	+	soot, $K_{soot}$	0.
K_NOx(ntankmax)	real	+	nitrogen oxides, $K_{NO_x}$	0.
SET_credit	int	+	Emissions credit for energy generated (0 for none)	1

*EI* default values are for turboshaft engine

emission index (*EI* and  $K_{fuel}$ ) only used for tanks that store and use fuel as weight (SET\_burn=1)  
energy emission factor ( $K$  and  $K_{energy}$ ) only used for tanks that store and use fuel as energy (SET\_burn=2)

ATR discount rate:  $r \geq 100000$  evaluated as  $r = \infty$

		ATR factors	
ZCO2	real	$CO_2$	
ZNOx	real	$NO_x$ ( $CH_4$ and $O_3L$ )	
Zs	real	short life	
fPower(11,nengmax)	real	turboshaft $NO_x$ model	
wdot(11,nengmax)	real	power factor, $P_q = f_P P_{to}$	
		fuel flow, $\dot{w}$	

## Chapter 35

**Structure: Aircraft**

Variable	Type	Description	Default
		+ Aircraft	
title	c*100	+ title	
notes	c*1000	+ notes	
config	c*16	+ Configuration	'helicopter'
RCconfig	int	configuration (RCconfig_rotorcraft, helicopter, tandem, coaxial, tiltrotor, compound, multicopter, airplane)	
nRotor_main	int	number of main rotors	
		config: identifies rotorcraft configuration config = 'rotorcraft', 'helicopter', 'tandem', 'coaxial', 'tiltrotor', 'compound', 'multicopter', 'airplane'	
		+ Aircraft Controls	
ncontrol	int	+ number of aircraft controls (maximum ncontmax)	4
IDENT_control(ncontmax)	c*16	+ labels of aircraft controls	
nstate_control	int	+ number of control states (maximum nstatemax) pilot's controls (control number)	1
kcoll	int	collective stick	
klatcyc	int	lateral cyclic stick	
kLngcyc	int	longitudinal stick	
kpedal	int	pedal	
ktilt	int	tilt	
		+ control values (function speed)	
nVcont(ncontmax)	int	+ number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	
nVcoll	int	+ collective stick	0
nVlatcyc	int	+ lateral cyclic stick	0
nVLngcyc	int	+ longitudinal stick	0

nVpedal	int	+	pedal	0
nVtilt	int	+	tilt	0
cont(nvelmax,ncontmax)	real	+	values	
coll(nvelmax)	real	+	collective stick $c_{AC0}$	
latcyc(nvelmax)	real	+	lateral cyclic stick $c_{ACc}$	
lncyc(nvelmax)	real	+	longitudinal cyclic stick $c_{ACs}$	
pedal(nvelmax)	real	+	pedal $c_{ACP}$	
tilt(nvelmax)	real	+	tilt $\alpha_{tilt}$	
Vcont(nvelmax,ncontmax)	real	+	speeds (CAS or TAS)	
Vcoll(nvelmax)	real	+	collective stick	
Vlatcyc(nvelmax)	real	+	lateral cyclic stick	
Vlncyc(nvelmax)	real	+	longitudinal cyclic stick	
Vpedal(nvelmax)	real	+	pedal	
Vtilt(nvelmax)	real	+	tilt	

---

control system: set of aircraft controls  $c_{AC}$  defined

aircraft controls connected to individual controls of each component,  $c = Tc_{AC} + c_0$

for each component control, define matrix  $T$  (for each control state) and value  $c_0$

flight state specifies control state, or that control state obtained from conversion schedule

$c_0$  can be zero, constant, or function of flight speed (CAS or TAS, piecewise linear input)

use of component control  $c_0$  can be suppressed for flight state using SET\_comp\_control

aircraft controls: identified by IDENT\_control

typical aircraft controls are pilot's controls; default IDENT\_control='coll','latcyc','lncyc','pedal','tilt'

available for trim (flight state specifies trim option)

initial values specified if control is trim variable; otherwise fixed for flight state

each aircraft control can be zero, constant, or function of flight speed (CAS or TAS, piecewise linear input)

coll/latcyc/lncyc/pedal/tilt input put in appropriate nVcont-cont-Vcont, based on IDENT\_control

flight state input can override

by connecting aircraft control to component control, flight state can specify component control value

sign conventions for pilot's controls: collective + up, lat cyclic + right, long cyclic + forward, pedal + nose right

rotor controls are positive Fourier series, with azimuth measured in direction of rotation

---

	+ Aircraft Motion
nVpitch	int + aircraft pitch angle $\theta_F$
pitch(nvelmax)	real + number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)
Vpitch(nvelmax)	real + values
	+ speeds (CAS or TAS)
nVroll	int + aircraft roll angle $\phi_F$
roll(nvelmax)	real + number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)
Vroll(nvelmax)	real + values
	+ speeds (CAS or TAS)

---

aircraft motion

available for trim (depending on flight state)

each motion can be zero, constant, or function of flight speed (CAS or TAS, piecewise linear input)

flight state input can override; initial value if trim variable

	+ Conversion	
Vconv_hover	real + maximum speed for hover and helicopter mode (CAS or TAS)	
Vconv_cruise	real + minimum speed for cruise (CAS or TAS)	
	+ control state	
kcont_hover	int + hover and helicopter mode ( $V \leq V_{\text{conv-hover}}$ )	1
kcont_conv	int + conversion mode ( $V_{\text{conv-hover}} < V < V_{\text{conv-cruise}}$ )	1
kcont_cruise	int + cruise mode ( $V \geq V_{\text{conv-cruise}}$ )	1
	+ drive system state (each propulsion group)	
kgear_hover(npropmax)	int + hover and helicopter mode ( $V \leq V_{\text{conv-hover}}$ )	1
kgear_conv(npropmax)	int + conversion mode ( $V_{\text{conv-hover}} < V < V_{\text{conv-cruise}}$ )	1
kgear_cruise(npropmax)	int + cruise mode ( $V \geq V_{\text{conv-cruise}}$ )	1

---

conversion control: use depends on STATE\_control, SET\_tilt, SET\_Vtip of FltStatehover and helicopter mode ( $V \leq V_{\text{conv-hover}}$ ): use tilt=90, Vtip\_hover, kgear\_hover, kcont\_hovercruise mode ( $V \geq V_{\text{conv-cruise}}$ ): use tilt=0, Vtip\_cruise, kgear\_cruise, kcont\_cruiseconversion mode: tilt linear with  $V$ , use Vtip\_hover, kgear\_conv, kcont\_conv

nacelle tilt angle: 0 for cruise, 90 deg for helicopter mode flight

---

SET_VNE	c*32	+ Never-exceed speed + model	'none'
iSET_VNE	int	limits defined (0 for none)	
iSET_VNE_table	int	table (3 for 3D)	
iSET_VNE_stall	int	stall	
iSET_VNE_comp	int	compressibility	
iSET_VNE_Mat	int	Mach number	
KIND_VNE_table	int	+ table	0
nwt_VNE	int	+ velocity (0 TAS, 1 CAS, 2 IAS)	
nalt_VNE	int	+ number of weights (maximum nvnemax)	
ntemp_VNE	int	+ number of altitudes (maximum nvnemax)	
rwt_VNE(nvnemax)	real	+ number of temperatures (maximum nvnemax)	
alt_VNE(nvnemax,nvnemax)	real	+ weight ratio $r_W = W_G/W_D$ (fraction DGW)	
temp_VNE(nvnemax)	real	+ density altitude $h_d(nalt,nwt)$	
VNE(nvnemax,nvnemax)	real	+ temperature $\tau$ (deg C)	
VNE3(nvnemax,nvnemax,nvnemax)	real	+ never-exceed speed $V_{NEt}(nalt,nwt)$ (knots)	
KIND_VNE_stall(nrotormax)	int	+ never-exceed speed $V_{NEt}(nalt,nwt,ntemp)$ (knots)	3
C_VNE(5)	real	+ stall model, each rotor (0 for no limit, 1 steady, 2 transient, 3 equation)	
Mat_VNE(nrotormax)	real	+ compressibility limit constants $C_n$	1.
		+ advancing tip Mach number $M_{at}$ , each rotor (0. for no limit)	
		+ limits (0. not used)	
VNEmaxTAS	real	+ TAS maximum (knots)	0.
VNEmaxIAS	real	+ IAS maximum (knots)	0.
VNEminTAS	real	+ TAS minimum (knots)	0.
VNEminIAS	real	+ IAS minimum (knots)	0.

never-exceed speed: calculate  $V_{NE}$  in knots TAS; depends on density altitude  $h_d$ , gross weight  $W_G$  (in terms of weight ratio  $r_W = W_G/W_D$ , fraction DGW), and temperature  $\tau$

SET\_VNE = 'none', or one to four of ('table' or 'table3', 'stall', 'comp', 'Mat')

table limit (2D):  $V_{NEt}(h_d)$  for set of weights  $r_W$  ( $alt\_VNE(nalt,nwt)$ )

table limit (3D):  $V_{NEt}(h_d, r_W, \tau)$  ( $alt\_VNE$  not depend on weight)

stall limit:  $V_{NES}$  from rotor thrust capability ( $C_T/\sigma$  vs  $\mu$ )

compressibility limit:  $V_{NEc} = C_1 - C_2 h_d + C_3 \tau - C_4 V_{tip} - C_5 r_W$  (knots IAS; temperature in deg C)

Mach number limit: $V_{NEm}$ from advancing tip Mach number $M_{at}$				
nIAS	int	+ Indicated airspeed correction		0
IAS(niasmax)	real	+ number of values (maximum niasmax, 0 no correction)		
CAS(niasmax)	real	+ indicated airspeed (knots)		
dIAS(niasmax)	real	+ calibrated airspeed (knots)		
CAS-IAS				
SET_Vschedule	int	+ Velocity schedules (1 CAS, 2 TAS, 3 IAS)		1
indicated airspeed correction: IAS(1)=CAS(1)=0., both IAS and CAS unique and sequential velocity schedules: all described as function CAS or TAS or IAS conversion, controls and motion, rotor tip speed, landing gear retraction, trim targets, drive system ratings				
nstate_trim	int	+ Trim states		1
IDENT_trim(ntrimstatemax)	c*12	+ number of trim states (maximum ntrimstatemax)		
mtrim(ntrimstatemax)	int	+ label of trim state		
trim_quant(mtrimmax,ntrimstatemax)		+ number of trim variables (maximum mtrimmax)		0
c*16		+ trim quantity name		
trim_var(mtrimmax,ntrimstatemax)	c*16	+ trim variable name		
trim_target(mtrimmax,ntrimstatemax)	int	+ target source (1 FltState, 2 component)		1
int		Derived trim states		
itrim_quant(mtrimmax,ntrimstatemax)	int	trim quantity name (TRIM_QUANT_xxx)		
itrim_quantn(mtrimmax,ntrimstatemax)	int	trim quantity structure number		
itrim_quantk(mtrimmax,ntrimstatemax)	int	trim quantity kind (0 other, 1 rotor, 2 rotor lift, 3 rotor prop, 4 wing, 5 wing lift)		
itrim_var(mtrimmax,ntrimstatemax)	int	trim variable name (TRIM_VAR_xxx, or control number)		
itrim_varn(mtrimmax,ntrimstatemax)	int	trim variable structure number		

---

trim state: one or more set of quantities and variables for trim iteration

FltState identifies trim state (STATE\_trim match IDENT\_trim),  
trim quantity:

description	trim_quant	target
aircraft total force	'force x', 'force y', 'force z'	zero
aircraft total moment	'moment x', 'moment y', 'moment z'	zero
aircraft load factor	'nx', 'ny', 'nz'	FltState%trim_target
propulsion group power	'power n'	FltState%trim_target
power margin	'P margin n'	FltState%trim_target
torque margin	'Q margin n'	FltState%trim_target
engine group power	'power EG n'	FltState%trim_target
power margin	'E margin n'	FltState%trim_target
jet group thrust	'jet n'	FltState%trim_target
jet thrust margin	'J margin n'	FltState%trim_target
charge group power	'charge n'	FltState%trim_target
charge power margin	'C margin n'	FltState%trim_target
fuel tank energy flow	'tank n'	FltState%trim_target
battery power margin	'B margin n'	FltState%trim_target
rotor lift	'lift rotor n', 'flift rotor n'	FltState%trim_target, Rotor%Klift
rotor lift	'CLs rotor n', 'vert rotor n'	FltState%trim_target, Rotor%Klift
rotor propulsive force	'prop rotor n', 'fprop rotor n'	FltState%trim_target, Rotor%Kprop
rotor propulsive force	'CXs rotor n', 'X/q rotor n'	FltState%trim_target, Rotor%Kprop
rotor thrust	'CTs rotor n'	FltState%trim_target, Rotor%Klift
rotor thrust margin	'T margin n'	FltState%trim_target
rotor thrust margin	'T margin tran n', 'T margin eqn n'	FltState%trim_target
rotor flapping	'betac n', 'Ingflap n'	FltState%trim_target
rotor flapping	'betas n', 'latflap n'	FltState%trim_target
rotor hub moment	'hub Mx n', 'roll n'	FltState%trim_target
rotor hub moment	'hub My n', 'pitch n'	FltState%trim_target
rotor torque	'hub Mz n', 'torque n'	FltState%trim_target
wing lift	'lift wing n', 'flift wing n'	FltState%trim_target, Wing%Klift
wing lift coefficient	'CL wing n'	FltState%trim_target, Wing%Klift
wing lift margin	'L margin n'	FltState%trim_target
tail lift	'lift tail n'	FltState%trim_target

---

trim variable:

description	trim_var
aircraft control	match IDENT_control
aircraft orientation	'pitch', 'roll'
aircraft velocity	'speed', 'ROC'
aircraft velocity	'side'
aircraft angular rate	'pullup', 'turn'
propulsion group tip speed	'Vtip n'
propulsion group engine speed	'Nspec n'

if trim\_target=1, trim quantity target value is FltState%trim\_target; otherwise component Klift or Kprop used  
if trailing "n" is absent, use first component (n=1)

trim\_quant='flift rotor n' or trim\_quant='flift wing n': target is fraction total aircraft lift (GW\*nAC(3))

trim\_quant='fprop rotor n': target is fraction total aircraft drag (qAC\*DoQ)

trim\_quant='T margin n' uses Rotor%CTs\_steady, trim\_quant='T margin tran n' uses Rotor%CTs\_tran

trim\_quant='T margin eqn n' uses equation for rotor thrust capability (Rotor%K0\_limit and Rotor%K1\_limit)

trim\_var='Vtip' or 'Nspec': requires FltAircraft%SET\_Vtip='input'

INPUT_geom	int	+ Geometry + input (1 fixed, SL/BL/WL; 2 scaled, from XoL/YoL/ZoL) + scaled geometry + reference length	2
KIND_scale	int	+ kind (1 rotor radius, 2 wing span, 3 fuselage length)	1
kScale	int	+ identification (component number)	1
		+ reference point	
KIND_Ref	int	+ kind (0 input, 1 rotor, 2 wing, 3 fuselage, 4 center of gravity)	0
kRef	int	+ identification (component number)	1
SL_Ref	real	+ stationline	
BL_Ref	real	+ buttline	
WL_Ref	real	+ waterline	

SLref	real	calculated reference point (input or component)
BLref	real	stationline
WLref	real	buttline
loc_cg	Location +	waterline baseline center of gravity location

## Geometry: Location for each component

fixed geometry input (INPUT\_geom = 1): dimensional SL/BL/WL

stationline + aft, buttline + right, waterline + up; arbitrary origin; units = ft or m

scaled geometry input (INPUT\_geom = 2): divided by reference length (KIND\_scale, kScale)

XoL + aft, YoL + right, ZoL + up; from reference point

option to fix some geometry (FIX\_geom in Location override INPUT\_geom)

option to specify reference length (KIND\_scale in Location override this global KIND\_scale)

reference point: KIND\_Ref, kRef; input dimensional XX\_Ref, or position of identified component

component reference must be fixed

certain Locations can be calculated from other parameters (configuration specific)

center of gravity: baseline is for nacelle angle = 90

flight state has calculated or input actual cg location

SET_atmos	+ c*12	Takeoff flight condition	'std'
temp	real	+ atmosphere specification	
dtemp	real	+ temperature $\tau$	0.
density	real	+ temperature increment $\Delta T$	
csound	real	+ density $\rho$	
viscosity	real	+ speed of sound $c_s$	
altitude	real	+ viscosity $\mu$	
	+ altitude	Derived takeoff flight condition	
iSET_atmos	int	atmosphere (SET_atmos_xxx)	
density_to	real	density $\rho$	
sigma_to	real	density ratio $\rho/\rho_0$	
theta_to	real	temperature ratio $T/T_0$	
delta_to	real	pressure ratio $p/p_0$	

---

takeoff condition (density) used for  $C_T/\sigma$  in rotor sizing

SET\_atmos, atmosphere specification:

'std' = standard day at specified altitude (use altitude)

'dtemp' = standard day at specified altitude, plus temperature increment (use altitude, dtemp)

'temp' = standard day at specified altitude, and specified temperature (use altitude, temp)

'dens' = input density and temperature (use density, temp)

'input' = input density, speed of sound, and viscosity (use density, csound, viscosity)

'notair' = input, not air on earth (use density, csound, viscosity)

see FltState%SET\_atmos for other options (polar, tropical, and hot days)

---

#### Size

diskload	real	aircraft disk loading ( $\text{lb}/\text{ft}^2$ or $\text{N}/\text{m}^2$ )
Aref	real	reference rotor area
wingload	real	aircraft wing loading ( $\text{lb}/\text{ft}^2$ or $\text{N}/\text{m}^2$ )
Sref	real	reference wing area
Pav	real	total takeoff power available
powerload	real	aircraft power loading
Tav	real	total takeoff thrust available
thrustload	real	aircraft weight-to-thrust

---

aircraft disk loading =  $W_D/A_{\text{ref}}$ ,  $A_{\text{ref}} = \sum f_A A$ ; rotor disk loading =  $f_W W_D/A$

aircraft wing loading =  $W_D/S_{\text{ref}}$ ,  $S_{\text{ref}} = \sum S$ ; individual wing loading =  $f_W W_D/S$

aircraft power loading =  $W_D/P_{\text{av}}$ ,  $P_{\text{av}} = \sum N_{\text{eng}} P_{\text{eng}}$  (each engine group at takeoff rating)

aircraft thrust-to-weight =  $W_D/T_{\text{av}}$ ,  $T_{\text{av}} = \sum N_{\text{jet}} T_{\text{jet}}$  (each jet group at takeoff rating)

---

#### Configuration

nWingExt	int	wing extensions (0 for none)
nWingExtKit	int	wing extension kits (0 for none)
nWingKit	int	wing kits (0 for none)
nWotherkit	int	other kit (0 for none)
SET_fold	int	folding (0 none, 1 fold weights, 2 with kit) (from Systems)

SLna	real	Neutral point stationline $SL_{na}$ Operating size (hover; controls = 0 except tilt = 90)
length_op	real	length
width_op	real	width
area_op	real	area
burnweight	int	Fuel tank system first fuel tank that burns weight (0 none)
eref	real	reference specific energy (MJ/kg)
CAC	real	Cost aircraft $C_{AC}$
CAC_nokit	real	aircraft $C_{AC}$ , folding kit not installed
Cmaint	real	maintenance $C_{maint}$
Cmaint_nokit	real	maintenance $C_{maint}$ , folding kit not installed
factor_inf	real	inflation factor $F_i$ (year_inf relative 1994, including factor inflation)
factor_inf2011	real	inflation factor $F_i$ (2011 relative 1994, CPI)
Ccomp	real	composite cost increment $C_{comp}$
CMEP	real	mission equipment package cost $C_{MEP}$
CFCE	real	flight control electronics cost $C_{FCE}$
Wcomp	real	composite weight increment $W_{comp}$
WMEP	real	mission equipment package weight $W_{MEP}$
WFCE	real	flight control electronics weight $W_{FCE}$
Kconfig	real	configuration factor, $K_{ET}K_{EN}K_{LG}K_R$
rAF	real	airframe $C_{AF}/W_{AF}$ (\$/lb or \$/kg)
rAC	real	total aircraft $C_{AC}/W_{EK}$ (\$/lb or \$/kg)
WAFcost	real	airframe weight $W_{AF}$
WEKcost	real	$W_{EK}$ = weight empty + airframe kits = $W_{AF} + W_{MEP} + W_{FCE}$
Pcost	real	rated takeoff power $P$
Clabor	real	labor cost $C_{labor}$
Cparts	real	parts cost $C_{parts}$
Cengine	real	engine overhaul cost $C_{engine}$
Cmajor	real	major periodic maintenance cost $C_{major}$
MMHperFH	real	maintenance man hours per flight hour

	+ Weight	
DGW	real	design gross weight $W_D$
Wfuel_DGW	real	+ mission fuel $W_{fuel}$ corresponding to DGW
Wpay_DGW	real	+ payload $W_{pay}$ corresponding to DGW
WE	real	+ weight empty $W_E$
dWE	real	+ weight increment
fWE	real	+ weight factor
	+ structural design gross weight	
SDGW	real	+ structural design gross weight $W_{SD}$
dSDGW	real	+ weight increment
fSDGW	real	+ weight factor
fFuelSDGW	real	+ fraction main fuel tanks filled at SDGW
	+ maximum takeoff weight	
WMTO	real	+ maximum takeoff weight $W_{MTO}$
dWMTO	real	+ weight increment
fWMTO	real	+ weight factor
nz_ult	real	+ design ultimate flight load factor $n_{zult}$ at SDGW
		0.
		1.
		1.
		6.0

---

input or calculated: design gross weight  $W_D$  (FIX\_DGW), structural design gross weight  $W_{SD}$  (SET\_SDGW), maximum takeoff weight  $W_{MTO}$  (SET\_WMTO), weight empty  $W_E$  (FIX\_WE)

if calculated, then input parameter is initial value

DGW, design gross weight: used for rotor disk loading and blade loading, wing loading, power loading, thrust loading to obtain aircraft moments of inertia from radii of gyration

for tolerance and perturbation scales of the solution procedures

optionally to define structural design gross weight and maximum takeoff weight

optionally to specify the gross weight for missions and flight conditions

Wfuel\_DGW and Wpay\_DGW usually calculated (identified as input so inherited by next case)

FIX\_WE: fixed or scaled weight empty obtained by adjusting contingency weight

scaled with design gross weight:  $W_E = dWE + fWE * W_D$

SET\_SDGW, structural design gross weight:

'input' = input

'f(DGW)' = based on DGW;  $W_{SD} = dSDGW + fSDGW * W_D$

'f(WMTO)' = based on WMTO;  $W_{SD} = dSDGW + fSDGW * W_{MTO}$

'maxfuel' = based on fuel state;  $W_{SD} = dSDGW + fSDGW * W_G$ ,  $W_G = W_D - W_{fuel\_DGW} + fFuelSDGW * W_{fuel\_cap}$

'perf' = calculated from maximum gross weight at SDGW sizing conditions (DESIGN\_sdgw)

SET\_WMTO, maximum takeoff weight:

'input' = input

'f(DGW)' = based on DGW;  $W_{MTO} = dWMTO + fWMTO * W_D$

'f(SDGW)' = based on SDGW;  $W_{MTO} = dWMTO + fWMTO * W_{SD}$

'maxfuel' = based on maximum fuel;  $W_{MTO} = dWMTO + fWMTO * W_G$ ,  $W_G = W_D - W_{fuel\_DGW} + W_{fuel\_cap}$

'perf' = calculated from maximum gross weight at WMTO sizing conditions (DESIGN\_wmto)

SDGW used for weights (fuselage, rotor, wing)

WMTO used for cost, drag (scaled aircraft and hub drag), and weights (system, fuselage, landing gear, engine group)

nz\_ult, design ultimate flight load factor at SDGW: used for weights (fuselage, rotor, wing)

---

	+ Weight	
Weight	Weight	aircraft weight statement (operating weight, without payload and usable fuel)
WO	real	operating weight $W_O$
growth_factor	real	growth factor = $W_D / (W_D - W_{scaled} - W_{fuel})$
	+ moments	moments of inertia (based on design gross weight, scaled with reference length)
kx	real	+ roll radius of gyration $k_x/L$
ky	real	+ pitch radius of gyration $k_y/L$
kz	real	+ yaw radius of gyration $k_z/L$
		Derived moments of inertia (corresponding to aircraft weight statement)
lxx	real	$I_{xx}$
lyy	real	$I_{yy}$
lzz	real	$I_{zz}$
lxy	real	$I_{xy}$
lyz	real	$I_{yz}$
lxz	real	$I_{xz}$

---

weight empty = structure + propulsion + systems and equipment + vibration + contingency

operating weight = weight empty + fixed useful load

weight statement defines fixed useful load and operating weight for design configuration

so for flight state, additional fixed useful load = auxiliary fuel tank and kits and increments

flight state can also increment crew weight or equipment weight

flight state: gross weight, useful load (payload, usable fuel, fixed useful load), operating weight

gross weight = weight empty + useful load = operating weight + payload + usable fuel

useful load = fixed useful load + payload + usable fuel

---

	+ Drag		
FIX_drag	int +	total aircraft $D/q$ (0 calculated; 1 fixed, input $D/q$ ; 2 scaled, input $C_D$ ; 3 scaled, from $k$ )	0
DoQ	real +	area $D/q$	0.
CD	real +	coefficient $C_D$ (based on rotor area, $D/q = A_{ref}C_D$ )	0.008
kDrag	real +	$k = (D/q)/(W_{MTO}/1000)^{2/3}$ (Units_Dscale)	2.5
FIX_DL	int +	total aircraft download (0 calculated; 1 fixed, input $D/q_V$ ; 2 scaled, from $k_{DL}$ )	0
DoQV	real +	area $(D/q)_V$	0.
kDL	real +	$k_{DL} = (D/q)_V/A_{ref}$	0.05

---

fixed drag or download: obtained by adjusting contingency  $D/q$  or  $(D/q)_V$

FIX\_drag: minimum drag, excludes drag due to lift and angle of attack

use only one of input DoQ, CD, kDrag (others calculated)

$A_{ref}$  = reference rotor area; units of kDrag are  $\text{ft}^2/\text{klb}^{2/3}$  or  $\text{m}^2/\text{Mg}^{2/3}$

CD = 0.02 for old helicopter, 0.008 for current low drag helicopters

kDrag = 9 for old helicopter, 2.5 for current low drag helicopters,

1.6 for current tiltrotors, 1.4 for turboprop aircraft (English units)

FIX\_DL, download:  $A_{ref}$  = reference rotor area,  $k_{DL} \sim DL/T$

use only one of DoQV, kDL (other calculated)

---

KIND_alpha	int	+ Aerodynamics	2
		+ angle of attack and sideslip angle representation (1 conventional, 2 reversed for sideward flight)	

---

angle of attack and sideslip angle: reversed definition best for sideward flight

Derived aircraft drag			
DoQC_comp	real	sum component cruise drag, area $(D/q)_{\text{comp}}$ (without contingency)	
DoQH_comp	real	sum component helicopter drag, area $(D/q)_{\text{comp}}$ (without contingency)	
DoQV_comp	real	sum component vertical drag, area $(D/q)_{\text{comp}}$ (without contingency)	
DoQC_AC	real	total cruise drag, area $(D/q)_{AC}$	
DoQH_AC	real	total helicopter drag, area $(D/q)_{AC}$	
DoQV_AC	real	total vertical drag, area $(D/q)_{AC}$	
CDC_AC	real	total cruise $(D/q)_{AC}/A_{\text{ref}}$	
CDH_AC	real	total helicopter $(D/q)_{AC}/A_{\text{ref}}$	
kDragC_AC	real	total cruise $(D/q)/(W_{MTO}/1000)^{2/3}$	
kDragH_AC	real	total helicopter $(D/q)/(W_{MTO}/1000)^{2/3}$	
kDL_AC	real	total vertical $(D/q)_V/A_{\text{ref}}$	
DoQwet_AC	real	total cruise wetted drag, area $(D/q)_{\text{wet}}$	
Swet_AC	real	total wetted area $S_{\text{wet}}$	
CD_AC	real	total cruise $(D/q)_{\text{wet}}/S_{\text{wet}}$	
+ Number of Components			
nRotor	int	+ rotors (maximum nrotormax)	2
nWing	int	+ wings (maximum nwingmax)	0
nTail	int	+ tails (maximum ntailmax)	1
nTank	int	+ fuel tank systems (maximum ntankmax)	1
nPropulsion	int	+ propulsion groups (maximum npropmax)	1
nEngineGroup	int	+ engine groups (maximum nengmax)	1
nJetGroup	int	+ jet groups (maximum njetmax)	0
nChargeGroup	int	+ charge groups (maximum nchrgmax)	0
nEngineModel	int	+ engine models (maximum nengmax)	1
nEngineParamN	int	+ engine model parameters (maximum nengpmax)	0

nEngineTable	int	+	engine tables (maximum nengmax)	0
nRecipModel	int	+	reciprocating engine models (maximum nengmax)	0
nCompressorModel	int	+	compressor models (maximum nengmax)	0
nMotorModel	int	+	motor models (maximum nengmax)	0
nJetModel	int	+	jet models (maximum njetmax)	0
nFuelCellModel	int	+	fuel cell models (maximum nchrgmax)	0
nSolarCellModel	int	+	solar cell models (maximum nchrgmax)	0
nBatteryModel	int	+	battery models (maximum ntankmax)	0

---

propulsion group is set of components and engine groups, connected by drive system  
 engine model or engine table or reciprocating engine or motor model describes particular engine,  
 used in one or more engine groups  
 jet model describes particular jet, used in one or more jet groups  
 fuel cell model or solar cell model describes particular charger, used in one or more charge groups  
 battery model describes particular batter, used in one or more fuel tanks

---

#### Aircraft Input for case

inAircraft	int	Aircraft
inSystems	int	Systems
inFuselage	int	Fuselage
inLandingGear	int	LandingGear
inRotor(nrotormax)	int	Rotor
inWing(nwingmax)	int	Wing
inTail(ntailmax)	int	Tail
inFuelTank(ntankmax)	int	FuelTank
inPropulsion(npropmax)	int	Propulsion
inEngineGroup(nengmax)	int	EngineGroup
inJetGroup(njetmax)	int	JetGroup
inChargeGroup(nchrgmax)	int	ChargeGroup
inEngineModel(nengmax)	int	EngineModel
inEngineParamN(nengpmax)	int	EngineParamN
inEngineTable(nengmax)	int	EngineTable

inRecipModel(nengmax)	int	RecipModel
inCompressorModel(nengmax)	int	CompressorModel
inMotorModel(nengmax)	int	MotorModel
inJetModel(njetmax)	int	JetModel
inFuelCellModel(nchrgmax)	int	FuelCellModel
inSolarCellModel(nchrgmax)	int	SolarCellModel
inBatteryModel(ntankmax)	int	BatteryModel
inCost	int	Cost
inEmissions	int	Emissions
iSIZE_perf(npropmax)	int	Design specification (from Size)
iSIZE_engine(nengmax)	int	performance (SIZE_perf_engine, rotor, none)
iSIZE_jet(njetmax)	int	performance (SIZE_engine_engn, none)
iSIZE_charge(nchrgmax)	int	performance (SIZE_jet_jet, none)
iSIZE_rotor(nrotormax)	int	performance (SIZE_charge_chrg, none)
iSET_rotor_radius(nrotormax)	int	rotor sized (SIZE_rotor_radius, thrust, none)
FIX_rotor_CWs(nrotormax)	int	rotor radius (SET_rotor_radius, DL, ratio, scale, not_radius)
FIX_rotor_Vtip(nrotormax)	int	rotor $C_W/\sigma$ (1 fixed, 0 not)
FIX_rotor_sigma(nrotormax)	int	rotor $V_{tip}$ (1 fixed, 0 not)
iSET_wing_area(nwingmax)	int	rotor $\sigma$ (1 fixed, 0 not)
iSET_wing_span(nwingmax)	int	wing area (SET_wing_area, WL, not_area)
FIX_wing_chord(nwingmax)	int	wing span (SET_wing_span, ratio, radius, width, hub, panel, not_span)
FIX_wing_AR(nwingmax)	int	wing chord (1 fixed, 0 not)
FIX_DGW	int	wing aspect ratio (1 fixed, 0 not)
FIX_WE	int	design gross weight (0 calculated, 1 fixed)
iSET_tank(ntankmax)	int	weight empty (0 calculated, 1 fixed, 2 scaled)
iSET_SDGW	int	fuel tank (SET_tank_input, miss, misspower, fmiss)
iSET_WMTO	int	SDGW (SET_SDGW_input, fDGW, fWMTO, maxfuel, perf)
iSET_limit_ds(npropmax)	int	WMTO (SET_WMTO_input, fDGW, fSDGW, maxfuel, perf)
kind_iter_size	int	drive system torque limit (SET_limit_input, ratio, Pav, Preq)
kind_iter_param	int	kind iteration, performance (0 none, 1 size engine or radius or jet group or charge group)
nSIZE_perf(npropmax)	int	kind iteration, parameters (0 none, 1 calculate parameters)
nSIZE_engine(nengmax)	int	conditions and missions for size engine or rotor
		conditions and missions for size engine group

nSIZE_jet(njetmax)	int	conditions and missions for size jet group
nSIZE_charge(ncrgmax)	int	conditions and missions for size charge group
nDESIGN_GW	int	design conditions and missions for DGW
nDESIGN_xmsn(npropmax)	int	design conditions and missions for transmission
nDESIGN_wmto	int	design conditions for WMTO
nDESIGN_tank	int	design missions for fuel tank
nDESIGN_thrust	int	design conditions and missions for antitorque or aux thrust rotor
		Design data (from sizing)
DGW_source	int	design gross weight source (1 condition, 2 mission)
DGW_kState	int	design gross weight source number
DGW_kSeg	int	design gross weight segment number
nDesignState	int	number design of conditions and missions (maximum ndesignmax)
XAircraft(ndesignmax)	XAircraft	design data

## Chapter 36

**Structure: XAircraft**

Variable	Type	Description	Default
		Design Data	
source	int	source (1 condition, 2 mission)	
kState	int	source number	
kSeg	int	segment number	
title	c*100	title	
kind	c*12	kind (condition or mission)	
number	c*12	number (condition or mission/segment)	
label	c*12	label	
setgw	c*12	Set Gross Weight	
setul	c*12	Set Useful Load	
design	c*12	design	
Nauxtank(nauxtankmax,ntankmax)	int	number of auxiliary fuel tanks $N_{auxtank}$ (each aux tank size)	
Ncrew	int	number of crew	
Npass	int	number of passengers	
Ncrew_seat	int	number of crew seats	
Npass_seat	int	number of passenger seats	
kits	c*12	kits	
		Weights (from FltAircraft)	
GW	real	gross weight $W_G$ ; at segment start	
Wpayload	real	payload weight $W_{pay}$	
Wpay_pass	real	passengers $W_{pass}$	
Wpay_cargo	real	cargo $W_{cargo}$	
Wpay_extload	real	external load $W_{ext-load}$	
Wpay_ammo	real	ammunition $W_{ammo}$	
Wpay_weapons	real	weapons $W_{weapons}$	
Wpay_other	real	other $W_{other}$	

Wfuel_total	real	usable fuel weight $W_{\text{fuel}}$ ; at segment start
Wfuel(ntankmax)	real	usable fuel weight
Wfuel_std(ntankmax)	real	standard tanks
Wfuel_aux(ntankmax)	real	auxiliary tanks
WO	real	operating weight $W_O$
WE	real	weight empty $W_E$ (from Aircraft)
WFixUL	real	fixed useful load $W_{FUL}$
Wcrew	real	crew
W_fixUL_fluid	real	fluids (from Aircraft%Weight)
Wauxtank	real	auxiliary fuel tanks
W_fixUL_other	real	other fixed useful load
Woful(10)	real	catagories
Wequip	real	equipment increment
Wfoldkit	real	folding kit
Wextkit	real	wing extension kit
Wwingkit	real	wing kit
Wotherkit	real	other kit
WUL	real	useful load $W_{UL}$
WML	real	military load
Energy (from FltAircraft)		
Efuel_total	real	usable fuel energy $E_{\text{fuel}}$ ; at segment start
Efuel(ntankmax)	real	usable fuel energy
Efuel_std(ntankmax)	real	standard tanks
Efuel_aux(ntankmax)	real	auxiliary tanks

## Chapter 37

**Structure: Systems**

Variable	Type	Description	Default
		+ Systems	
title	c*100	+ title	
notes	c*1000	+ notes	
		+ Weight	
Weight	Weight	weight statement (systems)	
SET_Wpayload	int	+ payload (1 no details; 2 all terms)	1
Upass	real	+ weight per passenger	
		+ fixed useful load	
SET_Wcrew	int	+ crew weight (1 no details; 2 all terms)	1
Wcrew	real	+ weight or adjustment	
Ucrew	real	+ weight per crew	
Ncrew	int	+ number of crew	
Wtrap	real	+ trapped fluids and engine oil weight	0.
		+ other fixed useful load	
nWoful	int	+ number of categories (0 for one value without name; maximum 10)	0
Woful_name(10)	c*24	+ category name	' '
Woful(10)	real	+ baseline weight	0.
Wotherkit	real	+ other kit	0.

SET\_Wpayload: payload specified by flight condition or mission

SET\_Wcrew: no details (only Wcrew) or all terms (Ucrew\*Ncrew+Wcrew)

other fixed useful load: can include baggage, gun installations, weapons provisions, aircraft survivability equipment, survival kits, life rafts, oxygen

SET_fold	int	+	folding (0 none, 1 fold weights, 2 with kit)	0
		+	folding weight in kit $f_{foldkit}$ (fraction wing/rotor/tail/body fold weight)	
fWfoldkitW(nwingmax)	real	+	wing	0.5
fWfoldkitR(nrotormax)	real	+	rotor	0.5
fWfoldkitT(ntailmax)	real	+	tail	0.5
fWfoldkitFw	real	+	body (wing and rotor fold)	0.5
fWfoldkitFt	real	+	body (tail fold)	0.5
SET_Wvib	int	+	vibration treatment weight (1 fraction weight empty, 2 input)	1
Wvib	real	+	weight $W_{vib}$	
fWvib	real	+	fraction weight empty $f_{vib}$	
SET_Wcont	int	+	contingency weight (1 fraction weight empty, 2 input)	1
Wcont	real	+	weight $W_{cont}$	
fWcont	real	+	fraction weight empty $f_{cont}$	

$W_E = (\text{structure} + \text{propulsion group} + \text{systems and equipment}) + W_{vib} + W_{cont}$

SET\_Wvib:  $W_{vib}$  input or  $W_{vib} = f_{vib}W_E$

SET\_Wcont:  $W_{cont}$  input or  $W_{cont} = f_{cont}W_E$ ; or adjust  $W_{cont}$  for input or scaled  $W_E$  (FIX\_WE=1 or 2)

SET\_fold, folding:

set component dWxxfold=0 and fWxxfold=0 for no rotor/wing/tail/body fold weight

fraction fWfoldkit of fold weight in fixed useful load as kit, remainder kept in component weight

kit weight removable, absent for specified flight conditions and missions

	+	systems and equipment		
Wauxpower	real	+	auxiliary power group (APU)	0.
Winstrument	real	+	instruments group	0.
Wpneumatic	real	+	pneumatic group	0.
Wenviron	real	+	environmental control group	0.
SET_Welectrical	int	+	electrical group (1 no details; 2 all terms)	1
Welectrical	real	+	aircraft	0.
Welect_supply	real	+	power supply	0.
Welect_conv	real	+	power conversion	0.
Welect_distrib	real	+	power distribution and controls	0.
Welect_lights	real	+	lights and signal devices	0.

Wselect_support	real	+	equipment supports	0.
SET_WMEQ	int	+	avionics group (1 no details; 2 all terms)	1
WMEQ	real	+	avionics	0.
Wavionics_com	real	+	communications	0.
Wavionics_nav	real	+	navigation	0.
Wavionics_ident	real	+	identification	0.
Wavionics_disp	real	+	control and display	0.
Wavionics_survive	real	+	aircraft survivability	0.
Wavionics_mission	real	+	mission system equipment	0.
		+	armament group	
SET_Warmor	int	+	armor (1 no details; 2 all terms)	1
Warmor	real	+	armor	0.
Uarmor_floor	real	+	cabin floor armor weight per area	
Uarmor_wall	real	+	cabin wall armor weight per area	
Uarmor_crew	real	+	armor weight per crew	
SET_Warmprov	int	+	armament provisions (1 no details; 2 all terms)	1
Warmprov	real	+	armament provisions	0.
Warmprov_gun	real	+	gun provisions	0.
Warmprov_turret	real	+	turret systems	0.
Warmprov_expend	real	+	expendable weapons provisions	0.
Warm_elect	real	+	armament electronics (avionics group)	0.
SET_Wfurnish	int	+	furnishings and equipment group (1 no details; 2 all terms)	1
Wfurnish	real	+	furnishings and equipment	0.
		+	accommodations for personnel	
Useat_crew	real	+	each crew seat	
Useat_pass	real	+	each passenger seat	
Uaccomm_crew	real	+	miscellaneous accommodation per crew seat	
Uaccomm_pass	real	+	miscellaneous accommodation per passenger seat	
Uox_crew	real	+	oxygen system per crew seat	
Uox_pass	real	+	oxygen system per passenger seat	
WFurnish_misc	real	+	miscellaneous equipment	0.
		+	furnishings	
WFurnish_trim	real	+	trim	0.
Uinsulation	real	+	acoustic and thermal insulation weight per cabin area	

			emergency equipment	
Wemerg_fire	real	+	fire detection and extinguishing	0.
Wemerg_other	real	+	other emergency equipment	0.
SET_Wload	int	+	load and handling group (1 no details; 2 all terms)	1
Wload	real	+	load and handling	0.
Whandling_aircraft	real	+	aircraft handling	0.
		+	load handling	
Uhandling_cargo	real	+	cargo handling weight per cabin floor area	
Wload_hoist	real	+	hoist	0.
Wload_extprov	real	+	external load provisions	0.
		+	systems and equipment	
Ncrew_seat	int	+	number of crew seats	0
Npass_seat	int	+	number of passenger seats	0
Ucrew_seat_inc	real	+	equipment weight increment per crew seat (0. for default)	0.
Upass_seat_inc	real	+	equipment weight increment per passenger seat (0. for default)	0.

---

SET\_Welectrical=1: only Welectrical+WDselect  
 SET\_WMEQ=1: only WMEQ; equipment weights include installation  
 SET\_Warmor=1: only Warmor  
 SET\_Warmprov=1: only Warmprov  
 SET\_Wfurnish=1: only Wfurnish  
     miscellaneous accommodation includes galleys and toilets  
     miscellaneous equipment includes cockpit displays  
     trim includes floor covering, partitions, crash padding, acoustic and thermal insulation  
         excluding vibration absorbers  
     other emergency equipment includes first aid, survival kit, life raft  
 SET\_Wload=1: only Wload  
  
 equipment weight increment is for flight condition and mission; default (if SET\_furnish=2 and SET\_armor=2):  
     Ucrew\_seat\_inc=Useat\_crew+Uaccom\_crew+Uox\_crew+Uarmor\_crew  
     Upass\_seat\_inc=Useat\_pass+Uaccom\_pass+Uox\_pass

---

Derived weights			
		fixed useful load, fold kit	
W_fixUL_foldkit_fus	real	fuselage	
W_fixUL_foldkit_rotor	real	rotors	
W_fixUL_foldkit_wing	real	wings	
W_fixUL_foldkit_tail	real	tails	
		armament group	
Warmor_floor	real	cabin floor armor weight	
Warmor_wall	real	cabin wall armor weight	
Warmor_crew	real	crew armor weight	
		furnishings and equipment group	
Wseat	real	seats	
Waccomm	real	miscellaneous accommodation	
Wox	real	oxygen system	
Winsulation	real	acoustic and thermal insulation weight	
Whandling_cargo	real	cargo handling weight	
Ucrewseatingc	real	equipment weight increment per crew seat	
Upassseatingc	real	equipment weight increment per passenger seat	
Wtip(nrotormax)	real	weight on wing tip	
+ Weight			
+ systems and equipment			
+ flight control group and hydraulic group			
MODEL_fc	int	+ model (0 input, 1 NDARC, 2 custom)	1
MODEL_RWfc	int	+ rotary wing flight controls (0 not present, 1 global, 2 for each rotor)	1
refRotor	int	+ reference rotor number for global	1
MODEL_FWfc	int	+ fixed wing flight controls (0 for not present)	1
MODEL_CVfc	int	+ conversion controls (0 for not present)	1
		+ flight control weight increment	
dWRWfc_b	real	+ rotary wing, boosted	0.
dWRWfc_mb	real	+ rotary wing, control boost mechanisms	0.
dWRWfc_nb	real	+ rotary wing, non-boosted	0.
dWFWfc_mb	real	+ fixed wing, control boost mechanisms	0.
dWFWfc_nb	real	+ fixed wing, non-boosted	0.
dWCVfc_mb	real	+ conversion, boosted	0.

dWCVfc_nb	real	+	conversion, control boost mechanisms	0.
		+	fixed flight controls	
Wfc_cc	real	+	cockpit controls	0.
Wfc_afcs	real	+	automatic flight control system	0.
		+	hydraulic weight increment	
dWRWhyd	real	+	rotary wing	0.
dWFWhyd	real	+	fixed wing	0.
dWCVhyd	real	+	conversion	0.
WEQhyd	real	+	equipment hydraulics	0.
WFItCont	WFItCont		NDARC model	
		+	anti-icing group	
MODEL_DI	int	+	model (0 input, 1 NDARC, 2 custom)	1
		+	weight increment	
dWDselect	real	+	electrical system	0.
dWDsys	real	+	anti-ice system	0.
WDelce	WDelce		NDARC model	

---

weight model result multiplied by technology factor and increment added:

$W_{xx} = TECH_{xx} * W_{xx\_model} + dW_{xx}$ ; for fixed (input) weight use MODEL\_xx=0 or TECH\_xx=0.

MODEL\_RWfc: global option is based on just main rotors

“for each rotor” option sums separate contributions from all rotors

tiltrotor wing weight model requires weight on wing tip: distributed to designated rotor;  
sum rotary wing and conversion flight controls, hydraulic group, trapped fluids

---

		+ Technology Factors	
		+ rotary wing flight control weight	
TECH_RWfc_b	real	+	boosted $\chi_{RWb}$ 1.0
TECH_RWfc_mb	real	+	control boost mechanisms $\chi_{RWmb}$ 1.0
TECH_RWfc_nb	real	+	non-boosted $\chi_{RWnb}$ 1.0

		+ fixed wing flight control weight	
TECH_FWfc_mb	real	+ control boost mechanisms $\chi_{FWmb}$	1.0
TECH_FWfc_nb	real	+ non-boosted $\chi_{FWnb}$	1.0
		+ conversion flight control weight	
TECH_CVfc_mb	real	+ control boost mechanisms $\chi_{CVmb}$	1.0
TECH_CVfc_nb	real	+ non-boosted $\chi_{CVnb}$	1.0
		+ flight control hydraulics	
TECH_RWhyd	real	+ rotary wing $\chi_{RWhyd}$	1.0
TECH_FWhyd	real	+ fixed wing $\chi_{FWhyd}$	1.0
TECH_CVhyd	real	+ conversion $\chi_{CVhyd}$	1.0
		+ anti-icing	
TECH_Dselect	real	+ electrical system $\chi_{DSelect}$	1.0
TECH_Disys	real	+ anti-ice system $\chi_{DISys}$	1.0

## Chapter 38

**Structure: WFltCont**

Variable	Type	Description	Default
		+ Flight Control Group, NDARC Weight Model	
		+ rotary wing flight controls	
MODEL_WRWfc	int	+ model (1 fraction, 2 parametric, 3 Boeing, 4 GARTEUR, 5 Tishchenko, 6 generic)	1
fRWfc_nb	real	+ AFDD: non-boosted control weight $f_{RWnb}$ (fraction boost mechanisms weight)	0.6
xRWfc_red	real	+ AFDD: hydraulic system redundancy/complexity factor $f_{RWred}$	3.0
KIND_WRWfc	int	+ AFDD: survivability (1 baseline, 2 UTTAS/AAH level of survivability)	2
fRWfc_b	real	+ Boeing, GARTEUR, Tishchenko, or generic: boosted weight $f_{RWb}$ (fraction boosted + boost mech, or total)	0.2
fRWfc_mb	real	+ GARTEUR, Tishchenko, or generic: boost mechanisms weight $f_{RWmb}$ (fraction total weight)	0.2
KRW	real	+ generic: factor $K_{RW}$	0.
XRWN	real	+ exponent $X_{RWN}$	0.
XRWR	real	+ exponent $X_{RWR}$	0.
XRWc	real	+ exponent $X_{RWc}$	0.
XRWW	real	+ exponent $X_{RWW}$	0.
XRwb	real	+ exponent $X_{RWb}$	0.
		+ fixed wing flight controls	
MODEL_WFWfc	int	+ model (1 full controls, 2 only on hor tail, 3 GARTEUR, Raymer (4 transport, 5 general aviation), 6 generic)	1
fFWfc_nb	real	+ non-boosted weight $f_{FWnb}$ (fraction total fixed wing flight control weight)	0.10
nfunction	int	+ Raymer: number of control functions	6
fmech	real	+ Raymer: number of mechanical functions (fraction total)	0.2
KFW	real	+ generic, factor $K_{FW}$	0.
XFW	real	+ exponent $X_{FW}$	0.
		+ conversion controls	
fCVfc_mb	real	+ boost mechanisms weight $f_{CVmb}$ (fraction maximum takeoff weight)	0.02
fCVfc_nb	real	+ non-boosted weight $f_{CVnb}$ (fraction boost mechanisms weight)	0.10
		+ cockpit controls	
MODEL_cc	int	+ model (1 fixed Wfc_cc, 2 scaled with DGW)	1
Kcc	real	+ factor $K_{cc}$	1.7
Xcc	real	+ exponent $X_{cc}$	0.41

	+	Hydraulic Group, NDARC Model	
	+	flight control hydraulics	
fRWhyd	real	+    rotary wing $f_{RWhyd}$ (fraction rotary wing boost mechanisms + hydraulic weight)	0.40
fFWhyd	real	+    fixed wing $f_{FWWhyd}$ (fraction fixed wing boost mechanisms weight)	0.10
fCVhyd	real	+    conversion $f_{CVWhyd}$ (fraction conversion boost mechanisms weight)	0.10

---

flight controls = non-boosted (do not see aero surface or rotor loads) + boost mechanisms (actuators) + boosted

MODEL\_WRWfc = fraction: parametric except for non-boosted controls (from fRWfc\_nb)

typically fRWfc\_nb = 0.6 (data range 0.3 to 1.8), fRWhyd = 0.4

$\times RWfc\_red = 1.0$  to 3.0

---

WtParam_fc(8)	real	+	Custom Weight Model	
		+	parameters	0.

## Chapter 39

**Structure: WDeIce**

Variable	Type	Description	Default
kDelce_elec(nrotormax)	real	+ Anti-Icing Group, NDARC Weight Model + weight factor for electrical system $K_{elec}$ (lb/ft <sup>2</sup> or kg/m <sup>2</sup> )	0.25
kDelce_rotor(nrotormax)	real	+ weight factor for main rotor $K_{rotor}$ (lb/ft <sup>2</sup> or kg/m <sup>2</sup> )	0.25
kDelce_wing(nwingmax)	real	+ weight factor for wing $K_{wing}$ (lb/ft or kg/m)	0.
kDelce_air(nengmax)	real	+ weight factor for engine air intake $K_{air}$ (lb/lb or kg/kg)	0.006
kDelce_jet(njetmax)	real	+ weight factor for jet air intake $K_{jet}$ (lb/lb or kg/kg)	0.006
WtParam_DI(8)	real	+ Custom Weight Model + parameters	0.

## Chapter 40

**Structure: Fuselage**

Variable	Type	Description	Default
		+ Fuselage	
title	c*100	+ title	
notes	c*1000	+ notes	
		+ Geometry	
loc_fuselage	Location	+ fuselage location	
SET_length	int	+ fuselage length (1 input, 2 calculated, 3 from rotor and tail only, 4 from rotor only)	1
Length_fus	real	+ length $\ell_{\text{fus}}$	
SET_nose	int	+ nose length (distance forward of hub; 1 input, 2 calculated)	1
Length_nose	real	+ nose length $\ell_{\text{nose}}$	
fLength_nose	real	+ nose length (fraction reference length)	
SET_aft	int	+ aft length (distance aft of hub; 1 input, 2 calculated)	1
Length_aft	real	+ aft length $\ell_{\text{aft}}$	
fLength_aft	real	+ aft length (fraction reference length)	
fRef_fus	real	+ fuselage SL location relative nose $f_{\text{ref}}$ (fraction fuselage length)	
Length_rotors	real	rotor-rotor longitudinal separation	
Length_tail	real	tail length (wing to horizontal tail)	
Width_fus	real	+ fuselage width $w_{\text{fus}}$	
SET_Swet	int	+ fuselage wetted area (1 input, 2 input plus boom, 3 from nose length, 4 from fuselage length, 5 from weight)	2
Swet	real	+ wetted area $S_{\text{wet}}$	
Sproj	real	+ projected area $S_{\text{proj}}$	
fSwet	real	+ factor for wetted area $f_{\text{wet}}$ or $k_{\text{wet}}$	1.
fSproj	real	+ factor for projected area $f_{\text{proj}}$ or $k_{\text{proj}}$	1.
Height_fus	real	+ fuselage height $h_{\text{fus}}$	
Circum_boom	real	+ tail boom effective circumference $C_{\text{boom}}$	
Width_boom	real	+ tail boom effective width $w_{\text{boom}}$	
Swet_in	real	input wetted area $S_{\text{wet}}$	
Sproj_in	real	input projected area $S_{\text{proj}}$	

SET_Scabin	int	+	cabin area (1 input, 2 calculated)	2
Scabin	real	+	total cabin surface area $S_{\text{cabin}}$	
Scabin_floor	real	+	cabin floor area $S_{\text{cabin-floor}}$	
Scabin_wall	real	+	cabin wall area $S_{\text{cabin-wall}}$	
fScabin	real	+	factor for total cabin surface area $f_{\text{cabin}}$	0.6
fScabin_floor	real	+	factor for cabin floor area $f_{\text{cabin-floor}}$	0.6
fScabin_wall	real	+	factor for cabin wall area $f_{\text{cabin-wall}}$	0.6
KIND_scale	int	+	reference length (1 rotor radius, 2 wing span, 3 fuselage length)	1
refRotor	int	+	rotor number (for rotor radius)	1
refWing	int	+	wing number (for wing span)	1

---

SET\_length: input (use Length\_fus) or calculated (from nose and aft lengths)

calculated uses rotor, tail, wing locations; or just rotor and tail, or just rotor

which can not then be scaled with fuselage length

SET\_nose: input (use Length\_nose) or calculated (from fLength\_nose); used for Length\_fus and Swet

SET\_aft: input (use Length\_aft) or calculated (from fLength\_aft); used for Length\_fus

fRef\_fus=(SL\_fuselage-SL\_nose)/Length\_fus; used for operating length and sketch

input required if SET\_length = input, otherwise calculated

SET\_Swet: both wetted area and projected area; input (use Swet, Sproj),

or calculated (from fSwet, fSproj, Width\_fus, Height\_fus, and fuselage or nose length)

or from weight, units of  $k_{\text{wet}} = f_{\text{Swet}}$  and  $k_{\text{proj}} = f_{\text{Sproj}}$  are  $\text{ft}^2/\text{klb}^{2/3}$  or  $\text{m}^2/\text{Mg}^{2/3}$

boom circumference and width used if SET\_Swet not input and not from weight (set to zero if no boom)

---

SET\_Scabin: cabin areas used for systems and equipment weights

---

Height_ramp	real	+	Geometry (for graphics)	
fLength_cargo	real	+	height of cargo ramp	
	real	+	fraction of fuselage length used for cargo	0.60

		+ Aerodynamics	
MODEL_aero	int	+ model (0 none, 1 standard)	1
AFuse	AFuse	standard model	
DoQ_cont	real	+ contingency drag, area $(D/q)_{\text{cont}}$	0.
DoQV_cont	real	+ contingency vertical drag, area $(D/q)_{V\text{cont}}$	0.
		Derived drag	
DoQ_fus	real	fuselage drag, area $(D/q)_{\text{fus}}$	
DoQV_fus	real	fuselage vertical drag, area $(D/q)_{V\text{fus}}$	
DoQ_fit	real	fittings and fixtures drag, area $(D/q)_{\text{fit}}$	
DoQ_rb	real	rotor-body interference drag, area $(D/q)_{\text{rb}}$	

DoQ\_cont calculated if total drag fixed (Aircraft FIX\_drag); otherwise input

DoQV\_cont calculated if total download fixed (Aircraft FIX\_DL); otherwise input

		+ Weight	
Weight	Weight	weight statement (component)	
		+ fuselage group	
MODEL_weight	int	+ fuselage group model (0 input, 1 NDARC, 2 custom)	1
		+ weight increment	
dWbody	real	+ basic body	0.
dWmar	real	+ body marinization	0.
dWpress	real	+ pressurization	0.
dWcrash	real	+ body crashworthiness	0.
dWftfold	real	+ tail fold	0.
dWfwfold	real	+ wing fold	0.
WFuse	WFuse	AFFD model	
		+ Technology Factors	
TECH_body	real	+ basic body $\chi_{\text{basic}}$	1.0
TECH_mar	real	+ body marinization $\chi_{\text{mar}}$	1.0
TECH_press	real	+ pressurization $\chi_{\text{press}}$	1.0
TECH_crash	real	+ body crashworthiness $\chi_{\text{cw}}$	1.0
TECH_ftfold	real	+ tail fold $\chi_{\text{tfold}}$	1.0
TECH_fwfold	real	+ wing fold $\chi_{\text{wfold}}$	1.0

---

weight model result multiplied by technology factor and increment added:

$W_{xx} = TECH_{xx} * W_{xx\_model} + dW_{xx}$ ; for fixed (input) weight use MODEL\_xx=0 or TECH\_xx=0.

---

## Chapter 41

**Structure: AFuse**

Variable	Type	Description	Default
AoA_zl	real	+ Aerodynamics, Standard Model + zero lift angle of attack $\alpha_{zl}$ (deg)	0.
AoA_max	real	+ angle of attack for maximum lift $\alpha_{\max}$ (deg) + lift	10.
SET_lift	int	+ specification (1 fixed, $L/q$ ; 2 scaled, $C_L$ )	2
dLoQda	real	+ lift slope, $d(L/q)/d\alpha$ (per rad)	0.
dCLda	real	+ lift slope, $C_{L\alpha} = dC_L/d\alpha$ (per rad; based on wetted area, $L/q = SC_L$ ) + pitch moment	0.
SET_moment	int	+ specification (1 fixed, $M/q$ ; 2 scaled, $C_M$ )	2
MoQ0	real	+ moment at zero lift, $(M/q)_0$	0.
CM0	real	+ moment at zero lift, $C_{M0}$ (based on wetted area and fuselage length, $M/q = S\ell C_M$ )	0.
dMoQda	real	+ moment slope, $d(M/q)/d\alpha$ (per rad)	0.
dCMda	real	+ moment slope, $C_{M\alpha} = dC_M/d\alpha$ (per rad; based on wetted area and fuselage length, $M/q = S\ell C_M$ )	0.
SS_zy	real	+ sideslip angle for zero side force $\beta_{zy}$ (deg)	0.
SS_max	real	+ sideslip angle for maximum side force $\beta_{\max}$ (deg) + side force	10.
SET_side	int	+ specification (1 fixed, $Y/q$ ; 2 scaled, $C_Y$ )	2
dYoQdb	real	+ side force slope, $d(Y/q)/d\beta$ (per rad)	0.
dCYdb	real	+ side force slope, $C_{Y\beta} = dC_Y/d\beta$ (per rad; based on wetted area, $Y/q = SC_Y$ ) + yaw moment	0.
SET_yaw	int	+ specification (1 fixed, $N/q$ ; 2 scaled, $C_N$ )	2
NoQ0	real	+ moment at zero lift, $(N/q)_0$	0.
CN0	real	+ moment at zero lift, $C_{N0}$ (based on wetted area and fuselage length, $N/q = S\ell C_N$ )	0.
dNoQdb	real	+ moment slope, $d(N/q)/d\beta$ (per rad)	0.
dCNdb	real	+ moment slope, $C_{N\beta} = dC_N/d\beta$ (per rad; based on wetted area and fuselage length, $N/q = S\ell C_N$ )	0.

---

SET\_XXX: fixed (use XoQ) or scaled (use CX); other parameter calculated

---

		+ Drag, Standard Model	
		+ forward flight drag	
SET_drag	int	+ specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQ	real	+ area ( $D/q$ ) <sub>0</sub>	
CD	real	+ coefficient $C_{D0}$ (based on wetted area, $D/q = SC_D$ )	0.005
		+ fixtures and fittings	
SET_Dfit	int	+ specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQ_fit	real	+ area ( $D/q$ ) <sub>fit</sub>	
CD_fit	real	+ coefficient $C_{Dfit}$ (based on wetted area, $D/q = SC_D$ )	0.
		+ rotor-body interference	
SET_Drb	int	+ specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQ_rb(nrotormax)	real	+ area ( $D/q$ ) <sub>rb</sub>	
CD_rb(nrotormax)	real	+ coefficient $C_{Drb}$ (based on wetted area, $D/q = SC_D$ )	0.
CD_rb_total	real	+ total rotor-body interference drag, $C_{Drb}$	
		+ vertical drag	
SET_Vdrag	int	+ specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQV	real	+ area ( $D/q$ ) <sub>V</sub>	
CDV	real	+ coefficient $C_{DV}$ (based on projected area, $D/q = S_{proj}C_D$ )	0.
CDVs	real	+ $C_{DV}S_{proj}/S_{wet}$	
		+ sideward drag	
SET_Sdrag	int	+ specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQS	real	+ area ( $D/q$ ) <sub>S</sub>	
CDS	real	+ coefficient $C_{DS}$ (based on wetted area, $D/q = SC_D$ )	0.
		+ drag variation with angle of attack	
MODEL_drag	int	+ model (0 none, 1 general, 2 quadratic)	2
AoA_Dmin	real	+ angle of attack for fuselage minimum drag $C_{Dmin}$ (deg)	0.
Kdrag	real	+ drag increment $K_d$ , $\Delta C_D = C_{D0}K_d \alpha_e ^{X_d}$	0.
Xdrag	real	+ drag increment $X_d$ , $\Delta C_D = C_{D0}K_d \alpha_e ^{X_d}$	2.

MODEL_trans	+	transition from forward flight drag to vertical drag	
AoA_tran	int	model (1 input transition angle of attack, 2 calculate for quadratic)	1
at	real	+ angle of attack for transition $\alpha_t$ (deg)	25.
Xd	real	angle of attack for transition $\alpha_t$ (deg) (derived)	
		exponent $X_d$ (derived)	

## Chapter 42

**Structure: WFuse**

Variable	Type	Description	Default
MODEL_body	int	+ Fuselage Group, NDARC Weight Model + model (1 AFDD84, 2 AFDD82, 3 other)	1
MODEL_other	int	+ model (1 Boeing, GARTEUR (2 air, 3 hel), 4 Tishchenko, 5 Torenbeek, Raymer (6 transport, 7 gen av), 8 generic)	
KIND_ramp	int	+ AFDD: rear cargo ramp (0 none)	0
fLength_crg	real	+ Boeing: cabin length + ramp length + cg range (fraction fuselage length)	0.6
Vdive	real	+ Boeing or Torenbeek or Raymer: design dive speed $V_{dive}$ (knots)	200.
ndoor	int	+ Raymer: number of cargo doors	0
Pdelta	real	+ Raymer: cabin pressure differential (psi)	8.
Kfus	real	+ generic: factor $K_{fus}$	0.
XfusW	real	+ exponent $X_{fusW}$	0.
Xfusn	real	+ exponent $X_{fusn}$	0.
XfusS	real	+ exponent $X_{fusS}$	0.
Xfusl	real	+ exponent $X_{fusl}$	0.
fWbody_mar	real	+ body weight for marinization $f_{mar}$ (fraction basic body weight)	0.
fWbody_press	real	+ body weight for pressurization $f_{press}$ (fraction basic body weight)	0.
fWbody_crash	real	+ body weight for crashworthiness $f_{cw}$ (fraction body weight)	0.
fWbody_tfold	real	+ tail fold weight $f_{tfold}$ (fraction tail (AFDD84 or other) or body (AFDD82) weight)	0.
fWbody_wfold	real	+ wing fold weight $f_{wfold}$ (fraction wing+tip (AFDD84 or other) or body+tailfold (AFDD82) weight)	0.

AFDD84 (UNIV) is universal body weight model, for tiltrotor and tiltwing as well as for helicopters  
 AFDD82 (HELO) is helicopter body weight model, should not be used for tiltrotor or tiltwing

dive speed:  $V_{max} = SLS$  max speed,  $V_{dive} = 1.25V_{max}$

$fLength_crg = (\ell_c + \ell_r + \Delta CG)/\ell_{body} \cong 1.0$  for tandem, 0.3-0.6 for single main rotor (0.7-0.8 with ramp)

typically  $fWbody_crash = 0.06$

typically  $fWbody_tfold = 0.30$  (AFDD84 or other) or 0.05 (AFDD82) for folding tail

WtParam\_fuse(8)      real      +      Custom Weight Model  
                          +      parameters      0.

## Chapter 43

**Structure: LandingGear**

Variable	Type	Description	Default
		+ Landing Gear	
title	c*100	+ title	
notes	c*1000	+ notes	
		+ Geometry	
loc_gear	Location	+ landing gear location	
d_gear	real	+ distance from bottom of landing gear to WL_gear $d_{LG}$	0.
place	int	+ placement (1 located on body, 2 located on wing)	1
KIND_LG	int	+ retraction (0 fixed, 1 retracts)	1
speed	real	+ retraction speed (CAS or TAS, knots)	
<p>landing gear location: with HAGL (FltState) determines rotor height above ground level  height rotor = landing gear above ground + hub above landing gear = HAGL + (WL_hub-WL_gear+d_gear)  place: used for weight (fuselage and wing)</p>			
		+ Aerodynamics	
MODEL_aero	int	+ model (0 none, 1 standard)	1
AGear	AGear	standard model	
		Derived drag	
DoQC_LG	real	landing gear cruise drag, area $D/q$ (0 for retractable gear)	
DoQH_LG	real	landing gear helicopter drag, area $D/q$	

		+ Weight	
Weight	Weight	weight statement (component)	
		+ alighting gear group	
MODEL_weight	int	+ alighting gear group model (0 input, 1 NDARC, 2 custom)	1
		+ weight increment	
dWLG	real	+ basic landing gear	0.
dWLGret	real	+ retraction	0.
dWLGcrash	real	+ crashworthiness	0.
WGear	WGear	AFFD model	
		+ Technology Factors	
TECH_LG	real	+ basic landing gear $\chi_{LG}$	1.0
TECH_LGret	real	+ retraction $\chi_{LGret}$	1.0
TECH_LGcrash	real	+ crashworthiness $\chi_{LGcw}$	1.0

---

weight model result multiplied by technology factor and increment added:

$Wxx = TECH_{xx} * Wxx\_model + dWxx$ ; for fixed (input) weight use MODEL\_xx=0 or TECH\_xx=0.

---

Chapter 44

---

**Structure: AGear**

Variable	Type	Description	Default
DoQ	real	+ Drag, Standard Model + drag area extended, $D/q$	

## Chapter 45

**Structure: WGear**

Variable	Type	Description	Default
MODEL_LG	int	+ Landing Gear Group, NDARC Weight Model + model (1 fraction, 2 parametric rotary wing, 3 parametric fixed wing)	2
nLG	int	+ number of landing gear assemblies $N_{LG}$	3
fWLG_basic	real	+ basic landing gear weight $f_{LG}$ (fraction maximum takeoff weight)	0.0325
fWLG_ret	real	+ landing gear weight for retraction $f_{LG_{ret}}$ (fraction basic weight)	0.08
fWLG_crash	real	+ landing gear weight for crashworthiness $f_{LG_{cw}}$ (fraction basic+retraction weight)	0.14
		only MODEL_LG=fraction uses fWLG_basic typically fWLG_basic = 0.0325 (fraction method) typically fWLG_ret = 0.08, fWLG_crash = 0.14	
WtParam_gear(8)	real	+ Custom Weight Model + parameters	0.

## Chapter 46

**Structure: Rotor**

Variable	Type	Description	Default
		+ Rotor	
title	c*100	+ title	
notes	c*1000	+ notes	
config	c*32	+ Configuration	'main'
rotorconfig	int	configuration (ROTORCONFIG_main, tail, prop)	
isMainRotor	int	main rotor (0 not)	
isAntiQRotor	int	antitorque rotor (0 not)	
isAuxTRotor	int	auxiliary thrust rotor (0 not)	
isVariableDiam	int	variable diameter rotor (0 not)	
isDuctedFan	int	ducted fan (0 not)	
isReactionDrive	int	reaction drive (0 not)	
isMultiRotor	int	multiple rotors (0 not)	
twinrotor	int	configuration (ROTORCONFIG_tandem, coaxial, tiltrotor, not_twin)	

configuration designation: principal designation required, rest identify special characteristics

principal designation = 'main', 'tail', 'prop'

antitorque = 'antiQ', 'auxT'

twin rotor = 'coaxial', 'tandem', 'tiltrotor' (keyword = tan, coax, tilt)

others = 'variable diameter', 'ducted fan', 'reaction drive', 'multirotor' (keyword = var, duct, react, multi)

principal designation determines where weight put in weight statement, and designates main rotors (isMainRotor)

separately specify appropriate performance and weight models

multiple rotor configurations have special options for geometry and performance

options defined by variables SET\_geom, MODEL\_twin, MODEL\_int\_twin

antitorque or aux thrust rotor has special options for sizing

options defined by variables SET\_rotor, fThrust, Tdesign

reaction drive still requires propulsion group

kRotor	int	rotor number	
	+ Propulsion group		
kPropulsion	int	group number	1
KIND_xmsn	int	drive system branch (1 primary, 0 dependent)	1
Vtip_ref(ngearmax)	real	+ reference tip speed	
rVtip_ref(ngearmax)	real	ratio to state #1	
Omega_ref	real	reference rotational speed (state #1)	
INPUT_gear	int	+ gear ratio input for dependent branch (1 Vtip_ref, 2 gear)	1
gear(ngearmax)	real	+ gear ratio $r = \Omega_{\text{dep}}/\Omega_{\text{prim}}$ (ratio rpm to rpm of primary rotor)	1.0
	+ Reaction drive		
r_react	real	+ effective radial station of force (fraction Radius)	1.0
prop_react(3)	int	propulsion for reaction drive (group (1 engine, 2 jet), number, model)	

drive system branch: only one primary rotor per propulsion group

tip speed and gear ratio required for each drive system state

primary: specify Vtip\_ref and default tip speeds;  $V_{\text{tip-hover}} = V_{\text{tip-ref}}(1)$

dependent: specify gear ratio, or specify Vtip\_ref and calculate gear (depend on rotor radius)

can not specify gear ratio if sizing changes dependent rotor  $V_{\text{tip}}$  (SET\_rotor)

if size task changes Vtip\_ref(1), then rVtip\_ref used to change Vtip\_ref(n) for n>1

variable speed transmission: for drive system state STATE\_gear\_var, gear ratio factor  $f_{\text{gear}}$  (control) included

when evaluate rotational speed of dependent rotor

---

reaction drive requires one and only one propulsion system (engine group or jet group)

---

INPUT_Vtip	int	+ Default rotor tip speeds (primary rotor)	
	+ input form (1 tip speed, 2 hover $V_{\text{tip}}$ and rpm ratio)		1
	+ function of flight speed		
nVrpm	int	+ number of speeds (1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	1
Vrpm(nvelmax)	real	+ speeds (CAS or TAS)	
	+ tip speed		
Vtip_cruise	real	+ cruise	

Vtip_man	real	+	maneuvering flight	
Vtip_oei	real	+	OEI	
Vtip_xmsn	real	+	transmission sizing	
Vtip(nvelmax)	real	+	function of flight speed	
		+	rpm ratio ( $V_{tip}/V_{tip-hover}$ )	
fRPM_cruise	real	+	cruise	1.
fRPM_man	real	+	maneuvering flight	1.
fRPM_oei	real	+	OEI	1.
fRPM_xmsn	real	+	transmission sizing	1.
fRPM(nvelmax)	real	+	function of flight speed	1.

---

default rotor tip speeds (including conversion): selectable by SET\_Vtip of FltState  
only for primary rotor;  $V_{tip}$  calculated from gear(state) for dependent branch

---

SET_limit_rs	int	+	Drive system torque limit	
Plimit_rs	real	+	rotor shaft (0 input, 1 fraction power, 2 fraction drive system limit)	1
fPlimit_rs	real	+	rotor shaft power limit $P_{RSlimit}$	
Qlimit_rs	real	+	rotor shaft power limit factor	1.
			rotor shaft torque limit ( $P_{RSlimit}$ at $\Omega_{ref}$ )	

---

drive system torque limit: Size%SET\_limit\_ds = input (use Plimit\_rs) or calculated (from fPlimit\_rs)  
 SET\_limit\_ds='input': Plimit\_rs input  
 SET\_limit\_ds≠'input': from rotor power required at transmission sizing flight conditions (DESIGN\_xmsn)  
 rotor shaft: options for SET\_limit\_ds≠'input'  
 SET\_limit\_rs=0: Plimit\_rs  
 SET\_limit\_rs=1: fPlimit\_rs × (rotor  $P_{req}$ )  
 SET\_limit\_rs=2: fPlimit\_rs ×  $P_{DSlimit}$   
 rotor shaft power limit: corresponds to one rotor  
 can be used for max effort in flight state (max\_quant='Q margin')  
 can be used for max gross weight in flight condition or mission (SET\_GW='maxQ' or 'maxPQ')  
 always check and print whether exceed torque limit

---

	+ Parameters	
diskload	real	disk loading ( $\text{lb}/\text{ft}^2$ or $\text{N}/\text{m}^2$ )
fArea	real	+ fraction rotor area for reference disk area $f_A$
fDGW	real	+ fraction DGW $f_W$ (for disk loading and blade loading)
fThrust	real	+ thrust factor (antitorque or aux thrust rotor) 1.0
Radius	real	+ radius $R$
CWs	real	+ blade loading $C_W/\sigma$ (thrust-weighted)
sigma	real	+ solidity $\sigma = Nc/\pi R$ (thrust-weighted)
Tdesign	real	+ thrust for antitorque or aux thrust rotor
Pdesign	real	+ power for antitorque or aux thrust rotor
Ndesign	real	+ rotor speed (rpm) at Pdesign
SET_thrust	int	+ rotor thrust for disk loading and blade loading (0 default; 1 $f_{DGW} \cdot DGW$ , 2 $f_{Thrust} \cdot T_{design}$ ) 0
iSET_thrust	int	rotor thrust for disk loading and blade loading (1 from DGW, 2 from Tdesign)

---

rotor disk loading =  $T/A$ ; aircraft disk loading =  $W_D/A_{ref}$ ,  $A_{ref} = \sum(f_A A)$

$W = f_W W_D$  (main rotor) or  $f_{Thrust} \cdot T_{design}$  (antitorque or aux thrust rotor); can specify using SET\_thrust

$T_{design}$  and  $P_{design}$  obtained from thrust design conditions and missions (DESIGN\_thrust)

if rotor sized from disk loading (SET\_rotor='DL+xx+xx'), area =  $T/diskload$

if SET\_rotor specify 'Vtip', use  $V_{tip\_ref}(1)$

if SET\_rotor not specify 'Vtip', calculate  $V_{tip\_ref}(1)$ , and then  $V_{tip\_ref}$  for dependent rotors

if SET\_rotor='CWs+xx+xx', then  $C_W/\sigma$  from  $f_{DGW} \cdot DGW$ , takeoff condition,  $V_{tip\_ref}$ , and thrust-weighted solidity

for antitorque or aux thrust rotor, need design conditions and missions (DESIGN\_thrust) to identify  $T_{design}$

otherwise use  $f_{DGW}$  and design gross weight

$T_{design}$  and  $P_{design}$  generally calculated (identified as input so inherited by next case)

---

	+ Geometry	
SET_geom	c*12	position (standard, tiltrotor, coaxial, tandem, tailrotor, multicopter) 'std'
KIND_TRgeom	int	+ tiltrotor (1 from clearance, 2 at wing tip, 3 at wing panel edge) 0
	+ twin rotors	
fRadius	real	+ ratio rotor radius to that of other rotor 1.0
otherRotor	int	+ other rotor number
positionOfRotor	int	+ rotor position (+1/-1 for right/left, lower/upper, front/aft) 0
WingForRotor	int	+ wing number 1

PanelForRotor	int	+	wing panel number	1
clearance_fus	real	+	tiltrotor clearance between rotor and fuselage $d_{fus}$	0.6
fclearance_fus	real	+	tiltrotor clearance factor	1.0
sep_coaxial	real	+	coaxial rotor separation $s$ (fraction Diameter)	0.08
overlap_tandem	real	+	tandem rotor overlap $o$ (fraction Diameter)	0.25
			derived	
iSET_geom	int		position (SET_geom_standard, tiltrotor, coaxial, tandem, tailrotor, multicopter)	
clearance_calc	real		clearance between rotor and fuselage $d_{fus}$	
Hsep_twin	real		horizontal separation $\ell$ (fraction Diameter)	
Vsep_twin	real		vertical separation $s$ (fraction Diameter)	
overlap_twin	real		overlap $o$ (1 – separation/Diameter)	
m_twin	real		overlap area fraction $m$	
		tail rotor		
mainRotor	int	+	main rotor number	1
fRadius_tr	real	+	radius scale factor	1.0
clearance_tr	real	+	clearance between tail rotor and main rotor $d_{tr}$	0.5
		multicopter		
ang_multicopter	real	+	angle $\psi$ (clockwise from forward, deg)	0.
len_multicopter	real	+	arm length $\ell$ (fraction Radius)	1.5
		variable diameter rotor		
SET_VarDiam	int	+	set diameter (1 conversion schedule, 2 function speed)	
fRcruise	real	+	ratio cruise radius to hover radius (variable diameter only)	

---

SET\_geom: calculation override part of location input

SET\_geom='tiltrotor': calculate lateral position (BL)

KIND\_TRgeom=clearance: from WingForRotor, Width\_fus, clearance\_fus, fclearance\_fus

KIND\_TRgeom=wing tip: from WingForRotor, wing span

KIND\_TRgeom=wing panel edge: from WingForRotor, PanelForRotor, panel edge and wing span

positionOnRotor specifies right or left position

BL or YoL in loc\_pylon, loc\_pivot, loc\_naccg is relative calculated loc\_rotor BL

SET\_geom='coaxial': calculate position from sep\_coaxial

same sep\_coaxial for otherRotor, positionOnRotor specifies lower or upper position

loc\_rotor (SL,BL,WL or XoL,YoL,ZoL) is midpoint between hubs

loc\_pylon (SL,BL,WL or XoL,YoL,ZoL) is relative calculated loc\_rotor

SET\_geom='tandem': calculate longitudinal position (SL) from overlap\_tandem  
 same overlap\_tandem for otherRotor, positionOnRotor specifies front or aft position  
 loc\_rotor (SL or XoL only) is midpoint between hubs  
 loc\_pylon SL or XoL is relative calculated loc\_rotor  
 SET\_geom='tailrotor': calculate longitudinal position (SL) from clearance\_tr, mainRotor  
 loc\_pylon SL or XoL is relative calculated loc\_rotor  
 SET\_geom='multicopter': calculate longitudinal and lateral position from ang\_multicopter, len\_multicopter  
 loc\_rotor (SL,BL or XoL,YoL) is center of rotors  
 loc\_pylon (SL,BL,WL or XoL,YoL,ZoL) is relative calculated loc\_rotor  
 ang\_multicopter also used for Aircraft%config='multicopter' to define control  
 if rotor number  $\leq 2$  and positionOnRotor=0: first rotor is right/lower/front, second rotor is left/upper/aft  
 sizing:  
 if SET\_rotor='ratio', Radius=fRadius\*Radius(otherRotor); otherRotor not SET\_rotor='ratio'  
 twin rotors: config identify as twin rotor  
 antitorque: config identify as antitorque rotor  
 if SET\_rotor='scale', Radius=fRadius\_tr\*(main rotor Radius)\*function(DiskLoad)  
 variable diameter: Radius is hover or reference radius; can be commanded by aircraft controls  
 conversion schedule:  $R = \text{Radius}$  in hover and helicopter mode ( $V \leq V_{\text{conv-hover}}$ )  
 $R = \text{Radius} * fRcruise$  in cruise mode ( $V \geq V_{\text{conv-cruise}}$ ); linear with  $V$  in conversion mode  
 function of speed: use nVdiam, fdiam, Vdiam to calculate  $R$

---

	+ Geometry	
rotate	int + direction of rotation (1 counter-clockwise, -1 clockwise)	1
nBlade	int + number of blades $N$	
	+ planform and twist	
SET_chord	int + chord distribution (1 linear from fTWsigma, 2 linear from taper, 3 nonlinear from fchord)	1
fTWsigma	real + ratio thrust-weighted solidity to geometric solidity $\sigma_t/\sigma_g$	1.
taper	real + taper ratio $t$ (tip chord/root chord)	1.
SET_twist	int + twist distribution (1 linear from twistL, 2 nonlinear from twist)	1
twistL	real + linear twist $\theta_L$ (deg, root to tip)	-10.
nprop	int + number of radial stations (maximum nrmax)	2
rprop(nrmax)	real + radial stations ( $r_{\text{root}}/R$ )	

fchord(nrmax)	real	+	chord distribution $c(r)/c_{ref}$	1.
twist(nrmax)	real	+	twist $\theta_{tw}(r)$ (deg)	
		+	flap dynamics	
KIND_hub	int	+	hub type (1 articulated, 2 hingeless)	1
flapfreq	real	+	first flapwise natural frequency $\nu$ (per-rev at hover tip speed)	1.04
cone freq	real	+	coning natural frequency $\nu$ (0. to use flapfreq)	0.
gamma	real	+	blade Lock number $\gamma$	8.
precone	real	+	precone $\beta_p$ (deg)	0.
delta3	real	+	pitch-flap coupling $\delta_3$ (deg)	0.
		+	aerodynamics	
dclda	real	+	blade section 2D lift-curve slope $a = c_{\ell\alpha}$ (per-rad)	5.7
tiploss	real	+	tip loss factor $B$ (lift zero from $BR$ to tip)	0.97
xroot	real	+	root cutout ( $r_{root}/R$ )	0.1

---

SET\_chord: use one of fTWsigma, taper, or fchord( $r$ ); others calculated

for nonlinear distribution, scale input fchord to unit thrust-weighted chord

$fTWsigma = \sigma_{tw}/\sigma_{geom}$ ; for linear taper  $f = c(.75R)/c(.5R) = (1 + 3taper)/(2 + 2taper)$

equivalent linear taper  $= c(\text{tip})/c(\text{root}) = (2f - 1)/(3 - 2f)$

for linear taper  $f_c = c/c_{ref} = 1 + (r - 0.75)4(taper - 1)/(1 + 3taper)$

SET\_twist: use one of twistL or twist( $r$ ); other calculated

for nonlinear distribution, twist relative  $0.75R$  obtained from input

flap frequency and Lock number are used for flap dynamics and hub moments due to flap

specified for hover radius and rotational speed

KIND\_hub determines how flap frequency and hub moment spring vary with rotor speed and  $R$

weight models can have separate blade and hub values for flap frequency

blade Lock number gamma: for SLS density,  $a = 5.7$ , thrust-weighted chord

SET\_Iblade determines whether Lock number input or calculated

---

thick	real	+	Geometry (for graphics)	
		+	blade thickness-to-chord ratio	0.12

		Geometry (derived)	
frotate	real	direction of rotation (1 counter-clockwise, -1 clockwise)	
Arotor	real	rotor area ( $\pi R^2$ )	
chord	real	thrust-weighted chord	
sigma_geom	real	solidity $\sigma = Nc/\pi R$ ; mean geometric chord	
chord_geom	real	mean geometric chord	
AspectRatio	real	aspect ratio, $R/chord\_geom$	
Ablade	real	thrust-weighted blade area	
KP	real	$\tan(\delta_3)$	
fc(nrmax)	real	chord distribution $f_c = c(r)/c_{ref}$ (scaled to unit thrust-weighted chord)	
tw(nrmax)	real	twist $\theta_{tw}(r)$ (relative $0.75R$ )	
gamma_calc	real	blade Lock number $\gamma$	
AI_calc	real	autorotation index $KE/P$	
Iblade	real	blade moment of inertia $I_{blade}$	
Kflap	real	flap stiffness $K_{flap}$ (KIND_hub = hingeless)	
eflap	real	flap hinge offset $e$ (KIND_hub = articulated)	
Kcone	real	cone stiffness $K_{cone}$ (conefreq input)	
Khub	real	hub moment spring $K_{hub}$	
	+ Blade element theory solution		
	+ integration		
mr	int	+ number of radial stations (xroot to 1; maximum mrmax)	4
mpsi	int	+ number of azimuth angles (maximum mpsimax)	8
dr	real	radial increment $dr = (1 - xroot)/mr$	
cspsi(mpsimax)	real	$\cos(\psi_j), \psi_j = j \Delta\psi, j = 1$ to mpsi ( $\Delta\psi = 2\pi/mpsi$ )	
snpsi(mpsimax)	real	$\sin(\psi_j), \psi_j = j \Delta\psi, j = 1$ to mpsi ( $\Delta\psi = 2\pi/mpsi$ )	
	+ Geometry		
loc_rotor	Location	+ hub location	
loc_pylon	Location	+ pylon location	
loc_pivot	Location	+ pivot location	
loc_naccg	Location	+ nacelle cg location	
direction	c*16	+ nominal orientation ('+x', '-x', '+y', '-y', '+z', '-z'; 'main' (-z), 'tail' (ry), 'prop' (x))	'main'
KIND_tilt	int	+ shaft control (0 fixed shaft, 1 incidence, 2 cant, 3 both controls)	0
	+ orientation of rotor shaft		

incid_hub	real	+	incidence $\theta_h$ (deg)	0.
cant_hub	real	+	cant angle $\phi_h$ (deg)	0.
		+	orientation of pivot axes	
dihedral_pivot	real	+	pivot dihedral angle $\phi_p$ (deg)	
pitch_pivot	real	+	pivot pitch angle $\theta_p$ (deg)	
sweep_pivot	real	+	pivot sweep angle $\psi_p$ (deg)	
		+	reference shaft control	
incid_ref	real	+	incidence $i_{ref}$ (deg)	0.
cant_ref	real	+	cant angle $c_{ref}$ (deg)	0.
		+	moving weight for cg shift	
SET_Wmove	int	+	weight (1 wing tip weight, 2 $W_{gbrs}$ , 3 $W_{gbrs}$ and $W_{ES}$ )	1
fWmove	real	+	fraction moving weight	1.
			Derived geometry	
iDirection	int		nominal orientation (1, -1, 2, -2, 3, -3, -3, r2, 1)	
axis_incid	int		axis incidence ( $\pm 123$ )	
axis_cant	int		axis cant ( $\pm 123$ )	
KIND_incid	int		incidence (0 fixed, 1 controlled)	
KIND_cant	int		cant angle (0 fixed, 1 controlled)	
CPF(3,3)	real		pivot axes relative airframe, $C^{PF}$	
CFP(3,3)	real		pivot axes relative airframe, $C^{FP}$	
WCHF(3,3)	real		$WC^{HF}$ ( $C^{SF}$ for reference control)	
CSF(3,3)	real		rotor shaft relative airframe, $C^{SF}$ (zero shaft control)	

---

loc\_naccg, loc\_pivot, orientation of pivot axes, and reference shaft control angles not used for KIND\_tilt=fixed shaft  
for tiltrotor, locations and orientation specified in helicopter mode, so incid\_ref = 90

SET\_Wmove: cg shift calculated using incidence and cant rotation of loc\_naccg relative loc\_pivot

moving weight fWmove\*Wmove, Wmove = Wtip\_total/nRotorOnWing or  $w/N_{rotor}$

$w = W_{gbrs}$  (drive system) or  $W_{gbrs} + \sum(W_{ES})$  (drive system and engine system)

---

		+	Controls	
KIND_control	int	+	rotor control mode (1 thrust and TPP, 2 thrust and NFP, 3 pitch and TPP, 4 pitch and NFP)	1
KIND_cyclic	int	+	cyclic input (1 tip-path-plane tilt, 2 hub moment, 3 lift offset)	1
KIND_coll	int	+	collective input (1 thrust, 2 $C_T/\sigma$ )	2
SCALE_coll	int	+	scale collective T matrix (0 for none)	1

			collective (magnitude of thrust vector)	
INPUT_coll	int	+	connection to aircraft controls (0 none, 1 input $T$ matrix)	1
$T_{coll}(ncontmax,nstatemax)$	real	+	control matrix	
nVcoll	int	+	number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
coll(nvelmax)	real	+	values	
Vcoll(nvelmax)	real	+	speeds (CAS or TAS)	
INPUT_lngcyc	int	+	longitudinal cyclic (tip-path plane tilt or no-feathering plane tilt)	
$T_{lngcyc}(ncontmax,nstatemax)$	real	+	connection to aircraft controls (0 none, 1 input $T$ matrix)	1
			control matrix	
nVlngcyc	int	+	number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
lngcyc(nvelmax)	real	+	values	
Vlngcyc(nvelmax)	real	+	speeds (CAS or TAS)	
INPUT_latcyc	int	+	lateral cyclic (tip-path plane tilt or no-feathering plane tilt)	
$T_{latcyc}(ncontmax,nstatemax)$	real	+	connection to aircraft controls (0 none, 1 input $T$ matrix)	1
			control matrix	
nVlatcyc	int	+	number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
latcyc(nvelmax)	real	+	values	
Vlatcyc(nvelmax)	real	+	speeds (CAS or TAS)	
		+	incidence $i$ (nacelle tilt)	
INPUT_incid	int	+	connection to aircraft controls (0 none, 1 input $T$ matrix)	1
$T_{incid}(ncontmax,nstatemax)$	real	+	control matrix	
			number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
nVincid	int	+	values	
incid(nvelmax)	real	+	speeds (CAS or TAS)	
Vincid(nvelmax)	real	+	cant $c$	
INPUT_cant	int	+	connection to aircraft controls (0 none, 1 input $T$ matrix)	1
$T_{cant}(ncontmax,nstatemax)$	real	+	control matrix	
			number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
nVcant	int	+	values	
cant(nvelmax)	real	+	speeds (CAS or TAS)	
Vcant(nvelmax)	real	+		

INPUT_diam	int	+ diameter $f_{\text{diam}}$ (variable diameter only)	
T_diam(ncontmax,nstatemax)	real	+ connection to aircraft controls (0 none, 1 input $T$ matrix)	1
nVdiam	int	+ control matrix	
fdiam(nvelmax)	real	+ number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
Vdiam(nvelmax)	real	+ values	
INPUT_fgear	int	+ speeds (CAS or TAS)	
T_fgear(ncontmax,nstatemax)	real	+ gear ratio factor $f_{\text{gear}}$ (variable speed transmission only)	1
		+ connection to aircraft controls (0 none, 1 input $T$ matrix)	
nVfgear	int	+ control matrix	
fgear(nvelmax)	real	+ number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
Vfgear(nvelmax)	real	+ values	
		+ speeds (CAS or TAS)	

---

aircraft controls connected to individual controls of component,  $c = Tc_{AC} + c_0$

for each component control, define matrix  $T$  (for each control state) and value  $c_0$

flight state specifies control state, or that control state obtained from conversion schedule

$c_0$  can be zero, constant, or function of flight speed (CAS or TAS, piecewise linear input)

by connecting aircraft control to component control, flight state can specify component control value

initial values if control is connected to trim variable; otherwise fixed for flight state

---

pylon moves with rotor; nontilting part is engine nacelle

---

		+ Trim Targets	
		+ rotor lift	
nVlift	int	+ number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	
Klift(nvelmax)	real	+ target	
Vlift(nvelmax)	real	+ speeds (CAS or TAS)	
		+ rotor propulsive force	
nVprop	int	+ number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	
Kprop(nvelmax)	real	+ target	
Vprop(nvelmax)	real	+ speeds (CAS or TAS)	

---

target definition determined by Aircraft%trim\_quant  
 Klift can be fraction total aircraft lift, lift,  $C_L/\sigma$ , or  $C_T/\sigma$   
 Kprop can be fraction total aircraft drag, propulsive force  $-X$ ,  $-C_X/\sigma$ , or  $-X/q$

---

	+ Rotor Thrust Capability ( $C_T/\sigma$ vs $\mu$ )	
	+ sustained	
nsteady	int + number of points (maximum 20)	16
mu_steady(20)	real + advance ratio	
CTs_steady(20)	real + $C_T/\sigma$	
	+ transient	
ntran	int + number of points (maximum 20)	16
mu_tran(20)	real + advance ratio	
CTs_tran(20)	real + $C_T/\sigma$	
	+ equation, $C_T/\sigma = K_0 - K_1\mu^2$	
K0_limit	real + constant $K_0$	0.17
K1_limit	real + constant $K_1$	0.25

---

CTs\_steady, CTS\_tran used to calculate rotor thrust margin, which available for max effort or trim  
 defaults used if CTs(1)=0.  
 default CTs\_steady = .170,.168,.161,.149,.131,.109,.084,.050,.049,.048,.047,.046,.045,.044,.043,.042  
 default CTs\_tran = .200,.197,.190,.177,.156,.135,.110,.080,.075,.070,.065,.060,.055,.050,.045,.040  
 default mu\_steady = 0.,.10,.20,.30,.40,.50,.60,.70,.71,.72,.73,.74,.75,.76,.77,.78  
 default mu\_tran = 0.,.10,.20,.30,.40,.50,.60,.70,.72,.74,.76,.78,.80,.82,.84,.86

---

	+ Performance	
MODEL_perf	int + power model (1 standard, 2 table model)	1
PRotorInd	PRotorInd standard model, induced power	
PRotorPro	PRotorPro standard model, profile power	
PRotorTab	PRotorTab table model	

MODEL_Ftpp	int	+	inplane forces, tip-path plane axes (1 neglect, 2 blade-element theory)	2
MODEL_Fpro	int	+	inplane forces, profile (1 simplified, 2 blade element theory, 3 neglect)	2

---

if thrust and TPP command, and neglect inplane forces relative TPP, then pitch control angles not required

---

MODEL_int	int	+	Interference	
	int	+	model (0 none, 1 standard, 2 with transition)	1
		+	transition	
Vint_low	real	+	low velocity (knots)	0.
Vint_high	real	+	high velocity (knots)	0.
IRotor	IRotor		standard model	

---

Kint=0 to suppress interference at component; MODEL\_int=0 for no interference at all  
with transition: interference factors linearly vary from Kint at  $V \leq V_{int\_low}$  to 0 at  $V \geq V_{int\_high}$

---

SET_aeroaxes	int	+	Geometry	
pitch_aero	real	+	hub/pylon aerodynamic axes (0 input pitch, 1 helicopter, 2 propeller or tiltrotor)	1
SET_Spylon	int	+	pitch relative shaft axes $\theta_{ref}$ , $C^{BS} = Y_{-\theta_{ref}}$	0.
Swet_pylon	real	+	pylon wetted area (1 fixed, input Swet; 2 scaled, $W_{gbs}$ ; 3 scaled, $W_{gbs}$ and $W_{ES}$ )	2
kSwet_pylon	real	+	area $S_{pylon}$	0.
SET_Sduct	int	+	factor, $k = S_{pylon}/(w/N_{rotor})^{2/3}$ (Units_Dscale)	1.0
S_duct	real	+	duct area (1 fixed, input S_duct; 2 scaled, from fLength_duct)	2
fLength_duct	real	+	area $S_{duct}$	0.
SET_Sspin	int	+	duct length (fraction rotor radius)	1.2
Swet_spin	real	+	spinner wetted area (1 fixed, input Swet; 2 scaled, from fSwet)	2
fSwet_spin	real	+	area $S_{spin}$	0.
fRadius_spin	real	+	factor, $k = S_{spin}/A_{spin}$	1.0
			spinner radius (fraction rotor radius)	0.

CBS(3,3)	real	Derived geometry pylon axes relative shaft, $C^{BS}$
CBF(3,3)	real	pylon axes relative airframe, $C^{BF}$ (zero shaft control)
Radius_spin	real	spinner radius $R_{\text{spin}}$
<hr/>		
only SET_aeroaxes=input uses pitch_aero; pitch_aero=180 for helicopter, 90 for propeller		
SET_Spylon, pylon wetted area: input (use Swet_pylon) or calculated (from kSwet_pylon) units of kSwet are $\text{ft}^2/\text{lb}^{2/3}$ or $\text{m}^2/\text{kg}^{2/3}$		
$w = W_{gbrs}$ (drive system) or $W_{gbrs} + \sum W_{ES}$ (drive system and engine system)		
pylon wetted area used for pylon drag		
rotor pylon must be consistent with engine group nacelle		
SET_Sduct, duct area: input (use S_duct) or calculated (from fLength_duct)		
$S_{\text{duct}} = (2\pi R)\ell_{\text{duct}}, \ell_{\text{duct}} = \text{fLength\_duct} * R$ ; used for drag (wetted area $2S_{\text{duct}}$ ) and weight		
SET_Sspin, spinner wetted area: (use Swet_spin) or calculated (from fSwet_spin)		
$A_{\text{spin}} = \pi R_{\text{spin}}^2$ = spinner frontal area (from fRadius_spin*R); spinner radius used for drag and weight		
<hr/>		
+ Drag		
MODEL_drag	int	+ model (0 none, 1 standard) 1
Idrag	real	+ incidence angle for helicopter nominal drag (deg; 0 for not tilt) 0.
DRotor	DRotor	standard model
Derived drag		
DoQC_hub	real	hub cruise drag, area $(D/q)_{\text{hub}}$
DoQH_hub	real	hub helicopter drag, area $(D/q)_{\text{hub}}$
DoQV_hub	real	hub vertical drag, area $(D/q)_{\text{hub}}$
DoQC_pylon	real	pylon cruise drag, area $(D/q)_{\text{pylon}}$
DoQH_pylon	real	pylon helicopter drag, area $(D/q)_{\text{pylon}}$
DoQV_pylon	real	pylon vertical drag, area $(D/q)_{\text{pylon}}$
DoQC_duct	real	duct cruise drag, area $(D/q)_{\text{duct}}$
DoQH_duct	real	duct helicopter drag, area $(D/q)_{\text{duct}}$
DoQV_duct	real	duct vertical drag, area $(D/q)_{\text{duct}}$
DoQ_spin	real	spinner drag, area $(D/q)_{\text{spin}}$
Swet_rotor	real	total wetted area $S_{\text{wet}}$

	+ Download and blockage	
MODEL_download	int + model (0 none, 1 blockage, 2 download, 3 both)	0
download	real + download $DL = \Delta T/T$	0.
blockage	real + blockage $B = \Delta T/T$	0.
muDL	real + advance ratio $\mu_{DL}$ (0. for no correction)	0.16
zDL	real + height above ground ( $z_g/D$ ) <sub>DL</sub> (fraction diameter, 0. for no correction)	0.41
aDL	real + forward flight constant $a_{DL}$	1.04
bDL	real + ground effect constant $b_{DL}$	0.23

---

download: rotor induced and profile power evaluated at thrust increased by  $f_{DL} = 1/(1 - \Delta T/T)$

blockage: force acting on aircraft includes  $f_B = (\Delta T/T)T$  opposing thrust

download  $DL$  and blockage  $B$  are for hover, out of ground effect

download and blockage zero for  $\mu > \mu_{DL}$  or  $z_g/D < (z_g/D)_{DL}$

---

	+ Weight	
Weight	Weight	weight statement (component)
	+ rotor group (or empennage or propulsion group)	
MODEL_weight	int + model (0 input, 1 NDARC, 2 custom)	1
	+ weight increment	
dWblade	real + blade	0.
dWhub	real + hub and hinge	0.
dWshaft	real + inter-rotor shaft	0.
dWspin	real + fairing/spinner	0.
dWrfold	real + blade fold	0.
dWtr	real + tail rotor	0.
dWaux	real + auxiliary thrust	0.
dWrsgpt	real + rotor support structure	0.
dWduct	real + duct	0.
WRotor	WRotor	NDARC model
SET_Iblade	int + blade moment of inertia (0 from Lock number, 1 from blade wt, 2 tip wt from Lock number, 3 tip wt from AI)	1
AI	real + autorotation index $KE/P = \frac{1}{2}N_{blade}I_{blade}\Omega^2/P$ (sec)	3.0
Wblade_tip	real + tip weight (per blade)	0.
rWblade_tip	real + location tip weight (fraction blade radius)	0.9
fWblade_tip	real + distributed weight for centrifugal force (fraction Wblade_tip)	1.0

rblade	real	+	radius of gyration for distributed mass (fraction blade radius)	0.6
xWblade	real	+	blade weight (fraction total tail rotor or auxiliary thrust rotor weight)	0.55
Wblade	real		blade weight (all blades; required for drive system weight)	
Wtip	real		weight on wing tip (required for tiltrotor wing weight)	
		+	Technology Factors	
TECH_blade	real	+	blade weight $\chi_{blade}$	1.0
TECH_hub	real	+	hub and hinge weight $\chi_{hub}$	1.0
TECH_shaft	real	+	inter-rotor shaft $\chi_{shaft}$	1.0
TECH_spin	real	+	fairing/spinner weight $\chi_{spin}$	1.0
TECH_rfold	real	+	blade fold weight $\chi_{fold}$	1.0
TECH_tr	real	+	tail rotor weight $\chi_{tr}$	1.0
TECH_aux	real	+	auxiliary thrust weight $\chi_{at}$	1.0
TECH_rsupt	real	+	rotor support structure weight $\chi_{supt}$	1.0
TECH_duct	real	+	duct weight $\chi_{duct}$	1.0

---

weight model result multiplied by technology factor and increment added:

$$W_{xx} = \text{TECH}_{xx} * W_{xx\_model} + dW_{xx}; \text{ for fixed (input) weight use MODEL}_{xx}=0 \text{ or } \text{TECH}_{xx}=0.$$

blade weight:  $W_{blade} = \chi_{blade} w_{blade} + dW_{blade} + (1 + f) W_{tip} N_{blade}$

SET\_Iblade: calculate blade moment of inertia Iblade

0 from Lock number gamma, independent of blade weight

1 from blade weight

2 from Lock number gamma, tip weight Wblade\_tip calculated from Iblade

3 from autorotation index AI, tip weight Wblade\_tip calculated from Iblade

for tail rotor or aux thrust weight model (MODEL\_config = 2 or 3), blade weight  $W_{blade} = xWblade * W_{tr}$  or  $xWblade * W_{at}$

rotor weight = blade + hub + spinner + fold + shaft + support + duct

rotor config determines where weight put in weight statement

main rotor: rotor group

tail rotor: empennage group (tail rotor)

propeller: propulsion group (propeller/fan installation)

---

## Chapter 47

**Structure: PRotorInd**

Variable	Type	Description	Default
MODEL_ind	int	+ Rotor Induced Power, Standard Energy Performance Method + model (0 none, 1 constant, 2 standard) + induced velocity factors (ratio to momentum theory induced velocity)	2
Ki_hover	real	+ hover $\kappa_{\text{hover}}$	1.12
Ki_climb	real	+ axial climb $\kappa_{\text{climb}}$	1.08
Ki_prop	real	+ axial cruise (propeller) $\kappa_{\text{prop}}$	2.0
Ki_edge	real	+ edgewise flight (helicopter) $\kappa_{\text{edge}}$ + variation with thrust	2.0
CTs_Hind	real	+ $(C_T/\sigma)_{\text{ind}}$ for hover $\kappa_h$ variation	0.08
kh1	real	+ coefficient $k_{h1}$ for $\kappa_h$	0.
kh2	real	+ coefficient $k_{h2}$ for $\kappa_h$	0.
Xh2	real	+ exponent $X_{h2}$ for $\kappa_h$	2.
CTs_Pind	real	+ $(C_T/\sigma)_{\text{ind}}$ for axial $\kappa_p$ variation	0.08
kp1	real	+ coefficient $k_{p1}$ for $\kappa_p$	0.
kp2	real	+ coefficient $k_{p2}$ for $\kappa_p$	0.
Xp2	real	+ exponent $X_{p2}$ for $\kappa_p$	2.
CTs_Tind	real	+ $(C_T/\sigma)_{\text{ind}}$ for edgewise $\kappa_e$ variation	0.08
kt1	real	+ coefficient $k_{t1}$ for $\kappa_e$	0.
kt2	real	+ coefficient $k_{t2}$ for $\kappa_e$	0.
Xt2	real	+ exponent $X_{t2}$ for $\kappa_e$ + variation with shaft angle	2.
kpa	real	+ coefficient $k_{h\alpha}$ for $\kappa_p$	0.
Xpa	real	+ exponent $X_{h\alpha}$ for $\kappa_p$	2.
Maxial	real	+ constant $M_{\text{axial}}$ in transition from hover to climb	1.176
Xaxial	real	+ exponent $X_{\text{axial}}$ in transition from hover to climb + variation with axial velocity	0.65
mu_prop	real	+ advance ratio $\mu_{z\text{prop}}$ for Ki_prop	1.0
ka1	real	+ coefficient $k_{a1}$ for $\kappa(\mu_z)$ (linear)	0.

ka2	real	+	coefficient $k_{a2}$ for $\kappa(\mu_z)$ (quadratic)	0.
ka3	real	+	coefficient $k_{a3}$ for $\kappa(\mu_z)$	0.
Xa	real	+	exponent $X_a$ for $\kappa(\mu_z)$	4.5
		+	variation with edgewise velocity	
mu_edge	real	+	advance ratio $\mu_{\text{edge}}$ for $K_i_{\text{edge}}$	0.35
ke1	real	+	coefficient $k_{e1}$ for $\kappa(\mu)$ (linear)	0.8
ke2	real	+	coefficient $k_{e2}$ for $\kappa(\mu)$ (quadratic)	0.
ke3	real	+	coefficient $k_{e3}$ for $\kappa(\mu)$	1.
Xe	real	+	exponent $X_e$ for $\kappa(\mu)$	4.5
kea	real	+	variation with rotor drag $k_{e\alpha}$	0.
		+	variation with lift offset	
ko1	real	+	coefficient $k_{o1}$ for $f_{\text{off}}$	0.
ko2	real	+	factor $k_{o2}$ for $f_{\text{off}}$	8.
Ki_min	real	+	minimum $\kappa_{\min}$	1.
Ki_max	real	+	maximum $\kappa_{\max}$	10.
fedge	real		edgewise scale factor $S$	
fprop	real		axial scale factor $S$	

---

MODEL\_ind=constant uses only  $K_i_{\text{hover}}$ ,  $K_i_{\text{prop}}$ ,  $K_i_{\text{edge}}$   
nonzero values of  $K_i$  in FltState supersede calculated value

---

MODEL_climb	int	+	Climb power	
		+	model (0 for no climb power increment, 1 vertical, 2 edgewise, 3 both)	0
nclimb_vert	int	+	vertical flight	
Vclimb_vert(20)	real	+	number of climb values (maximum 20)	
fclimb_vert(20)	real	+	climb speed $V_c/v_h$	
		+	climb power factor $f$	
		+	edgewise forward flight	
nclimb_edge	int	+	number of climb values (maximum 20)	
Vclimb_edge(20)	real	+	climb speed $V_c/v_h$	
fclimb_edge(20)	real	+	climb power factor $f$	

---

climb power factor  $f(V_c/v_h)$  gives  $P_{\text{climb}} - P_{\text{level}} = TV_c f$   
     including  $TV_c$  and effect of climb on induced and profile power  
     intended for use with table model for level flight power

---

		+ Momentum theory	
MODEL_grad	int	+ inflow gradient in forward flight (0 none, 1 White and Blake, 2 Coleman and Feingold)	1
fGradx	real	+ longitudinal gradient factor $f_x$	1.
fGrady	real	+ lateral gradient factor $f_y$	1.
fGradm	real	+ hub moment inflow gradient factor $f_m$	1.
		+ Ground effect	
MODEL_GE	int	+ model (0 none, 1 Cheeseman, 2 BE Cheeseman, 3 Law, 4 Hayden, 5 Zbrozek, 6 Maryland, 7 $T$ table, 8 $P$ table)	3
Cge	real	+ effective height correction $C_g$	1.
		+ table	
KIND_GEtable	int	+ table kind (2 2D, 3 3D)	2
nCTsGE	int	+ number of $C_T/\sigma$ values (maximum ngetabmax)	0
nhGE	int	+ number of $h/D$ values (maximum ngetab2max)	0
nMtipGE	int	+ number of $M_{\text{tip}}$ values (maximum ngetab2max)	0
CTsGE(ngetabmax)	real	+ blade loading $C_T/\sigma$	
hGE(ngetab2max)	real	+ rotor height above ground $h/D$	
MtipGE(ngetab2max)	real	+ rotor tip Mach number $M_{\text{tip}}$	
xGE(ngetabmax,ngetab2max)	real	+ ground effect factor $\kappa_g = x(C_T/\sigma, h/D)$ or $f_g = x(C_T/\sigma, h/D)$	
xGE3(ngetabmax,ngetab2max,ngetab2max)	real	+ ground effect factor $\kappa_g = x(C_T/\sigma, h/D, M_{\text{tip}})$ or $f_g = x(C_T/\sigma, h/D, M_{\text{tip}})$	

---

MODEL\_GE: table options for  $\kappa_g = T/T_\infty$  or  $f_g = P/P_\infty$   
     as function of blade loading  $C_T/\sigma$  and rotor height above ground  $h/D$  (fraction rotor diameter),  
     and perhaps tip Mach number  $M_{\text{tip}}$

---

Cge: for tiltrotors, typically  $C_g = 0.5$ ; smaller effective height accounting for increased influence of ground compared to isolated rotor

---

	+ Ducted fan	
MODEL_duct	int	+ model (1 specify area ratio, 2 specify thrust ratio) 1
fDuctA	real	+ area ratio $f_A$ (fan area/far wake area) 1.
fDuctT	real	+ thrust ratio $f_T$ (rotor thrust/total thrust) 0.5
fDuctVx	real	+ velocity ratio $f_{Vx}$ (fan edgewise velocity/free stream velocity) 1.
fDuctVz	real	+ velocity ratio $f_{Vz}$ (fan axial velocity/free stream velocity) 1.

---

ducted fan model used only if config='duct'

---

	+ Twin rotors	
MODEL_twin	c*12	+ model (based on config, none, side-by-side, coaxial, tandem, multirotor) 'config'
Kh_twin	real	+ ideal induced velocity correction for hover $\kappa_{htwin}$ 1.00
Kf_twin	real	+ ideal induced velocity correction for forward flight $\kappa_{ftwin}$ 0.85
Cind_twin	real	+ constant $C$ in hover to forward flight transition 1.0
A_coaxial	real	+ coaxial rotor nonuniform disk loading factor $\bar{\alpha}$ 1.05
xh_multi(nrotormax)	real	+ multirotor thrust factor $x_h$ for hover 1.0
xf_multi(nrotormax)	real	+ multirotor thrust factor $x_f$ for forward flight 1.0
	Derived twin rotors	
iMODEL_twin	int	model (MODEL_twin_none, sidebyside, coaxial, tandem, multirotor)
xh	real	thrust factor $x_h$ , hover
xf1	real	thrust factor $x_{f1}$ , forward flight, this rotor
xf2	real	thrust factor $x_{f2}$ , forward flight, other rotor
ftwin	real	forward flight factor $S$

---

MODEL\_twin: 'config', 'none', 'side-by-side' or 'tiltrotor', 'coaxial', 'tandem', or 'multirotor'

'config' must identify rotor as twin or multiple rotors

coaxial: MODEL\_twin='coaxial' (use A\_coaxial; Kh\_twin not used)

or MODEL\_twin='tandem' with zero horizontal separation (typically Kh\_twin=0.90)

coaxial and tandem: Kf\_twin = 0.88 to 0.81 for rotor separation  $0.06D$  to  $0.12D$

---

## Chapter 48

**Structure: PRotorPro**

Variable	Type	Description	Default
TECH_drag	real	+ Rotor Profile Power, Standard Energy Performance Method + Technology factor + profile power $\chi$	1.0
Re_ref	real	+ Reference Reynolds number $Re_{ref}$ (0. for no correction)	0.
X_Re	real	+ exponent for Reynolds number correction $X_{Re}$	0.2
MODEL_basic	int	+ Basic model $c_{d\text{basic}}$ (0 none, 1 array, 2 equation) + array ( $c_d$ vs thrust-weighted $C_T/\sigma$ )	2
ncd	int	+ number of points (maximum 24)	24
CTs_cd(24)	real	+ blade loading	
cd(24)	real	+ drag coefficient + equation	
CTs_Dmin	real	+ $(C_T/\sigma)_{D\text{min}}$ for minimum profile drag ( $\Delta =  C_T/\sigma - (C_T/\sigma)_{D\text{min}} $ )	0.07
d0_hel	real	+ coefficient $d_{0\text{hel}}$ in drag, $c_{dh} = d_{0\text{hel}} + d_{1\text{hel}}\Delta + d_{2\text{hel}}\Delta^2 + \Delta c_{d\text{sep}}$ (hover/edgewise)	0.009
d1_hel	real	+ coefficient $d_{1\text{hel}}$ in drag (hover/edgewise)	0.
d2_hel	real	+ coefficient $d_{2\text{hel}}$ in drag (hover/edgewise)	0.5
d0_prop	real	+ coefficient $d_{0\text{prop}}$ in drag, $c_{dp} = d_{0\text{prop}} + d_{1\text{prop}}\Delta + d_{2\text{prop}}\Delta^2 + \Delta c_{d\text{sep}}$ (axial)	0.009
d1_prop	real	+ coefficient $d_{1\text{prop}}$ in drag (axial)	0.
d2_prop	real	+ coefficient $d_{2\text{prop}}$ in drag (axial)	0.5
dprop	real	+ variation with shaft angle, coefficient $d_{p\alpha}$ for $c_{dp}$	0.
Xprop	real	+ variation with shaft angle, exponent $X_{p\alpha}$ for $c_{dp}$	2.
CTs_sep	real	+ $(C_T/\sigma)_{\text{sep}}$ for separation ( $\Delta c_{d\text{sep}} = d_{\text{sep}}( C_T/\sigma  - (C_T/\sigma)_{\text{sep}})^{X_{\text{sep}}}$ )	0.07
dsep	real	+ factor $d_{\text{sep}}$ in drag increment	4.0
Xsep	real	+ exponent $X_{\text{sep}}$ in drag increment	3.0
df1	real	+ variation with edgewise velocity, coefficient $d_{f1}$	0.
df2	real	+ variation with edgewise velocity, coefficient $d_{f2}$	0.
Xf	real	+ variation with edgewise velocity, exponent $X_f$	2.
dz1	real	+ variation with axial velocity, coefficient $d_{z1}$	0.
dz2	real	+ variation with axial velocity, coefficient $d_{z2}$	0.

Xz	real	+	variation with axial velocity, exponent $X_z$	2.
----	------	---	---	----

---

default array (cd(1)=0.): $C_T/\sigma = 0.$ to 0.23 (uniform increments)				
$cd = .01100, .01075, .01025, .01000, .01010, .01070, .01050, .00975, .00925, .00926, .00938, .00977,$				
$.01048, .01152, .01336, .01593, .01920, .02381, .03014, .04000, .08000, .16000, .32000, 1.0000$				

---

nonzero values of cdo in FltState supersede calculated cdmean				
---	--	--	--	--

---

MODEL_stall	int	+	Stall model $c_{dstall}$ (0 none)	1
		+	$C_T/\sigma$ at stall ( $\Delta_s =  C_T/\sigma  - (f_s/f_\alpha f_{off})(C_T/\sigma)_s, \Delta c_d = d_{s1}\Delta_s^{X_{s1}} + d_{s2}\Delta_s^{X_{s2}}$ )	
nstall	int	+	number of points (maximum 20)	10
mu_stall(20)	real	+	advance ratio $V/V_{tip}$	
CTs_stall(20)	real	+	$(C_T/\sigma)_s$	
fstall	real	+	constant $f_s$ in stall drag increment	1.0
dstall1	real	+	factor $d_{s1}$ in stall drag increment	2.
dstall2	real	+	factor $d_{s2}$ in stall drag increment	40.
Xstall1	real	+	exponent $X_{s1}$ in stall drag increment	2.0
Xstall2	real	+	exponent $X_{s2}$ in stall drag increment	3.0
		+	variation with lift offset	
do1	real	+	coefficient $d_{o1}$ for $f_{off}$	0.
do2	real	+	factor $d_{o2}$ for $f_{off}$	8.
dsa	real	+	variation with rotor drag $d_{s\alpha}$	0.

---

default used if CTs_stall(1)=0.				
default CTs_stall = 0.17, 0.16, 0.15, 0.14, 0.13, 0.12, 0.11, 0.10, 0.10, 0.10				
default mu_stall = 0.00, 0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.80				

---

MODEL_comp	int	+	Compressibility model $c_{dcomp}$ (0 none, 1 drag divergence, 2 similarity, 3 tip Mach number)	1
MODEL_comp_ff	int	+	compressibility increment (0 only used for hover or axial flight)	1

		+ similarity model	
fSim	real	+ factor $f$	1.0
thick_tip	real	+ blade tip thickness-to-chord ratio $\tau$	0.08
		+ drag divergence model ( $\Delta_m = M_{at} - M_{dd}$ , $\Delta c_d = d_{m1}\Delta_m + d_{m2}\Delta_m^{X_m}$ )	
dm1	real	+ coefficient $d_{m1}$ in drag increment	0.056
dm2	real	+ coefficient $d_{m2}$ in drag increment	0.416
Xm	real	+ exponent $X_m$ in drag increment	2.0
		+ drag divergence Mach number ( $M_{dd} = M_{dd0} - M_{ddcl} c_\ell$ )	
Mdd0	real	+ $M_{dd0}$ at zero lift	0.88
Mddcl	real	+ derivative with lift $\kappa = \partial M_{dd} / \partial c_\ell$	0.16
		+ tip Mach number model	
dmt	real	+ coefficient $d_{mt}$	
Mtip_limit	real	+ tip Mach number limit $M_{tiplimit}$	
CT_limit	real	+ thrust coefficient limit $C_T^{\text{limit}}$	
Mtip_ref	real	+ reference tip Mach number $M_{tipref}$	
MODEL_propeff	int	+ Propulsive force efficiency (0 none)	0
DoQ_ref	real	+ reference propulsive force $(D/q)_{\text{ref}}$	
nCTs_eff	int	+ number of blade loading values (maximum 20)	
nV_eff	int	+ number of rotor velocity values (maximum 20)	
CTs_eff(20)	real	+ blade loading $C_T/\sigma$	
V_eff(20)	real	+ rotor velocity $V/V_{\text{tip}}$	
propeff(20,20)	real	+ efficiency for propulsive force increment $\eta(C_T/\sigma, V/V_{\text{tip}})$	

---

propeff: efficiency  $\eta$  gives  $\Delta P_o = V \Delta D (1/\eta - 1)$

DoQ\_ref corresponds to baseline profile and induced power models  
intended for use with table model for power at baseline propulsive force

---

## Chapter 49

**Structure: PRotorTab**

Variable	Type	Description	Default
MODEL_indTab	int	+ Performance, Table Method + induced power model (0 standard, 1 table, 2 table with equations)	1
nvar_ind	int	+ number independent variables (1 to 3)	0
var_ind(3)	c*12	+ variables	,
nv_ind(3)	int	+ number of variable values (maximum ntablemax)	0
v_ind(ntablemax,3)	real	+ independent variable	
MODEL_proTab	int	+ profile power model (0 standard, 1 table, 2 table with equations)	1
KIND_proTab	int	+ profile power model (0 standard, 1 table $c_{d\text{mean}}$ , 2 table $c_{d\text{mean}}F = 8C_{Po}/\sigma$ )	1
nvar_pro	int	+ number independent variables (1 to 3)	0
var_pro(3)	c*12	+ variables	,
nv_pro(3)	int	+ number of variable values (maximum ntablemax)	0
v_pro(ntablemax,3)	real	+ independent variable	
MODEL_geTab	int	+ ground effect model (0 inflow, 1 table thrust, 2 table power) + table	0
Ki(ntablemax,ntablemax,ntablemax)	real	+ induced power factor $\kappa$	
cdo(ntablemax,ntablemax,ntablemax)	real	+ profile power mean $c_d$	
ivar_ind(3)	int	Derived induced power variables (tablevar_V, Vh, mu, muz, alpha, muTPP, muzTPP, alphaTPP, CTs, Mx, Mtip, Mat)	
ivar_pro(3)	int	profile power variables (tablevar_V, Vh, mu, muz, alpha, muTPP, muzTPP, alphaTPP, CTs, Mx, Mtip, Mat)	

independent variables: var\_ind and var\_pro

'V': flight speed  $V/V_{tip}$

'Vh': horizontal speed  $V_h/V_{tip}$

'mu', 'muHP': edgewise advance ratio  $\mu$  (hub plane)

'muz', 'muzHP': axial velocity ratio  $\mu_z$  (hub plane)

'alpha', 'alphaHP': shaft angle-of-attack  $\alpha = \tan^{-1}(\mu_z/\mu)$  (hub plane)  
'muTPP': edgewise advance ratio  $\mu$  (tip-path plane)  
'muzTPP': axial velocity ratio  $\mu_z$  (tip-path plane)  
'alphaTPP': shaft angle-of-attack  $\alpha = \tan^{-1}(\mu_z/\mu)$  (tip-path plane)  
'CTs', 'CT/s': blade loading  $C_T/\sigma$   
'Mx', 'offset': lift offset  $M_x/TR$   
'Mtip': tip Mach number  $M_{tip}$   
'Mat': advancing tip Mach number  $M_{at}$

MODEL\_geTab: ground effect included in inflow, or table power evaluated at thrust decreased by  $\kappa_g$ , or table power decreased by  $f_g$

MODEL\_download $\geq 2$ : table induced and profile power evaluated at thrust increased by  $f_{DL} = 1/(1 - \Delta T/T)$

nonzero values of Ki and/or cdo in FltState supersede table (or table with equations) values

---

## Chapter 50

**Structure: DRotor**

Variable	Type	Description	Default
		+ Rotor Drag, Standard Model	
		+ forward flight drag	
SET_Dhub	int	+ hub drag specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ ; 3 scaled, squared-cubed; 4 scaled, square-root)	2
DoQ_hub	real	+ area $(D/q)_{\text{hub}}$	
CD_hub	real	+ coefficient $C_{D_{\text{hub}}}$ (based on rotor area, $D/q = SC_D$ )	0.0024
kDrag_hub	real	+ $k = (D/q)/(W/1000)^{2/3}$ or $(D/q)/W^{1/2}$ (Units_Dscale)	0.8
SET_Dpylon	int	+ pylon drag specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQ_pylon	real	+ area $(D/q)_{\text{pylon}}$	
CD_pylon	real	+ coefficient $C_{D_{\text{pylon}}}$ (based on pylon wetted area, $D/q = SC_D$ )	0.
SET_Dduct	int	+ duct drag specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQ_duct	real	+ area $(D/q)_{\text{duct}}$	
CD_duct	real	+ coefficient $C_{D_{\text{duct}}}$ (based on duct wetted area, $D/q = SC_D$ )	0.
SET_Dspin	int	+ spinner drag specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	1
DoQ_spin	real	+ area $(D/q)_{\text{spin}}$	0.
CD_spin	real	+ coefficient $C_{D_{\text{spin}}}$ (based on spinner wetted area, $D/q = SC_D$ )	0.
		+ vertical drag	
SET_Vhub	int	+ hub drag specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQV_hub	real	+ area $(D/q)_{V_{\text{hub}}}$	
CDV_hub	real	+ coefficient $C_{D_{V_{\text{hub}}}}$ (based on rotor area, $D/q = SC_D$ )	0.
SET_Vpylon	int	+ pylon drag specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQV_pylon	real	+ area $(D/q)_{V_{\text{pylon}}}$	
CDV_pylon	real	+ coefficient $C_{D_{V_{\text{pylon}}}}$ (based on pylon wetted area, $D/q = SC_D$ )	0.
SET_Vduct	int	+ duct drag specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQV_duct	real	+ area $(D/q)_{V_{\text{duct}}}$	
CDV_duct	real	+ coefficient $C_{D_{V_{\text{duct}}}}$ (based on duct wetted area, $D/q = SC_D$ )	0.
		+ transition from forward flight drag to vertical drag	
MODEL_Dhub	int	+ hub drag model (0 none, 1 general, 2 quadratic)	2
MODEL_Dpylon	int	+ pylon drag model (0 none, 1 general, 2 quadratic)	2

MODEL_Dduct	int	+	duct drag model (0 none, 1 general, 2 quadratic)	2
X_hub	real	+	hub drag, transition exponent $X_d$	2.
X_pylon	real	+	pylon drag, transition exponent $X_d$	2.
X_duct	real	+	duct drag, transition exponent $X_d$	2.
Xh	real		hub drag, transition exponent $X_d$ (derived)	
Xp	real		pylon drag, transition exponent $X_d$ (derived)	
Xd	real		duct drag, transition exponent $X_d$ (derived)	

SET\_xxx: fixed (use DoQ) or scaled (use CD); other parameter calculated

component drag contributions must be consistent; pylon is rotor support, and nacelle is engine support  
 tiltrotor with tilting engines use pylon drag (and no nacelle drag), since pylon connected to rotor shaft axes  
 tiltrotor with nontilting engines: use nacelle drag as well  
 rotor with a spinner (such as on a tiltrotor aircraft) likely not have hub drag

SET\_Dhub, hub drag: use one of DoQ\_hub, CD\_hub, kDrag\_hub  
 units of kDrag are  $\text{ft}^2/\text{lb}^{2/3}$  or  $\text{m}^2/\text{Mg}^{2/3}$ ;  $\text{ft}^2/\text{lb}^{1/2}$  or  $\text{m}^2/\text{kg}^{1/2}$   
 $\text{CD} = 0.0040$  for typical hubs,  $0.0024$  for current low drag hubs,  $0.0015$  for faired hubs  
 $\text{kDrag (2/3 power)} = 1.4$  for typical hubs,  $0.8$  for current low drag hubs,  $0.5$  for faired hubs (English units)  
 $\text{kDrag (1/2 power)} = 0.074$  for single rotor helicopters,  $0.049$  for tandem helicopters,  
 $0.038$  for hingeless rotors,  $0.027$  for faired hubs (English units)  
 $W = f_W W_{MTO}$  (main rotor) or  $f_{\text{Thrust}} * T_{\text{design}}$  (antitorque or aux thrust rotor)

## Chapter 51

**Structure: IRotor**

Variable	Type	Description	Default
		+ Rotor Interference, Standard Model	
		+ model	
MODEL_develop	int	+ development along wake axis (1 step function, 2 nominal, 3 input Xdevelop)	3
Xdevelop	real	+ rate parameter $t$	0.2
MODEL_boundary	int	+ immersion in wake (1 step function, 2 always immersed, 3 input Xboundary)	3
MODEL_contract	int	+ far wake contraction (0 no, 1 yes)	1
Xboundary	real	+ boundary transition $s$ (fraction contracted radius)	0.2
MODEL_int_twin	int	+ twin rotor interference (1 no correction, 2 nominal, 3 input Ktwin)	1
Ktwin	real	+ velocity factor in overlap region $K_T$	1.4142
Nint_wing(nwingmax)	int	+ number wing span stations	6
Nint_tail(ntailmax)	int	+ number tail span stations	2
		+ interference factors $K_{int}$ (0. for no interference)	
Kint_fus	real	+ at fuselage	1.0
Kint_wing(nwingmax)	real	+ at wing	1.0
Kint_tail(ntailmax)	real	+ at tail	1.0
Kint=0 to suppress interference at component; MODEL_int=0 for no interference at all interference factor linearly transition from Kint at $V \leq V_{int\_low}$ to 0 at $V \geq V_{int\_high}$ to account for wing or tail area in wake, interference averaged at Nint points along span MODEL_develop: step function same as Xdevelop=0; nominal same as Xdevelop=1. MODEL_boundary: step function same as Xboundary=0; always immersed same as Xboundary= $\infty$ MODEL_twin: only for coaxial or tandem or side-by-side; nominal same as Ktwin= $\sqrt{2}$			

KIND_int_wing Cint_wing(nwingmax)	int real	+ Induced power interference at wing	1 0.
		+ kind (1 wing-like, 2 propeller-like)	
		+ factor $C_{\text{int}}$ (0. for no interference)	

---

For tiltrotors, typically the interference is wing-like, with  $C_{\text{int}} \cong -0.06$

---

## Chapter 52

**Structure: WRotor**

Variable	Type	Description	Default
MODEL_config	int	+ Rotor Group, NDARC Weight Model + model (1 rotor, 2 tail rotor, 3 auxiliary thrust)	1
MODEL_Wblade	int	+ blade weight model (1 AFDD82, 2 AFDD00, 3 lift offset, 4 Boeing, 5 GARTEUR, 6 Tishchenko, 7 generic)	1
MODEL_Whub	int	+ hub and hinge weight model (1 AFDD82, 2 AFDD00, 3 lift offset, 4 Boeing, 5 GARTEUR, 6 Tishchenko, 7 generic)	1
MODEL_Wshaft	int	+ inter-rotor shaft weight (0 none, 1 from lift offset, 2 from shaft length) + AFDD00 weight models	0
MODEL_type	int	+ hub weight equation depend on blade weight (for hub weight; 0 no, 1 yes)	1
KIND_rotor	int	+ rotor kind (for blade weight; 1 tilting, 2 not) + AFDD00 and AFDD82: first flapwise natural frequency $\nu$ (per-rev at hover tip speed)	2
flapfreq_blade	real	+ blade (0. to use flapfreq)	0.
flapfreq_hub	real	+ hub (0. to use flapfreq_blade) + lift offset rotor	0.
MODEL_offset	int	+ rotor tip clearance (for blade weight; 1 scaled, 2 fixed)	1
offset	real	+ design lift offset $L$ (roll moment/ $TR$ )	0.3
thick20	real	+ blade airfoil thickness-to-chord ratio $\tau_{.2R}$ (at 20%R)	0.21
clearance_tip	real	+ tip clearance, scaled $s/R$ or fixed $s$ (ft or m)	0.05
thick25	real	+ Boeing: blade airfoil thickness-to-chord ratio $\tau_{.25R}$ (at 25%R)	0.15
rattach	real	+ Boeing (blade, hub, tail rotor, aux thrust): blade attachment (fraction rotor radius) + generic blade	0.09
Kblade	real	+ factor $K_{\text{blade}}$	0.
XbldN	real	+ exponent $X_{\text{bld}N}$	0.
XbldR	real	+ exponent $X_{\text{bld}R}$	0.
Xbldc	real	+ exponent $X_{\text{bld}c}$	0.
XbldV	real	+ exponent $X_{\text{bld}V}$	0.
Xbldf	real	+ exponent $X_{\text{bld}\nu}$	0.
XbldW	real	+ exponent $X_{\text{bld}W}$	0.

	+	generic hub	
Khub	real	+	factor $K_{\text{hub}}$
XhubN	real	+	exponent $X_{\text{hub}N}$
XhubR	real	+	exponent $X_{\text{hub}R}$
XhubC	real	+	exponent $X_{\text{hub}C}$
XhubV	real	+	exponent $X_{\text{hub}V}$
XhubF	real	+	exponent $X_{\text{hub}\nu}$
XhubW	real	+	exponent $X_{\text{hub}W}$
MODEL_tr	int	+	tail rotor weight model (1 AFDD, 2 Boeing, 3 GARTEUR)
thick70	real	+	GARTEUR: blade airfoil thickness-to-chord ratio $\tau_{.7R}$ (at 70%R)
MODEL_aux	int	+	auxiliary thrust weight model (1 AFDD10, 2 AFDD82, 3 Boeing, 4 GARTEUR, 5 Torenbeek)
thrust_aux	real	+	AFDD82: design maximum thrust $T_{at}$
power_aux	real	+	AFDD10: design maximum power $P_{at}$
material_aux	real	+	AFDD10: material factor $f_m$
fWfold	real	+	blade fold weight $f_{\text{fold}}$ (fraction total blade weight)
fWsupt	real	+	rotor support structure weight (fraction maximum takeoff weight)
Usupt	real	+	rotor support weight per length $U_{\text{supt}}$ (lb/ft or kg/m)
fshaft	real	+	rotor shaft length (fraction rotor radius) $f_{\text{shaft}}$
Ushaft	real	+	rotor shaft weight per length $U_{\text{shaft}}$ (lb/ft or kg/m)
Uduct	real	+	duct weight per area $U_{\text{duct}}$ (lb/ft <sup>2</sup> or kg/m <sup>2</sup> )

---

MODEL\_config: tail rotor and auxiliary thrust models use only rotor, support, and duct weights (not shaft, fold, or separate blade and hub weights)

duct weight only used for ducted fan configuration

for teetering and gimbaled rotors, the flap frequency `flapfreq_blade` should be the coning frequency

The AFDD00 hub weight equation using the calculated blade weight (MODEL\_type = 0) results in a lower average error, and best represents legacy rotor systems.

Using the actual actual blade weight (MODEL\_type = 1) is best for advanced technology rotors with blades lighter than trend.

if `thrust_aux` ≠ 0, supersedes design maximum thrust of rotor from sizing task

if `power_aux` ≠ 0, supersedes design maximum power of rotor from sizing task

material\_aux=1 for composite construction, 1.20 for wood, 1.31 for aluminum spar, 1.44 for aluminum construction  
default  $\Omega_{prop}$  is the reference rotor speed

typically fWfold = 0.04 for manual fold, 0.28 for automatic fold

rotor support structure weight must be consistent with engine support and pylon support weights of engine section

---

WtParam\_rotor(8)      real      + Custom Weight Model  
                          + parameters      0.

## Chapter 53

**Structure: Wing**

Variable	Type	Description	Default
title	c*100	+ Wing + title	
notes	c*1000	+ notes	
kWing	int	wing number	
		+ Geometry	
wingload	real	+ wing loading $W/S = f_W W_D/S$	
fDGW	real	+ fraction DGW $f_W$ (for wing loading)	1.0
area	real	+ area $S$	
span	real	+ span $b$	
chord	real	+ chord $c$	
AspectRatio	real	+ aspect ratio $AR$	
		wing parameters: for each wing; input two quantities, other two derived (SizeParam input) SET_wing = input two of ('area' or wing loading 'WL'), ('span' or 'ratio' or 'radius' or 'width' or 'hub' or 'panel'), 'chord', aspect ratio 'aspect' SET_wing = 'ratio+XX' to calculate span from span of another wing SET_wing = 'radius+XX' to calculate span from rotor radius SET_wing = 'width+XX' to calculate span from rotor radius, fuselage width, and clearance (tiltrotor) SET_wing = 'hub+XX' to calculate span from rotor hub position (tiltrotor) SET_wing = 'panel+XX' to calculate span from wing panel widths if wing sized from wing loading (SET_wing='WL+xx'), area = fDGW*DGW/wingload	
nRotorOnWing	int	+ Geometry + rotors	0
RotorOnWing(nrotormax)	int	+ number of rotors mounted on wing + rotor numbers	

fSpan	real	+ span calculation	
otherWing	int	+ ratio wing span to span of other wing, or to rotor radius	1.0
RotorForSpan	int	+ other wing number	0
RotorOnPanel(npanelmax)	int	+ rotor number for span (if nRotorOnWing=0)	0
thick	real	+ rotor at wing panel edge	.23
fWidth_box	real	+ thickness ratio $\tau_w$	
		+ wing torque box chord $w_{tb}$ (fraction wing chord)	0.45

RotorOnWing required for SET\_wing = 'radius' or 'width' or 'hub'; MODEL\_wing = tiltrotor; SET\_Vdrag = airfoil  $c_{d90}$

RotorOnPanel required for SET\_panel = 'radius' or 'width' or 'hub'

SET\_wing = 'radius' gets radius from RotorOnWing or RotorForSpan

taper, sweep, thickness used by weight equations

taper and sweep calculated for entire wing from wing panel geometry

fWidth\_box used by tiltrotor weight equations

thick and fWidth\_box used for fuel in wing

twist	real	+ Geometry (for graphics)	
		+ twist	0.
		Geometry (derived)	
taper	real	+ taper ratio	
sweep	real	+ sweep (+ aft, deg)	
dihedral	real	+ dihedral (+ up, deg)	
MAC	real	+ mean aerodynamic chord $\bar{c}_A$	
xAC	real	+ mean aerodynamic center chordwise offset from root aero center $\bar{x}_A$ (+ aft)	
zAC	real	+ mean aerodynamic center vertical offset from root aero center $\bar{z}_A$ (+ up)	
		+ Geometry	
loc_wing	Location	+ aerodynamic center location	
nPanel	int	+ number of wing panels (maximum npanelmax)	1
KIND_AOffset	int	+ aero center offset (1 fixed, 2 fraction root chord, 3 fraction inboard chord)	1
		+ Wing Panels	
SET_panel(npanelmax)	c*24	+ panel parameters	'span+taper'
span_panel(npanelmax)	real	+ span (one side), $b_p$	

area_panel(npanelmax)	real	+	area (both sides), $S_p$	
chord_panel(npanelmax)	real	+	mean chord, $c_p$	
fspan_panel(npanelmax)	real	+	ratio span to wing span (one side), $b_p/(b/2)$	1.
farea_panel(npanelmax)	real	+	ratio area to wing area (both sides), $S_p/S$	1.
fchord_panel(npanelmax)	real	+	ratio mean chord to wing chord, $c_p/c$	1.
		+	panel edges	
edge_panel(npanelmax)	real	+	outboard edge, $y_E$	
fedge_panel(npanelmax)	real	+	outboard edge, $\eta_E = y/(b/2)$	1.
lambdaI(npanelmax)	real	+	inboard chord ratio, $c_I/c_{ref}$	1.
lambdaO(npanelmax)	real	+	outboard chord ratio, $c_O/c_{ref}$	1.
		+	aerodynamic center locus	
sweep_panel(npanelmax)	real	+	sweep $\Lambda_p$ (deg, + aft)	0.
dihedral_panel(npanelmax)	real	+	dihedral $\delta_p$ (deg, + up)	0.
dxAC_panel(npanelmax)	real	+	chordwise offset at panel inboard edge $x_{Ip}$ (+ aft)	0.
dzAC_panel(npanelmax)	real	+	vertical offset at panel inboard edge $z_{Ip}$ (+ up)	0.
		+	control surfaces	
fchord_flap(npanelmax)	real	+	flap chord $\ell_F = c_F/c_p$ (fraction panel chord)	0.25
fchord_flaperon(npanelmax)	real	+	flaperon/aileron chord $\ell_f = c_f/c_p$ (fraction panel chord)	0.25
fspan_flap(npanelmax)	real	+	flap span $f_b = b_F/b_p$ (fraction panel span)	0.5
fspan_flaperon(npanelmax)	real	+	flaperon/aileron span $f_b = b_f/b_p$ (fraction panel span)	0.5
fAC_aileron(npanelmax)	real	+	aileron aerodynamic center lateral position $y$	0.7

---

wing panels: SET\_panel not required with only one panel

SET\_panel: specify consistent definition of panels (span, edge, area, chord)

panel span: 'span' or 'bratio', else free

'span' = input span\_panel,  $b_p$

'bratio' = input ratio to wing span, fspan\_panel,  $b_p/(b/2)$

panel outboard edge: 'edge', 'station', 'width', 'hub', or 'adjust' (not used for tip panel)

'edge' = input edge\_panel,  $y_E$

'station' = input fraction wing semispan fedge\_panel,  $\eta_E = y/(b/2)$

'radius' = from rotor radius

'width' = from rotor radius, fuselage width, and clearance (tiltrotor)

'hub' = from rotor hub position (tiltrotor)

'adjust' = from adjacent input panel span or span ratio

panel area or chord: 'area', 'Sratio', 'chord', 'cratio', 'taper', else free  
 'area' = input area\_panel,  $S_p$   
 'Sratio' = input ratio to wing area, farea\_panel,  $S_p/S$   
 'chord' = input chord\_panel,  $c_p$   
 'cratio' = input ratio to wing chord, fchord\_panel,  $c_p/c$   
 'taper' = from chord ratios lambdaL and lambdaO

require consistent definition of panel spans and outboard edges, and consistent with SET\_wing  
 all edges known (from input edge or station, or from adjacent panel span or span ratio)  
 resulting edges unique and sequential  
 if wing span calculated from panel widths:  
 one and only one input panel span or span ratio that not used to define edge  
 if known span: no input panel span or span ratio that not used to define edge  
 panel area or chord:  
 if one or more taper (and no free), calculate  $c_{ref}$  from wing area  
 if one (and only one) free, calculate  $S_p$  from wing area

fAC\_aileron: from panel inboard edge, fraction panel span  
 for nPanel=1, from centerline and fraction wing semispan

---

Derived geometry	
iSET_panel_span(npanelmax)	int
iSET_panel_edge(npanelmax)	int
iSET_panel_area(npanelmax)	int
kind_area	int
chordL(npanelmax)	real
chordO(npanelmax)	real
eAC_aileron(npanelmax)	real
rArea_flap(npanelmax)	real
rArea_flaperon(npanelmax)	real
Ktef_flap(4,npanelmax)	real
Ktef_flaperon(4,npanelmax)	real
rArea_Wflap	real
rArea_Wflaperon	real
isConsistent	int
	span (SET_panel_span, bratio, free)
	edge (SET_panel_edge, station, radius, width, hub, adjust)
	area (SET_panel_area, Sratio, chord, cratio, taper, free)
	kind area and chord solution (1 tapered panels, 2 free panel)
	inboard chord $c_{Ip}$
	outboard chord $c_{Op}$
	aileron aerodynamic center lateral position $y$ (from centerline, fraction wing semispan)
	flap area/panel area
	flaperon-aileron area/panel area
	trailing edge flap factors ( $L_f, X_f, M_f, D_f$ )
	trailing edge flap factors ( $L_f, X_f, M_f, D_f$ )
	total flap area/wing area
	total flaperon-aileron area/wing area
	consistent geometry (0 if calculated geometry not consistent)

		+ Wing Extensions	
SET_ext	int	+ extension (0 for none)	0
kPanel_ext	int	+ wing panel number	2
KIT_ext	int	+ wing extension as kit (0 not kit)	0
areaX	real	extension area $S_X$ (both sides)	
spanX	real	extension span $b_X$ (one side)	
areal	real	inboard area ( $S - S_X$ )	
spanl	real	inboard span ( $b - 2b_X$ )	
area_flapl	real	inboard flap area	
area_flaperonl	real	inboard flaperon-aileron area	
AspectRatiol	real	inboard wing aspect ratio	
sweepl	real	inboard wing sweep	
taperl	real	inboard wing taper	
		+ Wing Kit	
KIT_wing	int	+ wing as kit (0 not, 1 kit, 2 kit as fixed useful load)	0
fWkit	real	+ kit weight (fraction total wing weight)	0.
		+ Controls (each panel)	
		+ kind deflection	
KIND_flap(npanelmax)	int	+ flap (1 fraction root flap; 2 increment relative root flap; 3 independent)	3
KIND_aileron(npanelmax)	int	+ aileron (1 fraction root aileron; 2 increment relative root aileron; 3 independent)	3
KIND_incid(npanelmax)	int	+ incidence (1 fraction root incidence; 2 increment relative root incidence; 3 independent)	3
KIND_flaperon(npanelmax)	int	+ kind flaperon deflection (1 fraction flap; 2 increment relative flap; 3 independent)	1
		+ flap $\delta_{Fp}$	
INPUT_flap(npanelmax)	int	+ connection to aircraft controls (0 none, 1 input $T$ matrix)	1
T_flap(ncontmax,nstatemax,npanelmax)	real	+ control matrix	
nVflap(npanelmax)	int	+ number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
flap(nvelmax,npanelmax)	real	+ values	
Vflap(nvelmax,npanelmax)	real	+ speeds (CAS or TAS)	

INPUT_flaperon(npanelmax)	int	+	flaperon $\delta_{fp}$	
T_flaperon(ncontmax,nstatemax,npanelmax)			connection to aircraft controls (0 none, 1 input $T$ matrix)	1
	real	+	control matrix	
nVflaperon(npanelmax)	int	+	number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
flaperon(nvelmax,npanelmax)		real	values	
Vflaperon(nvelmax,npanelmax)		real	speeds (CAS or TAS)	
		+	aileron $\delta_{ap}$	
INPUT_aileron(npanelmax)	int	+	connection to aircraft controls (0 none, 1 input $T$ matrix)	1
T_aileron(ncontmax,nstatemax,npanelmax)			control matrix	
	real	+	number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
nVaileron(npanelmax)	int	+	values	
aileron(nvelmax,npanelmax)	real	+	speeds (CAS or TAS)	
Vaileron(nvelmax,npanelmax)		real	incidence $i_p$	
		+	connection to aircraft controls (0 none, 1 input $T$ matrix)	1
INPUT_incid(npanelmax)	int	+	control matrix	
T_incid(ncontmax,nstatemax,npanelmax)			number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
	real	+	values	
nVincid(npanelmax)	int	+	speeds (CAS or TAS)	
incid(nvelmax,npanelmax)	real	+		
Vincid(nvelmax,npanelmax)	real	+		

---

aircraft controls connected to individual controls of component,  $c = Tc_{AC} + c_0$

for each component control, define matrix  $T$  (for each control state) and value  $c_0$

flight state specifies control state, or that control state obtained from conversion schedule

$c_0$  can be zero, constant, or function of flight speed (CAS or TAS, piecewise linear input)

by connecting aircraft control to comp control, flight state can specify comp control value

initial values if control is connected to trim variable; otherwise fixed for flight state

---

	+ Trim Target
	+ wing lift
nVlift	int + number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)
Klift(nvelmax)	real + target
Vlift(nvelmax)	real + speeds (CAS or TAS)

---

target definition determined by Aircraft%trim\_quant  
Klift can be fraction total aircraft lift, lift, or  $C_L$

---

MODEL_aero	+ Aerodynamics	
Idrag	int + model (0 none, 1 standard)	1
AWing	real + incidence angle $i$ for helicopter nominal drag (deg; 0 for not tilt)	0.
	AWing standard model	
	Derived drag	
DoQC_wing	real wing cruise drag, area $(D/q)_{wing}$	
DoQH_wing	real wing helicopter drag, area $(D/q)_{wing}$	
DoQV_wing	real wing vertical drag, area $(D/q)_{wing}$	
DoQ_wb	real wing-body interference drag, area $(D/q)_{wb}$	
Swet	real total wetted area $S_{wet}$	
	+ Weight	
Weight	Weight weight statement (component)	
	+ wing group	
MODEL_weight	int + model (0 input, 1 NDARC, 2 custom)	1
	+ weight increment	
dWprim	real + wing primary structure	0.
dWext	real + wing extension	0.
dWfair	real + fairing	0.
dWfit	real + fittings	0.
dWflap	real + flaps and control surfaces	0.
dWwfold	real + wing fold	0.
dWefold	real + wing extension fold	0.

WWing	WWing	NDARC model (except tiltrotor)	
WWingTR	WWingTR	NDARC tiltrotor model	
	+	tiltrotor model	
xWtip	real	+ increment for weight on wing tips	0.
Wwing_total	real	wing weight	
Wwing_ext	real	wing extension weight	
Wwing_kit	real	wing kit weight	
Wtip_total	real	weight on wing tips	
	+	Technology Factors	
TECH_prim	real	+ wing primary structure (torque box) weight $\chi_{\text{prim}}$	1.0
TECH_ext	real	+ wing extension weight $\chi_{\text{ext}}$	1.0
TECH_fair	real	+ fairing weight $\chi_{\text{fair}}$	1.0
TECH_fit	real	+ fittings weight $\chi_{\text{fit}}$	1.0
TECH_flap	real	+ flaps and control surfaces weight $\chi_{\text{flap}}$	1.0
TECH_wfold	real	+ wing fold weight $\chi_{\text{fold}}$	1.0
TECH_efold	real	+ wing extension fold weight $\chi_{\text{efold}}$	1.0

---

weight model result multiplied by technology factor and increment added:

$W_{xx} = \text{TECH}_{xx} * W_{xx\_model} + dW_{xx}$ ; for fixed (input) weight use MODEL\_xx=0 or TECH\_xx=0.

tiltrotor model requires weight on wing tips: both sides; calculated as sum of

rotor group, engine section or nacelle group, air induction group,

engine system, drive system (less drive shaft), rotary wing and conversion flight controls,

hydraulic group, trapped fluids, wing tip extensions

xWtip adjusts Wtip\_total, without changing weight statements

negative increment required when engine and transmission not at tip location with rotor

---

## Chapter 54

**Structure: AWing**

Variable	Type	Description	Default
AoA_zl	real	+ Wing Aerodynamics, Standard Model + zero lift angle of attack $\alpha_{zl}$ (deg)	0.
CLmax	real	+ maximum lift coefficient $C_{L\max}$	1.5
SET_compress	int	+ compressibility correction (0 none, 1 lift, 2 drag, 3 both) + lift	0
SET_lift	int	+ specification (2 2D $dC_L/d\alpha$ ; 3 3D $dC_L/d\alpha$ )	2
dCLda	real	+ lift curve slope $C_{L\alpha} = dC_L/d\alpha$ (per rad)	5.73
Tind	real	+ lift curve slope non-elliptical loading correction $\tau$	0.25
Eind	real	+ Oswald or span efficiency $e$ ( $C_{Di} = (C_L - C_{L0})^2/(\pi e AR)$ )	0.8
CL_Dmin	real	+ lift coefficient for minimum induced drag $C_{L0}$	0.
dCLda3D	real	+ incompressible 3D lift curve slope $C_{L\alpha}$ (derived)	
fDind	real	+ $1/(\pi e AR)$	
AoA_max	real	+ $\alpha_{\max} = C_{L\max}/(dC_L/d\alpha_{3D})$ (deg)	
eta0	real	+ control effectiveness factor $\eta_0, \eta_0 - \eta_1 \delta $	0.85
eta1	real	+ control effectiveness factor $\eta_1, \eta_1 - \eta_0 \delta $	0.43
Mdiv	real	+ lift-divergence Mach number $M_{div}$	0.75
CMac	real	+ pitch moment + pitch moment coefficient about aerodynamic center $C_{Mac}$	0.
SET_drag	int	+ Wing Drag, Standard Model + forward flight drag + specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQ	real	+ area $(D/q)_0$	
CD	real	+ coefficient $C_{D0}$ (based on wing area, $D/q = SC_D$ ) + vertical drag	0.012
SET_Vdrag	int	+ specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ ; 3 airfoil $c_{d90}$ )	2
DoQV	real	+ area $(D/q)_V$	
CDV	real	+ coefficient, $C_{DV}$ (based on wing area, $D/q = SC_D$ )	2.

cd90	real	+	airfoil drag coefficient $c_{d90}$ (-90 deg)	1.4
fd90	real	+	airfoil drag coefficient flap effectiveness factor $f_{d90}$	2.5
CDcc	real	+	compressibility drag increment $C_{Dcc}$ at $M_{cc}$	0.0011
Mcc0	real	+	critical Mach number constant $M_{cc0}$	0.74
Mcc1	real	+	critical Mach number constant $M_{cc1}$	0.31

---

SET\_xxx: fixed (use DoQ) or scaled (use CD); other parameter calculated

---

MODEL_drag	int	+	drag variation with angle of attack model (0 none, 1 general, 2 quadratic) $\Delta C_D = C_{D0} K_d  \alpha_e ^{X_d}$	2
AoA_Dmin	real	+	angle of attack for wing minimum drag $\alpha_{D\min}$ (deg)	0.
Kdrag	real	+	drag increment $K_d$	0.
Xdrag	real	+	drag increment $X_d$	2.
MODEL_sep	int	+	separated flow model (0 none, 1 general, 2 quadratic, 3 cubic) $\Delta C_D = C_{D0} K_s ( \alpha_e  - \alpha_s)^{X_s}$	3
AoA_sep	real	+	angle of attack for separation $\alpha_s$ (deg)	10.
Ksep	real	+	drag increment $K_s$	0.
Xsep	real	+	drag increment $X_s$	2.
Xd	real		drag exponent $X_d$ (derived)	
Xs	real		drag exponent $X_s$ (derived)	
AoA_tran	real	+	transition from forward flight drag to vertical drag angle of attack for transition $\alpha_t$ (deg)	25.

---

Conventionally the Oswald efficiency  $e$  represents the wing parasite drag variation with lift, as well as the induced drag. If  $C_{Dp}$  varies with angle-of-attack, then  $e$  is just the span efficiency factor for the induced power (and  $C_{L0}$  should be zero).

---

SET_wb	int	+	wing-body interference drag specification (1 fixed, $D/q$ 2 scaled, $C_D$ )	1
DoQ_wb	real	+	area $(D/q)_{wb}$	0.
CD_wb	real	+	coefficient $C_{Dwb}$ (based on wing area, $D/q = SC_D$ )	0.

Etail(ntailmax)	real	+ Interference velocity	
Kint_wing(nwingmax)	real	+ angle of attack change at tail, $E = d\epsilon/d\alpha$ (rad/rad)	0.
		+ interference factor $K_{int}$ at other wings (0. for no interference)	0.
		+ interference power factor $K_{int}$ at rotors (0. for no interference)	
Kintn_rotor(nrotormax)	real	+ normal (helicopter)	0.
Kintp_rotor(nrotormax)	real	+ inplane (propeller)	0.

---

for tandem wings, typically

Kint\_wing(aftwing)=2. for front-on-aft interference

Kint\_wing(frontwing)=0. for aft-on-front interference

for biplane wings, typically Kint\_wing(otherwing)=0.7

with mutual interference (as for biplane), require trim or other iteration for convergence

---

interference power: inplane (propeller) factor Kintp\_rotor negative for favorable

---

## Chapter 55

**Structure: WWing**

Variable	Type	Description	Default
MODEL_wing	int	+ Wing Group, NDARC Weight Model + model (1 area, 2 parametric, 3 tiltrotor, 4 other)	2
MODEL_other	int	+ model (1 Boeing, 2 GARTEUR, Torenbeek (3 light, 4 transport), Raymer (5 transport, 6 general aviation))	
fLift	real	+ lift factor	1.0
bFold	real	+ parametric method: fraction wing span that folds $b_{fold}$ (0 to 1)	0.
wfus	real	+ Boeing: maximum fuselage width (fraction wing span)	
Vdive	real	+ Boeing or Raymer: design dive speed $V_{dive}$ (knots)	200.
rflaplift	real	+ GARTEUR: ratio maximum lift with and without flaps + area method	
Uprim	real	+ weight per area $U_{prim}$ , wing primary structure (lb/ft <sup>2</sup> or kg/m <sup>2</sup> )	5.
Uext	real	+ weight per area $U_{ext}$ , wing extension (lb/ft <sup>2</sup> or kg/m <sup>2</sup> )	3.
		+ weight factors (fraction total wing weight)	
fWfair	real	+ fairing $f_{fair}$	0.10
fWfit	real	+ fittings $f_{fit}$	0.12
fWflap	real	+ flaps and control surfaces $f_{flap}$	0.10
fWfold	real	+ wing fold $f_{fold}$	0.
fWefold	real	+ wing extension fold $f_{efold}$ (fraction wing extension weight)	0.
		+ Custom Weight Model	
WtParam_wing(8)	real	+ parameters	0.

## Chapter 56

**Structure: WWingTR**

Variable	Type	Description	Default
		+ Wing Group, NDARC Tiltrotor Weight Model	
		+ jump takeoff condition	
CTs_jump	real	+ rotor maximum blade loading $C_T/\sigma$	0.20
n_jump	real	+ load factor $n_{jump}$ at SDGW	2.0
Vtip_jump	real	+ rotor tip speed (0. to use hover $V_{tip}$ )	750.0
thickTR	real	+ wing airfoil thickness-to-chord ratio $\tau_w$	0.23
		+ width of wing structural attachments to body	
SET_Attach	int	+ definition (0 input wAttach, 1 fraction fuselage width, 2 fraction wing span)	1
fAttach	real	+ fraction width $w_{attach}/w_{fus}$	1.
wAttach	real	+ width $w_{attach}$ (ft or m)	0.
fRG_pylon	real	+ pylon radius of gyration $r_{pylon}/R$ (fraction rotor radius)	0.30
		+ wing mode frequencies (per rev, fraction rotor speed)	
freq_beam	real	+ beam bending frequency $\omega_B$	0.5
freq_chord	real	+ chord bending frequency $\omega_C$	0.8
freq_tors	real	+ torsion frequency $\omega_T$	0.9
SET_refrpm	int	+ reference rotor speed (0 from input Vtip_freq, 1 hover $V_{tip}$ , 2 cruise $V_{tip}$ )	0
Vtip_freq	real	+ rotor tip speed	600.
MODEL_form	int	+ form factors (1 calculate, 2 input)	1
form_beam	real	+ torque box beam bending $F_B$	0.6048
form_chord	real	+ torque box chord bending $F_C$	0.4874
form_tors	real	+ torque box torsion $F_T$	1.6384
form_spar	real	+ spar caps vertical/horizontal bending $F_{VH}$	0.5018
eff_spar	real	+ spar structural efficiency $e_{sp}$	0.8
eff_box	real	+ torque box structural efficiency $e_{tb}$	0.8
		+ tapered spar cap correction factors	
C_t	real	+ weight correction $C_t$ (equivalent stiffness)	0.75
C_j	real	+ weight correction $C_j$ (equivalent strength)	0.50
C_m	real	+ strength correction $C_m$ (equivalent stiffness)	1.5

E_spar	real	+ material (lb/in <sup>2</sup> , in/in, lb/in <sup>3</sup> ; or N/m <sup>2</sup> , m/m, kg/m <sup>3</sup> )	
E_box	real	+ spar modulus $E_{sp}$	10.E6
G_box	real	+ torque box modulus $E_{tb}$	10.E6
StrainU_spar	real	+ torque box shear modulus $G_{tb}$	4.0E6
StrainU_box	real	+ spar ultimate strain allowable $\epsilon_U$	0.01
density_spar	real	+ torque box ultimate strain allowable $\epsilon_U$	0.01
density_box	real	+ density spar cap $\rho_{sp}$	0.06
		+ density torque box $\rho_{tb}$	0.06
		+ weight per area (lb/ft <sup>2</sup> or kg/m <sup>2</sup> )	
Ufair	real	+ fairing $U_{fair}$	2.
Uflap	real	+ flaps and control surfaces $U_{flap}$	3.
UextTR	real	+ wing extension $U_{ext}$	3.
		+ weight factor	
fWfitTR	real	+ fittings $f_{fit}$ (fraction maximum thrust of one rotor)	0.01
fWfoldTR	real	+ wing fold $f_{fold}$ (fraction total wing weight excluding fold)	0.
fWefoldTR	real	+ wing extension fold $f_{efold}$ (fraction wing extension weight)	0.

---

jump takeoff: hover  $V_{tip}$  obtained from RotorOnWing(1) rotor

wing frequencies: reference rotor rotation speed from rotor  $V_{tip}$  and radius  
from RotorOnWing(1) rotor; hover tip speed  $V_{tip\_ref}(1)$ , cruise  $V_{tip\_cruise}$

thickTR only used for tiltrotor wing weight

---

SET\_Attach: attachment width used for both torsion stiffness and fairing area

---

WtParam_wingtr(8)	real	+ Custom Weight Model	
		+ parameters	0.

## Chapter 57

**Structure: Tail**

Variable	Type	Description	Default
title	c*100	+ Empennage + title	
notes	c*1000	+ notes	
KIND_tail	int	+ kind (1 horizontal tail, 2 vertical tail, 3 V-tail horizontal, 4 V-tail vertical)	1
isHortail	int	horizontal tail (0 vertical)	
isVtail	int	V-tail (0 not)	
kTail	int	tail number	
SET_tail	c*16	+ Geometry + specification	'vol+aspect'
area	real	+ area $S$	
span	real	+ span $b$	
chord	real	+ chord $c$	
AspectRatio	real	+ aspect ratio $AR$	
TailVol	real	+ tail volume $V$	
KIND_TailVol	int	+ tail volume reference (1 wing, 2 rotor)	2
TailVolRef	int	+ wing or rotor number for tail volume	1
otherVtail	int	+ other V-tail number	

KIND\_tail used for geometry, baseline orientation, tail volume, tail weight model

tail parameters: input two quantities, others calculated

SET\_tail = input two of ('area' or tail volume 'vol'), ('span' or aspect ratio 'aspect' or 'chord')

tail volume reference: tail volume  $V = S\ell/RA$  (tailarea \* taillength / (diskarea \* radius))

or horizontal tail volume  $V = S\ell/S_w c_w$  (tailarea \* taillength / (wingarea \* wingchord))

or vertical tail volume  $V = S\ell/S_w b_w$  (tailarea \* taillength / (wingarea \* wingspan))

V-tail: modeled as pair of horizontal and vertical tails (identified by otherVtail)

separately sized, aerodynamic loads for each; dihedral calculated, cant set to zero

weight only for second tail, based on V-tail area and aspect ratio

		+    Geometry (for graphics and weights)	
taper	real	+    taper ratio	1.0
sweep	real	+    sweep (+ aft, deg)	0.
dihedral	real	+    dihedral (deg)	0.
thick	real	+    thickness ratio	.12
		Derived geometry	
iSet_tail_area	int	area (SET_tail_area, vol)	
iSet_tail_len	int	length (SET_tail_span, AR, chord)	
Length_tail	real	tail length $\ell$	
rArea_control	real	control surface area/tail area	
Ktef_cont(4)	real	trailing edge flap factors ( $L_f, X_f, M_f, D_f$ )	
CBF(3,3)	real	tail axes relative airframe, $C^{BF}$	
areaVtail	real	V-tail area $S_V$	
spanVtail	real	V-tail span $b_V$	
AspectRatioVtail	real	V-tail aspect ratio	
		+    Geometry	
loc_tail	Location	+    aerodynamic center location	
cant	real	+    cant angle $\phi$ (deg)	0.
fchord_cont	real	+    control surface chord $c_f/c$ (fraction tail chord)	0.25
fspan_cont	real	+    control surface span $b_f/b$ (fraction tail span)	1.0
		+    Controls	
		+    elevator $\delta_e$ or rudder $\delta_r$	
INPUT_cont	int	+    connection to aircraft controls (0 none, 1 input $T$ matrix)	1
T_cont(ncontmax,nstatemax)	real	+    control matrix	
nVcont	int	+    number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
cont(nvelmax)	real	+    values	
Vcont(nvelmax)	real	+    speeds (CAS or TAS)	
		+    incidence $i$	
INPUT_incid	int	+    connection to aircraft controls (0 none, 1 input $T$ matrix)	1
T_incid(ncontmax,nstatemax)	real	+    control matrix	
nVincid	int	+    number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
incid(nvelmax)	real	+    values	
Vincid(nvelmax)	real	+    speeds (CAS or TAS)	

---

horizontal tail cant angle: + to left (vertical tail for cant = 90)  
 vertical tail cant angle: + to right (horizontal tail for cant = 90)

aircraft controls connected to individual controls of component,  $c = Tc_{AC} + c_0$   
 for each component control, define matrix  $T$  (for each control state) and value  $c_0$   
 flight state specifies control state, or that control state obtained from conversion schedule  
 $c_0$  can be zero, constant, or function of flight speed (CAS or TAS, piecewise linear input)  
 by connecting aircraft control to comp control, flight state can specify comp control value  
 initial values if control is connected to trim variable; otherwise fixed for flight state

---

		+ Aerodynamics	
MODEL_aero	int	+ model (0 none, 1 standard)	1
ATail	ATail	standard model	
		Derived drag	
DoQ_tail	real	tail drag, area $(D/q)_{tail}$	
DoQV_tail	real	tail vertical drag, area $(D/q)_{Vtail}$	
Swet	real	total wetted area	
		+ Weight	
Weight	Weight	weight statement (component)	
		+ tail (empennage group)	
MODEL_weight	int	+ model (0 input, 1 NDARC, 2 custom)	1
		+ weight increment	
dWtail	real	+ basic	0.
dWfold	real	+ fold	0.
WTail	WTail	NDARC model	
Wtail_total	real	tail weight	
		+ Technology Factors	
TECH_tail	real	+ tail weight $\chi_{ht}$ or $\chi_{vt}$	1.0
TECH_tfold	real	+ fold weight $\chi_{fold}$	1.0

---

weight model result multiplied by technology factor and increment added:

$$Wxx = TECH_xx * Wxx\_model + dWxx; \text{ for fixed (input) weight use MODEL\_xx=0 or TECH\_xx=0.}$$


---

## Chapter 58

**Structure: ATail**

Variable	Type	Description	Default
AoA_zl	real	+ Tail Aerodynamics, Standard Model + zero lift angle of attack $\alpha_{zl}$ (deg)	0.
CLmax	real	+ maximum lift coefficient $C_{L\max}$	1.
SET_compress	int	+ compressibility correction (0 none, 1 lift, 2 drag, 3 both) + lift	0
SET_lift	int	+ specification (2 2D $dC_L/d\alpha$ ; 3 3D $dC_L/d\alpha$ )	2
dCLda	real	+ lift curve slope $C_{L\alpha} = dC_L/d\alpha$ (per rad)	5.73
Tind	real	+ lift curve slope non-elliptical loading correction $\tau$	0.25
Eind	real	+ Oswald efficiency $e$ ( $C_{Di} = (C_L - C_{L0})^2/(\pi e AR)$ )	0.8
CL_Dmin	real	+ lift coefficient for minimum induced drag $C_{L0}$	0.
dCLda3D	real	+ incompressible 3D lift curve slope $C_{L\alpha}$ (derived)	
fDind	real	+ $1/(\pi e AR)$	
AoA_max	real	+ $\alpha_{\max} = C_{L\max}/(dC_L/d\alpha_{3D})$ (deg)	
eta0	real	+ control effectiveness factor $\eta_0, \eta_0 - \eta_1 \delta $	0.85
eta1	real	+ control effectiveness factor $\eta_1, \eta_1 - \eta_0 \delta $	0.43
Mdiv	real	+ lift-divergence Mach number $M_{div}$	0.75
		+ Tail Drag, Standard Model	
		+ forward flight drag	
SET_drag	int	+ specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQ	real	+ area $(D/q)_0$	
CD	real	+ coefficient $C_{D0}$ (based on tail area, $D/q = SC_D$ ) + vertical drag	0.011
SET_Vdrag	int	+ specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQV	real	+ area $(D/q)_V$	
CDV	real	+ coefficient $C_{DV}$ (based on tail area, $D/q = SC_D$ )	1.

CDcc	real	+	compressibility drag increment $C_{Dcc}$ at $M_{cc}$	0.0011
Mcc0	real	+	critical Mach number constant $M_{cc0}$	0.74
Mcc1	real	+	critical Mach number constant $M_{cc1}$	0.31

---

SET\_xxx: fixed (use DoQ) or scaled (use CD); other parameter calculated

---

MODEL_drag	int	+	drag variation with angle of attack model (0 none, 1 general, 2 quadratic) $\Delta C_D = C_{D0}K_d \alpha_e ^{X_d}$	2
AoA_Dmin	real	+	angle of attack for tail minimum drag $\alpha_{Dmin}$ (deg)	0.
Kdrag	real	+	drag increment $K_d$	0.
Xdrag	real	+	drag increment $X_d$	2.
Xd	real	+	exponent $X_d$ (derived)	
AoA_tran	real	+	transition from forward flight drag to vertical drag angle of attack for transition $\alpha_t$ (deg)	25.

## Chapter 59

**Structure: WTail**

Variable	Type	Description	Default
MODEL_tail	int	+ Tail, NDARC Weight Model + model (1 horizontal tail, 2 vertical tail, 3 based on KIND_tail) + horizontal tail	3
MODEL_Htail	int	+ model (1 helicopter or compound, 2 tiltrotor or tiltwing, 3 area, 4 other)	1
MODEL_Hother	int	+ model (1 GARTEUR, Torenbeek (2 low speed, 3 transport), Raymer (4 transport, 5 general aviation))	
KIND_Htail	int	+ Torenbeek or Raymer: kind (1 fixed, 2 variable incidence)	1
wfus	real	+ Raymer: fuselage width at horizontal tail $w_f/b_{ht}$ (fraction span) + vertical tail	0.2
MODEL_Vtail	int	+ model (1 helicopter or compound, 2 tiltrotor or tiltwing, 3 area, 4 other)	1
MODEL_Vother	int	+ model (1 GARTEUR, Torenbeek (2 low speed, 3 transport), Raymer (4 transport, 5 general aviation))	
place_AntiQ	int	+ AFDD: antitorque placement (0 none, 1 on tail boom, 2 on vertical tail)	1
KIND_Vtail	int	+ Torenbeek or Raymer: kind (1 conventional, 2 T-tail)	1
fTtail	real	+ Torenbeek: T-tail factor $(S_{ht}h_{ht})/(S_{vt}b_{vt})$	0.8
Vdive	real	+ design dive speed $V_{dive}$ (knots) + area method	200.
Utail	real	+ weight per area $U_{tail}$ (lb/ft <sup>2</sup> or kg/m <sup>2</sup> )	3.
fTfold	real	+ fold weight factor $f_{fold}$ (fraction total tail weight excluding fold)	0.
weight models can use taper ratio, sweep, and thickness ratio dive speed: $V_{max} = SLS$ max speed, $V_{dive} = 1.25V_{max}$			
WtParam_tail(8)	real	+ Custom Weight Model + parameters	0.

## Chapter 60

**Structure: FuelTank**

Variable	Type	Description	Default
		+ Fuel Tank System	
title	c*100	+ title	
notes	c*1000	+ notes	
kTank	int	tank number	
		+ Configuration	
SET_burn	int	+ fuel quantity stored and used (1 weight, 2 energy) + fuel weight properties	1
fuel_density	real	+ fuel weight per volume $\rho_{fuel}$ (lb/gallon or kg/liter)	6.5
specific_energy	real	+ fuel energy per weight $e_{fuel}$ (MJ/kg)	42.8
fFuelWing(nwingmax)	real	+ fraction wing torque box filled by fuel tanks + fuel tank sizing	1.0
Wfuel_cap	real	+ fuel capacity $W_{fuel\_cap}$ (weight, lb or kg)	
Efuel_cap	real	+ fuel capacity $E_{fuel\_cap}$ (energy, MJ)	
ffuel_cap	real	+ ratio capacity to mission fuel $f_{fuel\_cap}$	1.0
dFuel_cap	real	+ capacity increment $d_{fuel\_cap}$	0.
IDENT_battery	c*16	+ battery identification	''
		store and use weight: energy calculated from weight use Wfuel_cap, Waux_cap, fuel_density, specific_energy, fFuelWing; fWtank, fWauxtank, other weight parameters	
		store and use energy: fuel weight zero use Efuel_cap, Eaux_cap, IDENT_battery; eWtank, eWauxtank, energy_density, other weight parameters	
		fuel tank sizing: usable fuel capacity Wfuel_cap (weight) or Efuel_cap (energy) SET_tank='input': input Wfuel_cap or Efuel_cap SET_tank='miss': calculate from mission fuel used Wfuel_cap or Efuel_cap = max(ffuel_cap*(maximum mission fuel), (maximum mission fuel)+(reserve fuel))	

SET\_tank='miss+power' = calculate from mission fuel used and mission battery discharge power  
 SET\_tank='f(miss)' = function of mission fuel used  
 $W_{fuel\_cap}$  or  $E_{fuel\_cap} = d_{Fuel\_cap} + f_{Fuel\_cap} * ((\text{maximum mission fuel}) + (\text{reserve fuel}))$

---

battery identification: energy storage only, match ident of BatteryModel

---

		+ Geometry (for graphics)	
place	int	+ placement (1 internal, 2 sponson, 3 wing, 4 combination)	1
		+ Auxiliary Fuel Tank	
Mauxtanksize	int	+ number of auxiliary tank sizes (minimum 1, maximum nauxtankmax)	1
Waux_cap(nauxtankmax)	real	+ fuel capacity $W_{aux\_cap}$ (weight)	1000.
Eaux_cap(nauxtankmax)	real	+ fuel capacity $E_{aux\_cap}$ (energy)	20000.
fWauxtank(nauxtankmax)	real	+ tank weight $f_{auxtank}$ (fraction auxiliary fuel weight)	0.
eWauxtank(nauxtankmax)	real	+ tank weight $e_{auxtank}$ (MJ/kg)	0.
DoQ_auxtank(nauxtankmax)	real	+ drag $(D/q)_{auxtank}$ (each tank)	
loc_auxtank(nauxtankmax)	Location	+ location	
		+ Equipment power	
MODEL_Peq	int	+ model (0 for none)	0
sfc	real	+ specific fuel consumption	0.
Peq_0	real	+ power loss $P_{eq0}$ , constant	0.
Peq_d	real	+ power loss $P_{eqd}$ , scale with density	0.
Peq_t	real	+ power loss $P_{eqt}$ , scale with temperature	0.
KPeq_w	real	+ power loss $P_{eqw}$ , weight factor	0.
XPeq_w	real	+ power loss $P_{eqw}$ , weight exponent	0.
Peq_deice	real	+ deice power loss $P_{eqi}$	0.

---

specific fuel consumption: weight (lb/hp-hr or kg/kW-hr) or energy (MJ/hp-hr or MJ/kW-hr)

---

Derived					
Vfuel_cap	real		fuel capacity $V_{fuel\_cap}$ (volume)		
Wfuel_wing	real		wing fuel capacity $W_{fuel\_wing}$		
rWfuel_wing	real		wing fuel capacity (fraction $W_{fuel\_cap}$ )		
ncomp_in_tank	int		number of components in fuel tank system		
kBatteryModel	int		battery identification (BatteryModel, from IDENT_battery)		
specific_power	real		specific power $\pi_{tank} = x_{mbd} e_{tank} / 3.6$ (kW/kg)		
+ Weight					
Weight	Weight		weight statement (component, not including auxiliary tanks)		
MODEL_weight	int	+	fuel system (propulsion group)		
		+	model (0 input, 1 NDARC, 2 custom)		1
		+	weight increment		
dWtank	real	+	tanks and support; battery management system		0.
dWplumb	real	+	plumbing; power distribution (wiring)		0.
WTank	WTank		NDARC model		
Neng	int		number of main engines		
fuelflow	real		total fuel flow $F$ at DGW takeoff conditions (lb/hr or kg/hr)		
+ Technology Factors					
TECH_tank	real	+	fuel tank weight $\chi_{tank}$		1.0
TECH_plumb	real	+	plumbing weight $\chi_{plumb}$		1.0

---

weight model result multiplied by technology factor and increment added:

$W_{xx} = TECH_{xx} * W_{xx\_model} + dW_{xx}$ ; for fixed (input) weight use MODEL\_xx=0 or TECH\_xx=0.

---

## Chapter 61

**Structure: WTank**

Variable	Type	Description	Default
		+ Fuel System, NDARC Weight Model	
		+ weight storage	
		+ fuel tank	
MODEL_tank	int	+ model (1 fraction, 2 parametric, Torenbeek (3 integral, 4 generic), Raymer (5 transport, 6 general aviation))	2
ntank_int	int	+ number of internal tanks $N_{\text{int}}$	4
fWtank	real	+ tank weight $f_{\text{tank}}$ (fraction fuel capacity weight)	0.09
Ktoler	real	+ parametric: ballistic tolerance factor $f_{bt}$ (1.0 to 2.5)	2.5
KIND_crash	int	+ parametric: survivability (1 baseline, 2 UTTAS/AAH level of survivability)	2
Ktank	real	+ Torenbeek (generic): factor $K_{\text{tank}}$	3.2
Xtank	real	+ Torenbeek (generic): exponent $X_{\text{tank}}$	0.727
fint	real	+ Raymer: integral tank capacity (fraction total)	1.0
fprot	real	+ Raymer: protected tank capacity (fraction total)	1.0
		+ plumbing	
MODEL_plumb	int	+ model (1 fraction, 2 parametric)	2
nplumb	int	+ total number of fuel tanks (internal and auxiliary) for plumbing $N_{\text{plumb}}$	4
K0_plumb	real	+ weight increment $K_{0\text{plumb}}$ (lb)	150.
K1_plumb	real	+ weight factor $K_{1\text{plumb}}$ (lb)	2.0
fWplumb	real	+ plumbing weight $f_{\text{plumb}}$ (fraction total fuel system weight)	0.4
		+ energy storage	
eWtank	real	+ tank weight $e_{\text{tank}}$ (MJ/kg)	
energy_density	real	+ tank volume density $\rho_{\text{tank}}$ (MJ/liter)	
fBMS	real	+ battery management system (fraction basic tank weight)	0.2
fwire	real	+ power distribution (wiring) weight (fraction basic tank weight)	0.2

---

MODEL\_tank: fraction method uses fWtank; parametric method uses ntank\_int, Ktoler, KIND\_crash

K1\_plumb is a crashworthiness and survivability factor; typically K1\_plumb = 2.

K0\_plumb is the sum of weights for auxiliary fuel, in-flight refueling, pressure refueling, inerting system, etc.; typically K0\_plumb = 50 to 250 lb

---

WtParam\_tank(8)      real      + Custom Weight Model  
                          + parameters      0.

## Chapter 62

**Structure: Propulsion**

Variable	Type	Description	Default
title	c*100	+ title	
notes	c*1000	+ notes	
		propulsion group is set of components and engine groups, connected by drive system components (rotors) define power required, engine groups define power available drive system defines ratio of rotational speeds of components (relative primary rotor speed)	
kPropulsion	int	propulsion group number	
kRotor_prim	int	primary rotor	
rotor_in_group(nrotormax)	int	rotors in group (0 no, 1 main rotor, 2 other)	
nRotor	int	number of rotors in group	
nRotor_main	int	number of main rotors	
kEngine_prim	int	primary engine group	
engine_in_group(nengmax)	int	engine groups in propulsion group (0 no, 1 only produce power, 2 can consume power)	
nEngineGroup	int	number of engine groups	
firstEngineGroup	int	first engine group	
canConsumePower	int	engine group generator or compressor, can consume shaft power (0 only produce power)	
nGear	int	+ Drive system	1
STATE_gear_var	int	+ number of states (maximum ngearmax)	0
		+ drive system state for variable speed transmission (0 for none)	

---

drive system branches: one primary rotor per propulsion group (specify  $V_{tip}$ ), others dependent (specify gear ratio)  
 specify primary engine group only if no rotors in propulsion group  
 drive system state: identifies gear ratio set for multiple speed transmissions  
 state=0 to use conversion schedule, state=n (1 to nGear) to use gear ratio #n  
 variable speed transmission: for drive system state STATE\_gear\_var, gear ratio factor  $f_{gear}$  (control) included  
 when evaluate rotational speed of dependent rotors and engines

---

	+ Transmission losses	
MODEL_Xloss	int	+ model (1 fraction component power required; 2 with function drive shaft limit) 2
fPloss_xmsn	real	+ gear box loss $\ell_{xmsn}$ (fraction total component power required) 0.04
Ploss_windage	real	+ power loss due to windage $P_{windage}$ 0.
	+ Accessory losses	
Pacc_0	real	+ power loss $P_{acc0}$ , constant 0.
Pacc_d	real	+ power loss $P_{accd}$ , scale with density 0.
Pacc_n	real	+ power loss $P_{accn}$ , scale with density and rpm 0.
Pacc_deice	real	+ deice power loss $P_{acci}$ 0.
fPacc_ECU	real	+ ECU (etc.) power loss $\ell_{acc}$ (fraction component+transmission power) 0.
fPacc_IRfan	real	+ IRS fan loss $\ell_{IRfan}$ (fraction total engine power) 0.
	+ Geometry	
SET_length	int	+ drive shaft length (1 input, 2 from hub positions, 3 scale with radius) 2
Length_ds	real	+ length $\ell_{DS}$
fLength_ds	real	+ factor 0.9

---

SET\_length: input (use Length\_ds) or calculated (from fLength\_ds)

---

	+ Drive system torque limit	
Plimit_ds	real	+ drive system power limit $P_{DSlimit}$
fPlimit_ds	real	+ drive system power limit factor 1.0

		+ Drive system ratings	
nrate_ds	int	+ number of ratings (maximum nratemax)	1
rating_ds(nratemax)	c*12	+ drive system rating designation	''
frating_ds(nratemax)	real	+ torque limit factor	1.0
Vdrive_hover	real	+ maximum speed for hover and helicopter mode (CAS or TAS)	
Vdrive_cruise	real	+ minimum speed for cruise (CAS or TAS)	
rating_ds_hover	c*12	+ rating for hover and helicopter mode ( $V \leq V_{\text{drive}-\text{hover}}$ )	''
rating_ds_conv	c*12	+ rating for conversion mode ( $V_{\text{drive}-\text{hover}} < V < V_{\text{drive}-\text{cruise}}$ )	''
rating_ds_cruise	c*12	+ rating for cruise mode ( $V \geq V_{\text{drive}-\text{cruise}}$ )	''
		Derived drive system limit	
Qlimit_ds	real	drive system torque limit ( $P_{DS\text{limit}}$ at primary rotor reference speed)	
arating_ds(nratemax)	c*12	drive system rating designation	
xrating_ds(nratemax)	real	torque limit factor	
krate_ds_hover	int	rating number for hover and helicopter mode	
krate_ds_conv	int	rating number for conversion mode	
krate_ds_cruise	int	rating number for cruise mode	

drive system torque limits: SET\_limit\_ds = input (use Plimit\_xx) or calculate (from fPlimit\_xx)

SET\_limit\_ds='input': Plimit\_ds input

SET\_limit\_ds='ratio': from takeoff power,  $fPlimit_{ds} \sum(N_{\text{eng}} P_{\text{eng}})$

SET\_limit\_ds='Pav': from engine power available at transmission sizing conditions and missions (DESIGN\_xmsn)  
 $fPlimit_{ds}(\Omega_{\text{ref}}/\Omega_{\text{prim}}) \sum(N_{\text{eng}} P_{\text{av}})$

SET\_limit\_ds='Preq': from engine power required at transmission sizing conditions and missions (DESIGN\_xmsn)  
 $fPlimit_{ds}(\Omega_{\text{ref}}/\Omega_{\text{prim}}) \sum(N_{\text{eng}} P_{\text{req}})$

engine shaft: options for SET\_limit\_ds≠'input'

SET\_limit\_es=0: Plimit\_es

SET\_limit\_es=1:  $fPlimit_{es} \times (\text{engine group } P_{\text{eng}} \text{ or } P_{\text{av}} \text{ or } P_{\text{req}}, \text{ depending on SET_limit_ds})$

SET\_limit\_es=2:  $fPlimit_{es} \times P_{DS\text{limit}}(P_{\text{engEG}}/P_{\text{engPG}})$

drive system power limit: corresponds to power of all engines of propulsion group (all engine groups)

can be used for trim (trim\_quant='Q margin')

used for drive system weight, tail rotor weight, transmission losses

limits propulsion group  $P_{\text{av}}$  (if FltState%SET\_Plimit=on)

engine shaft power limit: corresponds to all engines of engine group ( $n_{\text{Engine}} \times P_{\text{Eng}}$ )

limits engine group  $P_{av}$  (if FltState%SET\_Plimit=on)

rotor shaft power limit: corresponds to one rotor

all limits

can be used for max effort in flight state (max\_quant='Q margin')

can be used for max gross weight in flight condition or mission (SET\_GW='maxQ' or 'maxPQ')

always check and print whether exceed torque limit

the engine model gives the power available, accounting for installation losses and mechanical limits

then the power available is reduced by the factor FltState%fPower

next torque limits are applied (unless FltState%SET\_Plimit=off), first engine shaft limit and then drive system limit

drive system ratings: blank to use engine ratings of first engine group

limit at flight state is  $rxP_{\text{limit}}$ , where  $r$  is the rotor speed ratio and  $x$  is the rating factor frating\_ds

if nrate\_ds ≤ 1, drive system rating not used

schedule used if FltAircraft%rating\_ds='speed'

---

	+ Control		
INPUT_DN	int	+ rotational speed increment $\Delta N$ , primary rotor or primary engine (rpm)	
T_DN(ncontmax,nstatemax)	real	+ connection to aircraft controls (0 none, 1 input $T$ matrix)	0
nVDN	int	+ control matrix	
DN(nvelmax)	real	+ number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
VDN(nvelmax)	real	+ values	
	+ speeds (CAS or TAS)		

aircraft controls connected to individual controls of component,  $c = T c_{AC} + c_0$

for each component control, define matrix  $T$  (for each control state) and value  $c_0$

flight state specifies control state, or that control state obtained from conversion schedule

$c_0$  can be zero, constant, or function of flight speed (CAS or TAS, piecewise linear input)

by connecting aircraft control to comp control, flight state can specify comp control value

initial values if control is connected to trim variable; otherwise fixed for flight state

---

		+ Weight	
Weight	Weight	weight statement (component, not including EngineGroup)	
		+ drive system (propulsion group)	
MODEL_DS	int	+ model (0 input, 1 NDARC, 2 custom)	1
		+ weight increment	
dWgb	real	+ gear box	0.
dWrS	real	+ rotor shaft	0.
dWds	real	+ drive shaft	0.
dWrB	real	+ rotor brake	0.
dWcl	real	+ clutch	0.
dWgd	real	+ gas drive	0.
WDrive	WDrive	NDARC model	
STATE_gear_wt	int	+ drive system state for weight	1
kEngineGroup_wt(2)	int	+ EngineGroup for weight (input, output)	1
Wtip	real	weight on wing tip	
Wgbrs	real	weight gear box and rotor shaft	
		+ Technology Factors	
TECH_gb	real	+ gear box weight $\chi_{gb}$	1.0
TECH_rs	real	+ rotor shaft weight $\chi_{rs}$	1.0
TECH_ds	real	+ drive shaft weight $\chi_{ds}$	1.0
TECH_rb	real	+ rotor brake weight $\chi_{rb}$	1.0
TECH_cl	real	+ clutch weight $\chi_{cl}$	1.0
TECH_gd	real	+ gas drive weight $\chi_{gd}$	1.0

---

weight model result multiplied by technology factor and increment added:

$Wxx = TECH_{xx} * Wxx\_model + dWxx$ ; for fixed (input) weight use MODEL\_xx=0 or TECH\_xx=0.

kEngineGroup\_wt: always identify engine group for drive system input

if propulsion group has rotors, primary rotor speed used for drive system output

if propulsion group does not have rotors, must identify engine group for drive system output

---

drive system weight = gear box (including rotor shaft) + drive shaft + rotor brake + clutch + gas drive  
 tiltrotor wing weight model requires weight on wing tip (drive system, without rotor shaft)

---

## Chapter 63

**Structure: WDrive**

Variable	Type	Description	Default
MODEL_gbrs	int	+ Drive System, NDARC Weight Model + gear box (including rotor shafts) model (1 AFDD83, 2 AFDD00, 3 other)	1
MODEL_other	int	+ model (1 Boeing, 2 Boeing (alternate), GARTEUR (3 helicopter, 4 tiltrotor), 5 Tishchenko, 6 generic)	
fShaft	real	+ rotor shaft weight $f_{rs}$ (fraction gear box and rotor shaft weight)	0.13
ngearbox	int	+ AFDD83: number of gear boxes $N_{gb}$	7
fTorque	real	+ AFDD83: second (main or tail) rotor rated torque $f_Q$ (fraction total drive system rated torque)	0.03
nstage	int	+ Boeing: number of stages in main-rotor drive generic gearbox	4
Kgbrs	real	+ factor $K_{gbrs}$	0.
XgbP	real	+ exponent $X_{gbP}$	0.
Xgbe	real	+ exponent $X_{gbe}$	0.
Xgbr	real	+ exponent $X_{gbr}$	0.
KIND_other	int	+ other: separate tail rotor drive weight increment (0 none)	0
Ktrgb	real	+ tail rotor drive weight increment factor $K_{trgb}$	1.0
fPower_tr	real	+ tail rotor power (fraction total drive system rated power)	0.15
gear_tr	real	+ tail rotor gear ratio	5.0
		+ drive shaft and rotor brake	
MODEL_dsrb	int	+ model (0 none, 1 AFDD82)	1
ndriveshaft	int	+ AFDD82: number of intermediate drive shafts $N_{ds}$ (excluding rotor shafts)	6
fPower	real	+ AFDD82: second (main or tail) rotor rated power $f_P$ (fraction total drive system rated power)	0.15
<hr/>			
fPower = fTorque*(otherrotor RPM)/(mainrotor RPM)			
typically fTorque=fPower=0.6 for twin main rotors (tandem, coaxial, tiltrotor)			
for single main rotor and tail rotor, fTorque = 0.03, fPower = 0.15 (0.18 for 2-bladed teeter)			
<hr/>			
typically fShaft = 0.13 (data range 0.06 to 0.20)			

WtParam\_drive(8)      real      +      Custom Weight Model  
                          +      parameters      0.

## Chapter 64

**Structure: EngineGroup**

Variable	Type	Description	Default
		+ Engine Group	
title	c*100	+ title	
notes	c*1000	+ notes	
kEngineGroup	int	engine group number	
		+ Description	
MODEL_engine	c*32	+ engine model	'RPTEM'
IDENT_engine	c*16	+ engine identification	'Engine'
IDENT_system2	c*16	+ second system identification	,
nEngine	int	+ number of engines $N_{eng}$	1
nEngine_main	int	+ number of main engines	1
Peng	real	+ engine power $P_{eng}$ (SLS static at takeoff rating, 0. for $P0_{ref}(rating\_to)$ )	0.
rating_to	c*12	+ takeoff power rating	'MCP'
rating_idle	c*12	+ idle power rating	'MCP'
kFuelTank	int	+ fuel tank system number	1
kRotor_react	int	+ rotor number for reaction drive	
		+ Propulsion Group	
kPropulsion	int	+ group number	1
KIND_xmsn	int	+ drive system branch (1 primary, 0 dependent)	0
INPUT_gear	int	+ gear ratio input (1 from Nspec, 2 gear)	1
gear/ngearmax)	real	+ engine gear ratio $r = \Omega_{spec}/\Omega_{prim}$ (ratio rpm to rpm of primary rotor in propulsion group)	1.0
		Derived	
iMODEL_engine	int	engine model (MODEL_engine_xxx)	
KIND_engine	int	engine model (MODEL_engine_RPTEM, table, recip, comp, motor)	
canConsumePower	int	can consume shaft power (0 only produce power), generator or compressor	
canProducePower	int	can produce shaft power (0 only consume power)	
isConvertReact	int	convertible engine, reaction drive (0 not)	
isConvertJet	int	convertible engine, turbojet/fan (0 not)	

kModel_eng	int	identification (EngineModel or EngineTable or RecipModel or CompressorModel or MotorModel, from IDENT_engine)
kModel_sys2	int	identification (EngineModel, from IDENT_system2)
kBattery	int	battery model, from kFuelTank (0 for none)
nrate	int	number of ratings
rating(nratermax)	c*12	rating designations (lowercase)
krateC	int	MCP rating number
krate_to	int	takeoff power rating number
WOneEng	real	weight one engine $W_{\text{one eng}}$
Nref	real	reference engine speed (at drive state #1)

## MODEL\_engine: engine model

'RPTEM', 'shaft' = turboshaft engine (RPTEM); IDENT\_engine → EngineModel; fuel is weight  
 'table' = turboshaft engine (table); IDENT\_engine → EngineTable; fuel is weight  
 'recip' = reciprocating engine; IDENT\_engine → RecipModel; fuel is weight  
 'comp' = compressor; IDENT\_engine → CompressorModel; not use fuel  
 'comp+react' = compressor for reaction drive; IDENT\_engine → CompressorModel; not use fuel  
 'motor' = electric motor; IDENT\_engine → MotorModel; fuel is energy  
 'gen' = electric generator; IDENT\_engine → MotorModel; fuel is energy (generated, not burned)  
 'motor+gen' = motor + generator (mode  $B \geq 0$  for motor); IDENT\_engine → MotorModel; fuel is energy  
 'motor+cell' = motor + fuel cell; IDENT\_engine → MotorModel; fuel is weight  
 MODEL\_engine: convertible engine; only with turboshaft  
 '+react' = reaction drive (mode  $B = 1$ ); IDENT\_system2 → EngineModel  
 '+jet', '+fan' = turbojet/turbofan (mode  $B = 1$ ); IDENT\_system2 → EngineModel

engine identification: match ident of EngineModel or EngineTable or RecipModel or CompressorModel or MotorModel

second system identification: match ident of EngineModel; not use weight

number of main engines: for fuel tank weight

for fixed engine: use  $P_{\text{eng}} = 0.$  and no size task (or engine power not sized)

takeoff power rating: for engine scaling, aircraft power loading, fuel tank weight

FltState%rating can be set to 'idle' (rating\_idle) or 'takeoff' (rating\_to)

fuel tank system identified for burn must store and use weight (turboshaft, reciprocating, fuel cell)

or energy (motor, may have BatteryModel)

fuel tank system identified for generation must store and use energy (may have BatteryModel)

drive system branch: primary engine group only designated if no rotors for propulsion group

INPUT\_gear: calculate gear from Nspec and Vtip\_ref of primary rotor of propulsion group, or specify gear ratio

variable speed transmission: for drive system state STATE\_gear\_var, gear ratio factor  $f_{gear}$  (control) included  
when evaluate rotational speed of engine

---

SET_power	int	+ Sizing		
fPsize	real	+ specification (0 sized, 1 fixed)	0	
		+ sized power ratio $f_n$	1.0	

SET\_power: if SIZE\_perf='engine', used to distribute propulsion group power required among engine groups

must size at least first engine group, so SET\_power and fPsize values not used for first group

fPsize calculated for first engine group, must be  $> 0$ .

for compressor or generator, set SET\_power=1 (sized if SIZE\_engine='engine')

FltState%SET\_Preq specifies distribution of power required for flight state

---

P0(nratemax)	real	Engine model performance parameters (one engine) power ( $P_0$ )	
SP0(nratemax)	real	specific power ( $SP_0$ )	
Pmech(nratemax)	real	mechanical limit of power ( $P_{mech}$ or $P_{peak}$ )	
sfc0C	real	specific fuel consumption at MCP ( $sfc_{0C}$ )	
Fg0C	real	gross jet thrust at MCP ( $F_{g0C} = SF_{0C}\dot{m}_{0C}$ )	
Nspec	real	specification engine speed ( $N_{spec}$ )	
Nopt0C	real	optimum engine speed at MCP ( $N_{opt0C}$ )	
mdot0C	real	mass flow at MCP ( $\dot{m}_{0C} = P_{0C}/SP_{0C}$ )	
wdot0C	real	fuel flow at MCP ( $\dot{w}_{0C} = sfc_{0C}P_{0C}$ )	
sfc0(nratemax)	real	specific fuel consumption ( $sfc_0$ )	
rsfc0C_conv	real	Engine model performance parameters (one engine), ratio converted to base specific fuel consumption at MCP	
rFg0C_conv	real	gross jet thrust at MCP, jet/fan only	
rwdot0C_conv	real	fuel flow at MCP	

---

reciprocating: only P0, Pmech, Nspec used, and sfc0  
 motor or generator: only P0, Pmech, Nspec used  
 motor + fuel cell: and mdot0C, wdot0C, sfc0C, with Fg0C=0

---

SET_limit_es	int	+ Drive system torque limit + engine shaft (0 input, 1 fraction power, 2 fraction drive system limit)	1
Plimit_es	real	+ engine shaft power limit $P_{ESlimit}$	
fPlimit_es	real	+ engine shaft power limit factor  Derived engine shaft limit	1.0
Qlimit_es	real	engine shaft torque limit ( $P_{ESlimit}$ at engine reference speed)	

---

drive system torque limits: SET\_limit\_ds = input (use Plimit\_es) or calculated (from fPlimit\_es)  
 SET\_limit\_ds='input': Plimit\_ds input  
 SET\_limit\_ds='ratio': from takeoff power,  $fPlimit\_ds \sum(N_{eng} P_{eng})$   
 SET\_limit\_ds='Pav': from engine power available at transmission sizing conditions and missions (DESIGN\_xmsn)  
 $fPlimit\_ds(\Omega_{ref}/\Omega_{prim}) \sum(N_{eng} P_{av})$   
 SET\_limit\_ds='Preq': from engine power required at transmission sizing conditions and missions (DESIGN\_xmsn)  
 $fPlimit\_ds(\Omega_{ref}/\Omega_{prim}) \sum(N_{eng} P_{req})$   
 engine shaft: options for SET\_limit\_ds≠'input'  
 SET\_limit\_es=0: Plimit\_es  
 SET\_limit\_es=1: fPlimit\_es × (engine group  $P_{eng}$  or  $P_{av}$  or  $P_{req}$ , depending on SET\_limit\_ds)  
 SET\_limit\_es=2: fPlimit\_es ×  $P_{DSlimit}(P_{engEG}/P_{engPG})$   
  
 engine shaft power limit: corresponds to all engines of engine group ( $n_{Engine} \times P_{eng}$ )  
 limits engine group  $P_{av}$  (if FltState%SET\_Plmit=on)  
 can be used for max effort in flight state (max\_quant='Q margin')  
 can be used for max gross weight in flight condition or mission (SET\_GW='maxQ' or 'maxPQ')  
 always check and print whether exceed torque limit

---

		+ Installation	
Kffd	real	+ deterioration factor on engine fuel flow or performance $K_{ffd}$	1.05
eta_d	real	+ engine inlet efficiency $\eta_d$ (fraction, for $\delta_M$ )	0.98
		+ power losses (fraction power available, $P_{loss}/P_a$ )	
fPloss_inlet	real	+ engine inlet loss $\ell_{in}$	0.
fPloss_ps	real	+ inlet particle separator loss $\ell_{in}$	0.
fPloss_exh	real	+ engine exhaust loss $\ell_{ex}$ (IRS off)	0.015
		+ auxiliary air momentum drag (IRS off)	
fMF_auxair	real	+ mass flow $f_{aux}$ (fraction engine mass flow)	0.007
eta_auxair	real	+ ram recovery efficiency $\eta_{aux}$	0.75
		+ IR suppressor	
		+ power losses (IRS on)	
fPloss_exh_IRon	real	+ engine exhaust loss $\ell_{ex}$	0.030
		+ auxiliary air momentum drag (IRS on)	
fMF_auxair_IRon	real	+ mass flow $f_{aux}$ (fraction engine mass flow)	0.01
eta_auxair_IRon	real	+ ram recovery efficiency $\eta_{aux}$	0.75
		+ Convertible	
Kffd_conv	real	+ deterioration factor on engine fuel flow or performance $K_{ffd}$	1.05
		+ power losses (fraction power available, $P_{loss}/P_a$ )	
fPloss_exh_conv	real	+ engine exhaust loss $\ell_{ex}$	0.015
		+ Model	
SET_FN	int	+ net jet force (0 for no force)	1
SET_Daux	int	+ auxiliary air momentum drag (0 for no drag)	1

---

installation power losses = inlet + particle separator + exhaust (including IRS)

IR suppressor state specified by STATE\_IRS in operating condition

motor or generator: only use Kffd; motor + fuel cell: Kffd, fMF\_auxair, eta\_auxair

---

		+ Geometry	
loc_engine	Location	+ location	
direction	c*16	+ nominal orientation ('+x', '-x', '+y', '-y', '+z', '-z')	'x'
SET_geom	int	+ position (0 standard, 1 tiltrotor, 2 rotor)	0
RotorForEngine	int	+ rotor number	1

SET_Swet	int	+	nacelle/cowling wetted area (1 fixed, input Swet; 2 scaled, $W_{ES}$ ; 3 scaled, $W_{ES}$ and $W_{gbrs}$ )	2
Swet	real	+	area $S_{wet}$ (per engine)	0.
kSwet	real	+	factor, $k = S_{wet}/(w/N_{eng})^{2/3}$ (Units_Dscale)	0.8
Snac	real		nacelle/cowling area $S_{nac}$	
Swet_nac	real		total wetted area	

---

SET\_geom: calculation override part of location input

SET\_geom=tiltrotor: calculate lateral position (BL) from RotorForEngine

SET\_geom=rotor: (SL,BL,WL or XoL,YoL,ZoL) is relative loc\_rotor(RotorForEngine)

SET\_Swet, wetted area: input (use Swet) or calculated (from kSwet)

units of kSwet are ft<sup>2</sup>/lb<sup>2/3</sup> or m<sup>2</sup>/kg<sup>2/3</sup>

$w = W_{ES}$  (engine system) or  $W_{ES} + W_{gbrs}/N_{EG}$  (engine system and drive system)

nacelle wetted area used for nacelle drag, and for cowling weight

engine group nacelle must be consistent with rotor pylon

---

			Derived geometry	
iDirection	int		nominal orientation (1, -1, 2, -2, 3, -3)	
axis_incid	int		axis incidence ( $\pm 123$ )	
axis_yaw	int		axis yaw ( $\pm 123$ )	
isFixed	int		orientation (1 fixed)	
CBF(3,3)	real		engine axes relative airframe, $C^{BF}$ (fixed)	
ef0(3)	real		engine direction, $e_{f0}$	
ef(3)	real		engine direction, $e_f$ (fixed)	
		+	Controls	
		+	amplitude $A$ (fixed engine group power)	
INPUT_amp	int	+	connection to aircraft controls (0 none, 1 input $T$ matrix)	1
T_amp(ncontmax,nstate max)	real	+	control matrix	
nVamp	int	+	number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
amp(nvelmax)	real	+	values	
Vamp(nvelmax)	real	+	speeds (CAS or TAS)	

		+ mode <i>B</i>	
INPUT_mode	int	+ connection to aircraft controls (0 none, 1 input <i>T</i> matrix)	1
T_mode(ncontmax,nstatemax)	real	+ control matrix	
nVmode	int	+ number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
mode(nvelmax)	real	+ values	
Vmode(nvelmax)	real	+ speeds (CAS or TAS)	
		+ incidence <i>i</i> (tilt)	
INPUT_incid	int	+ connection to aircraft controls (0 none, 1 input <i>T</i> matrix)	1
T_incid(ncontmax,nstatemax)	real	+ control matrix	
nVincid	int	+ number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
incid(nvelmax)	real	+ values	
Vincid(nvelmax)	real	+ speeds (CAS or TAS)	
		+ yaw $\psi$	
INPUT_yaw	int	+ connection to aircraft controls (0 none, 1 input <i>T</i> matrix)	1
T_yaw(ncontmax,nstatemax)	real	+ control matrix	
nVyaw	int	+ number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
yaw(nvelmax)	real	+ values	
Vyaw(nvelmax)	real	+ speeds (CAS or TAS)	
		+ gear ratio factor $f_{\text{gear}}$ (variable speed transmission only)	
INPUT_fgear	int	+ connection to aircraft controls (0 none, 1 input <i>T</i> matrix)	1
T_fgear(ncontmax,nstatemax)	real	+ control matrix	
nVfgear	int	+ number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
fgear(nvelmax)	real	+ values	
Vfgear(nvelmax)	real	+ speeds (CAS or TAS)	

---

aircraft controls connected to individual controls of component,  $c = T c_{AC} + c_0$

for each component control, define matrix *T* (for each control state) and value  $c_0$

flight state specifies control state, or that control state obtained from conversion schedule

$c_0$  can be zero, constant, or function of flight speed (CAS or TAS, piecewise linear input)

by connecting aircraft control to comp control, flight state can specify comp control value

initial values if control is connected to trim variable; otherwise fixed for flight state

---

		+ Nacelle Drag	
MODEL_drag	int	+ model (0 none, 1 standard)	1
Idrag	real	+ incidence angle $i$ for helicopter nominal drag (deg; 0 for not tilt)	0.
DEngSys	DEngSys	standard model	
		Derived drag	
DoQC_nac	real	nacelle cruise drag, area $(D/q)_{nac}$	
DoQH_nac	real	nacelle helicopter drag, area $(D/q)_{nac}$	
DoQV_nac	real	nacelle vertical drag, area $(D/q)_{nac}$	
		component drag contributions must be consistent	
		pylon is rotor support, and nacelle is engine support	
		tiltrotor with tilting engines use pylon drag (and no nacelle drag),	
		since pylon connected to rotor shaft axes	
		tiltrotor with nontilting engines, use nacelle drag as well	

		+ Weight	
Weight	Weight	weight statement (component, including engine weight)	
		+ engine weight	
MODEL_weight	int	+ model (0 input, 1 RPTEM or NASA, 2 custom)	1
dWEng	real	+ weight increment (all engines)	0.
		+ engine system (except engine), engine section or nacelle group, air induction group	
		+ model (0 input, 1 NDARC, 2 custom)	
MODEL_sys	int	+ engine system	1
MODEL_nac	int	+ engine section or nacelle	1
MODEL_air	int	+ air induction	1
		+ weight increment	
dWexh	real	+ exhaust	0.
dWacc	real	+ accessories	0.
dWsupt	real	+ engine support	0.
dWcowl	real	+ engine cowling	0.
dWpylon	real	+ pylon support	0.
dWair	real	+ air induction	0.

WEngSys	WEngSys	NDARC model	
Weng_total	real	engine weight	
WES	real	engine system weight $W_{ES}$ (engine, exhaust, accessories)	
Wtip	real	weight on wing tip	
	+ Technology Factors		
TECH_eng	real	+ engine weight $\chi_{eng}$	1.0
TECH_cowl	real	+ engine cowling weight $\chi_{cowl}$	1.0
TECH_pylon	real	+ pylon structure weight $\chi_{pylon}$	1.0
TECH_supt	real	+ engine support structure weight $\chi_{supt}$	1.0
TECH_air	real	+ air induction system weight $\chi_{airind}$	1.0
TECH_exh	real	+ exhaust system weight $\chi_{exh}$	1.0
TECH_acc	real	+ engine accessories weight $\chi_{acc}$	1.0

---

weight model result multiplied by technology factor and increment added:

$W_{xx} = TECH_{xx} * W_{xx\_model} + dW_{xx}$ ; for fixed (input) weight use MODEL\_xx=0 or TECH\_xx=0.

engine system weight = engine + exhaust + accessory (WES used for rotor pylon wetted area, engine nacelle wetted area, rotor moving weight)

nacelle weight = support + cowl + pylon

engine weight parameters in EngineModel

---

tiltrotor wing weight model requires weight on wing tip:

engine section or nacelle group, air induction group, engine system

---

## Chapter 65

**Structure: DEngSys**

Variable	Type	Description	Default
SET_drag	int	+ Nacelle Drag, Standard Model + forward flight drag specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQ	real	+ area $(D/q)_0$	
CD	real	+ coefficient $C_{D0}$ (based on wetted area, $D/q = SC_D$ ) + vertical drag	
SET_Vdrag	int	+ specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQV	real	+ area $(D/q)_V$	
CDV	real	+ coefficient $C_{DV}$ (based on wetted area, $D/q = SC_D$ ) + transition from forward flight drag to vertical drag	
MODEL_Deng	int	+ model (0 none)	1
Xdrag	real	+ exponent $X_d$	2.0

---

SET\_xxx: fixed (use DoQ) or scaled (use CD); other parameter calculated

---

## Chapter 66

**Structure: WEngSys**

Variable	Type	Description	Default
MODEL_nacelle	int	+ Engine Section or Nacelle Group, NDARC Weight Model + model (1 parametric, 2 scale with power, 3 Boeing, 4 Raymer (transport))	1
fWpylon	real	+ pylon support structure weight $f_{\text{pylon}}$ (fraction maximum takeoff weight) + nacelle group weight, $W$ vs $P_{0C}$	0.
Knac	real	+ factor $K_{\text{nac}}$	
Xnac	real	+ exponent $X_{\text{nac}}$	
n_clf	real	+ Boeing: crash load factor	20.
fWidth_nac	real	+ Raymer: nacelle width (fraction nacelle length) + Air Induction Group, NDARC Weight Model	0.2
MODEL_airind	int	+ model (1 parametric, 2 area)	1
fWair	real	+ air induction weight $f_{\text{airind}}$ (fraction engine support plus air induction weight)	0.3
Uair	real	+ weight per nacelle area $U_{\text{airind}}$ ( $\text{lb}/\text{ft}^2$ or $\text{kg}/\text{m}^2$ ) + Engine System, NDARC Model	
		+ exhaust system weight, per engine, including IR suppressor; $W_{\text{exh}}$ vs $P_{0C}$	
Kwt0_exh	real	+ $K_{0\text{exh}}$	0.
Kwt1_exh	real	+ $K_{1\text{exh}}$ + engine accessories	0.002
MODEL_lub	int	+ lubrication system weight (1 in engine weight, 2 in accessory weight)	1
typically fWair = 0.3 (data range 0.1 to 0.6)			
engine support and pylon support weights must be consistent with rotor support structure weight			
WtParam_engsys(8)	real	+ Custom Weight Model + parameters	0.

## Chapter 67

**Structure: JetGroup**

Variable	Type	Description	Default
		+ Jet Group	
title	c*100	+ title	
notes	c*1000	+ notes	
kJetGroup	int	jet group number	
		+ Description	
MODEL_jet	c*32	+ jet model	'RPJEM'
IDENT_jet	c*16	+ jet identification	'Jet'
IDENT_system2	c*16	+ second system identification	''
nJet	int	+ number of jets $N_{\text{jet}}$	1
Tjet	real	+ jet thrust $T_{\text{jet}}$ (SLS static at takeoff rating, 0. for T0_ref(rating_to))	0.
rating_to	c*12	+ takeoff thrust rating	'MCT'
rating_idle	c*12	+ idle thrust rating	'MCT'
kFuelTank	int	+ fuel tank system number	
kRotor_react	int	+ rotor number for reaction drive	1
		Derived	
iMODEL_jet	int	jet model (MODEL_jet_xxx)	
KIND_jet	int	jet model (MODEL_jet_RPJEM, simple)	
isConvertReact	int	convertible engine (0 not)	
kModel_jet	int	identification (JetModel, from IDENT_jet)	
kModel_sys2	int	identification (JetModel, from IDENT_system2)	
nrate	int	number of ratings	
rating(nratermax)	c*12	rating designations (lowercase)	
krateC	int	MCT rating number	
krate_to	int	takeoff thrust rating number	
WOneJet	real	weight one jet $W_{\text{one jet}}$	

---

MODEL\_jet: jet model  
   'RPJEM', 'jet', 'fan' = turbojet/turbofan engine (RPJEM); IDENT\_jet → JetModel; fuel is weight  
   'react' = reaction drive (RPJEM)); IDENT\_jet → JetModel; fuel is weight  
   'simple' = simple force generator; no model identified; fuel is weight or energy  
 MODEL\_jet: convertible engine; only with turbojet/turbofan  
   '+react' = reaction drive (mode  $B = 1$ ); IDENT\_system2 → JetModel  
  
 jet identification: match ident of JetModel  
 second system identification: match ident of JetModel; not use weight  
 for fixed jet: use  $T_{\text{jet}} = 0$ . and no size task (or jet thrust not sized)

---

		Jet model performance parameters (one jet)	
T0(nratemax)	real	thrust ( $T_0$ )	
ST0(nratemax)	real	specific thrust ( $ST_0$ )	
Tmech(nratemax)	real	mechanical limit of thrust ( $T_{\text{mech}}$ )	
sfc0C	real	specific fuel consumption at MCT ( $sfc_{0C}$ )	
mdot0C	real	mass flow at MCT ( $\dot{m}_{0C} = T_{0C}/ST_{0C}$ )	
wdot0C	real	fuel flow at MCT ( $\dot{w}_{0C} = sfc_{0C}T_{0C}$ )	
Edot0C	real	energy flow at MCT ( $\dot{e}_{0C} = sfc_{0C}T_{0C}$ )	
		Jet model performance parameters (one jet), ratio converted to base	
rsfc0C_conv	real	specific fuel consumption at MCT	
rwdot0C_conv	real	fuel flow at MCT	
	+ Installation		
Kffd	real	+ deterioration factor on jet fuel flow $K_{ffd}$	1.05
eta_d	real	+ jet inlet efficiency $\eta_d$ (fraction, for $\delta_M$ )	0.98
	+ power losses (fraction thrust available, $T_{\text{loss}}/T_a$ )		
fTloss_inlet	real	+ engine inlet loss $\ell_{in}$	0.
fTloss_exh	real	+ engine exhaust loss $\ell_{ex}$ (IRS off)	0.01
	+ auxiliary air momentum drag (IRS off)		
fMF_auxair	real	+ mass flow $f_{aux}$ (fraction engine mass flow)	0.007
eta_auxair	real	+ ram recovery efficiency $\eta_{aux}$	0.75

	+ IR suppressor	
	+ power losses (IRS on)	
fTloss_exh_IRon	real	+ engine exhaust loss $\ell_{ex}$ 0.03
	+ auxiliary air momentum drag (IRS on)	
fMF_auxair_IRon	real	+ mass flow $f_{aux}$ (fraction engine mass flow) 0.01
eta_auxair_IRon	real	+ ram recovery efficiency $\eta_{aux}$ 0.75
	+ Convertible	
Kffd_conv	real	+ deterioration factor on jet fuel flow $K_{ffd}$ 1.05
	+ power losses (fraction thrust available, $T_{loss}/T_a$ )	
fTloss_exh_conv	real	+ engine exhaust loss $\ell_{ex}$ 0.01

---

installation power losses = inlet + exhaust (including IRS)  
IR suppressor state specified by STATE\_IRS\_jet in operating condition

---

	+ Simple force generator	
Tmax	real	+ design maximum thrust $T_{max}$ 0.
SET_burn	int	+ fuel quantity used (1 weight, 2 energy) 1
sfc	real	+ thrust specific fuel consumption (weight or energy) 1.0
SW	real	+ specific weight $S$ (per jet)
KIND_simple	int	+ weight group (1 engine system, 2 propeller/fan installation, 3 tail rotor) 1

---

fuel tank system identified must be consistent with SET\_burn

---

	+ Geometry	
loc_jet	Location	+ location
direction	c*16	+ nominal orientation ('+x', '-x', '+y', '-y', '+z', '-z') 'x'
SET_Swet	int	+ nacelle/cowling wetted area (1 fixed, input Swet; 2 scaled) 2
Swet	real	+ area $S_{wet}$ (per jet) 0.
kSwet	real	+ factor, $k = S_{wet}/(W_{ES}/N_{jet})^{2/3}$ (Units_Dscale) 0.8
Snac	real	nacelle/cowling area $S_{nac}$
Swet_nac	real	total wetted area

---

**SET\_Swet**, wetted area: input (use *Swet*) or calculated (from *kSwet*)

units of *kSwet* are  $\text{ft}^2/\text{lb}^{2/3}$  or  $\text{m}^2/\text{kg}^{2/3}$

nacelle wetted area used for nacelle drag, and for cowling weight

---

#### Derived geometry

iDirection	int	nominal orientation (1, -1, 2, -2, 3, -3)	
axis_incid	int	axis incidence ( $\pm 123$ )	
axis_yaw	int	axis yaw ( $\pm 123$ )	
isFixed	int	orientation (1 fixed)	
CBF(3,3)	real	jet relative airframe, $C^{BF}$ (fixed)	
ef0(3)	real	jet direction, $e_{f0}$	
ef(3)	real	jet direction, $e_f$ (fixed)	
	+ Controls		
	+ amplitude <i>A</i>		
INPUT_amp	int	connection to aircraft controls (0 none, 1 input <i>T</i> matrix)	1
T_amp(ncontmax,nstatemax)	real	control matrix	
nVamp	int	number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum <i>nvelmax</i> )	0
amp(nvelmax)	real	values	
Vamp(nvelmax)	real	speeds (CAS or TAS)	
	+ mode <i>B</i>		
INPUT_mode	int	connection to aircraft controls (0 none, 1 input <i>T</i> matrix)	1
T_mode(ncontmax,nstatemax)	real	control matrix	
nVmode	int	number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum <i>nvelmax</i> )	0
mode(nvelmax)	real	values	
Vmode(nvelmax)	real	speeds (CAS or TAS)	
	+ incidence <i>i</i> (tilt)		
INPUT_incid	int	connection to aircraft controls (0 none, 1 input <i>T</i> matrix)	1
T_incid(ncontmax,nstatemax)	real	control matrix	
nVincid	int	number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum <i>nvelmax</i> )	0
incid(nvelmax)	real	values	
Vincid(nvelmax)	real	speeds (CAS or TAS)	

INPUT_yaw	int	+	yaw $\psi$		
T_yaw(ncontmax,nstatemax)	real	+	connection to aircraft controls (0 none, 1 input $T$ matrix)		1
nVyaw	int	+	control matrix		
yaw(nvelmax)	real	+	number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)		0
Vyaw(nvelmax)	real	+	values		
			speeds (CAS or TAS)		

---

aircraft controls connected to individual controls of component,  $c = Tc_{AC} + c_0$   
 for each component control, define matrix  $T$  (for each control state) and value  $c_0$   
 flight state specifies control state, or that control state obtained from conversion schedule  
 $c_0$  can be zero, constant, or function of flight speed (CAS or TAS, piecewise linear input)  
 by connecting aircraft control to comp control, flight state can specify comp control value  
 initial values if control is connected to trim variable; otherwise fixed for flight state

---

MODEL_drag	int	+	Nacelle Drag		
Idrag	real	+	model (0 none, 1 standard)		1
DJetSys	DJetSys	+	incidence angle $i$ for helicopter nominal drag (deg; 0 for not tilt)		0.
			standard model		
			Derived drag		
DoQC_nac	real		nacelle cruise drag, area $(D/q)_{nac}$		
DoQH_nac	real		nacelle helicopter drag, area $(D/q)_{nac}$		
DoQV_nac	real		nacelle vertical drag, area $(D/q)_{nac}$		
Weight	Weight	+	Weight		
		+	weight statement (component, including jet weight)		
		+	jet weight		
MODEL_weight	int	+	model (0 input, 1 RPJEM, 2 custom)		1
dWJet	real	+	weight increment (all jets)		0.
		+	engine system (except jet), engine section or nacelle group, air induction group		
		+	model (0 input, 1 NDARC, 2 custom)		
MODEL_sys	int	+	engine system		1
MODEL_nac	int	+	engine section or nacelle		1
MODEL_air	int	+	air induction		1

			weight increment	
dWexh	real	+	exhaust	0.
dWacc	real	+	accessories	0.
dWsupt	real	+	engine support	0.
dWcowl	real	+	engine cowling	0.
dWpylon	real	+	pylon support	0.
dWair	real	+	air induction	0.
WJetSys	WJetSys		NDARC model	
Wjet_total	real		jet weight	
WES	real		engine system weight $W_{ES}$ (engine, exhaust, accessories)	
		+	Technology Factors	
TECH_jet	real	+	jet weight $\chi_{jet}$	1.0
TECH_jetcowl	real	+	engine cowling weight $\chi_{cowl}$	1.0
TECH_jetpylon	real	+	pylon structure weight $\chi_{pylon}$	1.0
TECH_jetsupt	real	+	engine support structure weight $\chi_{supt}$	1.0
TECH_jetair	real	+	air induction system weight $\chi_{airind}$	1.0
TECH_jetexh	real	+	exhaust system weight $\chi_{exh}$	1.0
TECH_jetacc	real	+	engine accessories weight $\chi_{acc}$	1.0

---

weight model result multiplied by technology factor and increment added:

$W_{xx} = TECH_{xx} * W_{xx\_model} + dW_{xx}$ ; for fixed (input) weight use MODEL\_xx=0 or TECH\_xx=0.

engine system weight = engine + exhaust + accessory (WES used for nacelle wetted area)

nacelle weight = support + cowl + pylon

jet weight parameters in JetModel

---

## Chapter 68

**Structure: DJetSys**

Variable	Type	Description	Default
SET_drag	int	+ Nacelle Drag, Standard Model + forward flight drag specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQ	real	+ area $(D/q)_0$	
CD	real	+ coefficient $C_{D0}$ (based on wetted area, $D/q = SC_D$ ) + vertical drag	
SET_Vdrag	int	+ specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQV	real	+ area $(D/q)_V$	
CDV	real	+ coefficient $C_{DV}$ (based on wetted area, $D/q = SC_D$ ) + transition from forward flight drag to vertical drag	
MODEL_Djet	int	+ model (0 none)	1
Xdrag	real	+ exponent $X_d$	2.0

---

SET\_xxx: fixed (use DoQ) or scaled (use CD); other parameter calculated

---

## Chapter 69

**Structure: WJetSys**

Variable	Type	Description	Default
MODEL_nacelle	int	+ Engine Section or Nacelle Group, NDARC Weight Model + model (1 parametric, 2 scale with thrust, 3 Boeing, 4 Raymer (transport))	1
fWpylon	real	+ pylon support structure weight $f_{\text{pylon}}$ (fraction maximum takeoff weight) + nacelle group weight, $W$ vs $T_{0C}$	0.
Knac	real	+ factor $K_{\text{nac}}$	
Xnac	real	+ exponent $X_{\text{nac}}$	
n_clf	real	+ Boeing: crash load factor	20.
fWidth_nac	real	+ Raymer: nacelle width (fraction nacelle length) + Air Induction Group, NDARC Weight Model	0.2
MODEL_airind	int	+ model (1 parametric, 2 area)	1
fWair	real	+ air induction weight $f_{\text{airind}}$ (fraction engine support plus air induction weight)	0.3
Uair	real	+ weight per nacelle area $U_{\text{airind}}$ ( $\text{lb}/\text{ft}^2$ or $\text{kg}/\text{m}^2$ ) + Engine System, NDARC Model + exhaust system weight, per jet; $W_{\text{exh}}$ vs $T_{0C}$	
Kwt0_exh	real	+ $K_{0\text{exh}}$	0.
Kwt1_exh	real	+ $K_{1\text{exh}}$ + engine accessories	0.002
MODEL_lub	int	+ lubrication system weight (1 in jet weight, 2 in accessory weight)	1
WtParam_jetsys(8)	real	+ Custom Weight Model + parameters	0.

## Chapter 70

**Structure: ChargeGroup**

Variable	Type	Description	Default
		+ Charge Group	
title	c*100	+ title	
notes	c*1000	+ notes	
kChargeGroup	int	charge group number	
		+ Description	
MODEL_charge	c*32	+ charger model	' '
IDENT_charge	c*16	+ charger identification	'Charge'
nCharge	int	+ number of chargers $N_{\text{chrg}}$	1
Pchrg	real	+ charger power $P_{\text{chrg}}$ (SLS static at takeoff rating, 0. for P0_ref(rating_to))	0.
rating_to	c*12	+ takeoff thrust rating	'MCP'
rating_idle	c*12	+ idle thrust rating	'MCP'
kFuelTank	int	+ fuel tank system number (generated)	1
kFuelTank_burn	int	+ fuel tank system number (burned)	
		Derived	
iMODEL_charge	int	charger model (MODEL_charge_xxx)	
KIND_charge	int	charger model (MODEL_charge_fuelcell, solarcell)	
kModel_chrg	int	identification (FuelCellModel or SolarCellModel, from IDENT_charge)	
kBattery	int	battery model, from kFuelTank (0 for none)	
nrate	int	number of ratings	
rating(nratermax)	c*12	rating designations (lowercase)	
krateC	int	MCP rating number	
krate_to	int	takeoff thrust rating number	
WOneChrg	real	weight one charger $W_{\text{one chrg}}$	

MODEL\_charge: charger model

'fuel' = fuel cell; IDENT\_charge → FuelCellModel; fuel generated is energy

fuel burned is weight (kFuelTank\_burn)

'solar' = solar cell; IDENT\_charge → SolarCellModel; fuel generated is energy

charger identification: match ident of FuelCellModel or SolarCellModel

for fixed charger: use  $P_{\text{chrg}} = 0.$  and no size task (or charger power not sized)

fuel tank system identified for generation must store and use energy (may have BatteryModel)

fuel tank system identified for burn must store and use weight

---

#### Charger model performance parameters (one charger)

P0(nratemax)	real	power ( $P_0$ )	
sfc0C	real	specific fuel consumption at MCP ( $sfc_{0C}$ )	
mdot0C	real	mass flow at MCP ( $\dot{m}_{0C}$ )	
wdot0C	real	fuel flow at MCP ( $\dot{w}_{0C} = sfc_{0C} P_{0C}$ )	
solararea	real	solar cell total area	
	+ Installation		
Kffd	real	+ deterioration factor on charger fuel flow or performance $K_{ffd}$	1.05
eta_d	real	+ charger inlet efficiency $\eta_d$ (fraction, for $\delta_M$ )	0.98
	+ auxiliary air momentum drag		
fMF_auxair	real	+ mass flow $f_{aux}$ (fraction charger mass flow)	0.007
eta_auxair	real	+ ram recovery efficiency $\eta_{aux}$	0.75
	+ Geometry		
loc_charger	Location	+ location	
direction	c*16	+ nominal orientation ('+x', '-x', '+y', '-y', '+z', '-z')	'x'
SET_Swet	int	+ nacelle/cowling wetted area (1 fixed, input Swet; 2 scaled)	2
Swet	real	+ area $S_{\text{wet}}$ (per charger)	0.
kSwet	real	+ factor, $k = S_{\text{wet}} / (W/N_{\text{chrg}})^{2/3}$ (Units_Dscale)	0.8
Snac	real	nacelle/cowling area $S_{\text{nac}}$	
Swet_nac	real	total wetted area	

---

SET\_Swet, wetted area: input (use Swet) or calculated (from kSwet)

units of kSwet are  $\text{ft}^2/\text{lb}^{2/3}$  or  $\text{m}^2/\text{kg}^{2/3}$

nacelle wetted area used for nacelle drag

---

		Derived geometry	
iDirection	int	nominal orientation (1, -1, 2, -2, 3, -3)	
axis_incid	int	axis incidence ( $\pm 123$ )	
axis_yaw	int	axis yaw ( $\pm 123$ )	
isFixed	int	orientation (1 fixed)	
CBF(3,3)	real	charger relative airframe, $C^{BF}$ (fixed)	
ef0(3)	real	charger direction, $e_{f0}$	
ef(3)	real	charger direction, $e_f$ (fixed)	
		+ Controls	
		+ amplitude $A$	
		+ connection to aircraft controls (0 none, 1 input $T$ matrix)	1
INPUT_amp	int	+ control matrix	
T_amp(ncontmax,nstatemax)	real	+ number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
nVamp	int	+ values	
amp(nvelmax)	real	+ speeds (CAS or TAS)	
Vamp(nvelmax)	real	+ mode $B$	
INPUT_mode	int	+ connection to aircraft controls (0 none, 1 input $T$ matrix)	1
T_mode(ncontmax,nstatemax)	real	+ control matrix	
nVmode	int	+ number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
mode(nvelmax)	real	+ values	
Vmode(nvelmax)	real	+ speeds (CAS or TAS)	
		+ incidence $i$ (tilt)	
INPUT_incid	int	+ connection to aircraft controls (0 none, 1 input $T$ matrix)	1
T_incid(ncontmax,nstatemax)	real	+ control matrix	
nVincid	int	+ number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
incid(nvelmax)	real	+ values	
Vincid(nvelmax)	real	+ speeds (CAS or TAS)	
		+ yaw $\psi$	
INPUT_yaw	int	+ connection to aircraft controls (0 none, 1 input $T$ matrix)	1
T_yaw(ncontmax,nstatemax)	real	+ control matrix	
nVyaw	int	+ number of speeds (0 zero value; 1 constant; $\geq 2$ piecewise linear, maximum nvelmax)	0
yaw(nvelmax)	real	+ values	
Vyaw(nvelmax)	real	+ speeds (CAS or TAS)	

---

aircraft controls connected to individual controls of component,  $c = T c_{AC} + c_0$   
 for each component control, define matrix  $T$  (for each control state) and value  $c_0$   
 flight state specifies control state, or that control state obtained from conversion schedule  
 $c_0$  can be zero, constant, or function of flight speed (CAS or TAS, piecewise linear input)  
 by connecting aircraft control to comp control, flight state can specify comp control value  
 initial values if control is connected to trim variable; otherwise fixed for flight state

---

MODEL_drag	+ Nacelle Drag		
Idrag	int + model (0 none, 1 standard)		1
DChrgSys	real + incidence angle $i$ for helicopter nominal drag (deg; 0 for not tilt)		0.
	DChrgSys standard model		
DoQC_nac	real nacelle cruise drag, area $(D/q)_{nac}$		
DoQH_nac	real nacelle helicopter drag, area $(D/q)_{nac}$		
DoQV_nac	real nacelle vertical drag, area $(D/q)_{nac}$		
Weight	+ Weight		
	Weight weight statement (component, including charger weight)		
	+ charger weight		
MODEL_weight	int + model (0 input, 1 NDARC, 2 custom)		1
dWChrg	real + weight increment (all chargers)		0.
WChrgSys	WChrgSys NDARC model		
Wchrg_total	real charge group weight		
WES	real engine system weight $W_{ES}$ (engine, exhaust, accessories)		
TECH_chrg	+ Technology Factors		
	real + charger weight $\chi_{chrg}$		1.0

---

weight model result multiplied by technology factor and increment added:

$W_{xx} = TECH_{xx}*W_{xx\_model} + dW_{xx}$ ; for fixed (input) weight use MODEL\_xx=0 or TECH\_xx=0.

---

engine system weight = engine + exhaust + accessory = charge group weight (WES used for nacelle wetted area)

charger weight parameters in FuelCellModel or SolarCellModel

---

## Chapter 71

**Structure: DChrgSys**

Variable	Type	Description	Default
SET_drag	int	+ Nacelle Drag, Standard Model + forward flight drag specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQ	real	+ area $(D/q)_0$	
CD	real	+ coefficient $C_{D0}$ (based on wetted area, $D/q = SC_D$ ) + vertical drag	
SET_Vdrag	int	+ specification (1 fixed, $D/q$ ; 2 scaled, $C_D$ )	2
DoQV	real	+ area $(D/q)_V$	
CDV	real	+ coefficient $C_{DV}$ (based on wetted area, $D/q = SC_D$ ) + transition from forward flight drag to vertical drag	
MODEL_Dchrg	int	+ model (0 none)	1
Xdrag	real	+ exponent $X_d$	2.0

---

SET\_xxx: fixed (use DoQ) or scaled (use CD); other parameter calculated

---

Chapter 72

---

**Structure: WChrgSys**

Variable	Type	Description	Default
WtParam_chrgsys(8)	real	+ Custom Weight Model + parameters	0.

## Chapter 73

**Structure: EngineModel**

Variable	Type	Description	Default
		+ Engine Model	
title	c*100	+ title	'Default'
notes	c*1000	+ notes	
ident	c*16	+ identification	'Engine'
		engine identification: used by IDENT_engine of EngineGroup input (eg 'T800')	
		installed: power available $P_{av}$ , power required $P_{req}$ , gross jet thrust $F_G$ , net jet thrust $F_N$	
		uninstalled: power available $P_a$ , power required $P_q$ , gross jet thrust $F_g$ , net jet thrust $F_n$	
		"0" = SLS static; "C" = MCP	
		mass flow = power / specific power ( $SP = P/\dot{m}$ ); fuel flow = specific fuel consumption * power (sfc = $\dot{w}/P$ )	
		engine model can be used by more than one engine group, so all parameters fixed	
		as model for turbojet or reaction drive of convertible engine:	
		only use sfc0C_ref, sfc0C_ref, and parameters for optimum speed, thrust available, and performance	
		P0_ref and SP0_ref required, but not used; weight, ratings, technology, and scaling variables not used	
kEngineModel	int	engine model number	
		+ Weight	
MODEL_weight	int	+ RPTEM model (0 fixed, 1 $W(P)$ , 2 $SW(\dot{m})$ )	1
Weng	real	+ engine weight (fixed)	0.
		+ engine weight, $W_{eng}$ vs $P_{0C}$ model ( $W = K_{0eng} + K_{1eng}P + K_{2eng}P^{X_{eng}}$ )	
Kwt0_eng	real	+ constant $K_{0eng}$	0.
Kwt1_eng	real	+ constant $K_{1eng}$	0.25
Kwt2_eng	real	+ constant $K_{2eng}$	0.
Xwt_eng	real	+ exponent $X_{eng}$	0.

SW_ref	real	+ engine weight, $SW = P/W_{eng}$ vs $\dot{m}_{0C}$ model	4.
SW_limit	real	+ specific weight reference $SW_{ref}$ ( $\dot{m} = \dot{m}_{tech}$ )	5.
		+ specific weight limit $SW_{lim}$ ( $\dot{m} = \dot{m}_{lim}$ )	
WtParam_engine(8)	real	+ Custom Weight Model	0.
		+ parameters	
		+ Parameters	
		+ Engine Ratings	
nrate	int	+ number of ratings (maximum nratemax)	1
rating(nratermax)	c*12	+ rating designations	'MCP'
krateC	int	+ MCP rating number	
		+ Reference	
P0_ref(nratermax)	real	+ power ( $P_0$ )	2000.
SP0_ref(nratermax)	real	+ specific power ( $SP_0$ )	150.
Pmech_ref(nratermax)	real	+ mechanical limit of power ( $P_{mech}$ )	2500.
sfc0C_ref	real	+ specific fuel consumption at MCP ( $sfc_{0C}$ )	0.45
SF0C_ref	real	+ specific jet thrust ( $F_{g0C} = SF_{0C}\dot{m}_{0C}$ )	10.
Nspec_ref	real	+ specification turbine speed ( $N_{spec}$ )	20000.
Nopt0C_ref	real	+ optimum turbine speed at MCP ( $N_{opt0C}$ )	20000.
		Derived ratios	
rP0(nratermax)	real	power ( $P_{0R}/P_{0C}$ )	
rSP0(nratermax)	real	specific power ( $SP_{0R}/SP_{0C}$ )	
rPmech(nratermax)	real	mechanical limit of power ( $P_{mechR}/P_{0C}$ )	

---

Reference Engine Rating: SLS, static

if MCP scaled, ratios to MCP values kept constant

engine rating: match rating designation in FltState; typically designated as

'ERP' = Emergency Rated Power (OEI power)

'CRP' = Contingency Rated Power (2.5 min)

'MRP' = Maximum Rated Power (5 or 10 min)

'IRP' = Intermediate Rated Power (30 min)

'MCP' = Maximum Continuous Power (normal operations)

engine model being used may not contain data for all ratings

---

		+ Technology	
SP0C_tech	real	+ specific power at MCP $SP_{tech}$ (0. for $SP0\_ref(MCP)$ )	0.
sfc0C_tech	real	+ specific fuel consumption at MCP $sfc_{tech}$ (0. for $sfc0C\_ref$ )	0.
Nspec_tech	real	+ specification turbine speed $N_{tech}$ (0. for $Nspec\_ref$ )	0.
		+ Scaling	
FIX_size	int	+ engine size (0 scaled, 1 fixed)	0
MF_limit	real	+ mass flow at limit $SP$ and sfc ( $\dot{m}_{lim}$ )	30.
SP0C_limit	real	+ specific power limit $SP_{lim}$	200.
sfc0C_limit	real	+ specific fuel consumption limit $sfc_{lim}$	0.34
KNspec	real	+ specification turbine speed variation ( $K_{Ns2}$ )	0.
		Derived scaling	
P0C_limit	real	specific power available (SLS static, MCP, $N_{spec}$ ), $SP_{0C}$ vs $\dot{m}_{0C}$	
		power limit	
Ksp0	real	$K_{sp0}$	
Ksp1	real	$K_{sp1}$	
		specific fuel consumption (SLS static, MCP, $N_{spec}$ ), $sfc_{0C}$ vs $\dot{m}_{0C}$	
Ksf0	real	$K_{sf0}$	
Ksf1	real	$K_{sf1}$	
		specification turbine speed, $N_{spec}$ vs $\dot{m}_{0C}$	
KNs1	real	$K_{Ns1}$	
KNs2	real	$K_{Ns2}$	
		optimum turbine speed, $N_{opt0C}$	
KNo	real	$K_{No}$	
		engine weight, $SW = P/W_{eng}$ vs $\dot{m}_{0C}$	
Ksw0	real	$K_{sw0}$	
Ksw1	real	$K_{sw1}$	

---

$SP$  and sfc functions are defined by values  $SP0C_tech$ ,  $sfc0C_tech$ ,  $\dot{m}_{tech}=P0C\_ref/SP0C\_tech$   
and limits  $SP0C\_limit$ ,  $sfc0C\_limit$ ,  $MF\_limit$

defaults  $SP0C_tech=SP0\_ref(MCP)$ ,  $sfc0C_tech=sfc0C\_ref$ ,  $Nspec_tech=Nspec\_ref$   
require  $\dot{m}_{tech} < \dot{m}_{lim}$  (otherwise get  $SP_{0C} = SP0C\_tech$  and  $sfc_{0C} = sfc0C\_tech$ )

for no variation of  $SP$ , sfc, and  $SW$  with scale, use  $FIX\_size=1$  or  $MF\_limit=0$ .  
engine weight scaling determined by  $MODEL\_weight$

---

MODEL_OptN	int	+ Optimum Power Turbine Speed + model (0 none, 1 linear, 2 cubic) + linear, $N_{\text{opt}}/N_{\text{spec}}$ vs $P_q/P_0$	1
KNoptA	real	+ constant $K_{\text{Nopt}A}$	1.
KNoptB	real	+ constant $K_{\text{Nopt}B}$	0.
KNopt0	real	+ cubic, $N_{\text{opt}}/N_{\text{opt0C}}$ vs $P_q/P_{0C}$ + constant $K_{\text{Nopt}0}$	1.
KNopt1	real	+ constant $K_{\text{Nopt}1}$	0.
KNopt2	real	+ constant $K_{\text{Nopt}2}$	0.
KNopt3	real	+ constant $K_{\text{Nopt}3}$	0.
XNopt	real	+ exponent $X_{\text{Nopt}}$ + power turbine efficiency function, $\eta_t(N)/\eta_t(N_{\text{spec}})$	0.
XNeta	real	+ exponent $X_{N\eta}$	2.0

engine power and performance variation with power turbine speed determined by  $N_{\text{opt}}$  and  $X_{N\eta}$   
used only for INPUT\_param = single set; no variation if MODEL\_OptN=0

MODEL_Pav	int	+ Power Available and Power Required Parameters + power available (0 constant, 1 referred, 2 general)	2
MODEL_perf	int	+ performance at power required (1 referred, 2 general)	2
INPUT_param	int	+ parameter input form (1 single set; 2 function of engine speed)	1
Param	EngineParamN	single set (input moved to Param for use) + function of engine speed	
nspeed	int	+ number of engine speeds (maximum nspeedmax)	1
rNeng(nspeedmax)	real	+ engine speed ratio, $N/N_{\text{spec}}$	1.
kEngineParamN(nspeedmax)	int	+ identification of parameter sets	1

constant or referred model does not use parameters, does not include effect of turbine speed  
general model uses parameters for effects of temperature and ram, can include effect of turbine speed

function of engine speed (INPUT\_param=2): parameters interpolated, rNeng unique and sequential

simple model: constant (MODEL\_Pav=0) or constant referred (MODEL\_Pav=1) power available

constant specific fuel consumption (MODEL\_perf=1, sfc0C\_tech=0., MF\_limit=0.)

no jet force (EngineGroup%SET\_FN=0), no auxiliary air momentum drag (EngineGroup%SET\_Daux=0)

		+ Power Available	
INPUT_lin	int	+ input form (1 coefficients $K_0, K_1$ ; 2 values $\theta_b, K_b$ )	1
		+ referred specific power available, $SP_a/SP_0$ vs temperature	
Nspa(nratemax)	int	+ number of regions (maximum nengkmax-1)	0
Kspa0(nengkmax,nratemax)	real	+ $K_{spa0}$ (piecewise linear $K_{spa} = K_0 + K_1\theta$ )	3.5
Kspa1(nengkmax,nratemax)	real	+ $K_{spa1}$ (piecewise linear $K_{spa} = K_0 + K_1\theta$ )	-2.5
Tspak(nengkmax,nratemax)	real	+ $\theta_b$	
Kspab(nengkmax,nratemax)	real	+ $K_{spa-b}$	
Xspa0(nengkmax,nratemax)	real	+ $X_{spa0}$ (piecewise linear $X_{spa} = X_0 + X_1\theta$ )	-.2
Xspa1(nengkmax,nratemax)	real	+ $X_{spa1}$ (piecewise linear $X_{spa} = X_0 + X_1\theta$ )	0.
Tspax(nengkmax,nratemax)	real	+ $\theta_b$	
Xspab(nengkmax,nratemax)	real	+ $X_{spa-b}$	
		+ referred mass flow at power available, $\dot{m}_a/\dot{m}_0$ vs temperature	
Nmfa(nratemax)	int	+ number of regions (maximum nengkmax-1)	0
Kmf0(nengkmax,nratemax)	real	+ $K_{mfa0}$ (piecewise linear $K_{mfa} = K_0 + K_1\theta$ )	.3
Kmf1(nengkmax,nratemax)	real	+ $K_{mfa1}$ (piecewise linear $K_{mfa} = K_0 + K_1\theta$ )	-.3
Tmfak(nengkmax,nratemax)	real	+ $\theta_b$	
Kmfab(nengkmax,nratemax)	real	+ $K_{mfa-b}$	
Xmf0(nengkmax,nratemax)	real	+ $X_{mfa0}$ (piecewise linear $X_{mfa} = X_0 + X_1\theta$ )	1.
Xmf1(nengkmax,nratemax)	real	+ $X_{mfa1}$ (piecewise linear $X_{mfa} = X_0 + X_1\theta$ )	0.
Tmfax(nengkmax,nratemax)	real	+ $\theta_b$	
Xmfab(nengkmax,nratemax)	real	+ $X_{mfa-b}$	

piecewise linear function:

input form = coefficients  $K_0, K_1$  (N sets) or values  $\theta_b, K_b$  (N+1 values)

form not input is calculated (N-1  $\theta_b, K_b$  or N  $K_0, K_1$ )

input  $K_0, K_1$ : adjacent  $K_1$  different, resulting  $\theta_b$  unique and sequential

input  $\theta_b, K_b$ :  $\theta_b$  unique and sequential

$N_{spec}$  = specification power turbine speed

$SP_a, \dot{m}_a$  = referred specific power and mass flow available, at  $N_{spec}$

$SP_0, \dot{m}_0$  = referred specific power and mass flow available, at  $N_{spec}$ , SLS static

$N$  = power turbine speed,  $N_{opt}$  = optimum power turbine speed

$\eta_t$  = power turbine efficiency; assume gas power available  $P_G = P_a/\eta_t$  insensitive to  $N$ , so  $\eta_t(N)$  give  $P_a(N)$

		+ Performance at Power Required	
		+ referred fuel flow at power required, $\dot{w}_{req}/\dot{w}_{0C}$ vs $P_q/P_{0C}$	
Kffq0	real	+ constant $K_{ffq0}$	.2
Kffq1	real	+ constant $K_{ffq1}$	.8
Kffq2	real	+ constant $K_{ffq2}$	0.
Kffq3	real	+ constant $K_{ffq3}$	0.
Xffq	real	+ exponent $X_{ffq}$	1.3
		+ referred mass flow at power required, $\dot{m}_{req}/\dot{m}_{0C}$ vs $P_q/P_{0C}$	
Kmfq0	real	+ constant $K_{mfq0}$	.6
Kmfq1	real	+ constant $K_{mfq1}$	.78
Kmfq2	real	+ constant $K_{mfq2}$	-.48
Kmfq3	real	+ constant $K_{mfq3}$	.1
Xmfq	real	+ exponent $X_{mfq}$	3.5
		+ gross jet thrust at power required, $F_g/F_{g0C}$ vs $P_q/P_{0C}$	
Kfgq0	real	+ constant $K_{fgq0}$	.2
Kfgq1	real	+ constant $K_{fgq1}$	.8
Kfgq2	real	+ constant $K_{fgq2}$	0.
Kfgq3	real	+ constant $K_{fgq3}$	0.
Xfgq	real	+ exponent $X_{fgq}$	2.0
		+ installed net jet thrust at power required, $F_G/F_g$ (installed thrust loss) vs $\ell_{ex}$	
Kfgr0	real	+ constant $K_{fgr0}$	.8
Kfgr1	real	+ constant $K_{fgr1}$	.6
Kfgr2	real	+ constant $K_{fgr2}$	0.
Kfgr3	real	+ constant $K_{fgr3}$	0.

## Chapter 74

**Structure: EngineParamN**

Variable	Type	Description	Default
		+ Engine Model Parameters	
title	c*100	+ title	'Default'
notes	c*1000	+ notes	
kEngineParamN	int	engine param number	
		+ Power Available	
nrate	int	+ number of ratings	1
INPUT_lin	int	+ input form (1 coefficients $K_0, K_1$ ; 2 values $\theta_b, K_b$ ) + referred specific power available, $SP_a/SP_0$ vs temperature	1
Nspa(nratemax)	int	+ number of regions (maximum nengkmax-1)	0
Kspa0(nengkmax,nratemax)	real	+ $K_{spa0}$ (piecewise linear $K_{spa} = K_0 + K_1\theta$ )	3.5
Kspa1(nengkmax,nratemax)	real	+ $K_{spa1}$ (piecewise linear $K_{spa} = K_0 + K_1\theta$ )	-2.5
Tspak(nengkmax,nratemax)	real	+ $\theta_b$	
Kspab(nengkmax,nratemax)	real	+ $K_{spa-b}$	
Xspa0(nengkmax,nratemax)	real	+ $X_{spa0}$ (piecewise linear $X_{spa} = X_0 + X_1\theta$ )	-.2
Xspa1(nengkmax,nratemax)	real	+ $X_{spa1}$ (piecewise linear $X_{spa} = X_0 + X_1\theta$ )	0.
Tspax(nengkmax,nratemax)	real	+ $\theta_b$	
Xspab(nengkmax,nratemax)	real	+ $X_{spa-b}$ + referred mass flow at power available, $\dot{m}_a/\dot{m}_0$ vs temperature	
Nmfa(nratemax)	int	+ number of regions (maximum nengkmax-1)	0
Kmfak(nengkmax,nratemax)	real	+ $K_{mfa0}$ (piecewise linear $K_{mfa} = K_0 + K_1\theta$ )	.3
Kmfal(nengkmax,nratemax)	real	+ $K_{mfa1}$ (piecewise linear $K_{mfa} = K_0 + K_1\theta$ )	-.3
Tmfak(nengkmax,nratemax)	real	+ $\theta_b$	
Kmfab(nengkmax,nratemax)	real	+ $K_{mfa-b}$	
Xmfak(nengkmax,nratemax)	real	+ $X_{mfa0}$ (piecewise linear $X_{mfa} = X_0 + X_1\theta$ )	1.
Xmfal(nengkmax,nratemax)	real	+ $X_{mfa1}$ (piecewise linear $X_{mfa} = X_0 + X_1\theta$ )	0.
Tmfax(nengkmax,nratemax)	real	+ $\theta_b$	
Xmfab(nengkmax,nratemax)	real	+ $X_{mfa-b}$	

---

number of ratings consistent with EngineModel				
+ Performance at Power Required				
Kffq0	real	+ constant $K_{ffq0}$		.2
Kffq1	real	+ constant $K_{ffq1}$		.8
Kffq2	real	+ constant $K_{ffq2}$		0.
Kffq3	real	+ constant $K_{ffq3}$		0.
Xffq	real	+ exponent $X_{ffq}$		1.3
		+ referred fuel flow at power required, $\dot{w}_{req}/\dot{w}_{0C}$ vs $P_q/P_{0C}$		
Kmfq0	real	+ constant $K_{mfq0}$		.6
Kmfq1	real	+ constant $K_{mfq1}$		.78
Kmfq2	real	+ constant $K_{mfq2}$		-.48
Kmfq3	real	+ constant $K_{mfq3}$		.1
Xmfq	real	+ exponent $X_{mfq}$		3.5
		+ gross jet thrust at power required, $F_g/F_{g0C}$ vs $P_q/P_{0C}$		
Kfgq0	real	+ constant $K_{fgq0}$		.2
Kfgq1	real	+ constant $K_{fgq1}$		.8
Kfgq2	real	+ constant $K_{fgq2}$		0.
Kfgq3	real	+ constant $K_{fgq3}$		0.
Xfgq	real	+ exponent $X_{fgq}$		2.0
		+ installed net jet thrust at power required, $F_G/F_g$ (installed thrust loss) vs $\ell_{ex}$		
Kfgr0	real	+ constant $K_{fgr0}$		.8
Kfgr1	real	+ constant $K_{fgr1}$		.6
Kfgr2	real	+ constant $K_{fgr2}$		0.
Kfgr3	real	+ constant $K_{fgr3}$		0.

## Chapter 75

**Structure: EngineTable**

Variable	Type	Description	Default
		+ Engine Table	
title	c*100	+ title	'Default'
notes	c*1000	+ notes	
ident	c*16	+ identification	'Engine'
		engine identification: used by IDENT_engine of EngineGroup input	
		engine table can be used by more than one engine group, so all parameters fixed	
		engine not scaled (SET_power, fPsize not used); eta_d not used	
		fixed engine weight dWEng (MODEL_weight=0)	
		no mass flow value, so no momentum drag of auxillary air flow (fMF_auxair, eta_auxair not used)	
		obtain Peng from table; mechanical limits included in power available data	
		tables intended for installed engine, including losses (fPloss_inlet, fPloss_ps, fPloss_exh not used)	
		fuel flow multiplied by Kffd, accounting for deterioration of engine efficiency	

kEngineTable	int	engine table number	
		+ Engine ratings	
nrate	int	+ number of ratings (maximum nratemax)	1
rating(nratemax)	c*12	+ rating designations	'MCP'
krateC	int	MCP rating number	
Nspec	real	+ Specification turbine speed ( $N_{\text{spec}}$ )	

	+ Table		
KIND_table	int	+ format (1 E, 2 H)	
nalt	int	+ number of altitudes (maximum nengtmax)	
ntemp	int	+ number of temperatures (maximum nengxmax)	
nspeed	int	+ number of speeds (maximum nengtmax)	
nalt_ram	int	+ number of altitudes for $f_{\text{RAM}}$ (maximum nengtmax)	
ntemp_ram	int	+ number of temperatures for $f_{\text{RAM}}$ (maximum nengxmax)	
alt(nengtmax)	real	+ altitude $h$	
temp(nengxmax)	real	+ temperature $\tau$	
speed(nengtmax)	real	+ speed $V$ (TAS)	
alt_ram(nengtmax)	real	+ altitude $h$ for $f_{\text{RAM}}$	
temp_ram(nengxmax)	real	+ temperature $\tau$ for $f_{\text{RAM}}$	
<hr/>			
table format E: use alt, speed			
table format H: use alt, temp; and for $f_{\text{RAM}}$ use speed, alt_ram, temp_ram; no jet thrust			

	+ Technology factors		
Kp	real	+ power available	1.0
Kw	real	+ fuel flow	1.0
Kf	real	+ net thrust	1.0
<hr/>			
	+ Table format E		
Tp(nengtmax,nengtmax,nratemax)	real	+ power available $P_a(h, V, R)$	
Tw(nengtmax,nengtmax,nratemax)	real	+ fuel flow $\dot{w}(h, V, R)$	
Tf(nengtmax,nengtmax,nratemax)	real	+ net thrust $F_N(h, V, R)$	

		+ Table format H	
KIND_temp	int	+ temperature units (0 F or C based on Units; 1 F, 2 C)	0
change_temp	int	+ change temperature units (0 not, 1 F to C, 2 C to F)	
		+ power available	
P0(nengtmax,nengxmax,nratemax)	real	+ static power $P_0(h, \tau, R)$	
KIND_ram	int	+ ram factor (1 table, 2 referred)	1
fRAM(nengtmax,nengxmax,nengtmax)	real	+ table ram factor $f_{\text{RAM}}(V, \tau, h)$	
Xpa(nratemax)	real	+ referred ram factor $f_{\text{RAM}} = (\delta_M \sqrt{\theta_M})^{X_{pa}}$ , exponent $X_{pa}$	1.
		+ fuel flow	
KIND_fuelflow	int	+ kind (1 reference $\dot{w}_{\text{ref}}(P_{q\text{ref}})$ , 2 table $\dot{w}(P_q, h, \tau)$ )	1
		+ reference	
nfuelflow	int	+ number of fuel flow values (maximum nengxmax)	
Pq_ref(nengxmax)	real	+ reference power required $P_q / \delta^{X_{dp}} \theta^{X_{rp}}$	
ff_ref(nengxmax)	real	+ reference fuel flow $\dot{w} / \delta^{X_{df}} \theta^{X_{rf}}$	
Xdp	real	+ reference power, pressure exponent $X_{dp}$	1.0
Xrp	real	+ reference power, temperature exponent $X_{rp}$	0.5
Xdf	real	+ reference fuel flow, pressure exponent $X_{df}$	1.0
Xrf	real	+ reference fuel flow, temperature exponent $X_{rf}$	0.5
		+ table	
npower_ff	int	+ number of power required values (maximum nengtmax)	
nalt_ff	int	+ number of altitudes (maximum nengtmax)	
ntemp_ff	int	+ number of temperatures (maximum nengtmax)	
power_ff(nengtmax)	real	+ power required $P_q$	
alt_ff(nengtmax)	real	+ altitude $h$	
temp_ff(nengtmax)	real	+ temperature $\tau$	
ff(nengtmax,nengtmax,nengtmax)	real	+ fuel flow $\dot{w}(P_q, h, \tau)$	

## Chapter 76

**Structure: RecipModel**

Variable	Type	Description	Default
		+ Reciprocating Engine Model	
title	c*100	+ title	'Default'
notes	c*1000	+ notes	
ident	c*16	+ identification	'Engine'
		engine identification: used by IDENT_engine of EngineGroup input	
		installed: power available $P_{av}$ , power required $P_{req}$ , gross jet thrust $F_G$ , net jet thrust $F_N$ uninstalled: power available $P_a$ , power required $P_q$ , gross jet thrust $F_g$ , net jet thrust $F_n$ fuel flow = specific fuel consumption * power (sfc = $\dot{w}/P$ ); mass flow = fuel flow / fuel-air ratio	
		reciprocating engine model can be used by more than one engine group, so all parameters fixed	
kRecipModel	int	reciprocating engine model number	
MODEL_weight	int	+ Weight	
Weng	real	+ model (0 fixed, 1 $W(P)$ )	1
		+ engine weight (fixed)	0.
		+ engine weight, $W_{eng}$ vs $P_0$ model ( $W = K_{0eng} + K_{1eng}P + K_{2eng}P^{X_{eng}}$ )	
Kwt0_eng	real	+ constant $K_{0eng}$	0.
Kwt1_eng	real	+ constant $K_{1eng}$	0.25
Kwt2_eng	real	+ constant $K_{2eng}$	0.
Xwt_eng	real	+ exponent $X_{eng}$	0.
		+ Custom Weight Model	
WtParam_recip(8)	real	+ parameters	0.

		+ Parameters	
		+ Engine Ratings	
nrate	int	+ number of ratings (maximum nratemax)	1
rating(nratermax)	c*12	+ rating designations	'MCP'
krateC	int	MCP rating number	
		+ Reference	
P0_ref(nratermax)	real	+ power ( $P_0$ )	1000.
sfc0_ref(nratermax)	real	+ specific fuel consumption ( $sfc_0$ )	0.60
F0_ref(nratermax)	real	+ fuel-air ratio ( $F_0$ )	0.08
SF0_ref(nratermax)	real	+ specific jet thrust ( $F_g = SF_0 \dot{m}$ )	0.
Pmep_ref(nratermax)	real	+ mean effective pressure limit ( $P_{mep}$ )	1000.
Pcrit_ref(nratermax)	real	+ critical (throttle) limit ( $P_{crit}$ )	1000.
N0_ref(nratermax)	real	+ reference engine speed ( $N_0$ )	2000.
Nspec_ref	real	+ specification engine speed ( $N_{spec}$ )	2000.
		Derived ratios	
rP0(nratermax)	real	power ( $P_{0R}/P_{0C}$ )	
rN0(nratermax)	real	reference engine speed ( $N_{0R}/N_{spec}$ )	
rcrit(nratermax)	real	critical power ( $P_{critR}/P_{0R}$ )	
rmepl(nratermax)	real	mechanical limit of power ( $P_{mechR}/P_{0R} * N_{spec}/N_{0R}$ )	

---

Reference Engine Rating: SLS, static

if MCP scaled, ratios to MCP values kept constant

engine rating: match rating designation in FltState; typically designated as

'MRP' = Maximum Rated Power (5 or 10 min)

'MCP' = Maximum Continuous Power (normal operations)

ratings encompass mixture settings and supercharger speeds

Pmep\_ref: zero for no mechanical (mep) limit

Pcrit\_ref: zero for no critical (throttle) limit; Xcrit = 0. for limit independent of engine speed

---

		+ Scaling	
FIX_size	int	+ engine size (0 scaled, 1 fixed)	0
Xo	real	+ specific output exponent $X_o$	0.2
Xs	real	+ mean piston speed exponent $X_s$	0.3
Xf	real	+ specific fuel consumption exponent $X_f$	0.1
		Derived scaling	
Xsfc	real	exponent $-X_f/(2 - X_o)$	
XN	real	exponent $-(1 + X_s)/(2 - X_o)$	
		+ Power Available	
MODEL_Pav	int	+ model (0 constant $P_a$ )	1
Kp(nratemax)	real	+ factor $K_p$	1.
Kram(nratemax)	real	+ constant $K_{ram}$	1.
XpN(nratemax)	real	+ exponent $X_{pN}$	1.
Xpt(nratemax)	real	+ exponent $X_{p\theta}$	0.5
Xcrit(nratemax)	real	+ exponent $X_{crit}$	3.0
		+ Performance at Power Required	
		+ fuel flow, $\dot{w}_{req}/\dot{w}_0$ vs $P_q/P_0$	
MODEL_Kffq	int	+ model (1 polynomial, 2 piecewise linear)	1
		+ polynomial	
Kffq0(nratemax)	real	+ constant $K_{ffq0}$	0.
Kffq1(nratemax)	real	+ constant $K_{ffq1}$	1.
Kffq2(nratemax)	real	+ constant $K_{ffq2}$	0.
Kffq3(nratemax)	real	+ constant $K_{ffq3}$	0.
		+ piecewise linear	
Nffq(nratemax)	int	+ number of values (maximum nengrmax)	0
Pffq(nengrmax,nratemax)	real	+ power ratio $P_q/P_0$	
Kffq(nengrmax,nratemax)	real	+ factor $K_{ffq}$	
Xffq(nratemax)	real	+ exponent $X_{ffq}$	0.
		+ fuel-air ratio, $F_{req}/F_0$ vs $P_q/P_0$	
MODEL_KFq	int	+ model (1 polynomial, 2 piecewise linear)	1
		+ polynomial	
KFq0(nratemax)	real	+ constant $K_{Fq0}$	1.
KFq1(nratemax)	real	+ constant $K_{Fq1}$	0.
KFq2(nratemax)	real	+ constant $K_{Fq2}$	0.

KFq3(nratemax)	real	+	constant $K_{Fq3}$	0.
		+	piecewise linear	
NFq(nratemax)	int	+	number of values (maximum nengrmax)	0
PFq(nengrmax,nratemax)	real	+	power ratio $P_q/P_0$	
KFq(nengrmax,nratemax)	real	+	factor $K_{Fq}$	
XFq(nratemax)	real	+	exponent $X_{Fq}$	0.
		+	installed net jet thrust, $K_{fgr} = F_G/F_g$ (installed thrust loss)	
Kfgr(nratemax)	real	+	constant $K_{fgr}$	1.

---

Simple model: constant power available (MODEL\_Pav=0)

constant specific fuel consumption (defaults Kffq1=1. and Xffq=0., and Xf=0.)

constant fuel-air ratio (defaults KFq0=1. and XFq=0.)

no jet force (EngineGroup%SET\_FN=0), no auxiliary air momentum drag (EngineGroup%SET\_Daux=0)

---

## Chapter 77

**Structure: CompressorModel**

Variable	Type	Description	Default
title	c*100	+ Compressor Model + title	'Default'
notes	c*1000	+ notes	
ident	c*16	+ identification	'Comp'
		compressor identification: used by IDENT_engine of EngineGroup input	
		"0" = SLS static; "C" = MCP	
		mass flow = power / specific power ( $SP = P/\dot{m}$ ); gross thrust = specific thrust * mass flow ( $ST = T/\dot{m}$ )	
		compressor model can be used by more than one engine group, so all parameters fixed	
kCompressorModel	int	compressor model number	
MODEL_weight	int	+ Weight	1
Wcomp	real	+ model (0 fixed, 1 $W(P)$ ) + compressor weight (fixed) + compressor weight, $W_{comp}$ vs $P_{0C}$ model ( $W = K_{0comp} + K_{1comp}P + K_{2comp}P^{X_{comp}}$ )	0.
Kwt0_comp	real	+ constant $K_{0comp}$	0.
Kwt1_comp	real	+ constant $K_{1comp}$	0.2
Kwt2_comp	real	+ constant $K_{2comp}$	0.
Xwt_comp	real	+ exponent $X_{comp}$ + Custom Weight Model	0.
WtParam_comp(8)	real	+ parameters	0.

		+ Parameters	
		+ Compressor Ratings	
nrate	int	+ number of ratings (maximum nratemax)	1
rating(nratermax)	c*12	+ rating designations	'MCP'
krateC	int	MCP rating number	
		+ Reference	
P0_ref(nratermax)	real	+ power ( $P_0$ )	
SP0_ref(nratermax)	real	+ specific power ( $SP_0$ )	
Pmech_ref(nratermax)	real	+ mechanical limit of power ( $P_{\text{mech}}$ )	
ST0C_ref	real	+ specific jet thrust ( $F_{g0C} = ST_{0C}\dot{m}_{0C}$ )	
Nspec_ref	real	+ specification compressor speed ( $N_{\text{spec}}$ )	
		Derived ratios	
rP0(nratermax)	real	power ( $P_{0R}/P_{0C}$ )	
rSP0(nratermax)	real	specific power ( $SP_{0R}/SP_{0C}$ )	
rPmech(nratermax)	real	mechanical limit of power ( $P_{\text{mech}R}/P_{0C}$ )	
<hr/>			
Reference Compressor Rating: SLS, static if MCP scaled, ratios to MCP values kept constant compressor rating: match rating designation in FltState			
<hr/>			
		+ Power Available	
		+ referred specific power available, $SP_a/SP_0$	
Xspa	real	+ exponent $X_{spa}$	1.
		+ referred mass flow at power available, $\dot{m}_a/\dot{m}_0$	
Xmfa	real	+ exponent $X_{mfa}$	1.
		+ Performance at Power Required	
		+ referred mass flow at power required, $\dot{m}_{req}/\dot{m}_{0C}$ vs $P_q/P_{0C}$	
Kmfq0	real	+ constant $K_{mfq0}$	
Kmfq1	real	+ constant $K_{mfq1}$	
Kmfq2	real	+ constant $K_{mfq2}$	
Kmfq3	real	+ constant $K_{mfq3}$	
Xmfq	real	+ exponent $X_{mfq}$	1.
		+ referred specific thrust at power required, $ST_{req}/ST_0$	
Xstq	real	+ exponent $X_{stq}$	1.

## Chapter 78

**Structure: MotorModel**

Variable	Type	Description	Default
		+ Motor Model	
title	c*100	+ title	'Default'
notes	c*1000	+ notes	
ident	c*16	+ identification	'Motor'
		motor identification: used by IDENT_engine of EngineGroup input	
		"0" = SLS static; "C" = MCP	
		motor model can be used by more than one engine group, so all parameters fixed	

kMotorModel	int	motor model number	
		+ Weight	
MODEL_weight	int	+ NASA model (0 fixed, 1 $W(P)$ , 2 $W(Q)$ )	2
Wmotor	real	+ motor weight (fixed)	0.
		+ motor weight, $W_{\text{motor}}$ vs $P_{0C}$ model ( $W = K_{0\text{motor}} + K_{1\text{motor}}P + K_{2\text{motor}}P^{X_{\text{motor}}}Q^{X_{q\text{motor}}}$ )	
Kwt0_motor	real	+ constant $K_{0\text{motor}}$	0.
Kwt1_motor	real	+ constant $K_{1\text{motor}}$	0.
Kwt2_motor	real	+ constant $K_{2\text{motor}}$	0.
Xwt_motor	real	+ exponent $X_{\text{motor}}$	0.
Xwtq_motor	real	+ exponent $X_{q\text{motor}}$	0.
		+ motor weight, $W_{\text{motor}}$ vs $Q_{\text{peak}}$ model	
KIND_design	int	+ torque-to-weight design (0 only high $Q/W$ ; 1 high $Q/W$ , 2 low $Q/W$ factor)	0
		+ Custom Weight Model	
WtParam_motor(8)	real	+ parameters	0.

		+ Parameters	
		+ Motor Ratings	
nrate	int	+ number of ratings (maximum nratemax)	1
rating(nratermax)	c*12	+ rating designations	'MCP'
krateC	int	MCP rating number	
		+ Reference	
P0_ref(nratermax)	real	+ power ( $P_0$ )	0.
Ppeak_ref(nratermax)	real	+ mechanical limit of power ( $P_{peak}$ )	
Nspec_ref	real	+ specification motor speed ( $N_{spec}$ )	
		Derived ratios	
rP0(nratermax)	real	power ( $P_{0R}/P_{0C}$ )	
rPpeak(nratermax)	real	mechanical limit of power ( $P_{peakR}/P_{0C}$ )	

---

Reference Motor Rating: SLS, static

if MCP scaled, ratios to MCP values kept constant

motor rating: match rating designation in FltState

---

		+ Performance	
		+ Motor/Generator Efficiency	
KIND_eff	int	+ kind (1 fixed, 2 function power, 3 map)	2
		+ fixed or function power	
eta_motor	real	+ reference efficiency (at $P_{eng}$ )	1.00
loss_motor	real	+ power loss (fraction $P_{eng}$ )	0.00
Closs(4,4)	real	+ efficiency map ( $P_{loss} = P_{eng} f_{loss} \sum_{i=0}^3 \sum_{j=0}^3 C_{ij} t^i n^j$ )	0.00
floss	real	+ loss coefficients $Closs(i+1,j+1) = C_{ij}$	
eta_cont	real	+ factor $f_{loss}$	1.00
		+ controller efficiency	
		+ Fuel Cell	
sfc0C	real	+ specific fuel consumption at MCP ( $sfc_{0C}$ )	0.
Kmf	real	+ mass flow ratio ( $\dot{m}/\dot{w}$ )	86.
eta_cell	real	+ efficiency	1.00

	+ Scaling	
KNspec	+ specification motor speed variation ( $K_{Ns}$ )	0.
KNbase	+ base motor speed variation ( $K_{Nb}$ )	0.

---

$N_{\text{spec}}$  used by efficiency map;  $N_{\text{base}}$  affects  $P_{\text{peak}}$  scaling  
for no variation of motor speeds with scale, use  $\text{KNspec} = \text{KNbase} = 0$ .

---

## Chapter 79

**Structure: JetModel**

Variable	Type	Description	Default
		+ Jet Model	
title	c*100	+ title	'Default'
notes	c*1000	+ notes	
ident	c*16	+ identification	'Jet'
		jet identification: used by IDENT_jet of JetGroup input	
		installed: thrust available $T_{av}$ , thrust required $T_{req}$	
		uninstalled: thrust available $T_a$ , thrust required $T_q$	
		“0” = SLS static; “C” = MCT	
		mass flow = thrust / specific thrust ( $ST = T/m$ ); fuel flow = specific fuel consumption * thrust (sfc = $\dot{w}/T$ )	
		jet model can be used by more than one jet group, so all parameters fixed	
		as model for reaction drive of convertible engine:	
		only use sfc0C_ref and parameters for thrust available and performance at thrust required	
		T0_ref and ST0_ref required, but not used; weight, ratings, technology, and scaling variables not used	
kJetModel	int	jet model number	
		+ Weight	
MODEL_weight	int	+ RPJEM model (0 fixed, 1 $W(T)$ )	1
Wjet	real	+ jet weight (fixed)	0.
		+ jet weight, $W_{jet}$ vs $T_{0C}$ model ( $W = K_{0jet} + K_{1jet}T + K_{2jet}T^{X_{jet}}$ )	
Kwt0_jet	real	+ constant $K_{0jet}$	0.
Kwt1_jet	real	+ constant $K_{1jet}$	0.2
Kwt2_jet	real	+ constant $K_{2jet}$	0.
Xwt_jet	real	+ exponent $X_{jet}$	0.

WtParam_jet(8)	real	+ Custom Weight Model + parameters + Parameters + Jet Ratings	0.
nrate	int	+ number of ratings (maximum nratemax)	1
rating(nratermax)	c*12	+ rating designations	'MCT'
krateC	int	+ MCT rating number	
T0_ref(nratermax)	real	+ Reference + thrust ( $T_0$ )	0.
ST0_ref(nratermax)	real	+ specific thrust ( $ST_0$ )	
Tmech_ref(nratermax)	real	+ mechanical limit of thrust ( $T_{mech}$ )	
sfc0C_ref	real	+ specific fuel consumption at MCT ( $sfc_{0C}$ )	
Derived ratios			
rT0(nratermax)	real	thrust ( $T_{0R}/T_{0C}$ )	
rST0(nratermax)	real	specific thrust ( $ST_{0R}/ST_{0C}$ )	
rTmech(nratermax)	real	mechanical limit of thrust ( $T_{mechR}/T_{0C}$ )	
<hr/>			
Reference Jet Rating: SLS, static			
if MCT scaled, ratios to MCT values kept constant			
jet rating: match rating designation in FltState			
<hr/>			

ST0C_tech	real	+ Technology	0.
sfc0C_tech	real	+ specific thrust at MCT $ST_{tech}$ (0. for ST0_ref(MCT))	0.
		+ specific fuel consumption at MCT $sfc_{tech}$ (0. for sfc0C_ref)	
		+ Scaling	
FIX_size	int	+ engine size (0 scaled, 1 fixed)	0
MF_limit	real	+ mass flow at limit $ST$ and $sfc$ ( $\dot{m}_{lim}$ )	0.
ST0C_limit	real	+ specific thrust limit $ST_{lim}$	0.
sfc0C_limit	real	+ specific fuel consumption limit $sfc_{lim}$	

		Derived scaling specific thrust available (SLS static, MCT), $ST_{0C}$ vs $\dot{m}_{0C}$
T0C_limit	real	thrust limit
Kst0	real	$K_{st0}$
Kst1	real	$K_{st1}$
		specific fuel consumption (SLS static, MCT), $sfc_{0C}$ vs $\dot{m}_{0C}$
Ksfc0	real	$K_{sfc0}$
Ksfc1	real	$K_{sfc1}$
<hr/>		
		$ST$ and $sfc$ functions are defined by values $ST0C_{tech}$ , $sfc0C_{tech}$ , $\dot{m}_{tech}=T0C_{ref}/ST0C_{tech}$ and limits $ST0C_{limit}$ , $sfc0C_{limit}$ , $MF_{limit}$ defaults $ST0C_{tech}=ST0_{ref}(MCT)$ , $sfc0C_{tech}=sfc0C_{ref}$ require $\dot{m}_{tech} < \dot{m}_{lim}$ (otherwise get $ST0C = ST0C_{tech}$ and $sfc0C = sfc0C_{tech}$ )
		for no variation of $ST$ and $sfc$ with scale, use $FIX\_size=1$ or $MF_{limit}=0$ .
<hr/>		
bypass	real	<ul style="list-style-type: none"> <li>+ Turbofan bypass ratio (0. for turbojet)</li> <li>+ Thrust Available</li> </ul>
Xsta	real	<ul style="list-style-type: none"> <li>+ referred specific thrust available, <math>ST_a/ST_0</math></li> <li>+ exponent <math>X_{sta}</math></li> </ul>
Xmfa	real	<ul style="list-style-type: none"> <li>+ referred mass flow at thrust available, <math>\dot{m}_a/\dot{m}_0</math></li> <li>+ exponent <math>X_{mfa}</math></li> <li>+ Performance at Thrust Required</li> </ul>
Kffq0	real	<ul style="list-style-type: none"> <li>+ constant <math>K_{ffq0}</math></li> </ul>
Kffq1	real	<ul style="list-style-type: none"> <li>+ constant <math>K_{ffq1}</math></li> </ul>
Kffq2	real	<ul style="list-style-type: none"> <li>+ constant <math>K_{ffq2}</math></li> </ul>
Xffq	real	<ul style="list-style-type: none"> <li>+ exponent <math>X_{ffq}</math></li> <li>+ referred mass flow at thrust required, <math>\dot{m}_{req}/\dot{m}_{0C}</math> vs <math>T_q/T_{0C}</math></li> </ul>
Kmfq	real	<ul style="list-style-type: none"> <li>+ constant <math>K_{mfq}</math> (0, 1, or 1/2)</li> </ul>
Xmfq	real	<ul style="list-style-type: none"> <li>+ exponent <math>X_{mfq}</math></li> </ul>

## Chapter 80

**Structure: FuelCellModel**

Variable	Type	Description	Default
		+ Fuel Cell Model	
title	c*100	+ title	'Default'
notes	c*1000	+ notes	
ident	c*16	+ identification	'Cell'
		fuel cell identification: used by IDENT_charge of ChargerGroup input	
		"0" = SLS static; "C" = MCP	
		fuel cell model can be used by more than one charger group, so all parameters fixed	
kFuelCellModel	int	fuel cell model number	
		+ Weight	
MODEL_weight	int	+ model (0 fixed, 1 $W(P)$ )	1
Wcell	real	+ fuel cell weight (fixed)	0.
		+ fuel cell weight, $W_{cell}$ vs $P_{0C}$ model ( $W = K_{0cell} + K_{1cell}P + K_{2cell}P^{X_{cell}}$ )	
Kwt0_cell	real	+ constant $K_{0cell}$	0.
Kwt1_cell	real	+ constant $K_{1cell}$	0.
Kwt2_cell	real	+ constant $K_{2cell}$	0.
Xwt_cell	real	+ exponent $X_{cell}$	0.
		+ Custom Weight Model	
WtParam_fuelcell(8)	real	+ parameters	0.

		+ Parameters	
		+ Fuel Cell Ratings	
nrate	int	+ number of ratings (maximum nratemax)	1
rating(nratermax)	c*12	+ rating designations	'MCP'
krateC	int	MCP rating number	
		+ Reference	
P0_ref(nratermax)	real	+ power ( $P_0$ )	0.
sfc0C_ref	real	+ specific fuel consumption at MCP (sfc <sub>0C</sub> )	0.
rP0(nratermax)	real	Derived ratios power ( $P_{0R}/P_{0C}$ )	

---

Reference Fuel Cell Rating: SLS, static  
if MCP scaled, ratios to MCP values kept constant  
fuel cell rating: match rating designation in FltState

---

		+ Performance	
idesign	real	+ design current density $i_d$	
pi_comp	real	+ compressor pressure ratio $\pi_C$	
		+ cell characteristics (at cell pressure $\delta_c = 1$ )	
ncell	int	+ number of values (maximum nengcmax)	1
icell(nengcmax)	real	+ current density $i_c$	1.
vcell(nengcmax)	real	+ voltage $v_c$	1.
Xfc	real	+ pressure scaling exponent $X_{fc}$	0.38
Kmf	real	+ mass flow ratio ( $\dot{m}/\dot{w}$ )	86.
		Derived	
vdesign	real	design voltage $v_d$	
pdesign	real	design power density $p_d$	
vmax	real	voltage for maximum power $v_{max}$	
irate(nratermax)	real	rated current density $i_R$	

---

reference sfc corresponds to fuel specific energy and design cell current, including technology impact  
units of idesign and icell must be consistent

---

icell values unique and sequential; icell(1)=0.

vcell monotonically decreasing (reversed vcell unique and sequential)

simple model: define power P0\_ref and specific fuel consumption sfc0C\_ref, mass flow from Km<sub>f</sub>

n<sub>cell</sub>=1 for constant  $v_c$ , hence constant efficiency, constant power and sfc (idesign, pi\_comp, Xfc not used)

---

## Chapter 81

**Structure: SolarCellModel**

Variable	Type	Description	Default
		+ Solar Cell Model	
title	c*100	+ title	'Default'
notes	c*1000	+ notes	
ident	c*16	+ identification	'Cell'
		solar cell identification: used by IDENT_charge of ChargerGroup input	
		"0" = SLS static; "C" = MCP	
		solar cell model can be used by more than one charge group, so all parameters fixed	

kSolarCellModel	int	solar cell model number	
		+ Weight	
MODEL_weight	int	+ model (0 fixed, 1 $W(A)$ )	1
Wsolar	real	+ solar cell weight (fixed)	0.
ssolar	real	+ weight density ( $\text{kg/m}^2$ )	
		+ Custom Weight Model	
WtParam_solarcell(8)	real	+ parameters	0.

		+ Parameters	
		+ Solar Cell Ratings	
nrate	int	+ number of ratings (maximum nratemax)	1
rating(nratermax)	c*12	+ rating designations	'MCP'
krateC	int	MCP rating number	
		+ Reference	
P0_ref(nratermax)	real	+ power ( $P_0$ )	0.
		Derived ratios	
rP0(nratermax)	real	power ( $P_{0R}/P_{0C}$ )	

---

Reference Solar Cell Rating: SLS, static  
if MCP scaled, ratios to MCP values kept constant  
solar cell rating: match rating designation in FltState

---

		+ Performance	
esolar	real	+ power density (W/m <sup>2</sup> )	
		+ Efficiency	
KIND_eff	int	+ kind (1 fixed, 2 function power)	2
eta_cell	real	+ reference efficiency (at $P_{chrg}$ )	1.00
loss_cell	real	+ power loss (fraction $P_{chrg}$ )	0.00

---

simple model: power density esolar and weight density ssolar; with efficiency in esolar (KIND\_eff=1 and eta\_cell=1.)

---

## Chapter 82

**Structure: BatteryModel**

Variable	Type	Description	Default
		+ Battery Model	
title	c*100	+ title	'Default'
notes	c*1000	+ notes	
ident	c*16	+ identification	'Battery'
		battery identification: used by IDENT_battery of FuelTank input	
		battery model can be used by more than one fuel tank system, so all parameters fixed	
kBatteryModel	int	battery model number	
		+ Performance	
MODEL_battery	int	+ model (1 equivalent circuit, 2 lithium-ion)	1
Vref	real	+ reference voltage $V_{ref}$	4.2
xmbd	real	+ maximum burst discharge current $x_{mbd}$ (1/hr)	20.
xCCmax	real	+ maximum charge current $x_{CC\max}$ (1/hr)	4.
		Derived performance	
CfromE	real	charge capacity $C$ (A-hr) from energy capacity (MJ); $(10^6/3600)/V_{ref}$	
PfromE	real	power capacity $P$ (hp or kW) from energy capacity (MJ); $xmbd/Econv_dE$	
		+ Equivalent Circuit Model	
KIND_eff	int	+ kind (1 fixed, 2 function power)	2
		+ discharge	
eta_dischrg	real	+ reference efficiency (at $P_{ref}$ )	1.00
loss_dischrg	real	+ power loss (fraction $P_{ref}$ )	0.00
		+ charge	
eta_chrg	real	+ reference efficiency (at $P_{ref}$ )	1.00
loss_chrg	real	+ power loss (fraction $P_{ref}$ )	0.00

---

simple model: constant efficiencies eta\_dischrg and eta\_chrg (KIND\_eff=1)

---

		+ Lithium-Ion Model	
		+ discharge	
fcrit	real	+ critical voltage factor ( $F_V = f_{crit}$ is capacity)	0.6
fd	real	+ nominal discharge voltage ( $V_d = f_d V_{ref}$ )	1.0
nFV	int	+ open circuit voltage ratio ( $V_o = V_d F_V(d)$ ) + number of points (maximum 40)	0
DoD(40)	real	+ depth-of-discharge $d$ (fraction)	0.
FV(40)	real	+ $F_V$	0.
Tref	real	+ reference temperature $T_{ref}$ (deg C)	20.
fTC	real	+ temperature control power loss $f_{TC}$ (fraction component power) + current influence on discharge voltage	0.01
R	real	+ internal resistance $x_{mbd} CR / V_{ref}$	0.1
kdl	real	+ depth-of-discharge $k_{dl} x_{mbd} C$ + temperature influence on discharge voltage	0.05
kVT	real	+ voltage increment $k_{VT}$	0.005
kdT	real	+ depth-of-discharge $k_{dT}$ + charge	0.000005
fc	real	+ nominal charge voltage ( $V_c = f_c V_{ref}$ )	1.0
kcV	real	+ CC phase starting voltage decrement $k_{cV}$	0.1
ks	real	+ CV phase parameter $k_\sigma$	0.2
DoDrev(40)	real	Derived lithium-ion discharge reversed DoD	
FVrev(40)	real	reversed FV	

---

open circuit voltage ratio: monotonically decreasing; default used if nFV=0  
default DoD = 0.,1.,2.,3.,4.,5.,6.,7.,8.,9.,91.,92.,93.,94.,95.,96.,97.,98.,99.,1.,1.01.,1.02  
default FV = 1.,.97.,.95.,.93.,.915.,.90.,.89.,.88.,.87.,.85.,.847.,.842.,.835.,.826.,.815.,.8.,.78.,.75.,.7.,.6.,.4.,0.

---

## Chapter 83

**Structure: Location**

Variable	Type	Description	Default
		+ Location + input + fixed (dimensional, arbitrary origin)	
FIX_geom	c*8	+ input	' '
SL	real	+ stationline	
BL	real	+ buttline	
WL	real	+ waterline	
		+ scaled (based on reference length, from reference point)	
XoL	real	+ $x/L$	
YoL	real	+ $y/L$	
ZoL	real	+ $z/L$	
		+ reference length	
KIND_scale	int	+ kind (0 global, 1 rotor radius, 2 wing span, 3 fuselage length)	0
kScale	int	+ identification (component number)	1

Fixed input: FIX\_geom = 'x', 'y', 'z' (or combination) to override INPUT\_geom=2

Geometry: Location for each component

fixed geometry input (INPUT\_geom = 1): dimensional SL/BL/WL

stationline + aft, buttline + right, waterline + up; arbitrary origin; units = ft or m

scaled geometry input (INPUT\_geom = 2): divided by reference length (KIND\_scale, kScale)

XoL + aft, YoL + right, ZoL + up; from reference point

option to fix some geometry (FIX\_geom in Location override INPUT\_geom)

option to specify reference length (KIND\_scale in Location override global KIND\_scale)

Reference point: KIND\_Ref, kRef; input dimensional XX\_Ref, or position of identified component

component reference must be fixed

Locations can be calculated from other parameters (configuration specific)

		Derived
		input, from Aircraft%INPUT_geom and FIX_geom (1 fixed; 2 scaled)
INPUT_geom_x	int	$x$
INPUT_geom_y	int	$y$
INPUT_geom_z	int	$z$
		from Aircraft%INPUT_geom and FIX_geom (0 calculated, 1 fixed, 2 scaled)
FIX_x	int	$x$
FIX_y	int	$y$
FIX_z	int	$z$
isFixed	int	all fixed (0 not, some scaled or calculated) fixed (dimensional, arbitrary origin)
SLloc	real	stationline
BLloc	real	buttlne
WLloc	real	waterline
XoLloc	real	scaled (based on reference length, from reference point) $x/L$
YoLloc	real	$y/L$
ZoLloc	real	$z/L$
		reference length
KIND_scale_loc	int	from Aircraft%KIND_scale and KIND_scale (1 rotor radius, 2 wing span, 3 fuselage length)
kScale_loc	int	from Aircraft%kScale and kScale (component number)
scale	real	reference length

---

FIX = 0:  $x$  calculation depends on component/configuraton; calc SLloc and XoLloc

FIX = 1:  $x$  from SLloc; calc XoLloc

FIX = 2:  $x$  from XoLloc; calc SLloc

---

		Geometry (dimensional, body axes, relative reference point)
x	real	$x$ (+ forward)
y	real	$y$ (+ right)
z	real	$z$ (+ down)

## Chapter 84

**Structure: Weight**

Variable	Type	Description	Default
WE	real	WEIGHT EMPTY	
W_structure	real	STRUCTURE	
W_wing	real	wing group	
W_wing_basic	real	basic structure	
W_wing_secondary	real	secondary structure	
W_wing_fair	real	fairings (not RP8A)	
W_wing_fit	real	fittings (not RP8A)	
W_wing_fold	real	fold/tilt (not RP8A)	
W_wing_control	real	control surfaces	
W_rotor	real	rotor group	
W_rotor_blade	real	blade assembly	
W_rotor_hub	real	hub & hinge	
W_rotor_basic	real	basic (not RP8A)	
W_rotor_shaft	real	inter-rotor shaft (not RP8A)	
W_rotor_fair	real	fairing/spinner (not RP8A)	
W_rotor_fold	real	blade fold (not RP8A)	
W_rotor_supt	real	rotor support structure (not RP8A)	
W_rotor_duct	real	duct (not RP8A)	
W_tail	real	empennage group	
W_Htail	real	horizontal tail (not RP8A)	
W_Htail_basic	real	basic (not RP8A)	
W_Htail_fold	real	fold (not RP8A)	
W_Vtail	real	vertical tail (not RP8A)	
W_Vtail_basic	real	basic (not RP8A)	
W_Vtail_fold	real	fold (not RP8A)	
W_tailrotor	real	tail rotor (not RP8A)	
W_tr_blade	real	blades	
W_tr_hub	real	hub & hinge	

W_tr_supt	real	rotor supports
W_tr_duct	real	rotor/fan duct
W_fuselage	real	fuselage group
W_fus_basic	real	basic (not RP8A)
W_fus_wingfold	real	wing & rotor fold/retraction (not RP8A)
W_fus_tailfold	real	tail fold/tilt (not RP8A)
W_fus_mar	real	marinization (not RP8A)
W_fus_press	real	pressurization (not RP8A)
W_fus_crash	real	crashworthiness (not RP8A)
W_gear	real	alighting gear group
W_gear_basic	real	basic (not RP8A)
W_gear_retract	real	retraction (not RP8A)
W_gear_crash	real	crashworthiness (not RP8A)
W_nacelle	real	engine section or nacelle group
W_nac_engsupt	real	engine support (not RP8A)
W_nac_cowling	real	engine cowling (not RP8A)
W_nac_pylon	real	pylon support (not RP8A)
W_airind	real	air induction group
W_propulsion	real	PROPULSION GROUP
W_engsys	real	engine system
W_engine	real	engine
W_exhaust	real	exhaust system
W_acc	real	accessories (not RP8A)
W_propeller	real	propeller/fan installation
W_prop_blade	real	blades (not RP8A)
W_prop_hub	real	hub & hinge (not RP8A)
W_prop_supt	real	rotor supports (not RP8A)
W_prop_duct	real	rotor/fan duct (not RP8A)
W_fuelsys	real	fuel system
W_fuel_tank	real	tanks and support
W_fuel_plumb	real	plumbing
W_drive	real	drive system
W_drive_box	real	gear boxes
W_drive_xmsn	real	transmission drive

W_drive_rtrsft	real	rotor shaft
W_drive_brake	real	rotor brake (not RP8A)
W_drive_clutch	real	clutch (not RP8A)
W_drive_gas	real	gas drive
W_equip	real	SYSTEMS AND EQUIPMENT
W_ftlcont	real	flight controls group
W_fc_cockpit	real	cockpit controls
W_fc_afcs	real	automatic flight control system
W_fc_system	real	system controls
W_fc_fw	real	fixed wing systems
W_fc_fw_nonboost	real	non-boosted (not RP8A)
W_fc_fw_mech	real	boost mechanisms (not RP8A)
W_fc_rw	real	rotary wing systems
W_fc_rw_nonboost	real	non-boosted (not RP8A)
W_fc_rw_mech	real	boost mechanisms (not RP8A)
W_fc_rw_boost	real	boosted (not RP8A)
W_fc_cv	real	conversion systems
W_fc_cv_nonboost	real	non-boosted (not RP8A)
W_fc_cv_mech	real	boost mechanisms (not RP8A)
W_auxpower	real	auxiliary power group
W_instrument	real	instruments group
W_hydraulic	real	hydraulic group
W_hyd_fw	real	fixed wing (not RP8A)
W_hyd_rw	real	rotary wing (not RP8A)
W_hyd_cv	real	conversion (not RP8A)
W_hyd_eq	real	equipment (not RP8A)
W_pneumatic	real	pneumatic group
W_electrical	real	electrical group
W_elect_aircraft	real	aircraft (not RP8A)
W_elect_deice	real	anti-icing (not RP8A)
W_avionics	real	avionics group (mission equipment)
W_arm	real	armament group
W_armprov	real	armament provisions (not RP8A)
W_armor	real	armor (not RP8A)

W_furnish	real	furnishings & equipment group
W_environ	real	environmental control group
W_deice	real	anti-icing group
W_load	real	load & handling group
W_vib	real	VIBRATION (not RP8A)
W_cont	real	CONTINGENCY
W_fixUL	real	FIXED USEFUL LOAD
W_fixUL_crew	real	crew
W_fixUL_fluid	real	fluids (oil, unusable fuel) (not RP8A)
W_fixUL_auxtank	real	auxiliary fuel tanks
W_fixUL_other	real	other fixed useful load (not RP8A)
W_fixUL_equip	real	equipment increment (not RP8A)
W_fixUL_foldkit	real	folding kit (not RP8A)
W_fixUL_extkit	real	wing extension kit (not RP8A)
W_fixUL_wingkit	real	wing kit (not RP8A)
W_fixUL_otherkit	real	other kit (not RP8A)
Wpayload	real	PAYLOAD
Wfuel	real	USABLE FUEL
Wfuel_std	real	standard tanks (not RP8A)
Wfuel_aux	real	auxiliary tanks (not RP8A)
Wscaled	real	scaled weight (sum all K=3 in operating weight)
Wfixed	real	fixed weight (sum all K=2 in operating weight)
Wfeature	real	military features in empty weight
WO	real	OPERATING WEIGHT = weight empty + fixed useful load
WUL	real	USEFUL LOAD = fixed useful load + payload + usable fuel
GW	real	GROSS WEIGHT = weight empty + useful load = operating weight + payload + usable fuel

---

follows SAWE RP8A Group Weight Statement, except as noted  
typical only lowest elements of hierarchy specified, others obtained by summation

set status flag when define weight  
can define weights (k=2 or 3) at any level, ignore child weights if not lowest level  
when print weight statement, designate all fixed (ie input) quantities

## usage:

set all W=K=0; put W, with K=2 or 3

then fill structure: if K=0 and some child defined/sum, then  $W=\sum(\text{child})$  and K=1  
 addition or increment sums all elements, with status Kt of total as follows

	Ka =	0	1	2	3
Kb = 0		0	1	2	3
Kb = 1		1	1	3	3
Kb = 2		2	3	2	3
Kb = 3		3	3	3	3

KE	int	Status (0 none; 1 sum of child; 2 defined, fixed (input); 3 defined, not fixed (scaled, wt eq; or composite))
K_structure	int	WEIGHT EMPTY
K_wing	int	STRUCTURE
K_wing_basic	int	wing group
K_wing_secondary	int	basic structure
K_wing_fair	int	secondary structure
K_wing_fit	int	fairings (not RP8A)
K_wing_fold	int	fittings (not RP8A)
K_wing_control	int	fold/tilt (not RP8A)
K_rotor	int	control surfaces
K_rotor_blade	int	rotor group
K_rotor_hub	int	blade assembly
K_rotor_basic	int	hub & hinge
K_rotor_shaft	int	basic (not RP8A)
K_rotor_fair	int	inter-rotor shaft (not RP8A)
K_rotor_fold	int	fairing/spinner (not RP8A)
K_rotor_supt	int	blade fold (not RP8A)
K_rotor_duct	int	rotor support structure (not RP8A)
K_tail	int	duct (not RP8A)
K_Htail	int	empennage group
		horizontal tail (not RP8A)

K_Htail_basic	int	basic (not RP8A)
K_Htail_fold	int	fold (not RP8A)
K_Vtail	int	vertical tail (not RP8A)
K_Vtail_basic	int	basic (not RP8A)
K_Vtail_fold	int	fold (not RP8A)
K_tailrotor	int	tail rotor (not RP8A)
K_tr_blade	int	blades
K_tr_hub	int	hub & hinge
K_tr_supt	int	rotor supports
K_tr_duct	int	rotor/fan duct
K_fuselage	int	fuselage group
K_fus_basic	int	basic (not RP8A)
K_fus_wingfold	int	wing & rotor fold/retraction (not RP8A)
K_fus_tailfold	int	tail fold/tilt (not RP8A)
K_fus_mar	int	marinization (not RP8A)
K_fus_press	int	pressurization (not RP8A)
K_fus_crash	int	crashworthiness (not RP8A)
K_gear	int	alighting gear group
K_gear_basic	int	basic (not RP8A)
K_gear_retract	int	retraction (not RP8A)
K_gear_crash	int	crashworthiness (not RP8A)
K_nacelle	int	engine section or nacelle group
K_nac_engsupt	int	engine support (not RP8A)
K_nac_cowling	int	engine cowling (not RP8A)
K_nac_pylon	int	pylon support (not RP8A)
K_airind	int	air induction group
K_propulsion	int	PROPULSION GROUP
K_engsys	int	engine system
K_engine	int	engine
K_exhaust	int	exhaust system
K_acc	int	accessories (not RP8A)
K_propeller	int	propeller/fan installation
K_prop_blade	int	blades (not RP8A)
K_prop_hub	int	hub & hinge (not RP8A)

K_prop_supt	int	rotor supports (not RP8A)
K_prop_duct	int	rotor/fan duct (not RP8A)
K_fuelsys	int	fuel system
K_fuel_tank	int	tanks and support
K_fuel_plumb	int	plumbing
K_drive	int	drive system
K_drive_box	int	gear boxes
K_drive_xmsn	int	transmission drive
K_drive_rtrsft	int	rotor shaft
K_drive_brake	int	rotor brake (not RP8A)
K_drive_clutch	int	clutch (not RP8A)
K_drive_gas	int	gas drive
K_equip	int	SYSTEMS AND EQUIPMENT
K_fltcont	int	flight controls group
K_fc_cockpit	int	cockpit controls
K_fc_afcs	int	automatic flight control system
K_fc_system	int	system controls
K_fc_fw	int	fixed wing systems
K_fc_fw_nonboost	int	non-boosted (not RP8A)
K_fc_fw_mech	int	boost mechanisms (not RP8A)
K_fc_rw	int	rotary wing systems
K_fc_rw_nonboost	int	non-boosted (not RP8A)
K_fc_rw_mech	int	boost mechanisms (not RP8A)
K_fc_rw_boost	int	boosted (not RP8A)
K_fc_cv	int	conversion systems
K_fc_cv_nonboost	int	non-boosted (not RP8A)
K_fc_cv_mech	int	boost mechanisms (not RP8A)
K_auxpower	int	auxiliary power group
K_instrument	int	instruments group
K_hydraulic	int	hydraulic group
K_hyd_fw	int	fixed wing (not RP8A)
K_hyd_rw	int	rotary wing (not RP8A)
K_hyd_cv	int	conversion (not RP8A)
K_hyd_eq	int	equipment (not RP8A)

K_pneumatic	int	pneumatic group
K_electrical	int	electrical group
K_elect_aircraft	int	aircraft (not RP8A)
K_elect_deice	int	anti-icing (not RP8A)
K_avionics	int	avionics group (mission equipment)
K_arm	int	armament group
K_armprov	int	armament provisions (not RP8A)
K_armor	int	armor (not RP8A)
K_furnish	int	furnishings & equipment group
K.environ	int	environmental control group
K_deice	int	anti-icing group
K_load	int	load & handling group
K_vib	int	VIBRATION (not RP8A)
K_cont	int	CONTINGENCY
K_fixUL	int	FIXED USEFUL LOAD
K_fixUL_crew	int	crew
K_fixUL_fluid	int	fluids (oil, unusable fuel) (not RP8A)
K_fixUL_auxtank	int	auxiliary fuel tanks
K_fixUL_other	int	other fixed useful load (not RP8A)
K_fixUL_equip	int	equipment increment (not RP8A)
K_fixUL_foldkit	int	folding kit (not RP8A)
K_fixUL_extkit	int	wing extension kit (not RP8A)
K_fixUL_wingkit	int	wing kit (not RP8A)
K_fixUL_otherkit	int	other kit (not RP8A)
Kpayload	int	PAYOUTLOAD
Kfuel	int	USABLE FUEL
Kfuel_std	int	standard tanks (not RP8A)
Kfuel_aux	int	auxiliary tanks (not RP8A)
KO	int	OPERATING WEIGHT = weight empty + fixed useful load
KUL	int	USEFUL LOAD = fixed useful load + payload + usable fuel
KGW	int	GROSS WEIGHT = weight empty + useful load = operating weight + payload + usable fuel