



ORSAT Modelling and Assessment

Chris Ostrom* & Chris Sanchez^x

***HX5**

^xERC

NASA Orbital Debris Program Office

4th International Workshop on Space Debris Reentry,
Darmstadt, 1 March 2018



Outline

- **ORSAT Models**
 - Aerodynamics
 - Aerothermodynamics
 - Trajectory
 - Heat transfer & conduction
 - Casualty Area
 - Risk calculation

- **ORSAT Assessment Workflow**
 - Fragment list
 - Input generation
 - Input visualization
 - Running ORSAT
 - Reconciling independent analyses

- **Conclusions and Future Work**



ORSAT Overview

- ORSAT has six modules (trajectory, atmosphere, aerodynamics, aerothermodynamics, thermal, debris casualty area/risk)
- Basic method of input is to obtain trajectory data at entry interface and component data (dimensions, mass, & material) before starting analysis
- Central theme is that integrated heat load or absorbed heat is computed over time during entry; when this value exceeds material heat of ablation, object is considered to demise
- If object survives, ORSAT predicts debris casualty area and risk to humans on ground
- Parent body breakup altitude is assumed (normally 78 km - based on Aerospace observations) but can be varied



ORSAT Overview (Cont'd.)

- **Aerothermal, ablation-only code**
- **Conventional material models**
 - Currently no charring, cracking, or pyrolysis modules



ORSAT Overview (Cont'd.)

- Hierarchy of components is critical to input
- Components are modelled using a set of 10 shape primitives and 80+ aerospace materials
- Key output in ORSAT analysis is plot of demise altitude vs. downrange of all components
- Sample plot of sample spacecraft component demise altitudes shown in next slides
- For targeted entry, ORSAT can provide ground track of latitude vs. longitude



Preprocessing

- Automatic generation of ORSAT input file from parts list
- Color coding by 'demise score'
- Non-standard materials easily incorporated

Microsoft Excel screenshot showing a parts list with columns for Name, Aero Mass, Material, Body Type, Thermal Mass, Diameter/Width, Length, Height, Thickness, Nodes, and Quantity. The data is color-coded by 'demise score' (Normal, Bad, Good, Neutral, Calculation, Check Cell, Explanatory, Input, Linked Cell, Note).

1	Name	Aero Mass	Material	Body Type	Thermal Mass	Diameter/Width	Length	Height	Thickness	Nodes	Quantity	L	M	N	O	P	Q	R	S	T	U	V	W	
2	Humphrey	11.976	Aluminum (generic)	Box	11.976	0.200	0.300	0.200	0.016	23	1													
3	Battery Box	0.500	Aluminum (generic)	Box	1.511	0.090	0.120	0.060	0.019	29	1													
4	Battery	0.048	Stainless Steel (generic)	Cylinder	0.048	0.019	0.065		0.002	2	15													
5	Telescope	1.000	Aluminum 7075-T6	Cylinder	1.000	0.080	0.150		0.011	16	2													
6	Lens	0.110	ULE Glass (Corning 7971)	Flat Plate	0.000	0.080	0.080			1	2													
7	Electronics radiator	0.043	Steel AISI 304	Box	0.043	0.050	0.050	0.002	0.001	1	1													
8	Motherboard	0.200	Fiberglass	Flat Plate	0.000	0.150	0.200			1	3													
9	Solar Cell 1	0.100	GaAs	Flat Plate	0.000	0.200	0.300			1	1													
10	Solar Cell 2	0.067	GaAs	Flat Plate	0.000	0.200	0.200			1	1													
11	Solar Cell 3	0.050	GaAs	Flat Plate	0.000	0.100	0.300			1	1													
12	Rxn Wheel	0.100	Lead Element	Cylinder	0.100	0.076	0.025		0.001	2	4													
13	Coolant Tank	0.080	Aluminum 6061-T6	Sphere	0.080	0.095			0.001	1	1													
14	Coolant	0.500	Water	Sphere	0.000	0.090				1	1													
15	Cold Gas Tank	0.600	Stainless Steel (generic)	Sphere	0.600	0.095			0.003	4	2													
16	Piping	0.068	Aluminum (generic)	Cylinder	0.068	0.020	0.100		0.006	8	4													
17																								





Input Visualization

- New visualization tool allows us to see what ORSAT thinks each object looks like (in piece-by-piece view):

```

Command Prompt - more inputin
0  IBOATCH
0  IFAVRID
1  IAIMOS
0  IEMG
-----
62  NPRAG
Spacecraft structure
ITYPEF
3  NNODF
1  KRORXP
1  NMAIF
3  INNF
8 0 0 0  IMATF
0.189  ROPF
0.1867494%  RIF
1.14  DAEROF
1.14  DHERIF
0.802  LAEROF
0.802  LHERIF
0.378  HAEROF
0.378  HHERIF
29.61  MASSF
0  THMASSF
78000  ASTARIF
9999  ISTOPF
1  THM
1  IOS
1  IRR
0  IRAD
1  FACT
0.5  TAU
500  TINIT
-----
Spacecraft top deck
9  ITYPEF
1  NNODF
- More (4%) -
    
```

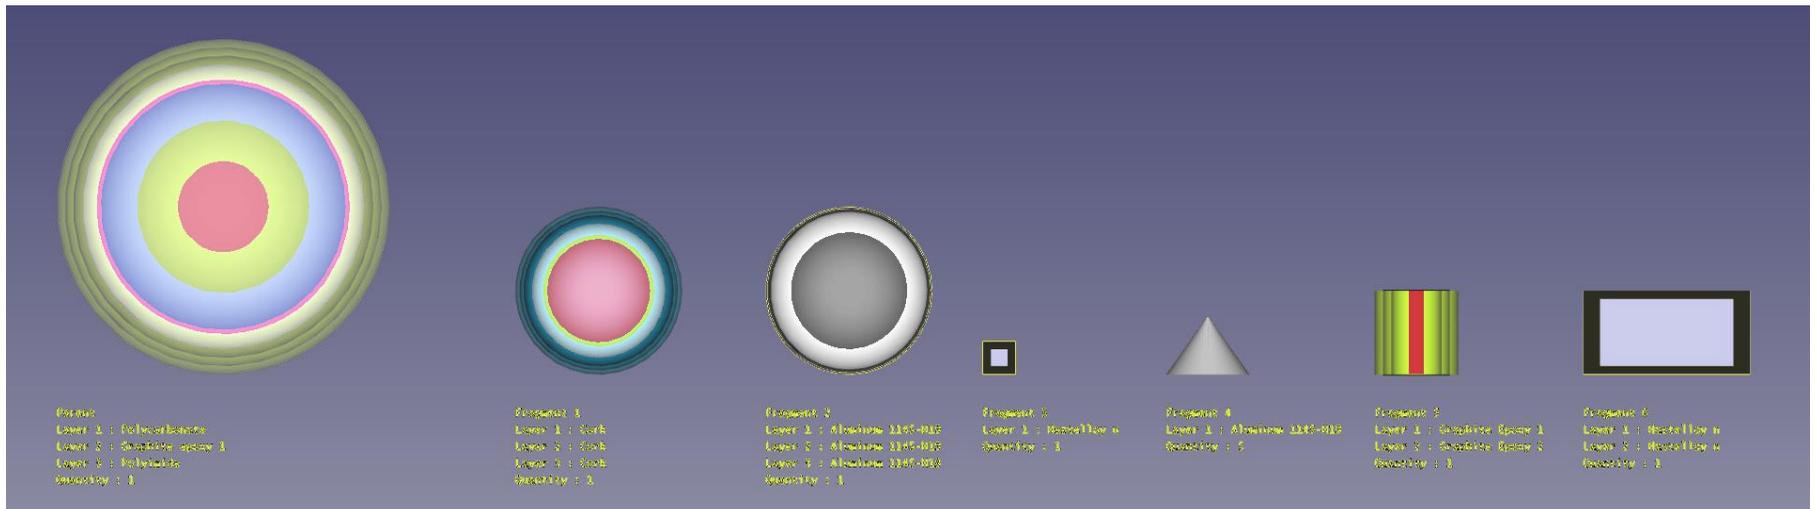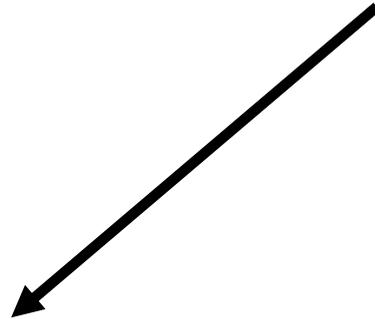



Running ORSAT

- **Standard initial conditions are used to begin simulation**
 - 0.1-deg. FPA at 122 km reentry interface
 - 78 km breakup altitude for parent objects
- **Objects propagated until demise or ground impact**
- **Fragments that show low-altitude demise, or high total thermal load typically re-run, varying initial conditions to determine most likely outcome**




Independent Analyses

- **Each ORSAT project is assessed by two analysts**
 - End-to-end independent analysis to ensure most accurate outcome

- **Results are compared, differences reconciled, and finalized**
 - Modelling assumptions challenged and defended
 - Analyzed geometry examined for similarity to as-built components
 - Any differences and rationale are archived for future review and reference



Demise Altitude vs. Downrange for Example Spacecraft

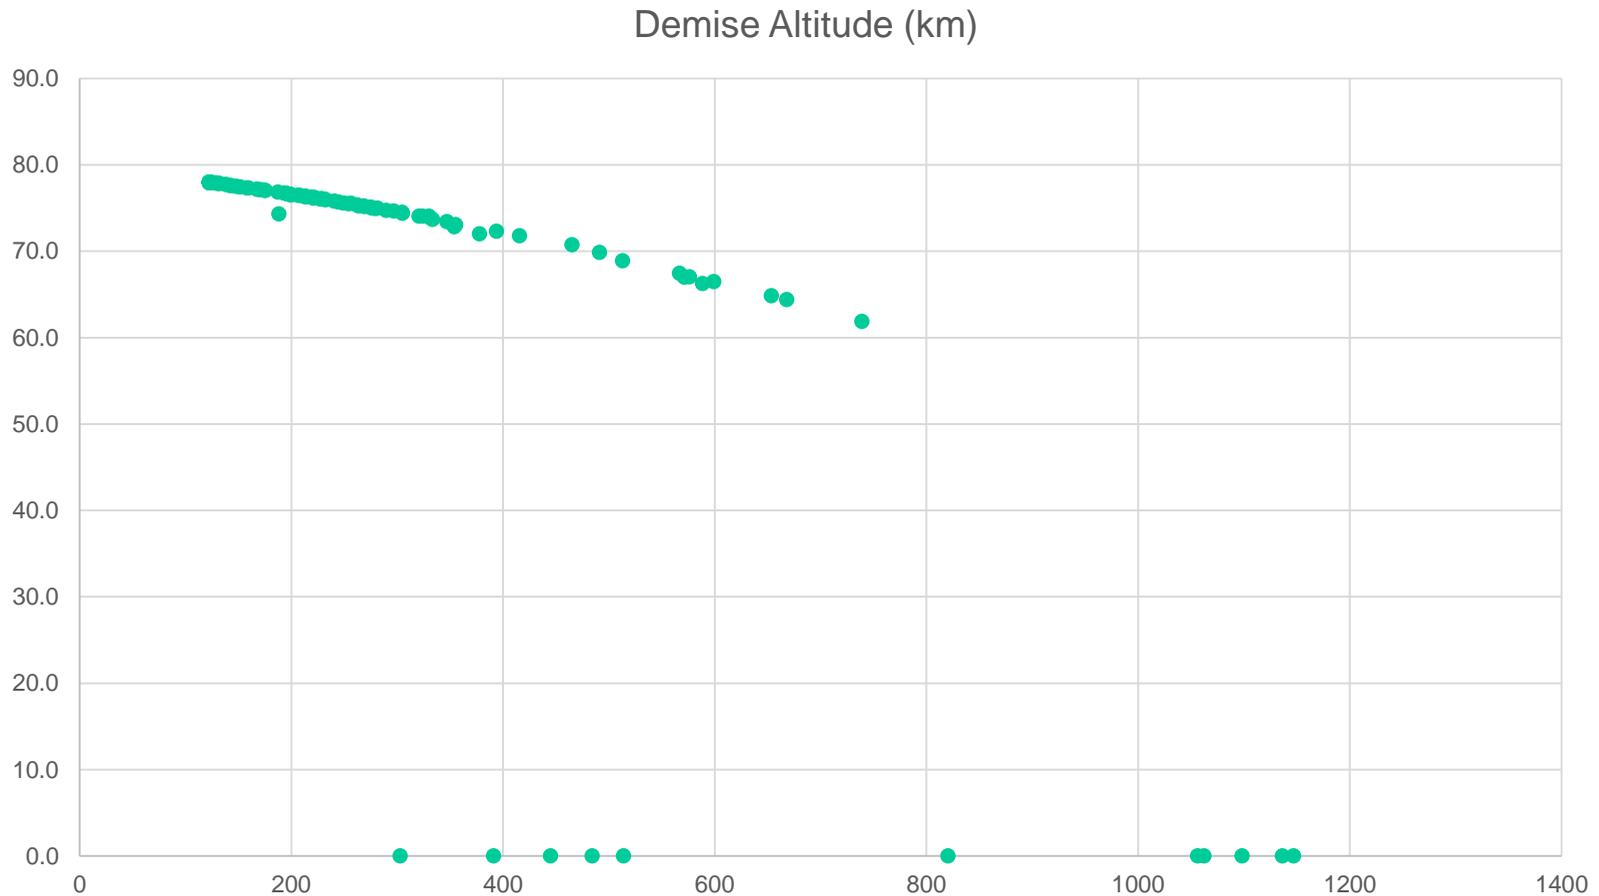



Future Work

- **ORSAT and DAS updates**
 - Updated NS 8719.14, Process for Limiting Orbital Debris
 - **Currently under revision by NASA**
 - Increased automation of ORSAT process
 - **Develop database of sample object reentries to estimate likelihood of survival prior to any analysis**
 - Probabilistic risk assessment and Parametric Studies



Future Work (Cont'd.)

- **Adding new aerospace materials to database**
- **Continue Latitude Bias research**
 - Distribution of FPA at entry interface
- **New CFRP and GFRP model development**
 - Supported by plasma and arcjet testing in 2018
- **Characterizing high-altitude pyrolysis effects**

