



Exploration of Double Clad Fibers for Increased Stability of Bidirectional Free Space Optical Links

Sarah Tedder, Bryan Schoenholz

NASA Glenn Research Center


Joel Berkson

The University of Arizona

Bertram Floyd

Sierra Lobo

1/30/2018




Motivation

Motivation: Free space optical links are needed for space and aeronautic communication applications that are:

- Bidirectional and simultaneous (full duplex)
- high data rate
- low size, weight, and power (SWaP)
- low cost

Challenge: pointing the laser beam with enough accuracy to create a high speed link. Commonly solved by components that:

- Increase cost
- Increase SWaP



Introduction

Goals:

- Eliminate/reduce active components (gimbals, amplifiers, etc.)
 - Strategy: Increase field of view to reduce pointing accuracy requirements
- Reduce the amount of optical components
 - Strategy: Share the optical transmit and receive paths

Application Focus: FSOL with fiber coupled detectors


- Fiber numerical aperture is the main driver of the pointing accuracy

Double Clad Fibers (DCF): potential to implement both strategies


- Compared performance to other fibers in 20 meter FSOL
 - Reduced pointing accuracy requirement
 - Improved received power stability




Double Clad Fibers

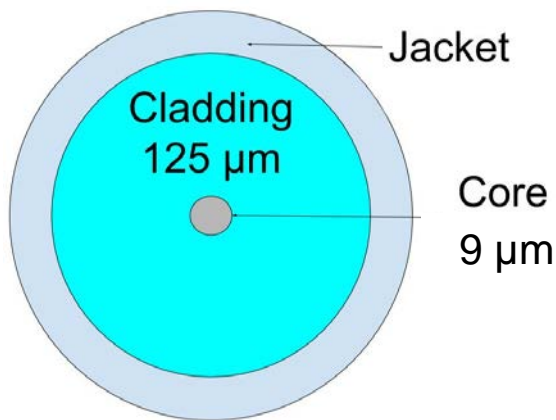

Single Mode Fiber

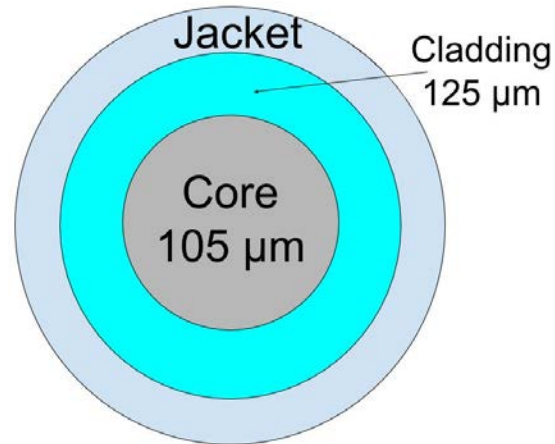

Multi Mode Fiber

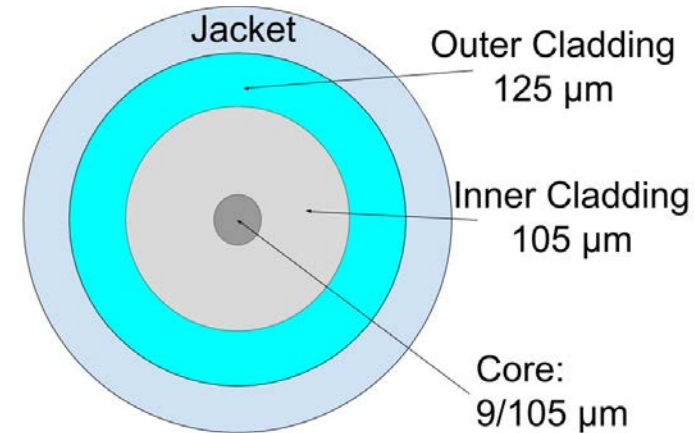


Double Clad Fiber

Double Clad fiber can transmit from a single mode fiber and receive through a multimode fiber.


Enables both:

- Increase receive fiber core \rightarrow improved field of view
- Smooth transmit profile \rightarrow improved received power stability

Experimental Setup: Pointing Accuracy Tolerance

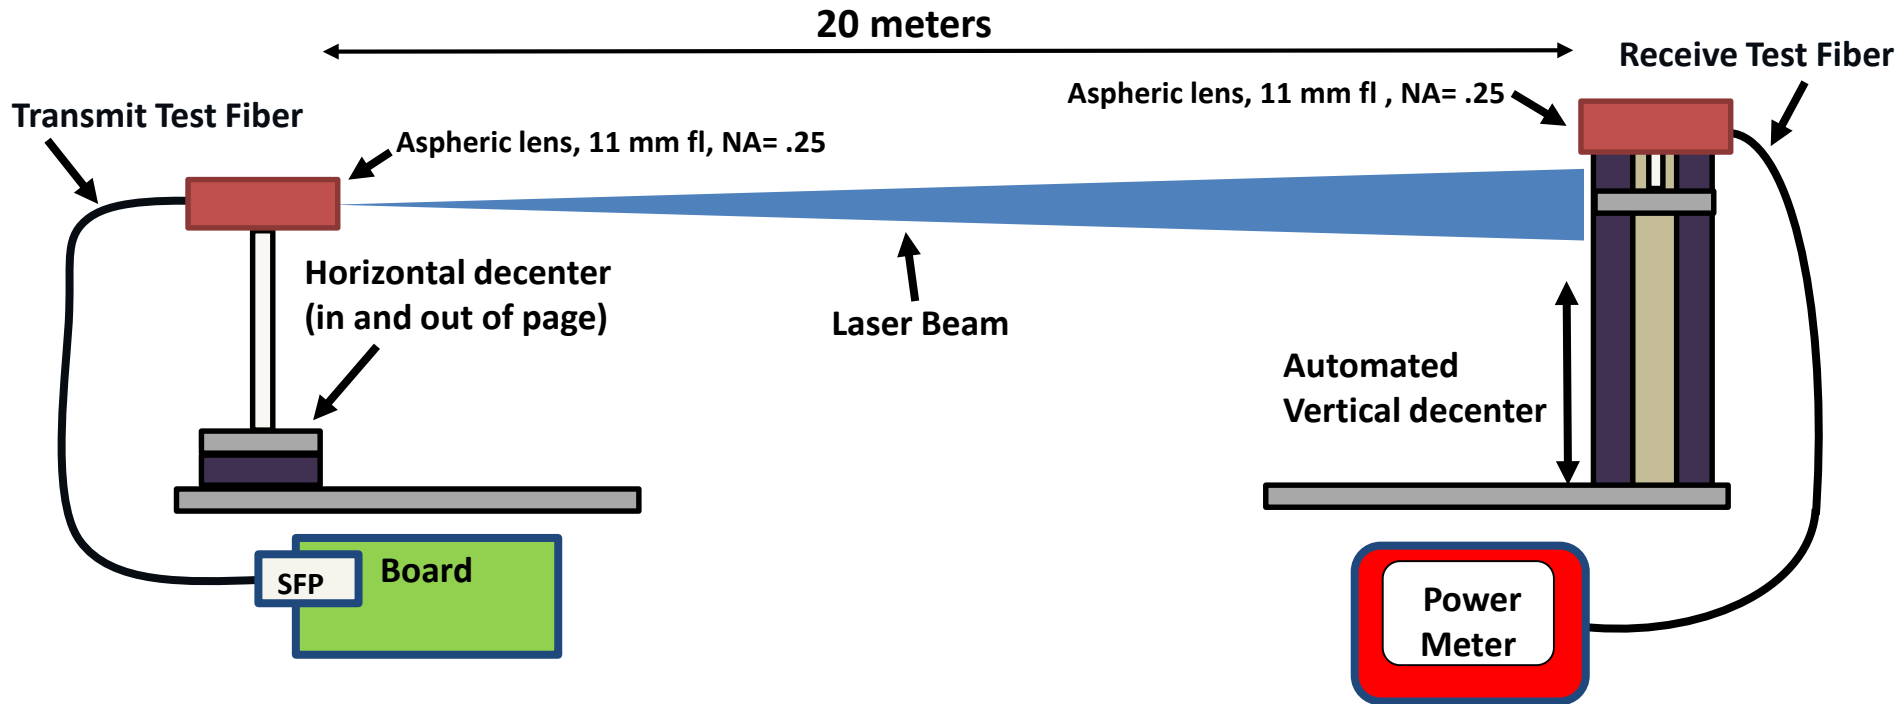


Data collection

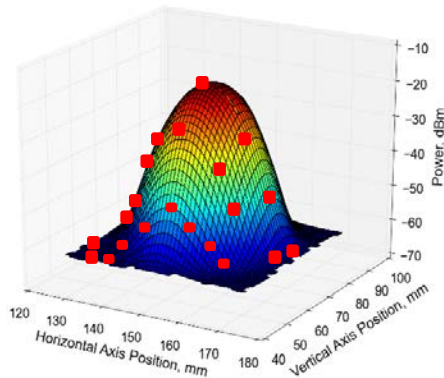

Data Analysis

Cross Section at peak power

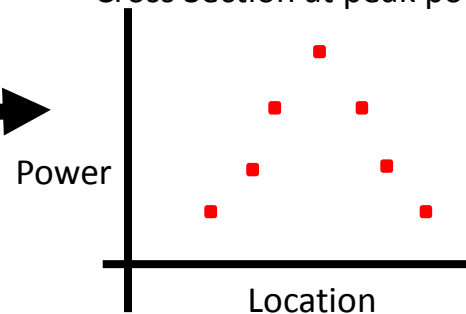




Definition of Pointing Accuracy Tolerance





Lateral misalignment tolerance (*Pointing Accuracy Tolerance*)= distance over which received power is above threshold for error-free link

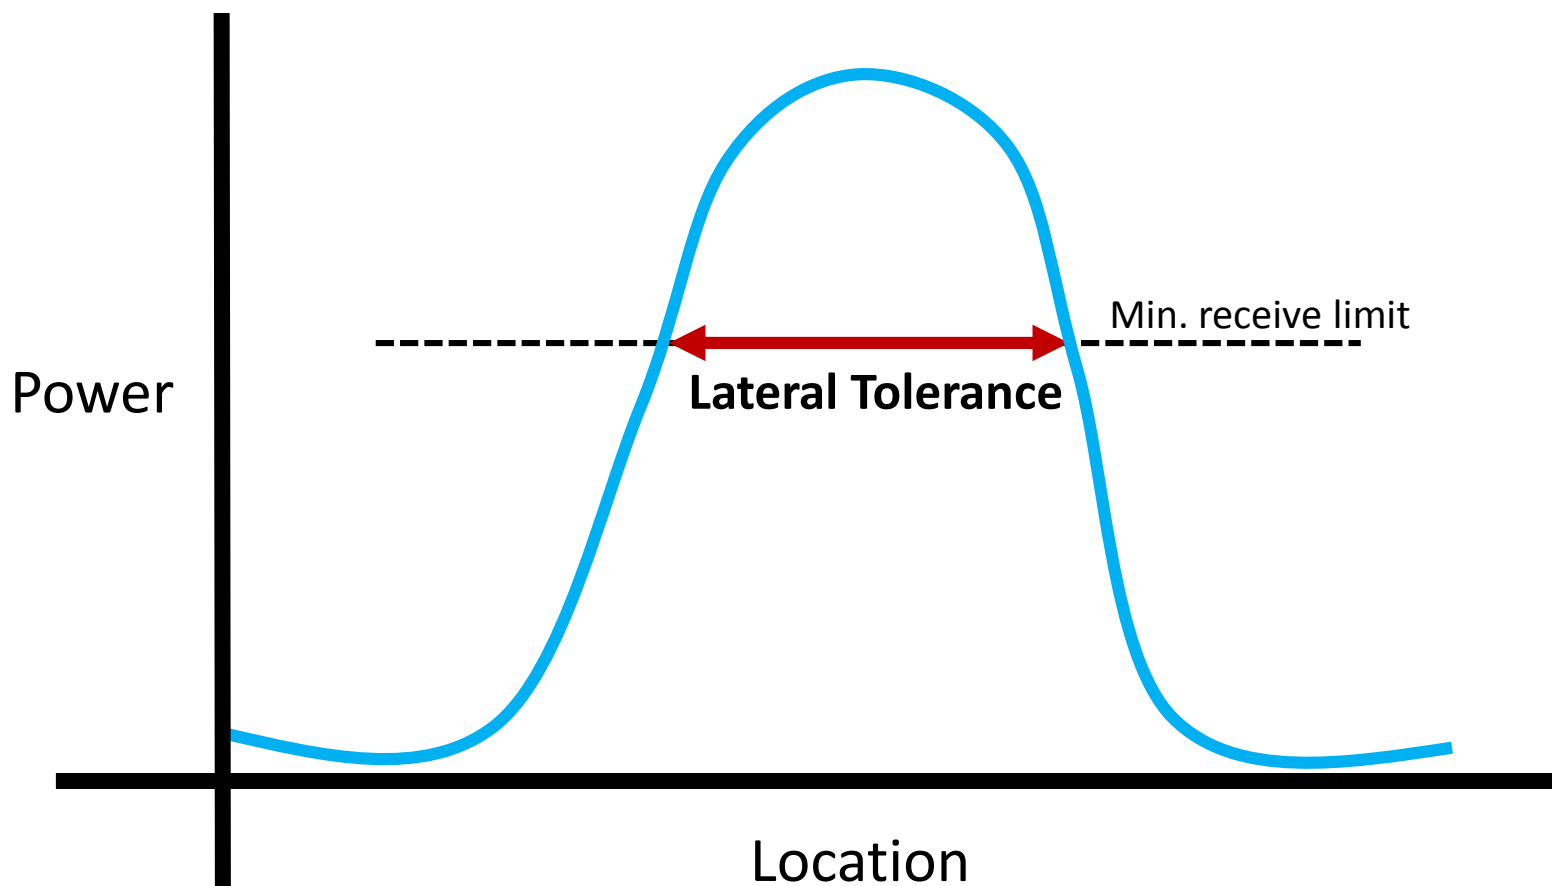




Background

Larger Core \rightarrow Reduces Pointing Requirement

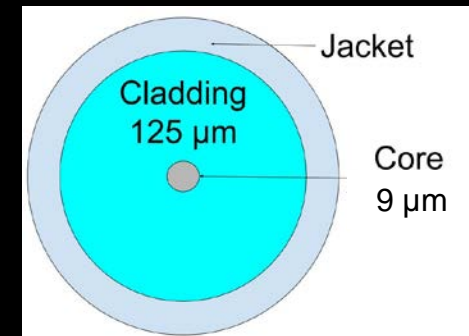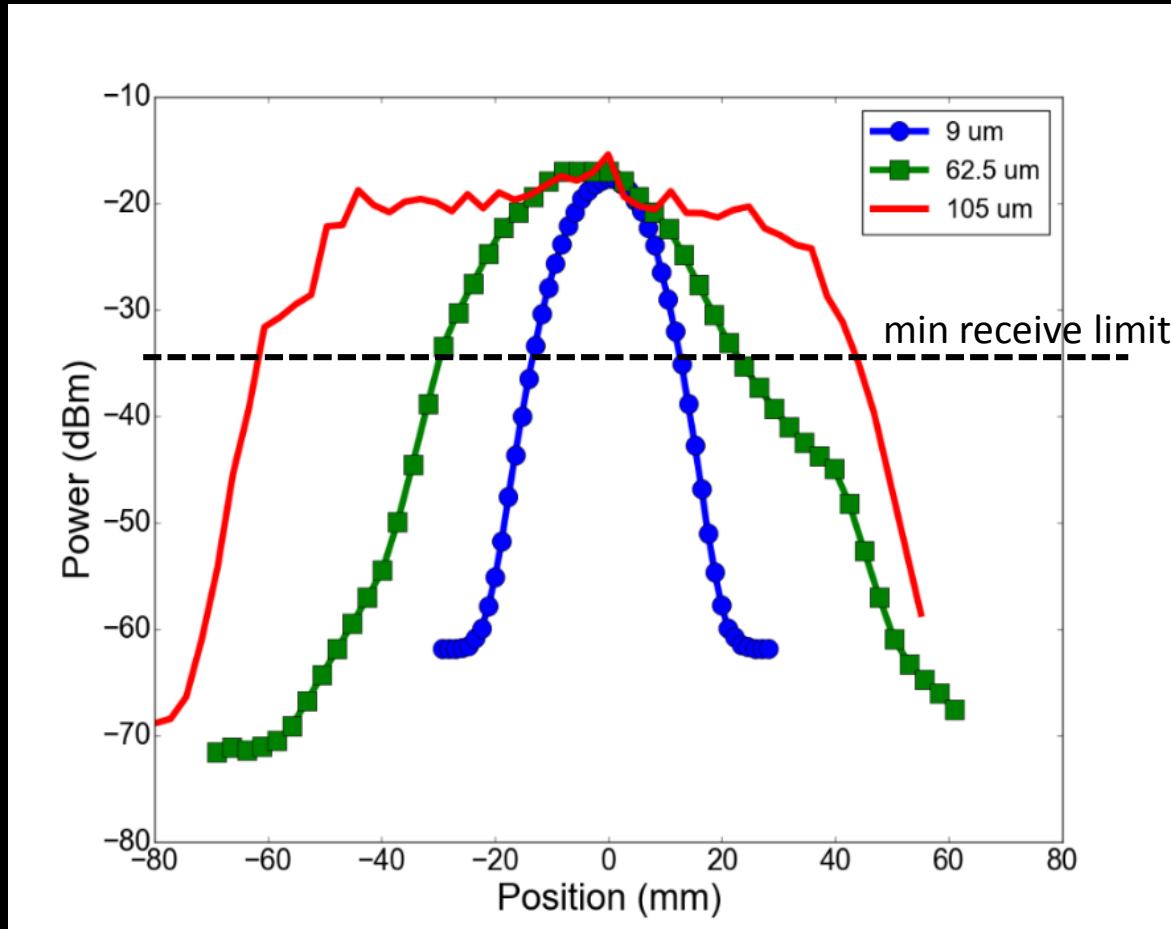

Single Mode Fiber (SMF)

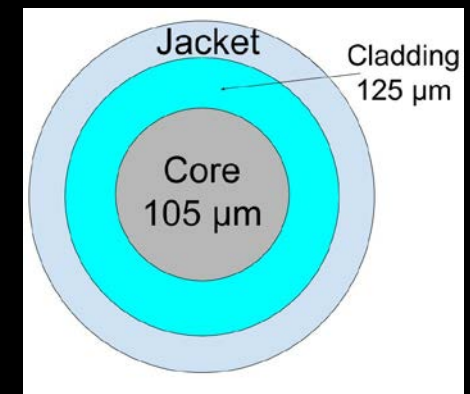


105 μm Mode Fiber

Increasing core fiber \rightarrow increases the field of view \rightarrow increases the pointing accuracy tolerance




Pointing Accuracy Tolerance of Double Clad Fibers

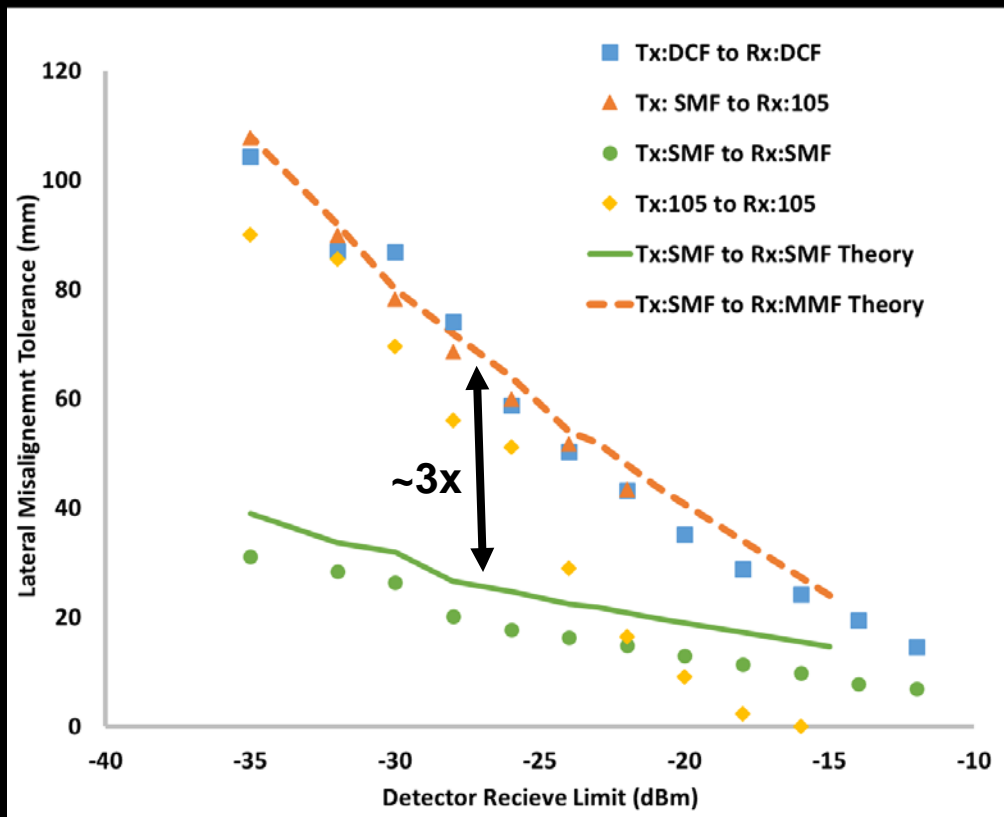


DCF to DCF lateral misalignment tolerance:

- 3 times > SMF to SMF at -22 dBm
- > 105 micron to 105 micron
- = SMF transmitting to a 105 micron

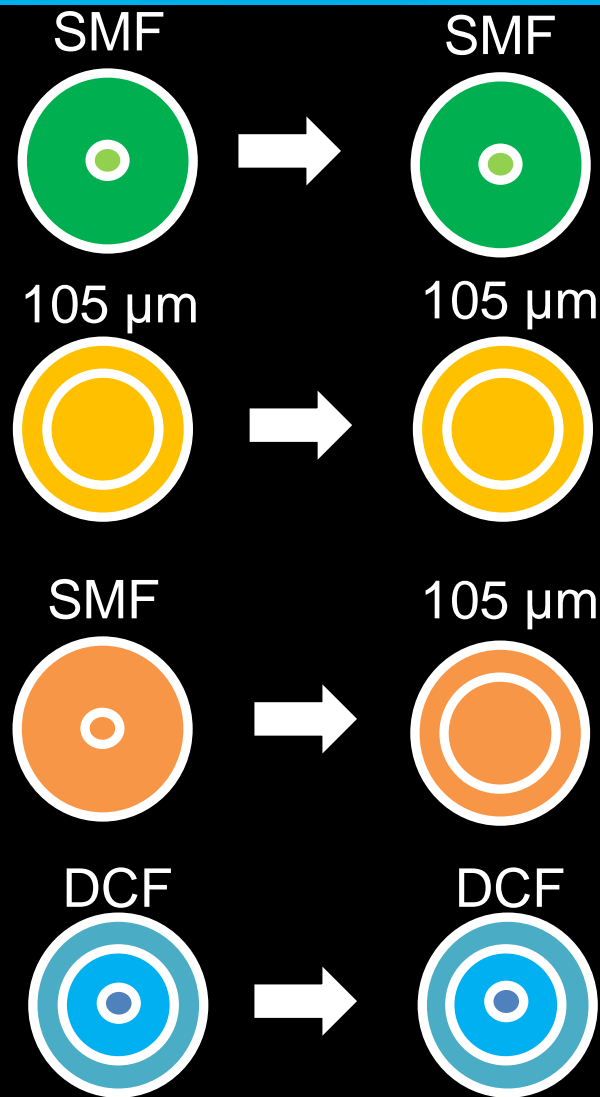





Experimental Setup: Received Power Stability due to Small Environmental Changes

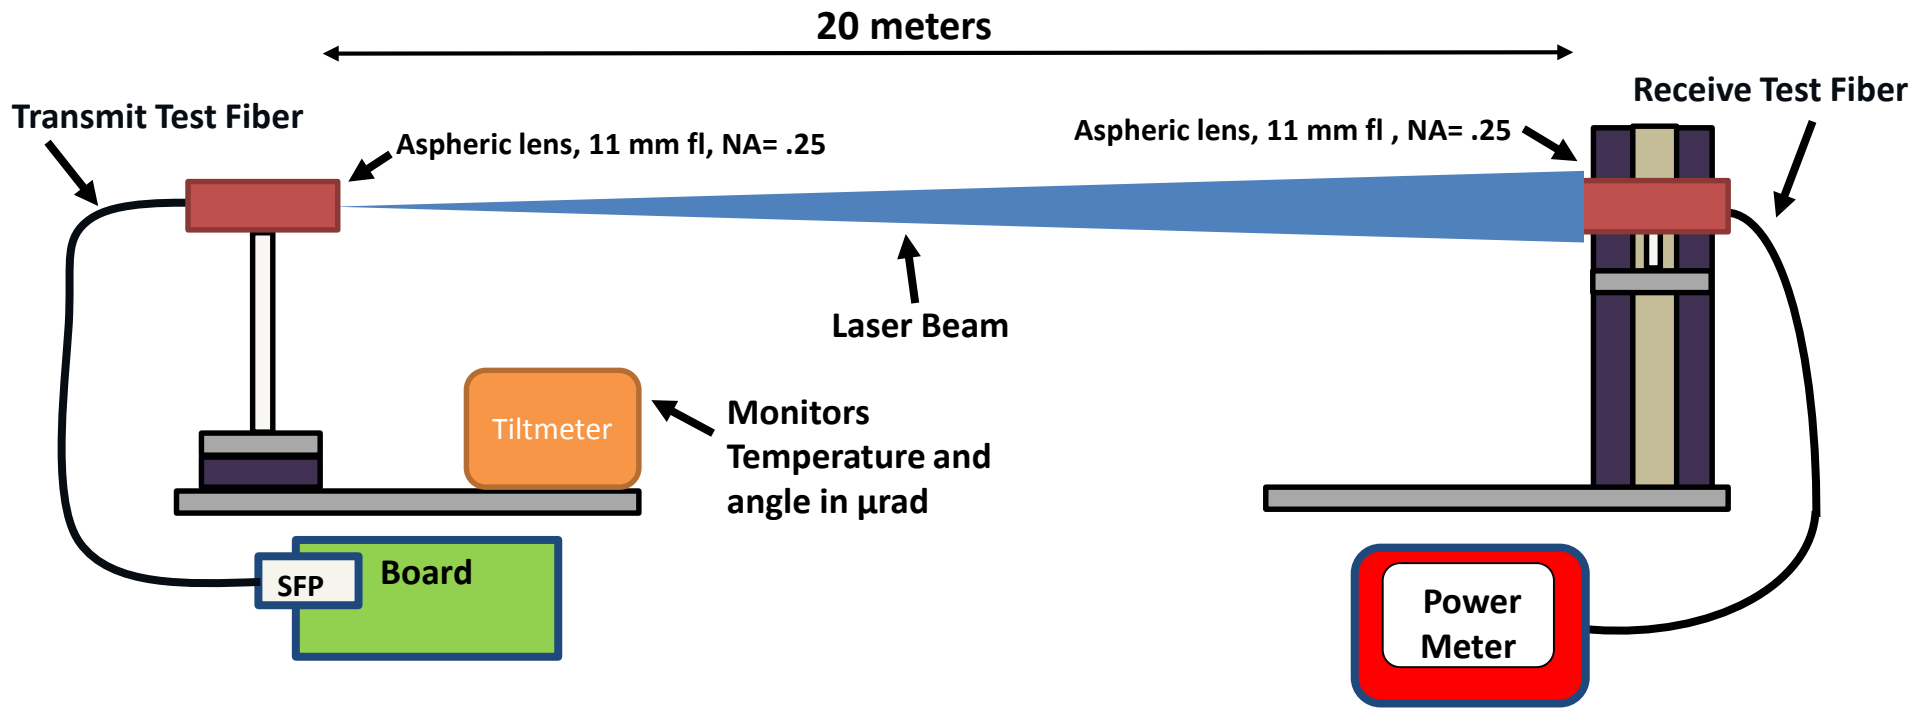

Data collection

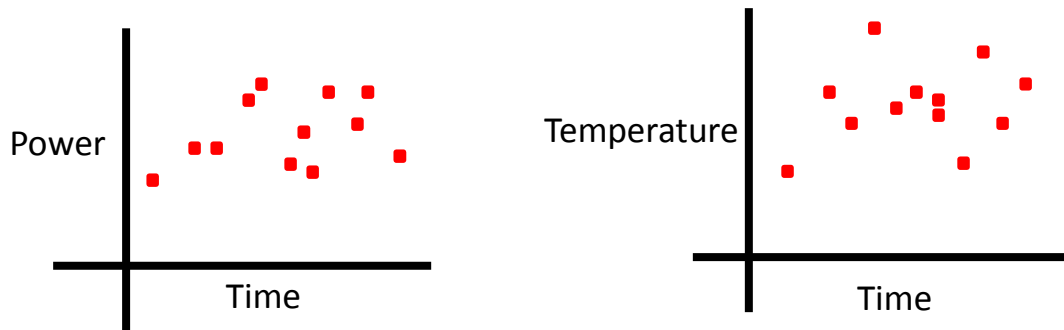


Data Analysis

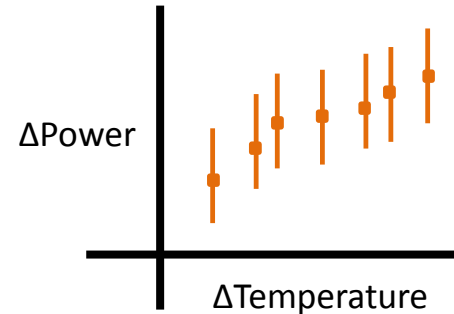



Background

Larger Transmit Core \rightarrow Lower Received Power Stability

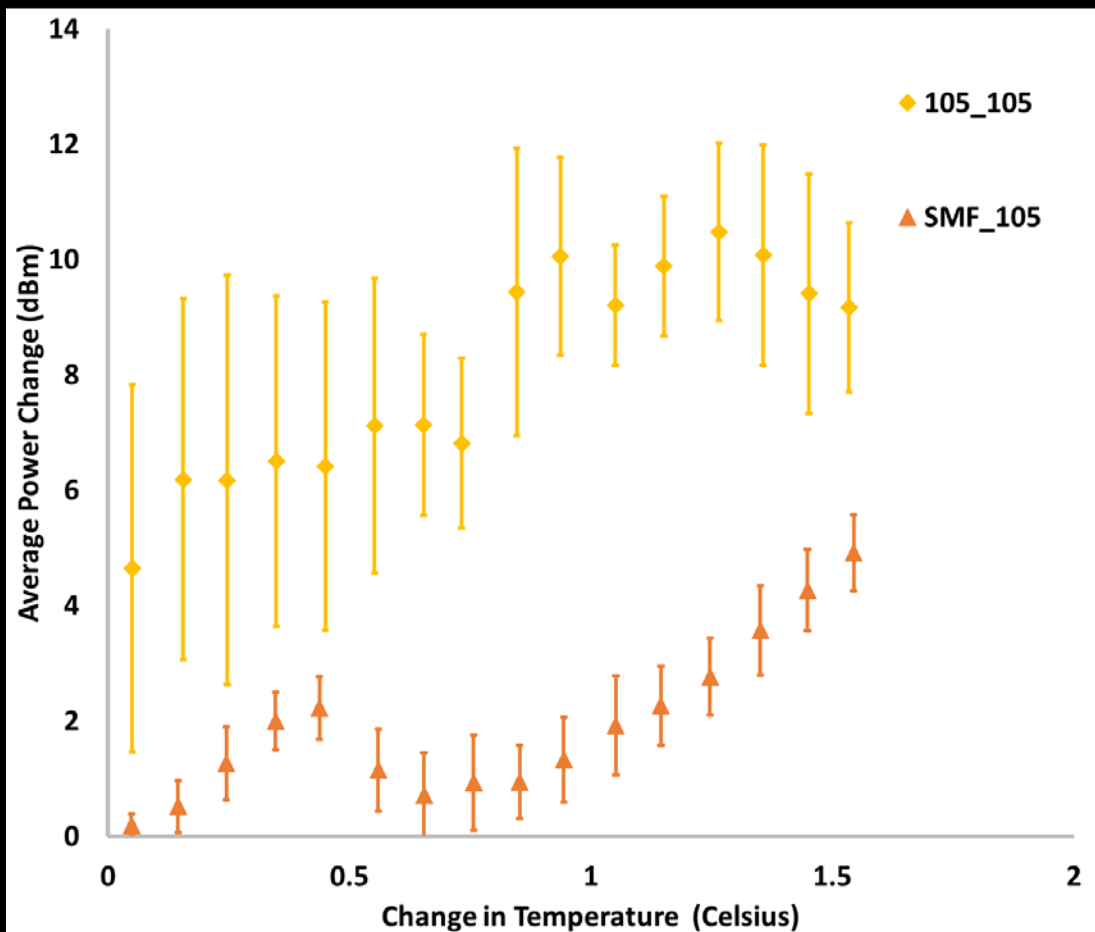

Transmit

105 μ m



SMF



Recieve

105 μ m



105 μ m




When the transmit fiber core is increased small environmental changes have a larger effect on the received power.




Because...

the transmitted beam profile

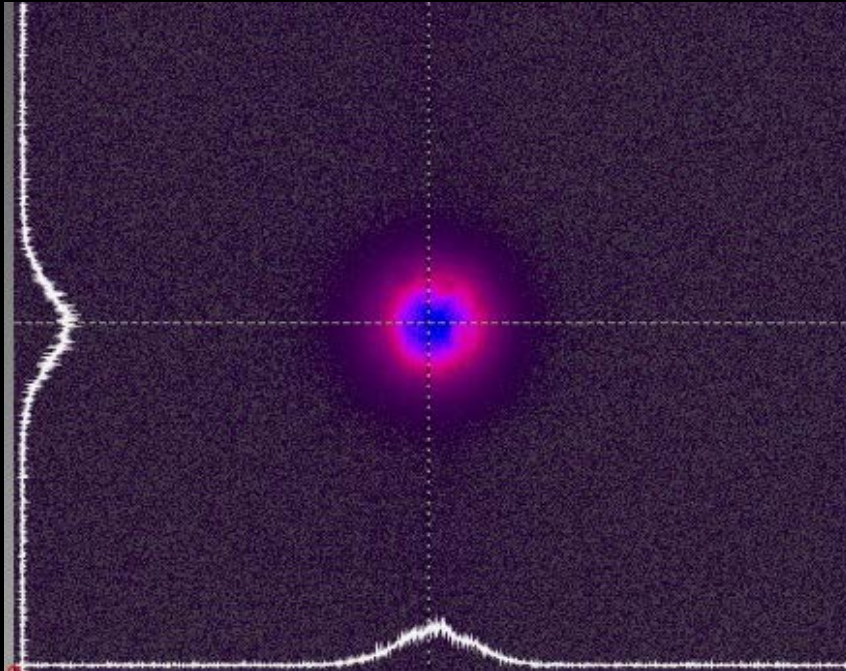

Single Mode Fiber Transmitted Profile

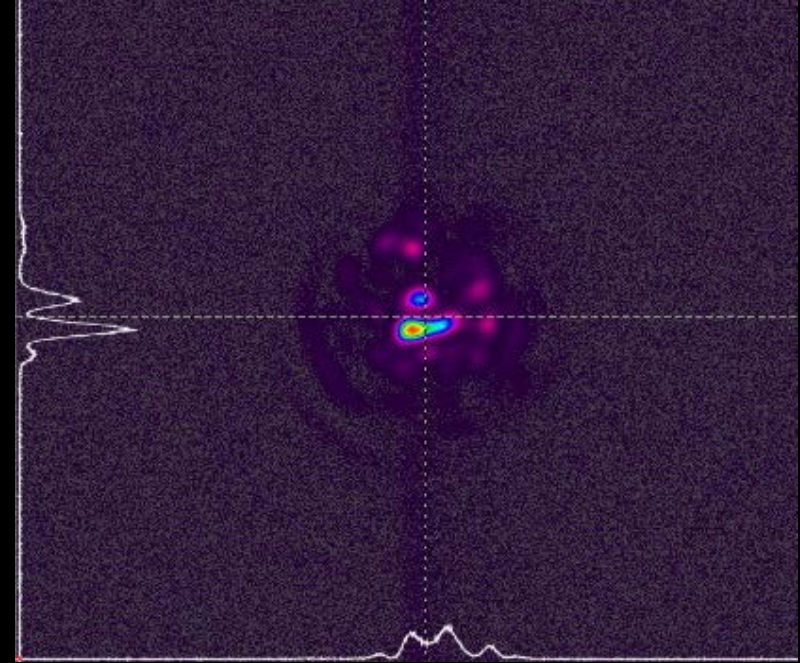


Multi Mode Fiber Transmitted Profile


Transmitted beam profile of MMF has many hills and valleys causing small changes in alignment to produced large changes in received power.



DCF transmitted beam profile

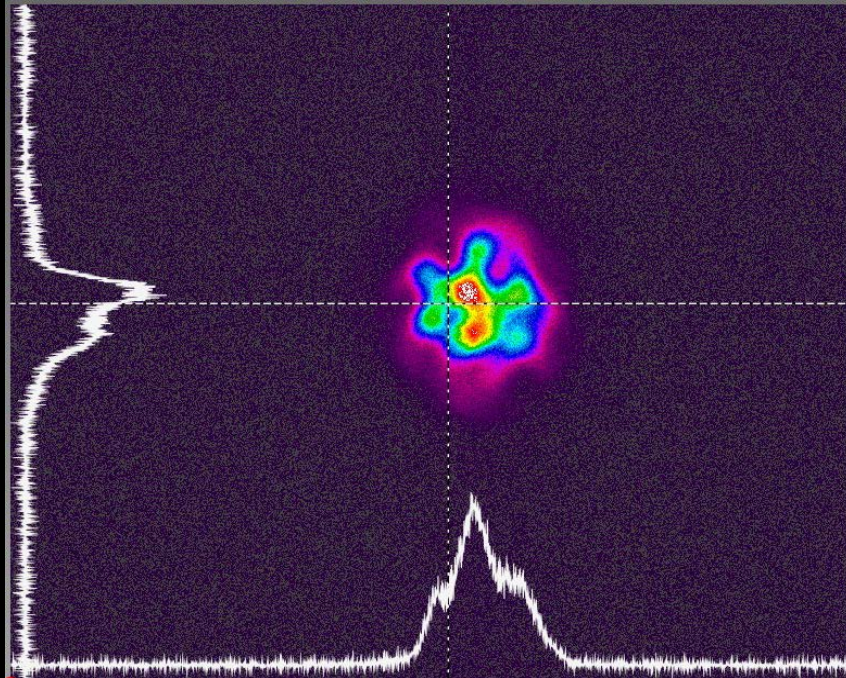

Double Clad Fiber Transmitted Profile

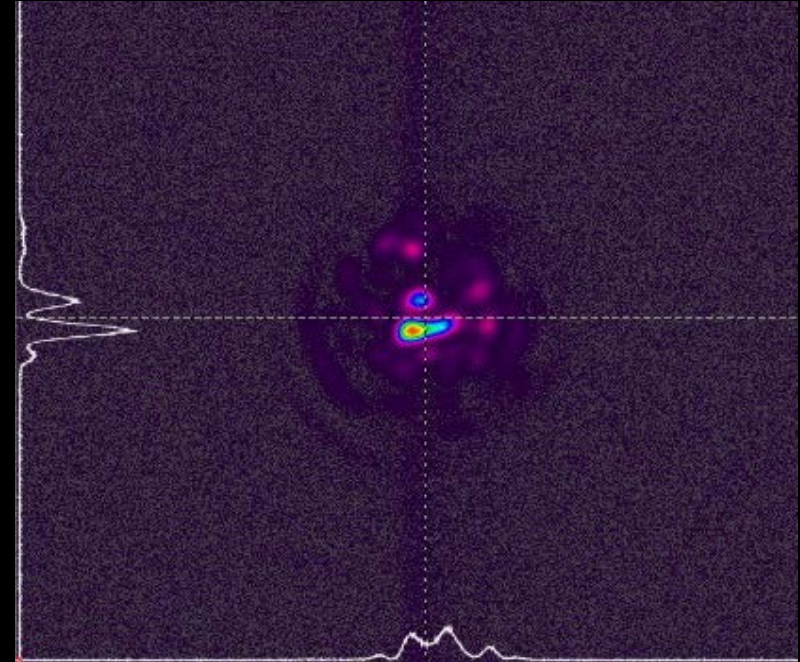

Multi Mode Fiber Transmitted Profile


Transmitted beam profile of DCF is close to the SMF and has much less hills and valleys than the MMF .




Received Power Stability of Double Clad Fibers



Effect of temperature on received power

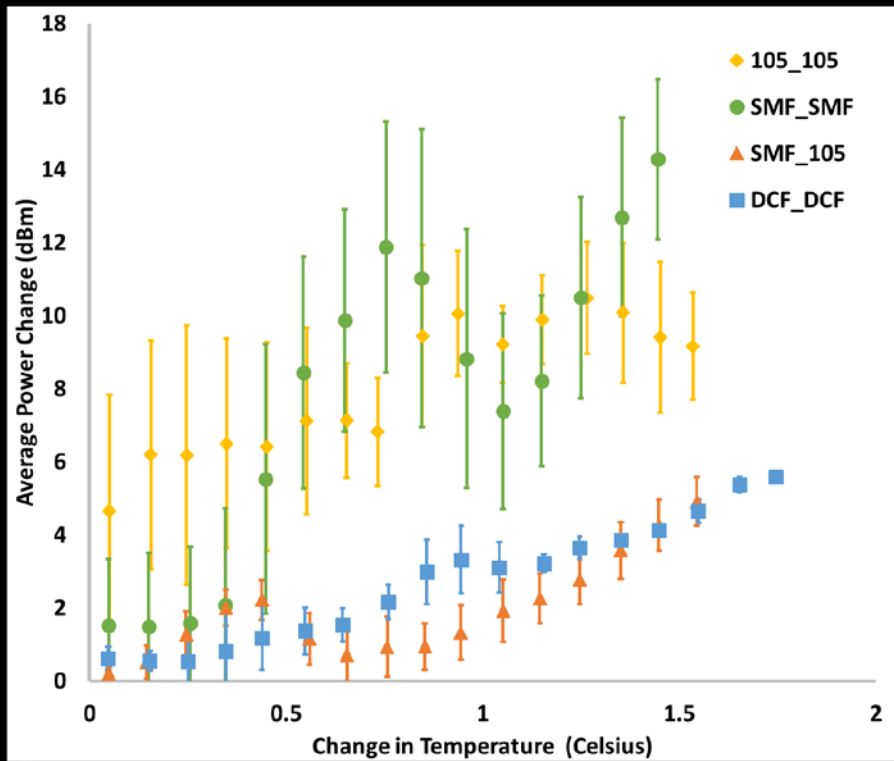

Effect of temperature on transmit table angle

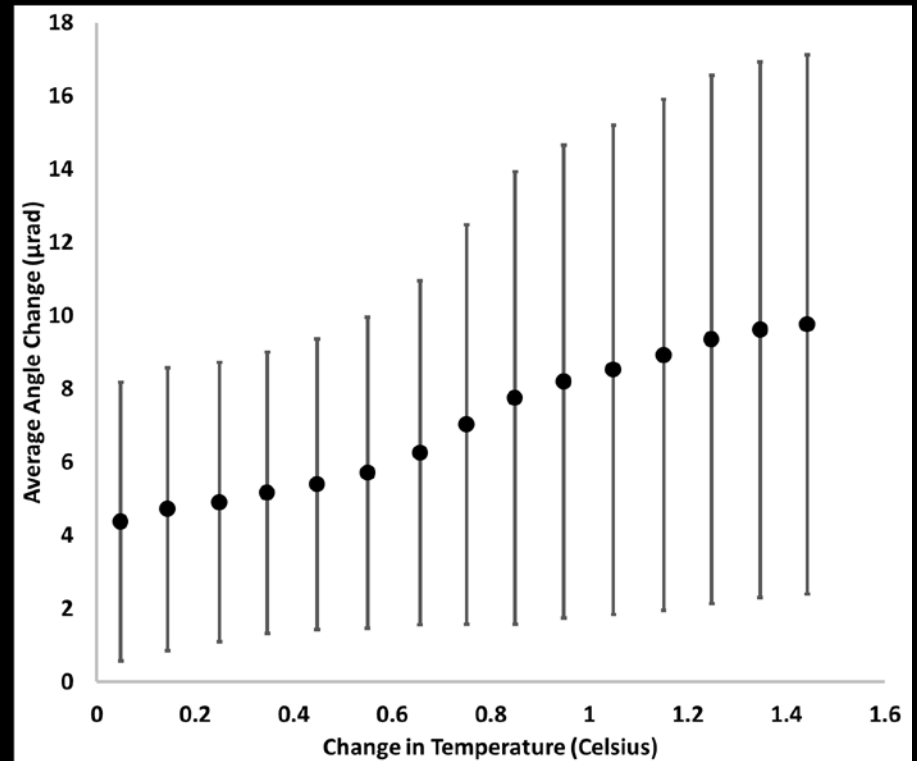

DCF to DCF power received stability:

- > 105 micron to 105 micron and SMF to SMF
- = SMF transmitting to a 105 micron



Conclusion

- DCFs match performance of SMF → MMF of same core and first cladding size
 - pointing accuracy tolerance
 - received power stability
- DCFs enables full duplex communication with:
 - 1 optical path → reducing optics → reducing SWaP
 - pointing requirement reduction → reduce/eliminate active components → reduce cost and SWaP
- DCF should be considered for applications where SWaP is critical



Future Work

- Bit error rate performance of DCFs
- Study DCFs pointing accuracy in terms of tilt
- Study effect of range on FSOLs with DCFs
- Investigate performance of DCF couplers

ACKNOWLEDGEMENTS

This work is supported by the Tech and Standards Division within NASA Space Communications and Navigation (SCaN) Program. We want to thank Patrick Millican for helping with initial laser alignment.