

NEXT GENERATION X-RAY OPTICS (NGXO)

Alignment and Bonding of Silicon Mirrors for High-Resolution Astronomical X-ray Optics [10699-141]

Kai-Wing Chan^{a,c}, James R. Mazzarella^{b,c}, Timo T. Saha^c, William W. Zhang^c, Ryan S. McClelland^c, Michael P. Biskach^{b,c}, Peter M. Solly^{b,c}, Raul E. Riveros^{a,c}, Ai Numata^{b,c}

^aCenter for Research and Exploration in Space Science and Technology & University of Maryland, Baltimore County, Maryland, USA; ^bStinger Ghaffarian Technologies, Inc., Maryland, USA; ^cNASA/Goddard Space Flight Center, Maryland, USA


Mirror Alignment for Large X-ray Telescopes

- **Future large x-ray astronomy missions require large area and high resolution**
 - Present consensus is to integrate thin, lightweight, segmented mirrors to form a compact but large telescope with high resolution (better than 1")
- **Key technologies**
 - 1) **Accurate mirror substrates:** polishing high quality mono-crystalline silicon
 - 2) **Stress-free reflective coating:** stress-based distortion cancellation
 - 3) **Precise alignment and integration:** kinematic mounting and distortion-free bonding
- **Four-point alignment** for quasi-cylindrically symmetric mirrors (segments)
 - **4-Point alignment:** Pitch and yaw angles, image center (X, Y) are controlled by heights of the 4 mount points
 - **Alignment Precision:** better than 1"
 - **Bonding error:** ~ 0.1 μm (~ 1")
 - **Current single mirror pair x-ray tested:** 3" (Half-Power Diameter)
- **Integration into (meta) shell**
 - Shell structure has rotationally defined axis
 - Interlocking mirrors ⇒ lightweight, mechanically strong telescope

4-Point Alignment of Mirrors


4 DOF of mirror, pitch (θ_y), yaw (θ_x), and translation ΔX , ΔY are controlled by the heights of the 4 supports

Silicon mirrors simply supported

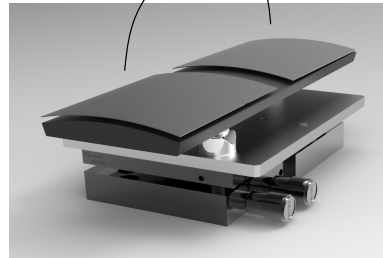


- **Pitch (θ_y) and yaw (θ_x):** compactness of focus
- **ΔX , ΔY :** image center onto the optical axis of system
- **Rotation (θ_z)** is invariant from cylindrical symmetry
- **ΔZ** is nearly invariant from small grazing angle (long focal length)
- **Co-alignment** of "primary" and "secondary" mirrors, and mirrors in the next [(n+1)th] shell, are done through a common optical axis reference

Focus and Precision of Alignment and Bonding

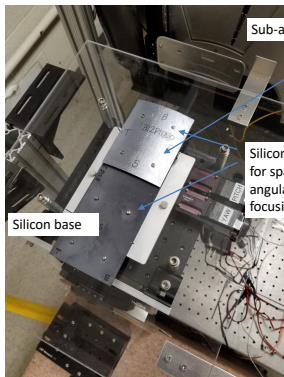

Sub-aperture masks
Silicon mirrors, facing down. Optical axis horizontal
Silicon spacers: Precision for spacers to achieve angular positioning for focusing ~ 0.1 μm
Silicon mirrors mounted on top of another

- Individual mirror statically determined by the 4 spacers
- Mirrors are acoustically settled
- Sub-aperture measurement of mirror images in a collimated beam qualifies the alignment
- Corrective spacer height is achieved by polishing
- Epoxy applied to round-top spacers bonds mirror in place

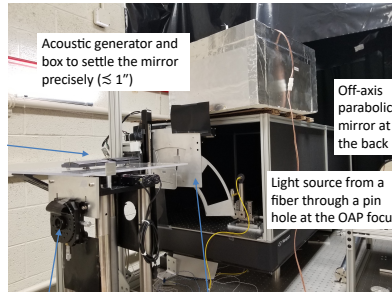

Acoustic generator and box to settle the mirror precisely ($\pm 1''$)

Off-axis parabolic mirror at the back

Light source from a fiber through a pin hole at the OAP focus



Optical axis reference defined as part of the collimated beam through a center aperture

Movable masks


▲ **Alignment setup.** Sub-aperture images were taken for mirrors aligned in a collimated optical beam. Centroids the sub-aperture images at the focal plane determine the quality of focusing and de-center errors. They, in turn, determine the amount of iterative correction of spacer heights needed for a better alignment. ▶

Summary: X-ray Test Result

- Aligned and Bonded mirrors were tested at GSFC and MPE Panter
- Resolution of single pair of mirror is 3 arcsecond
- Flux is uniform (except at the spacers)
- Alignment of mirror in the second shell is achieved in optical beam at 1" (not x-ray tested yet)



- Planned work:**
- Complete alignment, bonding, and testing of multiple pairs (in progress)
 - Integration of mirrors onto meta-shell structure (in implementation)
 - New precision mirror positioning structure (in development)



For Further Information

Silicon Mirror Fabrication: Raul Riveros, 10699-23 [Monday, 2:00 PM] Raul.E.Riveros@nasa.gov
 Mirror Alignment and Bonding: Kai Chan, 10699-141 [this poster] Kai-Wing.Chan-1@nasa.gov
 Telescope Design and analysis: Peter Solly Peter.M.Solly@nasa.gov
 Optics design and analysis: 10699-179 [Wednesday, 6 PM Poster] Timo.T.Saha@nasa.gov
 Mirrors Technology: W. Zhang, 10699-22 [Monday, 1:40 PM] William.W.Zhang@nasa.gov

Acknowledgment

NGXO research is supported by NASA Strategic Astrophysics Technology (SAT) under Research Opportunities in Space and Earth Sciences (ROSES)

