



US010072840B2

(12) **United States Patent**
Haskin et al.

(10) **Patent No.:** **US 10,072,840 B2**

(45) **Date of Patent:** **Sep. 11, 2018**

(54) **FLAME HOLDER SYSTEM**

USPC 431/350, 345
See application file for complete search history.

(71) Applicant: **The United States of America as represented by the Administrator of the National Aeronautics and Space Administration**, Washington, DC (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

28,694 A	6/1860	Smith
263,415 A	8/1882	Lightburne, Jr.
660,550 A	10/1900	Beese
794,539 A	7/1905	O'Brien
906,217 A	12/1908	Gaylord

(Continued)

FOREIGN PATENT DOCUMENTS

GB	1503320 A	*	3/1978	F23D 14/38
GB	2125501		3/1984		

(Continued)

OTHER PUBLICATIONS

4000° F. Castable Ceramics, Coatings and Putties, 2008, Cotronics Corporation, http://www.cotronics.com/vo/cotr/cm_castable.htm.*

Primary Examiner — Avinash Savani

Assistant Examiner — Rabeeul Zuberi

(74) *Attorney, Agent, or Firm* — Robin W. Edwards;
Mark P. Dvorscak

(73) Assignee: **THE UNITED STATES OF AMERICA AS REPRESENTED BY THE ADMINISTRATOR OF NASA**, Washington, DC (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 172 days.

(21) Appl. No.: **14/021,325**

(22) Filed: **Sep. 9, 2013**

(65) **Prior Publication Data**

US 2014/0011145 A1 Jan. 9, 2014

Related U.S. Application Data

(63) Continuation of application No. 11/860,703, filed on Sep. 25, 2007, now Pat. No. 8,529,249.

(51) **Int. Cl.**
F23D 14/46 (2006.01)
F23D 14/58 (2006.01)
F23D 14/52 (2006.01)


(52) **U.S. Cl.**
CPC **F23D 14/58** (2013.01); **F23D 14/52** (2013.01); **Y10T 403/587** (2015.01)

(58) **Field of Classification Search**
CPC F23D 3/00; F23D 14/52; Y10T 403/587

(57) **ABSTRACT**



A flame holder system includes a modified torch body and a ceramic flame holder. Catch pin(s) are coupled to and extend radially out from the torch body. The ceramic flame holder has groove(s) formed in its inner wall that correspond in number and positioning to the catch pin(s). Each groove starts at one end of the flame holder and is can be shaped to define at least two 90° elbows. Each groove is sized to receive one catch pin therein when the flame holder is fitted over the end of the torch body. The flame holder is then manipulated until the catch pin(s) butt up against the end of the groove(s).

11 Claims, 2 Drawing Sheets

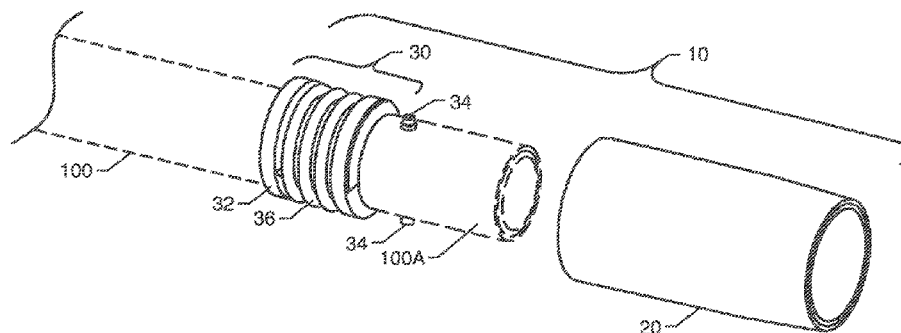

Page 2

* cited by examiner

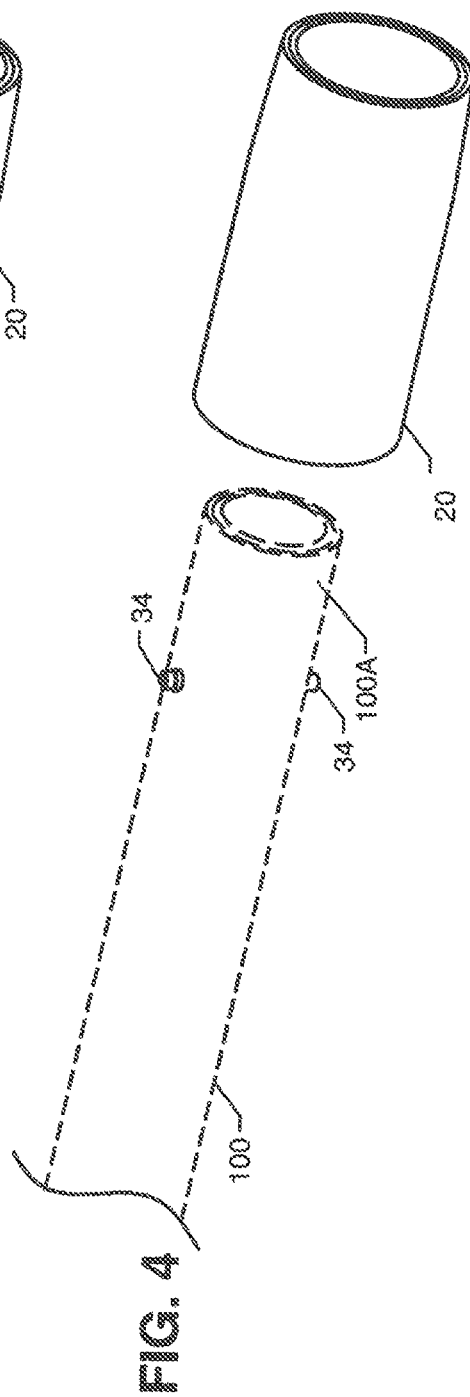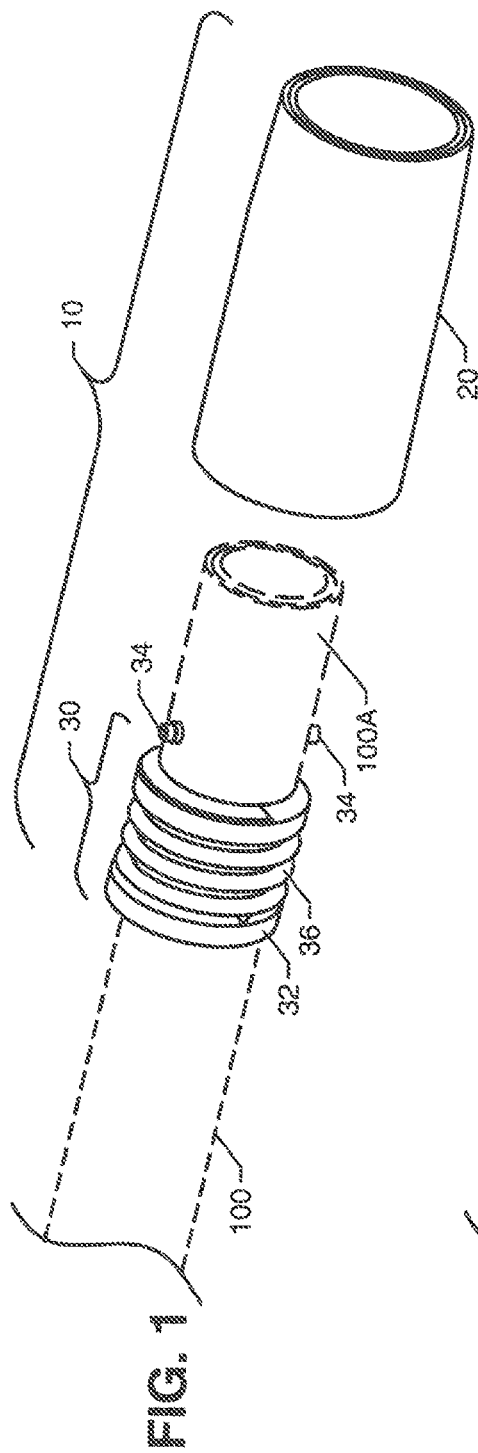

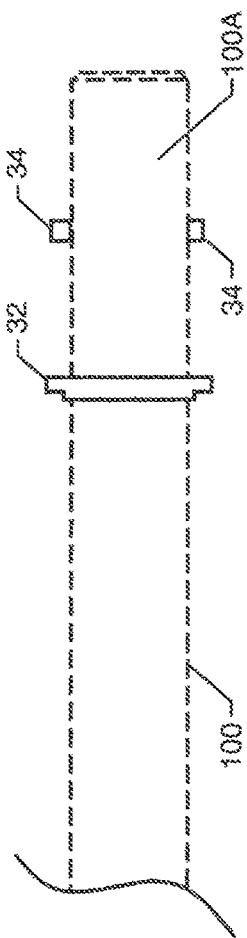


FIG. 2

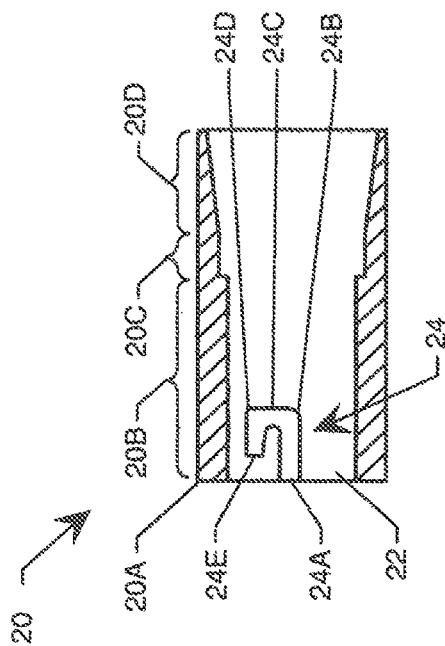


FIG. 3

1

FLAME HOLDER SYSTEM**ORIGIN OF THE INVENTION**

The invention was made in part by employees of the United States Government and may be manufactured and used by or for the Government of the United States of America for governmental purposes without the payment of any royalties thereon or therefor.

CROSS-REFERENCE TO RELATED PATENT APPLICATION

This patent application claims the benefit of and priority to U.S. patent application Ser. No. 11/860,703 filed on Sep. 25, 2007, the contents of which are hereby incorporated by reference in their entirety.

BACKGROUND OF THE INVENTION**Field of the Invention.**

This invention relates to high temperature torches. More specifically, the invention is a flame holder system for use with high temperature torches.

Description of the Related Art

Propane torches, or burners, typically have a hollow torch body that is finished with a hollow nozzle or "flame holder" as it is known. Existing flame holders are generally made from stainless steel, cast iron or, in some cases, a ceramic material such as alumina oxide. Stainless steel flame holders are attached using set screws that pass radially through the flame holder to engage the outer wall of the torch body. Ceramic flame holders are bonded (e.g., using a ceramic adhesive) to the torch body.

Existing flame holders present problems in applications requiring high temperature operation and/or extended operation times. Flame holders made from metal oxidize quickly on the outer walls thereof and subsequently experience spalling or flaking. If the operating temperatures are high enough, metallic flame holders will melt thereby requiring replacement of the flame holder. However, when the flame holder melts, it is difficult or impossible to disengage the set screws, in which case the whole torch is often discarded. Existing ceramic flame holders tend to work well at continuous high temperature burns, but tend to crack and/or fall apart if used in applications requiring multiple burn cycles such that the flame holder cools between burns. When this happens, the ceramic flame holder must be removed. Since the ceramic flame holder is bonded to the torch body, any ceramic still bonded to the torch body must be chipped or abraded off before a new flame holder can be installed. This can cause hours to days of unscheduled maintenance. Accordingly, it is not uncommon for a perfectly good torch to be discarded simply because of a damaged ceramic flame holder.

SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide a flame holder system suitable for use in continuous-burn and cycled-burn applications,

Another object of the present invention is to provide a flame holder system that facilitates easy attachment and replacement of a flame holder to a torch body.

Other objects and advantages of the present invention will become more obvious hereinafter in the specification and drawings.

2

In accordance with at least one embodiment of the present invention, a flame holder system includes a modified torch body and a ceramic flame holder (e.g., made from a zirconium oxide castable compound). At least one catch pin is coupled to the torch body near an outboard end thereof. Each such catch pin extends radially outward from the torch body. The ceramic flame holder is bored therethrough from a first end to a second end thereof to define an inner wall with the first end adapted to fit over the outboard end of the torch body but not the catch pins. The flame holder has one or more grooves formed in its inner wall where the grooves correspond in number and positioning to the catch pin(s). Each groove starts at the first end of the flame holder and is shaped to define at least two 90° elbows. Each groove is sized to receive a catch pin therein when the flame holder is fitted over the outboard end of the torch body. The flame holder is then manipulated until the catch pin(s) butt up against the end of the groove(s).

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a flame holder system in accordance with an embodiment of the present invention;

FIG. 2 is a side view of modifications to a torch body in accordance with the present invention;

FIG. 3 is a cross-sectional view of a flame holder in accordance with an embodiment of the present invention; and

FIG. 4 is a perspective view of a flame holder system in accordance with another embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Referring now to the drawings and more particularly to FIG. 1, a flame holder system in accordance with an embodiment of the present invention is shown and is referenced generally by numeral 10. As will be explained further below, flame holder system 10 cooperates with an outboard end of 100A of a torch body 100 which is illustrated in dashed line form to indicate that torch body 100 is not part of the present invention or a limitation thereon, but rather the invention includes modifications made thereto. That is to say, as is well known in the art, torch body 100 transports gases to be burned during torch operation. As will be readily apparent, the present invention can be adapted to work with any size and/or configuration of torch body 100.

In the illustrated embodiment, flame holder system 10 includes a hollow flame holder 20 and retaining system elements 30 coupled to torch body 100. For clarity of illustration, flame holder 20 is not mounted on torch body 100. However, in use, flame holder 20 will be mounted and retained on torch body 100 as retaining system elements 30 cooperate with features on flame holder 20.

Flame holder 20 can be a hollow cylinder of ceramic material that fits on outboard end 100A and cooperates with retaining system elements 30 to provide for (i) quick connect/disconnect of flame holder 20 to torch body 100, and (ii) retention of flame holder 20 on torch body 100. For high temperature operation, it is advantageous that the ceramic material be a zirconium oxide castable compound which has a service temperature of approximately 4000° F., is high in strength, and is resistant to thermal shock. The flame holder of the present invention is typically casted (as opposed to being milled) due to its relatively small size. A suitable zirconium oxide castable compound is RESCORE 760,

3

available commercially from Cotronics Corporation, Brooklyn, N.Y. However, it should be understood that the instant invention could be used with flame holders made from other suitable materials as well. Thus, for example, flame holders made from stainless steel or cast iron are within the scope of the present invention.

Before describing the features of flame holder **20** that allow it to mount and be retained on torch body **100**, it is appropriate to describe retaining system elements **30**, which will be done while referring to FIGS. **1** and **2**. In the illustrated embodiment, retaining system elements **30** comprise two modifications to torch body **100** and one part. More specifically, the two modifications are a stop **32** fixedly coupled to torch body **100** and two pins **34** fixedly coupled to torch body **100** and extending radially outward therefrom. Stop **32** can be a continuous annular flange (as shown) or can be realized by a plurality of discontinuous stops distributed circumferentially about torch body **100** without departing from the scope of the present invention. Radially-extending pins **34** are used to mount and retain flame holder **20** on outboard end **100A**.

While the illustrated embodiment uses two pins **34** that are positioned on torch body **100** in diametric opposition to one another, more or less than two pins **34** could be used without departing from the scope of the present invention. For example, a single pin **34** could be used for horizontal or stationary torch applications. If two or more pins **34** are used, they can be (but not need be) symmetrically disposed about torch body **100**. Indeed, non-symmetric placement of pins **34** could be used to insure proper positioning/attachment of a flame folder. Methods for attaching stop **32** and pins **34** to torch body **100** (or incorporating them into torch body **100**) would be well understood in the art. As illustrated in FIG. **1**, retaining system elements **30** also include a spring **36** disposed about torch body **100** between stop **32** and pins **34**. Spring **36** provides a positive retaining force on flame holder **20** as will be described further below.

Referring additionally now to the cross-sectional view of flame holder **20** in FIG. **3**, the features of flame holder **20** are shown that allow it to be quickly connected/disconnected to torch body **100** and retained on torch body **100**. These features are provided at one end **20A** of flame holder **20** that will be fitted over outboard end **100A**. More specifically, the inside wall **22** of flame holder **20** has two grooves formed therein where the grooves correspond in number and position to pins **34**. Thus, in the illustrated embodiment, the two grooves are in diametric opposition to one another on inside wall **22**. Accordingly, in FIG. **3**, only one of these grooves (i.e., groove **24**) is visible. Since each groove **24** is the same, a description of one will be sufficient to provide an understanding of the present invention.

Groove **24** is open at its end **24A** that is aligned with end **20A**. Groove **24** is sized to receive one of pins **34** therein when end **24A** is aligned with one of pins **34**. Groove **24** extends from end **24A** axially along flame holder **20** to a first 90° elbow **24B**, and then extends along a path **24C** formed in inside wall **22** to a second 90° elbow **24D** before terminating at an end **24E** that does not extend as far as starting end **24A**. Thus, each groove **24** can define a substantially U-shaped path. However, it is to be understood that each groove could be realized by a more tortuous path having additional elbows and that the individual segments of groove **24**, including the segment from the final elbow to the end **24E**, can be of varying lengths, without departing from the scope of the present invention.

Additionally, in at least one embodiment, in order to provide that the burner is only properly assembled in a

4

certain manner or direction (e.g., to require “clocking” during assembly), two or more grooves (and corresponding pins) can be of different depths (and pin lengths). This embodiment would be advantageous, for example, to ensure that specifically designed azimuthal or radial features in a particular flame holder are always preserved when the burner is assembled. Additionally, the elbows do not necessarily need to be 90° nor at the same angles. However, as would be easily understood, if more than one groove **24** exists than the grooves would need to substantially match one another for ease in assembly, and it would remain advantageous that the final segment of groove **24**, from the final elbow to the end **24E** be substantially parallel to the center line of the burner in order to assure proper retention of the pin **34** against end **24E**.

In the illustrated embodiment, grooves **24** are configured so that once flame holder **20** is positioned on outboard end **100A** with end **20A** compressing spring **36** until pins **34** rest in first elbow **24B**, flame holder **20** can be rotated with each pin **34** riding along a corresponding path portion (or segment) **24C** until second elbow **24D** is encountered. At this point, the force of spring **36** is allowed to apply an axial force to flame holder **20** thereby causing each pin **34** to come to rest against a corresponding end **24E**. When spring **36** is used, symmetric placement of pins **34** is preferred for load distribution. The internal diameter of flame holder **20** can vary (e.g., be tapered, stepped, tapered and stepped, etc.) in a variety of ways without departing from the scope of the present invention. For example, as shown in the FIG. **3** embodiment, the internal diameter is constant along region **20B**, stepped at region **20C**, and divergent along region **20D**.

Although the present invention has been described using spring **36**, it is to be understood that some applications (e.g., horizontal or stationary torches) of the present invention may not require a spring. Accordingly, FIG. **4** illustrates an embodiment of the present invention that does not use a spring. That is, torch body **100** is modified only to include pins **34** while a flame holder **20** still has substantially U-shaped grooves **24** formed on inside wall **22** where grooves **24** are in correspondence with the position and number of pins **34** as described in the previous embodiment, i.e., FIG. **3**.

The advantages of the present invention are numerous. The flame holder system provides for quick connect/disconnect of a flame holder and provides a long-lasting flame holder. Accordingly, the present invention satisfies two needs for the high-temperature torch applications.

Although the invention has been described relative to a specific embodiment thereof, there are numerous variations and modifications that will be readily apparent to those skilled in the art in light of the above teachings. It is therefore to be understood that, within the scope of the appended claims, the invention may be practiced other than as specifically described.

The invention claimed is:

1. A flame holder system, comprising:

- a plurality of catch pins adapted to be coupled to an outboard end of a torch body transporting combustible gases to the outboard end during a torch operation, each of said catch pins extending radially outward from the torch body;
- a flame holder having an outer wall and an interior cavity extending therethrough from an upstream first end to a downstream second end thereof to define an inner wall with said first end adapted to fit over the outboard end of the torch body, said flame holder having a plurality of grooves formed in said inner wall, each groove

5

having a base wall spaced from said inner wall to define a depth, and side walls that are spaced apart to define a width, each of said grooves corresponding in depth and position to one of said catch pins, each of said grooves starting at said first end and shaped to define at least two turns, wherein each said groove is substantially U-shaped with a first segment having an open end and a final segment extending; shorter than the first segment, and the first and final segments being substantially parallel to a center line of said flame holder, each of said grooves sized to receive only a particular one of said catch pins therein when said flame holder is fitted over the outboard end of the torch body, said inner wall having a first portion adjacent said first end, a second portion adjacent said second end, and a third portion between the first and second portions, wherein the third portion includes a stepwise expansion in cross sectional area from the first portion, wherein the second portion has a divergent cross sectional area that increases from a location adjacent to the third portion to a location adjacent to the second end, wherein the second and third portions are configured to provide sudden expansion and recirculation of a fuel and air mixture to hold a flame immediately downstream of the third portion, and wherein the plurality of grooves are located in the first portion, further wherein the first, second and third portions define a single flow path; and a spring-loaded stop including a spring disposed between said spring-loaded stop and said catch pins and adapted to be coupled to the torch body for engaging said first end of said flame holder fitted over the outboard end of the torch body, and wherein the final segment of each of said grooves of said flame holder engages one of said catch pins when said spring applies a force axially to said flame holder to thereby retain said flame holder on the torch body.

2. A flame holder system as in claim 1 wherein: said catch pins comprise two catch pins that are substantially diametrically opposed to one another on the torch body.

3. A flame holder system as in claim 1 wherein: said flame holder comprises a one piece integral homogeneous ceramic material.

4. A flame holder system as in claim 1 wherein: an inner diameter of said flame holder varies between said first end and said second end.

5. A flame holder system as in claim 3 wherein: said ceramic material comprises zirconium oxide.

6. A flame holder system, comprising:
a plurality of catch pins adapted to be coupled to an outboard end of a torch body transporting combustible gases to the outboard end during a torch operation, each of said catch pins extending radially outward from the torch body;
a flame holder comprising a one piece integral homogeneous ceramic material, the flame holder having an

6

interior cavity extending therethrough from an open first end to an open second end thereof to define an inner wall surface and an outer wall surface, with said first end adapted to fit over the outboard end of the torch body, said flame holder having a plurality of grooves formed in said inner wall, each groove having a base wall spaced from said inner wall to define a depth, and side walls that are spaced apart to define a width, wherein each said groove is substantially U-shaped with a first segment having an open end and a final segment extending shorter than the first segment, wherein the first and final segments are substantially parallel to a center line of said flame holder, each of said grooves sized to receive one of said catch pins therein when said flame holder is fitted over the outboard end of the torch body, said inner wall having a first portion adjacent said first end, a second portion adjacent said second end, and a third portion between the first and second portions, wherein the third portion includes a stepwise expansion in cross sectional area from the first portion, wherein the second portion has a divergent cross sectional area, and wherein the second and third portions are configured to provide sudden expansion and recirculation of a fuel and air mixture to hold a flame immediately downstream of the third portion, and wherein the plurality of grooves are located in the first portion, and further wherein the first, second and third portions define a single flow path; and a spring-loaded stop including a spring disposed between said spring-loaded stop and said catch pins are adapted to be coupled to the torch body for engaging said first end of said flame holder fitted over the outboard end of the torch body, and wherein the final segment of each of said grooves of said flame holder engages one of said catch pins when said spring applies a force axially to said flame holder to thereby retain said flame holder on the torch body.

7. A flame holder system as in claim 6 wherein: the first and final segments are substantially parallel to a center line of said flame holder.

8. A flame holder system as in claim 7, wherein: each of said grooves is sized to receive only a particular one of said catch pins therein when said flame holder is fitted over the outboard end of the torch body.

9. A flame holder system as in claim 6 wherein: said catch pins comprise two catch pins that are substantially diametrically opposed to one another on the torch body.

10. A flame holder system as in claim 6 wherein: said integral homogeneous ceramic material comprises zirconium oxide.

11. A flame holder system as in claim 6 wherein: an inner diameter of the second portion increases from a location adjacent to the third portion to a location that faces said open second end.

* * * * *