


Studies in Support of Venus Aerocapture Utilizing Drag Modulation

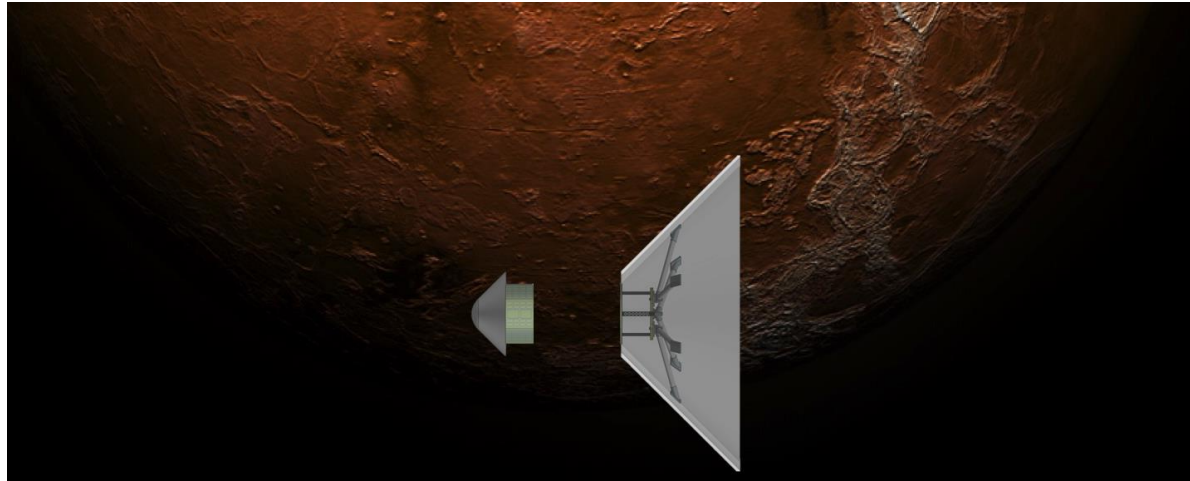

Robin Beck
Technical Lead



Ethiraj Venkatapthy
Principal Investigator

Michael Aftosmis, Gary Allen, Paul Wercinski, and Mike Wilder
NASA Ames Research Center

Presented at
International Planetary Probe Workshop 2018
University of Colorado, Boulder
June 12, 2018




Project Overview

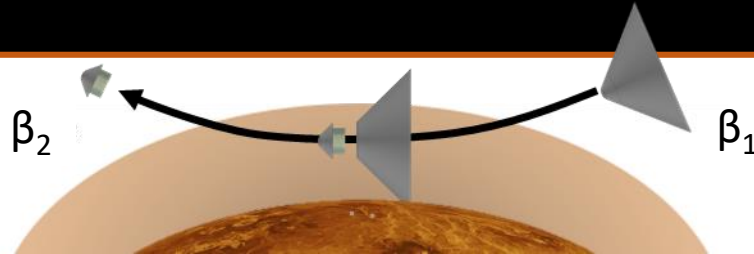

- The goal is to identify and address the technology challenges to enable a simple, single-event drag modulated aerocapture at Venus for a small satellite science mission
- Partnership with JPL and University of Colorado, Boulder
- Focus is on Venus science, mission design, mechanical system design, guidance, navigation, and control
- While aerocapture at Venus is more challenging than Mars or Titan, the opportunity for piggybacking as a secondary payload is more frequent for Venus than other destinations due to its use in gravitationally assisted flybys during interplanetary transit
- *NASA Ames Research Center has unique expertise in aerodynamics, aerothermodynamics, ballistic range testing, and thermal protection materials and systems*



Central Questions




1. Is the vehicle stable before, during, and after the single-event jettison? If using a separable drag skirt, what is the likelihood that it will re-contact the vehicle following jettison?
 - ***This is addressed through aerodynamic stability analysis, Monte Carlo simulations, and ballistic range testing***

2. Is the guidance and control scheme sufficiently robust in achieving the target science orbit despite navigational, G&C, and atmospheric uncertainties?
 - ***This is addressed through statistical Monte Carlo simulations performed in DSENGS, the institutional JPL tool suite for EDL flight dynamics simulation***

3. Can mass-efficient and robust thermal protection system (TPS) materials maintain acceptable temperature limits on the aerocapture vehicle at Venus?
 - ***This is addressed through aerothermal assessments at various levels of fidelity, and TPS sizing performed by experts at NASA Ames***




Multi-body Analyses




- Separation of the skirt from the center body during the atmospheric entry is a critical event.
 - The skirt could be a single contiguous element that separates from the center body as a single piece or it could be made of multiple petals that separate into multiple bodies.
 - The desire is for the separation to be simple and avoid re-contact
 - Analysis showed smoother separation for a single-piece skirt
- CART3-D is a computational simulation tool that can deal with complex and multiple bodies.
 - The code is designed to compute aerodynamic coefficients as part of the evolving system and use them to compute the trajectories of the multiple bodies

4-petal skirt

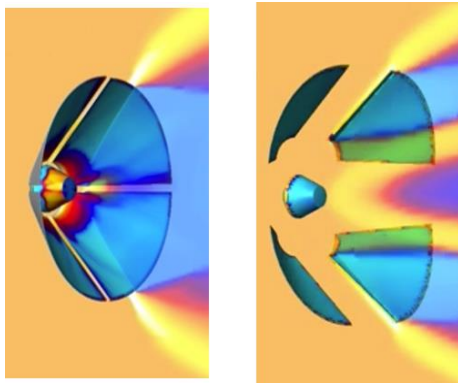


Single piece skirt

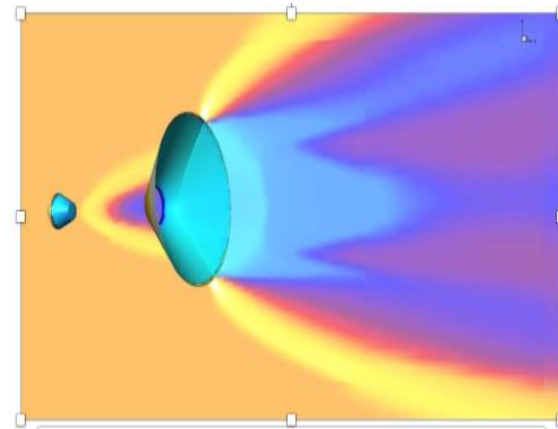


- CART3-D provided to CU with mentoring provided
 - Michael Werner will be at Ames as a summer intern




Baseline Configuration and Trajectory





- Configuration
 - Vehicles are both 45° sphere cones
 - Vehicle 2 has Pioneer-Venus shape ($R_n=0.5 \cdot R_b$)
 - Pre-jettison Mass (Vehicle 1) = 72 kg, Newtonian aerodynamics
 - Post-jettison Mass (Vehicle 2) = 34.7 kg, P-V aero database
- Basic mission to Venus, @ 150 km
 - $V = 11$ km/s
 - FPA = -5.5°
 - Long/Lat = $0^\circ / 0^\circ$
 - Entry date January 1 2025
 - Jettison at time to reach 2000km apoapsis

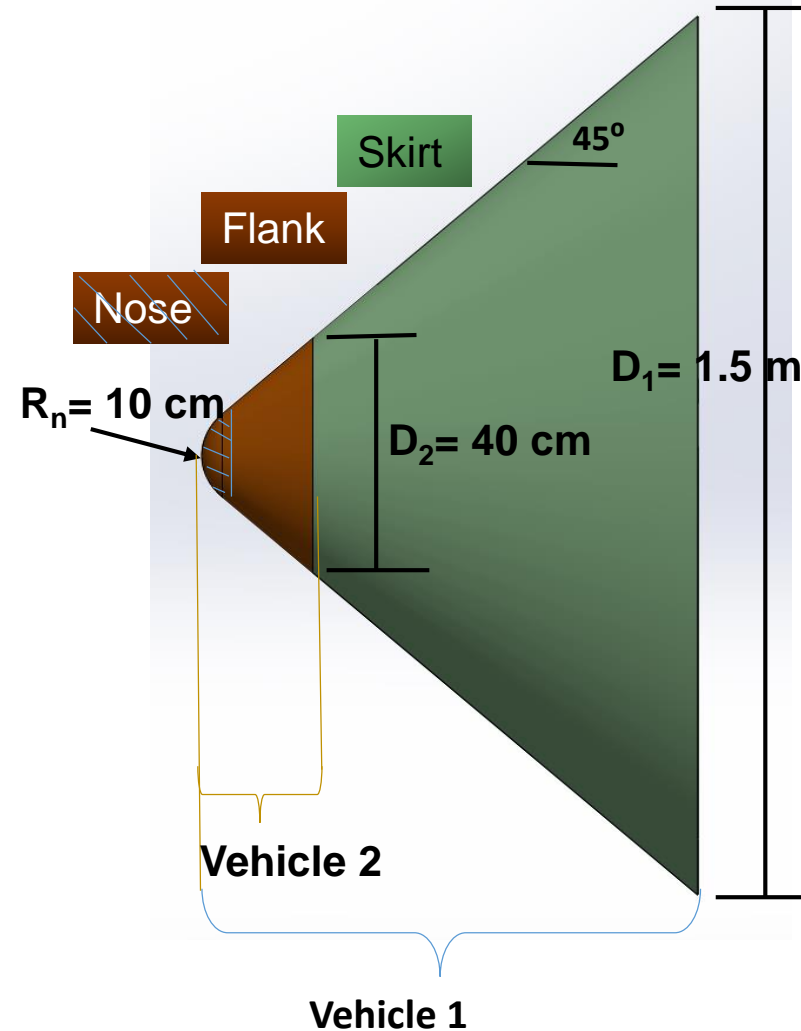



Aerothermal and TPS Sizing Results

- Skirt Jettison at 92.5 seconds @ 99.4km to achieve apoapsis @ 2000km

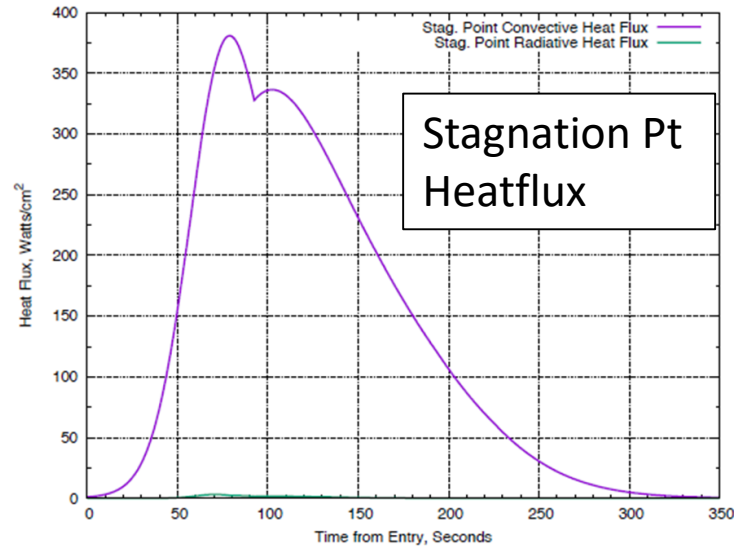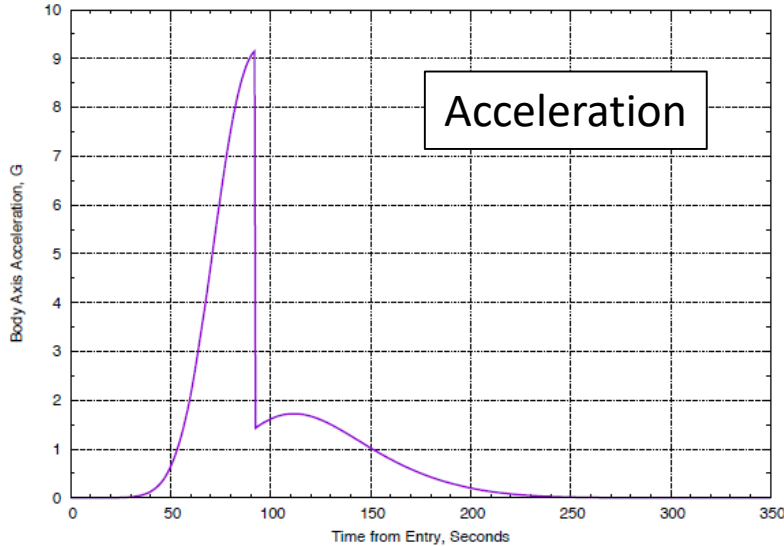


	Nose	Flank (est)	Skirt (est)
Peak Heatflux (W/cm2)	383.3	191.65	191.65
Peak Heatload (J/cm2)	45179	22590	3840
Peak Pressure (Pa)	8800	4400	3650
C-PICA thickness (cm)	2.58	1.88	0.72
PICA thickness (cm)	4.125	3.51	1.11
C-PICA mass (kg)	0.13	0.80	4.56
PICA mass (kg)	0.20	1.45	6.83

Un-margined TPS Mass (kg)	
C-PICA	5.49
PICA	8.48




PICA mass estimate could be considered as upper bound



Pathfinder Ballistic Range Model and Tests





- Six tests were performed
- Freestream pressure was varied in the first three tests to control the drag skirt separation rate
- The sabot design was improved for later tests (smoother deployment)
- Launch speed was increased at the lowest pressure in the last two tests, approaching the launch-load limits for this design

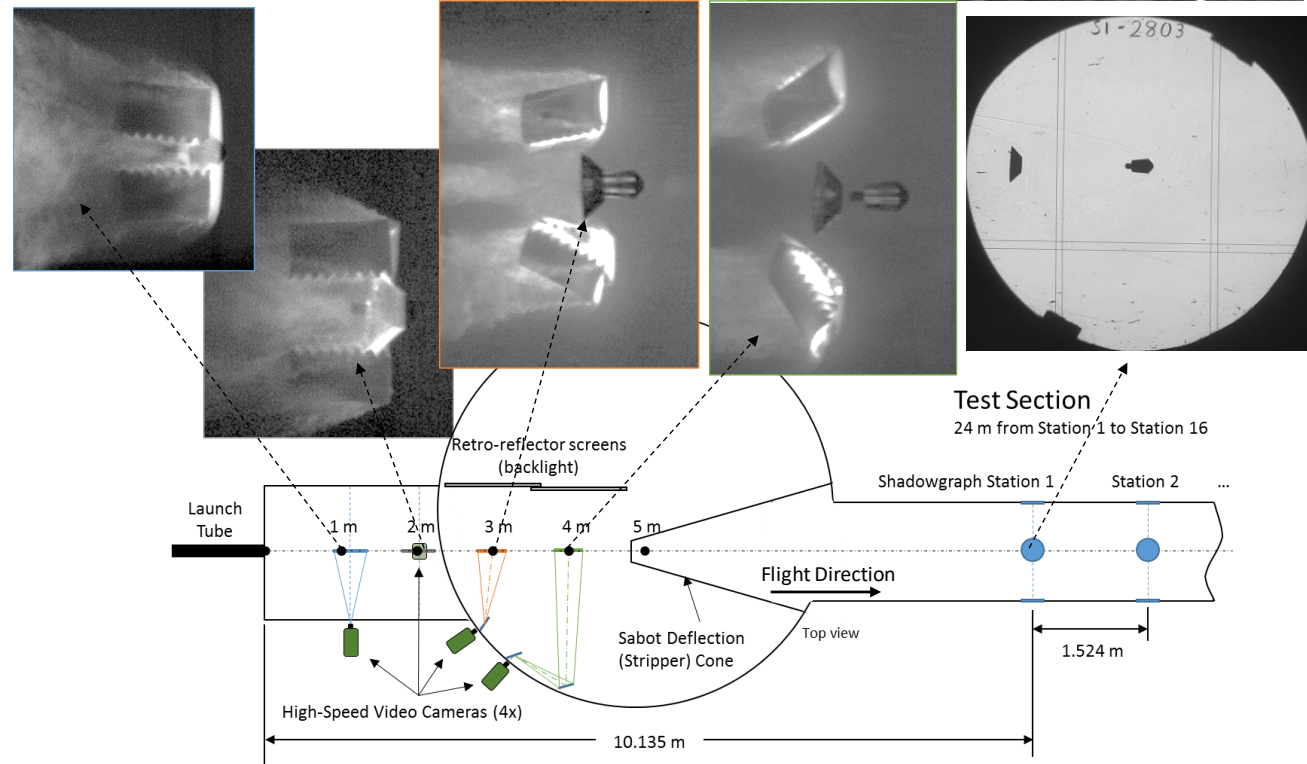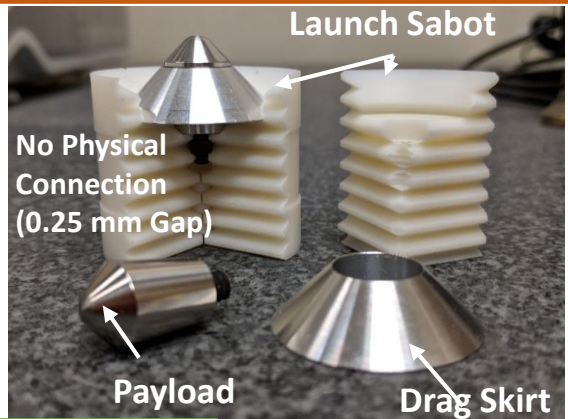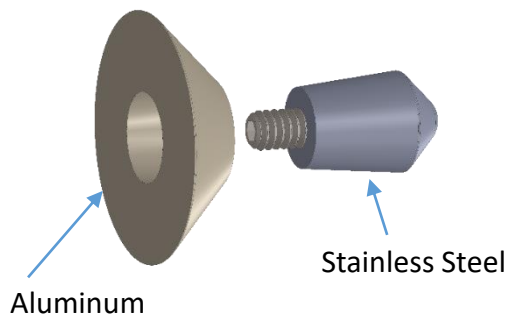




Pathfinder Ballistic Range Photos

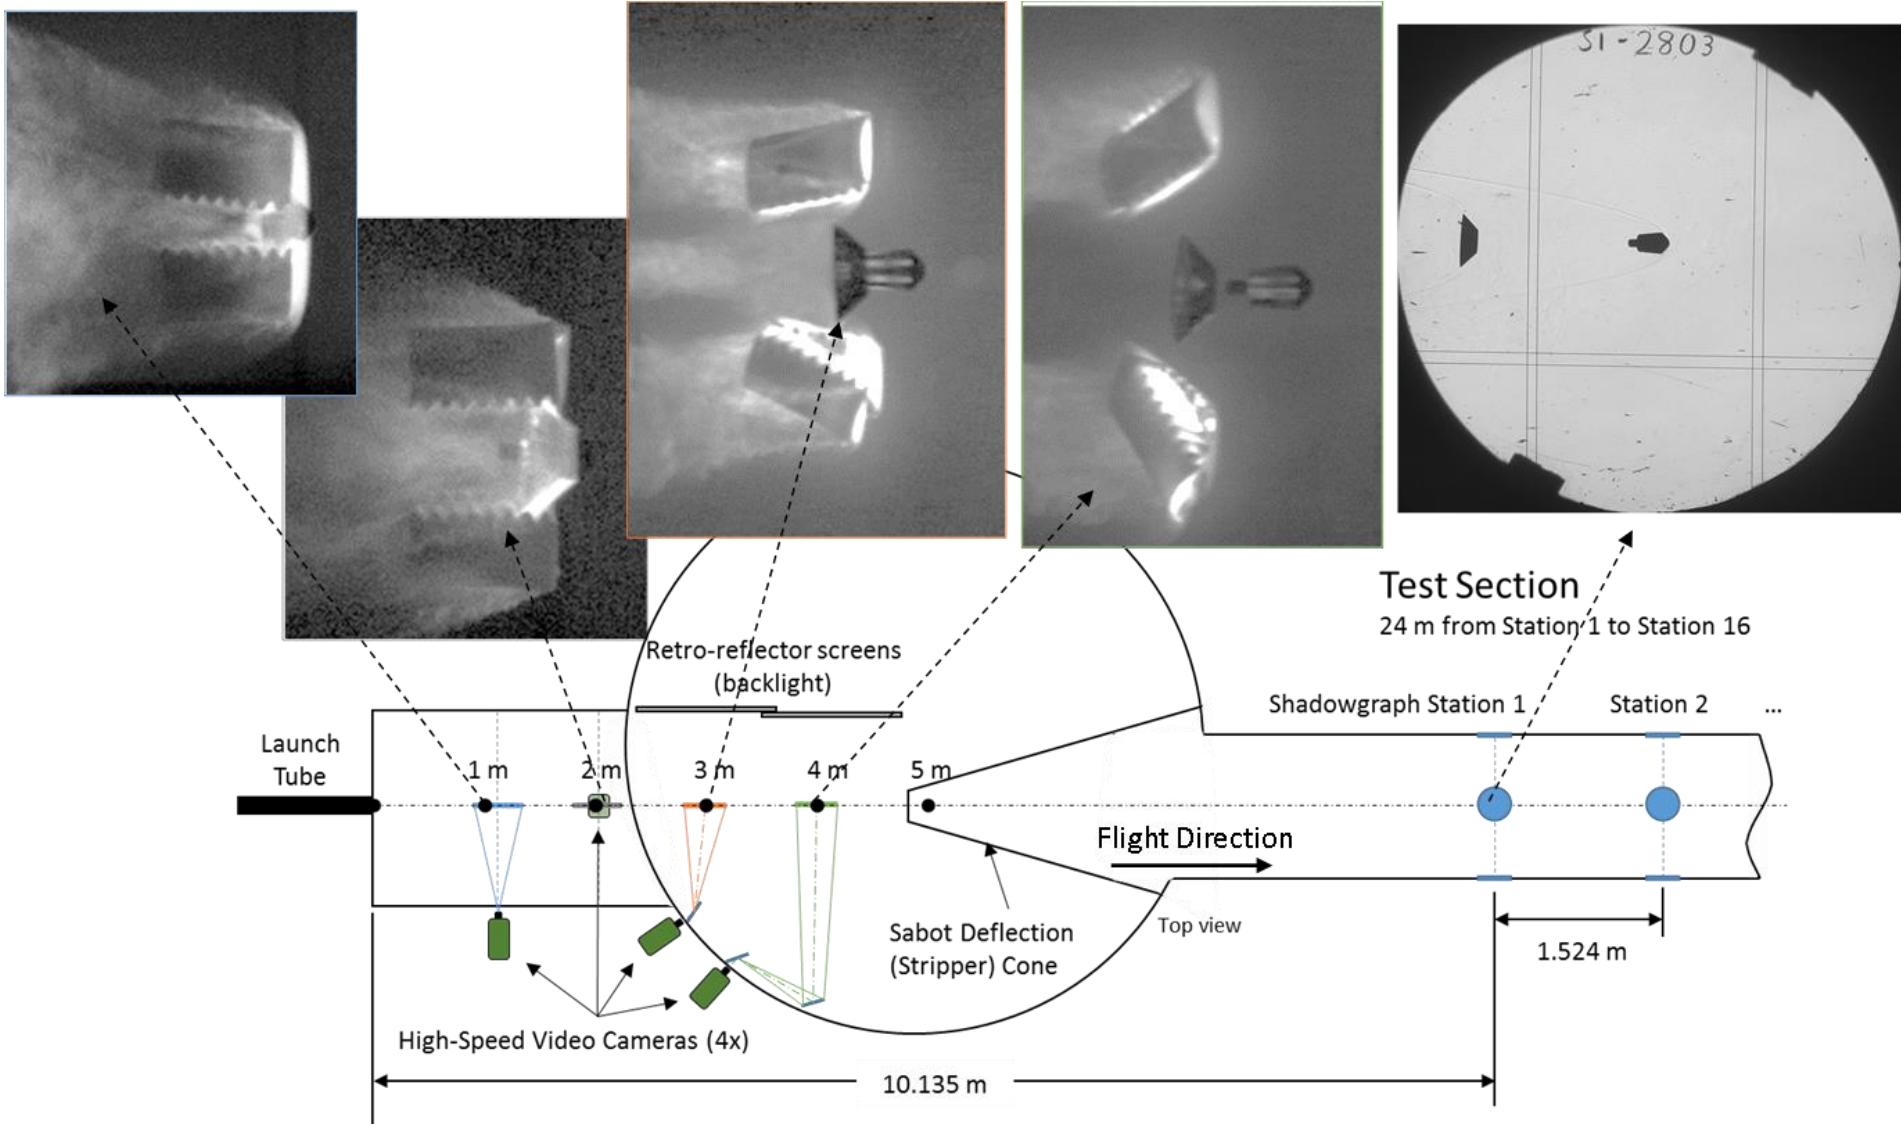



Summary/Work to Go



- Preliminary multi-body aerodynamic free-flight and separation simulation using CART3-D resulted in a single contiguous skirt configuration.
- Pathfinder ballistic range testing was successful
 - Confirmed the simulation
 - Improved design and future testing will be tailored to retire design specific risk
- Aerothermal analysis and TPS selection and sizing has provided a mass estimate for the TPS.
- The ADEPT concept will be evaluated as part of 2nd year study
 - Allows for growth of small payloads as secondary missions
 - Will also allow for accommodation on spacecraft for future scale-up to large primary payloads.
- Year 2 Ballistic range testing will include improved design tailored to retire design specific risks

