

Building and Testing a GPM Passive-Microwave Hail Retrieval and Climatology

Dr. Sarah D. Bang

NASA Postdoctoral Program, Marshall Space Flight Center


Dr. Daniel J. Cecil

NASA Marshall Space Flight Center

Huntsville, AL USA



AGU Fall Meeting • San Francisco, California



Global Threat of Hail

Hail is at the top of the intensity spectrum of precipitation, and therefore:

- constitutes ~70% of nearly \$65 billion in annual insured losses
- is difficult to measure *in situ*
- can result in strong attenuation and multiple scattering in radar data, leading to errors in retrievals
- is seldom retrieved by the large scale satellite precipitation algorithms




Aon Benfield, 2018; Bataglia et al., 2015


Climatologies of Hail

Hail Climatologies:

- Can be made using ground radar, surface reports

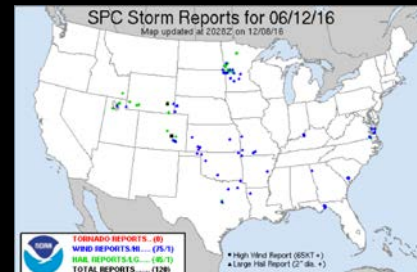

- For consistency, uniformity and to avoid geographic bias, satellite datasets are the best option

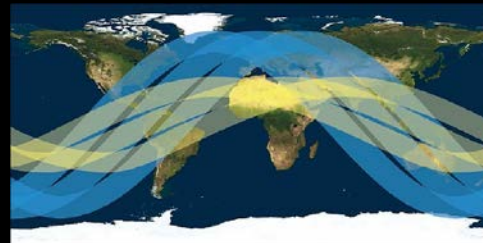

pmm.nasa.gov



NASA's TRMM & GPM Missions



Tropical Rainfall Measuring Mission

1997 – 2014


- TRMM Microwave Imager (TMI)
 - 9-channels, 10-85 GHz

Global Precipitation Measurement

2014 - present



- GPM Microwave Imager (GMI)
 - 13-channels 10-183 GHz

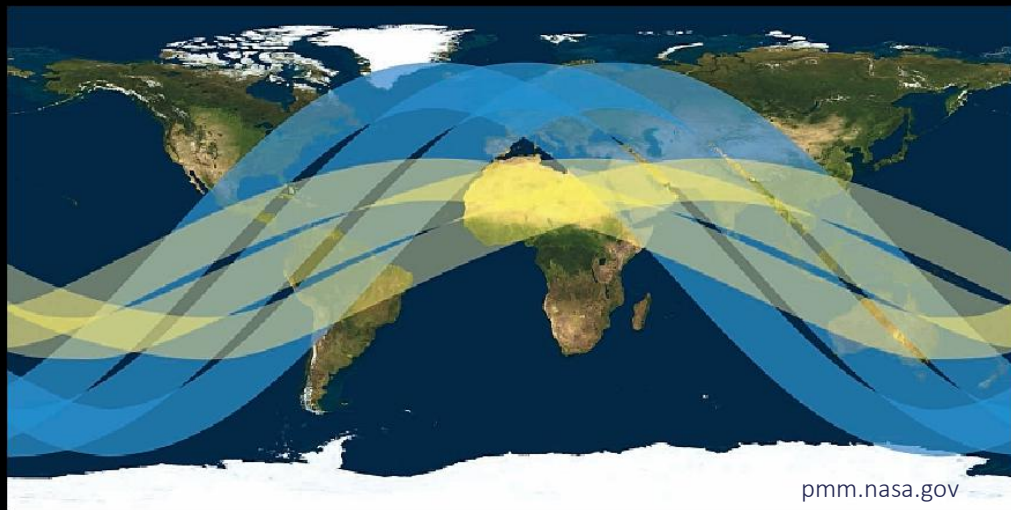

Constellation Partners:

- JAXA, NOAA, DOD, EUMETSAT, CNES, ISRO
- Cross-calibrate passive microwave observations


Passive Microwave, specifically:

- Excellent global coverage
- Long legacy in space

Building and Testing



Building

Passive-Microwave Signatures in Hail

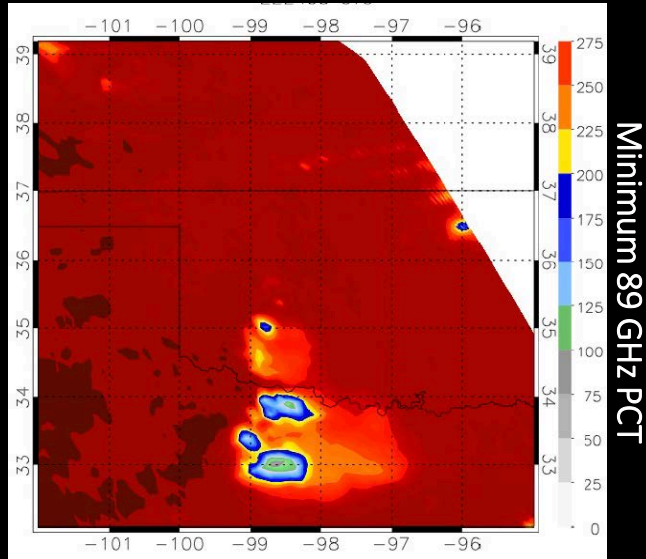



- Hailstorms register depressed T_b s due to scattering of upwelling microwave radiation

Passive-Microwave Signatures in Hail

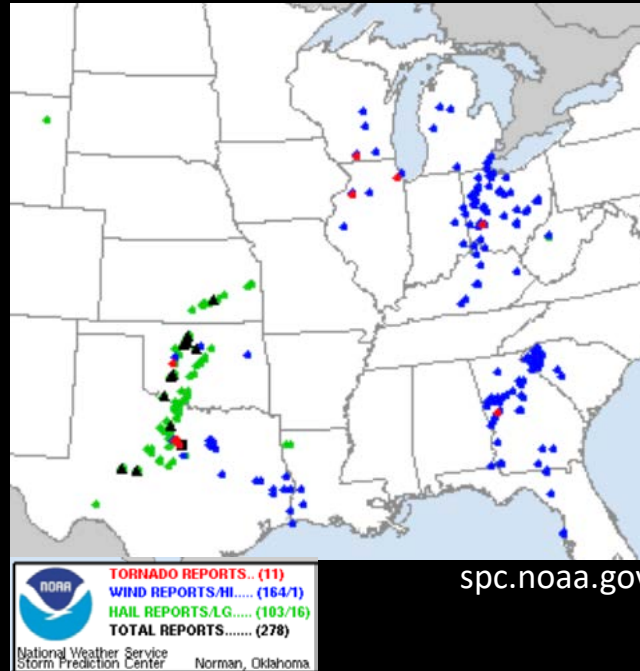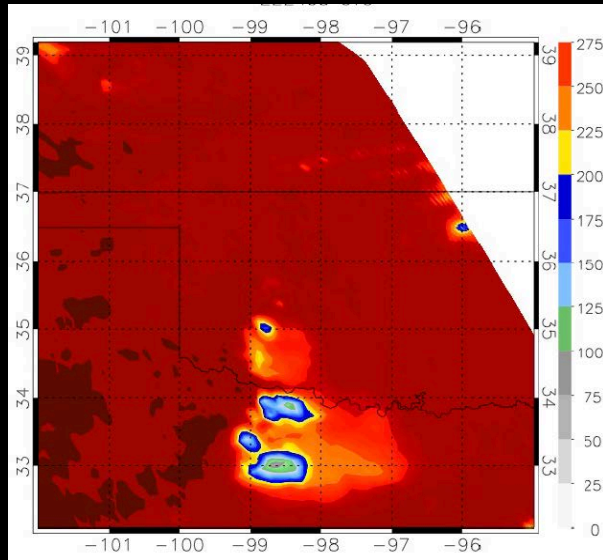


- Hailstorms register depressed T_b s due to scattering of upwelling microwave radiation
- To train the retrieval, we pair TRMM PCTFs (Polarization Corrected Temperature Features) with USA hail reports
 - Severe (>25mm) hail at the ground

Passive-Microwave Signatures in Hail

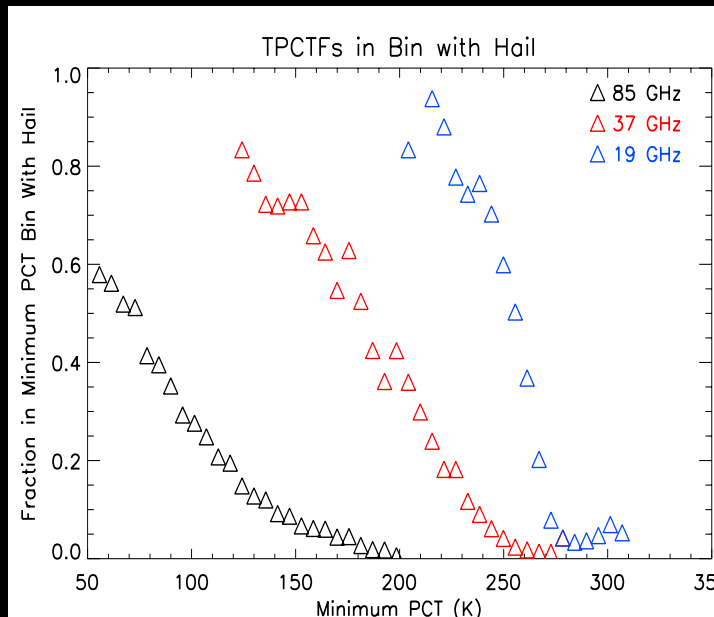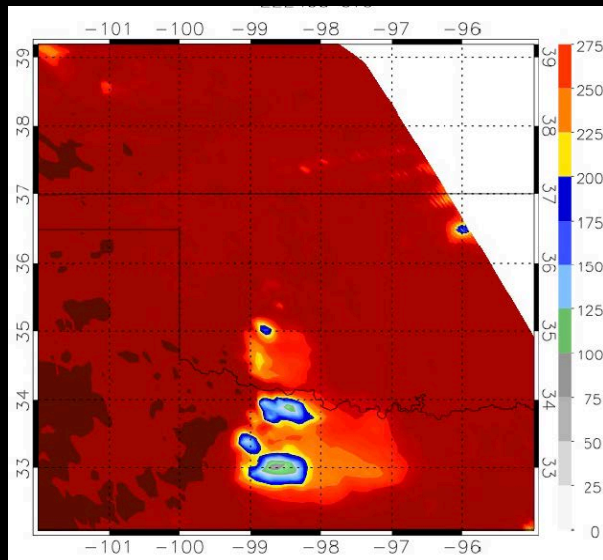


- Hailstorms register depressed T_b s due to scattering of upwelling microwave radiation
- To train the retrieval, we pair TRMM PCTFs (Polarization Corrected Temperature Features) with USA hail reports
- Visible relationship between decreasing T_b and likelihood of hail

Passive-Microwave Detection of Hail in the Literature

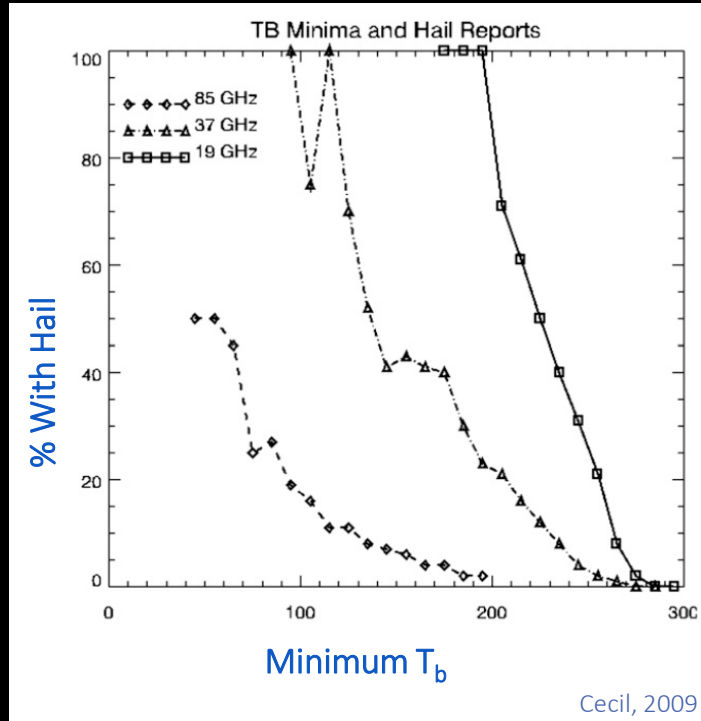

Based on Spencer et al., 1987

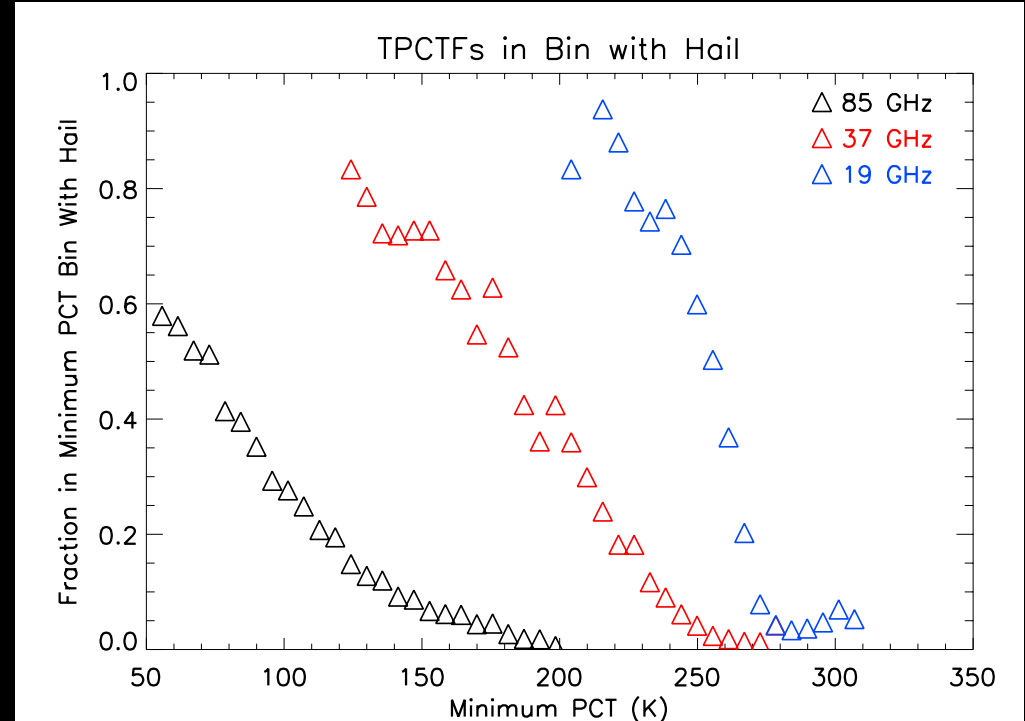


Bang and Cecil, 2019

Passive-Microwave Detection of Hail in the Literature

37 GHz PCT Threshold:

- Cecil (2009), Cecil (2011), Ni et al. (2017)


37 GHz PCT < 230K

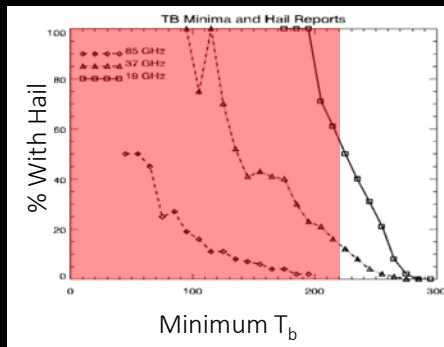

19 GHz PCT Threshold:

- Mroz et al. (2017)


19 GHz PCT < 261K

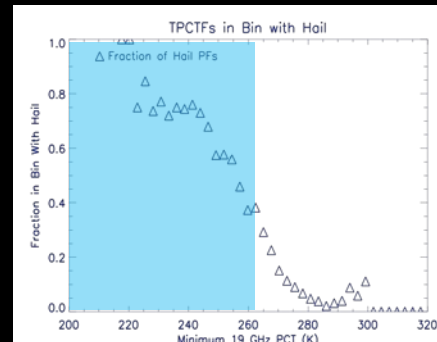

37 GHz PCT Lookup Table:

- Cecil and Blankenship (2012)

***37 GHz PCTs adjusted
by region**

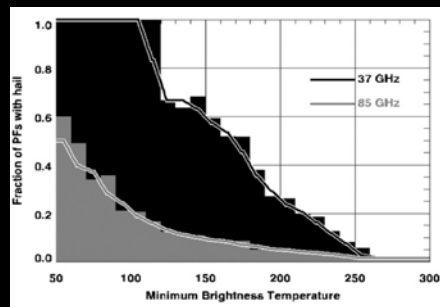


Cecil and Blankenship, 2012



Function of 37 & 19 GHz PCT

- Bang and Cecil (2019)


**37 GHz Depression / LRT
Minimum 19 GHz PCT**

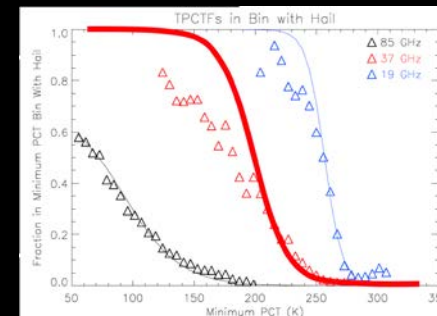

Hail Probability “Function” of 37 and 19 GHz PCT

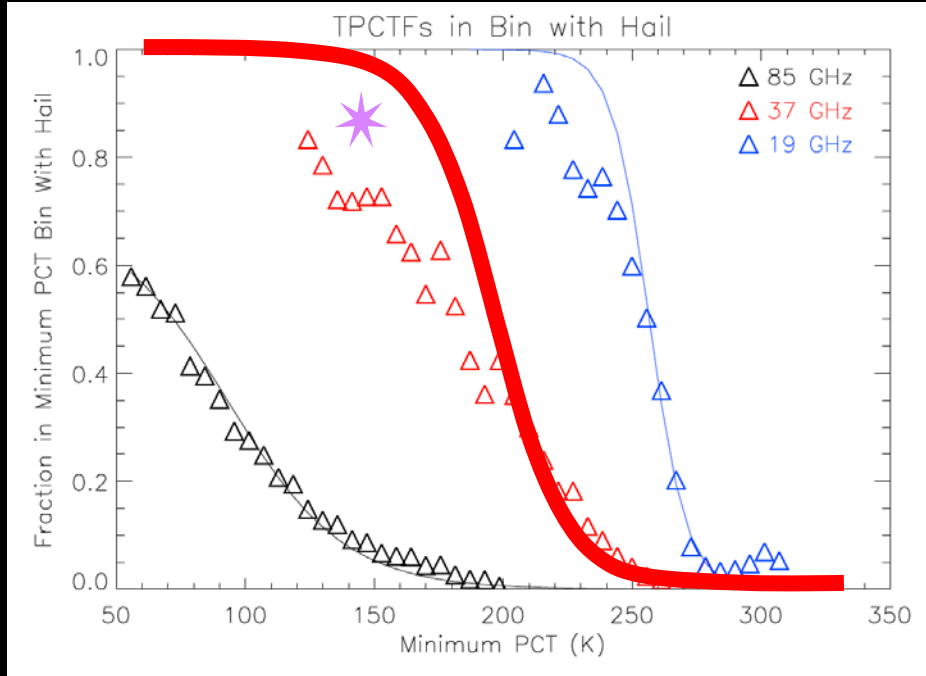




$$f(x) = \frac{L}{1 + e^{-k(x-m)}}$$

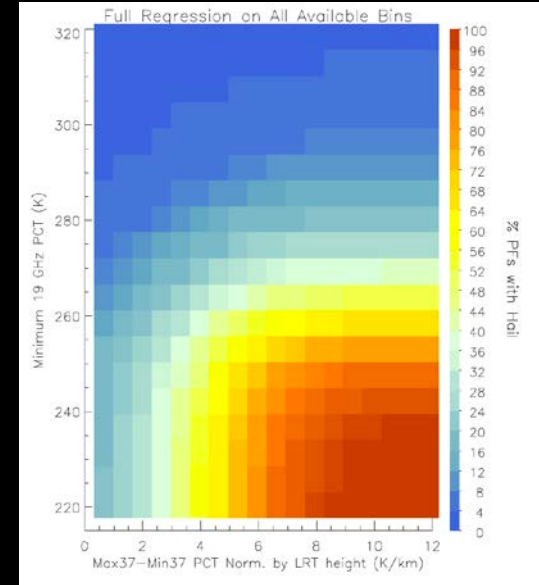



*Purposely higher, as we suspect underreporting.
(see Allen and Tippett, (2015) for more on hail reporting issues)

Caveats / Challenges / Things to Consider

#1: Adjusting for Different Footprint Size

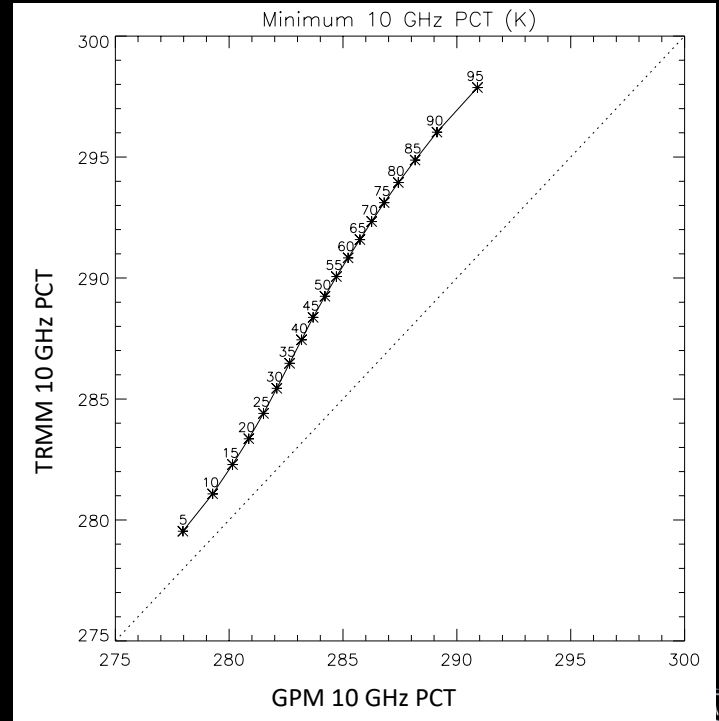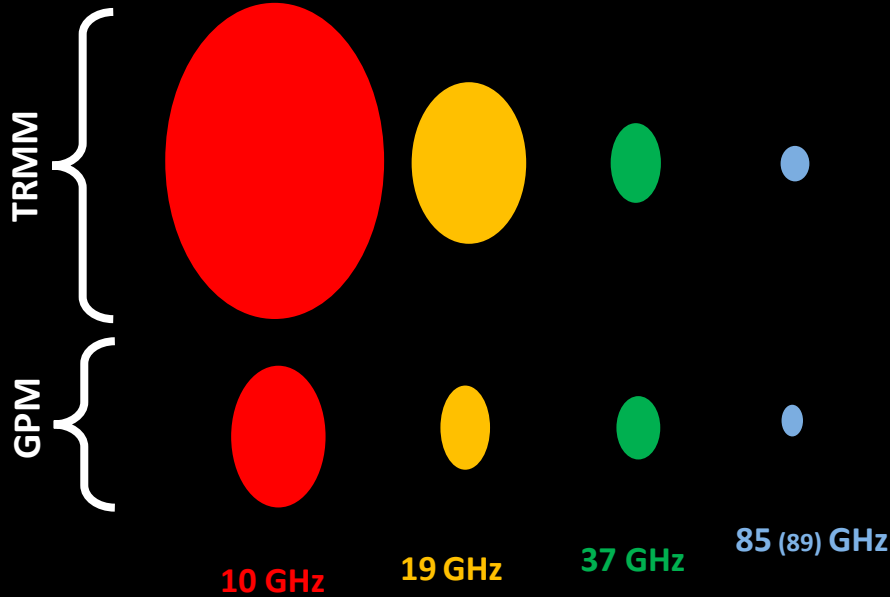


Caveats / Challenges / Things to Consider




#2: Changes in tropopause depth with latitude

Normalized 37 GHz PCT Depression =



$$\frac{MAX37PCT - MIN37PCT}{(LRT)}$$

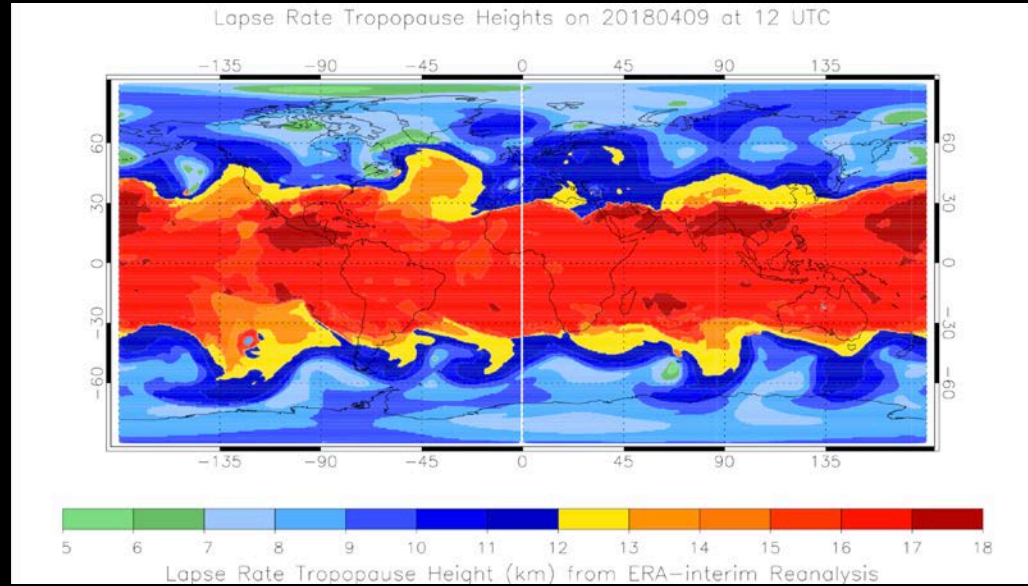


Caveats / Challenges / Things to Consider




#3: Snow/Surface Ice Artifact Filter

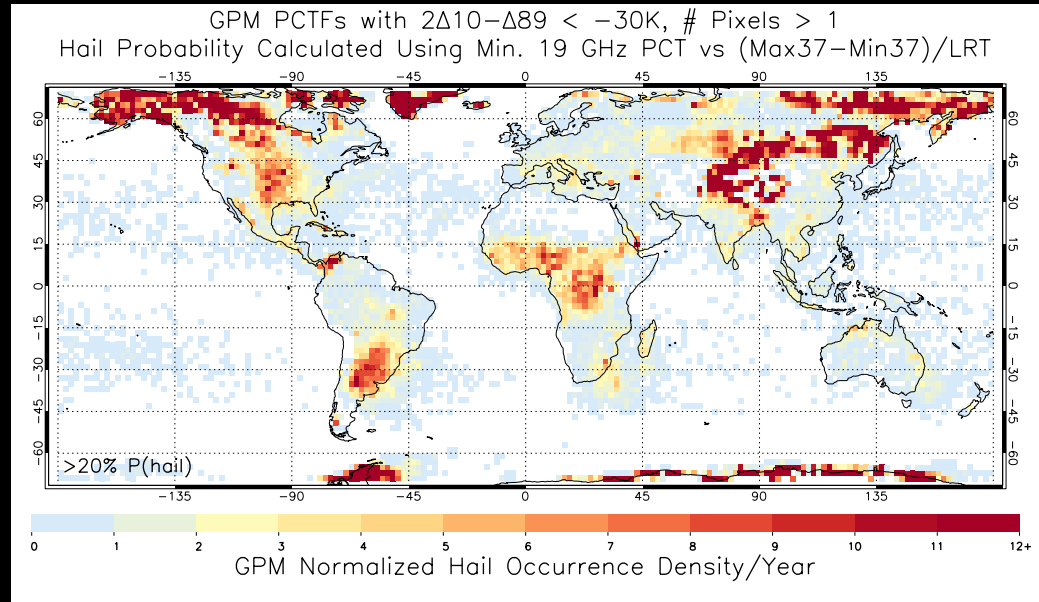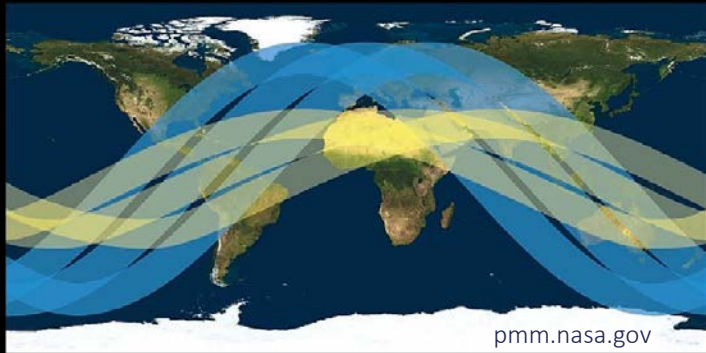

GPM Passive-Microwave Hail Climatology

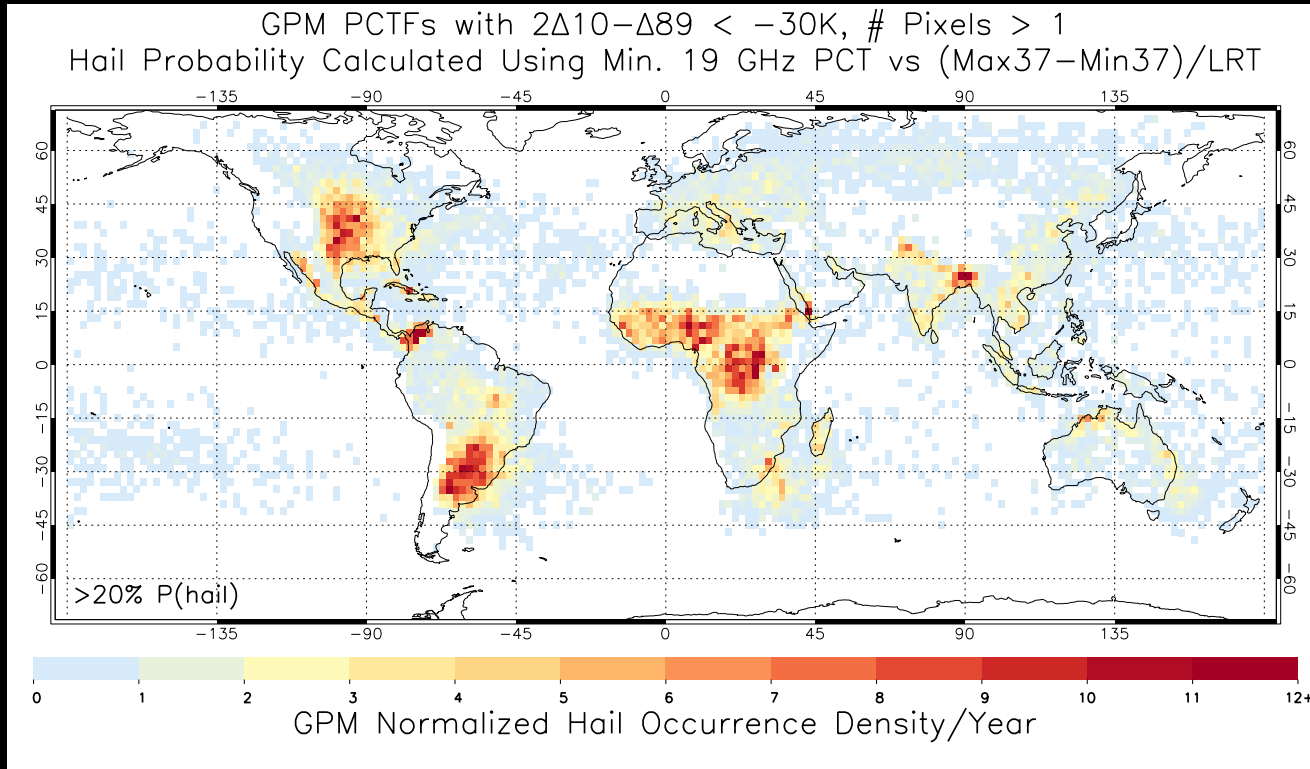

GPM Passive-Microwave Hail Climatology

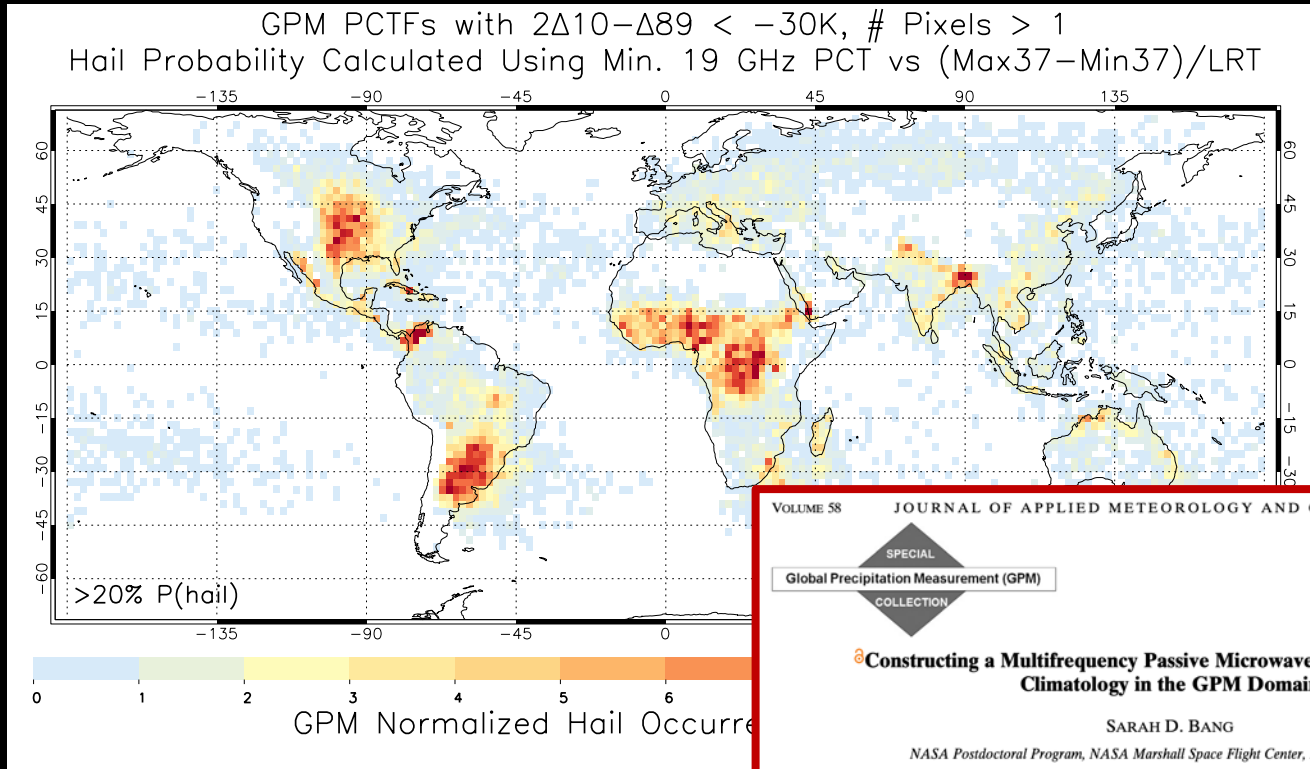

VOLUME 58 JOURNAL OF APPLIED METEOROLOGY AND CLIMATOLOGY SEPTEMBER 2019

SPECIAL
Global Precipitation Measurement (GPM)
COLLECTION


Constructing a Multifrequency Passive Microwave Hail Retrieval and Climatology in the GPM Domain

SARAH D. BANG
NASA Postdoctoral Program, NASA Marshall Space Flight Center, Huntsville, Alabama



DANIEL J. CECIL
NASA Marshall Space Flight Center, Huntsville, Alabama

Testing

Testing our retrieval with GPM DPR Ku-band radar

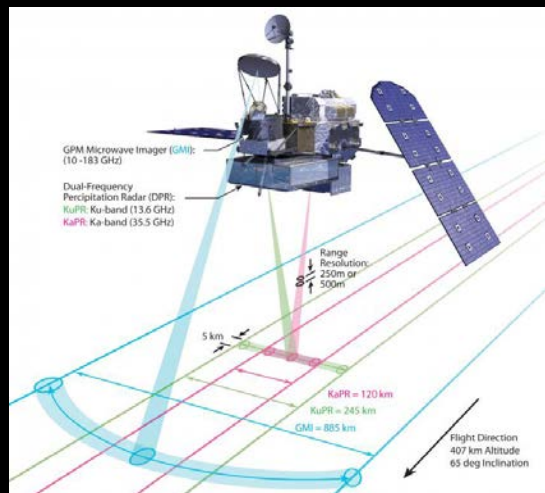

pmm.nasa.gov

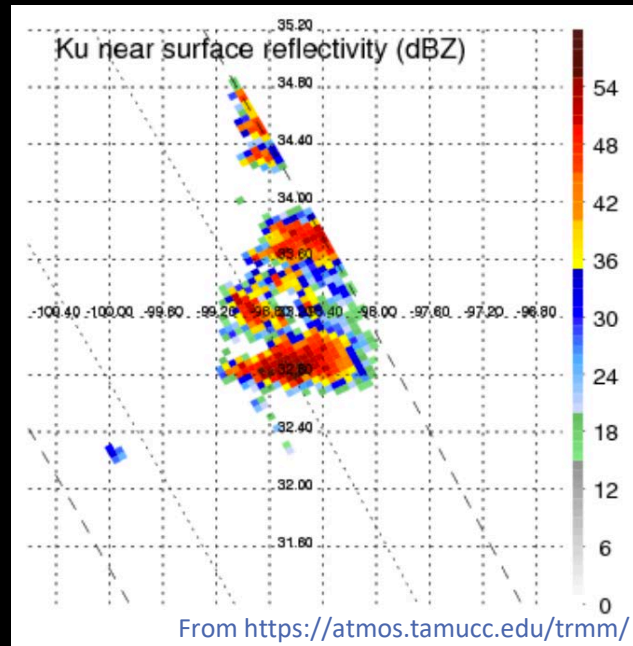
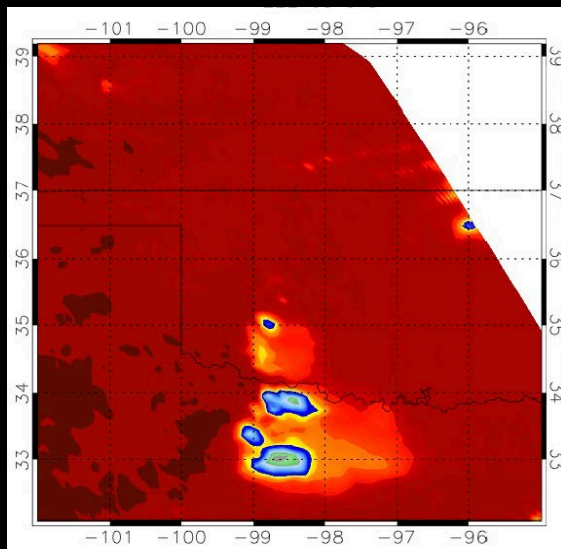


Testing with Ku-band Radar: Profiles


“Poor Performing” Algorithm
(none)

“Well Performing” Algorithm
(Must have 50 dBZ +/- 5 dB at -20 °C)



Temperature

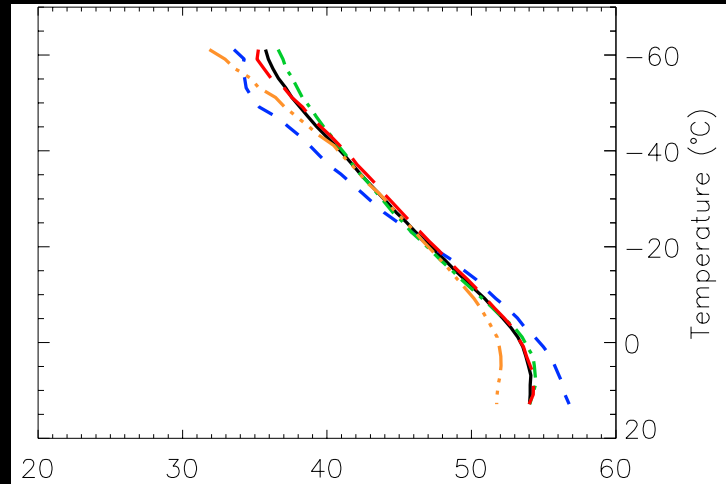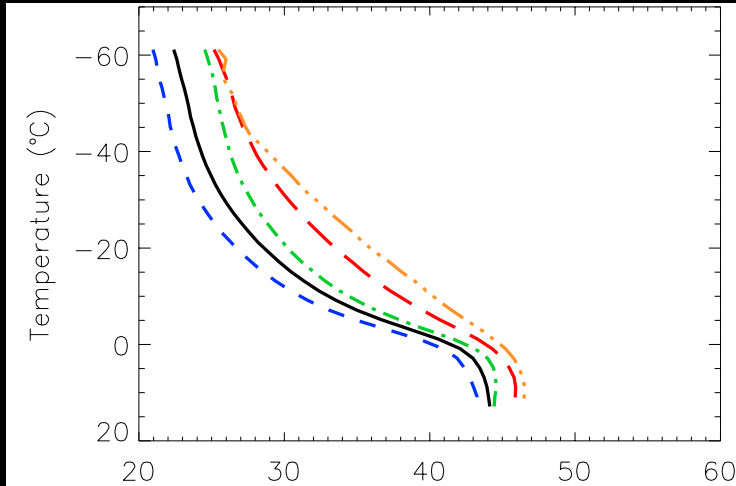



Median Maximum Ku-band Reflectivity (dBZ)

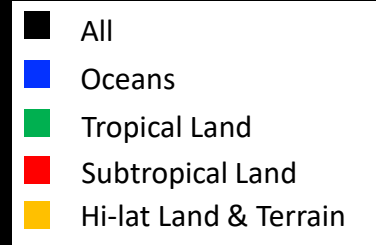

Testing with Ku-band Radar: Profiles

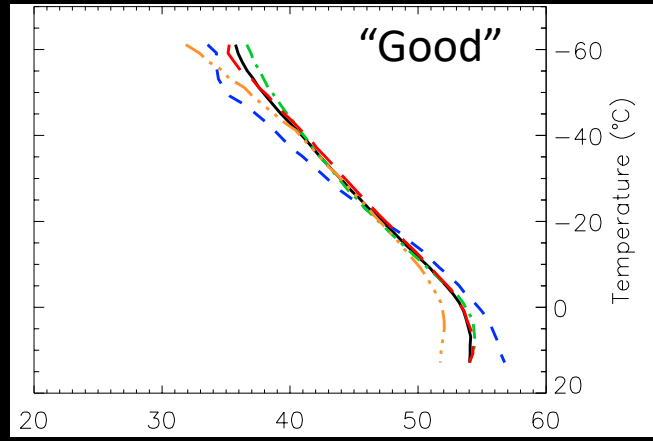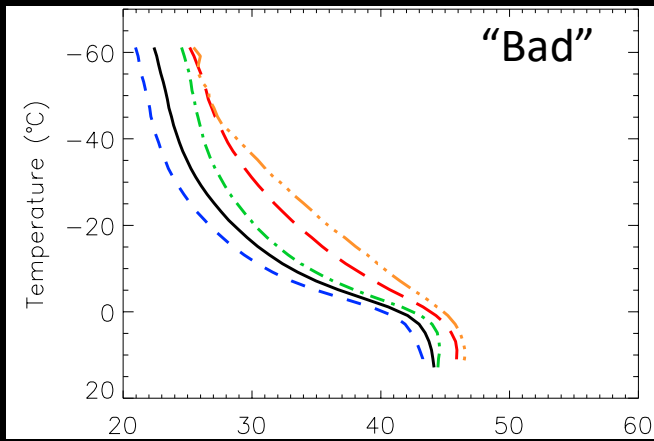


Testing with Ku-band Radar: Profiles

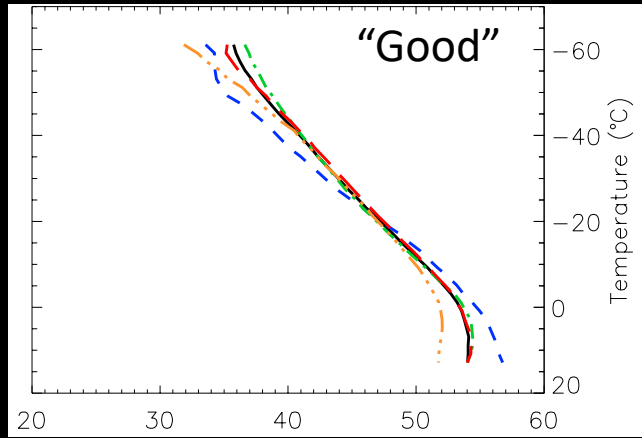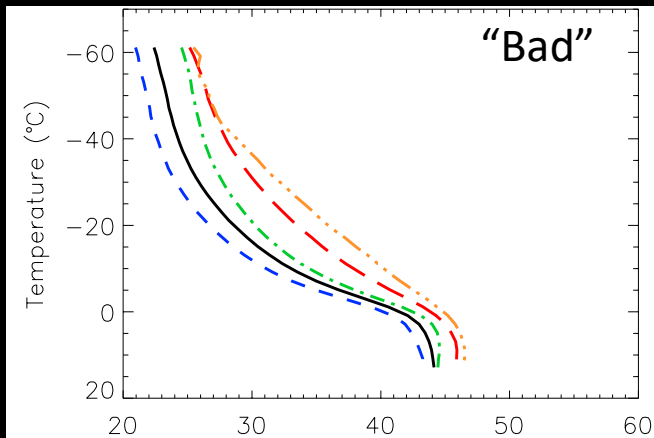


Median Maximum Ku-band Reflectivity (dBZ)


Ni et al. (2017)
37 GHz Cutoff

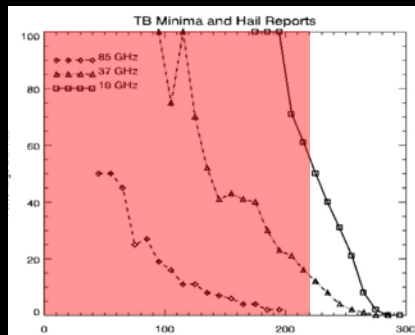


Cecil and Blankenship (2012)
37 GHz Lookup Table

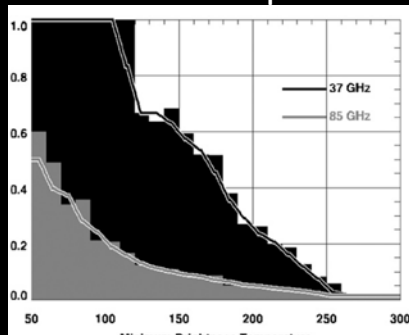



Mroz et al. (2017)
19 GHz Cutoff

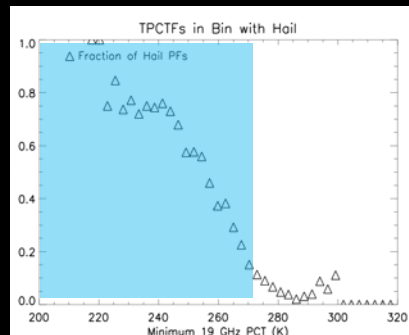

Bang and Cecil (2019)
37 & 19 GHz Function

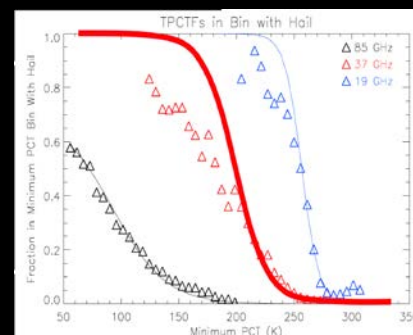


Testing with Ku-band Radar: Profiles

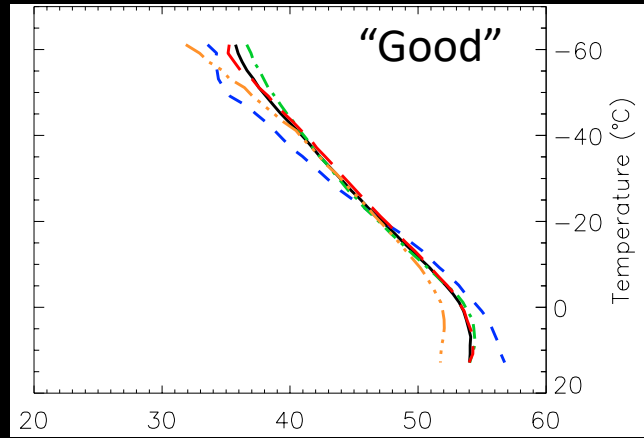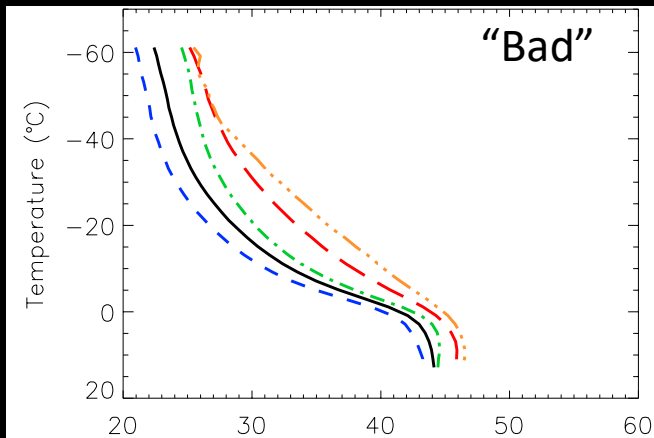


Median Maximum Ku-band Reflectivity (dBZ)


Ni et al. (2017)
37 GHz Cutoff

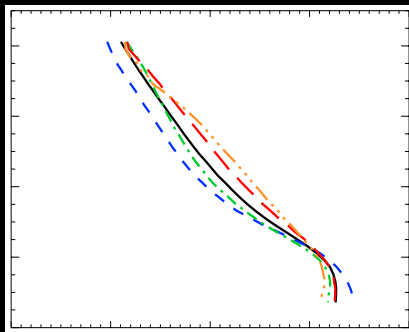


Cecil and Blankenship (2012)
37 GHz Lookup Table

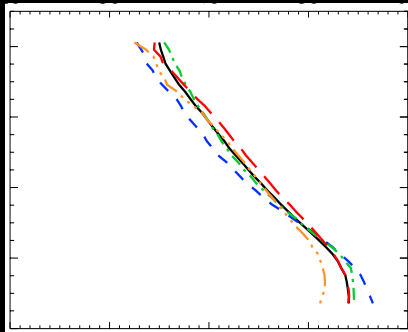

Mroz et al. (2017)
19 GHz Cutoff

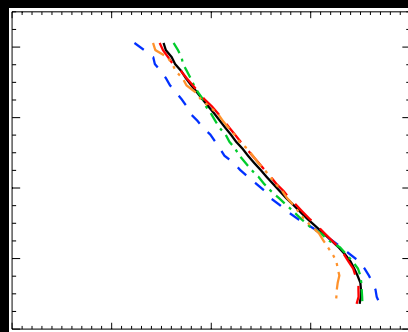


Bang and Cecil (2019)
37 & 19 GHz Function

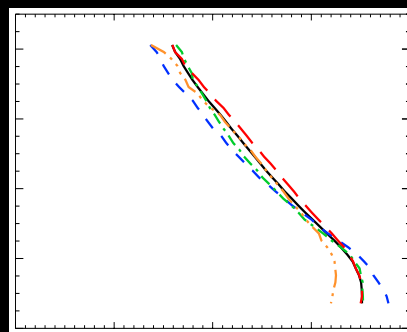


Testing with Ku-band Radar: Bias Maps

The
“poor performing”
algorithm

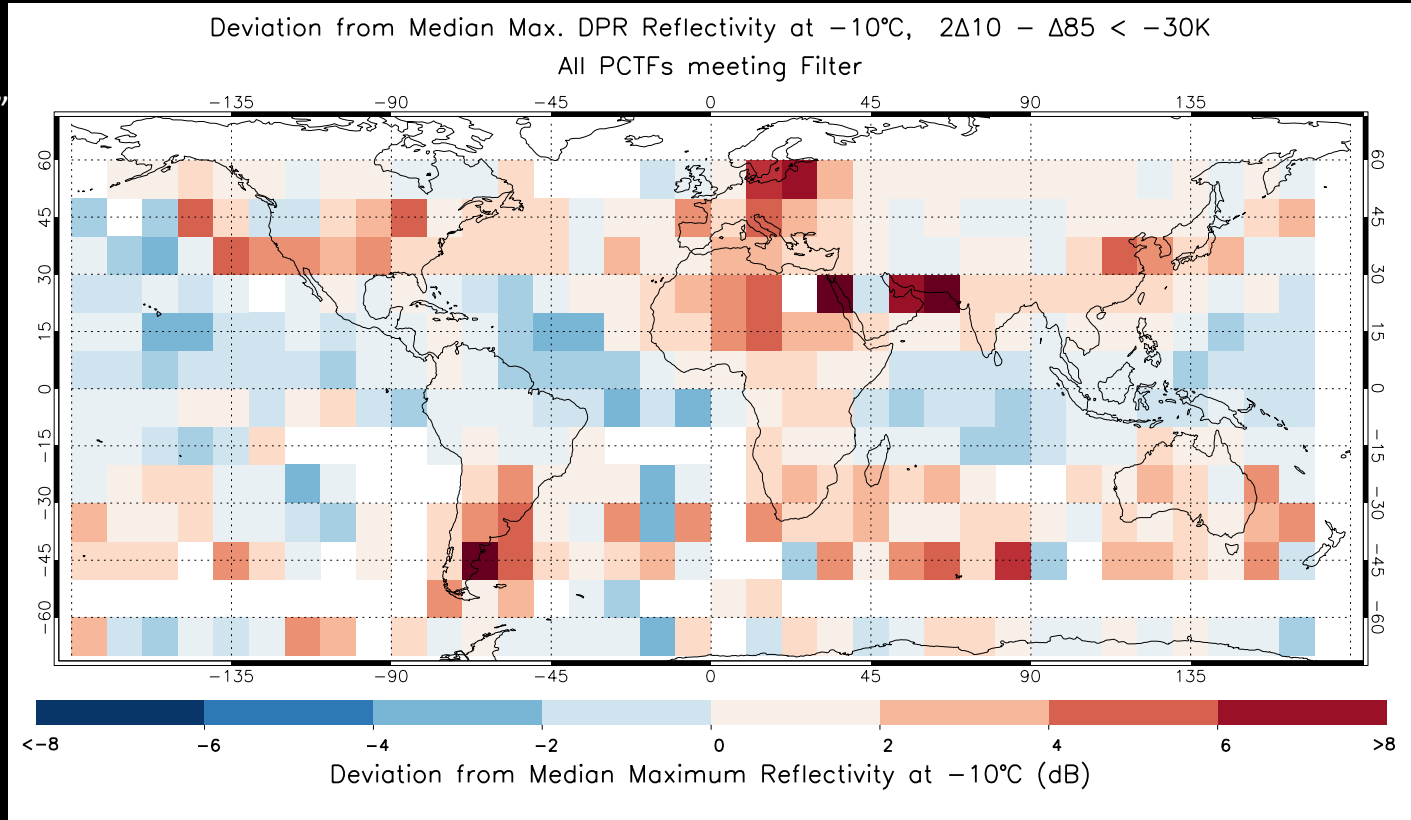

Testing with Ku-band Radar: Bias Maps

*A “perfect” map, with no regional bias, would have no color

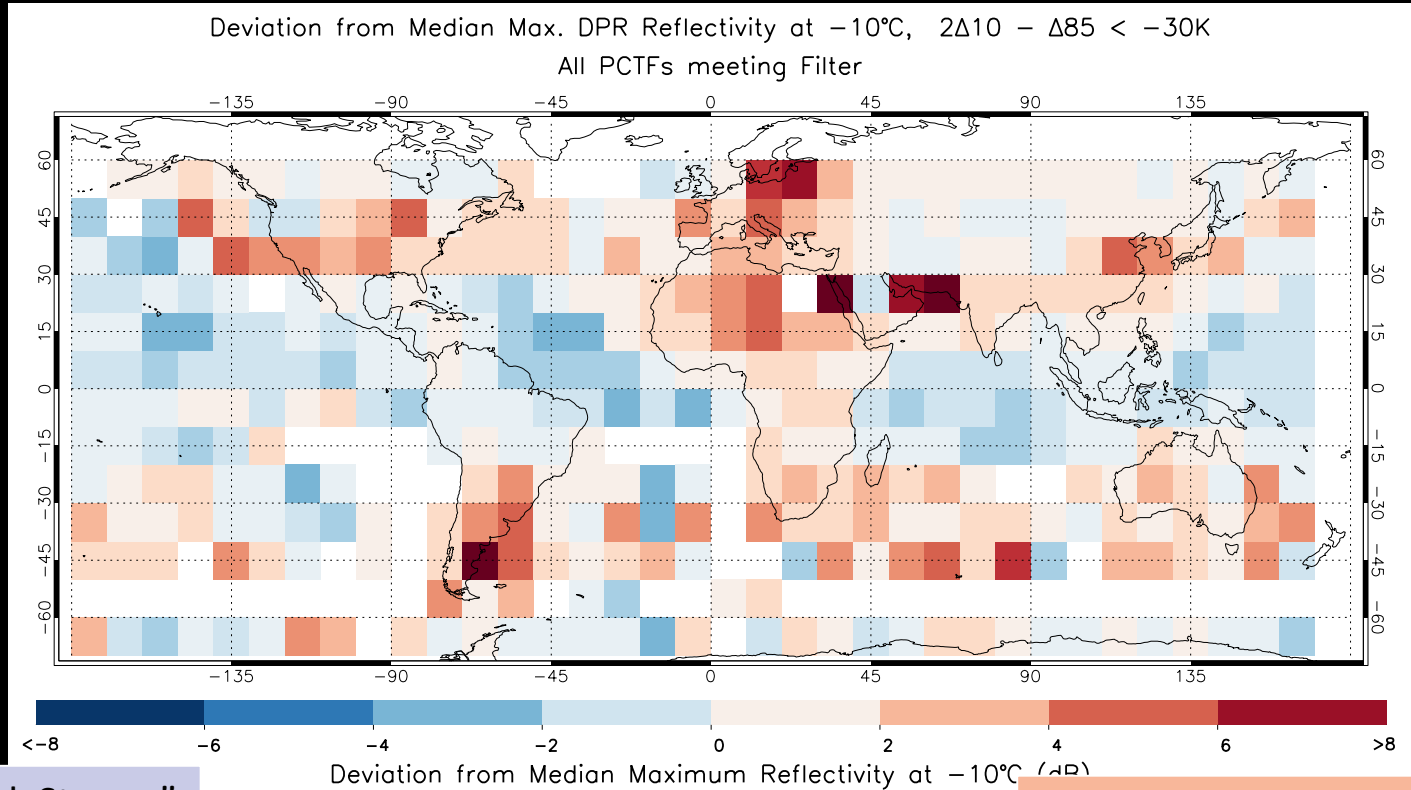


“Boosting Weak Storms”


“Demoting Strong Storms”

Testing with Ku-band Radar: Bias Maps


Ni et al. (2017) • 37 GHz Cutoff

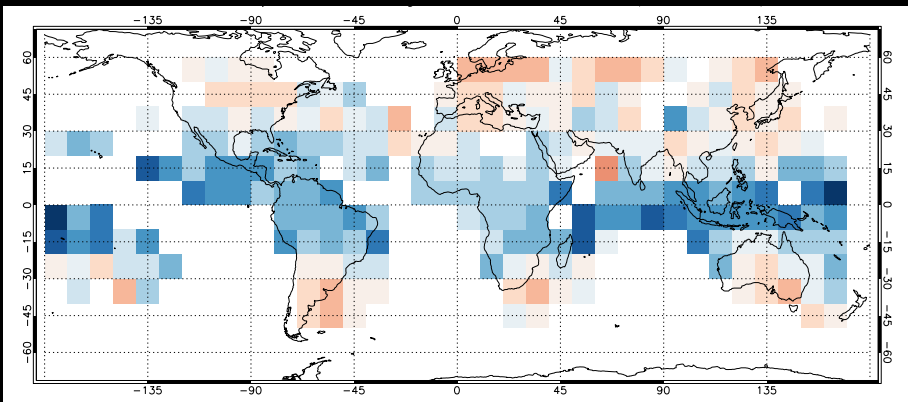


Mroz et al. (2017) • 19 GHz

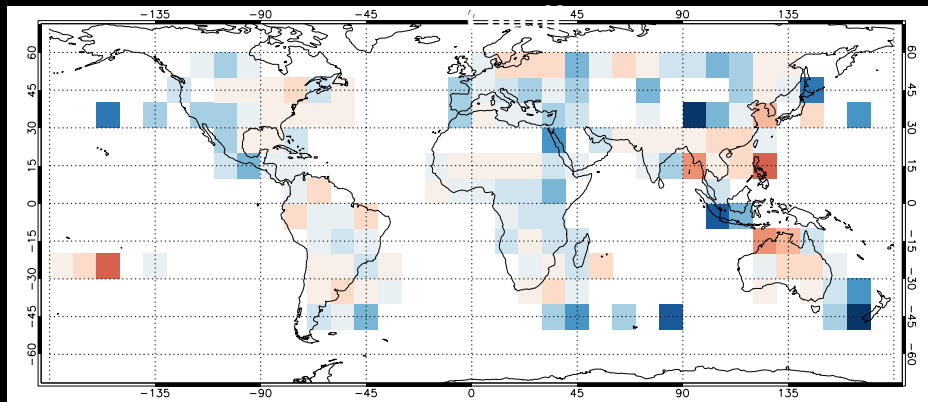

Cecil and Blankenship (2012) • 37 GHz Lookup Table

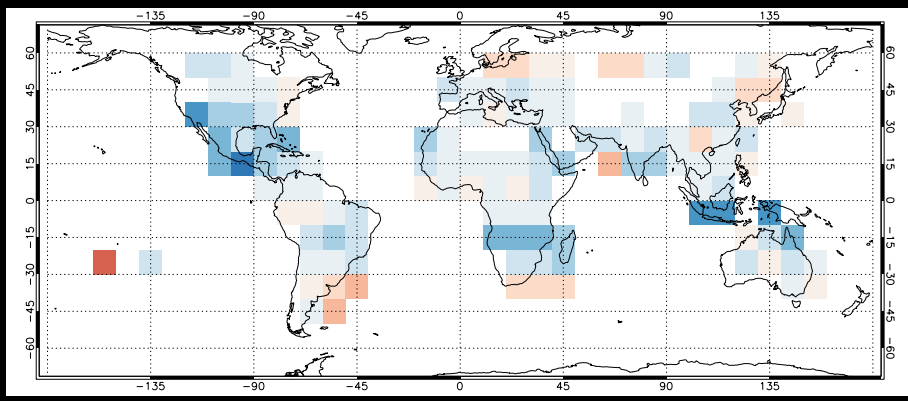

Bang and Cecil (2019) • 37 & 19 GHz Function

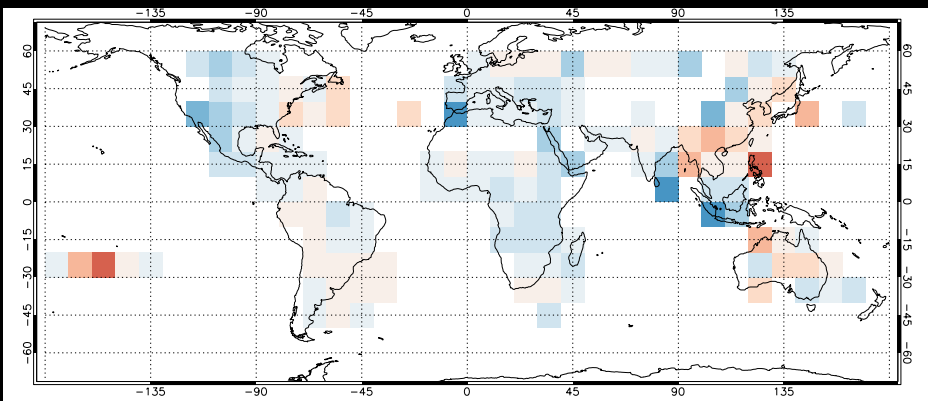





Summary

Train a hail detection algorithm on a TRMM feature database paired with surface hail reports. Create a P_{hail} function based on both 37 & 19 GHz PCTS

After adjusting for footprint size and surface snow and ice, apply that algorithm to features in the GPM domain to build a near-global climatology of hail.

Test the performance of the retrieval using concurrent DPR Ku-band radar profiles in different geographic regimes, and against other retrieval techniques.

Test the regional bias of our retrievals (and others in the literature) by looking at radar deviations over the entire GPM domain

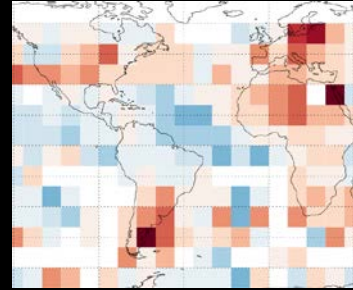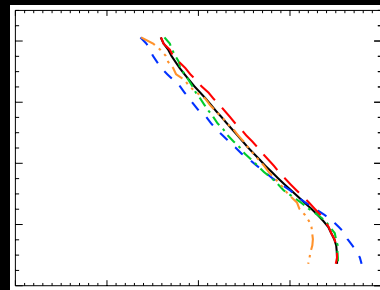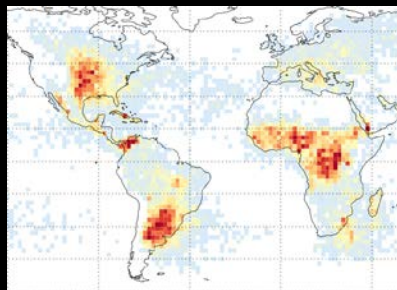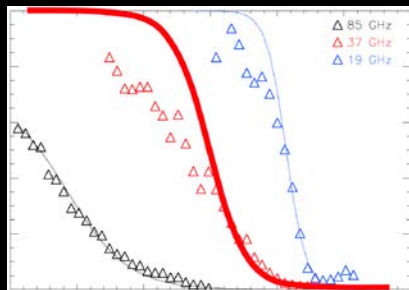

Building

Testing

SPECIAL

Global Precipitation Measurement (GPM)

COLLECTION

Constructing a Multifrequency Passive Microwave Hail Retrieval and Climatology in the GPM Domain

Testing a Passive Microwave-based Hail Retrieval and Climatology using GPM DPR Ku-band Radar

Sarah D. Bang¹, Daniel J. Cecil²

¹NASA Postdoctoral Program, NASA Marshall Space Flight Center, Huntsville, Alabama, USA

²NASA Marshall Space Flight Center, Huntsville, Alabama, USA

Contact us at:

Sarah.D.Bang@nasa.gov

Daniel.J.Cecil@nasa.gov

Thank You!



References

- Allen, J., and M. Tippett, 2015: The characteristics of United States hail reports: 1955–2014. *Electronic Journal of Severe Storms Meteorology*, 10, 1–31.
- Aon Benfield, 2018: Global catastrophe recap: First half of 2018. Aon Benfield Analytics and Impact Forecasting, 1-12 pp.
- Bang, S.D. and D.J. Cecil, 2019: Constructing a Multifrequency Passive Microwave Hail Retrieval and Climatology in the GPM Domain. *J. Appl. Meteor. Climatol.*, **58**, 1889–1904.
- Cecil, D. J., 2009: Passive microwave brightness temperatures as proxies for hailstorms *J Appl Meteorol Climatol.*, 48 (6), 1281–1286.
- Cecil, D. J., 2011: Relating passive 37-GHz scattering to radar profiles in strong convection *J Appl Meteorol Climatol.*, 50 (1), 233–240.
- Cecil, D. 556 J., and C. B. Blankenship, 2012: Toward a global climatology of severe hailstorms as estimated by satellite passive microwave imagers. *Journal of Climate*, 25 (2), 687–703.
- Hou, A. Y., and Coauthors, 2014: The global precipitation measurement mission. *Bull. Amer. Meteor. Soc.*, 95 (5), 701–722.
- Kummerow, C., W. Barnes, T. Kozu, J. Shiue, and J. Simpson, 1998: The tropical rainfall measuring mission (TRMM) sensor package. *Journal of Atmospheric and Oceanic Technology*, 15 (3), 809–817.
- Mroz, K., A. Battaglia, T. J. Lang, D. J. Cecil, S. Tanelli, and F. Tridon, 2017: Hail-detection algorithm for the GPM core observatory satellite sensors. *J Appl Meteorol Climatol.*, 56 (7), 1939–1957.
- Ni, X., C. Liu, D. J. Cecil, and Q. Zhang, 2017: On the detection of hail using satellite passive microwave radiometers and precipitation radar. *J Appl Meteorol Climatol.*, 56 (10), 2693–2709.
- Spencer, R.W., M. R. Howland, and D. A. Santek, 1987: Severe storm identification with satellite microwave radiometry: An initial investigation with Nimbus-7 SMMR data. *J Appl Meteorol Climatol.*, 26 (6), 749–754.