LAVA Results for SBPW3

James Jensen, Jared Duensing, Michael Piotrowski, Jeffrey Housman, Daniel Maldonado, and Cetin Kiris

01/04/2020

LAVA Team
Computational Aerosciences Branch
NASA Ames Research Center

Outline

- Summary of Cases Analyzed
- Computational Methodology
  - LAVA Framework
  - Computational Meshes
- Computing Resources
- Flow Solver Convergence
- Solution Visualizations
- Highlights
  - Sensitivity to Solution Initialization
- Summary

Summary of Cases

- Biconvex
  - Grid Refinement Study
  - Comparison between different numerical schemes

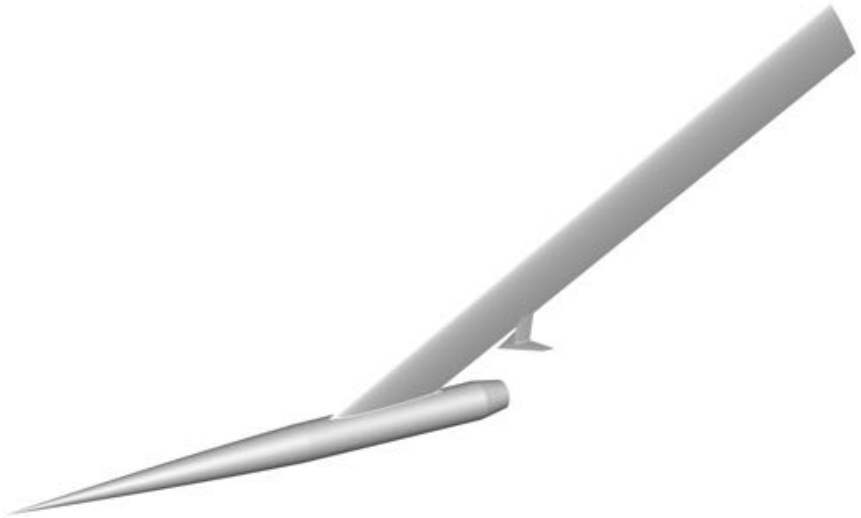

- C608 LBFD
  - Grid Refinement Study
  - Comparison between two flight conditions

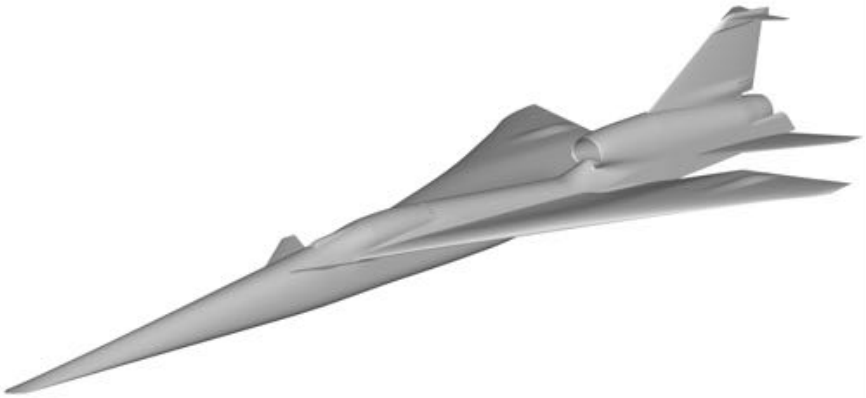

Launch Ascent & Vehicle Aerodynamics (LAVA) Framework

Unstructured Arbitrary Polyhedral

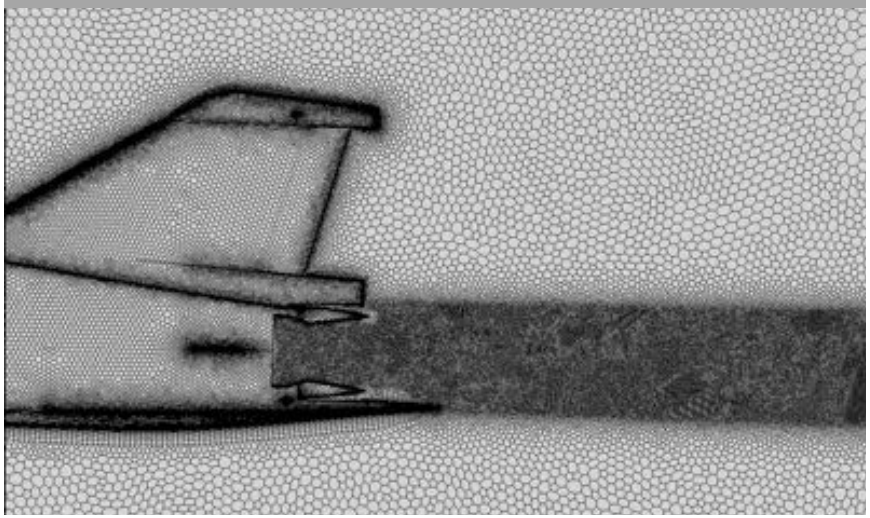

- Cell Centered
- Steady-state RANS
- Spallart-Allmaras Turbulence Model
- 2nd Order AUSMPW+ flux function
- Minmod limiter

Structured Curvilinear

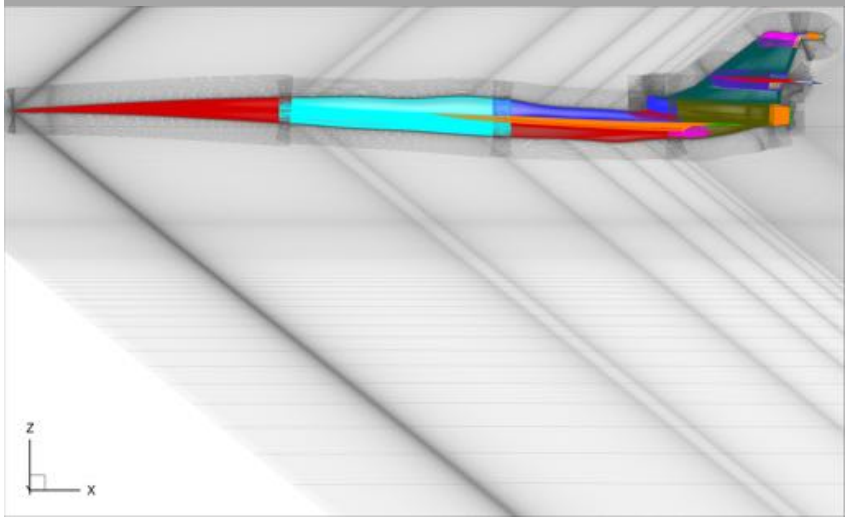

- Vertex Centered
- Steady-state RANS
- Spallart-Allmaras Turbulence Model with RC and QCR2000
- 4th Order Hybrid Weighted Compact Nonlinear Scheme (HWCNS) and 3rd Order Upwind scheme with central blending (UPW)

Grid Information (Unstructured Arbitrary Polyhedral)

- Biconvex
  - Very Coarse: 7.4 M
  - Coarse: 12.4 M
  - Medium: 27 M
  - Fine: 55.1 M
- C608
  - Coarse: 27.7 M
  - Medium: 94.4 M
  - Fine: 140 M

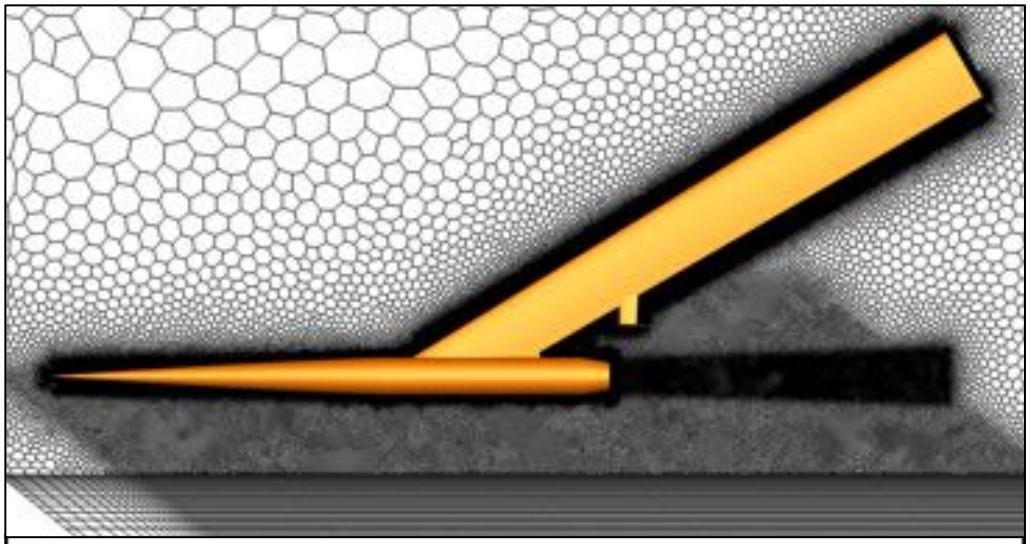

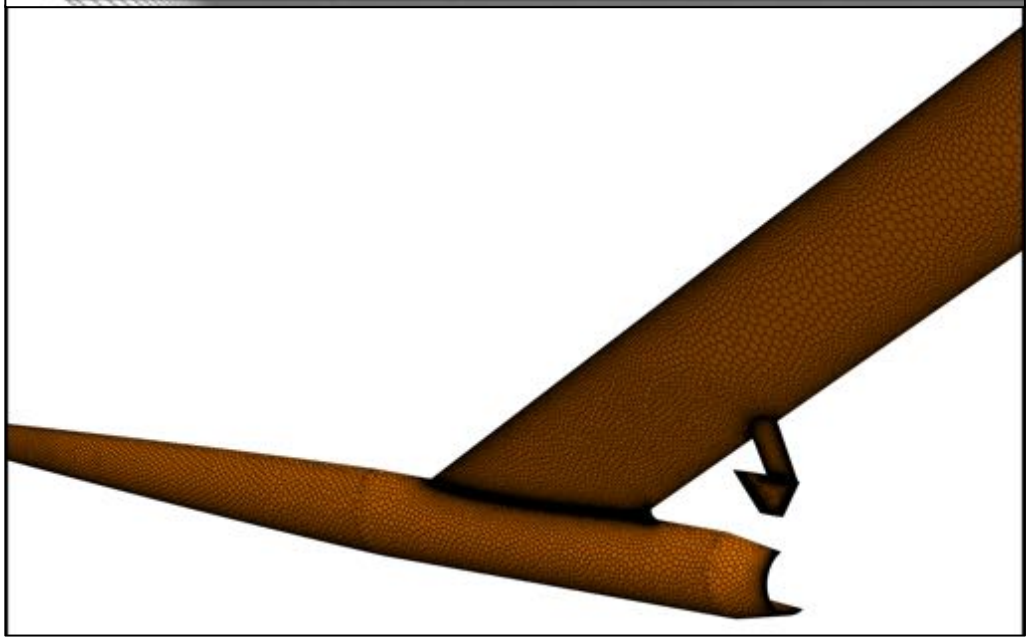

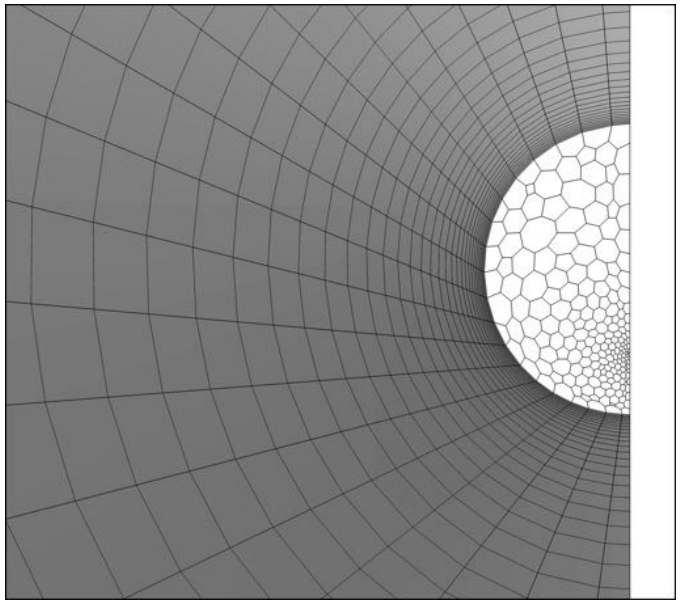

Grid Information (Structured Curvilinear)

- Biconvex
  - Coarse: 29.1 M
  - Medium: 60 M
  - Fine: 136.2 M
- C608
  - Coarse: 40.3 M
  - Medium: 127.4 M
  - Fine: 450.9 M

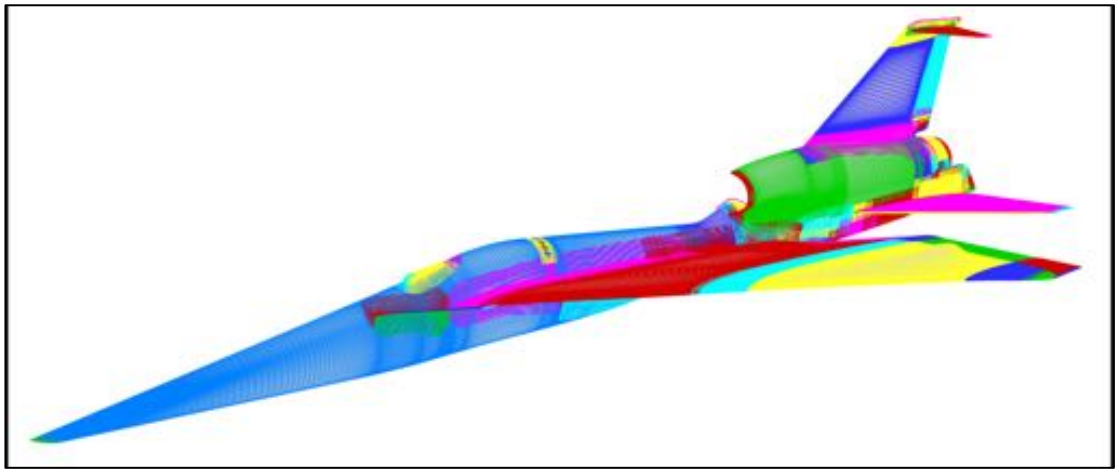

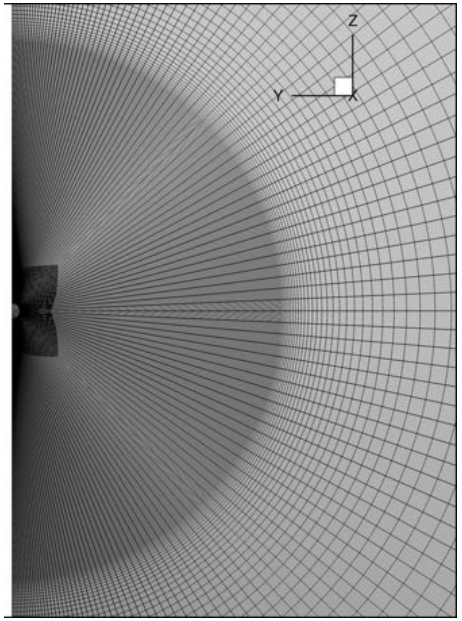

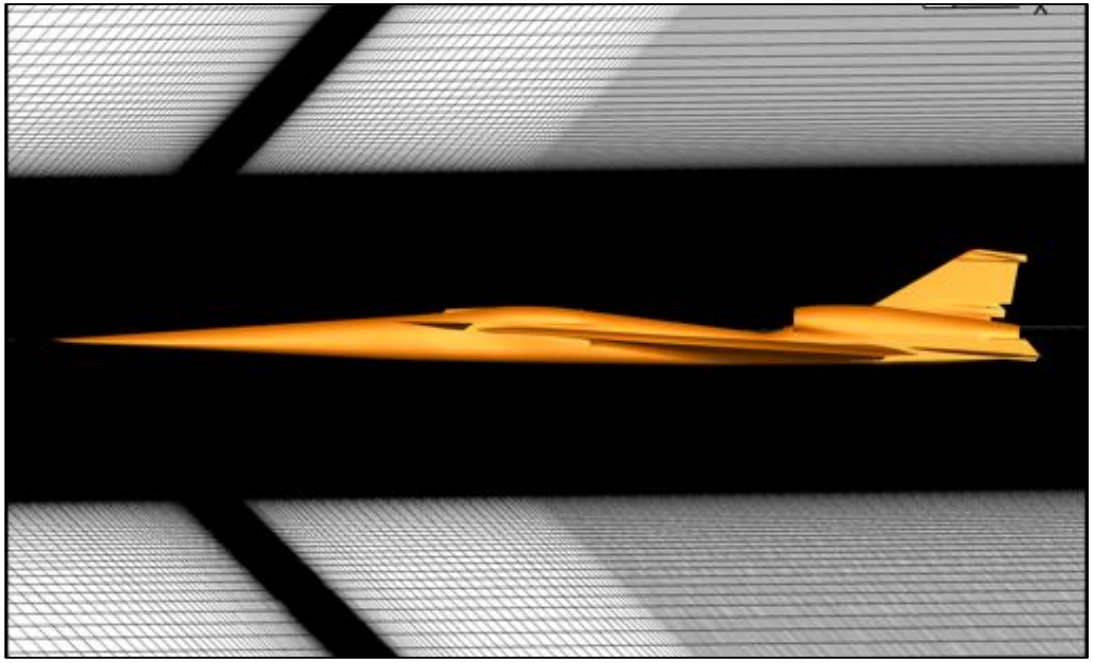

Computing Requirements

Pleiades Supercomputer (NAS)

- Manufacturer: SGI/HPE
- 158 racks (11,207 nodes)
- 7.09 Pflop/s peak cluster
- 5.95 Pflop/s LINPACK (#32 Nov. 2019)
- Total Cores: 241,324

Resources (Time per 1000 steps)

- Case: C608

Grid ($x10^6$)	Flux	Model	Proc	Nodes (cores)	Time
U-Coarse (27.7)	AUSMPW+	RANS-SA	Broadwell	28 (560)	43 min.
U-Medium (94.4)	AUSMPW+	RANS-SA	Broadwell	38 (1064)	1 hr. 38 min.
U-Fine (140)	AUSMPW+	RANS-SA	Broadwell	60 (1680)	2 hr.
S-Coarse (40.3)	Roe	RANS-SA-RC-QCR2000	Ivy Bridge	30 (600)	55 min.
S-Medium (127.4)	Roe	RANS-SA-RC-QCR2000	Ivy Bridge	64 (1280)	1 hr. 22 min.
S-Fine (450.9)	Roe	RANS-SA-RC-QCR2000	Ivy Bridge	292 (5840)	1 hr. 25 min.

Flow Solver Convergence (C608 Medium Grids)

Unstructured

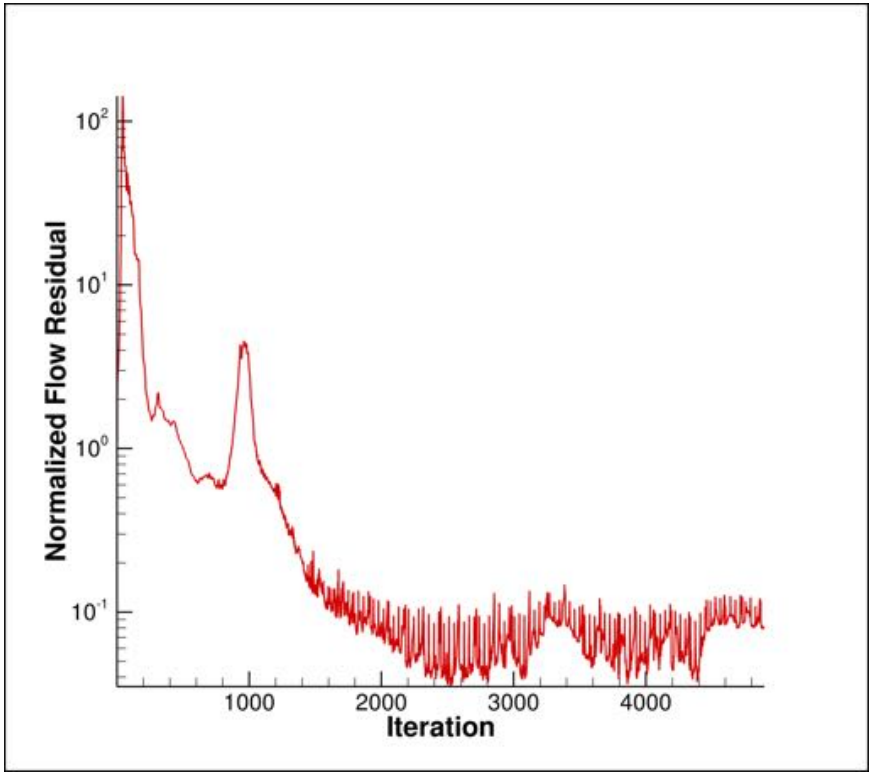

Structured

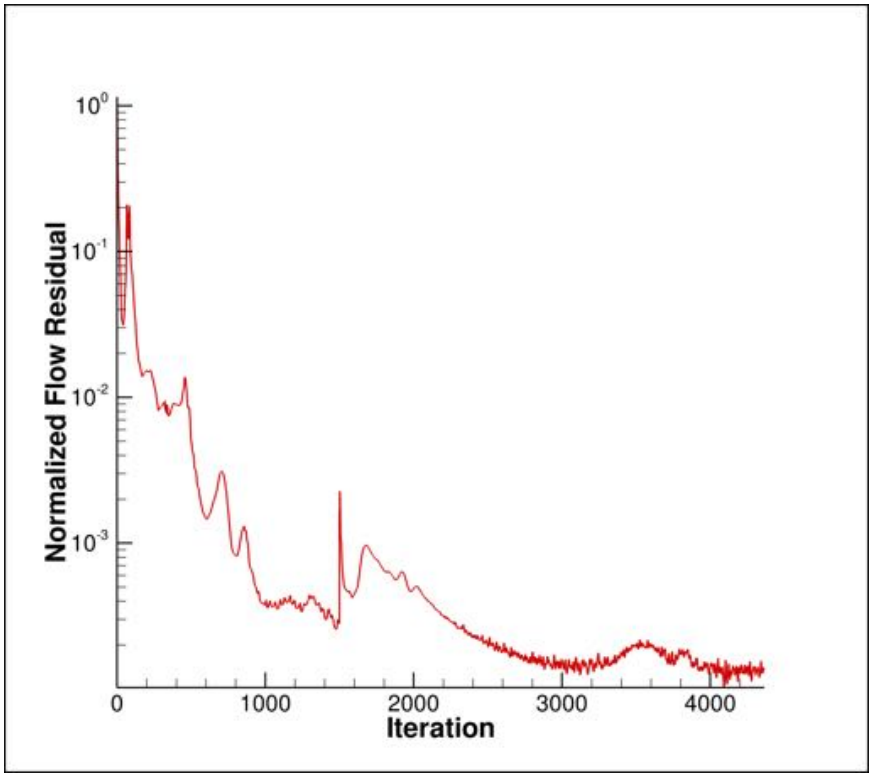

- Observed approximately three orders of magnitude reduction in the flow equation residual using both mesh topologies
- Both plots are representative of the convergence across both geometries

Flow Solver Convergence (Unstructured Example)

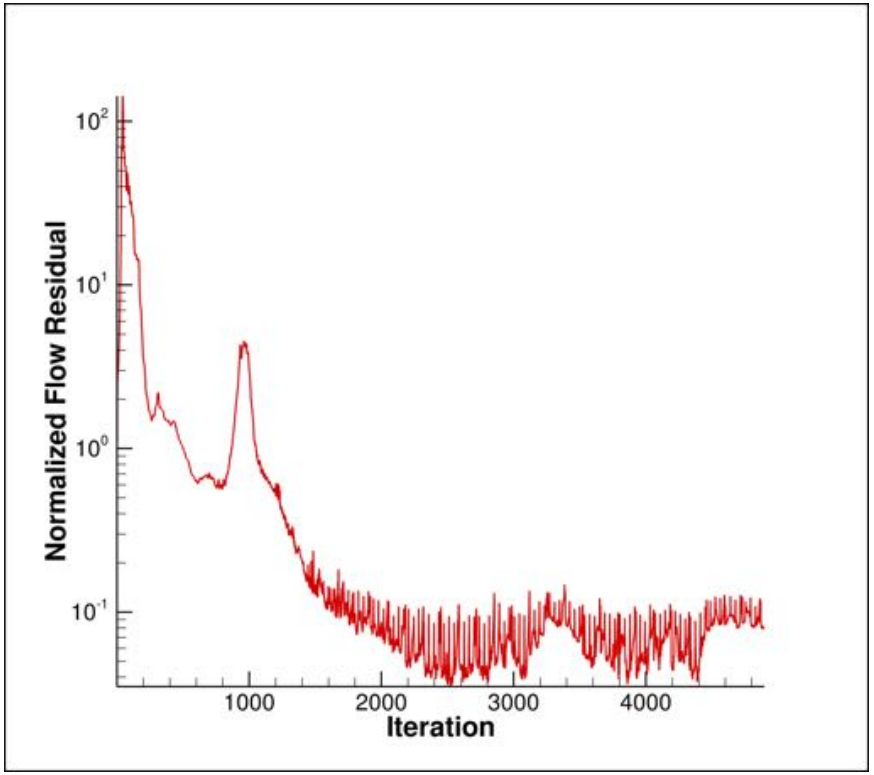

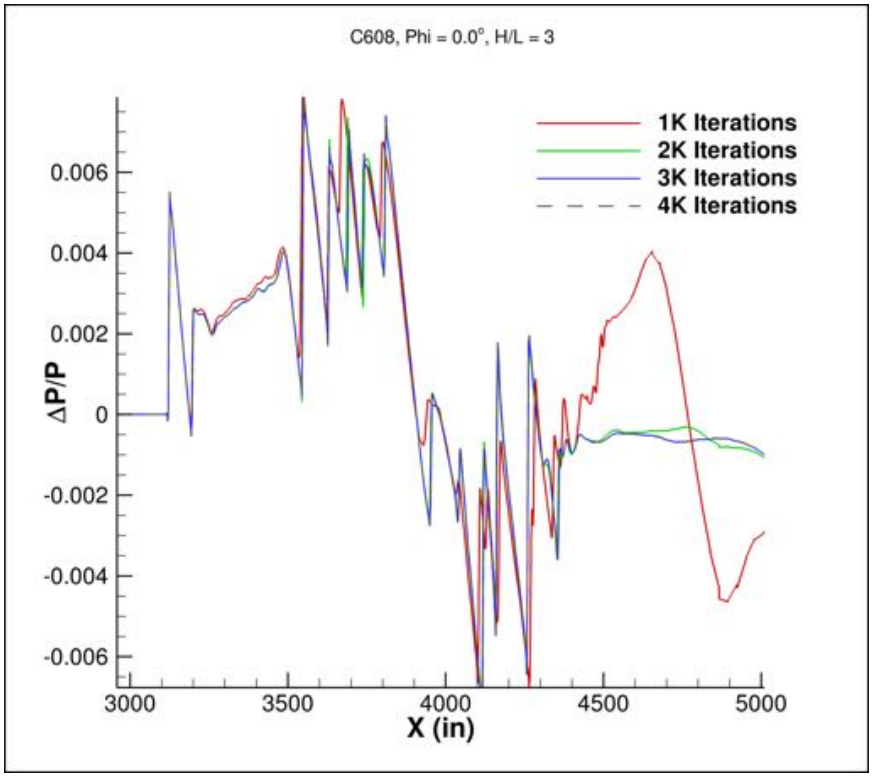

- Can see that by 3000 iterations our line signature has converged to its final predicted value

Biconvex Near Field Signals

Unstructured

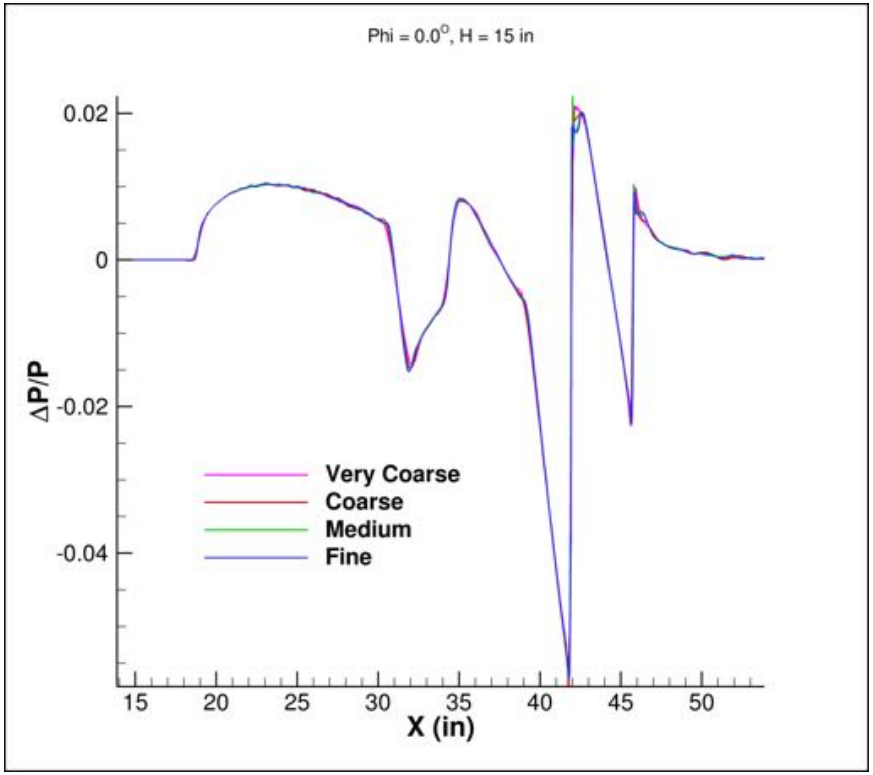

Structured

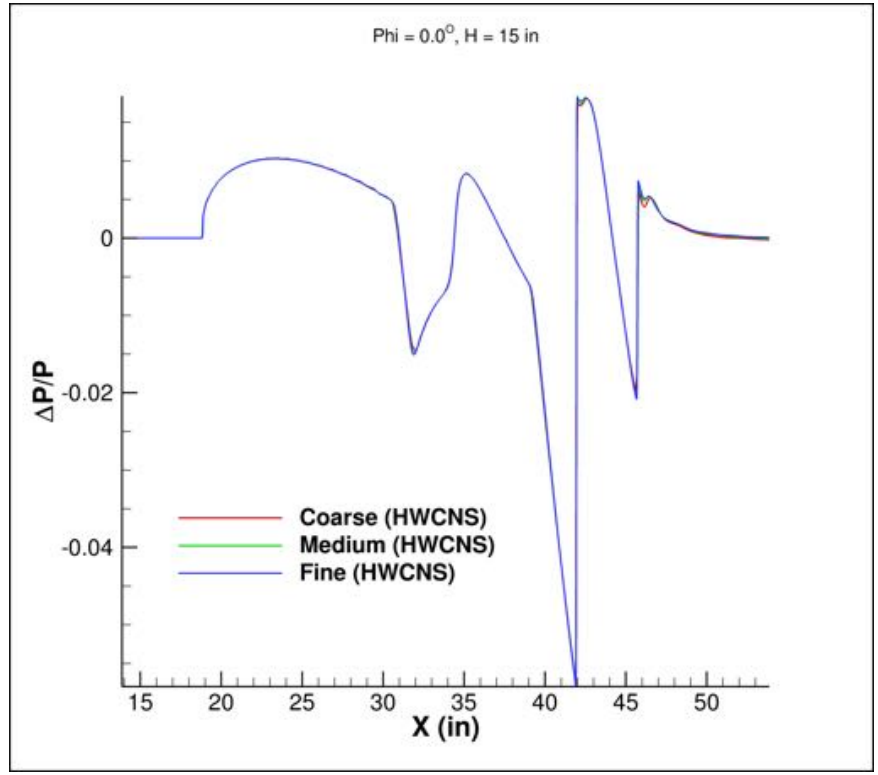

- For both mesh topologies, as the grids are refined the largest areas of difference are at the expansion after the nose of the nozzle (x = 32 in), the shock coming from the nozzle lip (x = 42 in), and the shock coming from the biconvex test article (x = 46)

Biconvex Near Field Signals (Continued)

Grid Type Comparison (Fine)

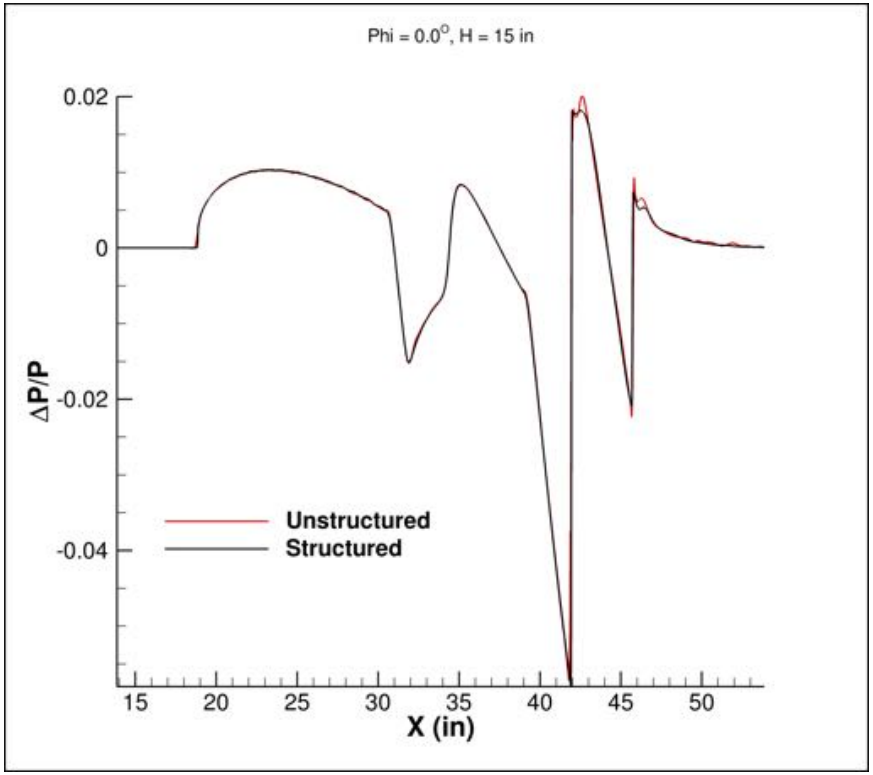

- Both mesh types agree well with each other with only slight variation in the nozzle and biconvex shocks

Scheme Differences (Structured)

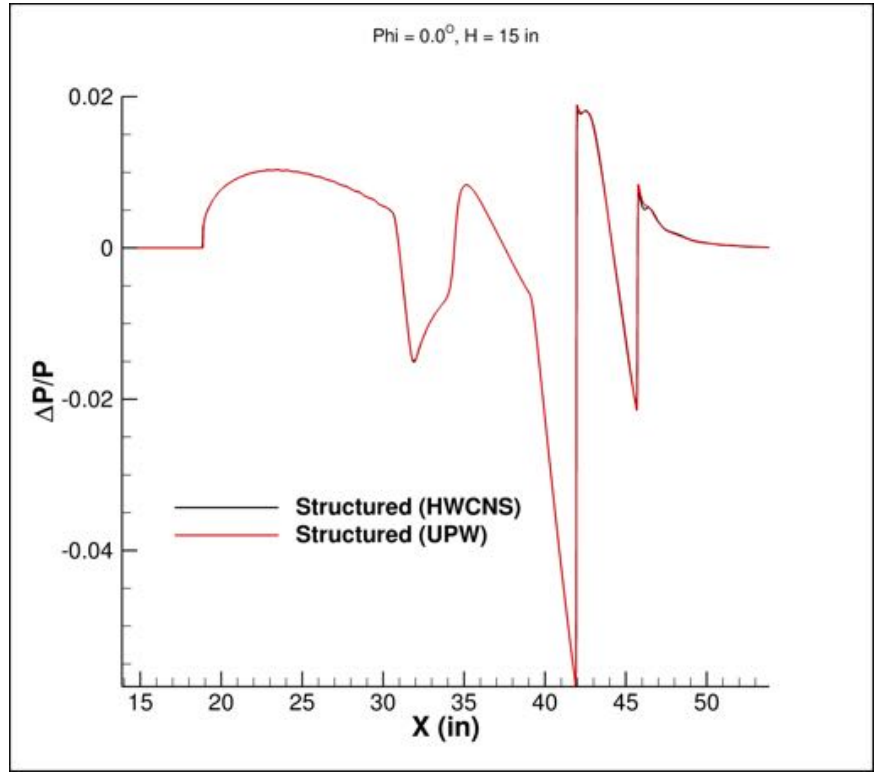

- Only minor differences between the two schemes were observed

Biconvex Pressure Fields

Unstructured

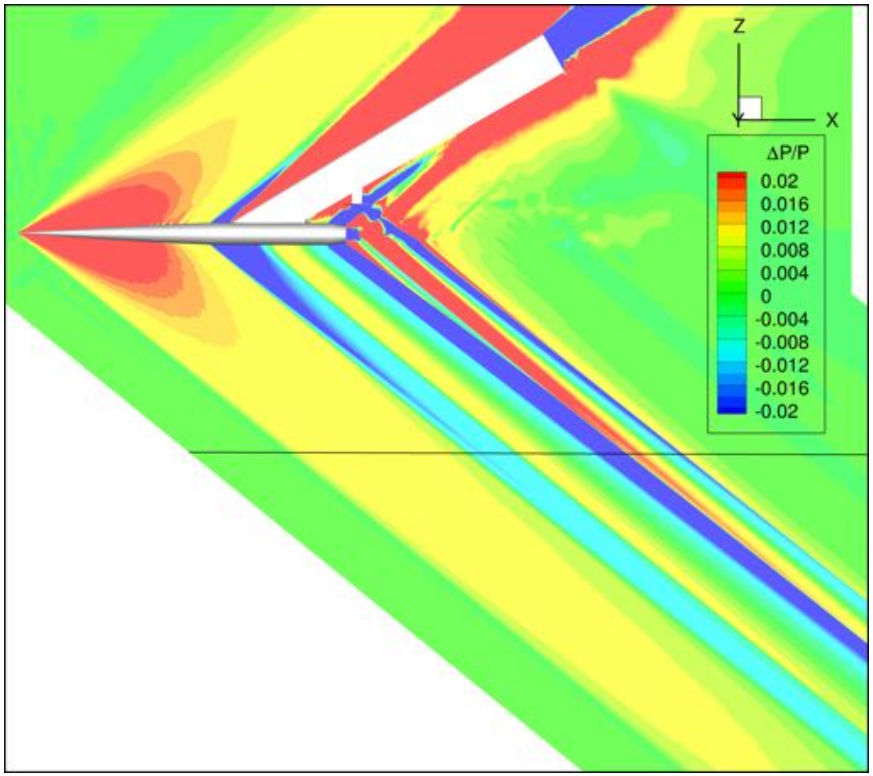

Structured

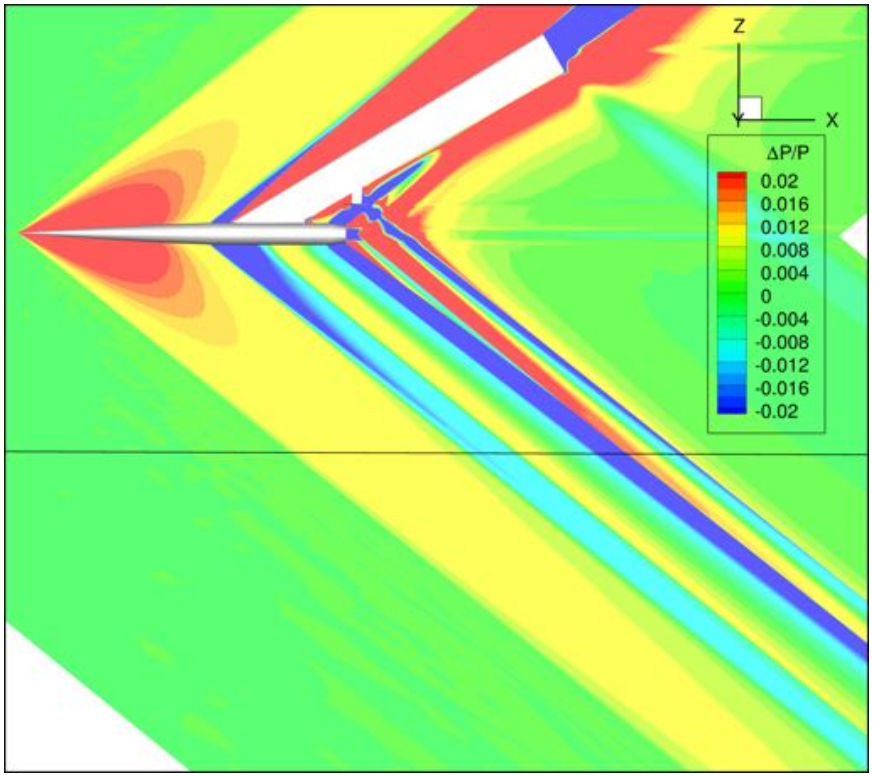

- Pressure fields reflect what was observed in the line probes
- Only minor differences near the aft end of the signature

C608 Near Field Signals

Unstructured

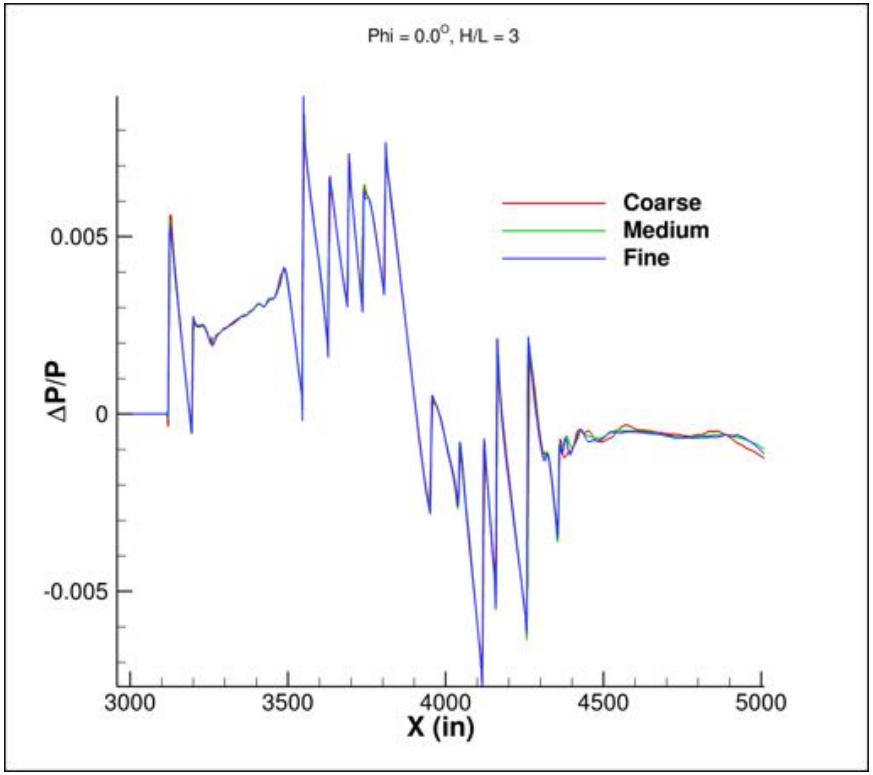

Structured

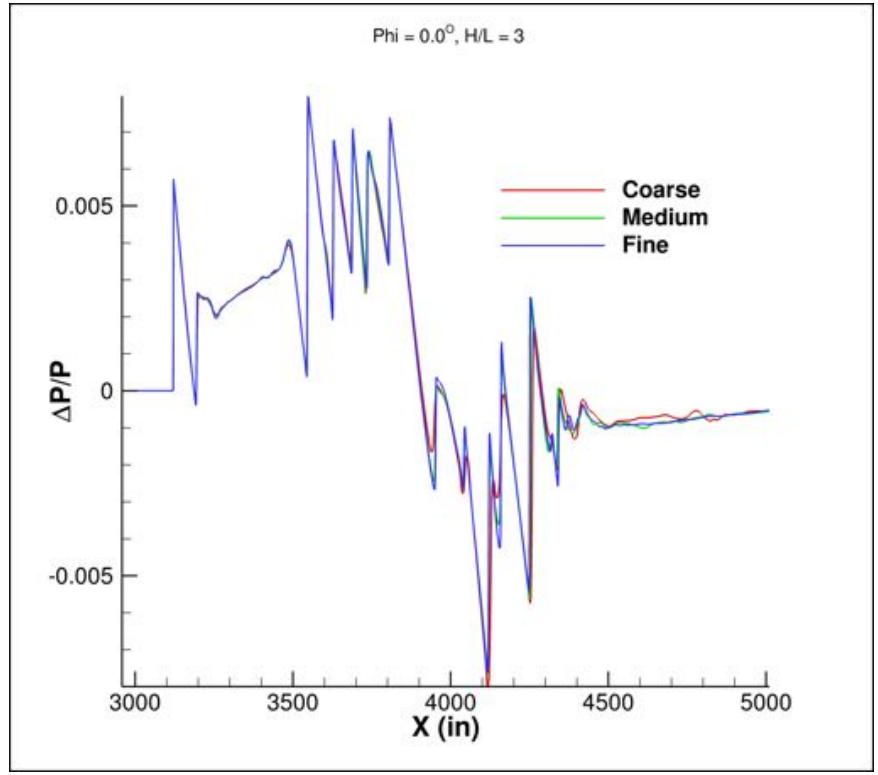

- For both mesh topologies, the aft end of the signature shows the most sensitivity to discretization

C608 Near Field Signals (Continued)

Grid Type Comparisons (Fine)

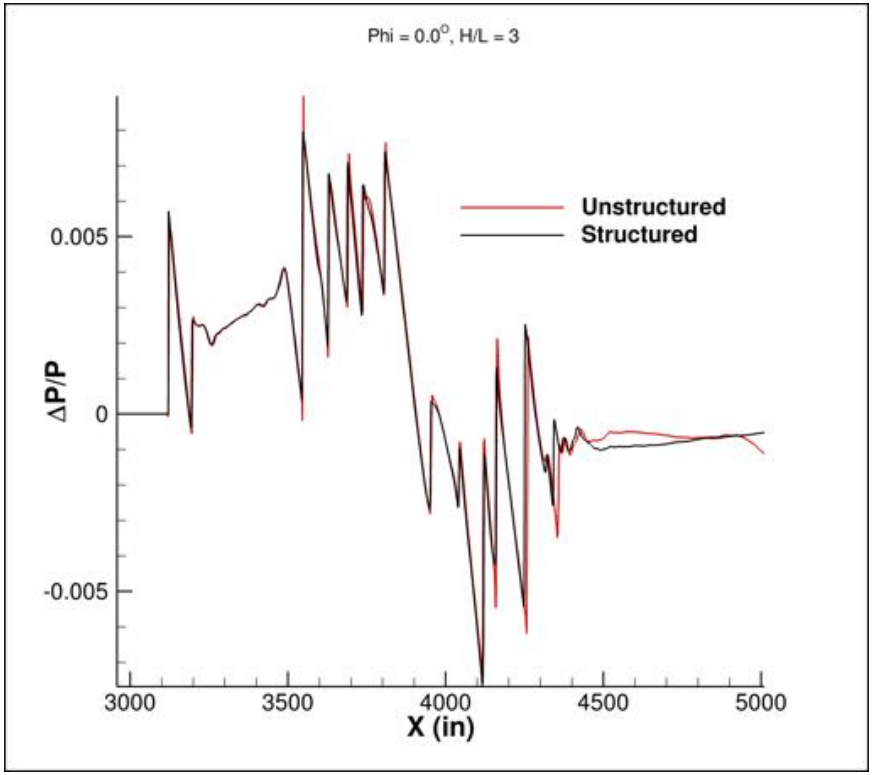

Reynolds Number Comparison (Unst)

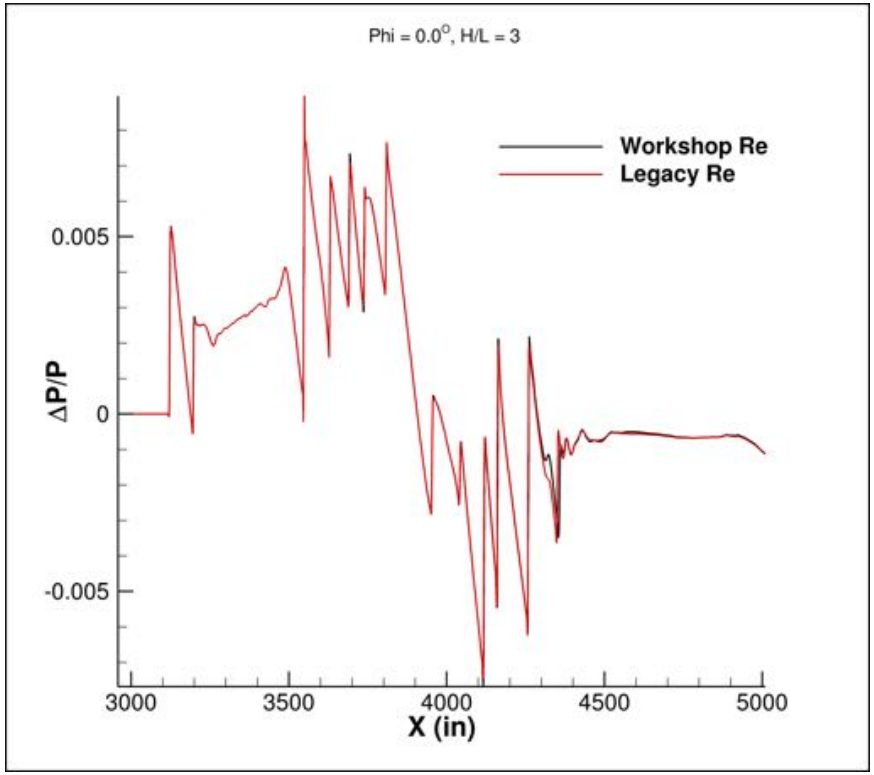

- Both mesh topologies agree well with each other with the aft end of the signature being the area of larges disagreement between the two
- Running with the two different Reynolds numbers showed only a minor difference between the two signatures

C608 Pressure Fields

Unstructured

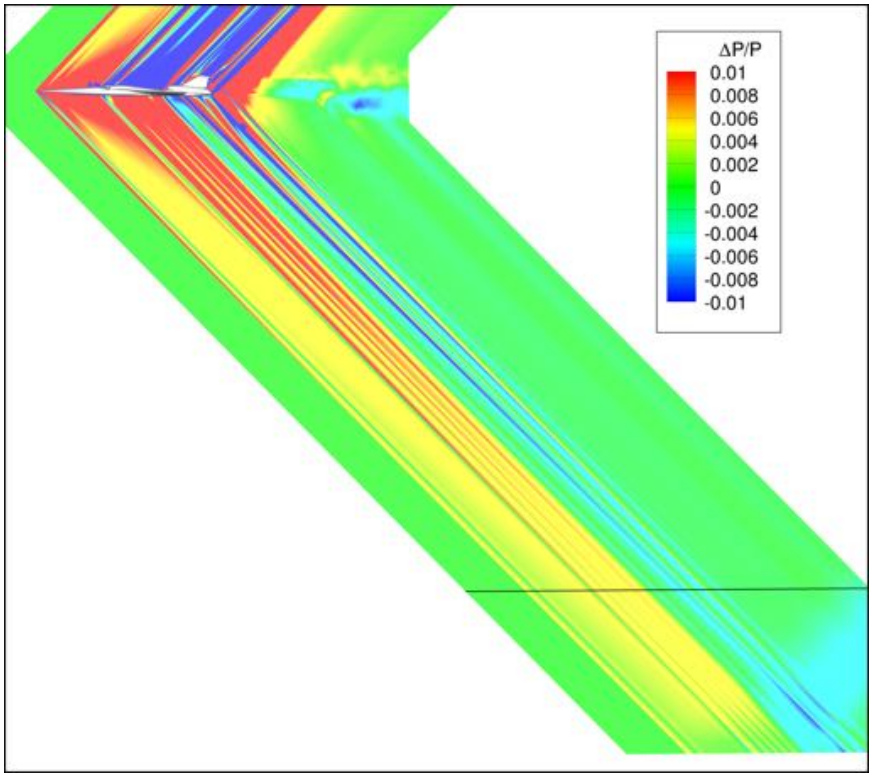

Structured

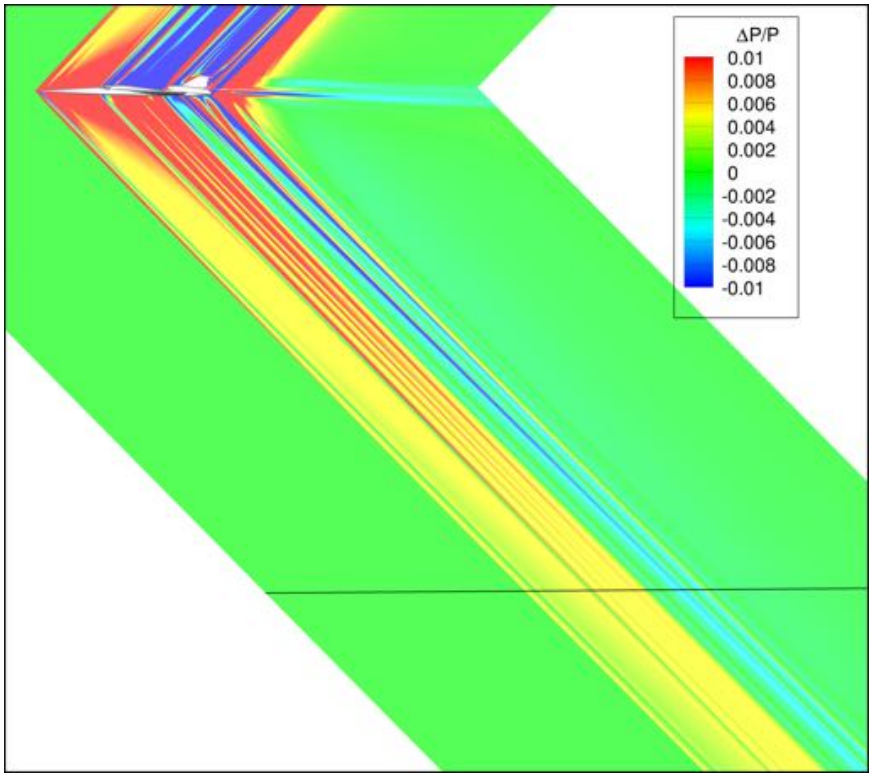

- Pressure fields agree well with one another
- Can see the reflection of the shocks off the boundary in the unstructured solution

Flow Field Initialization (Structured Overset - Fine Grid)

Residual Convergence

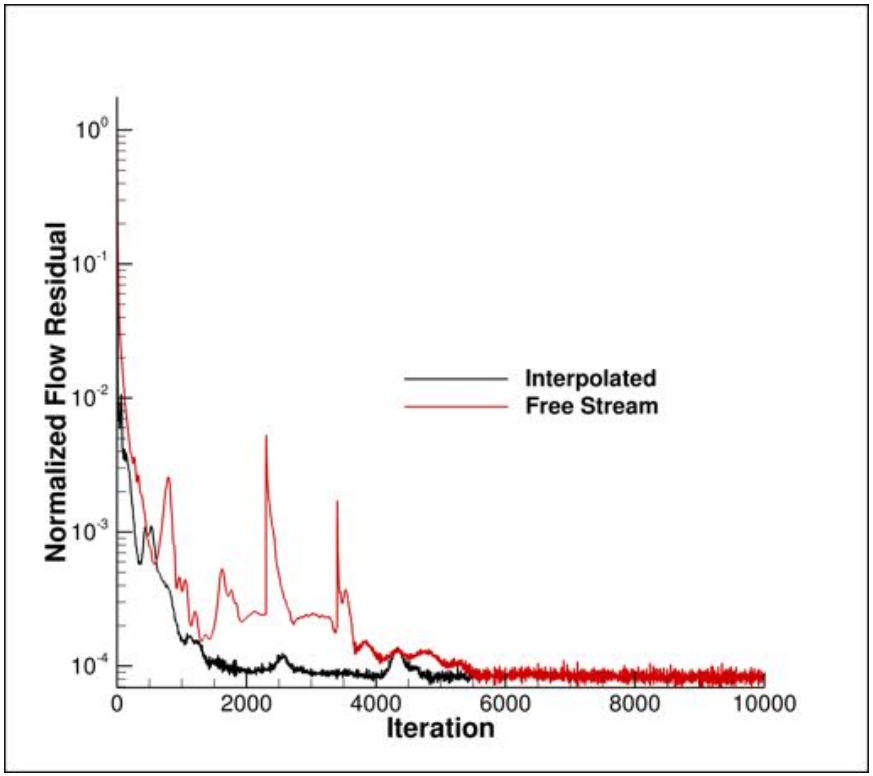

Nearfield Pressure

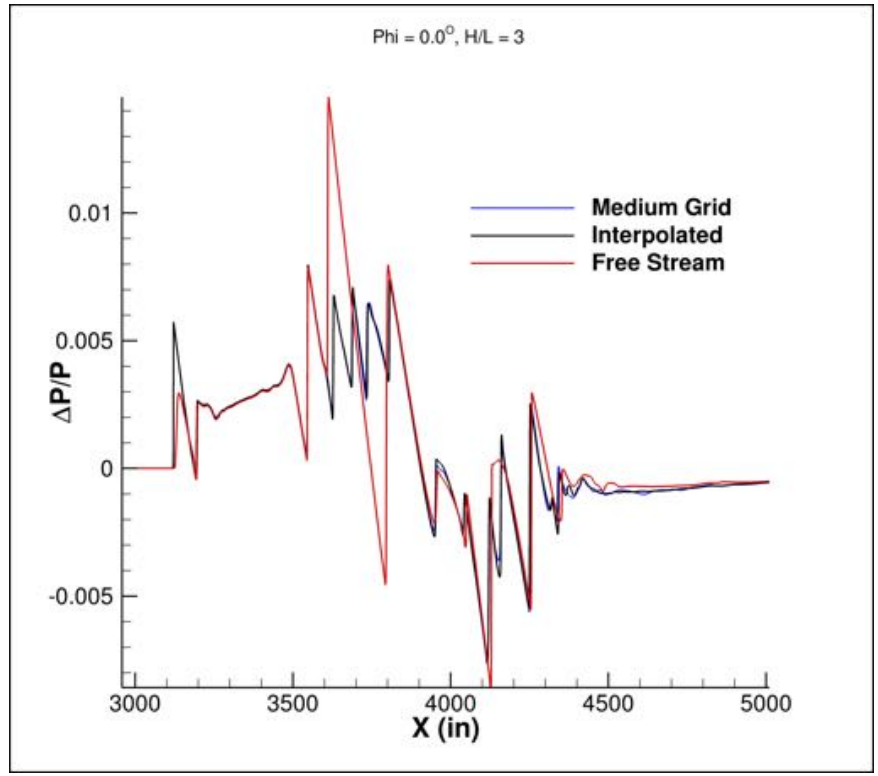

1. Initialized whole field to free stream
2. Manually specified subsonic conditions in Environmental Control System inlet duct
3. Started case with lower order scheme and then increased the order with restarts (Freestream)
4. Initialized flow field by interpolating the medium grid solution onto the fine grid (Interpolated)

Flow Field Initialization – ECS BC Face Comparison

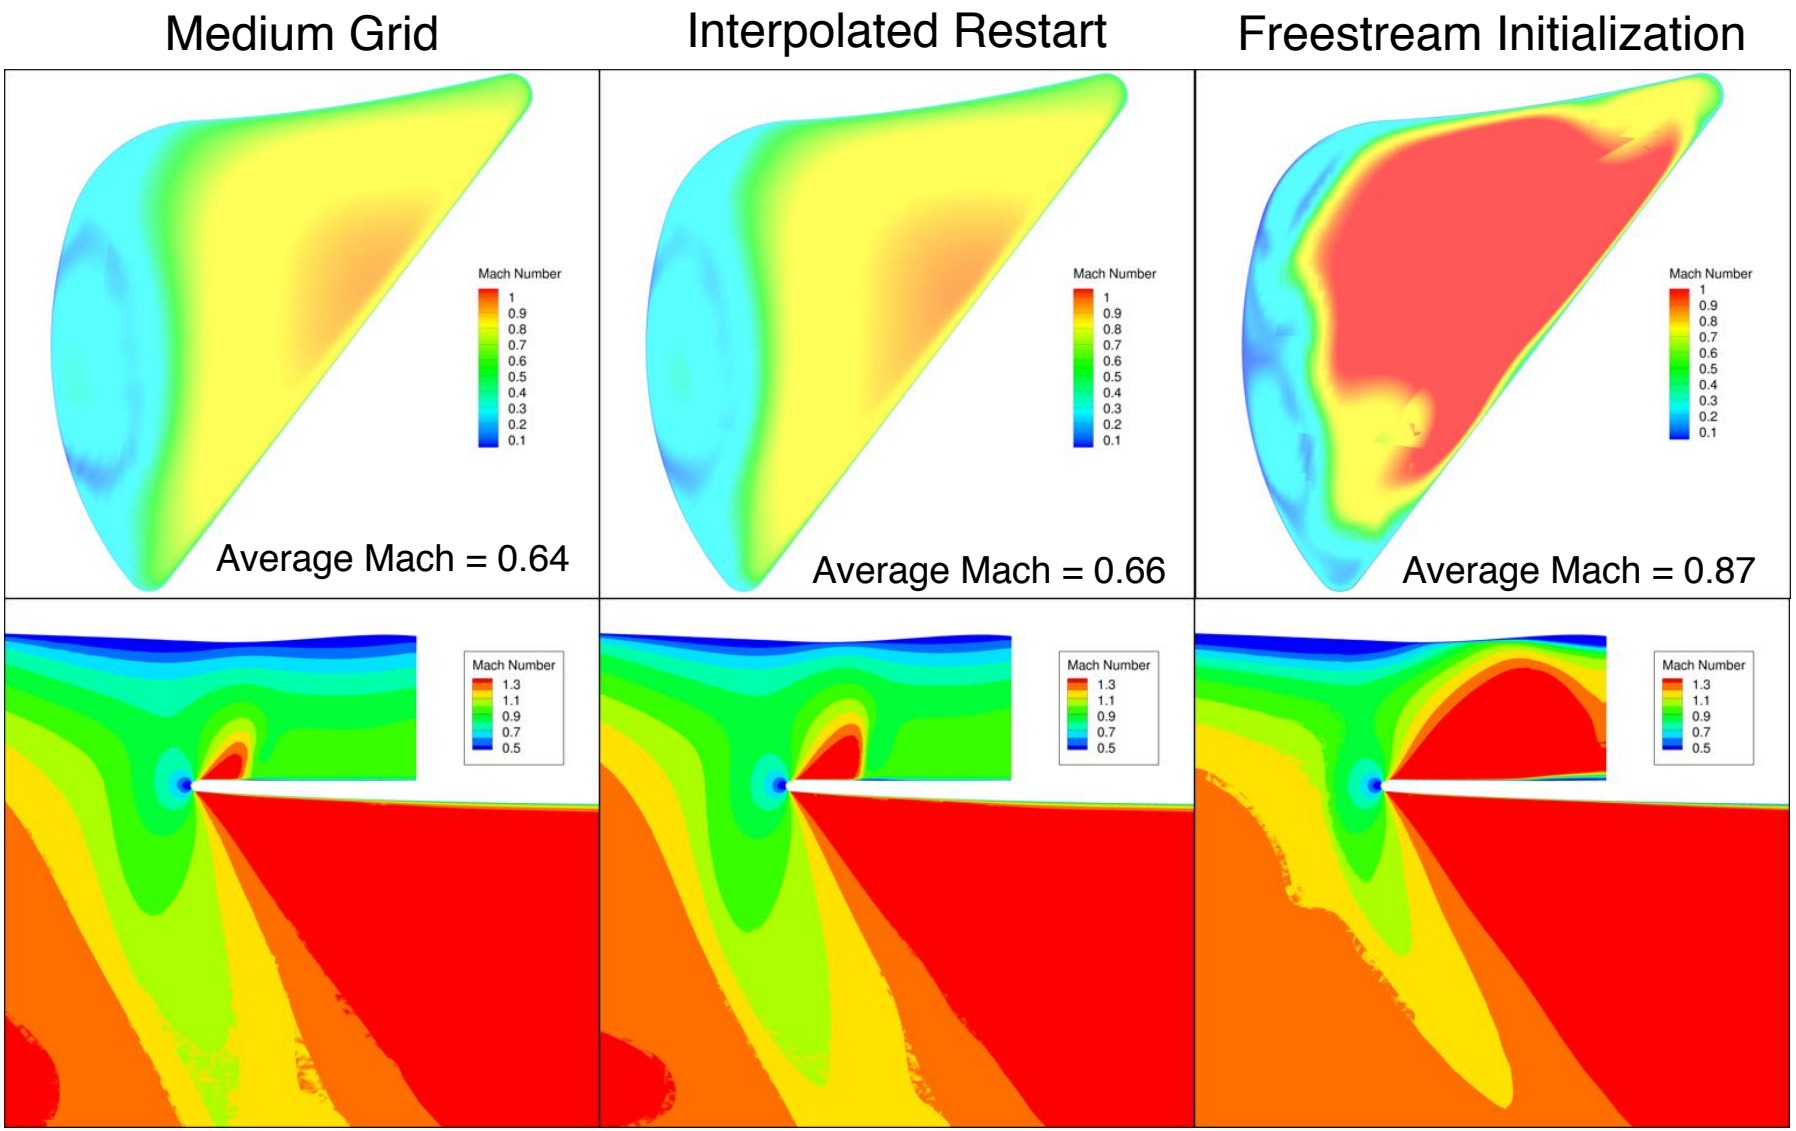

Flow Field Initialization – Pressure Fields

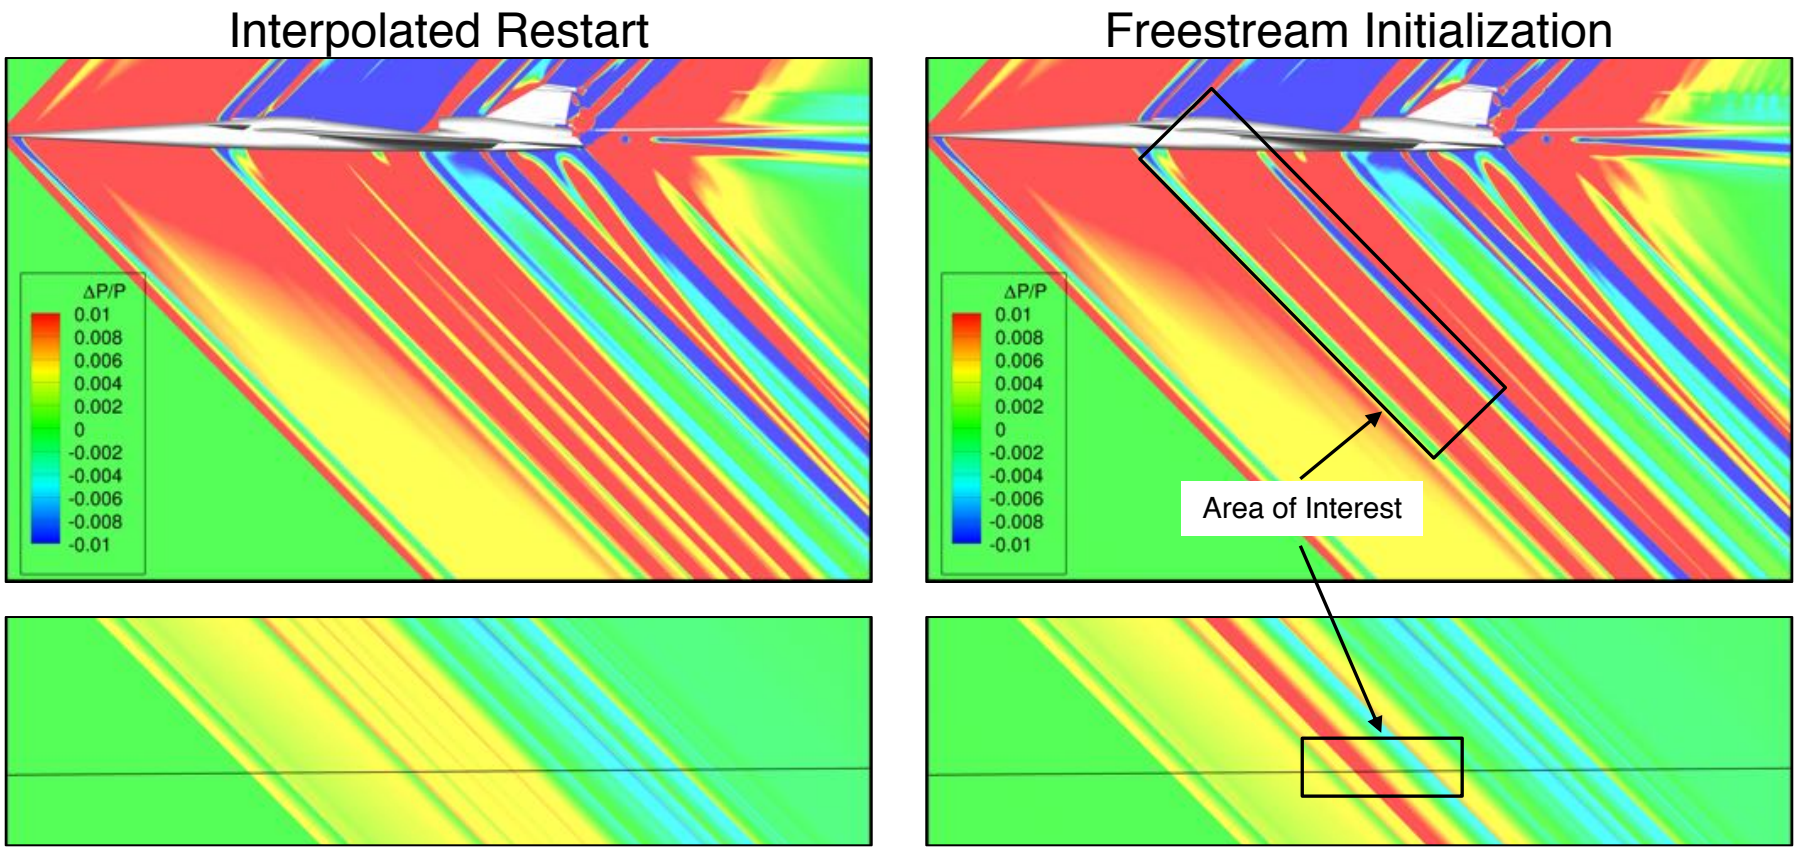

- The pressure fields near the body show that the area between the leading edge of the wing root and the ECS inlet show the largest difference between both solutions
- The increased shock strength at the ECS inlet is causing the waves to coalesce differently

Summary

- Successfully ran the Biconvex and C608 workshop cases using both the unstructured arbitrary polyhedral and structured curvilinear solvers within LAVA and saw good agreement between the two

- Observed that the fine grid case of the C608 in the structured solver had a large sensitivity to the method of flow field initialization
  - Root cause appears to be the ECS inlet boundary condition getting stuck at a much higher Mach number than desired

Acknowledgments

- This work was fully funded by NASA's Commercial Supersonic Technologies (CST) project

- The authors would like to thank the 3nd AIAA Low Sonic Boom Prediction Workshop committee members for organizing the workshop and providing the CAD and problem specifications

- Computer time has been provided by the NASA Advanced Supercomputing (NAS) facility at NASA Ames Research Center