

PILS

Photovoltaic Investigation on the Lunar Surface

Jeremiah McNatt¹, Timothy Peshek¹, Mathew Deminico¹, Norman Prokop¹, Michael Krasowski¹, Brian Tomko¹, Greta Thaikattil², John Heese², Joseph Francz², Katherine McGinnis¹, Brian Morris¹, Linda Nero³, Abigail Rodriguez¹, Trish Seaman⁴, Amy Stalker¹, Lowell Wolfe², Kaiser Aguirre¹

¹NASA Glenn Research Center

²HX5


³Alcyon

⁴Bastion



Background

- Photovoltaics and solar arrays have provided reliable power to spacecraft for over 50 years and will enable long duration missions on the lunar surface
- Solar cells have been used on the lunar surface in the past but the technology has matured significantly
- There is still a lot unknown about the energized environment of the lunar surface and how it would impact high voltage solar arrays
- PILS team responded to a call to provide payloads to the Commercial Lunar Payload Services (CLPS) program, proposing a test-bed to measure electrical performance of state of the art and next generation solar cells, and to measure the charge build up on a small solar cell array
- Selected by Astrobotic (scheduled to be the first commercial lunar lander) with a target landing in Fall 2021
- Technical Objectives:
 - Enhance existing models for future power generation systems, to shape design rules for large solar arrays on the lunar surface
 - Determine charge buildup on solar arrays and arcing hazards in the lunar environment
 - Measure plasma properties for ground-based simulation, arc threshold, and damage rate
 - Increase TRL of cells and arc detection capability

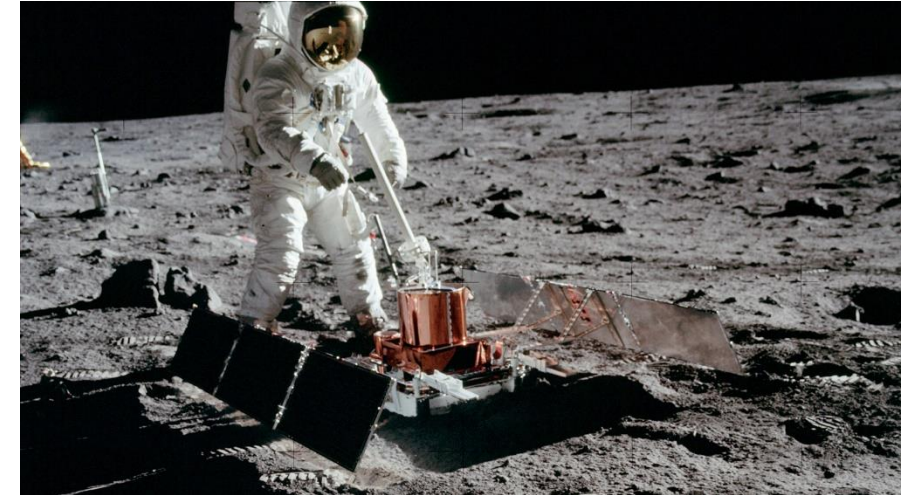


Solar arrays on the Apollo 11
Seismic Experiment

Design Concept

- Heritage on “Materials on the International Space Station Experiment” (MISSE) solar cell flight test platform
- Dimensions: 30 x 30 x 4cm (without mounting brackets)
 - Designed to be mounted flat (without brackets) and scaled in size if testing less cell technologies (adaptable for multiple lander platforms and footprints)
 - Capped mass at 4.5 kg for AB design
- Requires approximately 2W for solar cell and plasma charging experiment. Additional power may be needed for heaters during cruise.
- Team designed PILS platform to accommodate interfaces with the AB lander in terms of power, communication, mounting, environmental concerns
- Solar cells include state-of-the-art (qualified and regularly used), next-gen (in-qualification and have had little in-space use), and thinned silicon (a low cost terrestrial technology)



Heritage concept unit on ISS

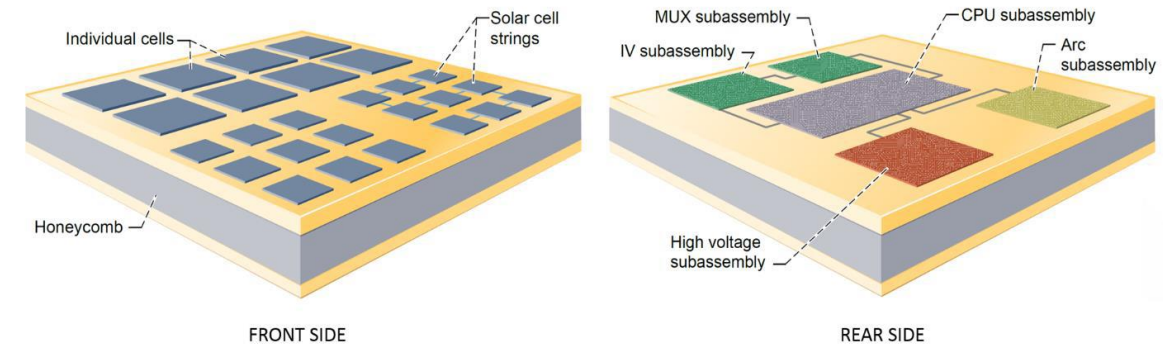


Initial Concept for PILS platform

Design Consideration – Lessons Learned


- Initial concept used solar cell high altitude flight calibration holders but they added significant mass. Found a solution to use a single circuit board type top surface to mount the solar cells
- During early design the launch loads were not well known which presented a challenge to design the platform to be lightweight but still robust. Multiple iterations were considered and modeled to get to the final design.
- The thermal environment turned out to be our largest environmental driver. Challenge to keep the electronics warm during transit to the moon and to keep them cool while on the surface during the lunar day. Found solutions with multilayer insulation and thermal tape.
- Built scaled mock-ups of the platform to better understand interfaces and clearances




PILS Mock Up Based on Initial Concept

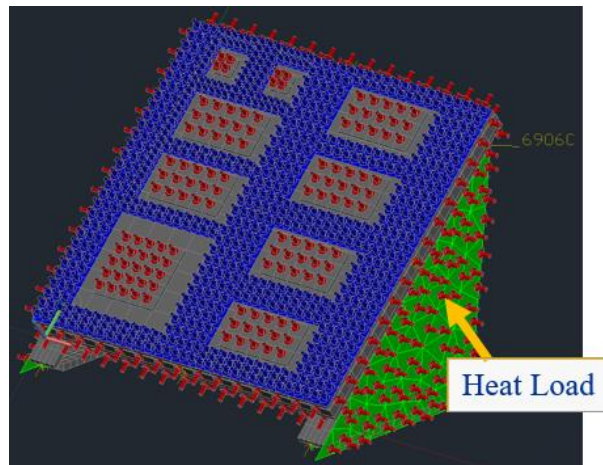

PILS Thermal Analysis Model

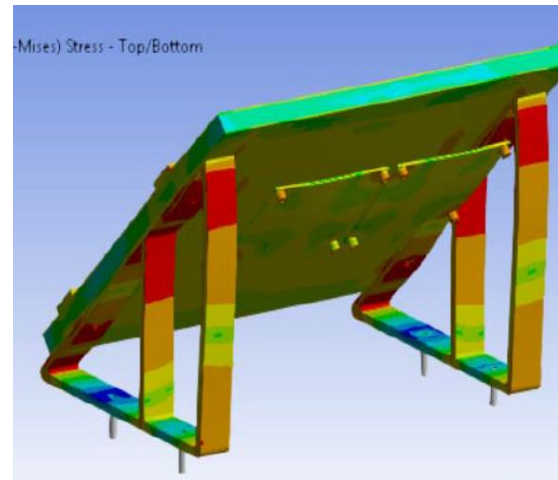


PILS Structural Analysis Model

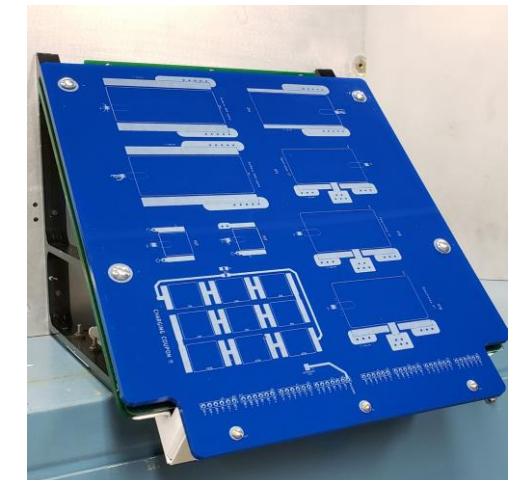

PILS Platform High Fidelity Mock Up

Photovoltaic Investigation on the Lunar Surface (PILS)




Current Status



- Platform software and electronics have been tested with flight hardware
- Platform build is complete
- Platform was just recently wrapped with MLI
- Contains the following solar cells
 - SolAero (Z4J, IMM-alpha)
 - Spectrolab (XTJ, XTE-SF, UTJ – for charging coupon)
 - Arizona State University (Silicon)
- Upcoming Testing
 - Thermal Vacuum Performance (hot & cold)
 - Electromagnetic Interference Compliance
 - Vibration Structural Testing
- Deliver to Astrobotic for Integration and Flight



Software/Hardware Checkout

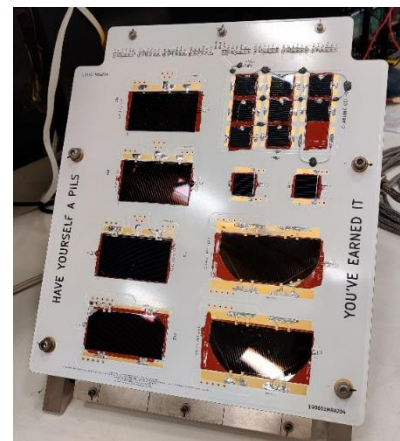

Assembled PILS Flight Unit

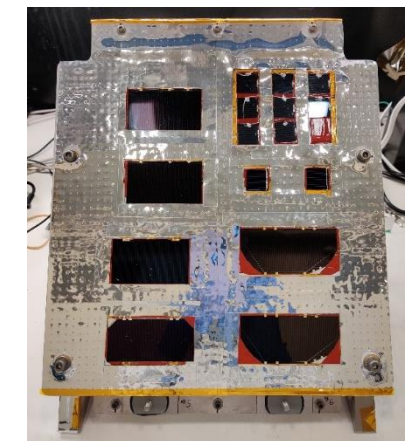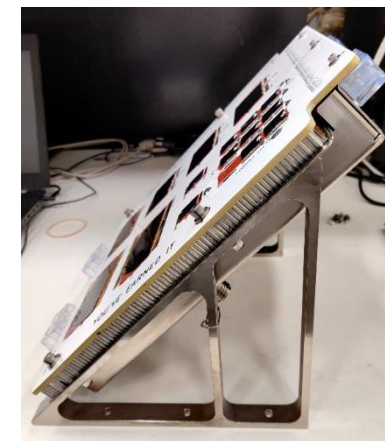

Assembled PILS Flight Unit with Thermal Tape Applied to Top Surface