


Introduction

Fig. 1. Geysers on Enceladus. Credit: NASA/JPL

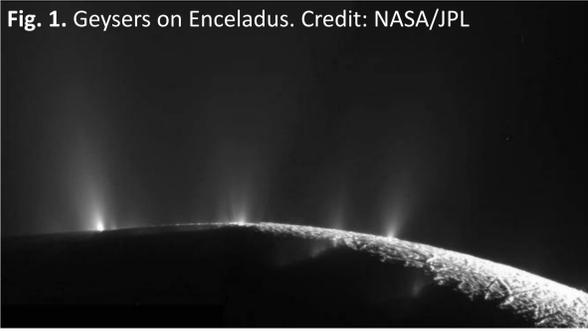

Enceladus is a prime scientific target due to active geological features and evidence of liquid water. The plumes (Fig. 1) from its rifts were sampled by the Cassini mission, which detected carbon, hydrogen, oxygen, and nitrogen— key signatures of potential life [1]. Mission design using traditional fully-propulsive orbit insertion maneuvers is expensive and time consuming. A prior study has ruled traditional chemical and solar electric propulsion-based missions infeasible [1]. An enabling alternative is Titan aerogravity assist [1-4].

Vehicle Design




Fig. 4a. 45-deg. sphere-cone – Galileo. Credit: NASA

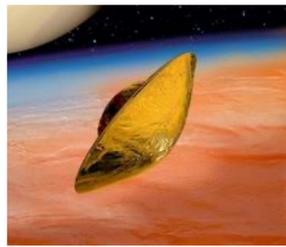


Fig. 4b. 60-deg. sphere-cone – Huygens. Credit: ESA



Fig. 4c. 70-deg. sphere-cone – Mars Science Lab. Credit: NASA

Blunt bodies (Fig. 4) were considered for Titan aerogravity assist. To stress the guidance and control mechanisms, 70-deg. sphere-cone was used, as it produces lower L/D than the 45 and 60 deg. sphere-cone shapes at equivalent angles of attack.

Guidance and Control Strategy

Guidance Scheme

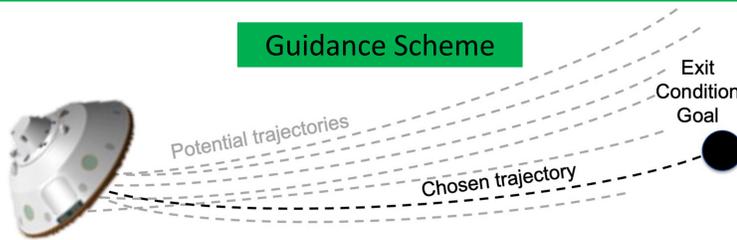


Fig. 5. Notional example of a **numerical predictor corrector (NPC)** guidance that propagates trajectories on-board to select the guidance commands that best achieves the exit goals.

Control Strategy

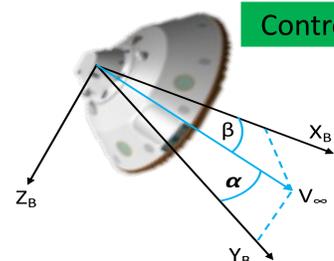


Fig. 6a. **Direct force control (DFC)** independently controls angle of attack (α) and sideslip (β).

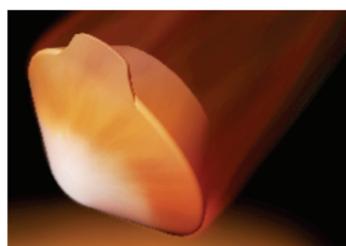


Fig. 6b. Example of a direct force control mechanism – trim tab. Credit: NASA.

Performance Statistics

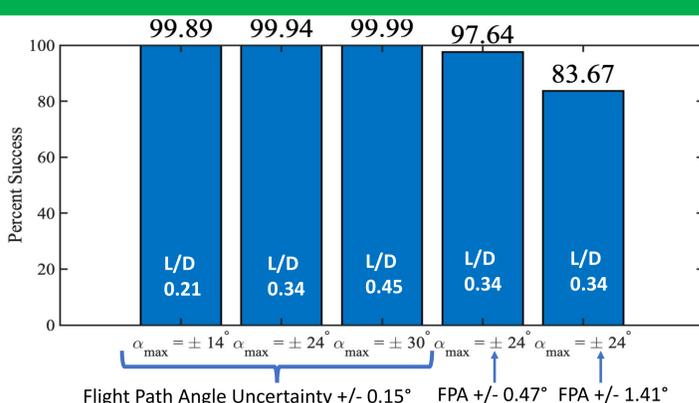


Fig. 8. Percent of cases with successful aerogravity assist.

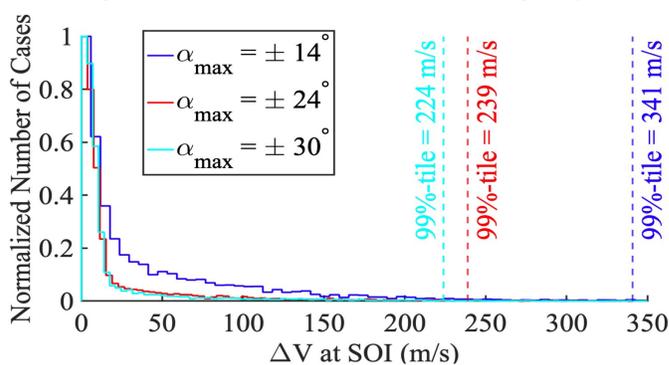


Fig. 9. ΔV at SOI for different aerogravity assist scenarios.

8000-case Monte Carlo

- Huygens covariance-based delivery states [9]
- Aero dispersion (MSL aerodatabase)
- Atmosphere dispersion (TitanGRAM)

Metrics

- Percent of cases successful in aerogravity assist
- Total ΔV at SOI

Reference case shows good success rate in achieving the target orbit while needing reasonable amount of ΔV at SOI. Good delivery flight path uncertainty from interplanetary navigation is important for the mission success.

Mission Design

2033 Launch Opportunity $C_3 = 16.3 \text{ km}^2/\text{s}^2$

- Venus Gravity Assist - 2033
- Earth Gravity Assist - 2035
- Deep Space Maneuver - 2037 $\Delta V = 59 \text{ m/s}$
- Earth Gravity Assist - 2037
- Deep Space Maneuver - 2038 $\Delta V = 218 \text{ m/s}$
- Titan Arrival - 2043

Aerogravity assist is a novel aerodynamic maneuver where the atmosphere and gravity of a planetary body provides the ΔV necessary to transition from a hyperbolic trajectory to a captured orbit. From the Saturnian viewpoint of a Titan aerogravity assist, the spacecraft approaches the system on a hyperbolic orbit, but after interaction with the Titanian atmosphere, the vehicle is in a Saturn captured orbit. Ensuing “pumpdown” maneuvers, consisting of small ΔV burns and gravity assists of various moons, bring the vehicle into the desired Enceladus flyby orbit [1,2].

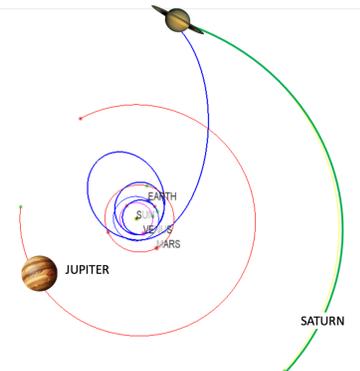


Fig. 2. Interplanetary mission design.

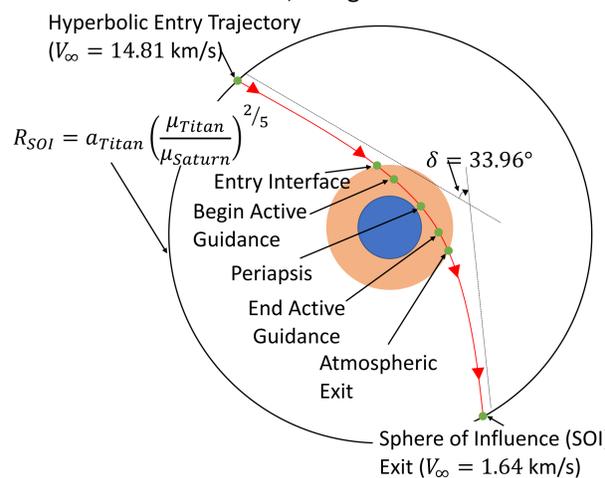


Fig. 3. Aerogravity assist from a Titan perspective [5]

Fig. 3 shows the maneuver with Titan as the central body. The spacecraft enters and leaves Titan’s sphere of influence (SOI) on a hyperbolic trajectory. An active guidance scheme reduces the Saturn-relative vehicle velocity and turns the trajectory of the vehicle to the desired orbital orientation.

Table 1. Potential List of Target Orbits for the 2043 Arrival Scenarios [3]

Arrival Date	V_∞ in, km/s	V_∞ out, km/s	Turn Angle, δ , deg.	ΔV to Enceladus, km/s
Feb. 11, 2043 (Direct)	11.7	3.3	14.3	3.9
Feb. 13, 2043 (Direct)	7.3	1.197	47.16	5.47
Feb. 23, 2043 (Direct)	14.8	2.6	18.5	3.8
Feb. 11, 2043 (Moon Tour)	11.3	1.64	23	0.18
Feb. 13, 2043 (Moon Tour)	7.3	1.252	45.633	0.618
Feb. 23, 2043 (Moon Tour)	14.81	1.64	33.96	0.17

Two families of target orbit after the aerogravity assist maneuver (see Table 1): **Direct** where the spacecraft goes directly to Enceladus’s vicinity and does an orbital capture burn; **Moon Tour** trajectories where the spacecraft is in a Saturn orbit visits other moons and does flybys of Enceladus. For guidance and control performance, the Feb. 23rd Moon Tour scenario was the most stringent due to the large ΔV and turn angle (δ) needed from the aeroassist maneuver. That is the scenario studied here.

Reference Case

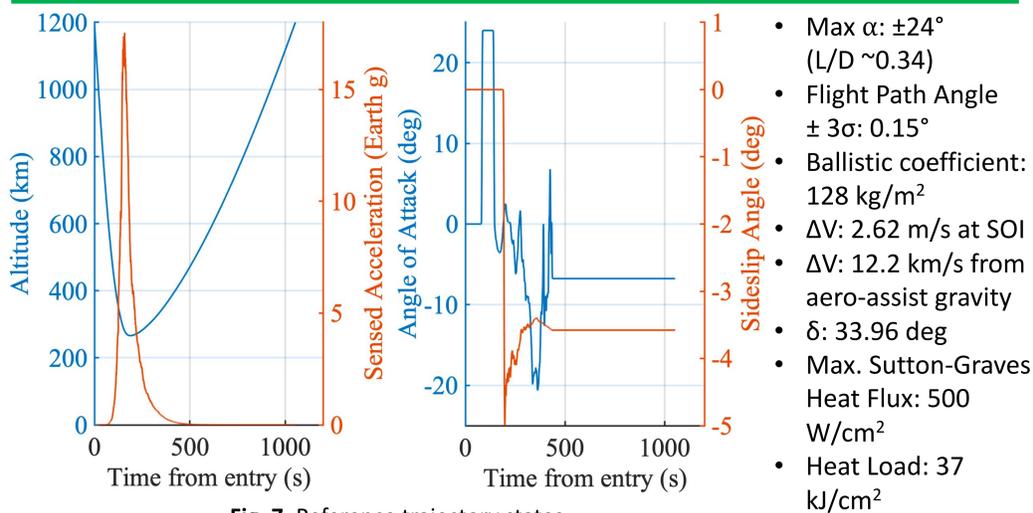


Fig. 7. Reference trajectory states.

References and Acknowledgements

- Spilker, T. R., Moeller R. C., Borden, C. S., Smythe W. D., Lock, R. E., Elliott, J. O., Wertz, J. A., and Strange, N. J., “Analysis of Architectures for the Scientific Exploration of Enceladus,” IEEEAC paper #1644, Version 5, updated January 9, 2009.
- Lu, Y. and Saikia, S. J., “Titan Aerogravity-assist Maneuvers for Saturn/Enceladus Missions,” Acta Astronautica, Vol. 176, November 2020, pp 262-275.
- Arnold, J.O. et al, “Heatshields for Aerogravity Assist Vehicles Whose Deceleration at Titan Saves Mass for Future Flagship Class Exploration of Enceladus,” White Paper for the Planetary Science Decadal Survey, 2023-2032, Sept. 2020.
- Tackett, B., et al. “Guidance and Control Approaches that Enable Titan Aerogravity Assist Enceladus Missions,” White Paper for the Planetary Science Decadal Survey, 2023-2032, Sept. 2020.
- Engel, D.L., Dutta, S., and Putnam, Z.R., “Numerical-Predictor Corrector based Guidance Scheme for Aerogravity-Assist at Titan for Enceladus Mission,” AAS Space Flight Mechanics Meeting, AAS 21-201, February 2021.
- Dutta, S. et al, “Aerocapture as an Enhancing Option for Ice Giants Missions,” White Paper for the Planetary Science Decadal Survey, 2023-2032, July 2020.
- Deshmukh, R.G., Spencer, D.A., and Dutta, S., “Investigation of Direct Force Control for Aerocapture at Neptune,” Acta Astronautica, Vol.175, October 2020, pp 375-386.
- Cianciolo, A. D., and Powell, R. W., “Entry, De- cent, and Landing Guidance and Control Approaches to Satisfy Mars Human Mission Landing Criteria,” AAS-17-254.
- Striepe, S.A., “Huygens Probe Entry, Descent, and Landing Trajectory Reconstruction Using the Program to Optimize Simulated Trajectories II,” University of Texas, Austin, Ph.D. Dissertation, 2007.

The authors would like to thank several colleagues in defining the aeroassist scenarios, including Jim Arnold (Ames/AMA), Gary Allen (Ames/AMA), and Min Qu (LaRC/AMA).