

A Boiloff Calorimetry Test Configuration for the Characterization of Thermal Insulation Systems

in Flammable Background Gasses

Adam Swanger¹, Robert Hughes¹, and Marco Guerrero Nacif²

¹NASA Kennedy Space Center, FL 32899, USA; ²GenH2, Titusville, FL 32780


2024 ICEC/ICMC

Session ID: Wed-Po-2.2

Background

- ❖ **Liquid hydrogen (LH₂)** for shipping terminals requires a massive scale-up in tank volume
 - Largest LH₂ tanks in the world exist at NASA-KSC: 3,200 m³ and 4,700 m³
 - Shipping terminals will require 50,000+ m³, and perhaps greater than 100,000 m³
- ❖ Vacuum-insulated LH₂ tanks will be **difficult or impossible** at very large scales
 - Non-vacuum tanks may require non-condensable background gas in the insulation space: **Helium** or **Hydrogen**
 - Need to understand the impact to insulation performance using hydrogen background gas
- ❖ Cryogenics Test Laboratory Cryostat-100 LN₂ boiloff calorimeter required modifications to test in **flammable background gasses**
 - ASTM C1774, Annex A.1 standardized test equipment/method
 - Most equipment could not conform to NFPA code




Cryostat-100 (CS-100)

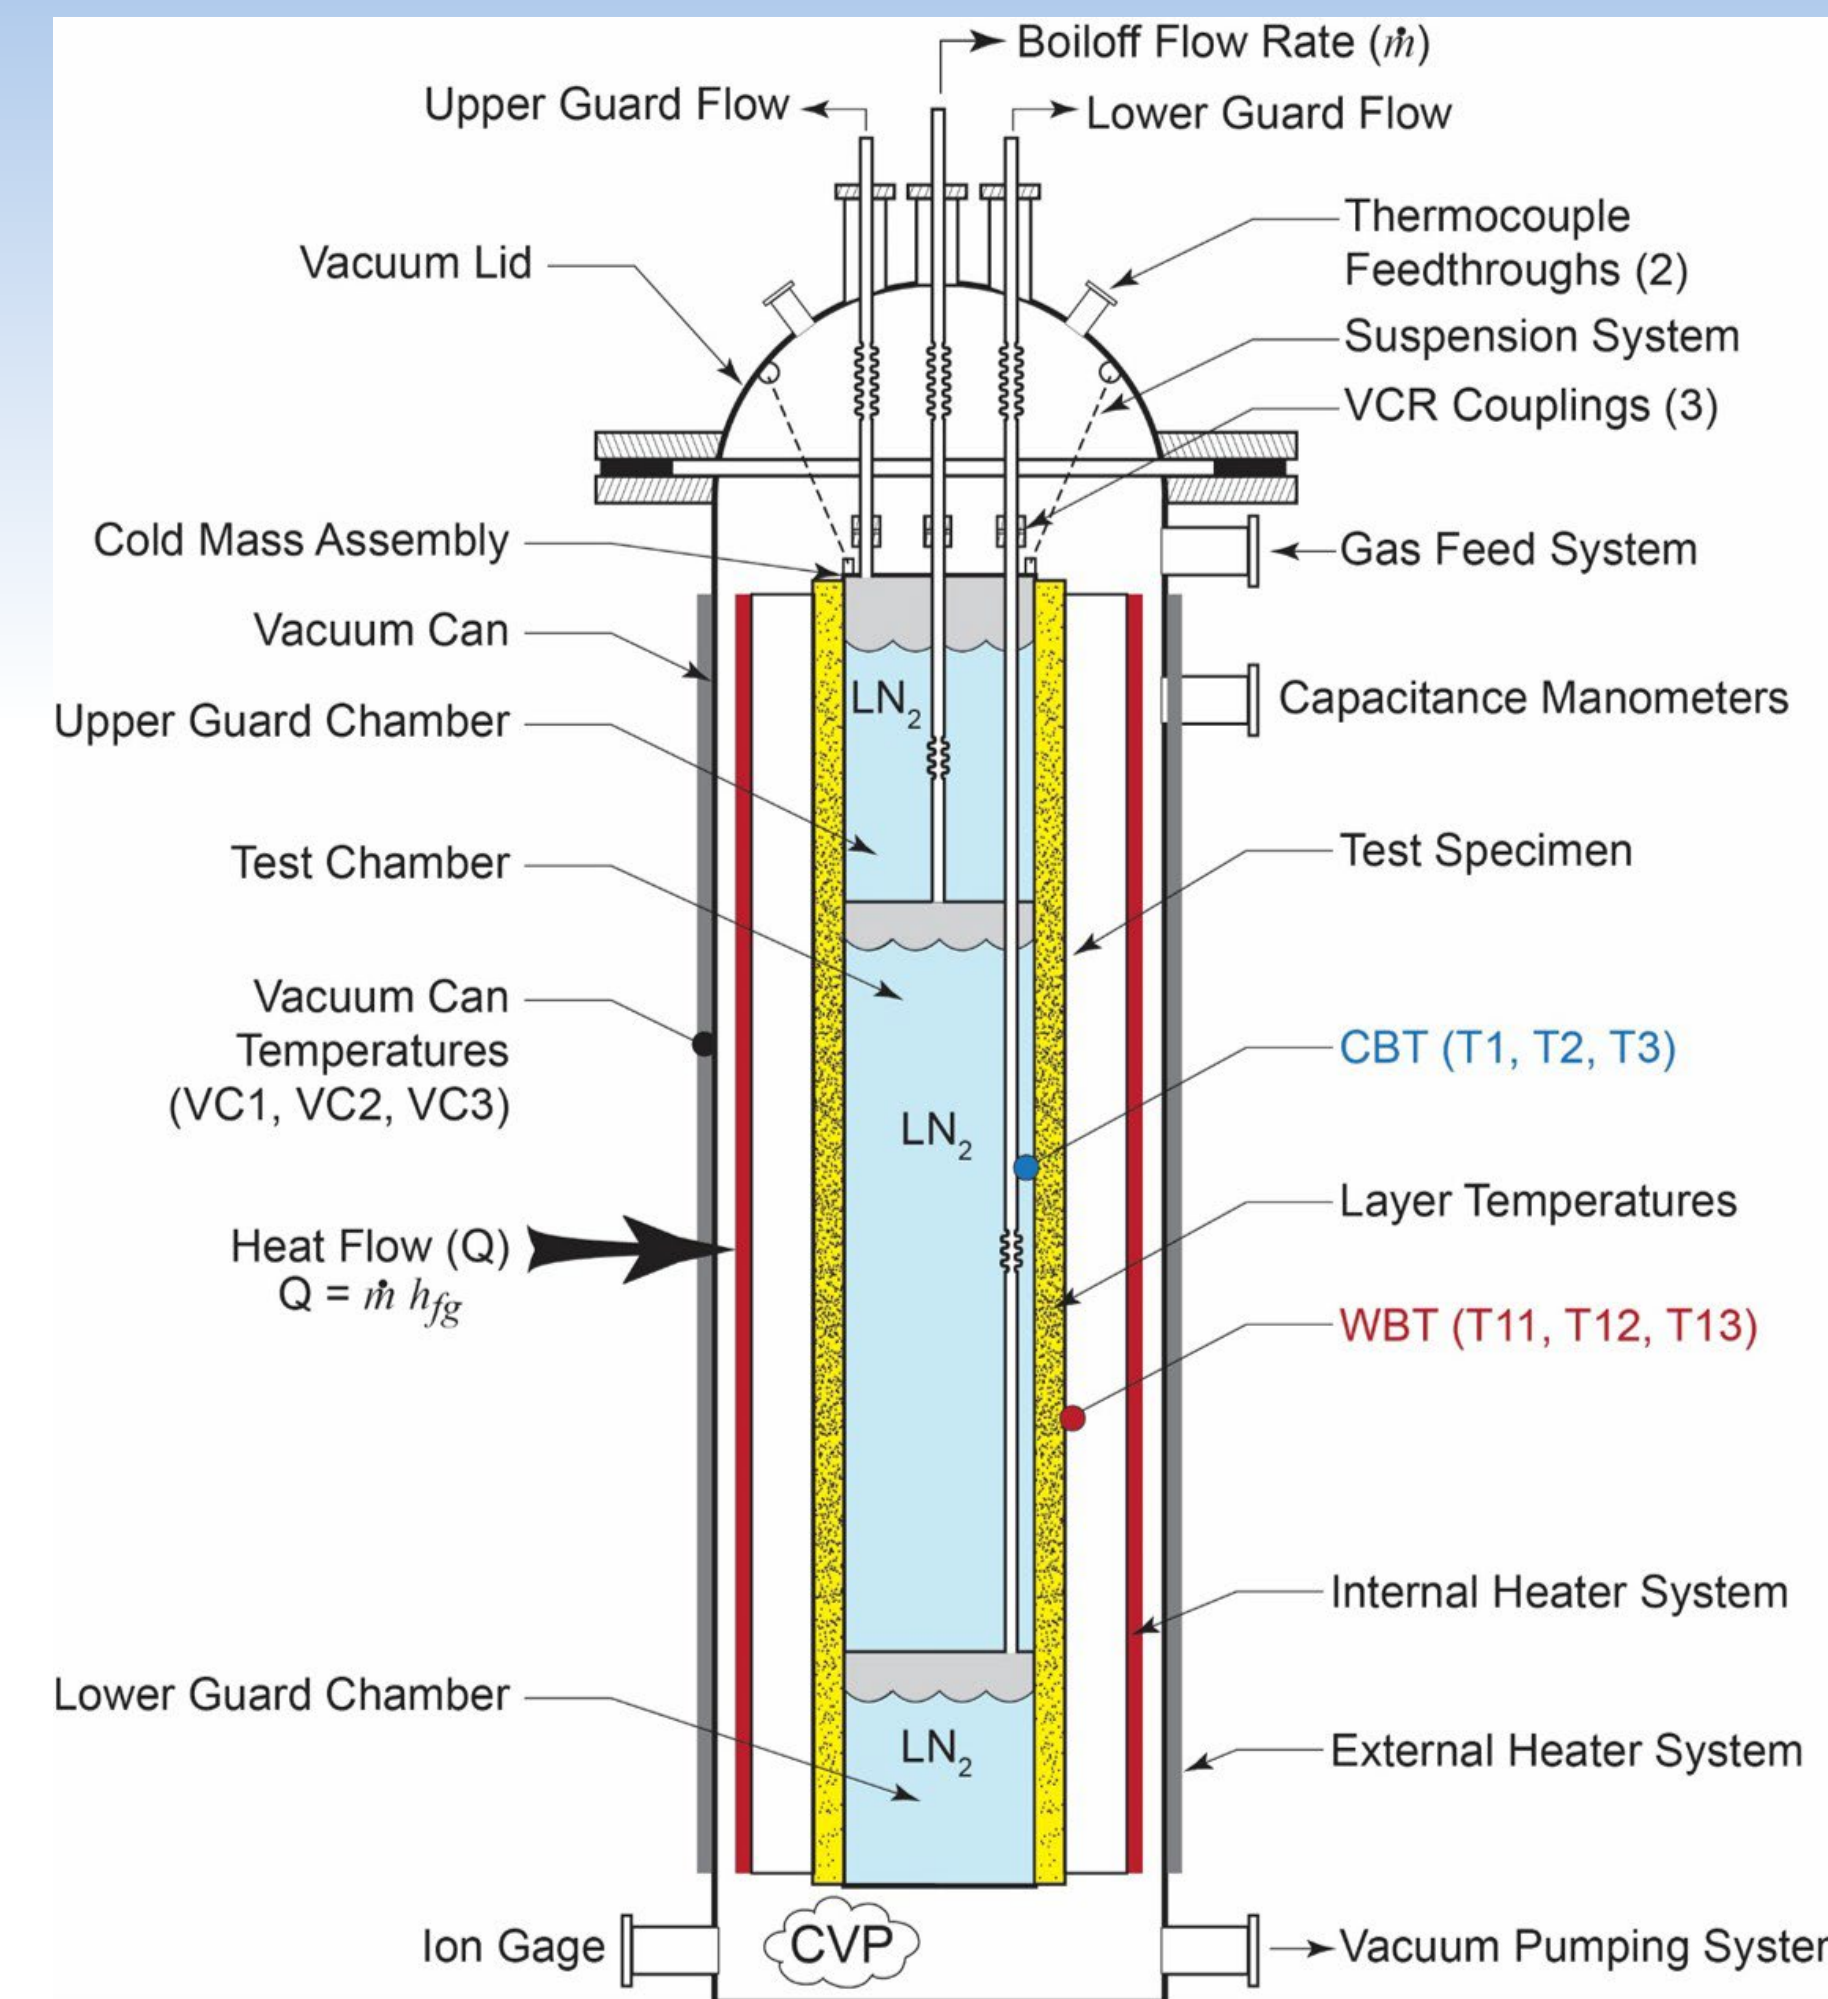

Design Considerations

- ❖ What modifications will minimize risk and comply with the codes and NASA standards to the greatest extent practical, yet still allow for semi-normal CS-100 operations?
 - Continuous nitrogen (GN₂) supply available, and penetration through the outer lab wall near CS-100 previously installed
- ✓ Contain the CS-100 and most electrical hardware inside a nitrogen-purged enclosure with a captured vent
- ✓ Place GH₂ bottle and all other potential leak points outside the building
- ❖ Enclosure would comply with NFPA 496 Standard for Purged and Pressurized Enclosures for Electrical Equipment
 1. Enclosure shall be constantly maintained at a positive pressure of at least 25 Pa above the surrounding atmosphere during operation
 2. Failure to maintain positive pressure within a protected enclosure shall be communicated by an alarm or an indicator (gauge)
 3. Diluting an inert gas to reduce oxygen content in the enclosure to a level of not more than 5% by volume, or 50% of the minimum concentration of oxygen required to form a flammable mixture

Test Configuration P&ID

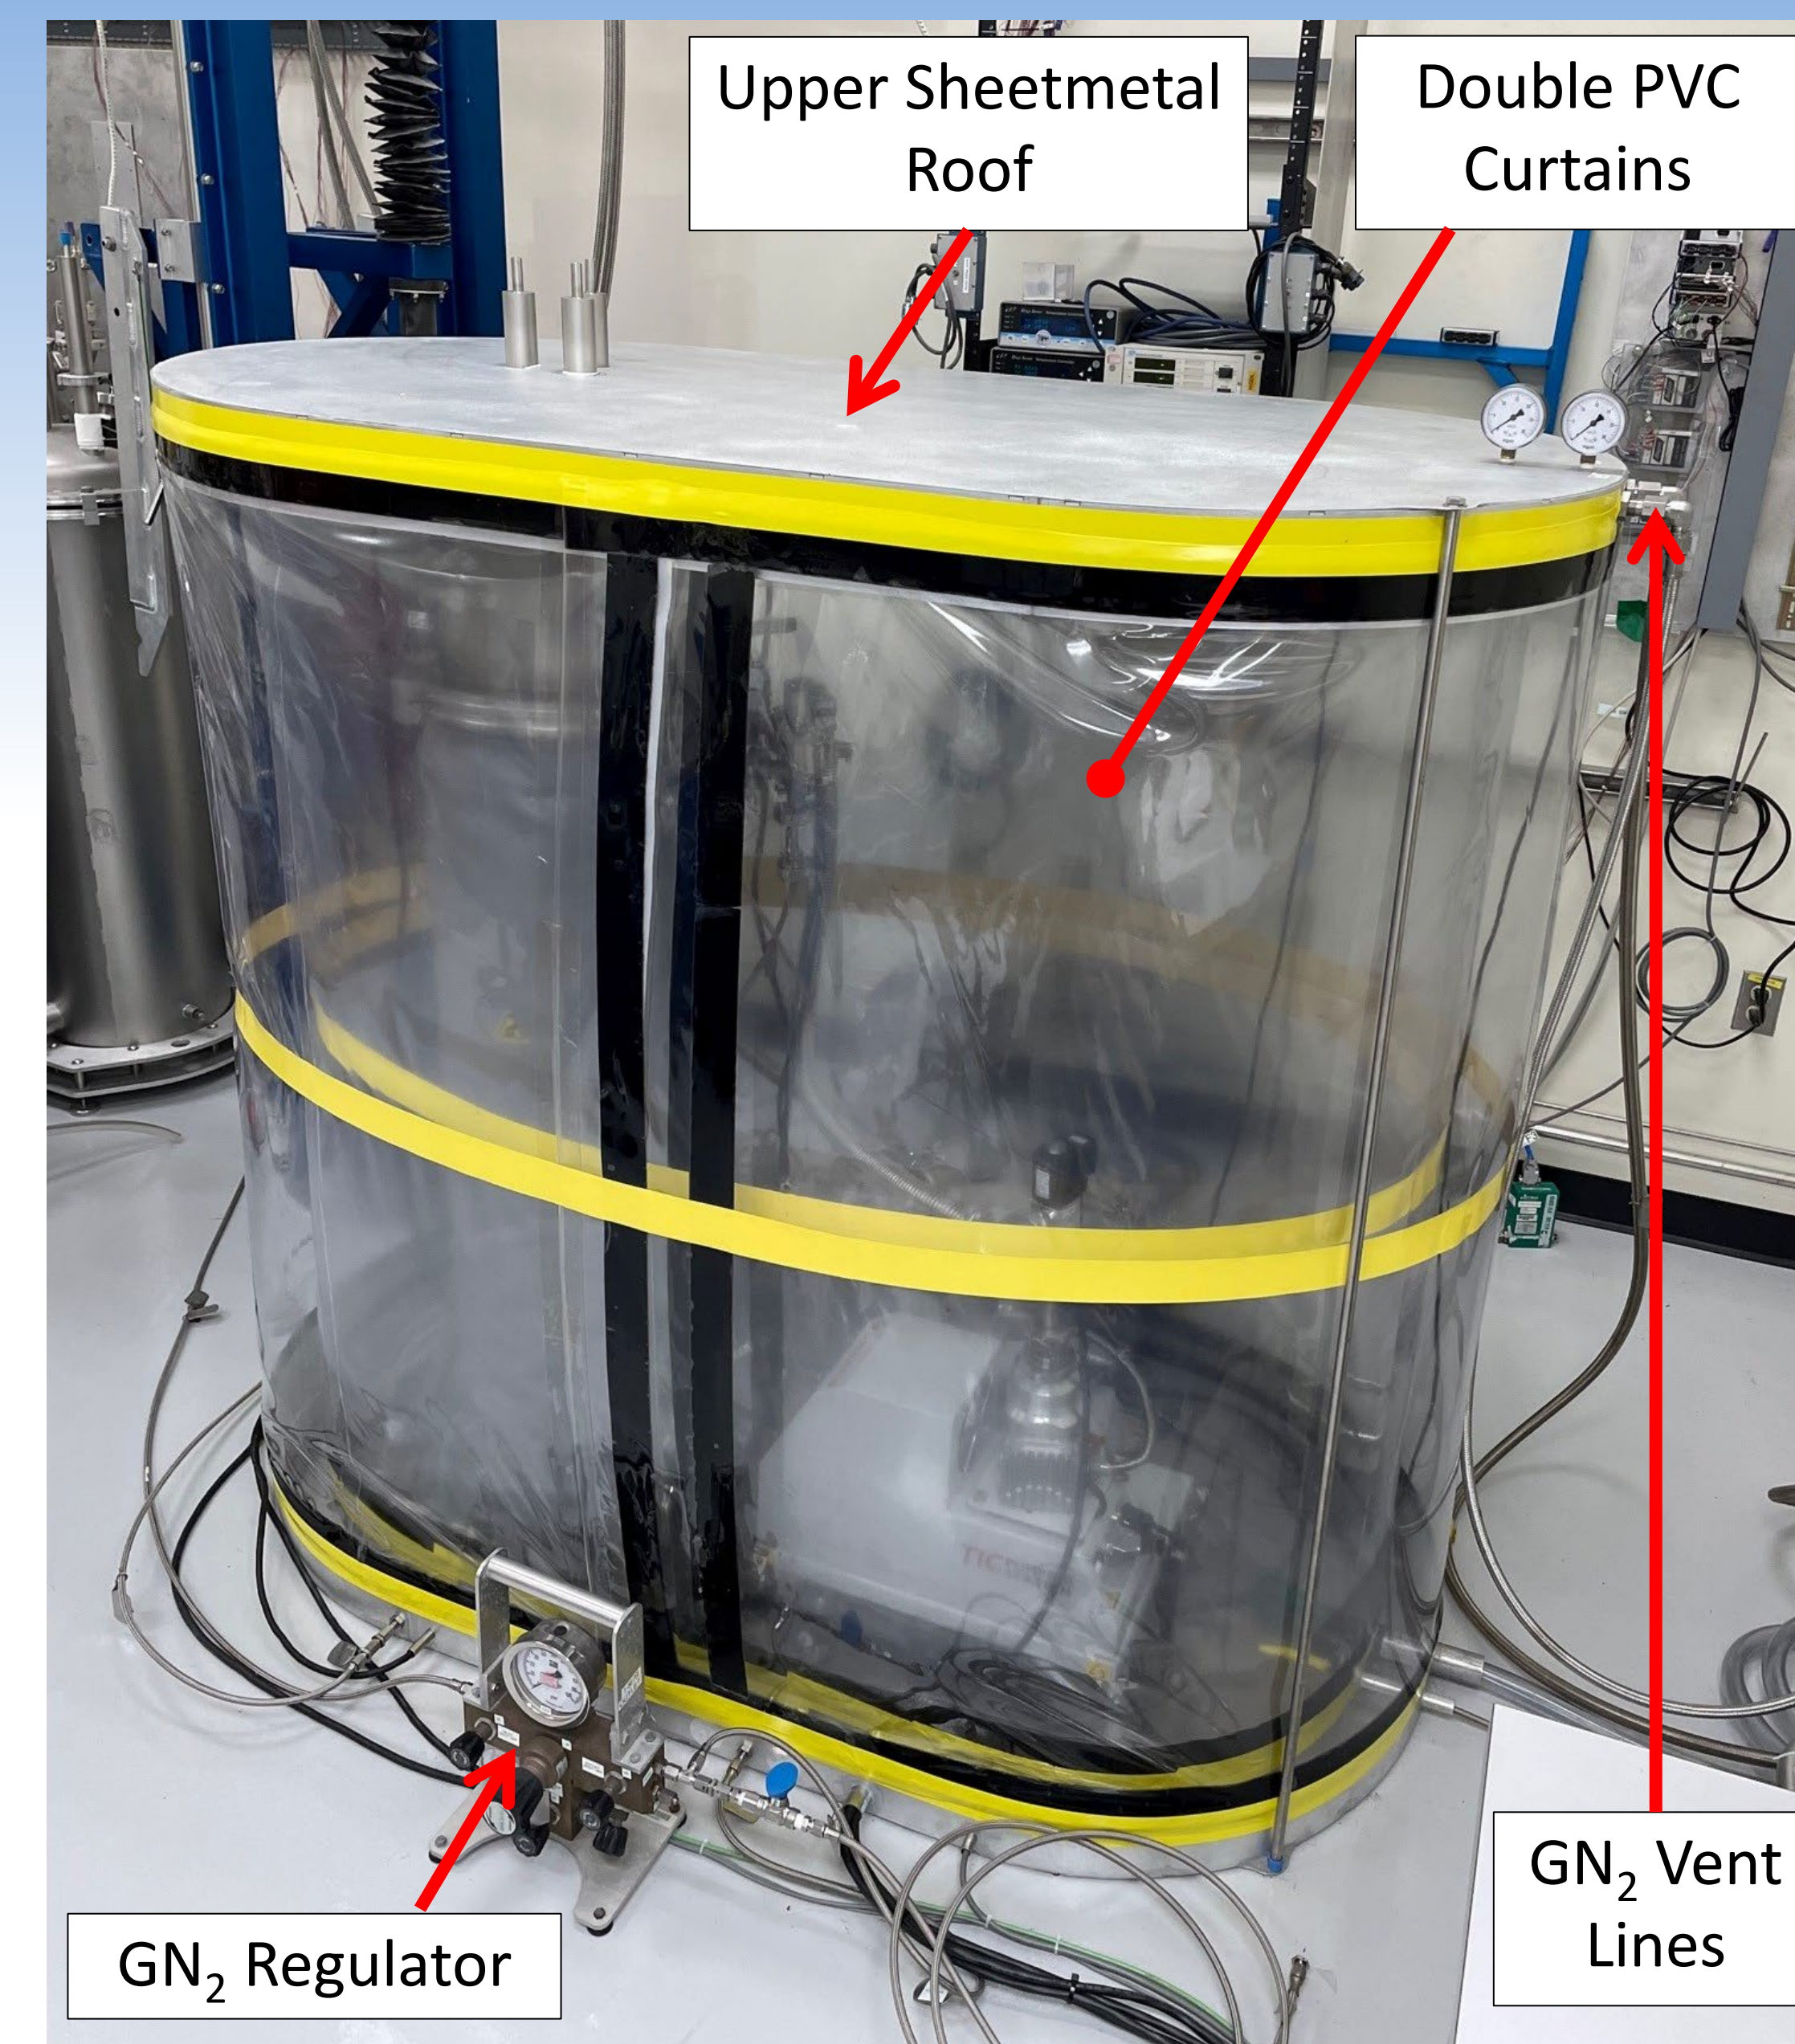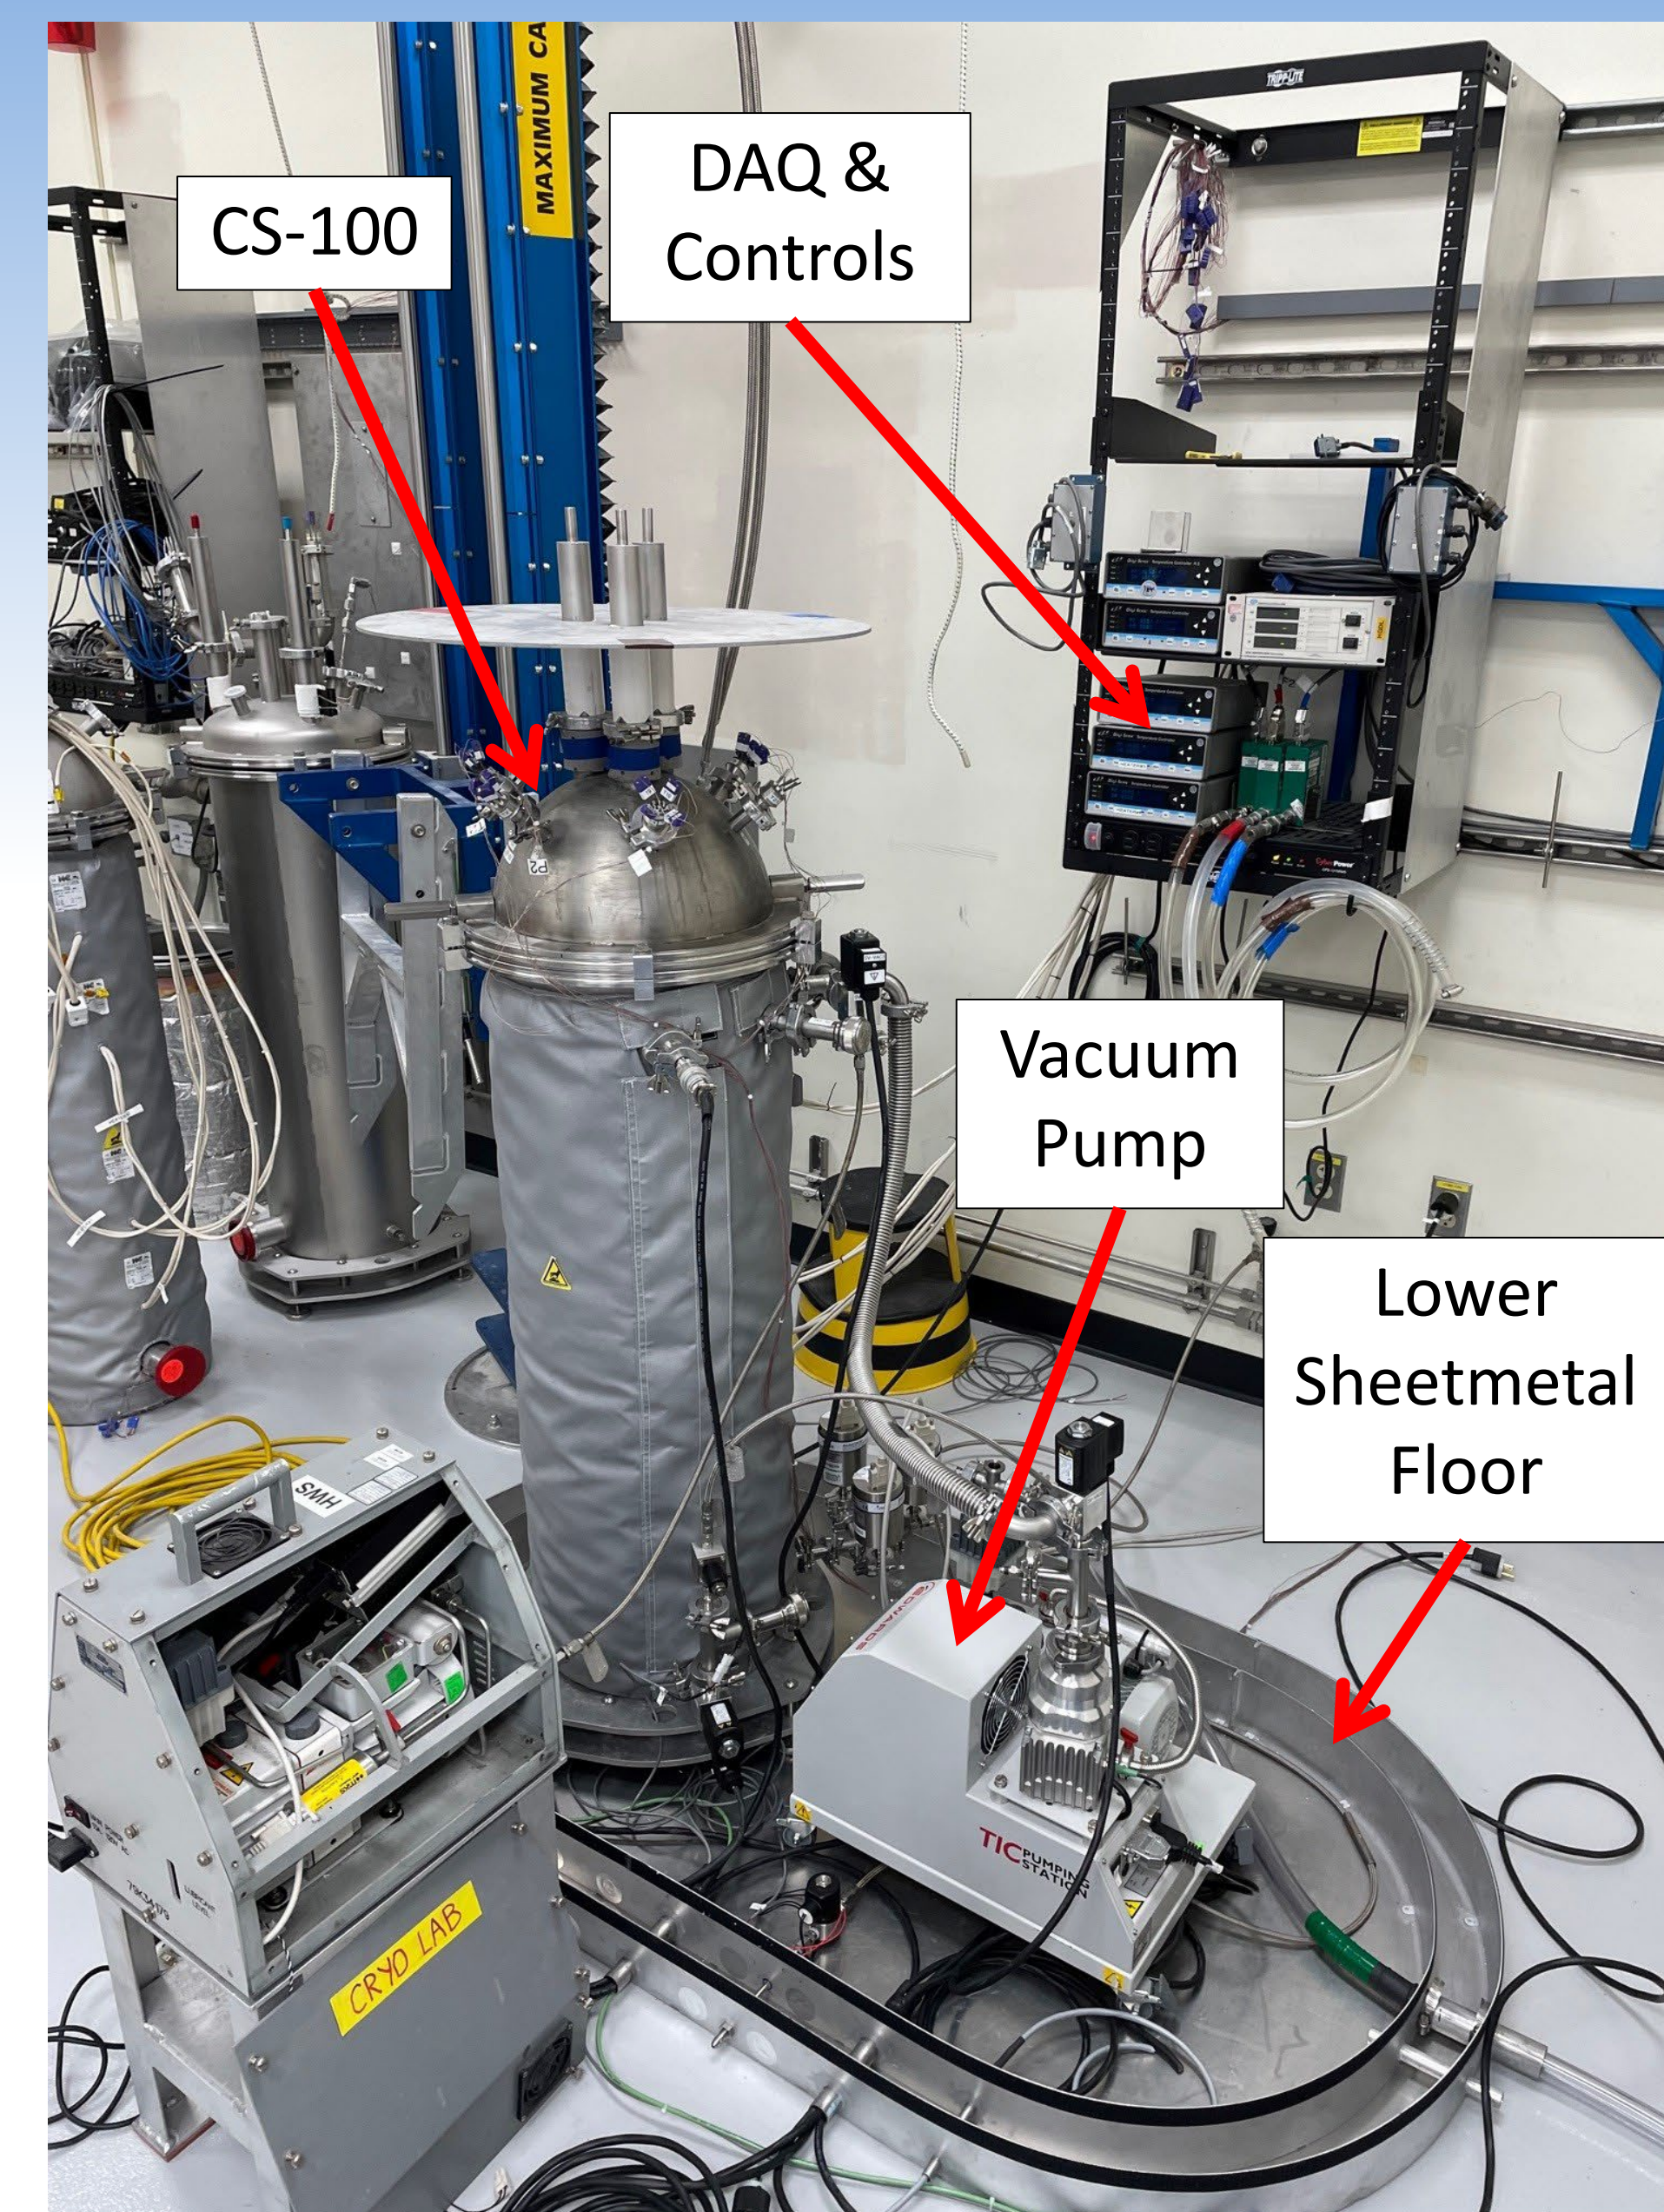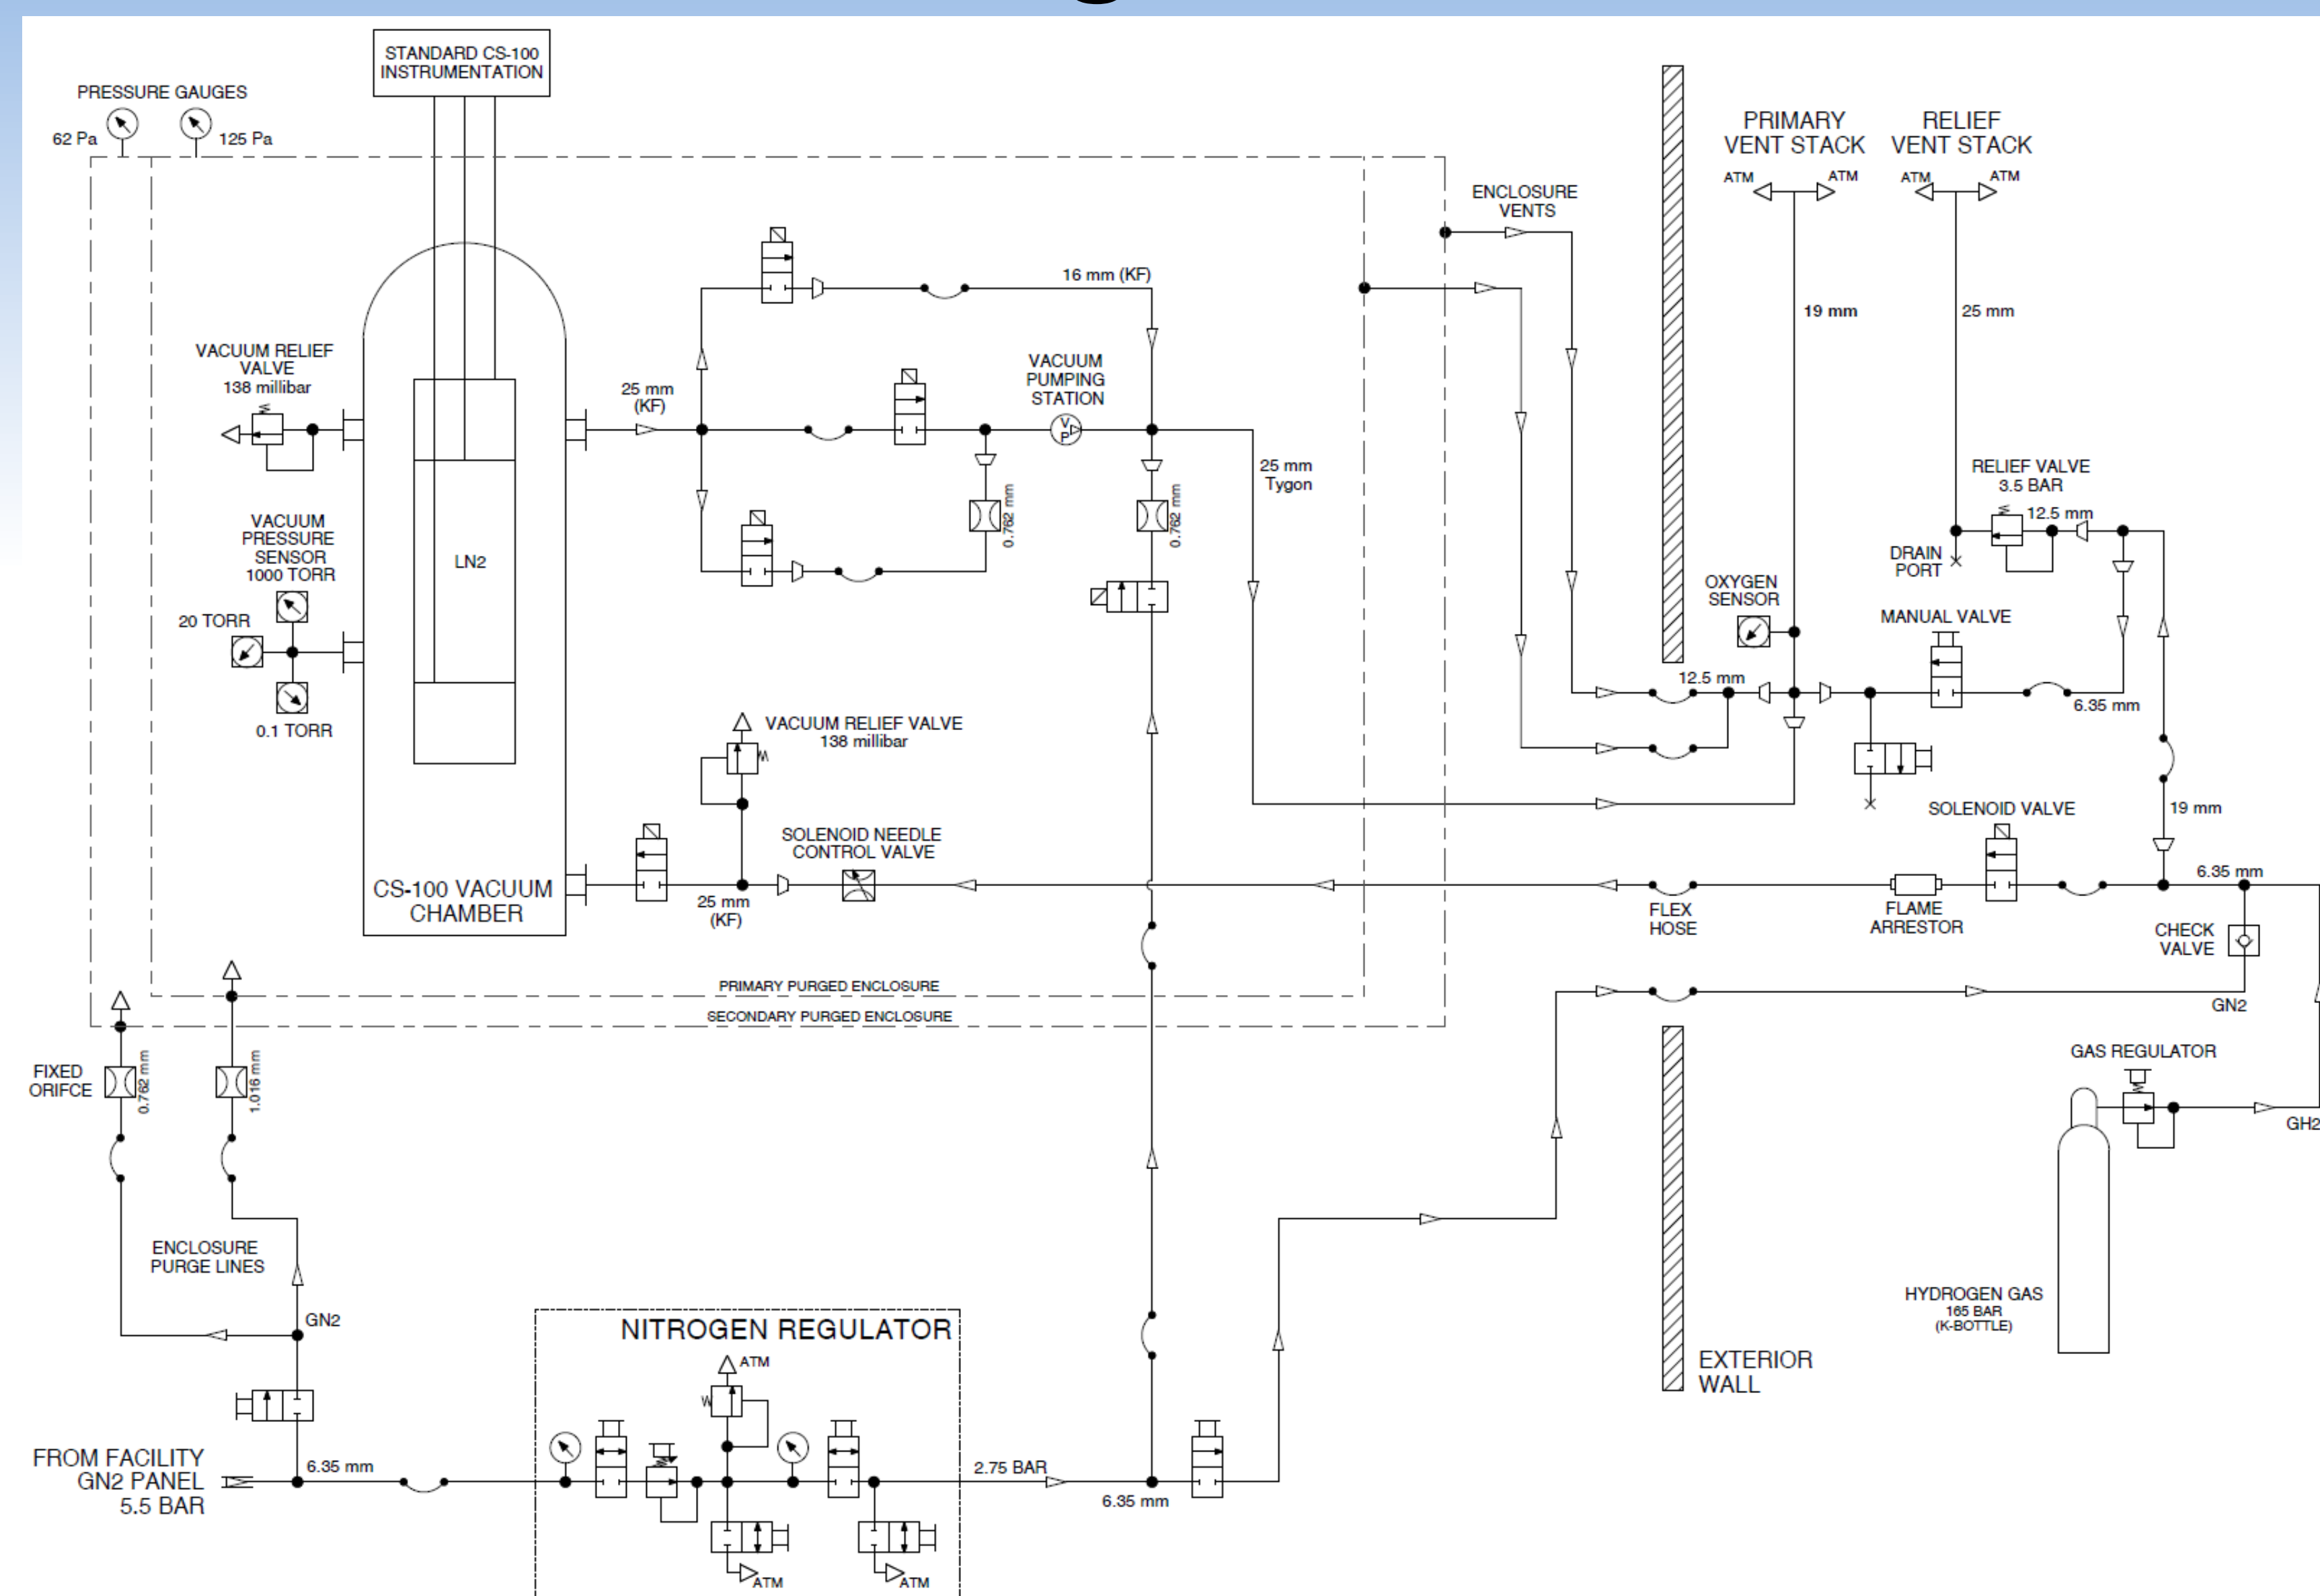

Final Test Configuration

- ❖ Sheetmetal floor and roof assemblies define enclosure boundary around CS-100 and equipment
- ❖ Inner and outer PVC curtains form walls of enclosure, secured to sheetmetal via hook-and-loop, and sealed with vinyl tape along edges
 - Redundant, independent purged enclosures in case of GH₂ leak
- ❖ Most valves were solenoid type, remotely operated using on/off switches; vacuum pump controlled through DAQ system
- ❖ GN₂ flow rates of 116 L/min and 65 L/min for inner and outer enclosures respectively
 - 10:1 ratio of nitrogen-to-hydrogen flow into the inner purged volume in the case of a leak.