

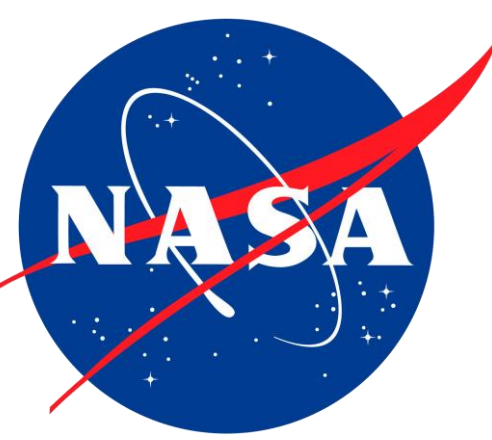


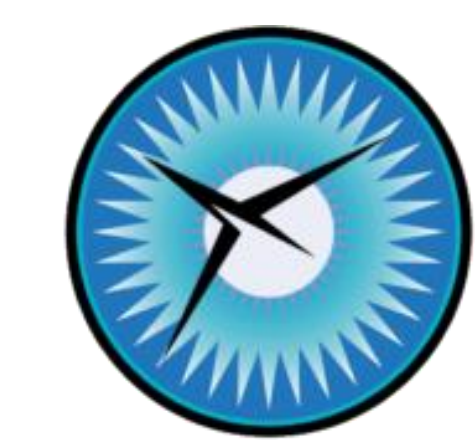

Global Carbon Consumption Database for Wildland Fire

Emily Gargulinski¹, Amber Soja², Elizabeth Wiggins²

1- National Institute of Aerospace, 2- NASA Langley Research Center

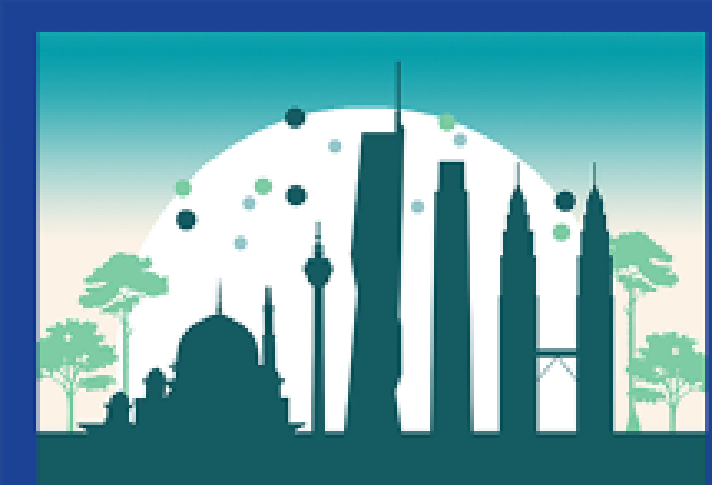

Emily Gargulinski
Emily.Gargulinski@nianet.org

Global Connections: Fire, Smoke, Air Quality

Fire significantly impacts both human-altered and wild landscapes on national and global scales. Though often devastating, wildland fires naturally reduce fuels, preventing larger wildfires. However, their smoke can harm human health locally and globally. To understand its impact on air quality and health, quantifying the emissions released into the atmosphere is crucial.

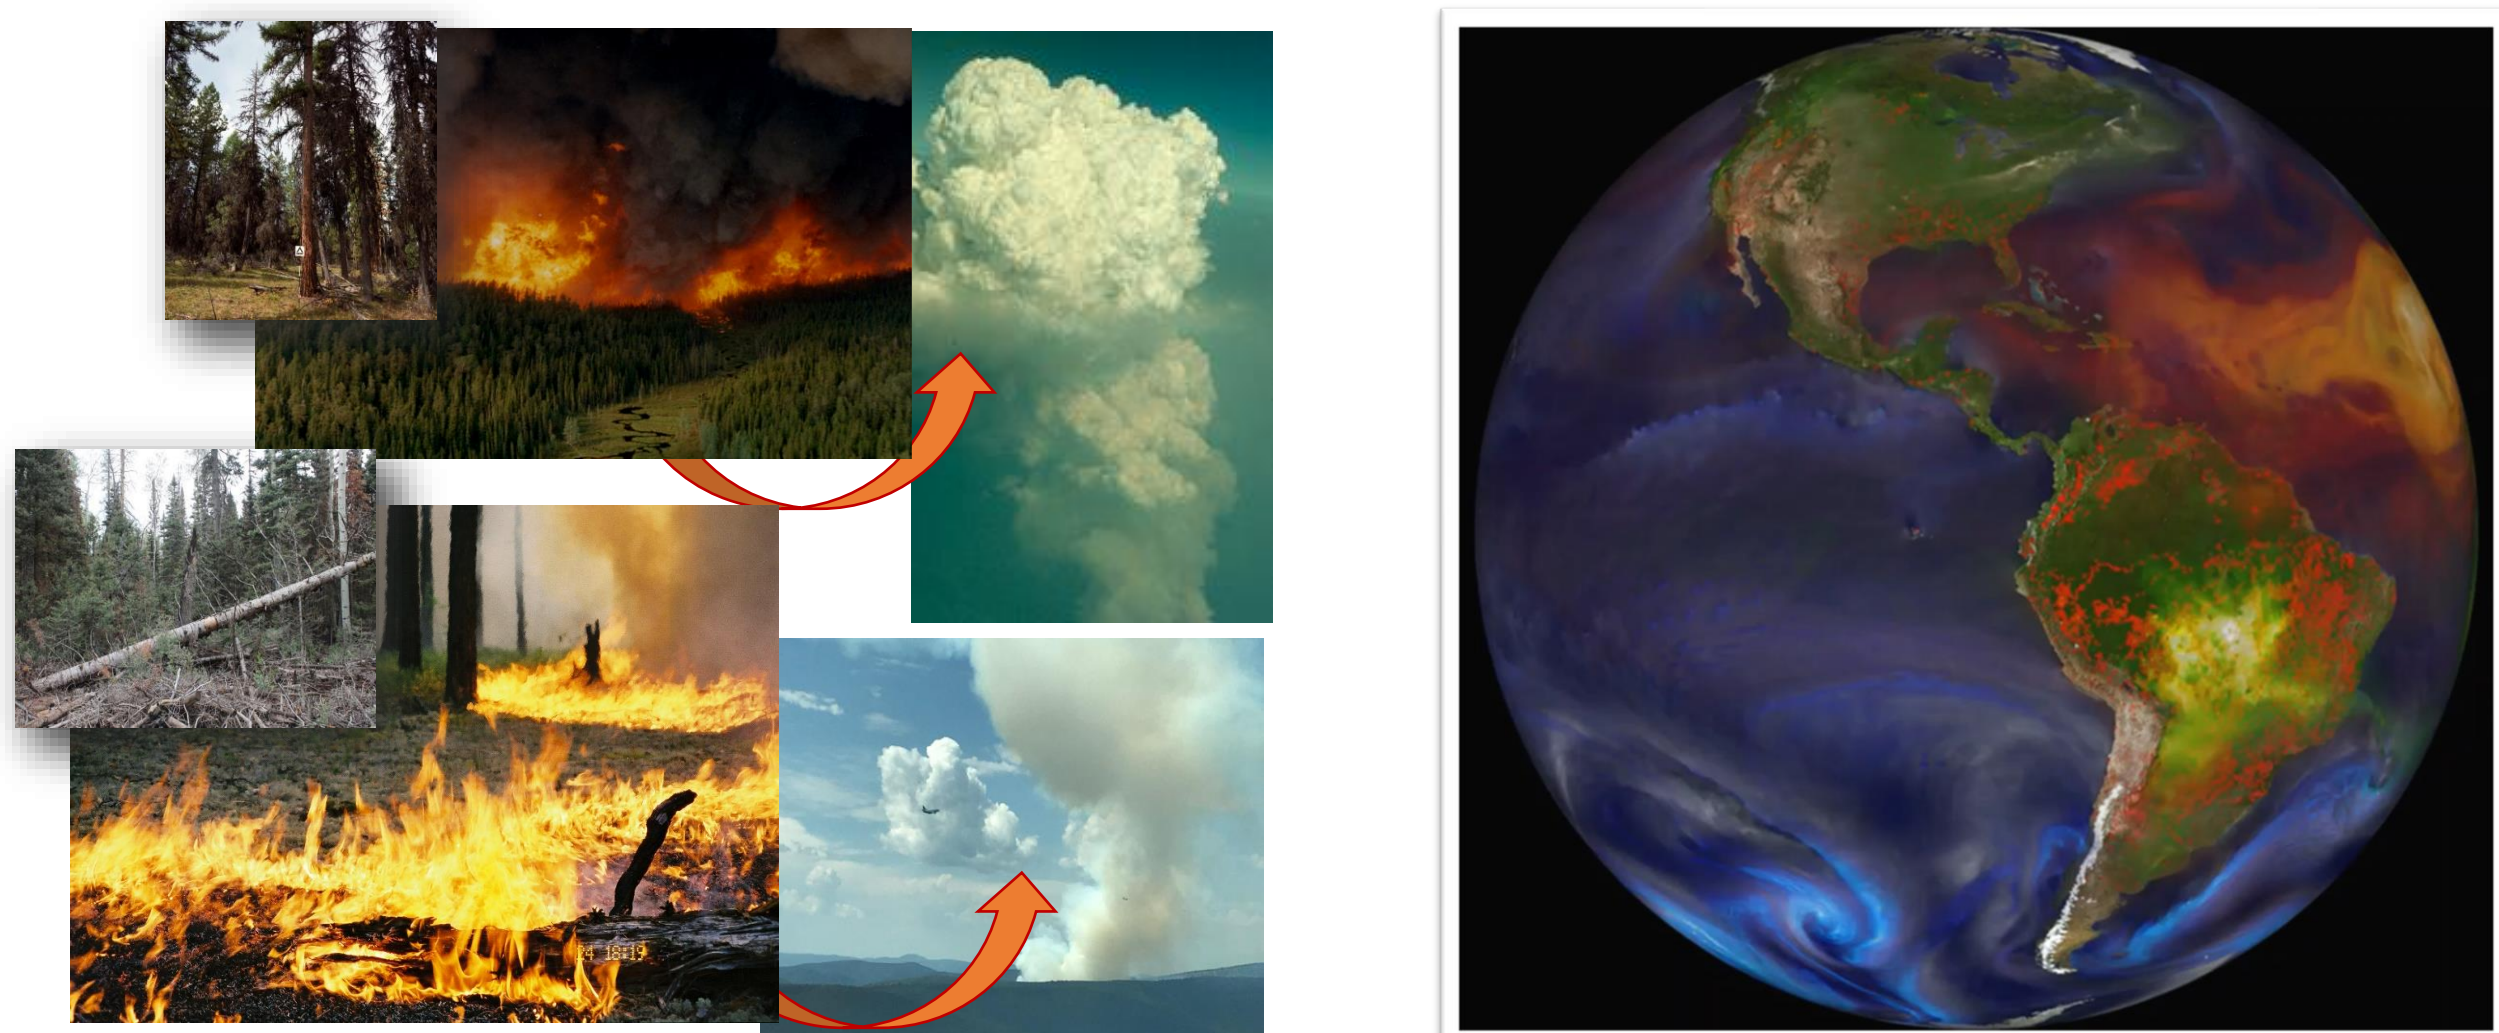


Figure 1: Fuel and fire weather are linked to fire carbon emissions and smoke plume injection height. Fire emissions are transported in the atmosphere, which is linked to global processes. *Source: NASA Scientific Visualization Studio*

To accurately model fire emissions, understanding fuel characteristics and burning conditions is crucial, as they vary with the fuelbed type and fire weather. For example, savanna fires have lower carbon loading and intensity but spread quickly, while boreal forest fires burn longer and release more carbon due to higher loading. Hotter, drier conditions increase fuel consumption and smoke plume height. Fire weather and available fuel are the key drivers of emissions.

Methodology: FIREX-AQ Proof of Concept

The Fire Influence on Regional to Global Environments and Air Quality (FIREX-AQ) 2019 campaign studied fire emissions, chemical evolution, and downwind impacts. We calculated carbon emissions for each fire using daily fire weather, fuel data, and burned area from fire detections, distributing the emissions across the day based on diurnal cycles derived from GOES Fire Radiative Power

Calculating Carbon Emissions

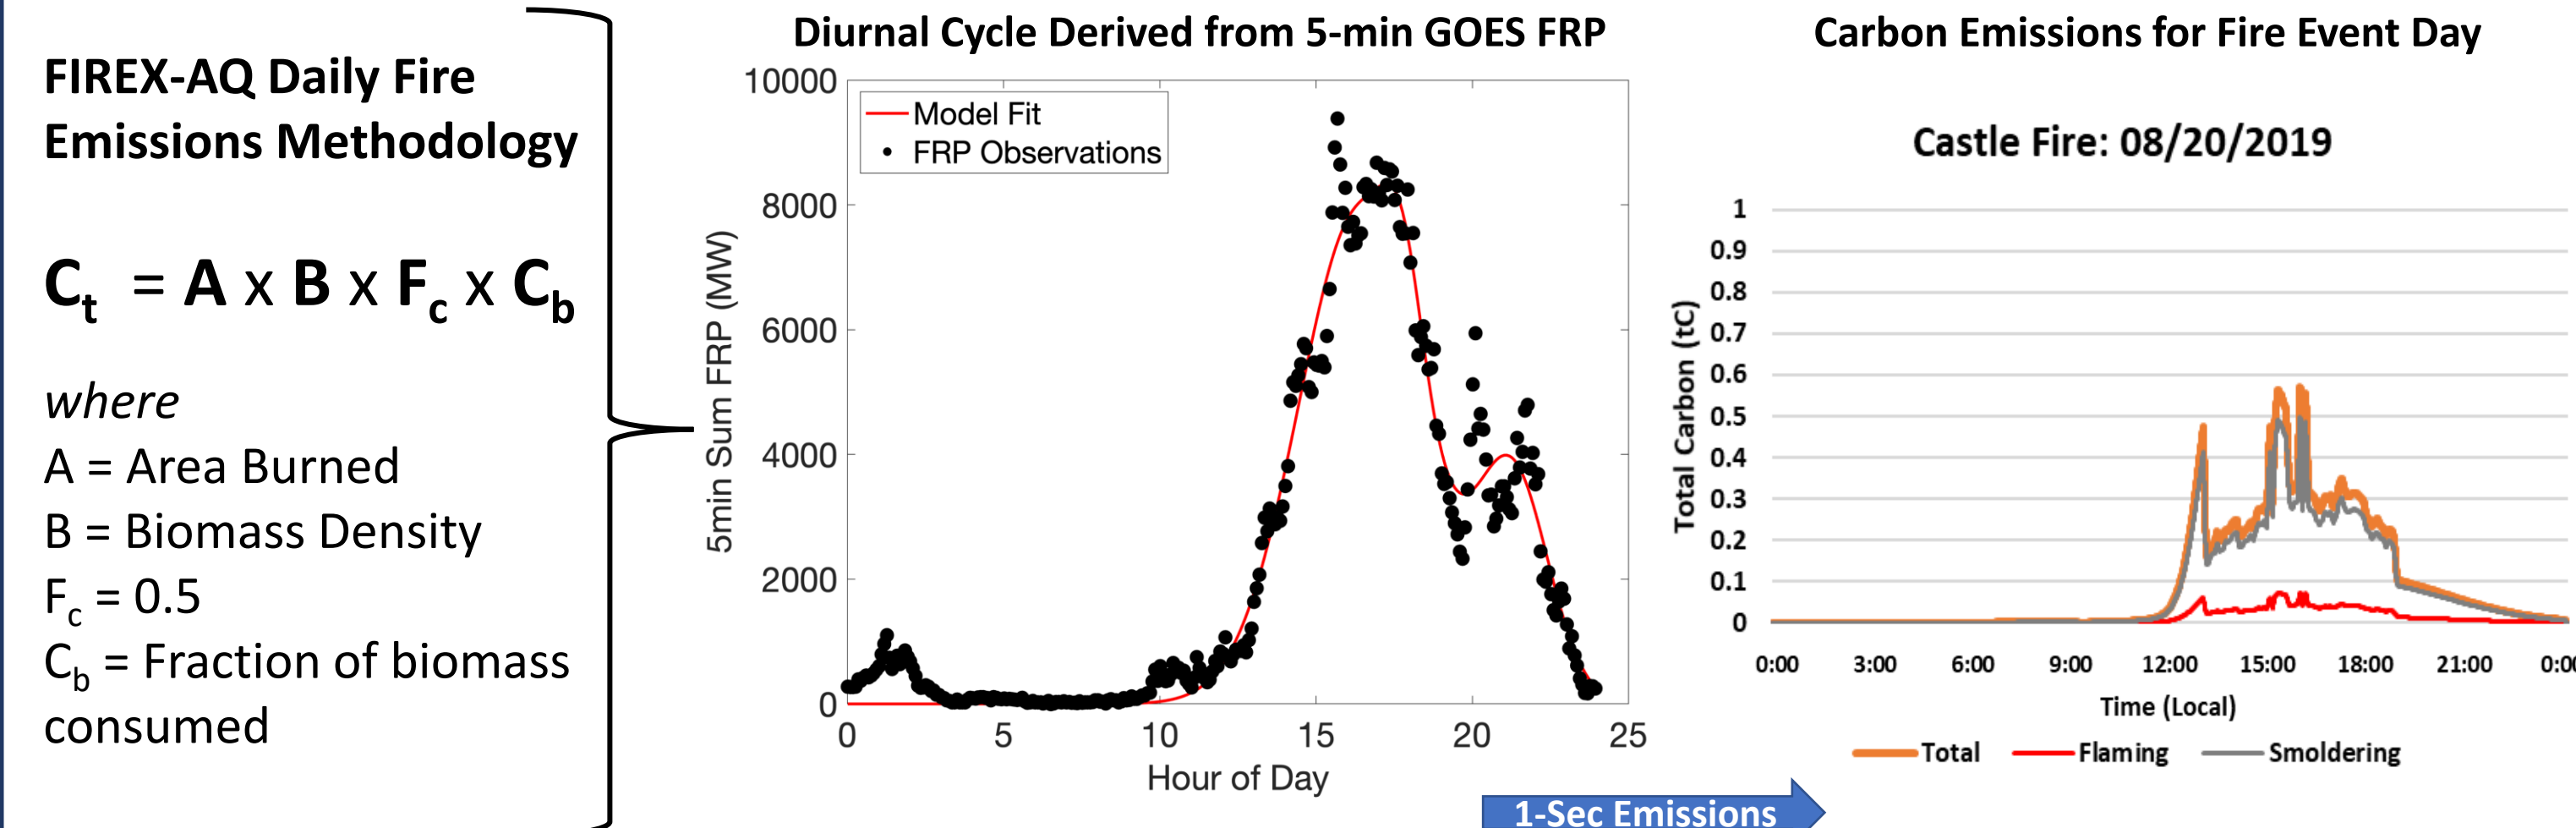


Figure 2: Emissions calculation showing the formula used (left), an example of a GOES satellite diurnal cycle used for distributing daily emissions (center), and the resulting daily carbon emissions for one day of a fire sampled (right).

We calculated carbon emissions using:

- A)** the area burned, which we model using satellite fire detections (VIIRS and MODIS)
- B)** the biomass density, which is derived from the FCCS 30m fuelbeds,
- Fc)** the carbon fraction of biomass, which we assume is 50%
- C)** the fraction of biomass consumed, which is based on the fire weather maps provided by United States Forest Service

Area Burned

Burned area was calculated using active VIIRS and MODIS fire detections, buffered to 375m or 1000m diameter, respectively, and overlaid on previous days' buffered detections.

Residual burned area: Previously burned area continuing to smolder.

New burned area: Newly ignited area burning, mostly flaming with some smoldering.

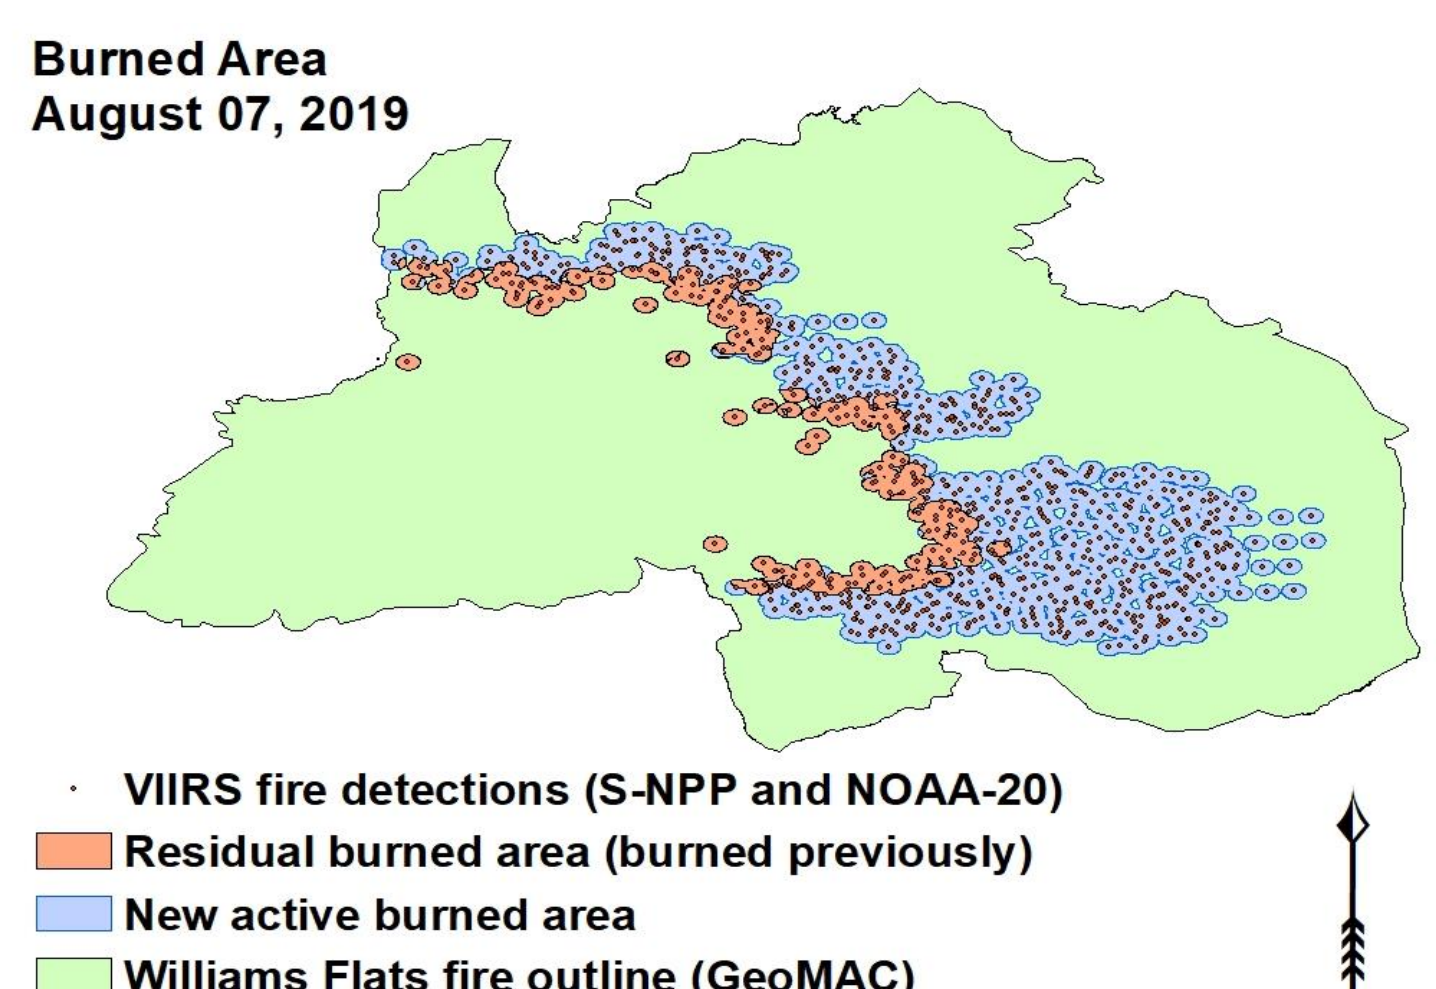


Figure 3: An example of burned area for one day of a fire

Biomass Density

The Fuel Characteristic Classification System (FCCS) is a 30 m resolution product with over 250 fuel types across the U.S., each fuelbed having unique biomass loading values based on canopy, wood, shrub, ground, and herbaceous biomass.

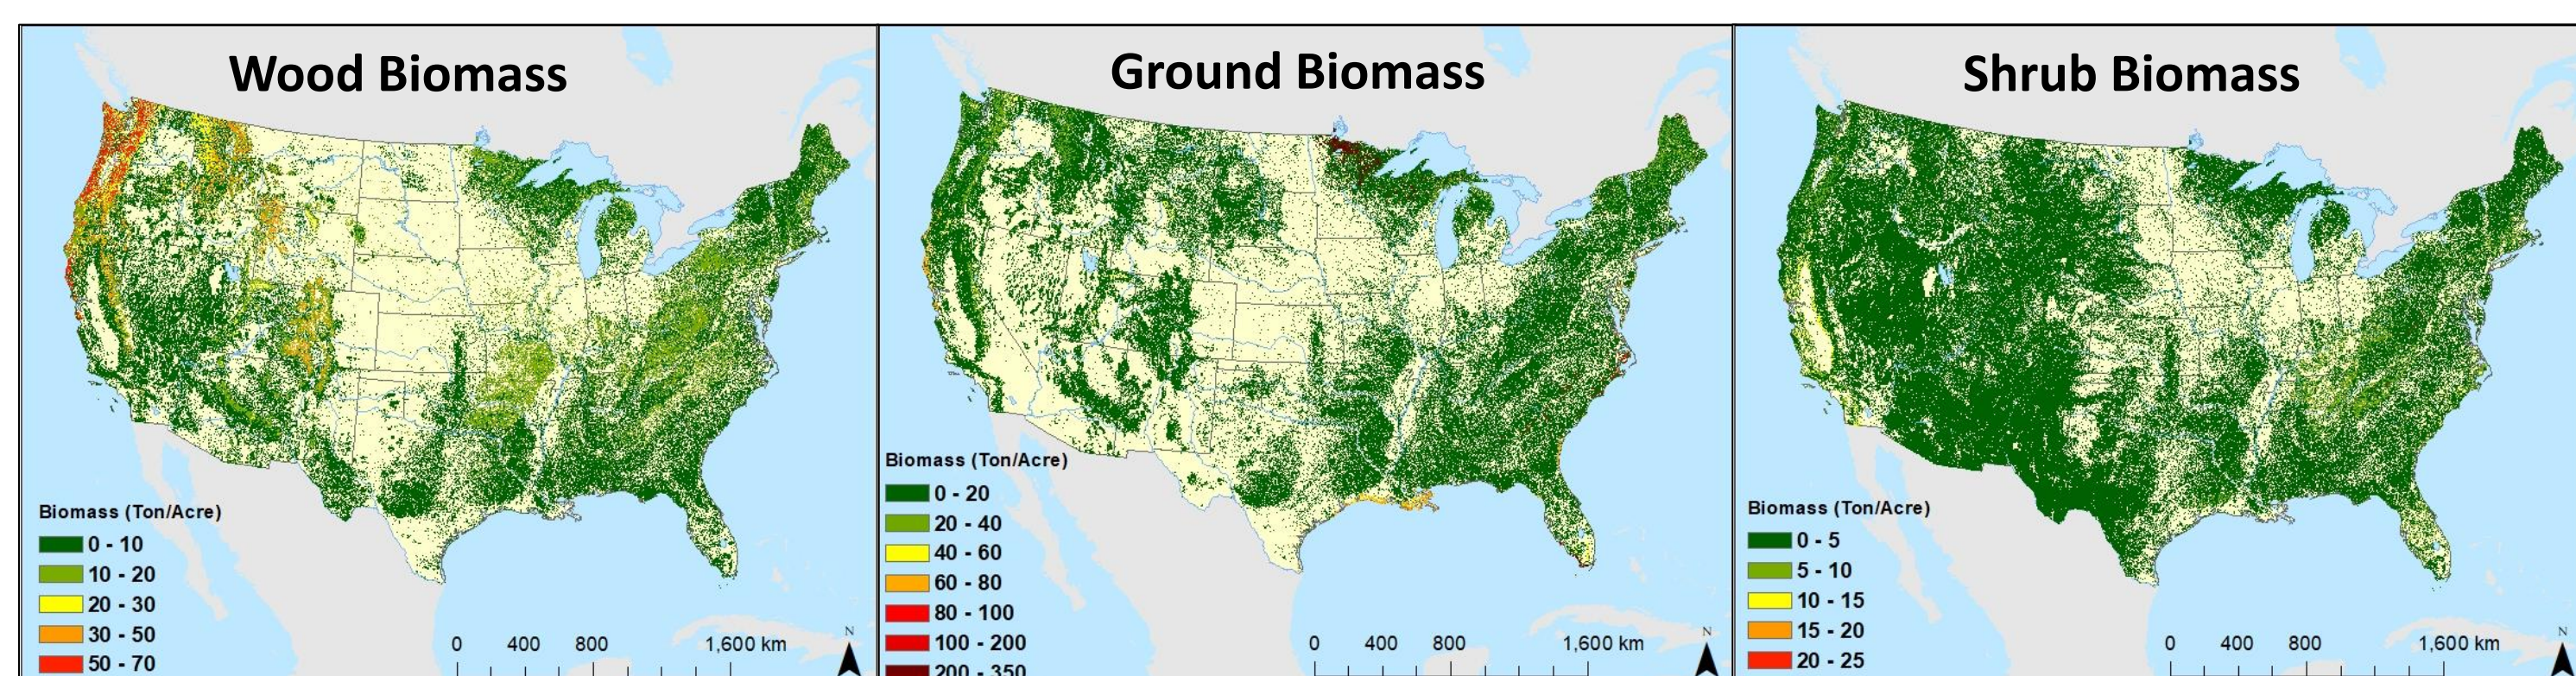


Figure 4: These maps show the carbon biomass loading (ton/acre) for some biomass variables

Biomass Consumption

Consumption (tC/acre), in five Fire Danger categories (Low, Moderate, High, Very High, Extreme) is calculated using the following table of biomass burn percentage, for both 'new' and 'residual' burn.

Percentage of Fuel Burned in each Fire Weather Category
New (N) burned area / previously burned Residual (R) area

Variable	Extreme N/R	Very High N/R	High N/R	Moderate N/R	Low N/R
Canopy_avai_load ¹	90 / 5	80 / 5	60 / 5	10 / 0	0 / 0
Shrub_tpa_biomass ²	100 / 0	80 / 5	60 / 5	40 / 5	20 / 5
Herb_tpa_biomass ²	100 / 0	80 / 5	60 / 5	40 / 5	20 / 5
Wood_tpa_biomass ³	20 / 40	10 / 20	10 / 20	10 / 10	10 / 5
LLM_tpa_biomass ⁴	100 / 0	80 / 5	60 / 5	40 / 5	20 / 5
Ground_tpa_fuel ⁵	20 / 40	10 / 20	10 / 20	10 / 10	10 / 5

¹ Total available canopy fuels, including tree crowns, C2/C3 snags, and ladder fuels (excluding tree boles and C1 snag wood). ² Includes aboveground shrub/herbaceous biomass. ³ Total combustible wood, including downed wood, rotten and lightered stumps, and piled wood. ⁴ Litter, lichen and moss biomass. ⁵ Ground fuels including duff, basal accumulations and squirrel middens. *Source: Soja et al., 2004, Pierce et al., 2007, Petrenko et al., 2012.*

Continuous raster layers of fuel consumption potential under each fire category were created. Here we show "new" burn fuel loading. As fire danger becomes more extreme, the availability of fuel to burn increases correspondingly.

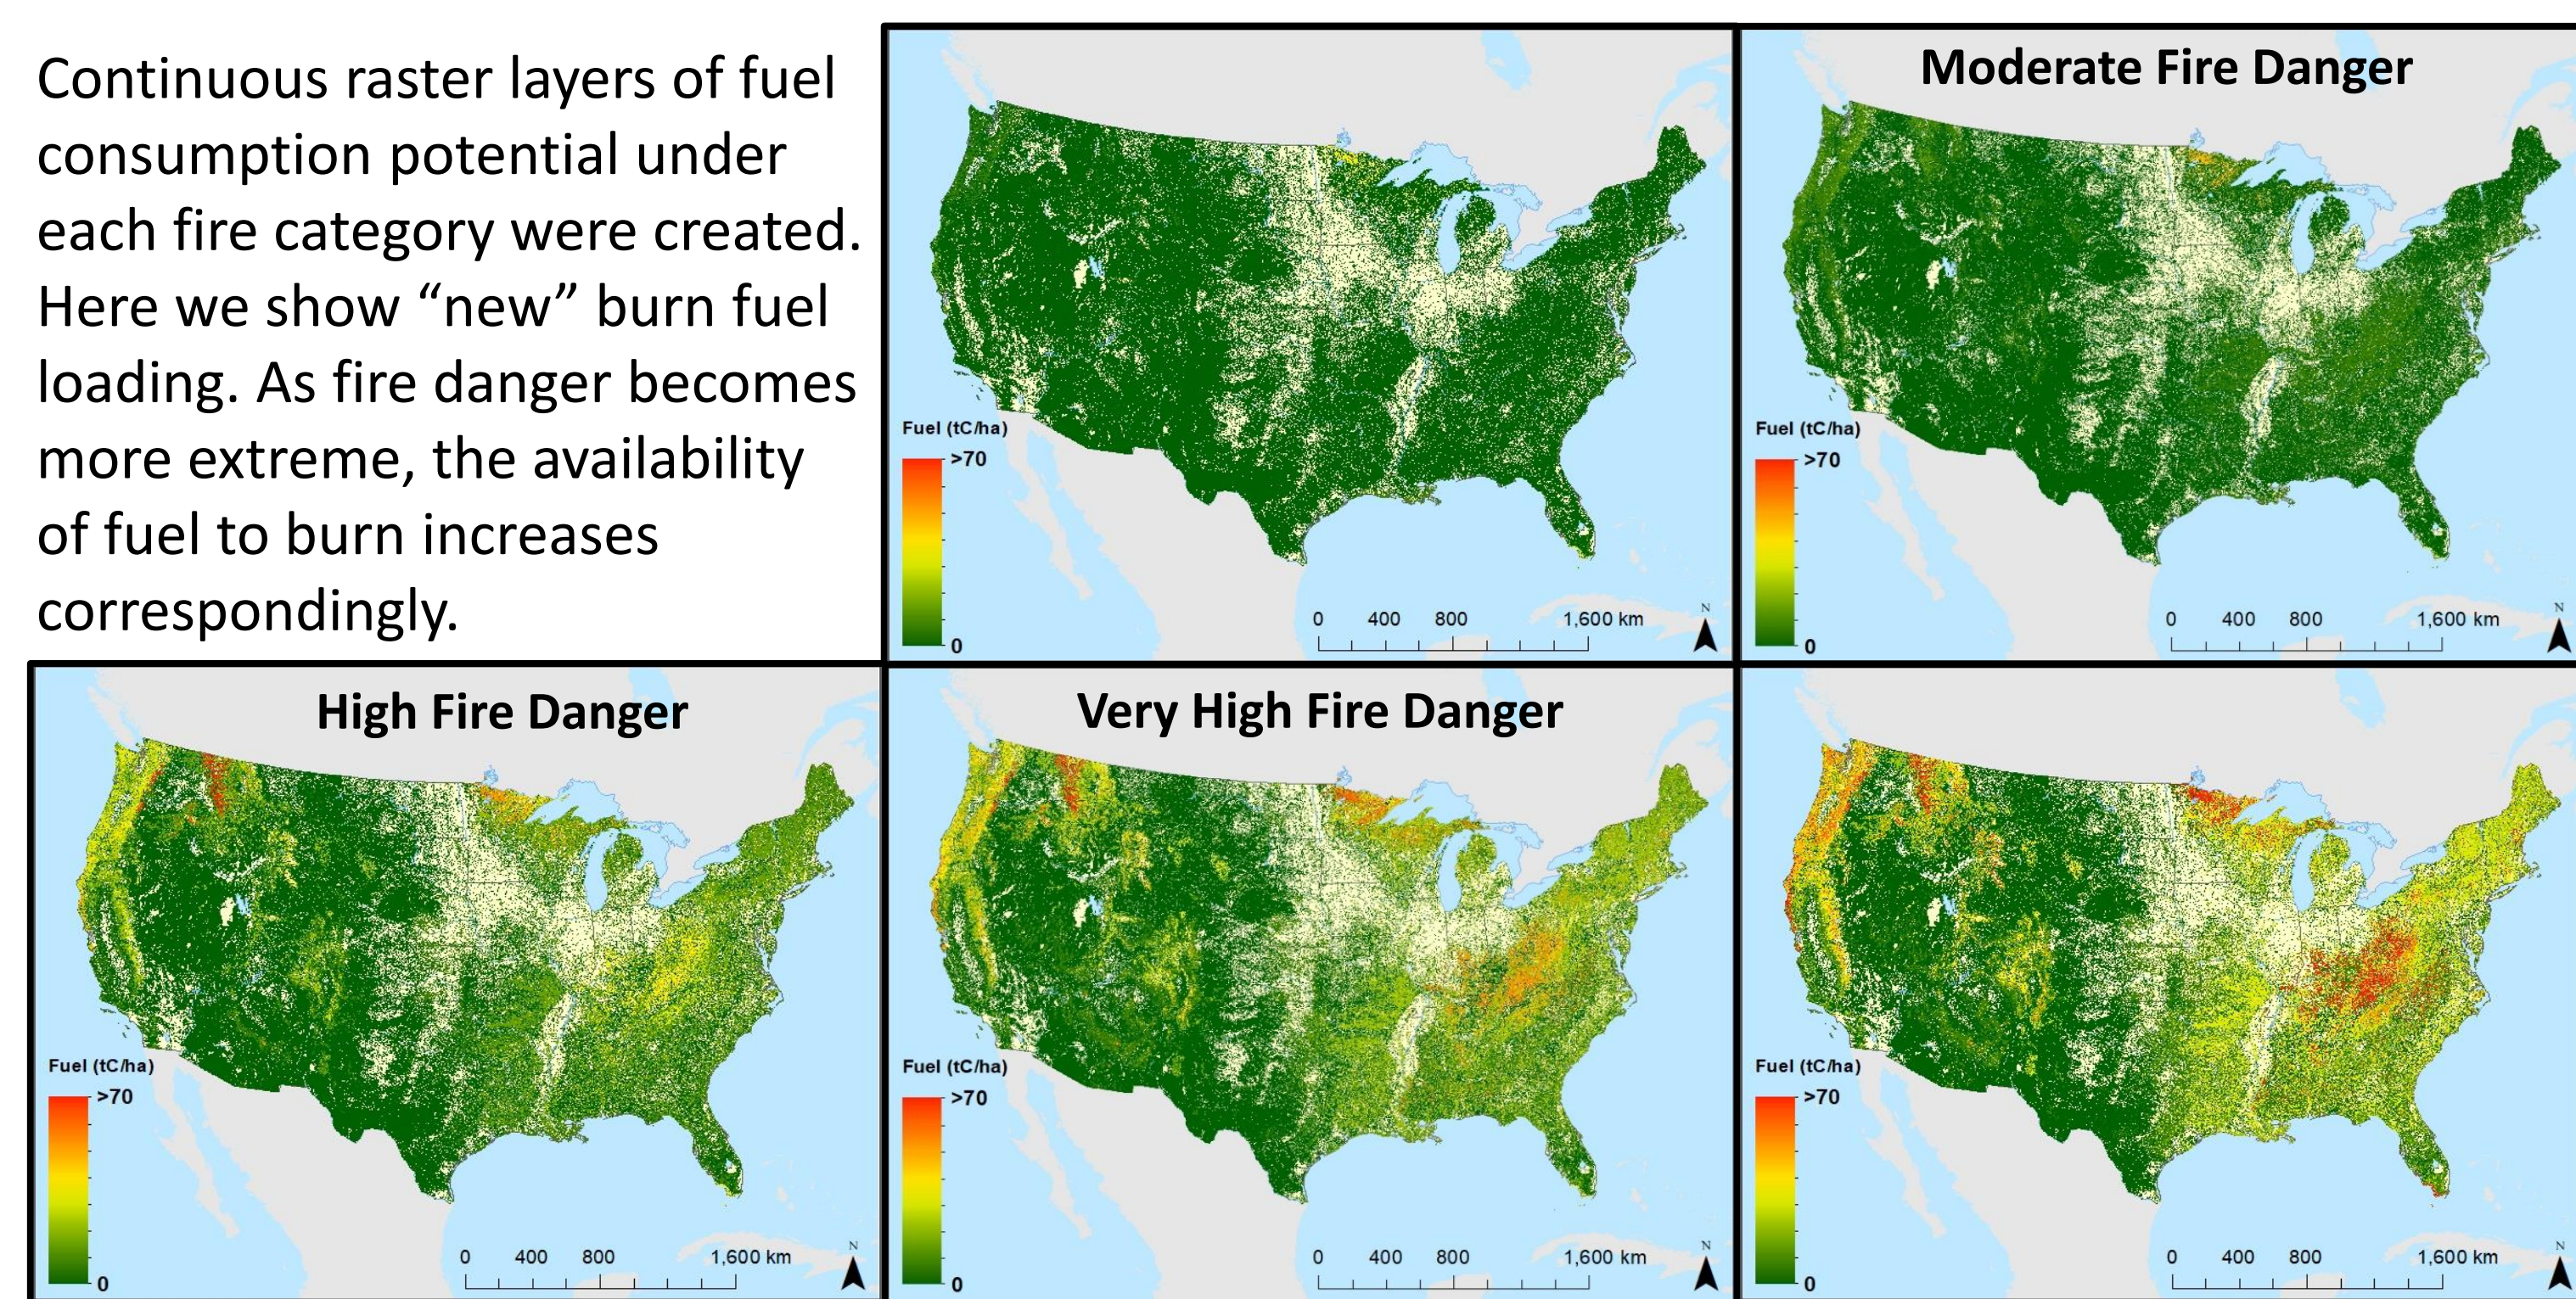


Figure 5: Resulting Fuel loading data layer for each fire danger category under 'new' burning conditions.

Emissions Comparisons

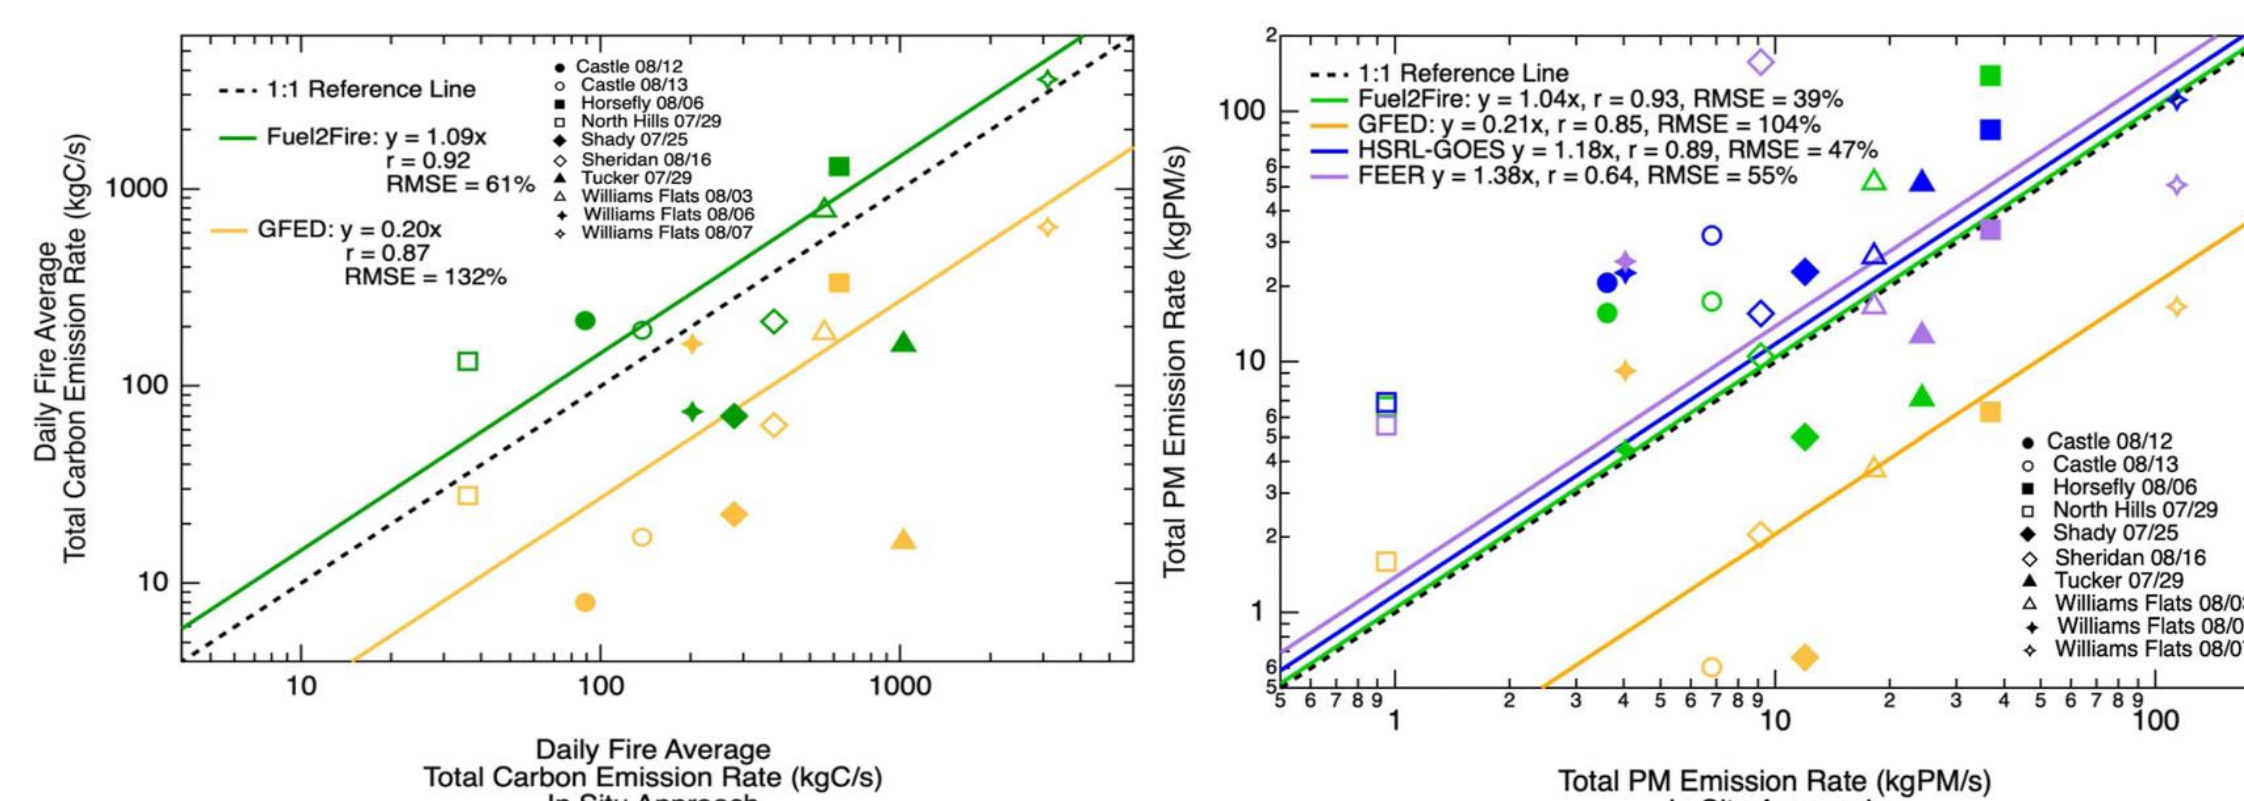


Figure 6: Total carbon emissions comparisons with in-situ aircraft data for FIREX-AQ

Source: Wiggins et al., GRL 2020; Wiggins et al., JGR 2021; Stockwell et al., 2022

When comparing our emissions with in-situ aircraft data (daily fire average total carbon emissions rate and total particulate matter emissions rate), multiple manuscripts demonstrate our emissions have the best agreement.

Expanding to a Global Carbon Consumption Database

In response to the need to quantify global wildfire emissions, we expanded our methodology to create a global consumption database linked to distinct fuels across fire danger categories, using the Pettinari (2015) Global Fuelbed database as the base for fuel loading.

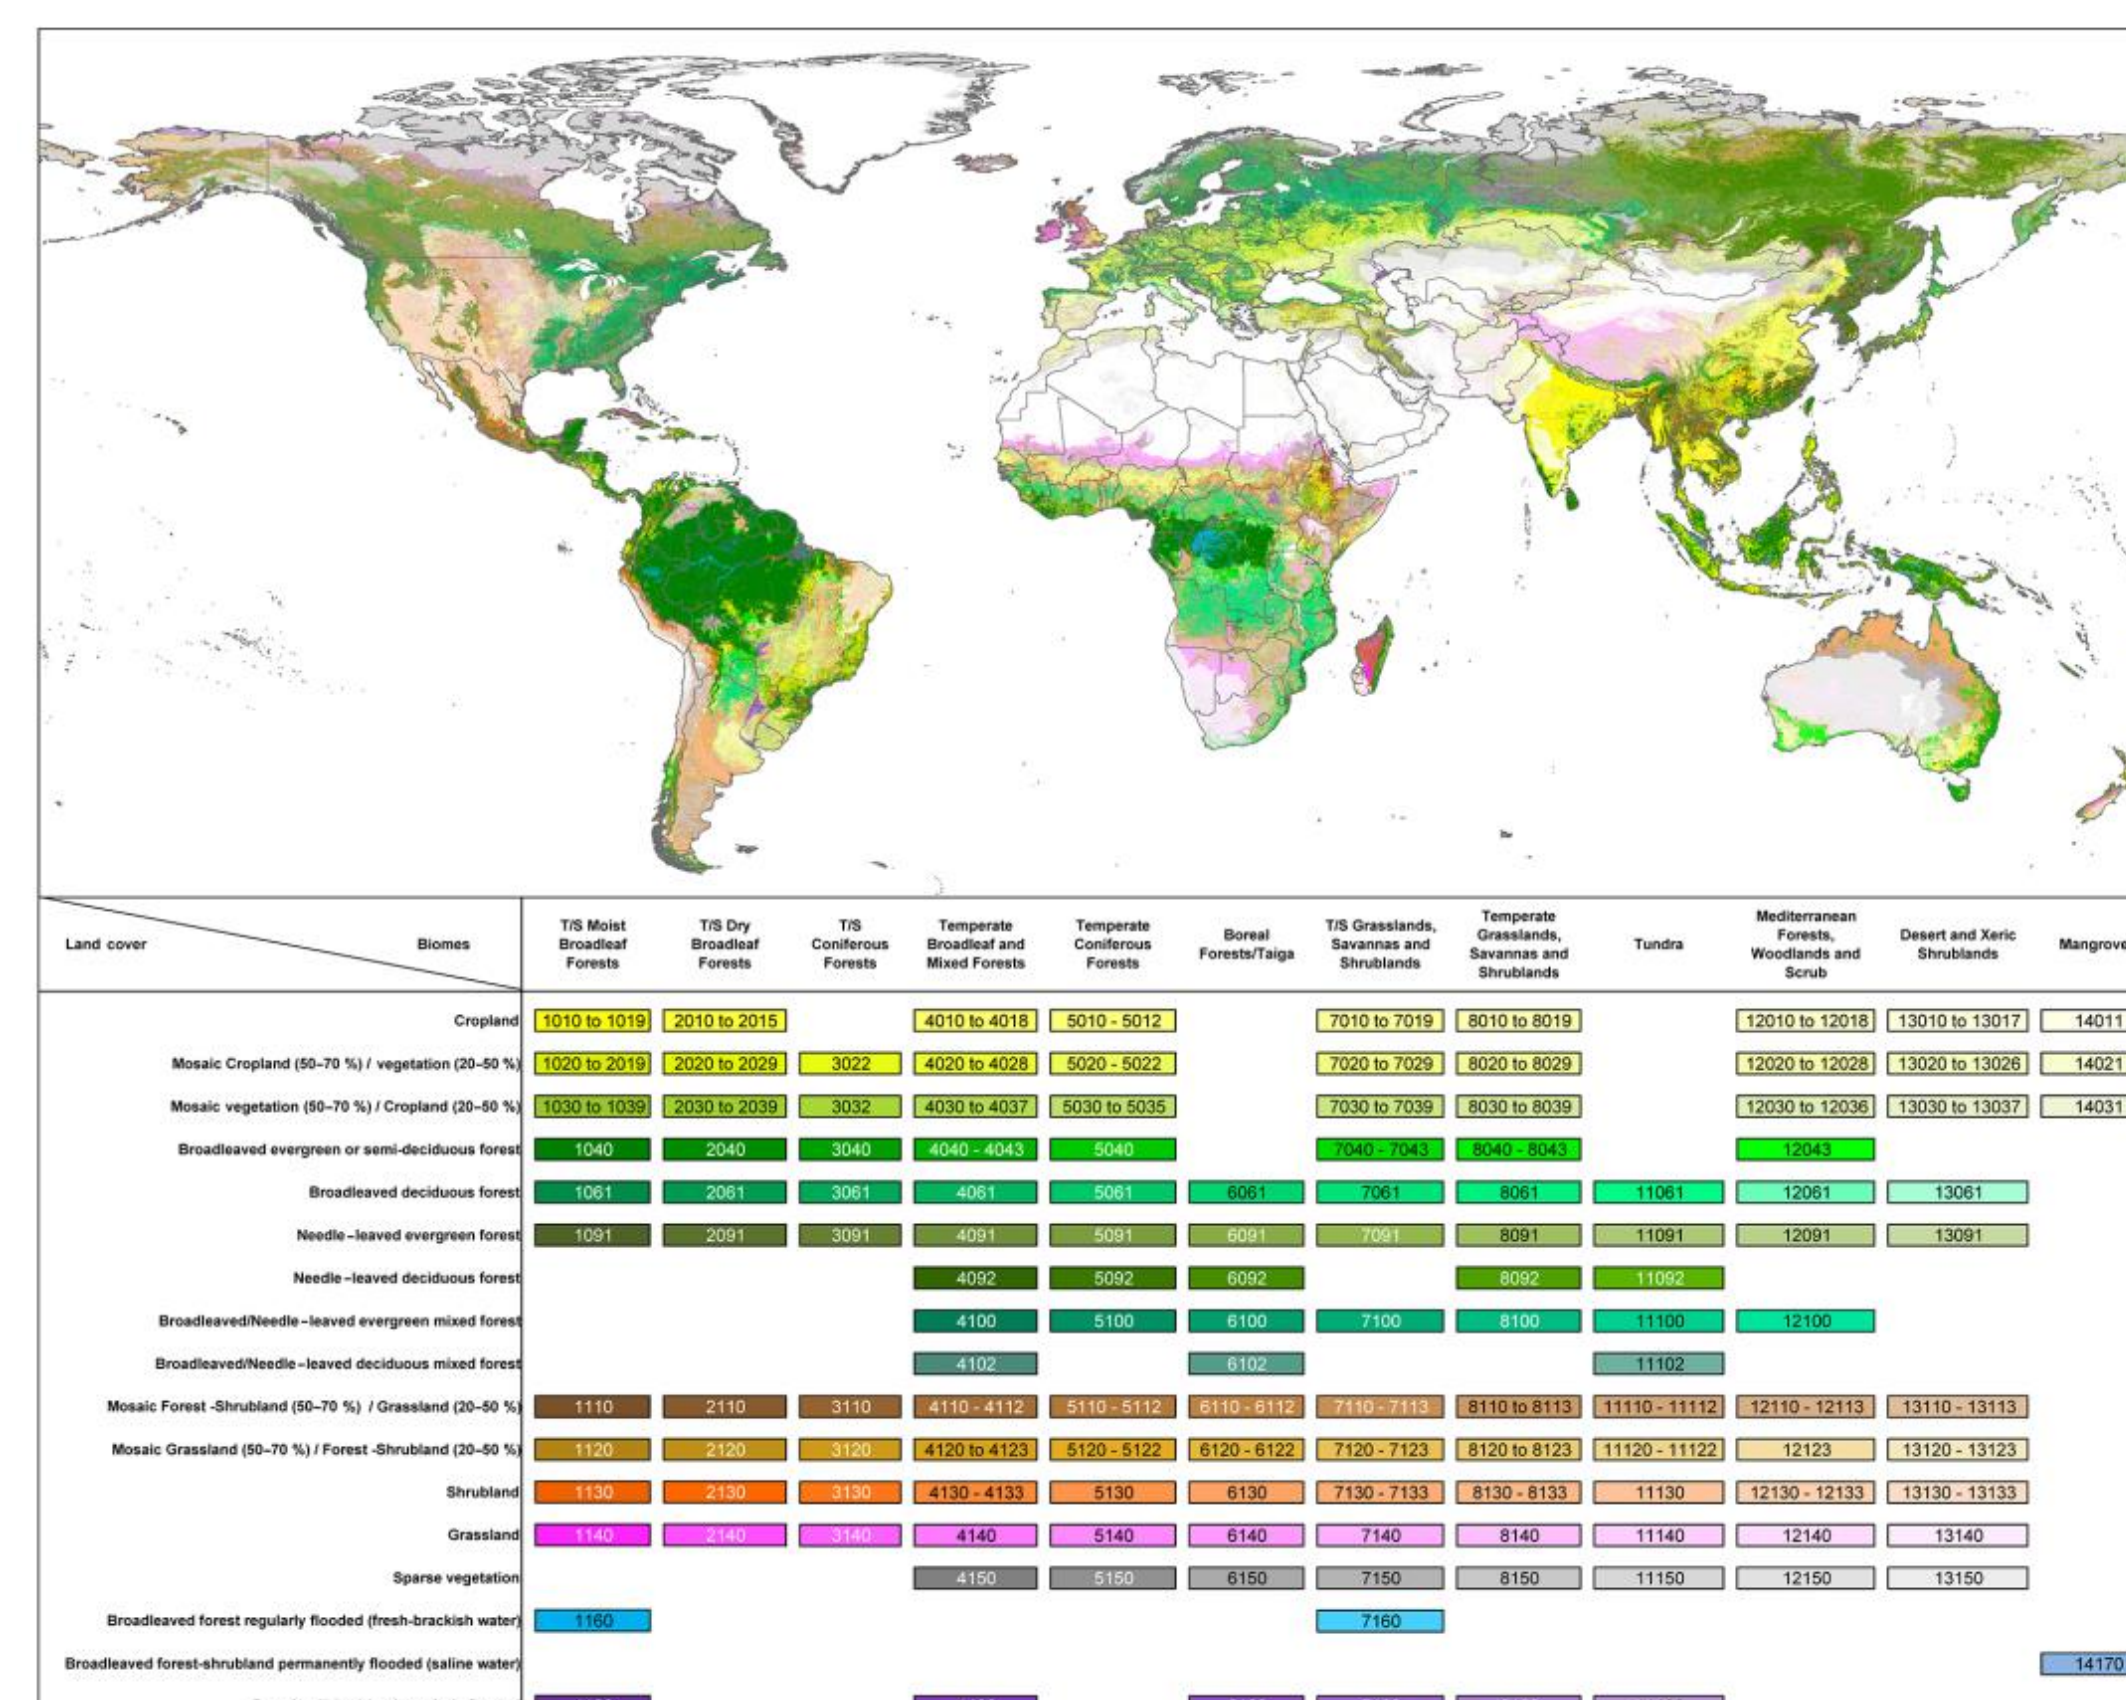


Figure 7: Pettinari & Chuvieco (2016) Global fuelbed map. The legend details the number of the fuelbeds, and the land cover biome that they represent.

Pettinari (2015) Global Fuelbed:

- a global fuel map with standardized FCCS biomass parameters
- Includes biomass variables such as total canopy, ladder fuels, shrub, duff, woody, etc
- ~300 m resolution
- 274 main fuelbeds, 359 when sub-fuelbeds considered

Source: Pettinari, M. L. and Chuvieco, E.: Generation of a global fuel data set using the Fuel Characteristic Classification System, Biogeosciences, 13, 2061–2076

- We apply the same Fuel Decision Table for allocation of New:Residual percentages for each biomass variable
- We will allocate less fuel to previously burned areas
- Final 300 m product will contain tC released under each of 5 fire danger levels and for new vs residual burning
- Global product will be made publicly available

This product serves as a valuable tool when used in conjunction with burned area data to rapidly estimate the carbon consumed and released into the atmosphere.

Acknowledgements: We are thankful for the funding support by the NASA Health and Air Quality Science Team (HAQAST) program that made this work possible (80NSSC21K0514).