

Atmospheric Mining in the Outer Solar System: In-Situ Resource Utilization, Factories, and Moon Mining Parametric Analyses

Bryan Palaszewski*
NASA John H. Glenn Research Center
Lewis Field
MS 5-10
Cleveland, OH 44135
(216) 977-7493 Voice
(216) 433-5802 FAX
bryan.a.palaszewski@nasa.gov

Fuels and Space Propellants Web Site:
<http://www.grc.nasa.gov/WWW/Fuels-And-Space-Propellants/foctopsb.htm>

Atmospheric mining in the outer solar system (AMOSS) has been investigated as a means of fuel production for high energy propulsion and power. Fusion fuels such as Helium 3 (^3He) and deuterium can be wrested from the atmospheres of Uranus and Neptune and either returned to Earth or used in-situ for energy production. Helium 3 and deuterium were the primary gases of interest with hydrogen being the primary propellant for nuclear thermal solid core and gas core rocket-based atmospheric flight. A series of analyses were undertaken to investigate resource capturing aspects of atmospheric mining in the outer solar system. This included the gas capturing rate, storage options, and different methods of direct use of the captured gases. While capturing ^3He , large amounts of hydrogen and ^4He are produced. With these two additional gases, the potential for fueling small and large fleets of additional exploration and exploitation vehicles exists. Analyses of orbital transfer vehicles (OTVs), landers, and in-situ resource utilization (ISRU) mining factories are included. Preliminary observations are presented on near-optimal selections of moon base orbital locations, OTV power levels, and OTV and lander rendezvous points. Aerospacecraft with closed cycle gas core propulsion are used to capture the ^3He and deuterium from the outer planet atmospheres. Water ice on the outer planet moons has been identified as critical resources for refueling the moon landers and the nuclear electric propulsion (NEP) OTVs. Parametric analyses of the number of mining machines and their associated issues are addressed. The parametric analyses include the fraction of water ice in the regolith, the machines' payload mass, the truck machine to hold the payload, and the mass of the rocket hoppers needed for transportation. The number of landers for the initial emplacement of the outer planet moon processing factories is also analyzed.

I. Atmospheric Mining in the Outer Solar System

Atmospheric mining of the outer solar system is one of the options for creating nuclear fuels, such as ^3He , for future fusion powered exploration vehicles or powering reactors for Earth's planetary energy. Uranus' and Neptune's atmospheres would be the primary mining sites, and robotic vehicles would wrest these gases from the hydrogen-helium gases of those planets. While preliminary estimates of the masses of the mining vehicles have been created (Refs. 1-13), additional supporting vehicles may enhance the mining scenarios. Storing the mined gases at automated bases on outer planet moons was conceived to ease the storage requirements on interplanetary transfer vehicles (that would return the cryogenic gases to Earth).

* Leader of Advanced Fuels, AIAA Associate Fellow

II. Resource Capturing Studies

Studies of the gas capture rate and its influence on mining time in the atmosphere were conducted. Aerospacecraft cruisers have been identified as a “best” solution for atmospheric mining (Ref. 1-13). To power these vehicles, atmospheric hydrogen gas would be liquefied and used as a rocket propellant for the ascent to orbit. A gas core rocket is a likely candidate. Gaseous or liquid hydrogen would be used to power the engines during atmospheric mining operations. Helium 3 (^3He) would be separated from the atmospheric hydrogen and helium (^4He) captured, liquefied, and stored as a payload that would be returned to orbit. A 500-kg payload of ^3He is captured during the mining time. Table I provides the amount of ^3He in the outer planet atmospheres.

Table I. Fraction of helium 3 in outer planet atmospheres

		Uranus	Neptune	
	Amount of ^3He in ^4He	1.00E-04	1.00E-04	
	Amount of ^4He in atmosphere	0.152	0.19	
	Amount of ^3He in atmosphere	1.52E-05	1.90E-05	

III. Orbit Transfer Vehicle Operations and Analyses

Selecting the appropriate moon for OTV propellant factories is a primary focus of the paper. An example of the OTV and lander flights’ delta-V values needed for OTV refueling is presented in Appendix A, Tables A-I through A-IV. The OTV’s mission design was planned with a rendezvous with the AMOSS mining aerospacecraft (ASC), departure from the rendezvous point near the cloud tops (800 km above the planet), low thrust transfer to the moon base (that base is located on Titania, in orbit around Uranus), and then rendezvous with the moon base lander. The lander delivered the propellant to the OTV for the round trip from the moon to the 800 km altitude above the planet. References 14 through 35 provide the supporting data for vehicle design and outer planet physical characteristics and resources.

Establishing an optimum transportation system will be influenced by many factors: the OTV mass and power level, the payload mass of the lander and the selection of the moon for the mining factories. Several optima will be created based on the size and mass of the moon selected. The moon’s mass will strongly influence the propellant mass needed for the refueling of its oxygen/hydrogen propulsion system and the time needed for creating the fuel for the OTV.

Figures 1 and 2 provide the initial masses of the OTV and landers, for landers based at the moons of Uranus and Neptune, respectively. Using the landing and ascent delta-V values for various moons of Uranus and Neptune, the “best” moon base location will be estimated. The largest moons may be less attractive as their orbital and escape velocities are higher, requiring larger and more massive landers.

Two examples of the estimated transportation system masses are presented in Figures 1 and 2 (Ref. 3); Figure 1 shows the transportation system mass for Uranus’ moons and Figure 2 depicts that transportation mass for the moons of Neptune. As shown in Tables A-I and A-II, these moons represent the moons with the smallest and largest delta-V values required for moon landing operations at each planet. The NEP OTV operated with an Isp of 5,000 s and a reactor alpha of 10 kg/kW. The OTV delta-V values are presented in Tables A-III and A-IV. The power level was 10 MWe. For all cases, a lander Isp value of 460 s was selected for the comparison. The lander payload masses were 200 MT. While the smallest moons require the lowest overall transportation system mass, the moon low gravity may be too low for efficient propellant processing. Such processing may be possible aboard an

artificial gravity in-space base. Additional OTV and lander analyses for the wide range of moons will be presented. The influence of in-space processing, in orbit about the planets' moons, will also be investigated. \

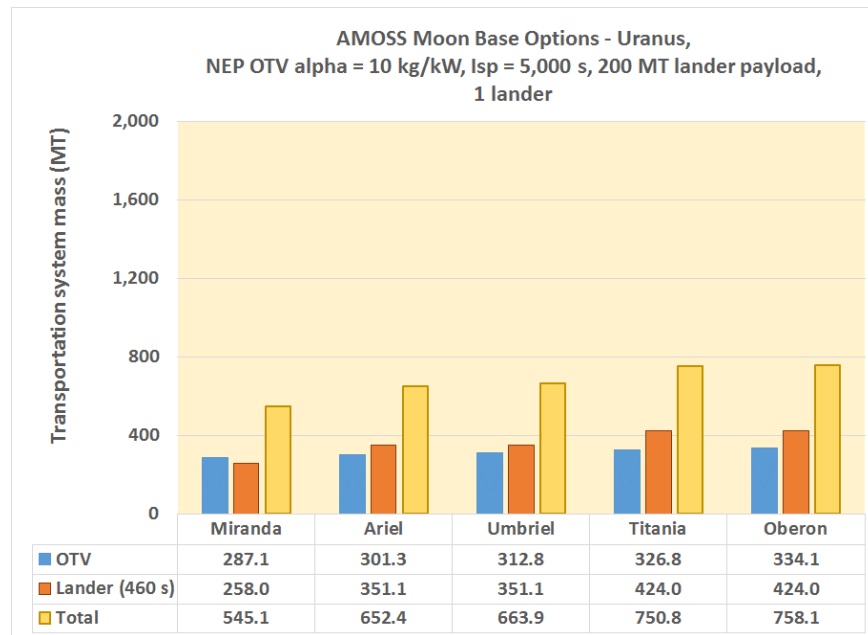


Figure 1. Uranus - Transportation System Mass – NEP alpha = 10 kg/kW, Isp = 5,000 s, Lander Isp = 460 s (one lander included in each case).

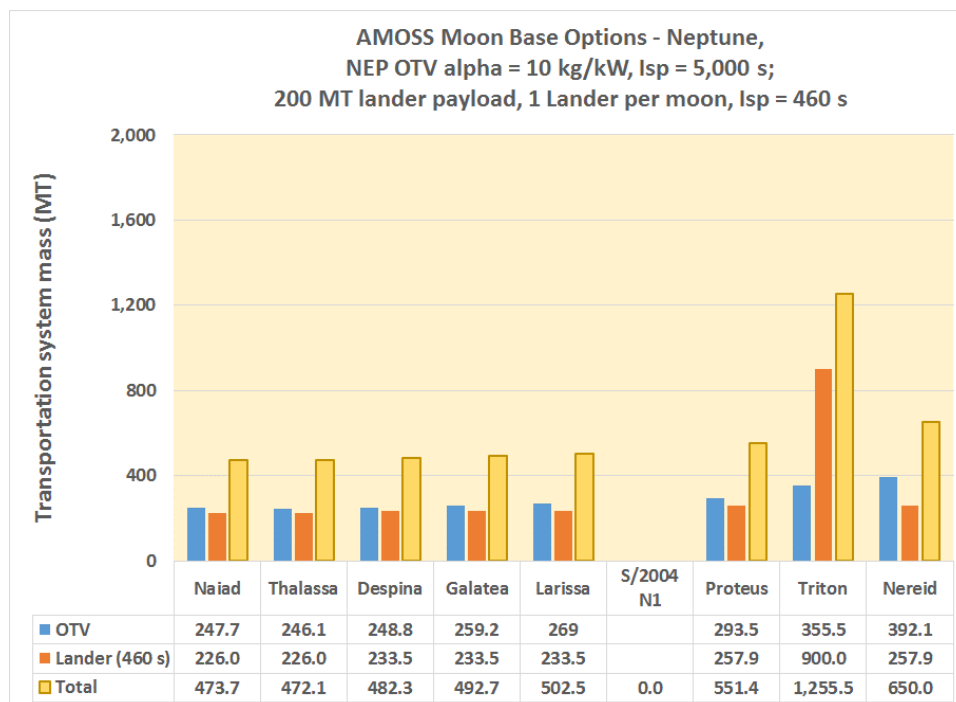


Figure 2. Neptune - Transportation System Mass – NEP alpha = 10 kg/kW, Isp = 5,000 s, Lander Isp = 460 s (one lander included in each case)

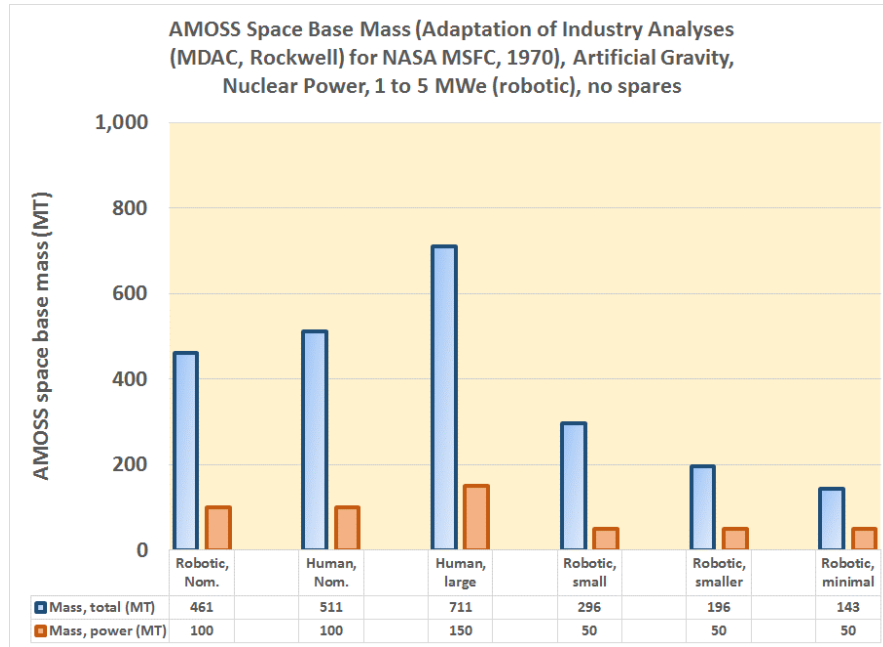


Figure 3. Space base mass estimates (based on extrapolations of data in Ref. 37 and 38)

Figure 3 shows the range of masses for potential orbital factories for ISRU processing (Refs. 37 and 38). The gravity levels of the outer planet moon are sufficiently low to require artificial gravity for the processing of the water ice for the lander and OTV propulsion, as well as the ^3He and deuterium for the AMOSS fusion fuels.

IV. Overall Architecture Masses

Analyses were conducted to estimate the AMOSS on-orbit mass requirements for 10 years of operations. Table II shows the AMOSS vehicle lifetime and replacement schedules. Figures 4 and 5 shows the mass delivery schedule for Miranda based AMOSS systems (Ref. 3). Using nominal masses for each of the transportation and factory systems, the total mass for the initial deliveries was approximately 22,000 MT (Ref. 3). The NEP OTV lifetimes were also assessed for 7 and 10 year lifetimes (Ref 3). The smaller moons closer to both Uranus and Neptune required shorter trip times and hence allowed for more OTV flights for a given OTV lifetime. Figure 6 shows the ASC fleet mass reductions that are possible with increasing ASC payload mass. By increasing the ASC payload from 1 MT to 100 MT, the total ASC fleet mass is reduced from 100,000 MT to 1,350 MT. With this improvement, the overall architecture mass is reduced from 112,000 MT to 22,000 MT.

Mining time and propellant masses:

In all previous AMOSS analyses, the moons closer to the target planet reduced the mining system mass and are the most attractive. The minimal AMOSS OTV fleets mass uses Miranda at Uranus and Naiad or Thalassa at Neptune. The OTV and lander propellant masses for Uranus and Neptune moon operations are shown in Figure 7 and 8, respectively. As an example, the minimal OTV and lander propellant masses for Miranda are 82.1 and 27.1, respectively. The OTV and lander propellant values for Thalassa are 43 and 4, respectively.

For Miranda, using the MF of 1×10^{-1} , the mining time is approximately 7.7 days. With a MF of 1×10^{-2} , the mining time is 77 days, shown in Figure 9A. The capture bag for the mined material is also presented in Figure 9B. For a 100 MT water mass and the MF of 1×10^{-2} , the capture bag radius is 12.3 meters. Maintaining the integrity of the capture bag will be a major challenge. The water and the other regolith components will be gases and rock. A water-rock separation system will likely include some centripetal acceleration. Purification of the water will be another challenge. Once the water is captured, it must be separated into oxygen and hydrogen.

Table II. AMOSS vehicle lifetime and replacement schedules

Table I. AMOSS vehicle lifetime and replacement schedules

ASC lifetime = 100 to 1,000 flights per ASC; a total of 10,000 flights needed.
This translates to 10 to 100 ASCs.

OTV lifetime = 7 years.
This translates to 11 OTVs for Miranda.
This translates to 4 OTVs for Thalassa.

Lander lifetime = 5 to 10 flights per lander; for a total of 77 OTV refueling flights.
This translates to 8 to 16 landers.
5 flights per lander = 16 landers
10 flights per lander = 8 landers

Factory lifetime = 5 to 10 years.
This translates to 2 to 6 factories.
10 years = 1 or 2 factories
20 years = 2 or 4 factories
30 years = 3 or 6 factories

Add a specific fraction for the replacement masses: 10% replacement mass.

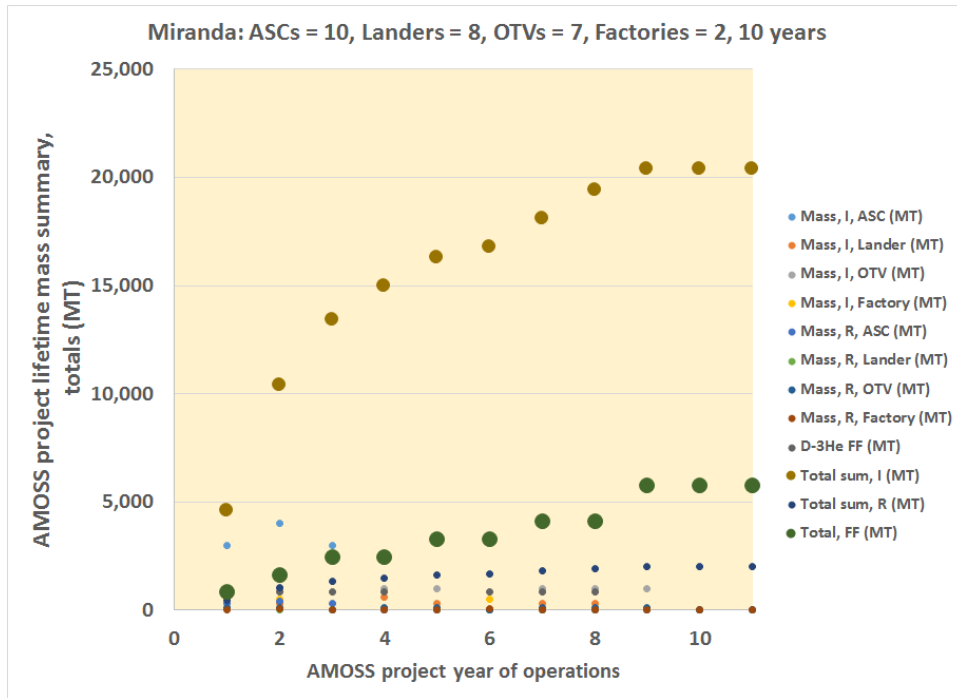


Figure 4. AMOSS – Miranda project lifetime mass requirements

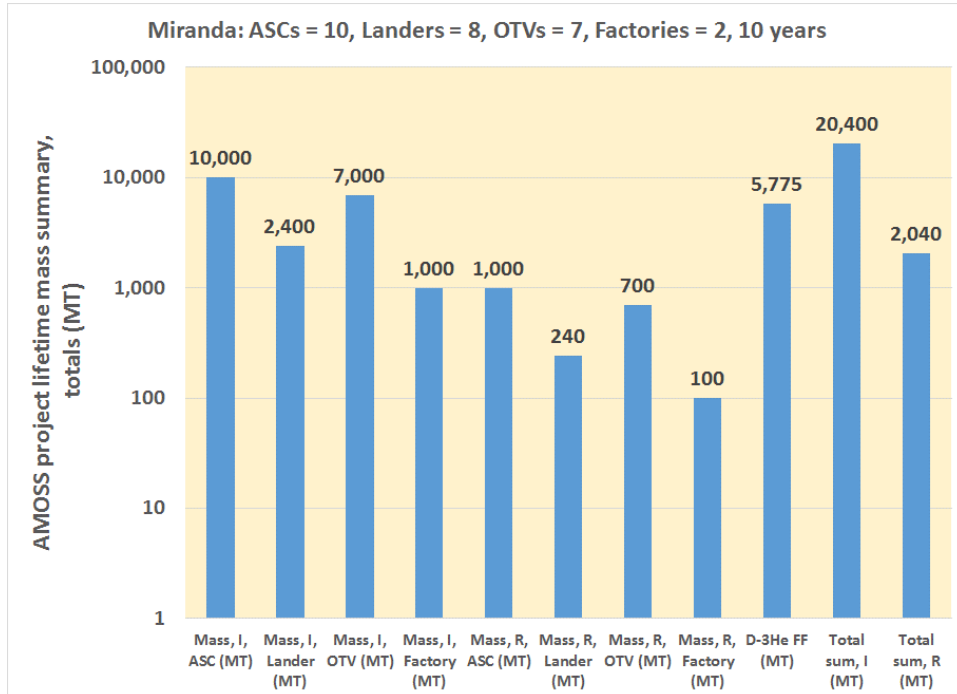


Figure 5. AMOSS – Miranda project lifetime mass elements

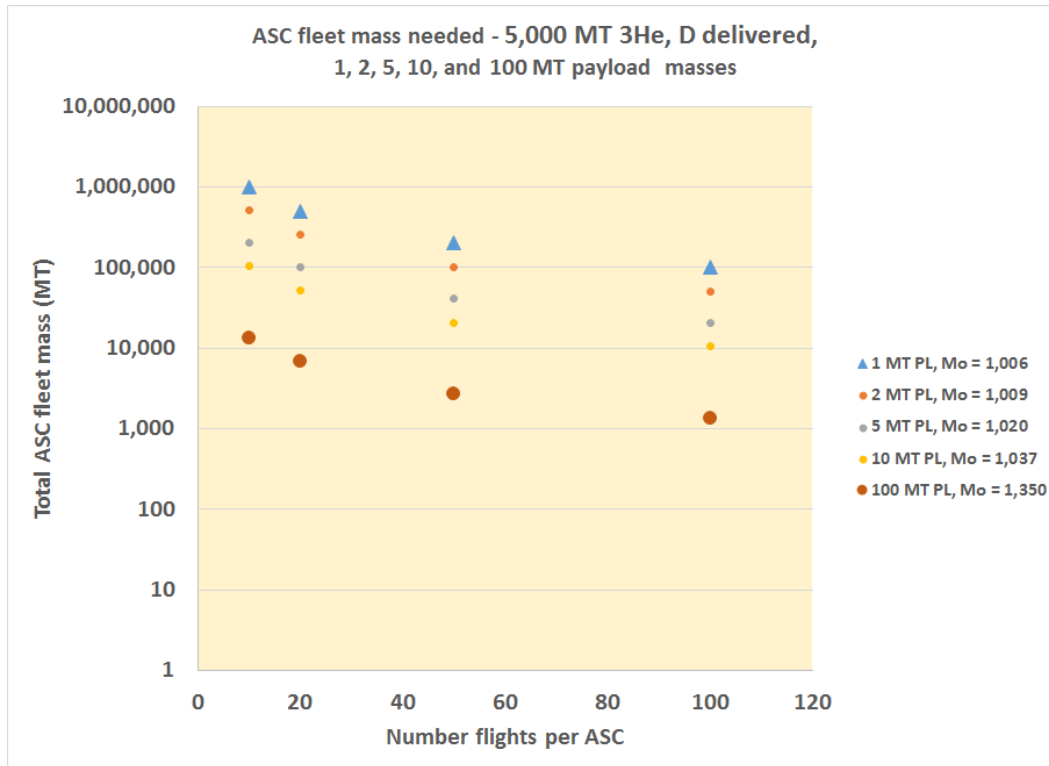


Figure 6. Aerospacecraft (ASC) fleet mass versus number of flights for ASC payloads of 1 to 100 MT; $I_{sp} = 1,800$ seconds, $M_{dry} = 300$ MT, $B = 0.02$ (Ref. 3)

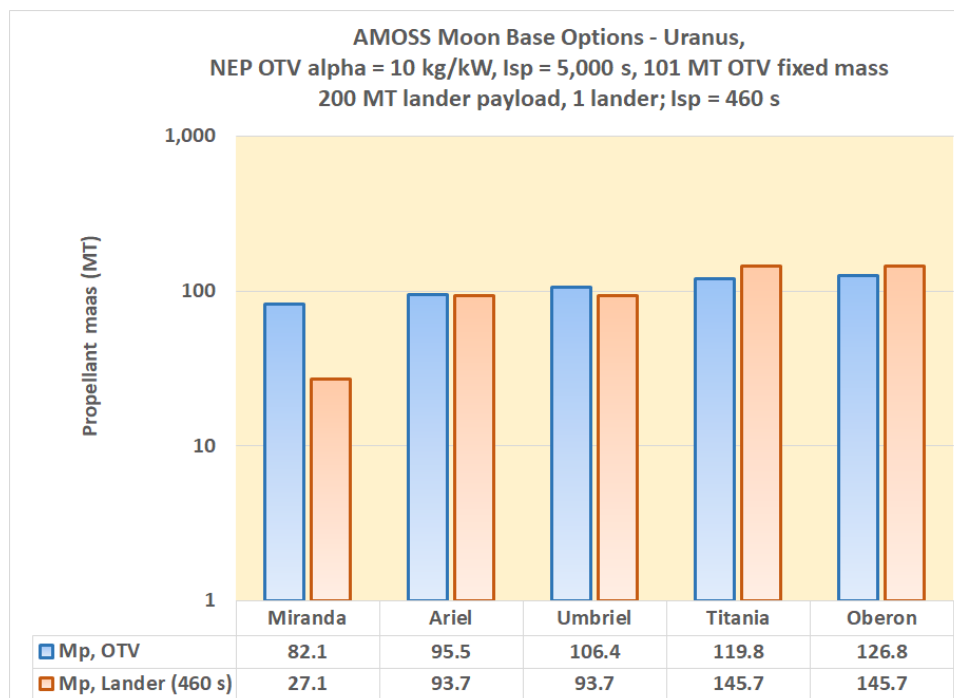


Figure 7. Propellant masses for Uranus AMOSS operations (Ref. 2)

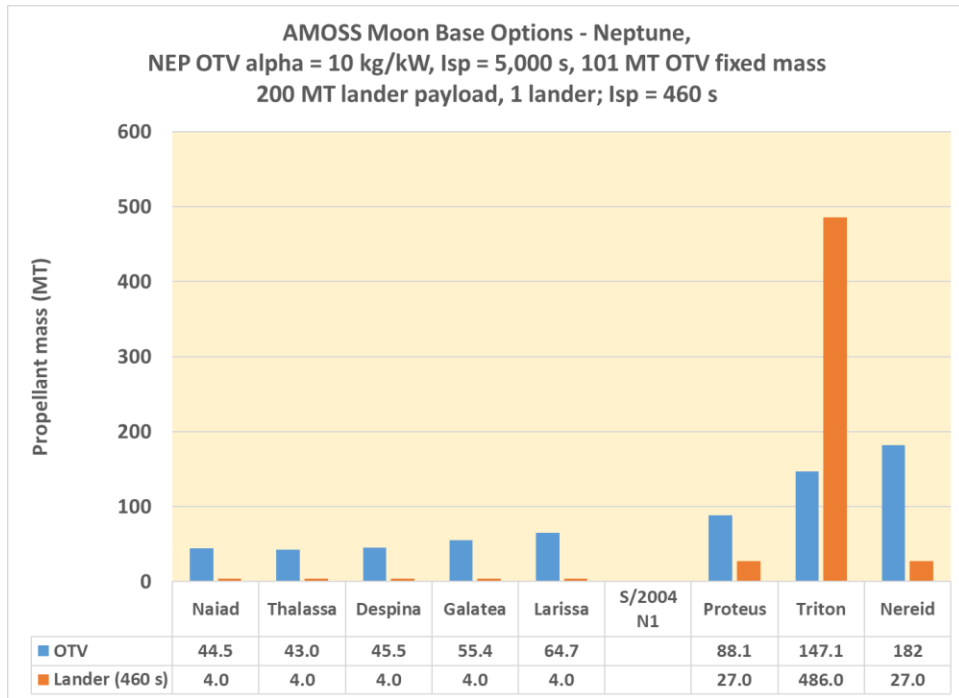


Figure 8. Propellant masses for Neptune AMOSS operations (Ref. 2)

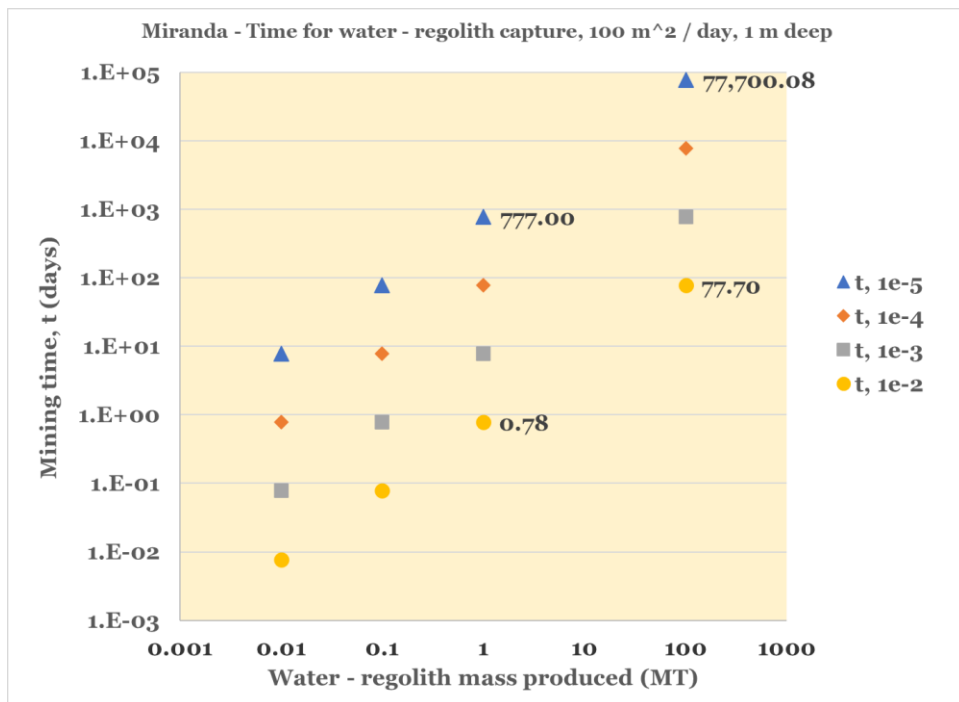


Figure 9A. Miranda water capture time at Uranus (Ref. 2)

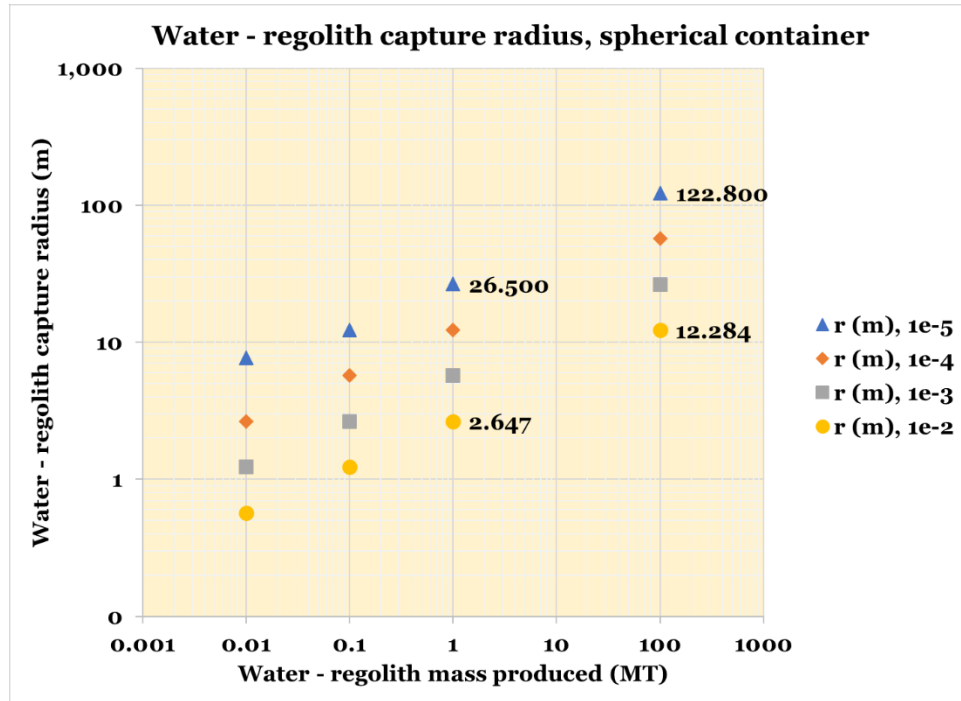


Figure 9B. Miranda water capture bag sizing at Uranus (Ref. 2)

V. Mining Architecture Parametrics and Implications

1. Lander parametrics

For the Miranda missions, the lander has been sized for a round trip payload of 200 MT. In some cases, it might be advantageous to have multiple landers deliver the same 200 MT to the surface. Figure 10 shows the masses of Miranda landers for a 50 MT and a 200 MT round trip payload. While 4 flights are needed for the 50 MT landers, the flexibility of having smaller landers may be advantageous. The 50 MT payload landers may be used as a rocket hopper for exploratory flights to other part of the outer planet moon.

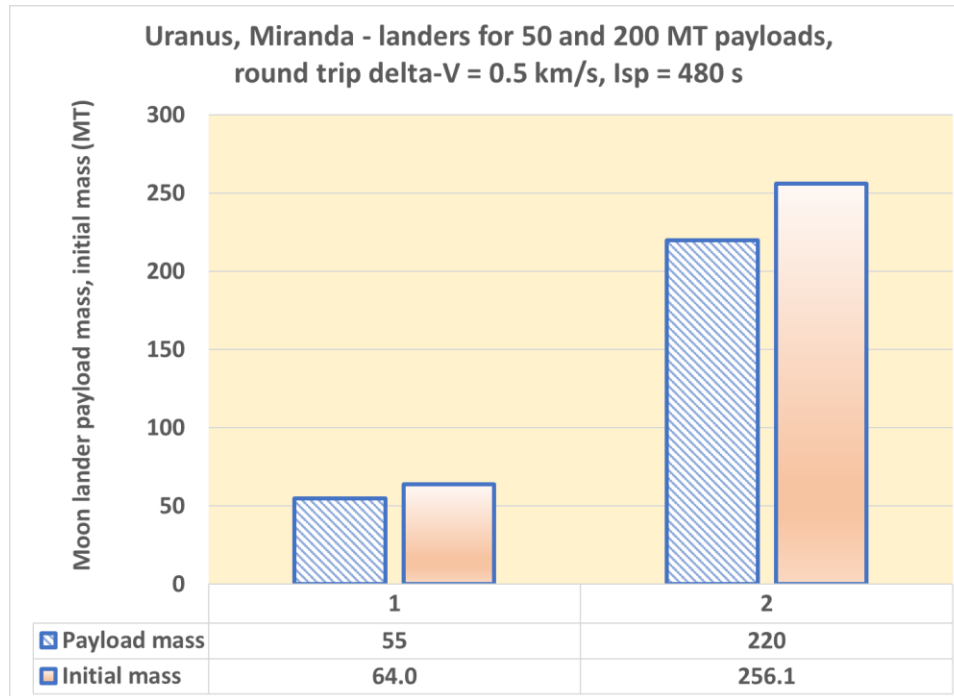


Figure 10. Landers for Miranda: 50 and 200 MT round trip payloads

Water ice mining on the outer planet moons will require several supporting machines on the moon itself. Analyses of the moons of Uranus have shown there is a large fraction of water ice there. Reference 1 noted the ice shell depths surrounding Uranus' moons were 100's of km. At Miranda, the ice shell was predicted to be 134 km. While the precise architecture is open to further analyses, the number of machines needed can be estimated. In this analysis, a machine may be a miner, hauler, or hopper to transfer the water ice to a refinery for purification. Figure 11 provides the number of machines that may be needed for mining 100 MT of water. The machine payload was varied from 0.1 to 100 MT. The water fraction in the mined moon regolith material was 75%. If the machine payload were 0.1 MT, the number of machines would be 1,134. For a 10 MT payload, the number of machines is 14. Further analyses will be needed to determine the precise number of machines needed.

Figures 12 and 13 depict the number of machines needed for several cases. In Figure 12, 4 cases are presented: water fractions of 0.99, 0.75, 0.05 and 0.01. Again the total mass of mined water is 100 MT. The machine payload is 10 MT. For the 0.99 and 0.75 water fraction cases, the number of machines is between 11 and 14. With the 0.05 water fraction case, 201 machines are required. Reducing the complexity of the mining architecture will always be important; thus, the mining machine number will need to be low, and the water fraction should be high. Once prospecting has been conducted on the outer planet moon, the best locations for mining with high water fractions will be identified. On the moon of Uranus, the water ice fraction analyses are very promising for reducing many aspects of the mining operational complexity.

In Figure 13, the number of machines for a broad range of water fractions is estimated. For water fractions of 0.8 and above, the number of machines is less than 13. For water mass fractions less than 0.2, the number of machines begins to exceed 50. At Miranda and the other moons of Uranus, the estimated water fractions are high (Ref. 1); again, it is desirable to find areas of high water fractions, and any moon mining locations will be assessed before beginning any extensive operations.

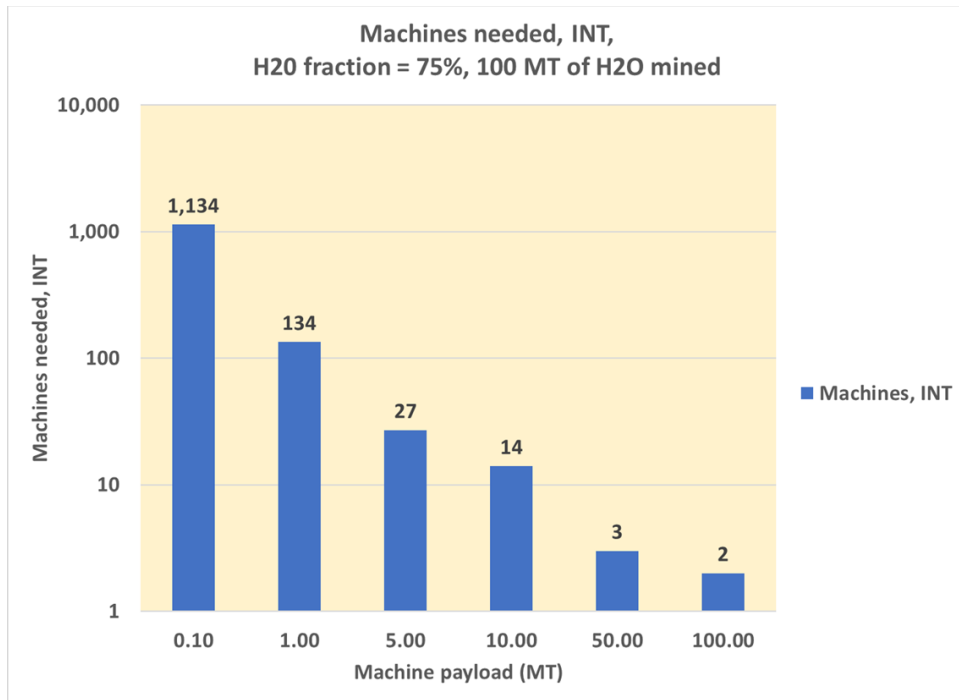


Figure 11. Machines needed versus machine payload mass

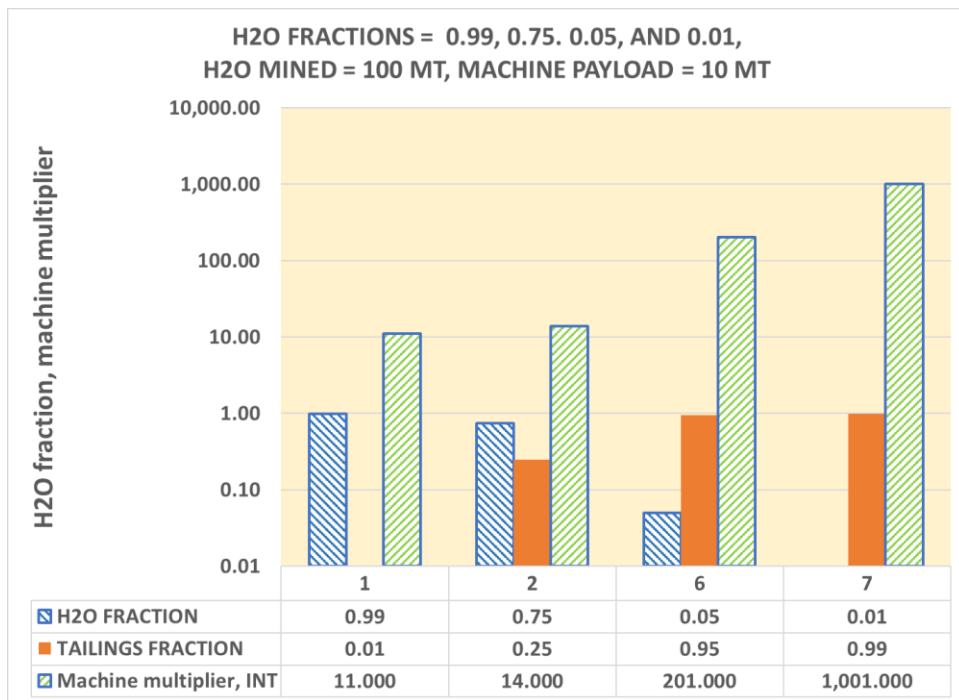


Figure 12. Water fraction, tailing fraction and machine multiplier: for water fractions of 0.99, 0.75, 0.05, and 0.01

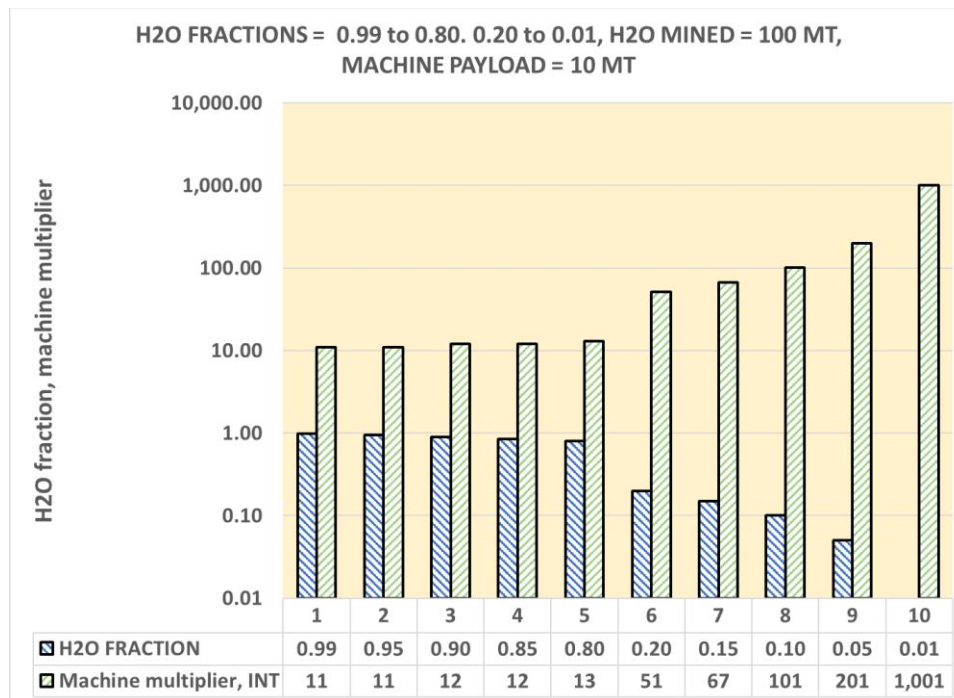


Figure 13. Water fraction and machine multiplier: for multiple water fractions

2. Mining parametrics.

To minimize the complexity of the mining process, the selection of the number of mining machines is also important. Very small payloads require a large number of machines or machine operations. Figures 14a and 14b note the number of payloads that are needed to mine 100 MT of water ice. Once the water ice fraction falls below 50 weight% the number of machines becomes very large. Also, the preferred payload for the machines is 10 MT or higher. With payloads below 10 MT, the number of machines is again very large.

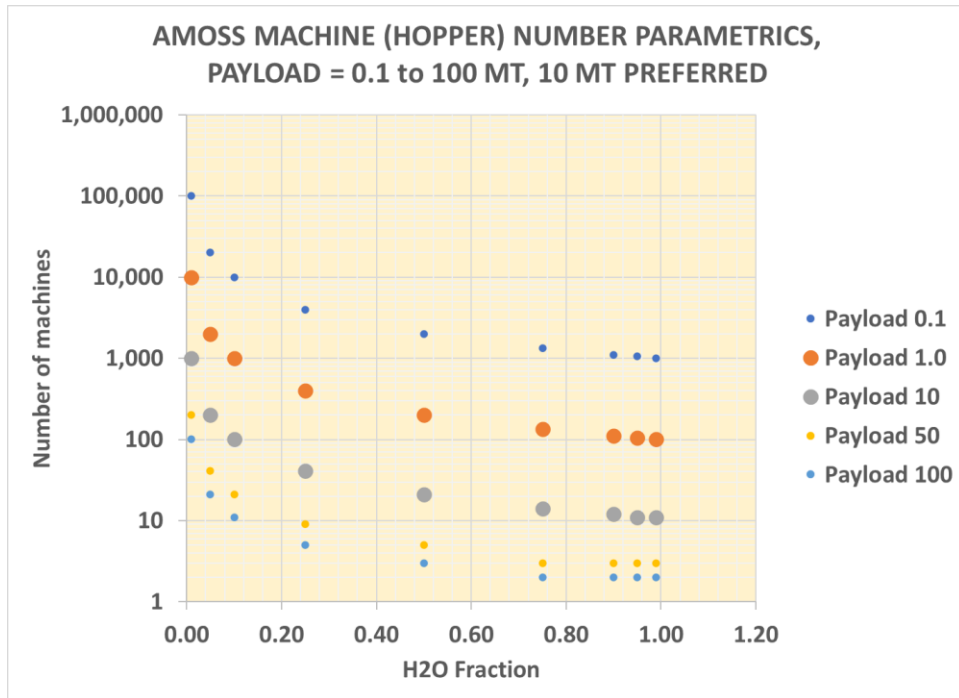


Figure 14a. Number of machines versus H2O mass fraction, 1 to 100 weight% H2O

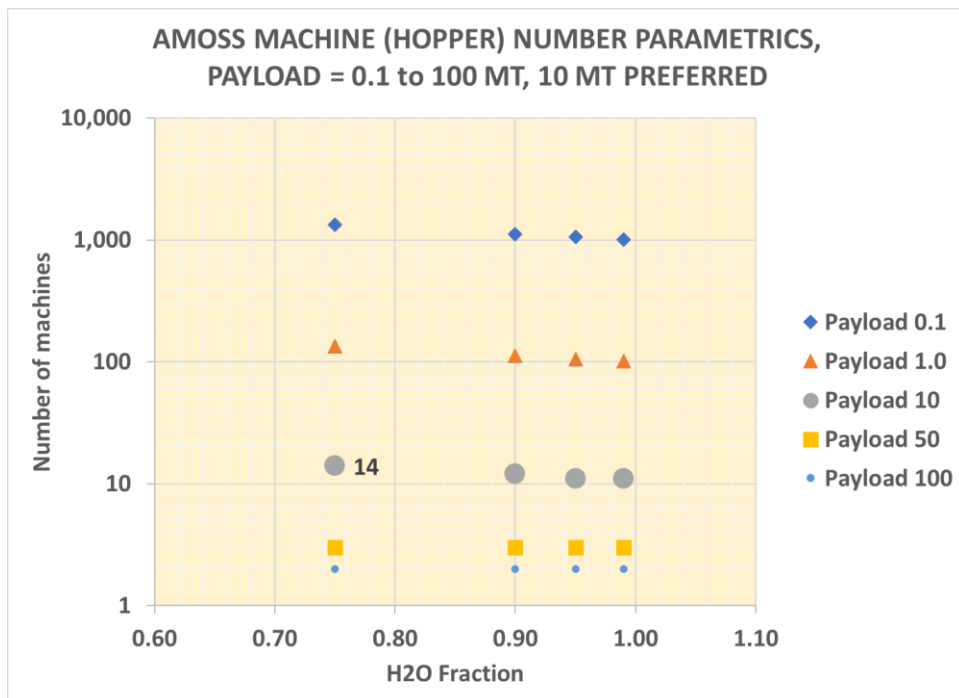


Figure 14b. Number of machines versus H2O mass fraction, 60 to 100 weight% H2O

3. Machine parametrics.

In the mining of water ice on the outer planet moons, a number of machines will be required. A 10 MT water-regolith payload has been selected for the mining process. With a 75 weight % ice concentration in the regolith, fourteen (14), 10 MT payloads would be carried to a processing factory.

The transportation of the 10 MT payloads will require several machines. Due to the low gravity of the outer planet moons, it is likely that the payloads will be transported by rocket hoppers. To transport the payload, there is a truck that carries the payload. The truck has a cooling system to maintain the payload at the required cryogenic temperature. The payload and the truck are carried aboard the rocket hopper. The hopper then transports the payload and the truck to the factory site. The payload would be offloaded and be processed. The water ice would be separated from the regolith and processed into oxygen and hydrogen propellants for the landers and hydrogen propellant for the inter-orbital OTVs. Figure 15 shows the total machine dry mass and gross liftoff weight (GLOW) versus the payload mass. The total dry mass includes the payload, the truck that stores the payload, the lander fixed dry mass and the tankage to store the lander propellants. The tankage factor B is 1.0; meaning the tankage mass is equal to the propellant mass. For a 10 MT payload, the GLOW is 38.4 MT.

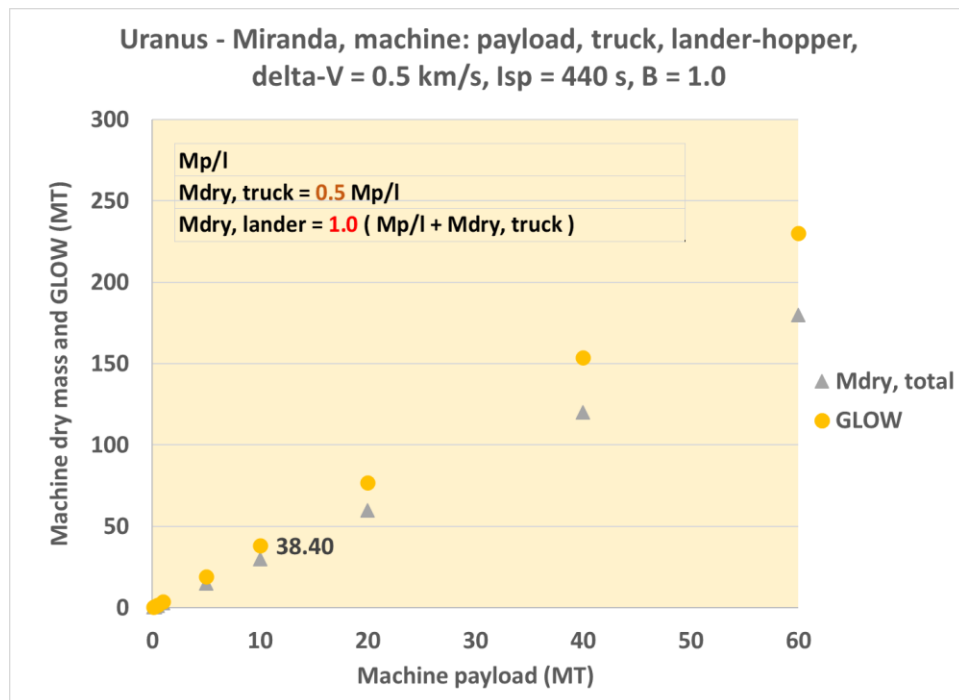


Figure 15. Machine dry mass and GLOW versus payload mass

VI. Concluding Remarks

Atmospheric mining in the outer solar system has many significant benefits. The use of ISRU in the outer solar system will entail wresting nuclear fuels from Uranus and or Neptune. Using outer planet moon bases for mining the propellants for OTVs and landers is an important option. Storing the AMOSS nuclear fuels away from the atmosphere will minimize the potential for unanticipated deorbiting of the orbiting storage facility. Using the moons for storage of the nuclear fuels and base of operations for OTV refueling is an excellent option. Though the gravity of these moons is much lower than that of Earth, that gravity will assist in any processes for mining and fuel processing. The 10 MWe power levels for the OTV seems best for providing a relatively short moon-to-planet trip time. The OTVs and landers will rendezvous near the escape condition of the small moon, shortening the trip time for the OTV (eliminating the need to spiral into low moon orbit). Larger landers (of 200 MT payloads) are more attractive than small landers, as the large landers require fewer flights to resupply the OTVs with fuel. The OTV trip times may be too long for effective use of the more distant outer planet moons. Moons that are closer to the planet may be required. Generally, the smaller moon closer to the planet are more mass efficient, requiring smaller OTV and smaller landers.

Both Uranus and Neptune transportation system mass estimates are presented. Of the five major moons of Uranus, the moons closest to the planet required the lowest transportation system mass. For Uranus, Miranda has the lowest transportation system mass. The lander mass has a strong influence on the overall mass. The result is similar for the 8 major moons of Neptune. The transportation system for Thalassa has the lowest overall mass of the 8 Neptune moon destinations. Thalassa is the moon with the lowest gravity, allowing the lander to be much smaller than any of the 4 cases. Therefore, increasing the lander Isp or using a moon with reduced gravity has a powerful effect on the overall mass. Reducing the NEP OTV reactor mass also has a strong influence on reducing the overall transportation system mass.

The transportation masses for all of the major moons of Uranus and Neptune were investigated. At both Uranus and Neptune, the smaller moons near the planet had the lowest transportation masses. While this is an important result, it is also critically important to address the need for additional gravity for processing of fuels and propellants. Centrifuges (or other equally effective technologies) to separate the water ice and rocky feed stocks from the outer planet moon's surface will likely be needed. The low gravity of the outer planet moons will not be sufficient to process the ISRU related materials and allow efficient production of OTV and lander propellants. All of the outer planet moons have such low gravity levels that some added artificial gravity to assist the ISRU processes will be very important for the overall architecture's success.

The overall architecture masses were estimated for a range of replacement schedules. The delivery schedules included a 6 to 7 year replacement schedule and addressed the major architecture components: the atmospheric mining ASCs, the OTVs, the landers, and the in-space factories. The use of artificial gravity space bases or centrifuges on the moon bases will very likely be required. The masses of the robotic in-space bases with artificial gravity were in the range of 143 to 461 MT. These added space base masses do not significantly increase the overall architecture masses, and they truly make the architecture more viable than one without artificial gravity.

The mining issues will be critical to making the mining architecture successful. Capturing the regolith-water ice mix and separating the water ice from the regolith are major challenges. Purification of the water ice and the resulting oxygen and hydrogen propellants will be a serious consideration.

Numerous machines will likely be needed for the mining of water ice. There will likely be machines for mining, hauling, and hoppers to transfer the water ice to a factory for purification and separation into oxygen and hydrogen. For a 100 MT water mining operation, if the water fraction is 75%, using a 10 MT payload machine,

approximately 14 machines will be needed. Based on past analyses, the water ice fraction on the moons of Uranus should be very high, making mining more efficient.

Further optimizations and creative usage of propulsion technologies will likely lead to great improvements in the transportation systems and reduce its cost and mass. The exploration of the outer planets and their ultimate use in powering future fusion powered space vehicles will allow unlimited options for solar system exploration, and ultimately, flight to the stars.

Appendix: Lander and OTV delta-V values

Tables A-I and A-II provide the delta-V needed for these round trips from the outer planet moon's surface to escape velocity for the moons of Uranus and Neptune, respectively. The landers depart the moon's surface to meet the OTV, transfer its propellant cargo, and then return to the surface for another flight. The delta-V values were computed with standard orbital mechanics equations. At Miranda, the round trip escape delta-V was 0.5 km/s for the lander mission. The delta-V included the escape velocity from the moon, for each leg of the round trip, and a 20% additional delta-V for gravity losses. For Titania, the moon's escape velocity is approximately 0.95 km/s (including gravity losses, uncertainties, etc.). The round trip delta-V was therefore 1.9 km/s. Each lander delta-V is assigned a sizing category. The category represents that highest delta-V in the range of delta-V values for the landers. For example, in the Uranus sizing category b, the landers for Ariel and Umbriel will be sized for the largest of the 2 delta-V values.

Tables A-III and A-IV list the round trip delta-V values for travel from Uranus to its moons and from Neptune to its moons, respectively. The delta-V values were computed with standard orbital mechanics equations. For Titania, the low-thrust round trip orbital delta-V would be 22.4 km/s, which includes the required plane change of 0.14 degrees. The lander that would rendezvous with an OTV would deliver 1.9 km/s (for the round trip flight). Thus, the rendezvous could occur near the escape conditions for the moon or at the lower orbital altitude. The OTV is sized to deliver 22.4 km/s (equal to a round trip flight to Titania from low Uranus orbit). For Neptune, the moons Thalassa and Triton were investigated. Thalassa required a round trip OTV delta-V of 9.4 km/s. The round trip lander delta-V was 80 m/s. For Triton, the round trip OTV mission required a delta-V of 26.2 km/s, and the round trip lander delta-V was 3.5 km/s.

Table A-I. Uranus Moon Lander delta-V Values

Moon	Round-trip delta-V (km/s)	delta-V Capability (km/s)	Sizing Category
Miranda (UV)	0.44	0.5	a
Ariel (UI)	1.34	1.4	b
Umbriel (UII)	1.24	1.3	b
Titania (UIII)	1.85	1.9	c
Oberon (UIV)	1.74	1.8	c

Table A-II. Neptune Moon Lander delta-V Values

Moon	Round-trip delta-V (km/s)	delta-V Capability (km/s)	Sizing Category
Naiad (NIII)	0.06	0.06	a
Thalassa (NIV)	0.08	0.08	a
Despina (NV)	0.13	0.14	b
Galatea (NVI)	0.17	0.18	b
Larissa (NVII)	0.19	0.19	b
S/2004 N1			
Proteus (NVIII)	0.44	0.50	c
Triton	3.49	3.50	d
Nereid	0.37	0.40	c

Table A-III. Uranus to Moon Orbital Transfer delta-V Values

	Planet to moon orbital transfer, low thrust delta-V		
	delta-V (km/s), 1 way	delta-V (km/s), 2 way	delta-V capability (km/s)
Miranda (UV)	8.216	16.432	16.5
Ariel (UI)	9.320	18.640	18.7
Umbriel (UII)	10.162	20.324	20.4
Titania (UIII)	11.180	22.360	22.4
Oberon (UIV)	11.675	23.350	23.4

Table A-IV. Neptune to Moon Orbital Transfer delta-V Values

	Planet to moon orbital transfer, low thrust delta-V		
	delta-V (km/s), 1 way	delta-V (km/s), 2 way	delta-V capability (km/s)
Naiad (NIII)	4.808	9.616	9.7
Thalassa (NIV)	4.675	9.350	9.4
Despina (NV)	4.950	9.900	9.9
Galatea (NVI)	5.860	11.720	11.8
Larissa (NVII)	6.720	13.440	13.5
S/2004 N1	too small		
Proteus (NVIII)	8.736	17.472	17.5
Triton	13.072	26.144	26.2
Nereid	15.269	30.538	30.6

VII. References

- 1) Palaszewski, B., "Atmospheric Mining in the Outer Solar System: Outer Planet Moon Ices, In-Situ Resource Utilization, and Moon Lander Propulsion," AIAA 2022-3600, August 2022.
- 2) Palaszewski, B., "Atmospheric Mining in the Outer Solar System: Outer Planet Moon Bases, Propulsion, In-Situ Resource Utilization, and Mining Implications," AIAA 2021-3600, August 2021.
- 3) Palaszewski, B., "Atmospheric Mining in the Outer Solar System: Aerospacecraft Analysis, Propulsion, and Resource Capturing Implications," AIAA 2020-3838, August 2020.
- 4) Palaszewski, B., "Atmospheric Mining in the Outer Solar System: Outer Planet Resource Processing, Moon Base Propulsion, and Vehicle Design Issues" AIAA 2019-4031, August 2019.
- 5) Palaszewski, B., "Atmospheric Mining in the Outer Solar System: Outer Planet In-Space Bases and Moon Bases for Resource Processing" AIAA 2017-4937, July 2017.
- 6) Palaszewski, B., "Atmospheric Mining in the Outer Solar System: Resource Capturing, Exploration, and Exploitation," AIAA 2013-3765, August 2013.
- 7) Palaszewski, B., "Atmospheric Mining in the Outer Solar System: Resource Capturing, Storage, and Utilization," AIAA 2012-3742, August 2012.
- 8) Palaszewski, B., "Atmospheric Mining in the Outer Solar System: Issues and Challenges for Mining Vehicle Propulsion," AIAA 2011-6041, August 2011.
- 9) Palaszewski, B., "Atmospheric Mining in the Outer Solar System: University Studies of Mining Vehicles and Propulsion," AIAA 2010-6573, August 2010.
- 10) Palaszewski, B., "Atmospheric Mining in the Outer Solar System: Mining Design Issues and Considerations," AIAA 2009-4961, August 2009.
- 11) Palaszewski, B., "Atmospheric Mining in the Outer Solar System: Orbital Transfer Vehicles and Outer Planet Moon Base Options," AIAA 2008-4861, July 2008.
- 12) Palaszewski, B., "Atmospheric Mining in the Outer Solar System: Mission Scenarios and Options for In-Situ Resource Utilization." AIAA 2007-5598, July 2007.
- 13) Palaszewski, B., "Atmospheric Mining in the Outer Solar System: Vehicle Sizing Issues." AIAA 2006-5222, July 2006.
- 14) R. Frisbee, "Advanced Space Propulsion for the 21st Century," Journal of Propulsion and Power, Vol. 19, No. 6, Nov-Dec 2003.
- 15) Dunn, Bruce P., "High-Energy Orbit Refueling for Orbital Transfer Vehicles," Journal of Spacecraft and Rockets Volume. 24, No. 6, 1987, pp. 518-522.
- 16) Noca, M.; Polk, J. E. "Ion Thrusters and LFAs For Outer Planet Exploration, " AAAF 6th International Symposium; Versailles; France, May 2002.
- 17) Hunt, James L., Laruelle, Gerard, Wagner, Alain, "Systems Challenges for Hypersonic Vehicles;" AGARD Interpanel Symposium on Future Aerospace Technology in Service to the Alliance, NASA-TM-112908, AGARD-Paper-C37, 1997.

- 18) Starr, Brett R.; Westhelle, Carlos H.; Masciarelli, James P., "Aerocapture Performance Analysis for A Neptune-Triton Exploration Mission," NASA/TM-2006-214300, April 2006.
- 19) Bussard, R., "ASPEN II: Two Staging and Radiation Shielding Effects on ASPEN Vehicle Performance," LA-26-80, 09/06/1967 and in "ASPEN: Nuclear Propulsion for Earth to Orbit Aerospace Plane Vehicles," Robert W. Bussard, Proceedings International Conference on Spaceflight, Rome. June 1971.
- 20) Bussard, R., and Jameson, L.W.; "The QED Engine Spectrum: Fusion-Electric Propulsion for Airbreathing to Interstellar Flight," AIAA paper 93-2006, 29th Joint Propulsion Conference, Monterey, CA 6/28 to 6/30/1993; in JPP, Volume 11, Number 2, pp 365/372.
- 21) Borowski, Stanley K.; Dudzinski, Leonard A.; and McGuire, Melissa L.: "Artificial Gravity Vehicle Design Option for NASA's Human Mars Mission Using "Bimodal" NTR Propulsion," AIAA Paper 99-2545, 1999.
- 22) Kendall, J. S.; Stoeffler, R. C., "Conceptual design studies and experiments related to cavity exhaust systems for nuclear light bulb configurations," Report Number: L-910900-15; NASA-CR-129298.
- 23) Latham, T. S.; Rodgers, R. J., "Small nuclear light bulb engines with cold beryllium reflectors," Report Number: AIAA PAPER 72-1093.
- 24) Latham, T. S., "Summary of the performance characteristics of the nuclear light bulb engine," Report Number: AIAA PAPER 71-642.
- 25) Rodgers, R. J.; Latham, T. S., "Analytical design and performance studies of the nuclear light bulb engine," Report Number: L-910900-16; NASA-CR-129295.
- 26) RONALD GREELEY, et al., "A Scientific Rationale for **Mobility** in Planetary Environments," Committee on Planetary and Lunar Exploration, National Research Council, NATIONAL ACADEMY PRESS, Washington, D.C. 1999.
- 27) Herbert, F. and Sandel, B.R., "Ultraviolet observations of Uranus and Neptune," Planetary and Space Science Vol. 47, pp. 1119 to 1139, Published by Elsevier Science Ltd.
- 28) Sromovsky, L.A., et al., "Episodic bright and dark spots on Uranus" Icarus, Vol. 220 (2012), pp. 6-22.
- 29) K.A. Rages, H.B. Hammel, A.J. Friedson, "Evidence for temporal change at Uranus' south pole," Icarus, Vol. 172 (2004), pp. 548-554).
- 30) L. A. Sromovsky and P. M. Fry, et al. "Coordinated 1996 HST and IRTF Imaging of Neptune and Triton III: Neptune's Atmospheric Circulation and Cloud Structure," Icarus, Vol. **149** (2001). pp. 459-488.
- 31) Turba, R.D., "DESIGN OF A NUCLEAR PROPULSION SYSTEM FOR AN UNMANNED AERIAL VEHICLE," Vanderbilt University, Masters Thesis, May 2011.
- 32) Maise, George; Powell, James; Paniagua, John; Ludewig, Hans; Todosow, Michael, "Exploration of Jovian atmosphere using nuclear ramjet flyer," IAF Paper 98-S608, 1998.
- 33) Borowski, S., "Human lunar mission capabilities using SSTD, ISRU and LOX-augmented NTR technologies - A preliminary assessment," AIAA 1995-0026, 1995
- 34) Robert H. Frisbee* and Ioannis G. Mikellides, "The Nuclear-Electric Pulsed Inductive Thruster (NuPIT): Mission Analysis for Prometheus," AIAA 2005-3892, July 2005.
- 35) Grundy, W.M., et al., "Distributions of H₂O and CO₂ ices on Ariel, Umbriel, Titania, and Oberon from IRTF /SpEx observations," Icarus, 184, (2006), 543-555.

36) Brown, M., et al., "Detection of water ice on Nereid," The Astrophysical Journal; 508, L175 to L176, December 1 1998.

37) J. GREEN, W. PILAND, "Impact of artificial gravity on habitability for space base," AIAA 7th Annual Meeting and Technical Display, AIAA 1970-1329, 1970.

38) R. A. WENGLARZ, "Problems in altitude control of artificial 'G' space stations with mass unbalance," Journal of Spacecraft and Rockets, 1970, Vol.7: pp. 1161-1166.