

NASA TECHNICAL NOTE



NASA TN D-3451

NASA TN D-3451

c.1

LOAN COPY: RETL  
AFSC (V/LIL)  
KIRTLAND AFB, N



TECH LIBRARY KAFB, NM

# PREDICTION OF PROPELLANT TANK PRESSURIZATION REQUIREMENTS BY DIMENSIONAL ANALYSIS

*by J. F. Thompson and M. E. Nein  
George C. Marshall Space Flight Center  
Huntsville, Ala.*





PREDICTION OF PROPELLANT TANK PRESSURIZATION  
REQUIREMENTS BY DIMENSIONAL ANALYSIS

By J. F. Thompson and M. E. Nein

George C. Marshall Space Flight Center  
Huntsville, Ala.

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

---

For sale by the Clearinghouse for Federal Scientific and Technical Information  
Springfield, Virginia 22151 - Price \$1.00



TABLE OF CONTENTS

	Page
SUMMARY . . . . .	1
INTRODUCTION. . . . .	1
DIMENSIONAL ANALYSIS OF TEST AND COMPUTER RESULTS . . . . .	1
Dimensionless Groups. . . . .	2
Curve Fit of Dimensionless Equation. . . . .	7
CONCLUSIONS. . . . .	11
REFERENCES. . . . .	14
BIBLIOGRAPHY. . . . .	14

## LIST OF ILLUSTRATIONS

Figure	Title	Page
1.	Comparison of Calculated and Measured Pressurant Mass for Various Test Parameters . . . . .	12
2.	The Effects of Various Design Parameters on the Mean Temperature at Cutoff. . . . .	13

## DEFINITION OF SYMBOLS

Symbol	Definition	
A	propellant tank wall surface area	ft <sup>2</sup>
A <sub>D</sub>	pressurant gas distributor area	ft <sup>2</sup>
J	dimensional constant	lb <sub>f</sub> ft/Btu
M <sub>w</sub>	pressurant molecular weight	lb <sub>m</sub> /lb mol
T <sub>a</sub>	ambient temperature	°R
T <sub>L</sub>	propellant temperature	°R
T <sub>m</sub>	ullage mean temperature at cutoff	°R
T <sub>o</sub>	pressurant inlet temperature	°R
V	propellant tank volume	ft <sup>3</sup>
V <sub>i</sub>	initial ullage volume	ft <sup>3</sup>
V <sub>L</sub>	propellant volumetric drain rate	ft <sup>3</sup> /sec
d <sub>w</sub>	wall thickness	ft
C <sub>p</sub>	pressurant specific heat	Btu/lb <sub>m</sub> °R
C <sub>pw</sub>	wall specific heat	Btu/lb <sub>m</sub> °R
g <sub>c</sub>	dimensional constant	$\frac{\text{lb}_m \text{ ft}}{\text{lb}_f \text{ sec}^2}$
h <sub>a</sub>	ambient heat transfer coefficient	Btu/sec ft <sup>2</sup> °R
k	pressurant thermal conductivity	Btu ft/sec ft <sup>2</sup> °R
p	ullage pressure	lb <sub>f</sub> /ft <sup>2</sup>
r	propellant tank characteristic radius (maximum radius for cylindrical tanks)	ft

## DEFINITION OF SYMBOLS (Concluded)

Symbol	Definition	
R	universal gas constant	$\text{lb}_f \text{ ft}/^\circ \text{R lb mol}$
$\alpha$	gas compressibility	(-)
$\mu$	pressurant viscosity, M/L	$\text{lb}_m/\text{ft sec}$
$\rho_w$	wall density, M/L <sup>3</sup>	$\text{lb}_m/\text{ft}^3$
$\theta$	time of pressurization	sec

# PREDICTION OF PROPELLANT TANK PRESSURIZATION REQUIREMENTS BY DIMENSIONAL ANALYSIS

## SUMMARY

Pressurant gas requirements for launch and space vehicles may be predicted by analytical models of the pressurization process. However, preliminary design studies require a fast and reasonably accurate method of predicting without resorting to computer programs. Therefore, dimensional analysis of a large number of pressurization tests and computer runs was applied to develop an equation that predicts pressurant requirements for cylindrical and spheroidal propellant tanks with an accuracy of  $\pm 10$  per cent.

## INTRODUCTION

Although the most accurate method of predicting pressurant requirements is with a computer program that has been verified by experiments, it is advantageous to have a fast, reasonably accurate method to determine the total mass of pressurant gas required without resorting to the computer. This type of analysis is necessary in comparison and optimization studies for preliminary design where the number of possibilities to be considered precludes a detailed computer analysis of each case. This report presents a single, general expression for the total required mass of pressurant. The expression was developed by dimensional analysis of the results of about 30 pressurization tests and 120 simulations on an IBM 7094 Computer.

## DIMENSIONAL ANALYSIS OF TEST AND COMPUTER RESULTS

The total mass of pressurant gas required is a function of the ullage mean temperature at cutoff derived with the gas equation of state,

$$W_{\text{Total}} = \frac{pVM_w}{\alpha RT_m} \quad (1)$$

Therefore, the total pressurant mass required may be calculated if the ullage mean temperature at cutoff can be determined. In the most general case, the ullage mean

---

NOTE: Mr. J. F. Thompson is Assistant Professor at Mississippi State University Aeronautical Engineering Department; he was formerly with MSFC.

temperature at cutoff will be a function of 12 system design variables, seven physical properties, the mechanical equivalent of heat, and the gravitational constant:

$$T_m = f(J, g_c, M_w, k, \mu, C_p, r, T_o, T_L, \theta_T, V, A, h_a, T_a, C_{pw}, \rho_w, d_w, p, V_i, \dot{V}_L, A_D) \quad (2)$$

The 19 variables can be expressed in six fundamental dimensions, length (L), mass (M), time ( $\theta$ ), temperature (T), heat (H), and force (F). The two dimensional constants,  $J$  and  $g_c$ , are included because heat and force can be expressed in terms of the other four dimensions. The dimensions of each variable are given in Table IV.

Since any equation representing physical phenomena must be dimensionally homogeneous, it must be possible to write equation (2) in a nondimensional form. Therefore, using  $\pi$  as a symbol for a dimensionless group, equation (2) may be written as follows:

$$\pi_1 = f(\pi_2, \pi_3, \dots, \pi_i) \quad (3)$$

where the group  $\pi_1$  contains the ullage mean temperature at cutoff.

According to Buckingham's theorem, the number of dimensionless groups in equation (3) is given by:

$$i = n - m \quad (4)$$

where  $n$  = number of variables

$m$  = maximum number of these variables which will not form a dimensionless group

The quantity  $m$  is often equal to the number of fundamental dimensions. The total number of variables in equation (2), including  $J$  and  $g_c$ , is 22, and the number of fundamental dimensions is six. By trial and error, it was determined that the maximum number of variables in this case that will not form a dimensionless group is indeed six, the number of fundamental dimensions. Therefore, according to equation (4) there will be 16 dimensionless groups in equation (3).

## Dimensionless Groups

Because the maximum number of variables that will not form a dimensionless group is six, the 16 dimensionless groups may be determined by choosing six variables to be common to all groups and, in turn, adding each of the remaining 16 variables to the first six to form 16 dimensionless groups. Although any six variables could be chosen as the six to be common to all groups, intuition leads to the choice of the two dimensional

constants ( $J$  and  $g_c$ ), the pressurant molecular weight ( $M_w$ ), thermal conductivity ( $k$ ), and viscosity ( $\mu$ ) and the propellant tank characteristic radius ( $r$ ). Adding the ullage mean temperature at cutoff ( $T_m$ ) to the six common variables yields the first group:

$$\pi_1 = J^a g_c^b M_w^c k^d \mu^e r^f T_m^g \quad (5)$$

Now, substituting the dimensions:

$$\left[ \pi_1 \right] = \left[ \frac{FL}{H} \right]^a \left[ \frac{ML}{F\theta^2} \right]^b \left[ M \right]^c \left[ \frac{H}{L\theta T} \right]^d \left[ \frac{M}{L\theta} \right]^e \left[ L \right]^f \left[ T \right]^g \quad (6)$$

Since the quantity on the left of equation (6) is dimensionless, the exponent of each of the six dimensions on the right must be zero. This condition determines six simultaneous equations,

$$\begin{aligned} [L] \quad 0 &= a + b - d - e + f \\ [M] \quad 0 &= b + c + e \\ [\theta] \quad 0 &= -2b - d - e \\ [T] \quad 0 &= -d + g \\ [H] \quad 0 &= -a + d \\ [F] \quad 0 &= a - b \end{aligned} \quad (7)$$

Simultaneous solution of these equations yields the following:

$$\begin{aligned} a &= g & d &= g \\ b &= g & e &= -3g \\ c &= 2g & f &= -4g \end{aligned}$$

Because the value of  $g$  is arbitrary, it can be taken as unity and yields the following:

$$\begin{aligned} a &= 1 & d &= 1 \\ b &= 1 & e &= -3 \\ c &= 2 & f &= -4 \end{aligned}$$

Substituting these values into equation (5) yields the first group  $\pi_1$ :

$$\pi_1 = \frac{J g_c M_w^2 k T_m}{\mu^3 r^4} \quad (8)$$

The second group  $\pi_2$  is found in the same manner by adding the pressurant specific heat  $C_p$  to the six common variables. Each of the remaining variables is added one at a time to the six common variables, and the remaining dimensionless groups are determined in the same manner as the first two. Then,

$$\pi_2 = \frac{C_p \mu}{k} \quad (9)$$

$$\pi_3 = \frac{J g_c M_w^2 k T_o}{\mu^3 r^4} \quad (10)$$

$$\pi_4 = \frac{J g_c M_w^2 k T_L}{\mu^3 r^4} \quad (11)$$

$$\pi_5 = \frac{\mu r \theta T}{M_w} \quad (12)$$

$$\pi_6 = \frac{V}{r^3} \quad (13)$$

$$\pi_7 = \frac{A}{r^2} \quad (14)$$

$$\pi_8 = \frac{C_{pw} \mu}{k} \quad (15)$$

$$\pi_9 = \frac{\rho_w r^3}{M_w} \quad (16)$$

$$\pi_{10} = \frac{d_w}{r} \quad (17)$$

$$\pi_{11} = \frac{V_i}{r^3} \quad (18)$$

$$\pi_{12} = \frac{g_c M_w p}{\mu^2 r} \quad (19)$$

$$\pi_{13} = \frac{h_a r}{k} \quad (20)$$

$$\pi_{14} = \frac{J g_c M_w^2 k T_a}{\mu^3 r^4} \quad (21)$$

$$\pi_{15} = \frac{M_w \dot{V}_L}{\mu r^4} \quad (22)$$

$$\pi_{16} = \frac{A_D}{r^2} \quad (23)$$

Now, the groups  $\pi_1$ ,  $\pi_4$ , and  $\pi_{14}$  may be divided by  $\pi_3$  with no loss of generality, because none of the 16 groups is eliminated in the process. Thus  $\pi_1$ ,  $\pi_4$ , and  $\pi_{14}$  may be replaced  $\pi'_1$ ,  $\pi'_4$ , and  $\pi'_{14}$ , respectively, where

$$\pi'_1 = \frac{\pi_1}{\pi_3} = \frac{T_m}{T_o}$$

$$\pi'_4 = \frac{\pi_4}{\pi_3} = \frac{T_L}{T_o}$$

$$\pi'_{14} = \frac{\pi_{14}}{\pi_3} = \frac{T_a}{T_o}$$

In the same manner, the group  $\pi_{11}$  may be replaced with  $\pi'_{11}$ , where

$$\pi'_{11} = \pi_{11} \pi_{12} = \frac{g_c M_w p V_i}{\mu^2 r^4} \quad (24)$$

This change occurs because the initial ullage mean temperature is proportional to the product  $pV_i$ .

It is possible to reduce the number of dimensionless groups necessary in this case by realizing that the wall specific heat, density, and thickness can enter the problem only in the combination  $C_{pw} \rho_w d_w$  which is the wall heat capacity per unit area. Therefore, the groups  $\pi_8$ ,  $\pi_9$ , and  $\pi_{10}$  may be combined into a single group  $\pi'_8$ .

$$\pi_8' = \pi_8 \pi_9 \pi_{10} = \frac{M_w k}{\mu r^2 (C_{pw} \rho_w d_w)} \quad (25)$$

Similarly, it is possible to combine  $\pi_{15}$  and  $\pi_{16}$ . Thus,

$$\pi_{15}' = \frac{\pi_{15}}{\pi_{16}} = \frac{M_w \dot{V}_L}{A_D \mu r^2} \quad (26)$$

Further, the propellant tank volume and wall surface area should enter the problem as the area-to-volume ratio ( $A/V$ ). Therefore, the group  $\pi_6$  and  $\pi_7$  may be combined into a single group  $\pi_6'$ .

$$\pi_6' = \frac{\pi_7}{\pi_6} = \frac{Ar}{V} \quad (27)$$

But since the approximate area-to-volume ratio is given by

$$\frac{A}{V} \cong \frac{2\pi r}{\pi r^2} = \frac{2}{r} \quad (28)$$

the group  $\pi_6'$  is nearly a constant and may be eliminated.

Finally, since the Prandtl number ( $\pi_2$ ) does not vary greatly, this group may also be dropped. Thus, the number of dimensionless groups necessary in equation (3) was reduced by six.

Since the propellant temperature is the lower limit of the ullage mean temperature, it is logical to replace all temperatures with temperature differences above the liquid propellant temperature ( $T_L$ ).

Equation (3) may now be expressed in terms of the following ten dimensionless groups (the group numbers have been changed to run from one to ten):

$$\pi_1 = \frac{T_m - T_L}{T_o - T_L} \quad (29)$$

$$\pi_2 = \frac{Jg_c M_w^2 k (T_o - T_L)}{\mu^3 r^4} \quad (30)$$

$$\pi_3 = \frac{T_o - T_L}{T_L} \quad (31)$$

$$\pi_4 = \frac{\mu r \theta_T}{M_w} \quad (32)$$

$$\pi_5 = \frac{M_w k}{\mu r^2 (C_{pw} \rho_w d_w)} \quad (33)$$

$$\pi_6 = \frac{g_c M_w p V_i}{\mu^2 r^4} \quad (34)$$

$$\pi_7 = \frac{g_c M_w p}{\mu^2 r} \quad (35)$$

$$\pi_8 = \frac{h r}{k} \quad (36)$$

$$\pi_9 = \frac{T_a - T_L}{T_o - T_L} \quad (37)$$

$$\pi_{10} = \frac{M_w \dot{V}_L}{A_D \mu r^2} \quad (38)$$

## Curve Fit of Dimensionless Equation

These ten dimensionless groups (equations 29 through 38) can be used to correlate the results of tests and computer runs according to equation (3). In most cases equation (3) would be written in the following form:

$$\pi_1 = \alpha \pi_2^\beta \pi_3^\gamma \pi_4^\delta \pi_5^\epsilon \pi_6^\xi \pi_7^\lambda \pi_8^\tau \pi_9^\sigma \pi_{10}^\zeta \quad (39)$$

However, in this case it is necessary to satisfy certain boundary conditions that cannot be satisfied by equation (39). The ullage mean temperature at cutoff must remain finite and not equal to zero as the ambient heat transfer approaches zero. This boundary condition cannot be satisfied by equation (39), but it can be satisfied if the functional dependence on  $\pi_8$  and  $\pi_9$  is exponential. Also, as the pressurant gas distributor Reynolds number  $\pi_{10}$  approaches zero, the heat transfer in the tank approaches free convection. Therefore,

the boundary condition of finite, non-zero mean temperature, when  $\pi_{10}$  is zero imposed, dictates an exponential functional dependence on  $\pi_{10}$ . Thus, these boundary conditions can be satisfied by writing equation (3) in the form

$$\pi_1 = \alpha_1 \pi_2^\beta \pi_3^\gamma \pi_4^\delta \pi_5^\epsilon \pi_6^\xi \pi_7^\lambda \left( e^{\alpha_2' \pi_8^\tau \pi_9} \right) \left( e^{\alpha_3' \pi_{10}} \right) \quad (40)$$

The coefficients and exponents in equation (40) were evaluated by a curve fit to the data from the computer runs and tests. It was found that the data could be correlated by this equation if the coefficients  $\alpha_1$  and  $\alpha_3$  in the exponentials were taken as functions of  $\pi_2$  and  $\pi_3$ :

$$\alpha_2' = \alpha_2 \pi_2^\omega \pi_3^\psi \quad (41)$$

$$\alpha_3' = \alpha_3 \pi_2^\phi \quad (42)$$

Equation (40) then becomes

$$\pi_1 = \alpha_1 \pi_2^\beta \pi_3^\gamma \pi_4^\delta \pi_5^\epsilon \pi_6^\xi \pi_7^\lambda \left( e^{\alpha_2 \pi_2^\omega \pi_3^\psi \pi_8^\tau \pi_9} \right) \left( e^{\alpha_3 \pi_2^\phi \pi_{10}} \right) \quad (43)$$

where all coefficients and exponents are constants.

It was convenient to divide several groups of equation (43) by powers of ten to obtain numbers more easily handled. Therefore, the final equation used in the curve-fit was

$$\pi_1 = \alpha_1 \left( \frac{\pi_2}{10^{14}} \right)^\beta \pi_3^\gamma \pi_4^\delta \pi_5^\epsilon \left( \frac{\pi_6}{10^{14}} \right)^\xi \left( \frac{\pi_7}{10^{14}} \right)^\lambda \left[ e^{\alpha_2 \left( \frac{\pi_2}{10^{14}} \right)^\omega \pi_3^\psi \left( \frac{\pi_8}{10^3} \right)^\tau \pi_9} \right] \cdot \left[ e^{\alpha_3 \left( \frac{\pi_2}{10^{14}} \right)^\phi \left( \frac{\pi_{10}}{10^5} \right)} \right] \quad (44)$$

From the curve-fit, the following values were obtained for the coefficients and exponents in equation (44):

$$\alpha_1 = 0.424 \quad \xi = 0.01416$$

$$\alpha_2 = 0.00210 \quad \lambda = 0.0620$$

$$\alpha_3 = -0.0292 \quad \omega = 0.415$$

$$\beta = -0.1322 \quad \psi = 1.174$$

$$\gamma = -0.1688 \quad \tau = 0.765$$

$$\delta = -0.1146 \quad \phi = 0.1510$$

$$\epsilon = 0.0780$$

Therefore, since  $\pi_1 = \frac{T_m - T_L}{T_o - T_L}$ , equation (44) becomes

$$\begin{aligned} \frac{T_m - T_L}{T_o - T_L} &= 0.424 \left( \frac{\pi_2}{10^{14}} \right)^{-0.1322} \left( \pi_3 \right)^{-0.1688} \left( \pi_4 \right)^{-0.1146} \\ &\cdot \left( \pi_5 \right)^{0.0780} \left( \frac{\pi_6}{10^{14}} \right)^{0.01416} \left( \frac{\pi_7}{10^{14}} \right)^{0.0620} \\ &\cdot \exp \left[ 0.00210 \left( \frac{\pi_2}{10^{14}} \right)^{0.415} \left( \pi_3 \right)^{1.174} \left( \frac{\pi_8}{10^3} \right)^{0.765} \left( \pi_9 \right) \right] \\ &\cdot \exp \left[ -0.0292 \left( \frac{\pi_2}{10^{14}} \right)^{0.1510} \left( \frac{\pi_{10}}{10^5} \right) \right] \end{aligned}$$

This equation is general and is capable of predicting the ullage mean temperature, and thus pressurant mass at cutoff within 10 percent for cylindrical tanks with rounded bulkheads. Figure 1 shows total pressurant requirements obtained by various investigators for a wide range of tank sizes and system parameters compared with the pressurant weights calculated by equation (44). Excellent agreement is obtained over the entire range of conditions for hydrogen and oxygen pressurization.\* However, the equation is limited in its application to conditions of constant ullage pressure, pressurant inlet temperature, and ambient heat transfer. The studies indicated that the equation is inaccurate at inlet temperatures less than 100° R above the saturation temperature, at ullage pressure below propellant saturation, and for very short expulsion times of less than 50 seconds. The restriction to cylindrical tanks can be removed by proper choice of the characteristic tank radius.

\* Evaluating the test results of Reference 1 by this method resulted in a large, but constant deviation from actual observed pressurant weight. This is probably because the test parameters such as heat leak through the vacuum chamber and pressurant inlet temperature had to be assumed. Additional information about these tests are required to re-evaluate these conditions.

Studies have shown that the characteristic tank radius for oblate spheroids, used in equation (44), should be about two-thirds of the maximum tank radius. This assumption is theoretically justified, because a cylinder having the same volume and surface area as an oblate spheroid has a radius equal to 0.63 times its maximum radius. Further test data and analytical studies are necessary to select the characteristic radius for other geometries.

Due to the dimensionless nature of equation (44), it is not restricted to any particular propellant, pressurant, or tank size as indicated in Figure 1. Although an un-insulated propellant tank was assumed in the development of this equation, Figure 1 shows good agreement with test results obtained with vacuum jacketed liquid hydrogen tanks.

To simplify the use of equation (44), the pressurant and propellant properties for the case of liquid oxygen pressurized by oxygen and liquid oxygen pressurized by helium were substituted in equation (44), and the following equations were obtained. Since these equations are dimensional they are applicable only to the case indicated. For liquid oxygen pressurized by oxygen,

$$\begin{aligned}
 \frac{T_m - 164}{T_o - 164} &= 3.33 (T_o - 164)^{-0.297} r^{0.1395} V_i^{0.01416} \\
 &\cdot (C_{pw} \rho_w d_w)^{-0.0780} p^{0.0762} \theta_T^{-0.1146} \\
 &\cdot \exp \left[ 0.001568 (T_o - 164)^{-0.304} r^{-0.895} h_a^{0.765} (T_a - 164) \right] \\
 &\cdot \exp \left[ -120.9 (T_o - 164)^{-0.574} r^{-2.604} \left( \frac{\dot{V}_L}{A_D} \right) \right] \quad (45)
 \end{aligned}$$

and for liquid oxygen pressurized by helium,

$$\begin{aligned}
 \frac{T_m - 164}{T_o - 164} &= 3.10 (T_o - 164)^{-0.304} r^{0.1395} V_i^{0.01416} \\
 &\cdot (C_{pw} \rho_w d_w)^{-0.078} p^{0.0762} \theta_T^{-0.1146}
 \end{aligned}$$

$$\begin{aligned}
& \cdot \exp \left[ 0.0000681 (T_o - 164)^{-0.1650} r^{-0.895} h_a^{0.765} (T_a - 164) \right] \\
& \cdot \exp \left[ -5.04 (T_o - 164)^{-0.443} r^{-2.604} \frac{\dot{V}_L}{A_D} \right] \quad (46)
\end{aligned}$$

The units of all variables in equations (45) and (46) must be those given in the Definition of Symbols. For other combinations of propellant and pressurant, equation (44) must be used. After the ullage mean temperature at cutoff is calculated, and using equation (44), (45), or (46), if applicable, the total mass of required pressurant gas may be calculated from equation (1).

In designing a launch or space vehicle pressurization system, vehicle parameters such as tank volume, engine flowrate, tank material, etc., determined by vehicle mission profile, are fixed input values. However, there are various controllable parameters in a pressurization system that can be used to optimize the system without affecting basic vehicle characteristics. The relative significance of various parameters on pressurant requirements has, therefore, been investigated under another study program. The results of these studies excerpted from reference 1 are presented in Figure 2. From a central origin, representing a reference condition (Saturn V, S-IC Stage) for all parameters, the increase (+Y) and decrease (-Y), of the ullage mean temperature at cutoff is shown as a function of variation of the parameters on the abscissa. The parameters were varied over a range expected for vehicle design. Thus, pressurant inlet temperature can increase or decrease by a factor of 2 from the reference condition, pressure by a factor of 3, tank radius by a factor of 2, expulsion time by a factor 3, etc. It was indicated that the pressurant inlet temperature exerts the greatest influence on the ullage mean temperature. Diminishing return of this effect did not exist within the range of investigation (530° R to 1200° R). The mean temperature increased as the ullage pressure was increased and also as the tank radius was increased. Increasing the tank wall thickness, heat capacity, or density caused decrease in the mean temperature. The pressurant distributor flow ( $A_D$ ) that controls the gas-to-wall forced convection heat transfer coefficient had a significant effect on the mean temperature when  $A_D$  was reduced, but no effect at all when flow area was increased. This indicates that the pressurant inlet velocity for the reference systems was chosen at an optimum point. Figure 2 also indicates that helium pressurant must be introduced into a tank at a temperature 1.1 times higher than oxygen pressurant to obtain the same ullage mean temperature.

## CONCLUSIONS

An equation derived by dimensional analysis provides a reasonably accurate method for prediction of pressurant requirements for cylindrical LOX and hydrogen propellant containers. This method is advantageous for preliminary design and optimization studies where the use of large computer programs becomes excessive in cost and time.

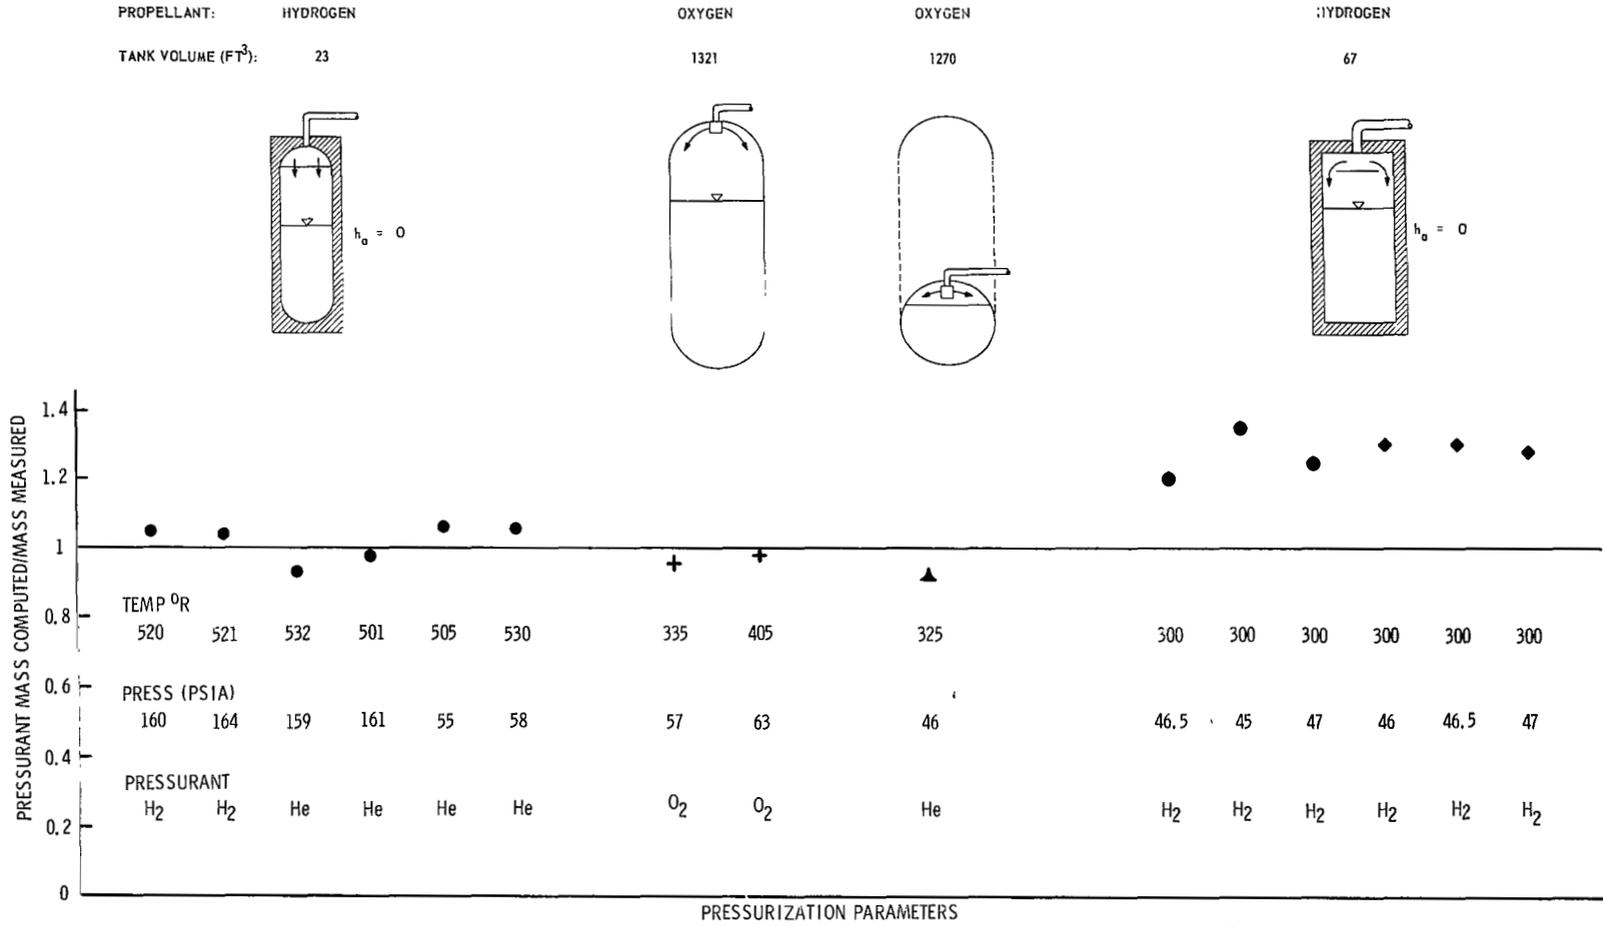


FIGURE 1. COMPARISON OF CALCULATED AND MEASURED PRESSURANT MASS FOR VARIOUS TEST PARAMETERS

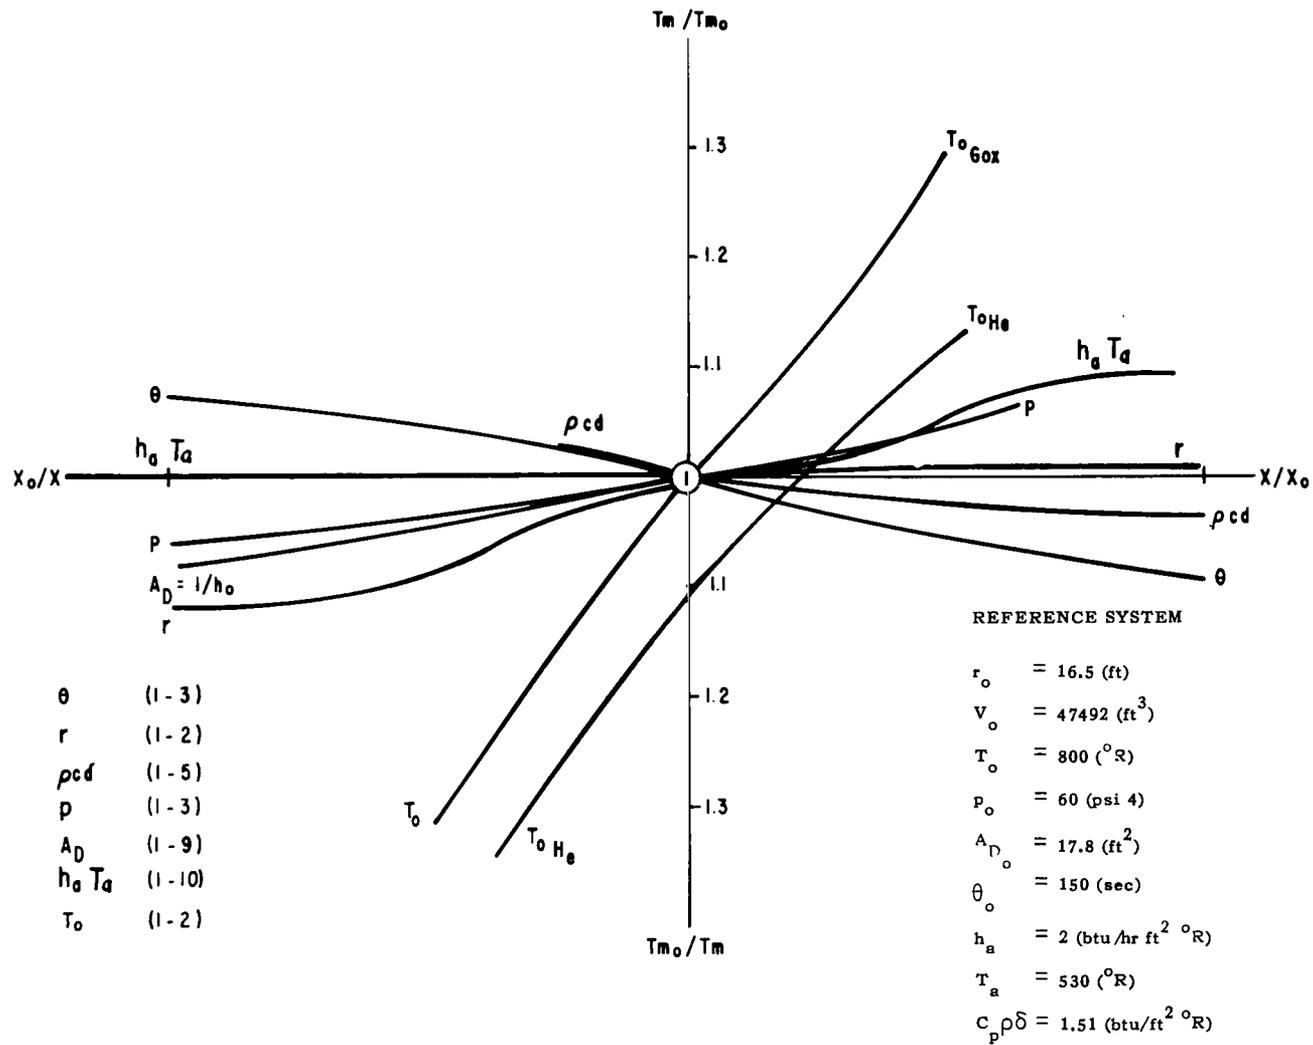


FIGURE 2. THE EFFECTS OF VARIOUS DESIGN PARAMETERS ON THE MEAN TEMPERATURE AT CUTOFF

## REFERENCE

1. Nein, M. E. and Thompson, Jr., J. F., Experimental and Analytical Studies of Cryogenic Propellant Tank Pressurant Requirements, NASA TM X-53165, 1965.

## BIBLIOGRAPHY

1. Coxe, E. and Tatum, John, Main Propellant Tank Pressurization System Study and Test Report, Lockheed - Georgia Company, Contract AF04(611)6087.
2. Hargis, J. H., Thermophysical Properties of Oxygen and Hydrogen, NASA MSFC Internal Note IN-R-P&VE-63-13, October 1963.
3. Johnson, V. J., A Compendium of the Properties of Materials at Low Temperature (Phase I) Part I Properties of Fluids, National Bureau of Standards Cryogenic Laboratory, July 1960.
4. Myers, J. E. and Bennet, C. O., Momentum, Heat and Mass Transfer, McGraw Hill, New York, 1962.
5. Scott, R. B., Cryogenic Engineering, D. Van Nostrand Company, Inc., Princeton, 1959.
6. Modification of Rocketdyne Tank Pressurization Computer Program, NASA MSFC Memorandum R-P&VE-PTF-64-M-83, 1964.
7. Atmospheric Heat Transfer to Vertical Tanks Filled with Liquid Oxygen, A. D. Little, Inc., Special Report No. 50. Contract AF04-(647)-130, November 1958.
8. Fortran Program for the Analysis of a Single Propellant Tank Pressurization System, Rocketdyne, Division of North American Aviation, Inc., R-3936-1, September 1963.
9. MSFC Test Laboratory Reports CTL 2, 36, 34, 37, and CTL Flash Reports dated August 17, November 20, and December 11, 1962.
10. SA-15 Static Test Report, Preliminary Summary Data, Confidential.
11. SA-5 Flight Data.
12. Results of Pressurization Tests on LH<sub>2</sub> Facility, NASA MSFC Memorandum R-P&VE-PE, M-526.

BIBLIOGRAPHY (Concluded)

13. S-IV Stage Pressurization Data, NASA MSFC Memorandum R-P&VE-PTF-64-M-38, 1964.

*"The aeronautical and space activities of the United States shall be conducted so as to contribute . . . to the expansion of human knowledge of phenomena in the atmosphere and space. The Administration shall provide for the widest practicable and appropriate dissemination of information concerning its activities and the results thereof."*

—NATIONAL AERONAUTICS AND SPACE ACT OF 1958

## NASA SCIENTIFIC AND TECHNICAL PUBLICATIONS

**TECHNICAL REPORTS:** Scientific and technical information considered important, complete, and a lasting contribution to existing knowledge.

**TECHNICAL NOTES:** Information less broad in scope but nevertheless of importance as a contribution to existing knowledge.

**TECHNICAL MEMORANDUMS:** Information receiving limited distribution because of preliminary data, security classification, or other reasons.

**CONTRACTOR REPORTS:** Technical information generated in connection with a NASA contract or grant and released under NASA auspices.

**TECHNICAL TRANSLATIONS:** Information published in a foreign language considered to merit NASA distribution in English.

**TECHNICAL REPRINTS:** Information derived from NASA activities and initially published in the form of journal articles.

**SPECIAL PUBLICATIONS:** Information derived from or of value to NASA activities but not necessarily reporting the results of individual NASA-programmed scientific efforts. Publications include conference proceedings, monographs, data compilations, handbooks, sourcebooks, and special bibliographies.

*Details on the availability of these publications may be obtained from:*

SCIENTIFIC AND TECHNICAL INFORMATION DIVISION  
NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

Washington, D.C. 20546