

NORTH ATLANTIC TREATY ORGANIZATION  
ADVISORY GROUP FOR AEROSPACE RESEARCH AND DEVELOPMENT  
(ORGANISATION DU TRAITE DE L'ATLANTIQUE NORD)

RECENT RESEARCH DIRECTED TOWARD THE PREDICTION  
OF LATERAL-DIRECTIONAL HANDLING QUALITIES

by

Lawrence W. Taylor, Jr  
Head, Systems Analysis Section,  
NASA Flight Research Center,  
Edwards, California, USA

and

Kenneth W. Iliff  
Research Engineer,  
NASA Flight Research Center,  
Edwards, California, USA

This Paper was presented at the Twenty-Eighth Meeting of the AGARD  
Flight Mechanics Panel, held in Paris, France, on 10-11 May 1966

## SUMMARY

A survey of lateral-directional handling qualities has been made for the purpose of developing a technique for predicting pilot ratings. This survey was made by obtaining pilot ratings of lateral control on a fixed-base simulator in conjunction with a color contact analog display. The effect of five lateral-directional handling qualities parameters were studied by systematically varying them over a wide range.

Forty-five charts comprise the results of this survey, however, these have been condensed into three charts to provide a rapid means for hand computing the pilot ratings. For more accurate predictions, a digital computer program was written which incorporated the data from all 45 charts.

Comparisons were made between predicted pilot ratings and those obtained in flight for several different airplanes. Although it is apparent that further extensions and improvements are needed to take into account some of the effects that were neglected in this study, such as mission, airplane type and use of rudders, it has been demonstrated that an extensive survey can be made and systematized in a way that enables it to be applied to a wide range of airplane configurations.

## RESUME

Une étude des caractéristiques de maniabilité latérale et directionnelle a été faite en vue de l'élaboration d'une méthode permettant de prédire les évaluations fournies par des pilotes. Cette étude a consisté à obtenir des pilotes, à l'aide d'un simulateur à base fixe, associé à une figuration analogique par contact en couleurs, des évaluations en ce qui concerne le contrôle latéral. En les faisant varier dans une large gamme, on a pu étudier l'influence de cinq paramètres des caractéristiques de maniabilité latérale et directionnelle.

Les résultats de cette étude sont contenus dans quarante-cinq cartes, résumés toutefois dans trois cartes pour fournir un moyen rapide de calcul manuel des évaluations de pilote. Pour des prédictions plus précises, un programme de calculateur digital a été établi reprenant les données figurant dans toutes les 45 cartes.

Des évaluations de pilote prédites ont été comparées à celles obtenues en vol pour plusieurs avions différents. Il apparaît que des extensions et améliorations supplémentaires seront nécessaires pour tenir compte de certains effets omis dans cette étude, tels que l'influence de la mission envisagée, du type d'avion et de l'utilisation de gouvernails; toutefois on a pu démontrer la possibilité de réaliser une étude approfondie et de la systématiser de manière à permettre son application à une large gamme de configurations d'avion.

533.6.013.413

<p>AGARD Report 531  North Atlantic Treaty Organization, Advisory Group  for Aerospace Research and Development  RECENT RESEARCH DIRECTED TOWARD THE PREDICTION  OF LATERAL-DIRECTIONAL HANDLING QUALITIES  Lawrence W. Taylor, Jr and Kenneth W. Iliff  1966  15 pp, incl. 16 refs. and 15 figs.</p> <p>A survey of lateral-directional handling qualities  has been made for the purpose of developing a  technique for predicting pilot ratings. This sur-  vey was made by obtaining pilot ratings of lateral  control on a fixed-base simulator in conjunction  with a color contact analog display. The effect  of five lateral-directional handling qualities  parameters were studied by systematically varying  them over a wide range.</p> <p style="text-align: right;">P. T. O.</p>	533.6.013.413	<p>AGARD Report 531  North Atlantic Treaty Organization, Advisory Group  for Aerospace Research and Development  RECENT RESEARCH DIRECTED TOWARD THE PREDICTION  OF LATERAL-DIRECTIONAL HANDLING QUALITIES  Lawrence W. Taylor, Jr and Kenneth W. Iliff  1966  15 pp, incl. 16 refs. and 15 figs.</p> <p>A survey of lateral-directional handling qualities  has been made for the purpose of developing a  technique for predicting pilot ratings. This sur-  vey was made by obtaining pilot ratings of lateral  control on a fixed-base simulator in conjunction  with a color contact analog display. The effect  of five lateral-directional handling qualities  parameters were studied by systematically varying  them over a wide range.</p> <p style="text-align: right;">P. T. O.</p>	533.6.013.413
<p>AGARD Report 531  North Atlantic Treaty Organization, Advisory Group  for Aerospace Research and Development  RECENT RESEARCH DIRECTED TOWARD THE PREDICTION  OF LATERAL-DIRECTIONAL HANDLING QUALITIES  Lawrence W. Taylor, Jr and Kenneth W. Iliff  1966  15 pp, incl. 16 refs. and 15 figs.</p> <p>A survey of lateral-directional handling qualities  has been made for the purpose of developing a  technique for predicting pilot ratings. This sur-  vey was made by obtaining pilot ratings of lateral  control on a fixed-base simulator in conjunction  with a color contact analog display. The effect  of five lateral-directional handling qualities  parameters were studied by systematically varying  them over a wide range.</p> <p style="text-align: right;">P. T. O.</p>	533.6.013.413	<p>AGARD Report 531  North Atlantic Treaty Organization, Advisory Group  for Aerospace Research and Development  RECENT RESEARCH DIRECTED TOWARD THE PREDICTION  OF LATERAL-DIRECTIONAL HANDLING QUALITIES  Lawrence W. Taylor, Jr and Kenneth W. Iliff  1966  15 pp, incl. 16 refs. and 15 figs.</p> <p>A survey of lateral-directional handling qualities  has been made for the purpose of developing a  technique for predicting pilot ratings. This sur-  vey was made by obtaining pilot ratings of lateral  control on a fixed-base simulator in conjunction  with a color contact analog display. The effect  of five lateral-directional handling qualities  parameters were studied by systematically varying  them over a wide range.</p> <p style="text-align: right;">P. T. O.</p>	533.6.013.413

Forty-five charts comprise the results of this survey, however, these have been condensed into three charts to provide a rapid means for hand computing the pilot ratings. For more accurate predictions, a digital computer program was written which incorporated the data from all 45 charts.

Comparisons were made between predicted pilot ratings and those obtained in flight for several different airplanes. Although it is apparent that further extensions and improvements are needed to take into account some of the effects that were neglected in this study, such as mission, airplane type and use of rudders, it has been demonstrated that an extensive survey can be made and systematized in a way that enables it to be applied to a wide range of airplane configurations.

This Paper was presented at the Twenty-Eighth Meeting of the AGARD Flight Mechanics Panel, held in Paris, France, on 10-11 May 1966.

Forty-five charts comprise the results of this survey, however, these have been condensed into three charts to provide a rapid means for hand computing the pilot ratings. For more accurate predictions, a digital computer program was written which incorporated the data from all 45 charts.

Comparisons were made between predicted pilot ratings and those obtained in flight for several different airplanes. Although it is apparent that further extensions and improvements are needed to take into account some of the effects that were neglected in this study, such as mission, airplane type and use of rudders, it has been demonstrated that an extensive survey can be made and systematized in a way that enables it to be applied to a wide range of airplane configurations.

This Paper was presented at the Twenty-Eighth Meeting of the AGARD Flight Mechanics Panel, held in Paris, France, on 10-11 May 1966.

Forty-five charts comprise the results of this survey, however, these have been condensed into three charts to provide a rapid means for hand computing the pilot ratings. For more accurate predictions, a digital computer program was written which incorporated the data from all 45 charts.

Comparisons were made between predicted pilot ratings and those obtained in flight for several different airplanes. Although it is apparent that further extensions and improvements are needed to take into account some of the effects that were neglected in this study, such as mission, airplane type and use of rudders, it has been demonstrated that an extensive survey can be made and systematized in a way that enables it to be applied to a wide range of airplane configurations.

This Paper was presented at the Twenty-Eighth Meeting of the AGARD Flight Mechanics Panel, held in Paris, France, on 10-11 May 1966.

Forty-five charts comprise the results of this survey, however, these have been condensed into three charts to provide a rapid means for hand computing the pilot ratings. For more accurate predictions, a digital computer program was written which incorporated the data from all 45 charts.

Comparisons were made between predicted pilot ratings and those obtained in flight for several different airplanes. Although it is apparent that further extensions and improvements are needed to take into account some of the effects that were neglected in this study, such as mission, airplane type and use of rudders, it has been demonstrated that an extensive survey can be made and systematized in a way that enables it to be applied to a wide range of airplane configurations.

This Paper was presented at the Twenty-Eighth Meeting of the AGARD Flight Mechanics Panel, held in Paris, France, on 10-11 May 1966.

## DISTRIBUTION

Copies of AGARD publications may be obtained in the various countries at the addresses given below.

On peut se procurer des exemplaires des publications de l'AGARD aux adresses suivantes.

BELGIUM BELGIQUE	Centre National d'Etudes et de Recherches Aéronautiques 11, rue d'Egmont, Bruxelles
CANADA	Director of Scientific Information Service Defence Research Board Department of National Defence 'A' Building, Ottawa, Ontario
DENMARK DANEMARK	Danish Defence Research Board Østerbrogades Kaserne, Copenhagen, Ø
FRANCE	O.N.E.R.A. (Direction) 25, Av. de la Division Leclerc Châtillon-sous-Bagneux (Seine)
GERMANY ALLEMAGNE	Zentralstelle für Luftfahrt-dokumentation und Information 8 München 27 Maria-Theresia-Str. 21 Attn: Dr. H.J. Rautenberg
GREECE GRECE	Greek National Defence General Staff B.JSG, Athens
ICELAND ISLANDE	Director of Aviation c/o Flugrad, Reykjavik
ITALY ITALIE	Ufficio del Delegato Nazionale all'AGARD Ministero Difesa - Aeronautica Roma
LUXEMBURG LUXEMBOURG	Obtainable through Belgium
NETHERLANDS PAYS BAS	Netherlands Delegation to AGARD Kluyverweg 1, Delft

NORWAY  
NORVEGE

Norwegian Defence  
Research Establishment  
Kjeller per Lilleström  
Attn: Mr. O. Blichner

PORUGAL

Delegado Nacional do 'AGARD'  
Direcção do Serviço de Material  
da Força Aérea  
Rua da Escola Politecnica, 42  
Lisboa

TURKEY  
TURQUIE

Ministry of National Defence  
Ankara  
Attn: AGARD National Delegate

UNITED KINGDOM  
ROYAUME UNI

Ministry of Aviation  
T.I.L.1,  
Block A,  
Station Square House,  
St.Mary Cray,  
Orpington, Kent

UNITED STATES  
ETATS UNIS

National Aeronautics and Space Administration  
(NASA)  
Washington, D.C. 20546



*Printed by Technical Editing and Reproduction Ltd  
Harford House, 7-9 Charlotte St. London. W.1.*

## CONTENTS

	Page
SUMMARY	ii
RESUME	ii
LIST OF FIGURES	iv
NOTATION	v
1. INTRODUCTION	1
2. APPROACH TO THE STUDY	1
3. DISCUSSION OF RESULTS	2
3.1 General Survey Results	2
3.2 Comparison of Predicted and Flight Ratings	4
4. CONCLUDING REMARKS	5
REFERENCES	5
FIGURES	7

## LIST OF FIGURES

		Page
Fig. 1	Lateral-directional parameters used in various handling-qualities studies	7
Fig. 2	Simulator used in the survey	7
Fig. 3	General effects of $\omega_\phi$ and $\omega_d$ on lateral-directional handling qualities	8
Fig. 4	Pilot-rating-prediction chart for moderate damping. $2\zeta_d\omega_d = 1$ ; $1/\tau_R = 4$ ; $ L_\beta  = 30$ ; $L_{\delta_a}(\delta_a)_{\max} = 10$	8
Fig. 5	Pilot-rating-prediction chart for very low damping. $2\zeta_d\omega_d = 0.025$ ; $1/\tau_R = 0.1$ ; $ L_\beta  = 30$ ; $L_{\delta_a}(\delta_a)_{\max} = 10$	9
Fig. 6	Summary charts for predicting pilot ratings. $\omega_\phi + \omega_d > 3$ ; $L_\beta > 10$	9
Fig. 7	Pilot-rating-prediction technique using a digital computer	11
Fig. 8	Comparison of the predicted and actual pilot ratings for the X-15 airplane with dampers off and ventral on at an angle of attack of approximately $6^\circ$	11
Fig. 9	Comparison of the predicted and actual pilot ratings for the X-15 airplane with dampers on and ventral on at an angle of attack of approximately $6^\circ$	12
Fig. 10	Comparison of the predicted and actual pilot ratings for the F-104 airplane with dampers off	12
Fig. 11	Comparison of the predicted and actual pilot ratings for the T-33 airplane	13
Fig. 12	Comparison of the predicted and actual pilot ratings for the 990 jet transport	13
Fig. 13	Comparison of the predicted and actual pilot ratings for the C-47 airplane	14
Fig. 14	Comparison of the predicted and actual pilot ratings for the Aero Commander airplane	14
Fig. 15	Ultimate goal of the pilot-rating-prediction method	15

## NOTATION

$b$	wing span, ft
$C_{l\beta}$	dihedral derivative
$C_{n\beta}$	directional-stability derivative
$d$	differential quantity
$F_{stick}$	stick force, lb
$L_{\beta}$	dimensional dihedral derivative, $1/sec^2$
$L_{\delta_a}$	roll acceleration due to lateral control, $1/sec^2$
$M$	Mach number
$N_p$	yawing acceleration due to rolling velocity, $1/sec^2$
$N_{\beta}$	dimensional directional-stability derivative, $1/sec^2$
$N_{\delta_a}$	yaw acceleration due to lateral control, $1/sec^2$
$N'_{\delta_a}$	yaw acceleration due to lateral control (stability axis), $1/sec^2$
$p$	rolling velocity, radians/sec
$p_{max}$	maximum rolling velocity, radians/sec
$s$	Laplace transform variable
$T_{1/2}$	time required for transient oscillation to damp to one-half amplitude, sec
$T_{\phi}$	time required to bank $\phi$ degrees, sec
$V$	velocity, ft/sec
$V_i$	indicated velocity, knots
$\alpha_0$	angle of attack of the principal X-axis, radians
$\beta$	sideslip angle, radians
$\beta_{max}$	maximum sideslip angle, radians
$\delta_a$	aileron deflection, radians
$(\delta_a)_{max}$	maximum aileron deflection, radians

$\delta_{\text{stick}}$	control-stick deflection, inches
$\zeta_d, \zeta_\psi$	damping ratio of Dutch roll oscillation
$\zeta_\phi$	damping ratio of numerator of roll-transfer function
$\tau_S$	spiral mode time constant, sec
$\tau_R$	roll mode time constant, sec
$\phi$	bank angle, radians
$\omega_d, \omega_\psi$	Dutch roll frequency, radians/sec
$\omega_\theta$	pitch frequency, radians/sec
$\omega_\phi$	frequency of numerator of the roll-transfer function, radians/sec

# RECENT RESEARCH DIRECTED TOWARD THE PREDICTION OF LATERAL-DIRECTIONAL HANDLING QUALITIES

Lawrence W. Taylor, Jr and Kenneth W. Iliff

## 1. INTRODUCTION

Understanding the relationships between the stability and control characteristics of airplanes and the pilot assessment of the handling qualities has proved to be a difficult and continuing problem. Although many investigators<sup>1-14</sup> have studied the effects of a multitude of parameters, such as those shown in Figure 1 for lateral-directional stability and control, advances in airplanes have increased the complexity of the problem, in particular, the lateral-directional modes of control. Consequently, the results of these independent investigations have not been fitted into a consistent framework of knowledge with broad applicability. As a guide, the preliminary designer is often forced to use results for a class of airplane different from that with which he is concerned because of the limited information available. Later in the design, after a configuration has been selected and tested in the wind tunnel, the designer probably would use a flight simulator to assess handling qualities. There is, however, a definite need for a quicker and more economical means of predicting the handling qualities of an airplane as early in the design phase as possible.

With this need in mind, the NASA Flight Research Center undertook a general study of lateral-directional handling qualities with the goal of developing criteria that are more generally applicable than those now available.

## 2. APPROACH TO THE STUDY

Many parameters influence lateral handling qualities; thus certain restrictions were necessary to make the study feasible. Considering the transfer function of bank-angle response to aileron deflection, as shown in the following equation, seven parameters are involved because of the seven independent coefficients in the numerator and denominator:

$$\frac{\phi(s)}{\delta_a(s)} = \frac{L_{\delta_a}(s^2 + 2\zeta_\phi\omega_\phi s + \omega_\phi^2)}{\left(s + \frac{1}{\tau_s}\right)\left(s + \frac{1}{\tau_R}\right)(s^2 + 2\zeta_d\omega_d s + \omega_d^2)}$$

However, with the usual restriction of neutral spiral stability which is usually adequate for all except low speeds, the number is reduced to 6. Also, the damping terms for both the numerator and denominator second-order factors and the roll damping are highly dependent on velocity. It follows that these parameters may be

considered to be dependent by making the roll damping proportional to  $2\zeta_d\omega_d$ , and  $2\zeta_\phi\omega_\phi$  equal to  $2\zeta_d\omega_d$ . With these additional restrictions, only four independent parameters remain to be considered in the bank-angle transfer function. The sideslip transfer function can be simplified to the following equation and the only additional parameter introduced is  $L_\beta$ :

$$\frac{\beta(s)}{\delta_a(s)} = \frac{-N'_{\delta_a}}{(s^2 + 2\zeta_d\omega_d s + \omega_d^2)} = \frac{L_{\delta_a}(\omega_d^2 - \omega_\phi^2)}{L_\beta(s^2 + 2\zeta_d\omega_d s + \omega_d^2)}$$

The parameter  $\omega_d$ , which appears in both transfer functions, is simply the Dutch roll natural frequency in radians per second and is related to the directional stability and dihedral parameters,  $N_\beta$  and  $L_\beta$ . The term  $\omega_\phi$  is the control-coupling parameter, which includes the roll-control derivatives  $L_{\delta_a}$  and  $N_{\delta_a}$ .

The effect of these five parameters on lateral-directional handling qualities was studied by utilizing the simple, direct approach of obtaining pilot ratings of lateral control on a fixed-base simulator (Fig.2) as the parameters were systematically varied over a wide range. A color contact analog or television display was used from which the pilot could interpret bank, heading, and sideslip angles. Instruments were also provided to give precise indications of bank, heading, and sideslip angles and also roll rate. Pilot evaluations were based on the following modified Cooper rating scale<sup>10,15</sup>:

<i>Numerical Rating</i>	<i>Category</i>	<i>Adjective Description within Category</i>
1 2 3	Acceptable and satisfactory	Excellent Good Fair
4 5 6	Acceptable but unsatisfactory	Fair Poor Bad
7 8 9	Unacceptable	Bad Very bad Dangerous
10	Unflyable	

### 3. DISCUSSION OF RESULTS

#### 3.1 General Survey Results

The results of the survey have the format shown in Figure 3; pilot ratings are presented as functions of  $\omega_\phi$  and  $\omega_d$ , with control power, damping, and dihedral effect as constant parameters. Where  $\omega_\phi$  is equal to zero, the coupling effect is

so severe that the airplane yaws and banks but does not continue to roll. Where  $\omega_\phi$  equals  $\omega_d$  along the diagonal, essentially no sideslip is induced. This condition is usually the most desirable. Values of  $\omega_\phi$  exceeding  $\omega_d$  cause sideslip to be induced in such a manner that the pilot tends to augment the Dutch roll oscillation while attempting to stabilize bank angle. Extreme ratios of  $\omega_\phi$  to  $\omega_d$  make control impossible.

Figure 4 is an example of the 45 plots that comprise the results of the survey. Note that the constant pilot-rating contours are radial lines for  $\omega_\phi + \omega_d$  greater than 3.0, thus making it possible to speak of the more familiar ratio  $\omega_\phi/\omega_d$ . Usually, a ratio of  $\omega_\phi/\omega_d$  equal to 1.0 is most favorable, with smaller ratios resulting in adverse yaw and roll sluggishness and ratios greater than 1.0 resulting in favorable yaw and pilot-induced oscillations. For this case of moderate damping, the pilot ratings are not particularly sensitive to small changes in the ratio of  $\omega_\phi$  to  $\omega_d$ . Figure 5 shows an identical set of characteristics except for much less damping. In this instance, an  $\omega_\phi/\omega_d$  ratio of only 1.1 is uncontrollable. A comparison of the two figures shows the marked effect of damping on a pilot's acceptance of control coupling of the type that causes pilot-induced lateral-oscillation tendencies.

Although it would be possible to use these plots to predict lateral-directional pilot ratings by interpolating between charts for a particular application, the procedure would be tedious and time-consuming. To provide a more rapid means for hand-computing the pilot ratings, much of the information in the full set of charts has been reduced to the three summary charts in Figures 6(a) to 6(c). Lines of constant pilot ratings are presented as a function of the ratio of  $\omega_\phi/\omega_d$  and lateral control power for the restricted ranges of  $\omega_\phi$  plus  $\omega_d$ , and  $L_\beta$ , and for a given level of damping. Several generalizations can be made about the results shown. First, for all but the lower values of control power  $L_{\delta_a}(\delta_a)_{\max}$ , the most favorable pilot ratings occur when  $\omega_\phi$  equals  $\omega_d$ . For the very low and vanishing levels of control power, favorable sideslip, indicated by  $\omega_\phi/\omega_d > 1.0$ , is preferred, since it compensates to a degree for the very sluggish roll response. This trend is especially evident for the highest level of damping. For very large values of control power, the extreme sensitivity precludes satisfactory ratings even for  $\omega_\phi/\omega_d$  equal to 1.0. Increased damping would result in more favorable pilot ratings, however.

The summary charts of Figure 6 can be used to predict lateral-directional pilot ratings by interpolating between the appropriate charts. In the event that a rating greater than 10 is indicated by one of the charts, an extrapolated value greater than 10 should be used in the interpolation between charts. Best results can be obtained, however, when the data for the full set of 45 charts have been mechanized in a digital-computer program. Such a program now in use at the Flight Research Center is illustrated by the block diagram in Figure 7. As shown, information in the 45 plots of the pilot-rating survey and several sets of airplane characteristics, stability derivatives, moments of inertia, and the like are fed into a digital computer. The digital computer then computes the dimensional stability derivatives and numerous parameters of interest and predicts pilot ratings by interpolating over the five parameters of the survey. The greatest value of these predictions is that a large number of airplane configurations and flight conditions can be assessed quickly and at little cost. This feature is particularly important to the preliminary designer and the flight-test engineer.

### 3.2 Comparison of Predicted and Flight Ratings

The method described has been used successfully as an aid during the design of controls for a lifting-body research vehicle. However, the results obtained are considered to be preliminary. For significance, the computed pilot ratings must compare well with those obtained in flight or from a flight simulator. At present, the method is being tested by comparing the predicted pilot ratings with ratings obtained in flight for many different aircraft. Although the rudder was not used in the subject simulator survey, there was no restriction on its use during the flight investigations for which comparative pilot ratings are presented herein.

In Figure 8, predicted pilot ratings of the X-15 airplane are compared with actual pilot ratings from flight and the X-15 flight simulator. The comparison is for the airplane with the lower ventral stabilizer on and the dampers off. The predicted pilot ratings do well to show not only the general trends with Mach number but also the average levels, except at a Mach number of 3.5. A discrepancy of the magnitude shown can easily exist when a situation such as this borders on being uncontrollable because of pilot-induced oscillations. In this instance, small differences in damping or the ratio  $\omega_p/\omega_d$  can result in large differences in pilot rating. In Figure 9, the correlation of the ratings for the X-15 with dampers on is good; the predicted ratings are only slightly more favorable than the average ratings from flight and simulator. Additional comparisons of flight, simulator, and predicted pilot ratings are made in Reference 16.

In Figure 10, flight and predicted ratings are compared for the F-104 airplane with all dampers off. The correlation is good at the high Mach numbers, but the predicted ratings are optimistic at the lower Mach numbers. The discrepancy of about 2.5 rating units at a Mach number of 0.9 warrants further investigation.

Ratings are compared in Figure 11 for the T-33 airplane. Again, the predicted pilot ratings are more favorable; the difference between the predicted and flight ratings is about 1.5 units at the higher speeds. Predicted pilot ratings that are usually optimistic would indicate that possibly some other effect not duplicated in the prediction method, such as control-stick friction, might be influencing the pilot ratings in flight. Uncertainty of the aerodynamic and mass characteristics of the airplane would also cause an apparent error in the predicted pilot ratings.

The comparison shown in Figure 12 is for a different class of airplane, the 990 jet transport. Although flight pilot ratings are available from only one pilot, correlation of the predicted pilot ratings with those obtained in flight is good. This agreement is somewhat surprising, since no consideration is given to airplane type in the prediction technique. Figure 13 shows a similar comparison for a transport airplane that has seen many years of service, the C-47. The gradual trend in pilot rating with airspeed was predicted, but the level predicted is about 2.5 units less favorable than that indicated by the average flight ratings. One reason for the discrepancy is that the use of the rudder was not permitted in the survey on which the predictions are based; whereas, the rudder is effective on the C-47 in counteracting adverse yaw and was used in flight. It is evident, in this case, that the effect of the use of rudders is a needed extension to the present pilot-rating-prediction method.

In Figure 14, pilot ratings from flight are compared with those predicted for a light transport, the Aero Commander. As shown, the overall level of pilot rating was predicted fairly accurately, being pessimistic by about 1 unit at the higher speeds.

#### 4. CONCLUDING REMARKS

Although this technique of predicting pilot ratings has met with some success, it is apparent that improvements are needed. The effects of rate coupling, mission and airplane type, controller friction and forces, the use of rudders, and the size of the pilot's display all need to be considered in a more sophisticated form of pilot-rating-prediction technique. Perhaps more important than the results shown for the present form of the technique is the demonstration that such an extensive survey can be made and systemized in a way that enables it to be applied to a wide range of airplane configurations. If extensions and improvements in the method can continue to be made, the capability indicated in Figure 15 may someday be available. Predicted pilot ratings will be computed as a function of the airplane dynamics, mission, and display as well as the controller characteristics and motion effects for each mode of control. As such a capability is developed, the designer, the writer of specifications, and the flight-test engineer will have a tool that becomes more accurate and more inclusive as the technique is improved.

#### REFERENCES

1. Kauffman, William M.  
et al. *An Apparatus for Varying Effective Dihedral in Flight with Application to a Study of Tolerable Dihedral on a Conventional Fighter Airplane.* NACA Report 948, 1949.
2. Liddell, Charles J., Jr  
et al. *A Flight Study of Requirements for Satisfactory Lateral Oscillatory Characteristics of Fighter Aircraft.* NACA RM A51E16, 1951.
3. Moore, Norton B. *Artificial Stability Flight Tests of the XF-88A Airplane.* WADC Technical Report 52-298, Wright Air Development Center, Wright-Patterson Air Force Base, US Air Force, July 1954. (Available from ASTIA as AD 49024.)
4. McNeil, Walter E.  
Vomaske, Richard F. *A Flight Investigation to Determine the Lateral Oscillatory Damping Acceptable for an Airplane in the Landing Approach.* NASA Memo 12-10-58A, 1959.
5. Creer, Brent Y.  
et al. *A Pilot Opinion Study of Lateral Control Requirements for Fighter-Type Aircraft.* NASA Memo 1-29-59A, 1959.
6. Crone, Robert M.  
A'Harrah, Ralph C. *A New Modified Acceptance Criterion for Lateral-Directional Flying Qualities.* Aerospace Engineering, Vol. 19, Sept. 1960, pp. 24-29.

7. Palmer, W.E. *A Flight Simulator Study of the Lateral-Directional Stability Requirements of Piloted Air Vehicles.* Report NA-61H-241, North American Aviation, Inc., March 1961.
8. Vomaske, Richard F. et al. *The Effect of Lateral-Directional Control Coupling on Pilot Control of an Airplane as Determined in Flight and in a Fixed-Base Flight Simulator.* NASA TN D-1141, 1961.
9. Kidd, Edwin A.  
Harper, Robert P., Jr *Fixed-Base and In-Flight Simulations of Longitudinal and Lateral-Directional Handling Qualities for Piloted Re-Entry Vehicles.* ASD-TDR-61-362, Aeronautical Systems Division, Wright-Patterson Air Force Base, US Air Force, Feb. 1964.
10. Harper, Robert P., Jr *In-Flight Simulation of the Lateral-Directional Handling Qualities of Entry Vehicles.* WADD Technical Report 61-147, Aeronautical Systems Division, Wright-Patterson Air Force Base, US Air Force, Nov. 1961.
11. Ashkenas, Irving L.  
McRuer, Duane T. *The Determination of Lateral Handling Quality Requirements from Airframe-Human Pilot System Studies.* WADC Technical Report. 59-135, Wright Air Development Center, Wright-Patterson Air Force Base, US Air Force, June 1959.
12. Durand, T.S.  
Jex, H.R. *Handling Qualities in Single-Loop Roll Tracking Tasks: Theory and Simulator Experiments.* ASD-TDR-62-507, Aeronautical Systems Division, Wright-Patterson Air Force Base, US Air Force, Nov. 1962.
13. Taylor, Lawrence W., Jr *Analysis of a Pilot-Airplane Lateral Instability Experienced with the X-15 Airplane.* NASA TN D-1059, 1961.
14. Taylor, Lawrence W., Jr  
Day, Richard E. *Flight Controllability Limits and Related Human Transfer Functions as Determined from Simulator and Flight Tests.* NASA TN D-746, 1961.
15. Cooper, George E. *Understanding and Interpreting Pilot Opinion.* Aeronautical Engineering Review, Vol.16, March 1957, p. 48.
16. Taylor, Lawrence W., Jr  
et al. *A Review of Lateral-Directional Handling-Qualities Criteria as Applied to the X-15.* Progress of the X-15 Research Airplane Program, NASA SP-90, 1965, pp.45-53.

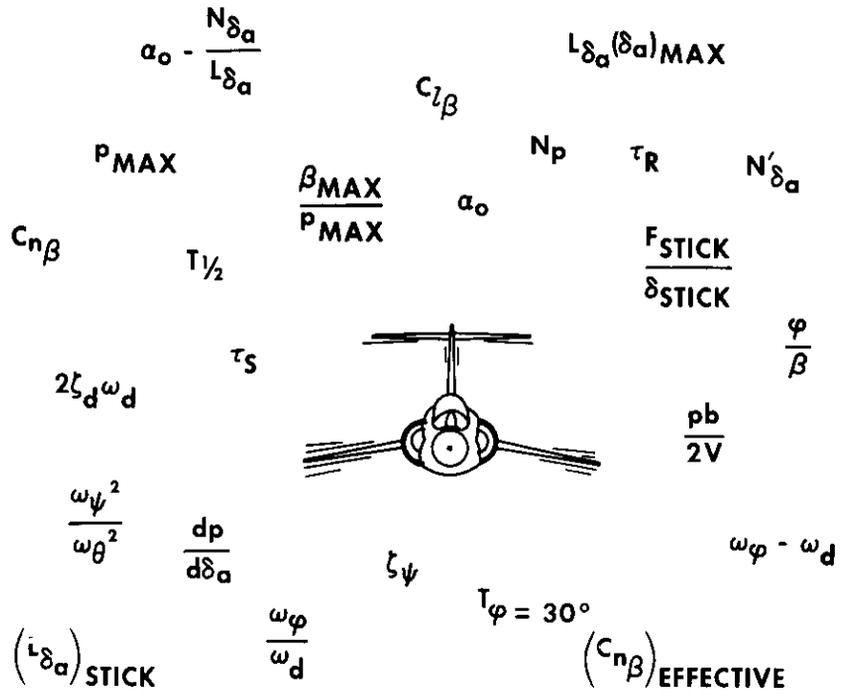


Fig.1 Lateral-directional parameters used in various handling-qualities studies



Fig.2 Simulator used in the survey

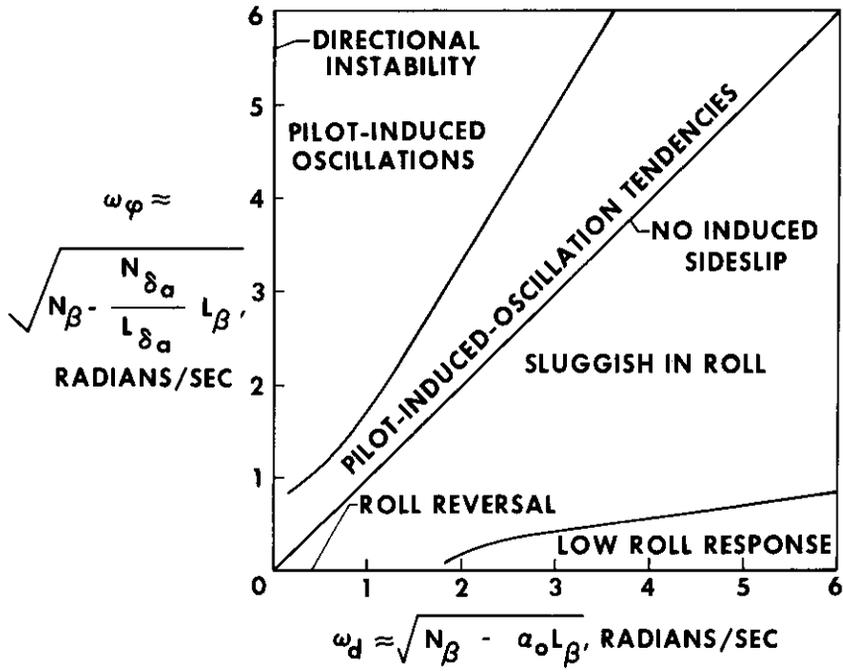


Fig. 3 General effects of  $\omega_\phi$  and  $\omega_d$  on lateral-directional handling qualities

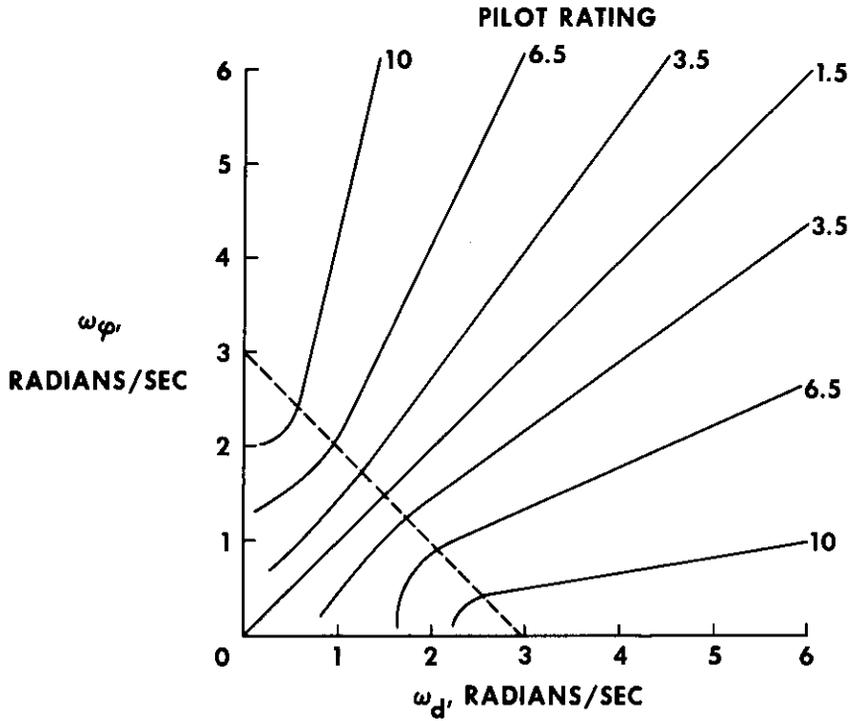


Fig. 4 Pilot-rating-prediction chart for moderate damping.  $2\zeta_d \omega_d = 1$  ;  $1/\tau_R = 4$  ;  $|L_\beta| = 30$  ;  $L_{\delta_a}(\delta_a)_{max} = 10$



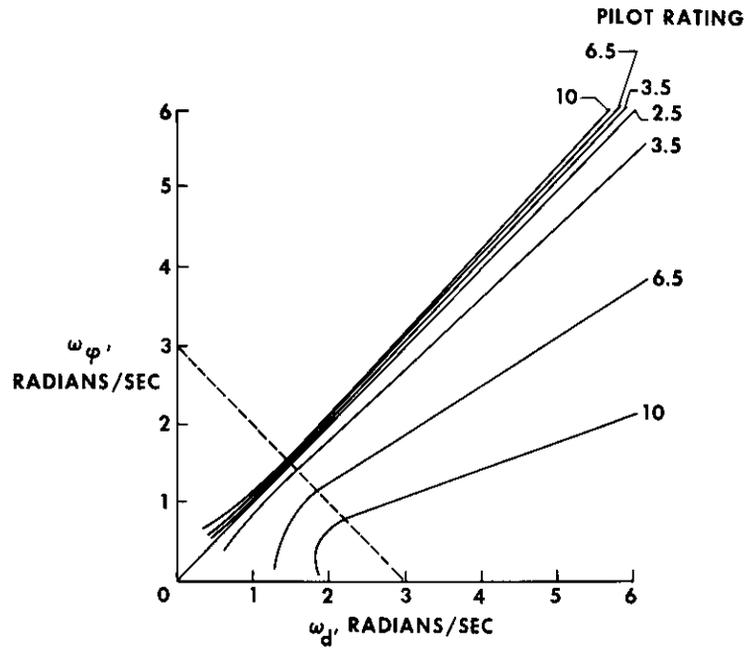


Fig. 5 Pilot-rating-prediction chart for very low damping.  $2\zeta_d \omega_d = 0.025$  ;  $1/\tau_R = 0.1$  ;  $|L_{\beta}| = 30$  ;  $L_{\delta_a}(\delta_a)_{\max} = 10$

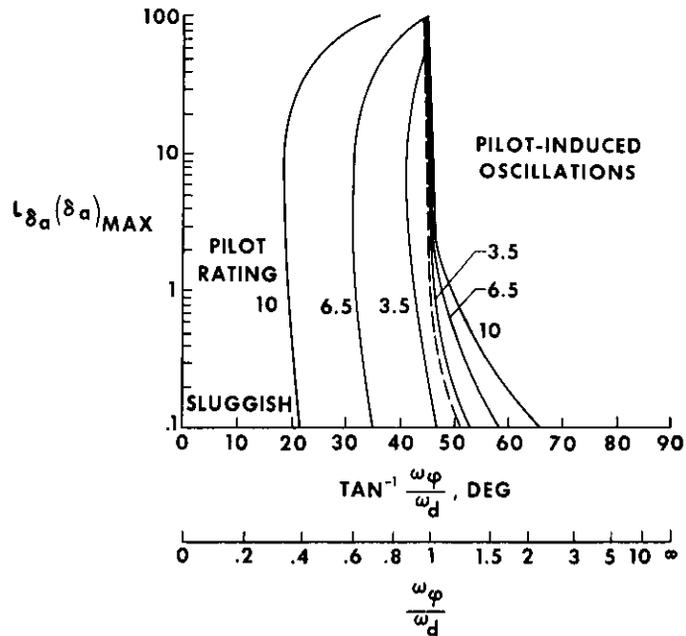


(a) Very low damping,  $2\zeta_d \omega_d = 0.025$  ,  $1/\tau_R = 0.1$

Fig. 6 Summary charts for predicting pilot ratings.  $\omega_{\phi} + \omega_d > 3$  ;  $L_{\beta} > 10$   
(Continued)

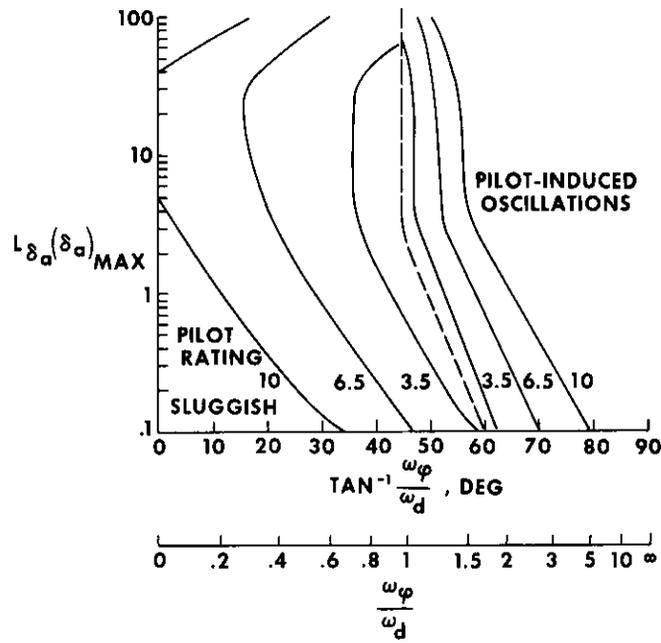

(b) Low damping,  $2\zeta_d\omega_d = 0.25$ ,  $1/\tau_R = 1$

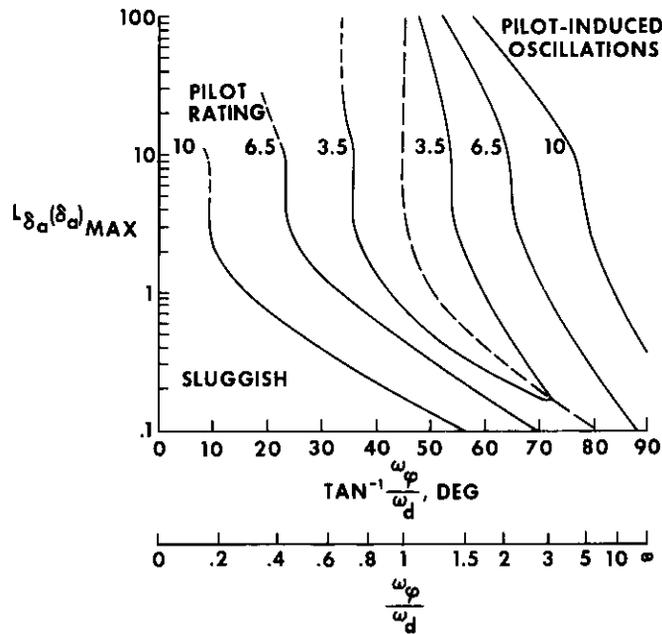

(c) Moderate damping,  $2\zeta_d\omega_d = 1$ ,  $1/\tau_R = 4$

Fig.6 Summary charts for predicting pilot ratings.  $\omega_\phi + \omega_d > 3$ ;  $L_\beta > 10$   
(Concluded)

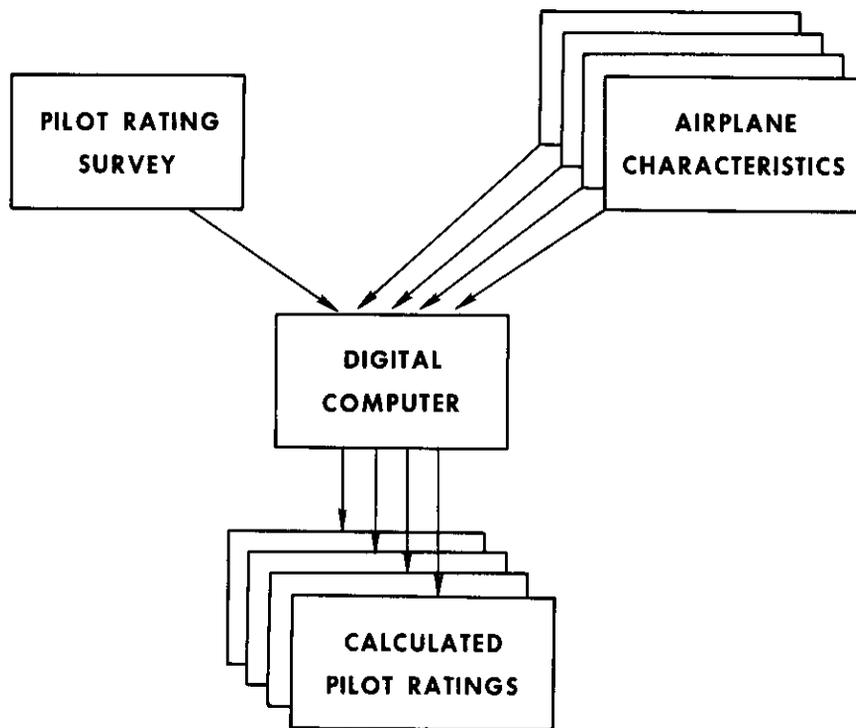


Fig. 7 Pilot-rating-prediction technique using a digital computer

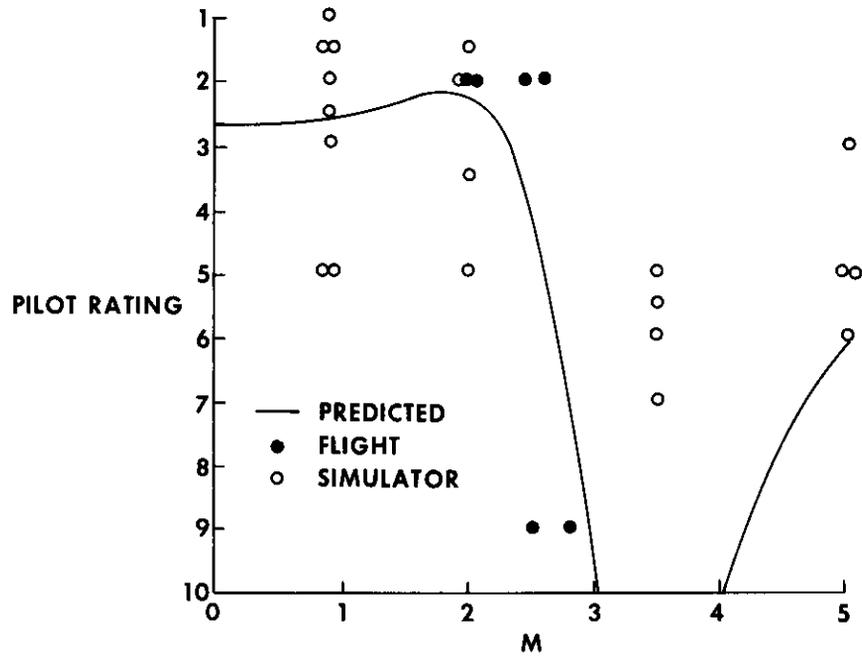


Fig. 8 Comparison of the predicted and actual pilot ratings for the X-15 airplane with dampers off and ventral on at an angle of attack of approximately  $6^\circ$

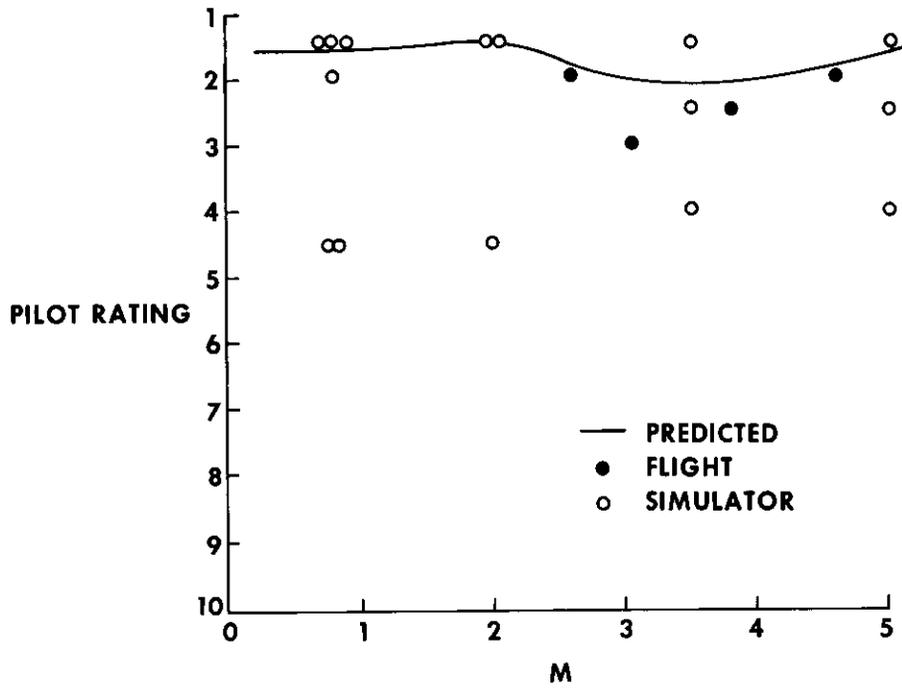


Fig. 9 Comparison of the predicted and actual pilot ratings for the X-15 airplane with dampers on and ventral on at an angle of attack of approximately  $6^\circ$

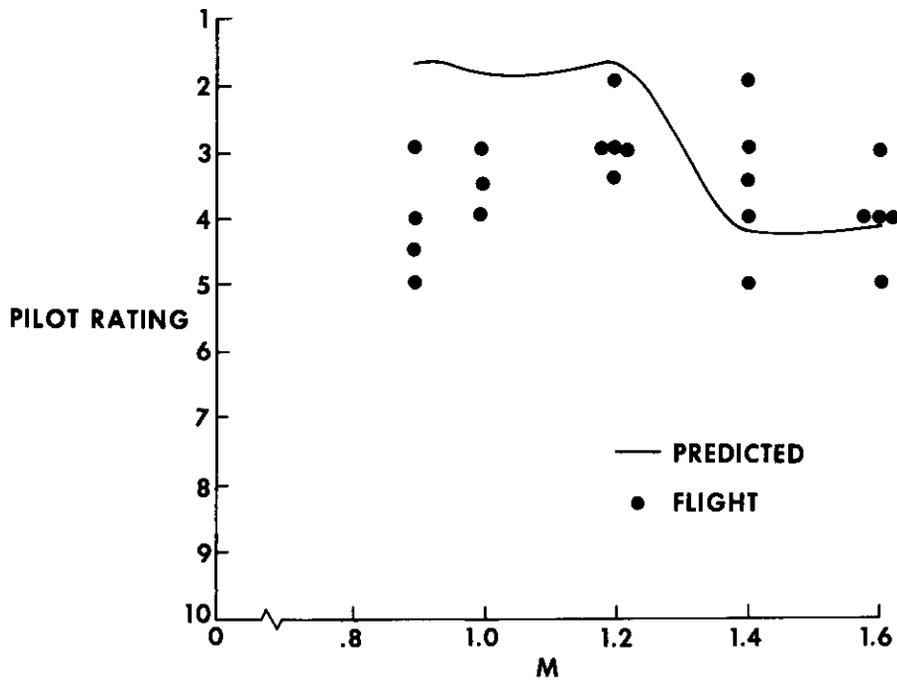


Fig. 10 Comparison of the predicted and actual pilot ratings for the F-104 airplane with dampers off

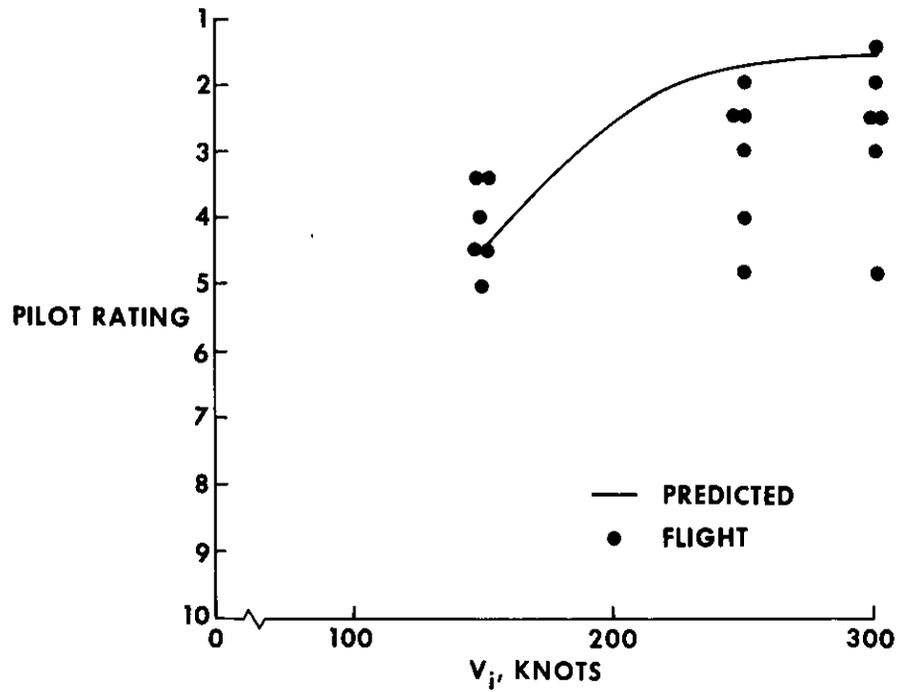


Fig.11 Comparison of the predicted and actual pilot ratings for the T-33 airplane

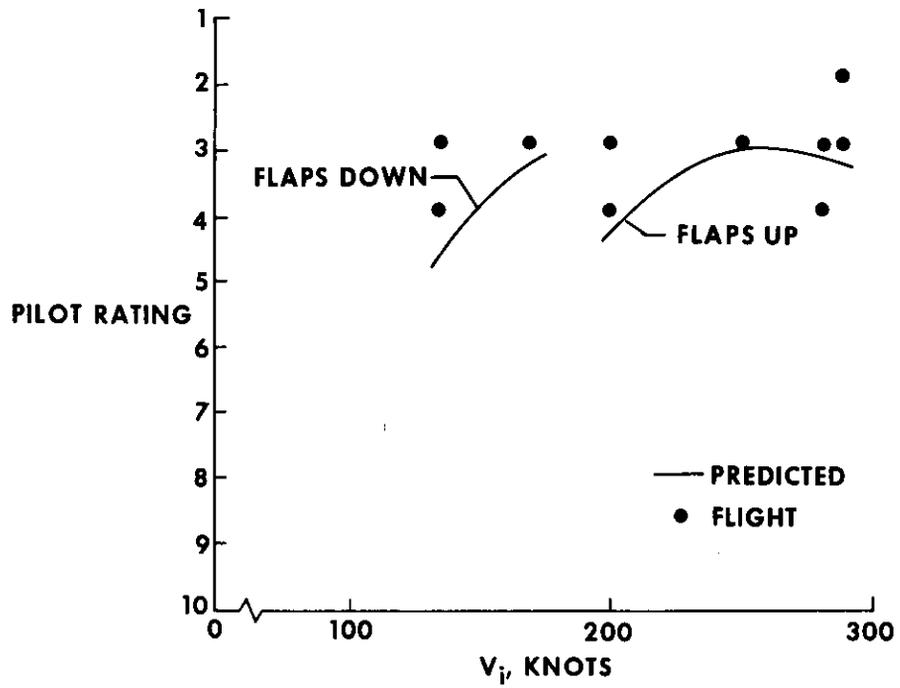


Fig.12 Comparison of the predicted and actual pilot ratings for the 990 jet transport

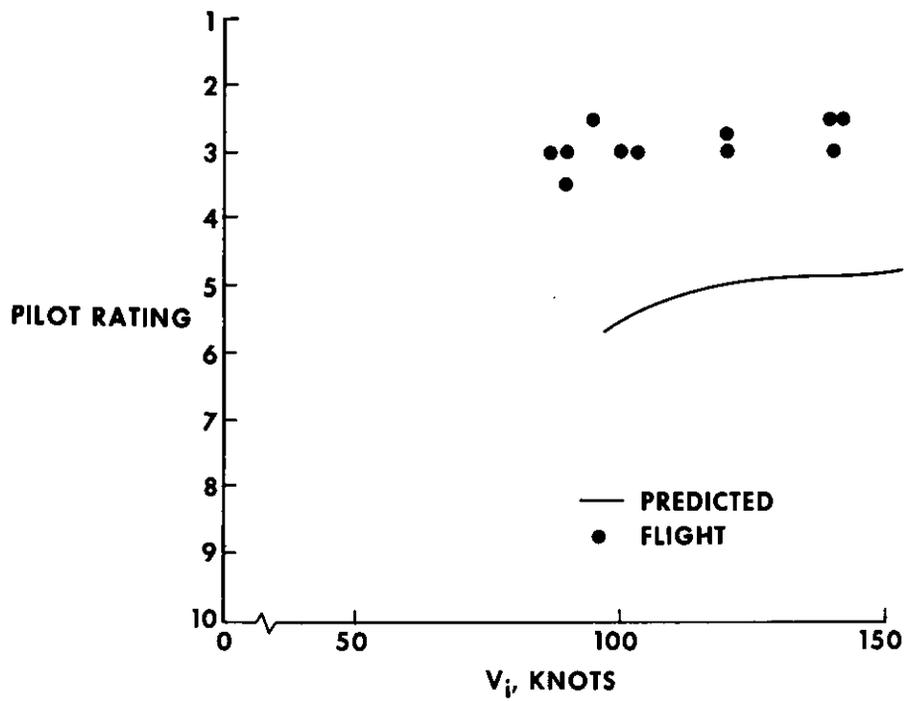


Fig. 13 Comparison of the predicted and actual pilot ratings for the C-47 airplane

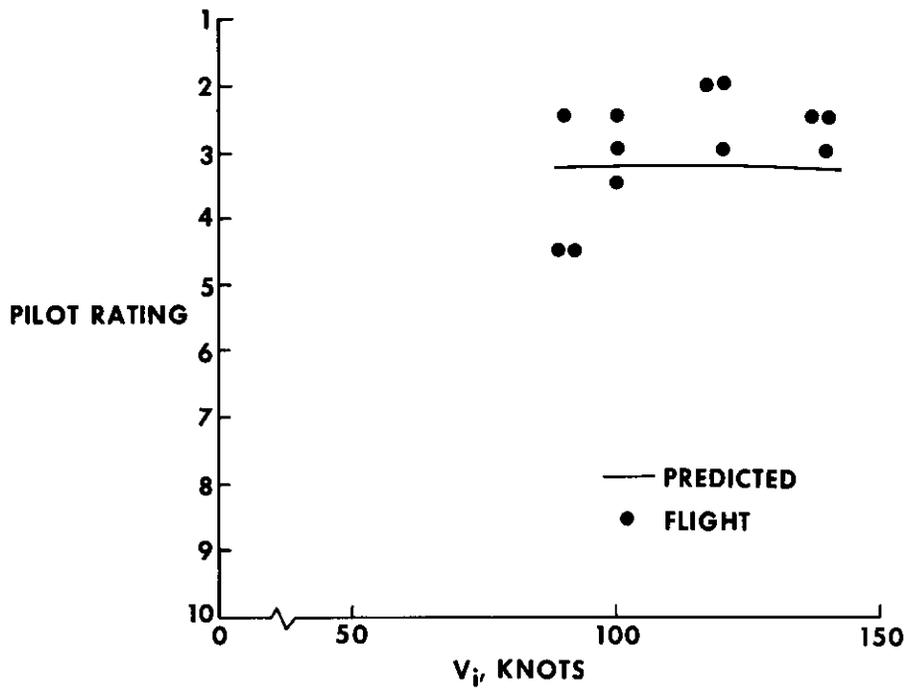


Fig. 14 Comparison of the predicted and actual pilot ratings for the Aero Commander airplane

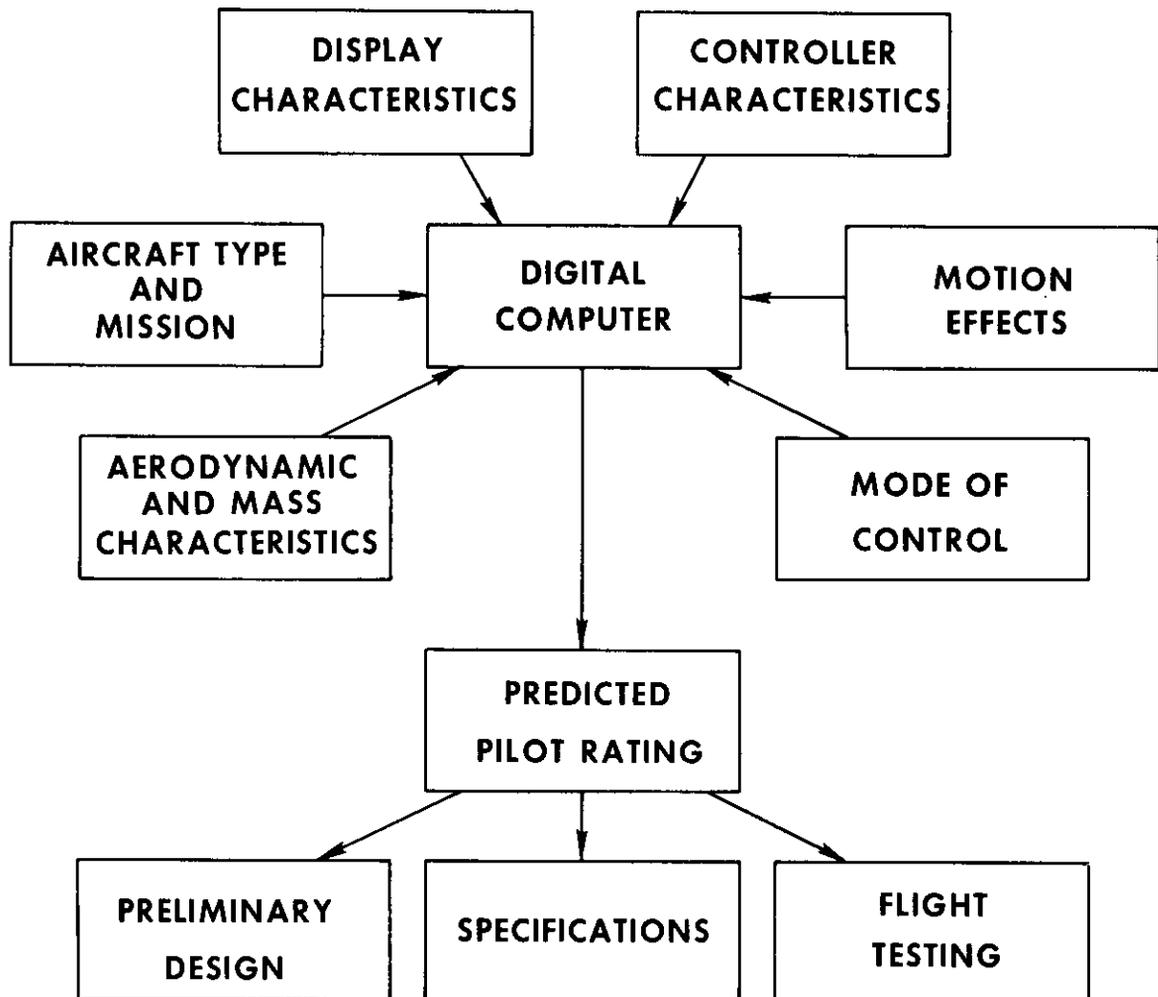


Fig. 15 Ultimate goal of the pilot-rating-prediction method

*The following page(s) provide higher quality versions of graphics contained in the preceding article or section.*

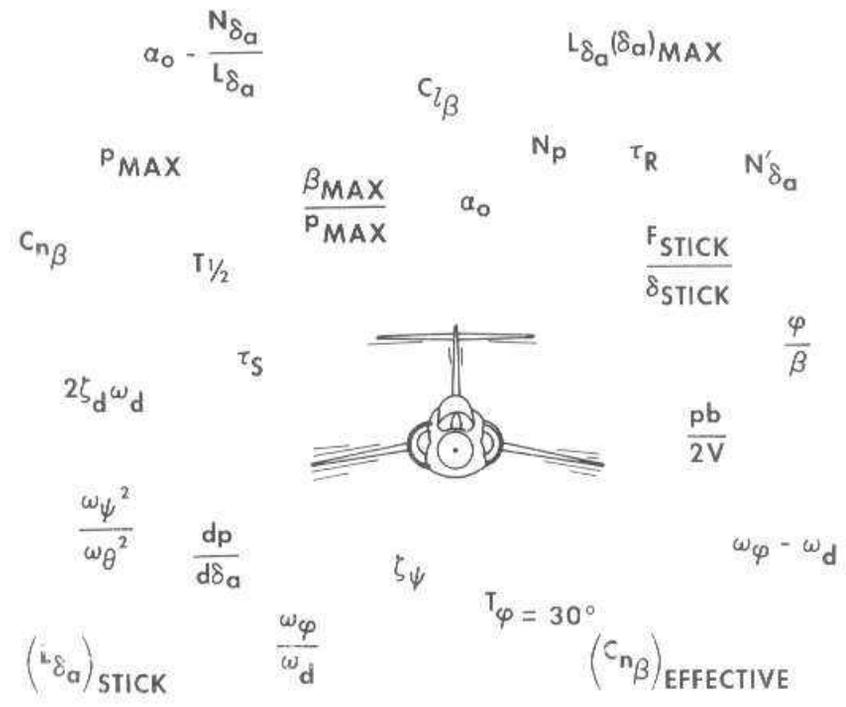


Fig.1 Lateral-directional parameters used in various handling-qualities studies



Fig.2 Simulator used in the survey