

NASA TECH BRIEF

Kennedy Space Center




NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D.C. 20546.

Television Multiplexing System

A novel multiplexing system uses a single, standard, wideband line to transmit 10 or more real-time TV video data displays over hard wire to recorders at a distance of more than 22.5 km from the source. The

system utilizes digital logic and integrated circuits to ensure high reliability and low maintenance. The system lends itself particularly to the long-distance transmission of multiple TV data displays where the cost of many lines is prohibitive.

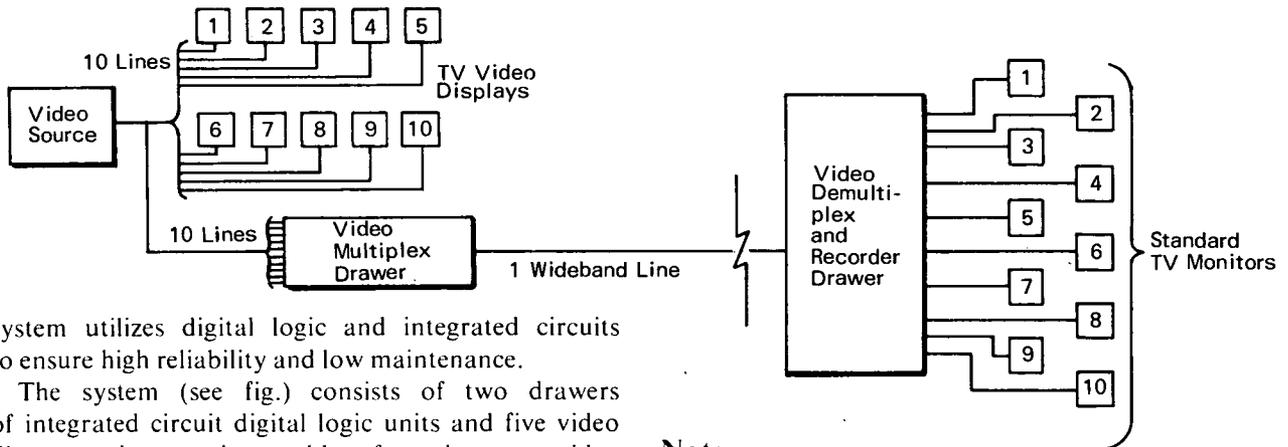

system utilizes digital logic and integrated circuits to ensure high reliability and low maintenance.

The system (see fig.) consists of two drawers of integrated circuit digital logic units and five video disc recorders, each capable of storing two video pictures. The digital logic detects picture-update control pulses from the video generating source and adds a digital sync pulse and a digital code to the TV video sync pulse. The last video picture updated remains "on line" to provide a constant video sync pulse for the demultiplexing and video recording equipment at the receiving end of the line.

The use of only one wideband line for transmission of the 10 "videos" was made possible by a unique method of self-synchronization, combining digital logic field and TV concepts. High-speed video switching boards are used in conjunction with the digital logic. The video disc recorders at the receiving end of the transmission line store the video data after they are demultiplexed. Video distribution circuitry then routes the data to standard 525 TV monitors at various locations.

This system can be adapted for various video samp-

Note:

Requests for further information may be directed to:

Technology Utilization Officer
Code AD-PAT
Kennedy Space Center, Florida 32899
Reference: B71-10391

Patent status:

Inquiries about obtaining rights for the commercial use of this invention may be made to:

Patent Counsel
Mail Code AD-PAT
John F. Kennedy Space Center
Kennedy Space Center, Florida 32899

Source: L. G. Simpkins
Kennedy Space Center
(KSC-10654)

Category 02

NWSI-S
RM. 1313
KSC HQS.
-1-