

# NASA TECH BRIEF


## Marshall Space Flight Center



NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D.C. 20546.

### Externally Programmed Variable Timer

A unique timing device, developed to satisfy 1-sec, 5-sec, and 10-min timing requirements, incorporates external programming capability.

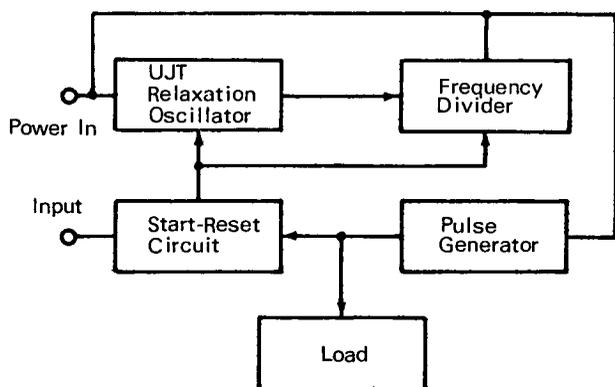

Programmable Timer Block Diagram

Operational efficiency of  $\pm 5\%$  over a temperature range of  $-65^{\circ}\text{C}$  to  $+130^{\circ}\text{C}$  was a design requirement. To reduce the effect of temperature on the programmable timer, the time constant of the unijunction transistor (UJT) oscillator (see fig.) was reduced and the oscillator frequency was divided by using bistable multivibrators (flip-flops). This limited the temperature sensitivity of the timer to that of the UJT oscillator.

The number of flip-flops used at any given time is programmed by interconnecting the desired number of available inputs and outputs. The universal timer can divide the output frequency of the UJT

oscillator by 2, 4, 8, 16, 32, 64, or 128. Output of the final flip-flop is connected to a pulse generator circuit that produces a 28 V, 50 msec pulse. This output is routed back to a start-reset circuit that controls the UJT relaxation oscillator and the flip-flops.

Temperature and voltage range tests resulted in an accuracy of  $\pm 3.9\%$  with supply voltage variations of 24 to 31 Vdc over the temperature range of  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ . The programmable timer was within the  $\pm 5\%$  efficiency over the required temperature range with the same supply voltage regulation.

#### Note:

Requests for further information may be directed to:

Technology Utilization Officer  
Code A&TS-TU  
Marshall Space Flight Center  
Huntsville, Alabama 35812  
Reference: TSP71-10437

#### Patent status:

No patent action is contemplated by NASA.

Source: P.R. Gulbis of  
Sperry Rand  
under contract to  
Marshall Space Flight Center  
(MFS-20776)

Category 04