

General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

X-325-71-393

PRINT

NASA TM X- 65737

A FAST ELECTRON GUN FOR STUDY OF ATOMIC DECAYS

JOHN F. SUTTON

SEPTEMBER 1971



GODDARD SPACE FLIGHT CENTER
GREENBELT, MARYLAND

N72-11369

(NASA-TM-X-65737) A FAST ELECTRON GUN FOR
STUDY OF ATOMIC DECAYS J.F. Sutton (NASA)
Sep. 1971 13 p CSCL 14B

Unclas
08693

G3/14

X-325-71-393

A FAST ELECTRON GUN FOR STUDY
OF ATOMIC DECAYS

John F. Sutton


September 1971


GODDARD SPACE FLIGHT CENTER
Greenbelt, Maryland

PRECEDING PAGE BLANK NOT FILMED

A FAST ELECTRON GUN FOR STUDY
OF ATOMIC DECAYS

Prepared by: 
John F. Sutton
Functional Test Branch

Reviewed by: 
William G. Brown
Head, Functional Test Branch

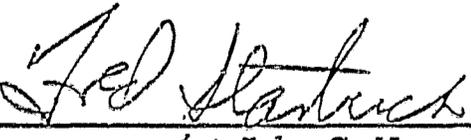Approved by: 
for John C. New
Chief, Test and Evaluation Division

PRECEDING PAGE BLANK NOT FILMED

A FAST ELECTRON GUN
FOR STUDY OF ATOMIC DECAYS

John F. Sutton

ABSTRACT

A fast electron gun with subnanosecond rise- and decay-times and 100 ma. peak beam current has been developed for delayed coincidence studies of atomic decays. The gun is fabricated from an inexpensive tetrode Nuvistor, involving only slight modification.

A FAST ELECTRON GUN
FOR STUDY OF ATOMIC DECAYS

John F. Sutton

SUMMARY

A fast electron gun has been developed for use in delayed coincidence studies of nanosecond atomic lifetimes. The gun is fabricated from readily available, inexpensive vacuum tubes which are modified to provide subnanosecond switching times and peak currents of ~ 100 ma. for pulse durations $\lesssim 2$ nsec.

A FAST ELECTRON GUN FOR STUDY OF ATOMIC DECAYS

A fast electron gun has been developed for use in studying the decays of excited states in gases¹ by a delayed coincidence technique. This gun would prove useful, however, wherever a source for a 100-300 eV electron beam with subnanosecond switching times is required. Of course, due to the presence of the oxide coated cathode, its use must be limited to inert atmospheres.

The gun consists of a modified 7587 Nuvistor with the metal shell cut away just above the base. As shown in Fig. 1, a low impedance ground connection is provided for the first grid by spot welding three short wires to the grid supports and the remaining portion of the metal envelope. The modified 7587 is then inserted into a standard Nuvistor socket which has been soldered into the end of a UHF connector (Fig. 2). The connector serves both as a mechanical support and as the input signal connector.

The grounded grid configuration of Fig. 3 was found to provide low pulse distortion and good matching to the input cable impedance. The special coupling capacitor shown is a modified coaxial unit, General Radio type 874K. Performance was verified by collecting the radial electron beam in a 1/4" diameter cylinder mounted inside a UHF elbow connector (hidden by the disk in Fig. 4), and plotting with the aid of an X-Y recorder coupled to the time sweep of a sampling oscilloscope, the input and output current pulse shapes (Figs. 5 and 6, respectively). The output pulse exhibits rise and fall times of the same order (0.3 nsec.) as the input pulse indicating, assuming the risetimes add as the square root of the sum of the squares, that the electron gun has rise- and fall time of $\lesssim 0.1$ nsec.

Where an input pulse of $\sim 200\text{eV}$ is available, so that a separate acceleration potential supply and a second grid are not necessary, another variety of Nuvistor, the 8627 grounded grid triode, has been found to give even better performance. Risetimes at least as fast as ~ 0.1 nsec. were observed along with an almost complete lack of ringing on the output pulse wave form. Whereas peak currents of ~ 100 ma. are normal for the 7587 driven with a 10 volt pulse, the 8627 is capable of peak currents of ~ 1 ampere when driven with 200 volt pulses of durations ≤ 2 nsec.

REFERENCES

1. J. F. Sutton, Doctoral Dissertation, Measurement of Relative Cross Sections for Simultaneous Ionization and Excitation of the Helium 4^2S and 4^2P States, American University Library.

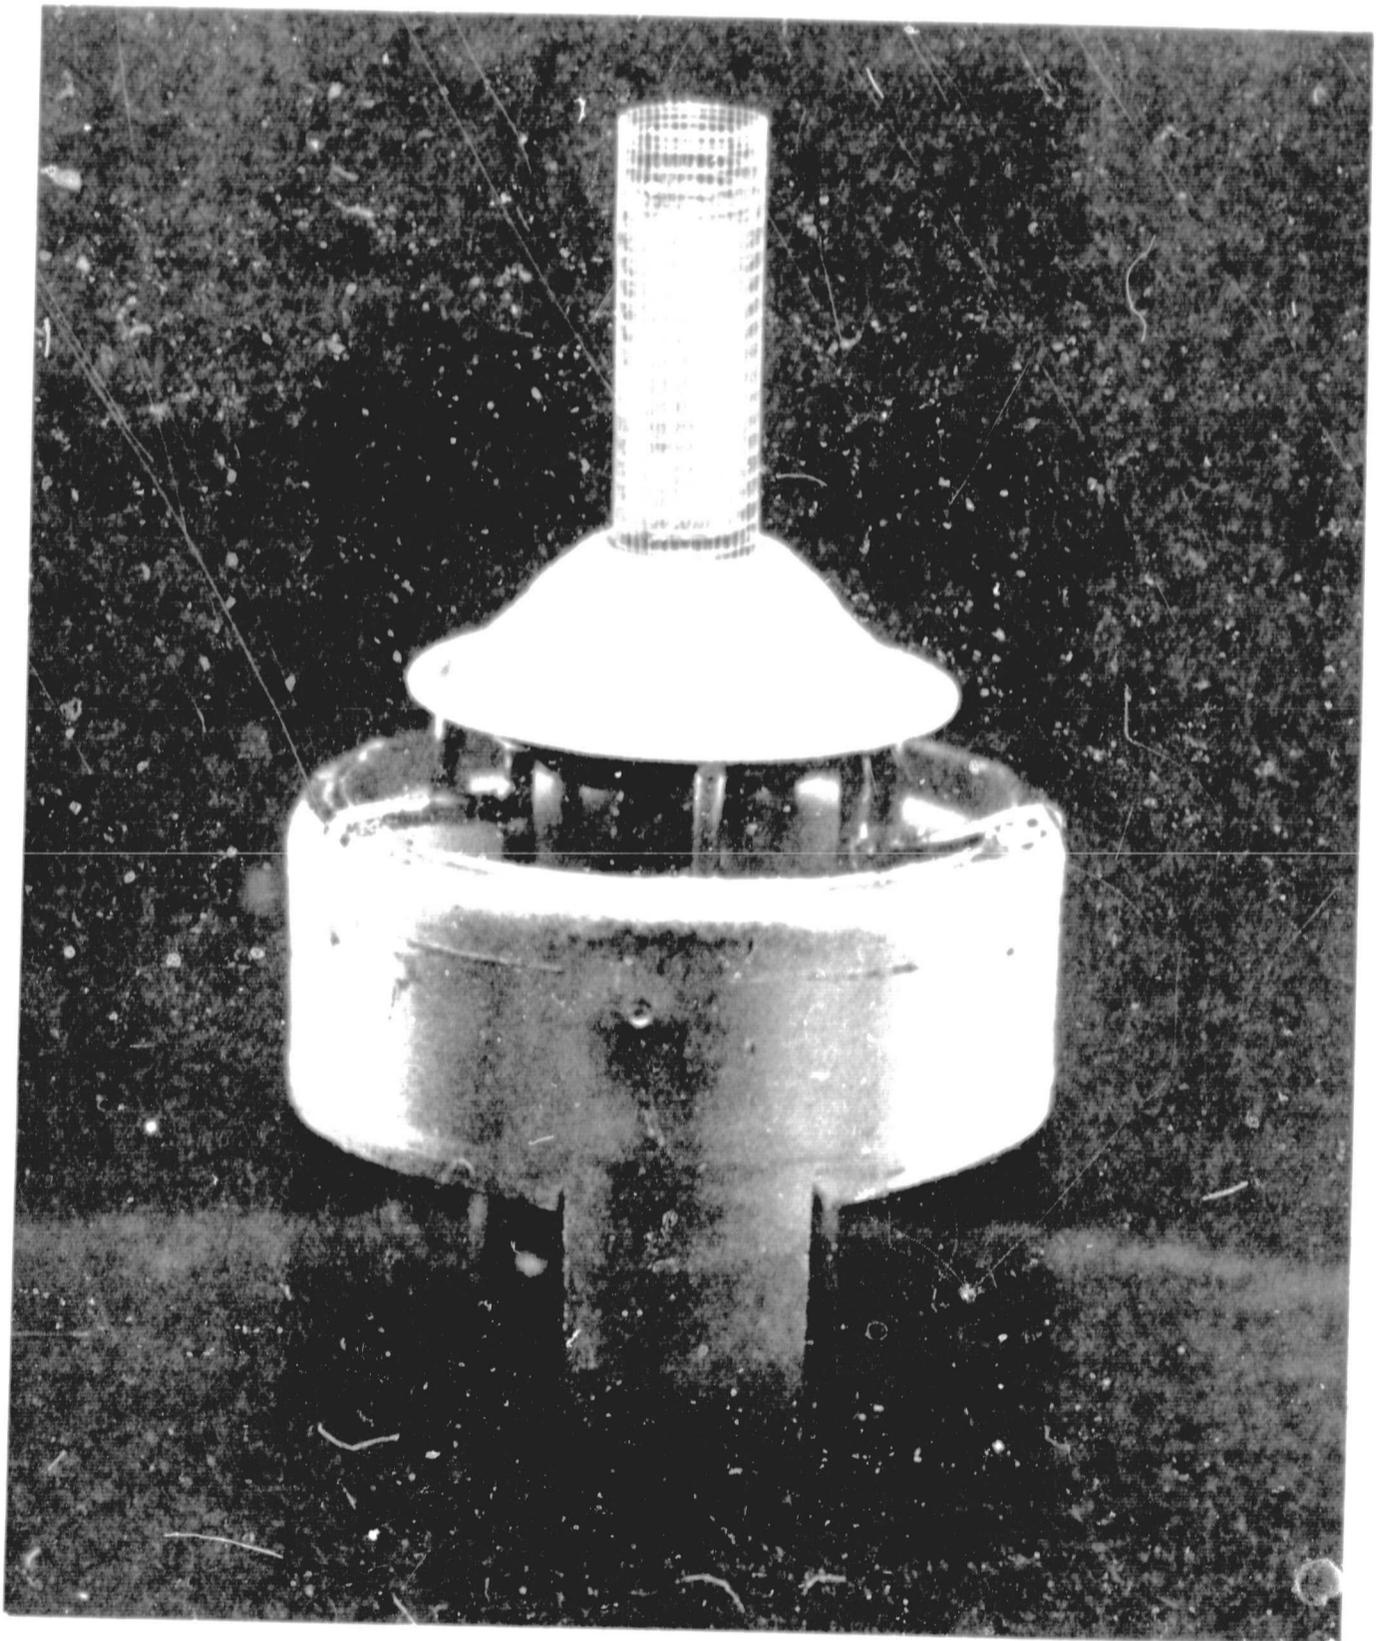


Figure 1. Modified 7587 Nuvistor Electron Gun

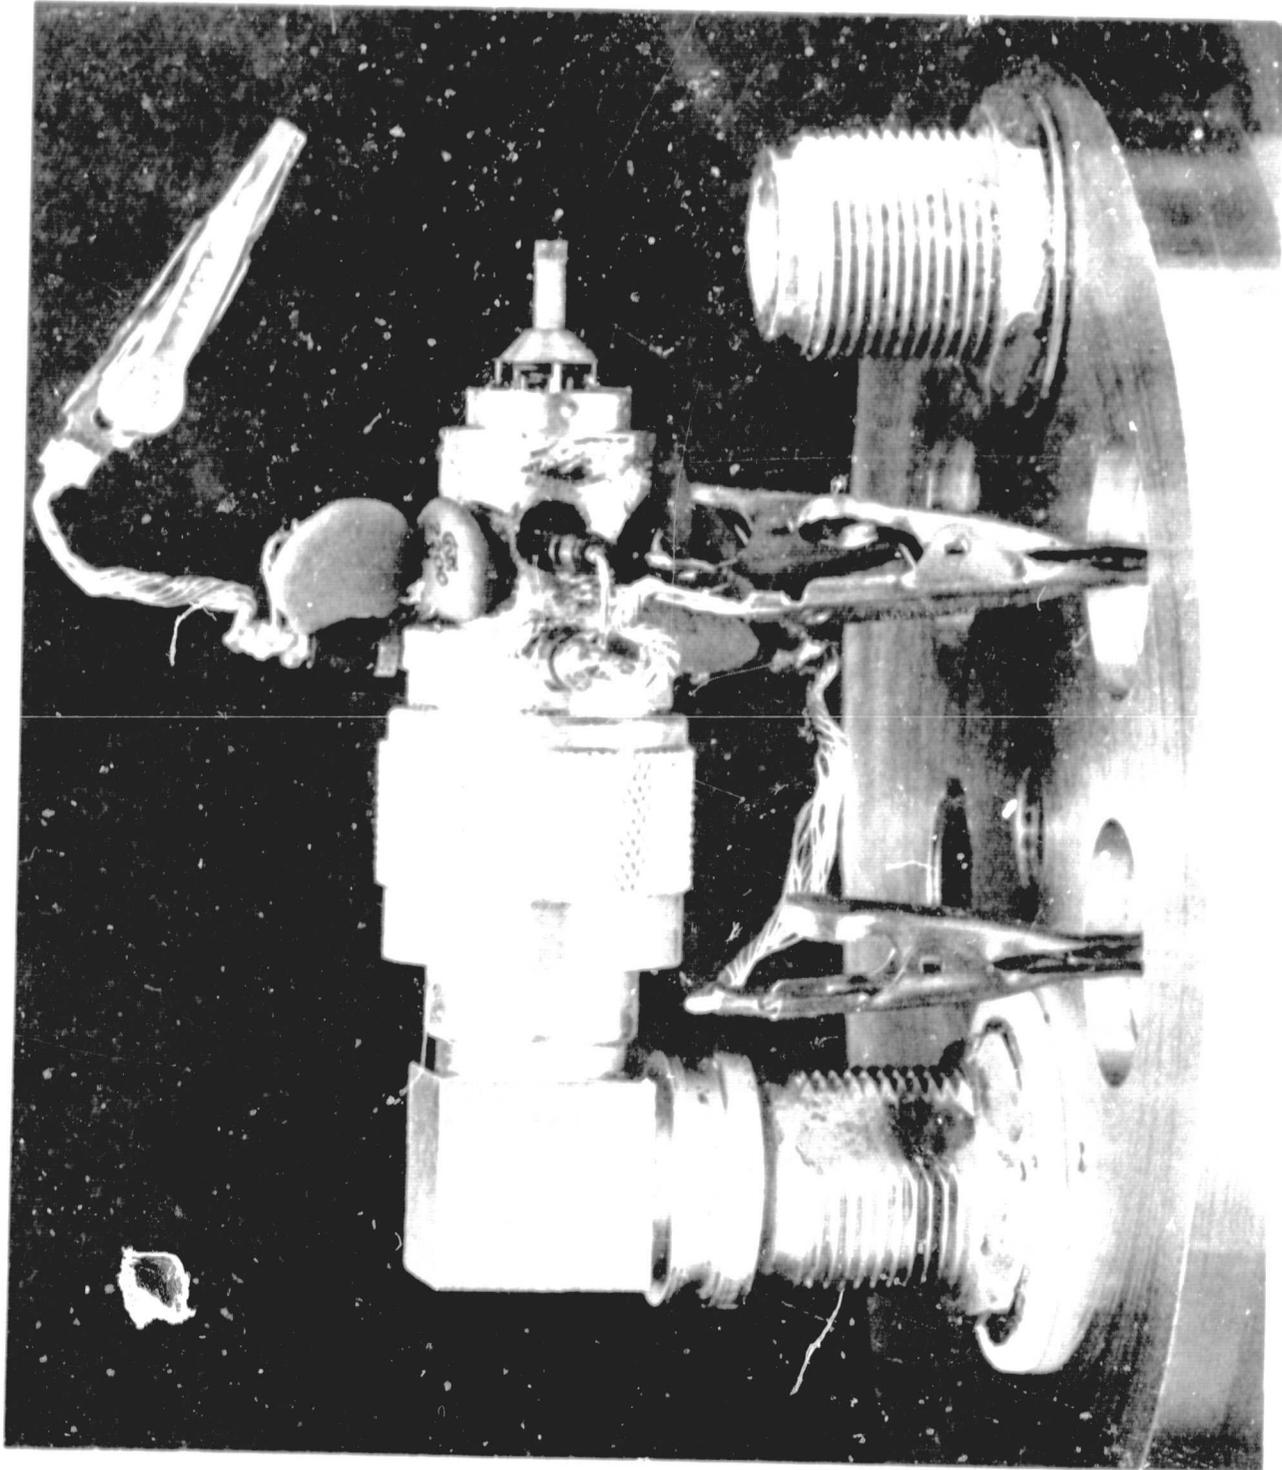


Figure 2. Electron Gun Assembly, Electron Collector Removed

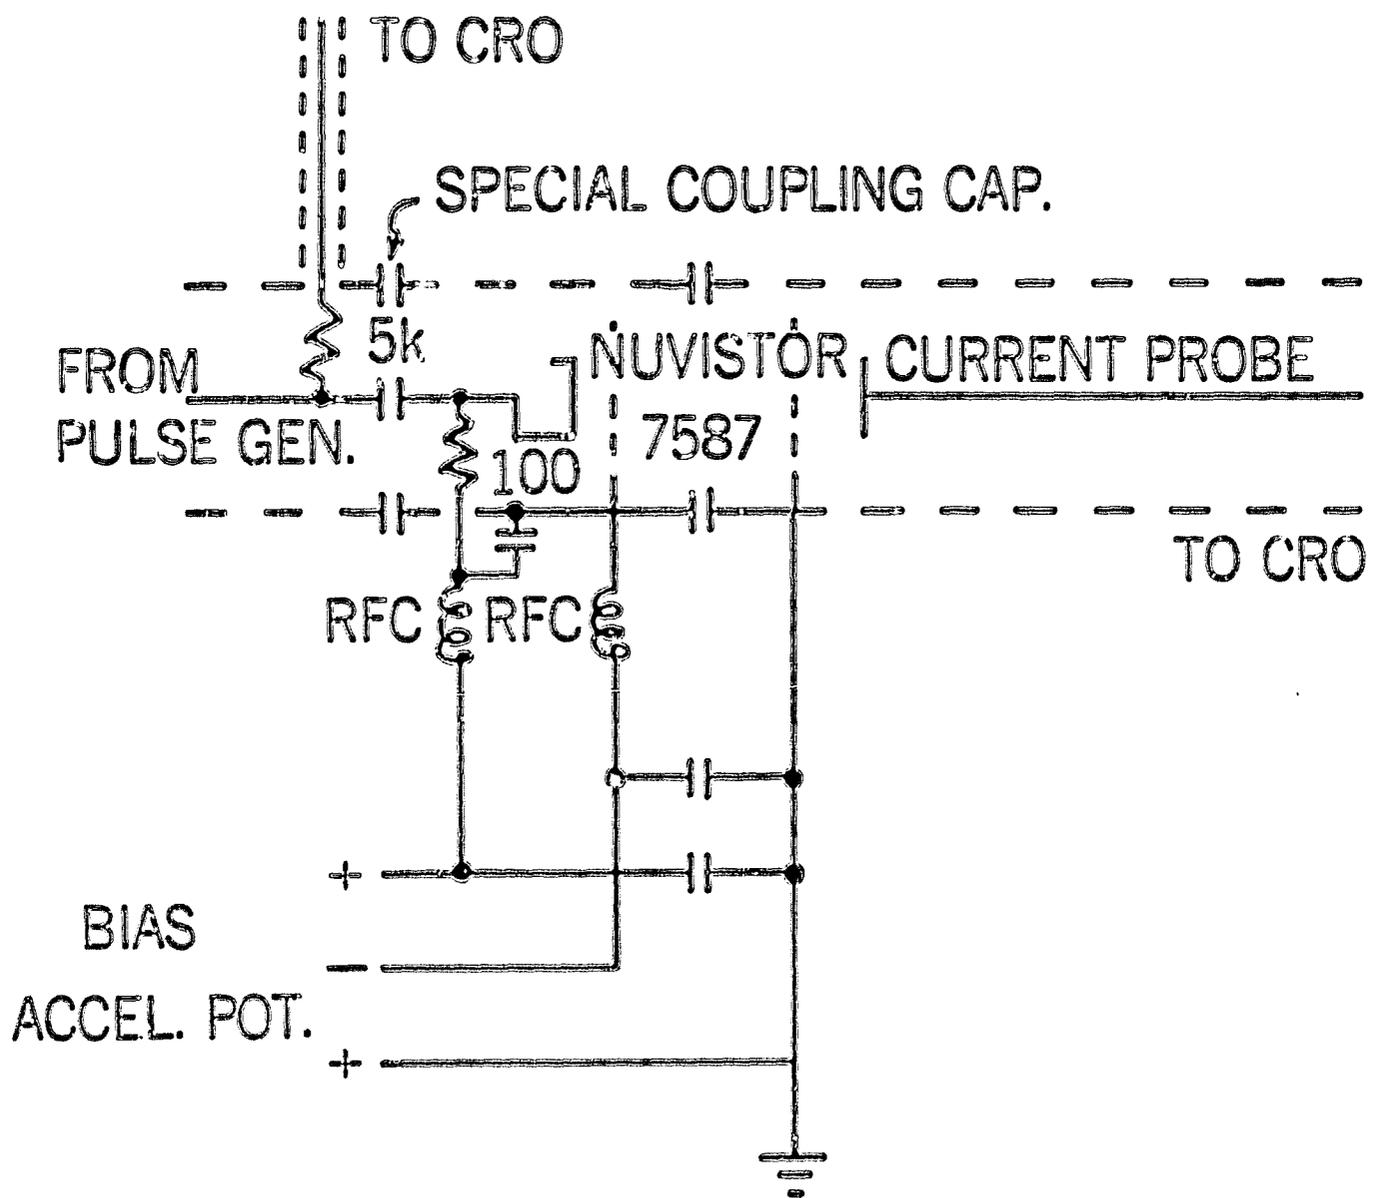


Figure 3. Schematic Diagram of Electron Gun Circuit


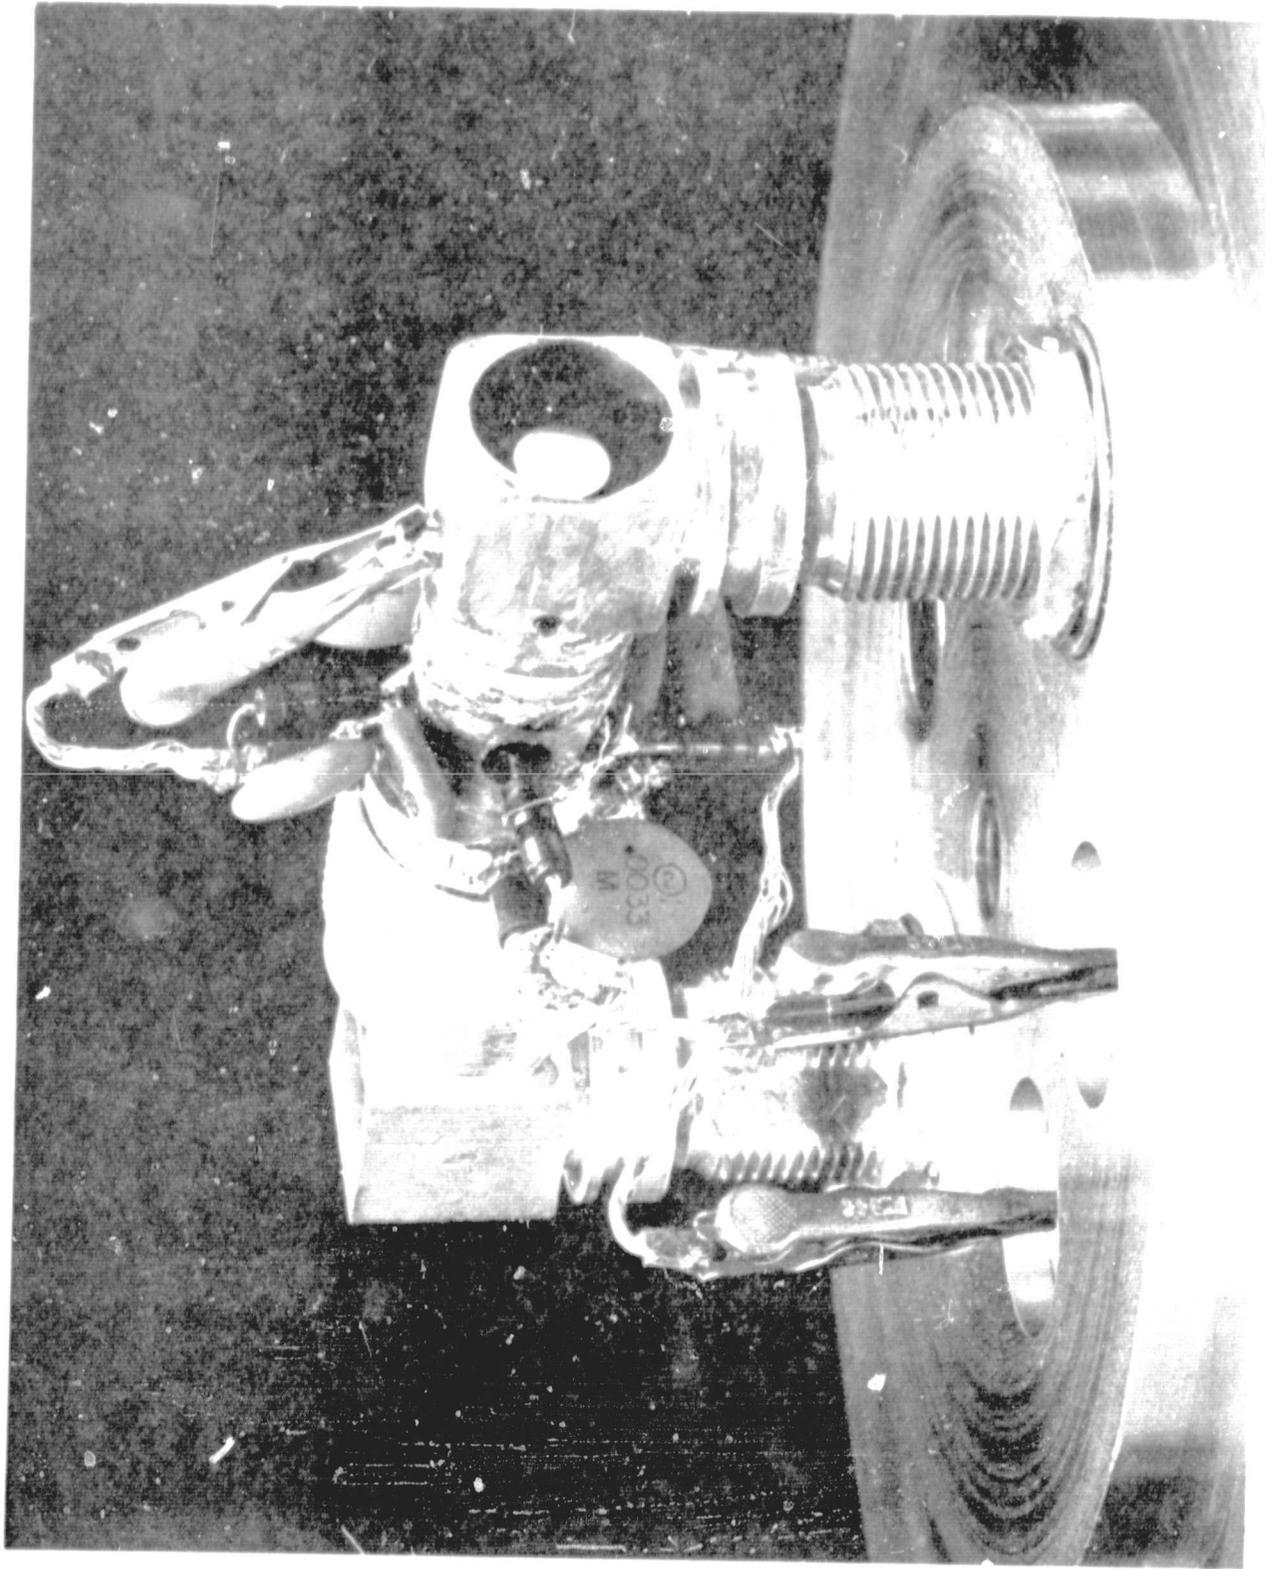


Figure 4. Complete Electron Gun Assembly

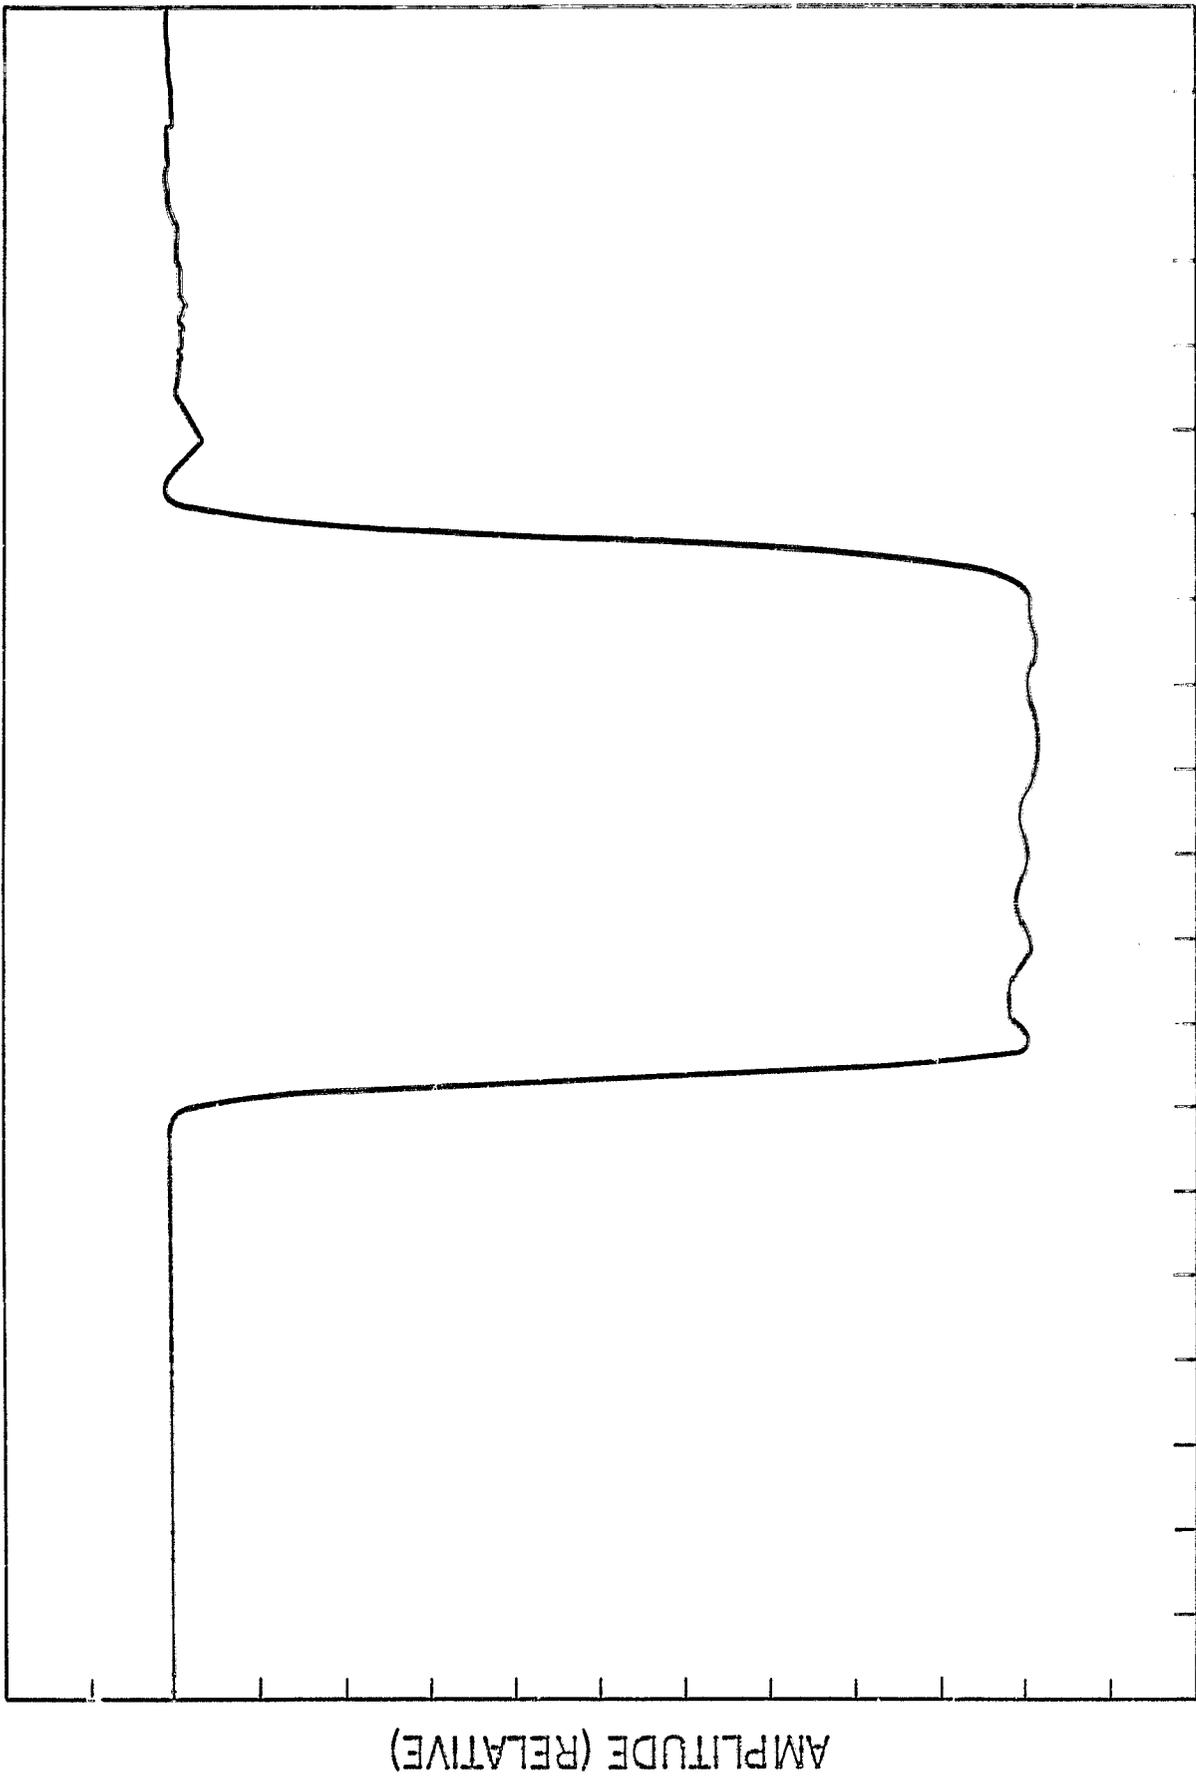

TIME 0.5 NSEC/DIV

Figure 5. Input Current Pulse

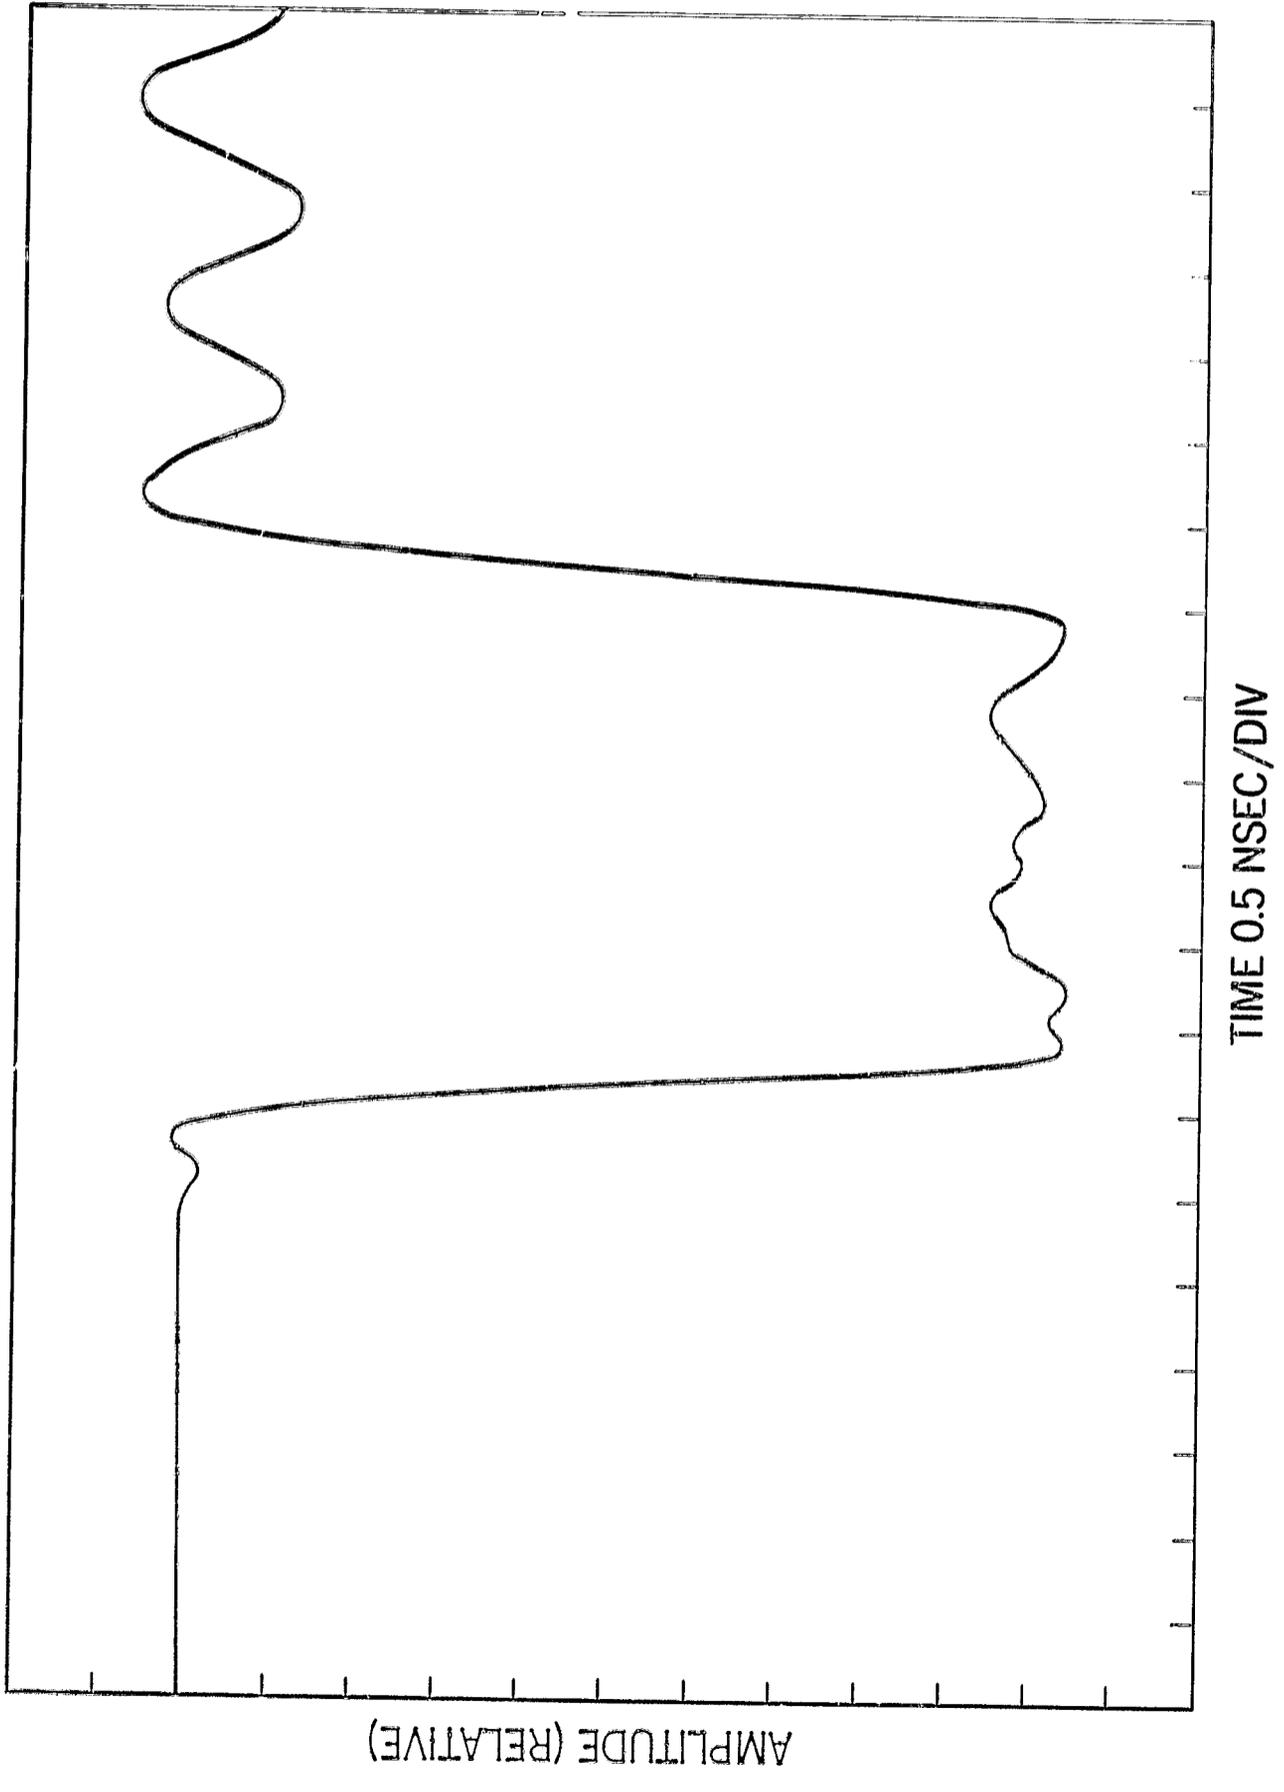


Figure 6. Output Current Pulse