

NASA TECHNICAL NOTE



NASA TN D-7109

NASA TN D-7109

EFFECT OF REYNOLDS NUMBER
AND ENGINE NACELLES ON THE
STALLING CHARACTERISTICS OF A MODEL
OF A TWIN-ENGINE LIGHT AIRPLANE

by Vernard E. Lockwood

Langley Research Center

Hampton, Va. 23365

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION • WASHINGTON, D. C. • DECEMBER 1972

1. Report No. NASA TN D-7109		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle EFFECT OF REYNOLDS NUMBER AND ENGINE NACELLES ON THE STALLING CHARACTERISTICS OF A MODEL OF A TWIN-ENGINE LIGHT AIRPLANE				5. Report Date December 1972	
				6. Performing Organization Code	
7. Author(s) Vernard E. Lockwood				8. Performing Organization Report No. L-8591	
				10. Work Unit No. 501-06-05-01	
9. Performing Organization Name and Address NASA Langley Research Center Hampton, Va. 23365				11. Contract or Grant No.	
				13. Type of Report and Period Covered Technical Note	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, D.C. 20546				14. Sponsoring Agency Code	
15. Supplementary Notes					
16. Abstract The investigation was made on a 1/18-scale model of a twin-engine light airplane. Static longitudinal, lateral, and directional characteristics were obtained at 0° and ±5° sideslip at a Mach number of about 0.2. The angle of attack varied from about 20° at a Reynolds number of 0.39×10^6 to 13° at a Reynolds number of 3.7×10^6 , based on the reference chord. The effect of fixed transition, vertical and horizontal tails, and nacelle fillets was studied.					
17. Key Words (Suggested by Author(s)) Dihedral and directional characteristics Light twin-engine airplane model Maximum lift Nacelle effects Reynolds number effects Stability characteristics				18. Distribution Statement Unclassified - Unlimited	
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 35	22. Price* \$3.00

EFFECT OF REYNOLDS NUMBER AND ENGINE NACELLES ON THE
STALLING CHARACTERISTICS OF A MODEL OF A
TWIN-ENGINE LIGHT AIRPLANE

By Vernard E. Lockwood
Langley Research Center

SUMMARY

An investigation has been made in the Langley low-turbulence pressure tunnel to determine the effect of Reynolds number on the stall characteristics of a 1/18-scale model of a twin-engine light airplane. The investigation was made at a Mach number of about 0.2 over a Reynolds number range from about 0.39×10^6 to 3.7×10^6 , based on the reference chord. Static longitudinal, lateral, and directional characteristics were obtained with and without twin nacelles.

The investigation showed that maximum lift coefficients increased with Reynolds number with the nacelles on or off. The presence of the nacelles on the model caused a reduction in lift at all Reynolds numbers. The maximum lift coefficients of the model without nacelles agreed favorably with results obtained on a version of the full-scale single-engine airplane, but the lift coefficients for the model with nacelles on were less than those obtained on the twin-engine airplane. The configurations with and without nacelles were longitudinally stable, the tail providing large pitch-down moments above maximum lift. The model with the nacelles off had positive dihedral effect (negative values of $C_{l\beta}$) throughout the angle-of-attack and Reynolds number range of the investigation; and the model with the nacelles on had a positive dihedral effect at low Reynolds numbers, but at Reynolds numbers of approximately 3×10^6 and at angles of attack greater than 8° , the model had a negative dihedral effect. These results are in qualitative agreement with those obtained in previous tests of the full-scale airplanes. The model possessed directional stability with nacelles on and off.

INTRODUCTION

For several years, the National Aeronautics and Space Administration has been conducting a program to evaluate the flying qualities of a number of general aviation airplanes. The results of these investigations are reported in references 1 to 6. Tests at the NASA Flight Research Center and in the Langley full-scale tunnel have indicated

some unfavorable aerodynamic characteristics in the stall angle-of-attack range for the configuration reported in reference 2. For example, the data of reference 2 show a strong rolling tendency in the angle-of-attack range near maximum lift which is thought to result from the asymmetric flow generated by propellers rotating in the same direction. During the time period after these adverse effects were discovered, it was desired to document many of the aerodynamic parameters including the dynamic derivatives at stall and for this purpose a 1/6-scale model of the airplane was constructed and statically tested in the Langley full-scale tunnel. The results of these tests show major differences in the maximum lift and effective dihedral between the model and the airplane. The data of the 1/6-scale model were obtained at a Reynolds number of 0.7×10^6 based on the mean aerodynamic chord whereas the airplane data were obtained at a Reynolds number of 2.96×10^6 . An examination of available airfoil section lift data (refs. 7 and 8) indicates a rapid increase in the maximum section lift coefficients with Reynolds number, which probably explains the difference in maximum lift coefficient between the model and airplane; however, the Reynolds number effect on maximum lift coefficient cannot be used to explain the differences noted in dihedral effect. To resolve both of these questions, a small model was constructed for tests in the Langley low-turbulence pressure tunnel covering the range of Reynolds numbers of the previous two investigations. The results of these tests are presented herein.

SYMBOLS

The data contained herein are referred to the stability axis system as shown in figure 1. The model moment center is located longitudinally at 0.10 of the mean aerodynamic chord and vertically 0.20 of the mean aerodynamic chord below the horizontal reference line. The symbols are defined as follows:

b wing span, 0.6096 m

C_A axial-force coefficient, $\frac{\text{Axial force}}{qS}$

C_D drag coefficient, $\frac{\text{Drag}}{qS}$

C_L lift coefficient, $\frac{\text{Lift}}{qS}$

C_{l_r} rolling-moment coefficient, $\frac{\text{Rolling moment}}{qSb}$

$C_{l_\beta} = \frac{\Delta C_l}{\Delta \beta}$, determined from $\beta = \pm 5^\circ$ (effective dihedral parameter)

C_m pitching-moment coefficient, $\frac{\text{Pitching moment}}{qS\bar{c}}$

C_n yawing-moment coefficient, $\frac{\text{Yawing moment}}{qSb}$

$C_{n\beta} = \frac{\Delta C_n}{\Delta\beta}$, determined from $\beta = \pm 5^\circ$

C_Y side-force coefficient, $\frac{\text{Side force}}{qS}$

$C_{Y\beta} = \frac{\Delta C_Y}{\Delta\beta}$, determined from $\beta = \pm 5^\circ$

\bar{c} mean aerodynamic chord, 0.0847 m

c_l section lift coefficient, $\frac{\text{Lift}}{qS}$

i_t horizontal-tail incidence, positive when trailing edge is down, deg

q free-stream dynamic pressure

R Reynolds number based on \bar{c}

S wing area, 0.05104 m²

V_∞ free-stream velocity

α angle of attack of fuselage reference line, deg

β angle of sideslip, positive when nose is to the left, deg

Subscript:

max maximum

Model nomenclature:

B body

F nacelle fillet

H horizontal tail

N	nacelle
V	vertical tail
W	wing

MODEL

The model tested was a 1/18-scale version of the light twin-engine low-wing airplane described in references 2 and 3. A three-view drawing of the model is presented in figure 2 and photographs of the model mounted in the Langley low-turbulence pressure tunnel are presented in figure 3. The model had a wing span of 0.6096 m, a mean aerodynamic chord of 0.0847 m, a wing area of 0.05104 m², and an aspect ratio of 7.28 based on the projection of the outboard leading edge through the fuselage. The wing had a NACA 64₂A215 airfoil section, a 2° incidence with respect to the fuselage reference line, and a dihedral angle of 5°. The wing leading edge between the fuselage and the engine nacelle was swept back 20°. With the engine nacelle removed, the sweptback leading edge extended to approximately 29 percent of the semispan. The outboard panel of the wing was unswept.

The model was supported by a sting which resulted in increasing the width and depth of the fuselage as shown in figure 3. This modification also reduced the exposed tail area as the overall dimensions were maintained.

Incidence change in the horizontal tail was obtained by replacing the complete tail with one having a built-in incidence. Filler blocks were also provided for use when the vertical and horizontal tail were removed.

TESTS

The investigation was made in the Langley low-turbulence pressure tunnel at a Mach number of approximately 0.2. The tests were made at several Reynolds numbers from 0.39×10^6 to 3.7×10^6 based on the mean aerodynamic chord. The model was tested at sideslip angles of 0° and ±5° up to angles of attack of 20° at low Reynolds number decreasing to 12° at highest Reynolds number because of loads. Transition strips approximately 0.2 cm wide of No. 240 grit were attached to the fuselage, nacelles, and surfaces as shown in figure 3. The grit was located 0.5 cm behind the leading-edge surfaces, about 2.5 cm behind the nose of the fuselage and on nacelles about 4.3 cm behind the nose. (It will be noted that fig. 3 shows grit applied around the leading edge but only a narrow strip on the upper and lower surface was actually used in the investigation.)

MEASUREMENTS AND CORRECTIONS

The aerodynamic forces and moments were measured by means of a six-component, electrical strain-gage balance housed within the model. Corrections were applied to the measured angles of attack and sideslip for the deflections of the sting and balance under load. Jet boundary and blockage corrections calculated by the methods of references 9 and 10, respectively, have been applied to the data. The axial force was adjusted to a condition of free-stream static pressure at the base of the model.

PRESENTATION OF DATA

Data obtained in the present investigation as well as data obtained in previous investigations are presented in the following figures:

	Figure
Summary of previous investigations	4 and 5
Longitudinal characteristics:	
Effect of Reynolds number	6
Effect of engine nacelles	7
Effect of Reynolds number on maximum lift	8
Effect of horizontal tail	9
Lateral characteristics:	
Effect of Reynolds number	10
Effect of engine nacelles and transition	11
Effect of nacelle fillet and tail	12

DISCUSSION

Summary of Previous Results

Recent wind-tunnel investigations of a twin-engine light airplane and a 1/6-scale model have disclosed considerable differences in the aerodynamic characteristics at angles of attack near stall. Most significant of these differences are the maximum lift coefficient $C_{L,max}$ and a reversal of the effective dihedral parameter C_{l_β} as illustrated in figure 4. These data show the maximum lift coefficients of the model are well below the values determined for the airplane and the effective dihedral parameter of the model remained negative, whereas that of the airplane became positive at high angles of attack. The differences in lift characteristics might well be assumed to be associated with the differences in the Reynolds number of the investigations because two-dimensional

data obtained from references 7 and 8 show large increases in maximum section lift coefficient $c_{l,max}$ in the range of Reynolds number under consideration as indicated in figure 5. Whether this increase in Reynolds number is also responsible for the reversal of effective dihedral is of great concern. The present investigation was initiated to determine whether the differences observed in effective dihedral were due to Reynolds number, geometric differences between the configurations, or a combination of both.

Present Investigation

Longitudinal characteristics.- The effects of varying the Reynolds number on the aerodynamic characteristics at zero sideslip are shown in figure 6(a) for the complete model and in figure 6(b) with the engine nacelles removed. The test results show, as would be expected from the section characteristics, an increase in $C_{L,max}$ with Reynolds number. Significant increases in lift were noted between Reynolds numbers of 0.39×10^6 and 1.91×10^6 with nacelles on and off. The maximum lift data with the nacelles off correlate well with the data obtained from the single-engine airplane investigation of reference 3 but the data with the nacelles on are considerably below the values obtained in tunnel tests of the twin-engine airplane (ref. 2) as shown in figures 6(a) and 8. The effect of engine nacelles is better illustrated in figure 7; at all Reynolds numbers the presence of the nacelle caused a reduction in the maximum lift coefficient compared with the plain wing. It is apparent from the breaks in the lift and the axial-force curves that the addition of nacelles causes a separation to occur at a lower angle of attack (approximately 4° lower). A brief tuft study of the model showed that early separation occurred on the wing near the trailing edge between the fuselage and the nacelles where there is a region of stream-tube expansion.

The effect of the horizontal tail on the aerodynamic characteristics in pitch is shown in figure 9 for the wing configuration with nacelles on. Longitudinal stability existed for tail-on configurations and the tail produced large nose-down pitching moments at the higher angles of attack.

Lateral-directional characteristics.- The effects of Reynolds number, model configuration, and fixed boundary-layer transition strips on the characteristics in sideslip are shown in figures 10, 11, and 12. These results show the effective dihedral parameter C_{l_β} with the nacelles on is sensitive to Reynolds number at high angles of attack. The data of figure 10(a) show the model with nacelles off having favorable dihedral effect (negative values of C_{l_β}) throughout the angle of attack and Reynolds number range as would be expected from the results of single-engine airplane tests of reference 4. In contrast, the model with nacelles on although giving negative values of C_{l_β} at lower

Reynolds numbers gave a reversal of $C_{l\beta}$ at Reynolds numbers of 2.08×10^6 and 3.69×10^6 as did the twin-engine airplane of reference 1. The effective dihedral appears to be a function of the transition characteristics with the nacelle on, as is shown in figure 11.

The data of figure 12 show the effect of nacelle fillets on the complete model with the horizontal and vertical tail removed. Although there are some differences obtained in the absolute value of $C_{l\beta}$ between various configurations with the nacelles on, the results reinforce the fact that at Reynolds numbers close to those obtained on the airplane, the twin-nacelle configuration will show positive values of $C_{l\beta}$ near stall and negative above stall. The combined effects resulting from variations in Reynolds number, transition, fillets, and the nacelles themselves emphasize the importance of obtaining similarity parameters for the proper predictions of airplane characteristics from model results.

The data from figures 10 to 12 show that the model possesses a large degree of directional stability throughout the angle-of-attack range. No significant differences in $C_{n\beta}$ were noted with nacelles on or nacelles off (fig. 11) or with or without fillets (fig. 12). There is, however, a significant difference in the variation of $C_{n\beta}$ with α , tails off (configuration BWNF). This model configuration had negative values of $C_{n\beta}$ at low angles of attack but at angles of attack greater than 8° the values of $C_{n\beta}$ became positive and indicated a directionally stable tail-off model.

CONCLUSIONS

Tests of a model of a light twin-engine airplane over a Reynolds number range from 0.39×10^6 to about 3.7×10^6 have indicated the following conclusions:

1. The maximum lift coefficients obtained with the engine nacelles on or off increased as the Reynolds number was increased.
2. The maximum lift coefficients obtained with the nacelles on were less than those obtained with the nacelles off.
3. At the highest Reynolds number the lift data obtained with the nacelles off correlated well with the results published in NASA Technical Note D-5700 on a single-engine version of the airplane but with the nacelles on the lift coefficients were less than those obtained on the twin-engine airplane as published in NASA Technical Note D-4983.
4. The model was longitudinally stable with large nose-down moments appearing at stall.

5. With nacelles off the model showed positive dihedral effect for all Reynolds numbers with increasing dihedral effect at the higher angles of attack.

6. With nacelles on, the model showed positive dihedral effect at low Reynolds number but at Reynolds numbers of approximately 3×10^6 and an angle of attack about 8.5° , the model showed negative dihedral effect (positive $C_{l\beta}$).

7. The model was directionally stable for all configurations with nacelles off or on.

Langley Research Center,
National Aeronautics and Space Administration,
Hampton, Va., October 31, 1972.

REFERENCES

1. Barber, Marvin R.; Jones, Charles K.; Sisk, Thomas R.; and Haise, Fred W.: An Evaluation of the Handling Qualities of Seven General-Aviation Aircraft. NASA TN D-3726, 1966.
2. Fink, Marvin P.; and Freeman, Delma C., Jr.: Full-Scale Wind-Tunnel Investigation of Static Longitudinal and Lateral Characteristics of a Light Twin-Engine Airplane. NASA TN D-4983, 1969.
3. Fink, Marvin P.; Freeman, Delma C., Jr.; and Greer, H. Douglas: Full-Scale Wind-Tunnel Investigation of Static Longitudinal and Lateral Characteristics of a Light Single-Engine Airplane. NASA TN D-5700, 1970.
4. Shivers, James P.; Fink, Marvin P.; and Ware, George M.: Full-Scale Wind-Tunnel Investigation of the Static Longitudinal and Lateral Characteristics of a Light Single-Engine Low-Wing Airplane. NASA TN D-5857, 1970.
5. Fink, Marvin P.; Shivers, James P.; and Smith, Charles C., Jr.: A Wind-Tunnel Investigation of Static Longitudinal and Lateral Characteristics of a Full-Scale Mockup of a Light Twin-Engine Airplane. NASA TN D-6238, 1971.
6. Fink, Marvin P.; Shivers, James P.; Greer, H. Douglas; and Megrail, James L.: The Effects of Configuration Changes on the Aerodynamic Characteristics of a Full-Scale Mockup of a Light Twin-Engine Airplane. NASA TN D-6896, 1972.
7. Racisz, Stanley F.: Effect of Independent Variations of Mach Number and Reynolds Number on the Maximum Lift Coefficients of Four NACA 6-Series Airfoil Sections. NACA TN 2824, 1952.
8. Loftin, Laurence K., Jr.: Airfoil Section Characteristics at High Angles of Attack. NACA TN 3241, 1954.
9. Garner, H. C.; Rogers, E. W. E.; Acum, W. E. A.; and Maskell, E. C.: Subsonic Wind Tunnel Wall Corrections. AGARDograph 109, Oct. 1966.
10. Herriot, John G.: Blockage Corrections for Three-Dimensional-Flow Closed-Throat Wind Tunnels, With Consideration of the Effect of Compressibility. NACA Rep. 995, 1950. (Supersedes NACA RM A7B28.)

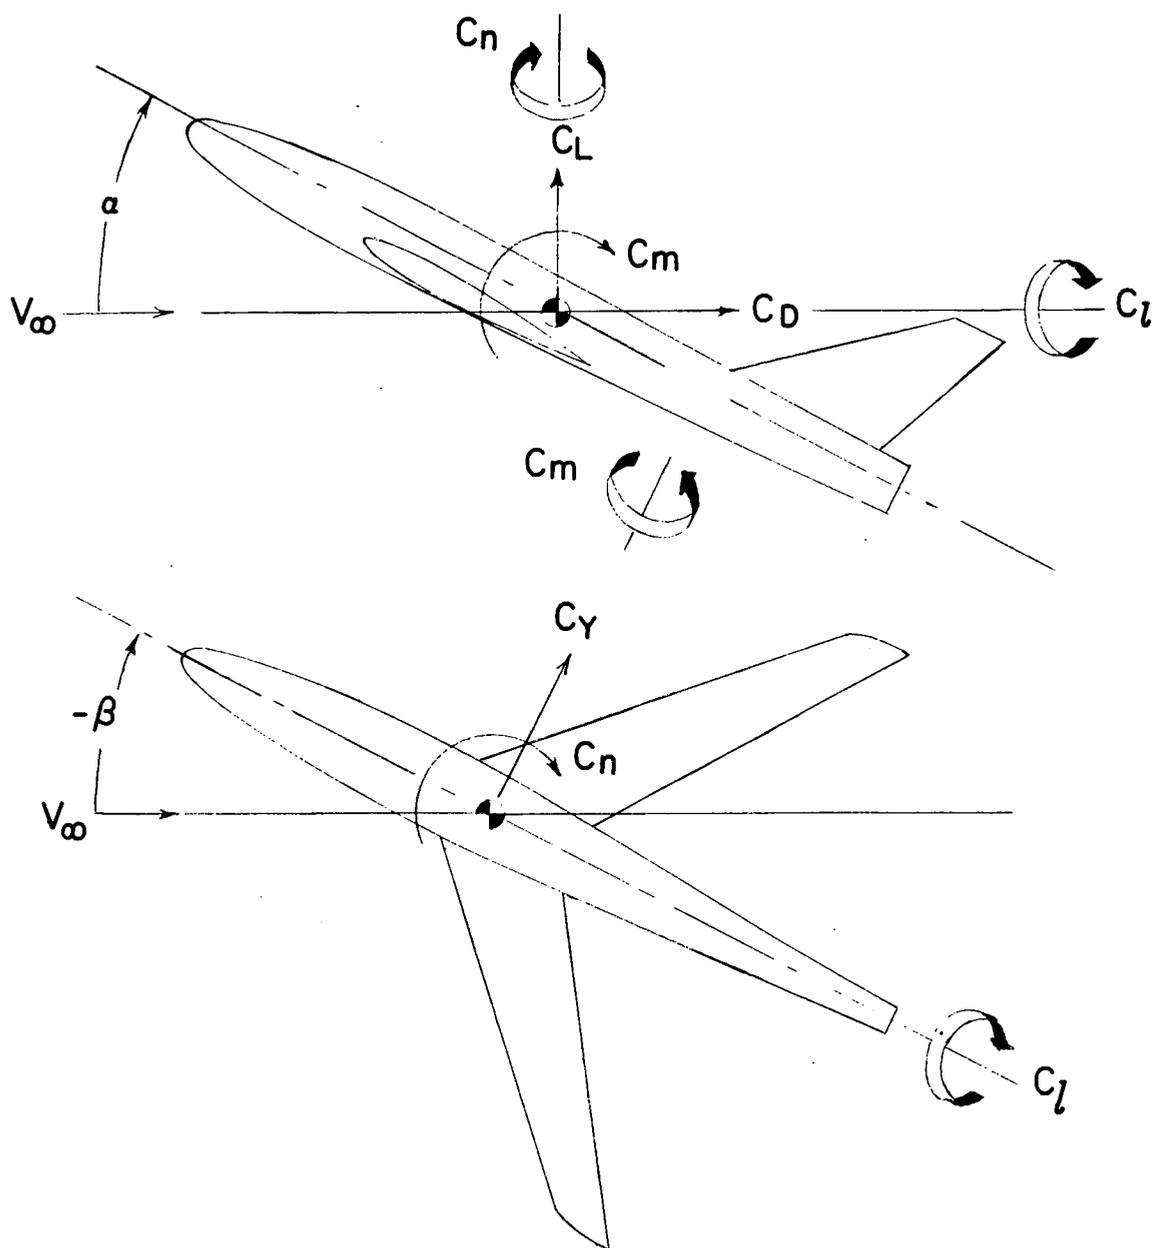


Figure 1.- Stability axes used for data presentation.



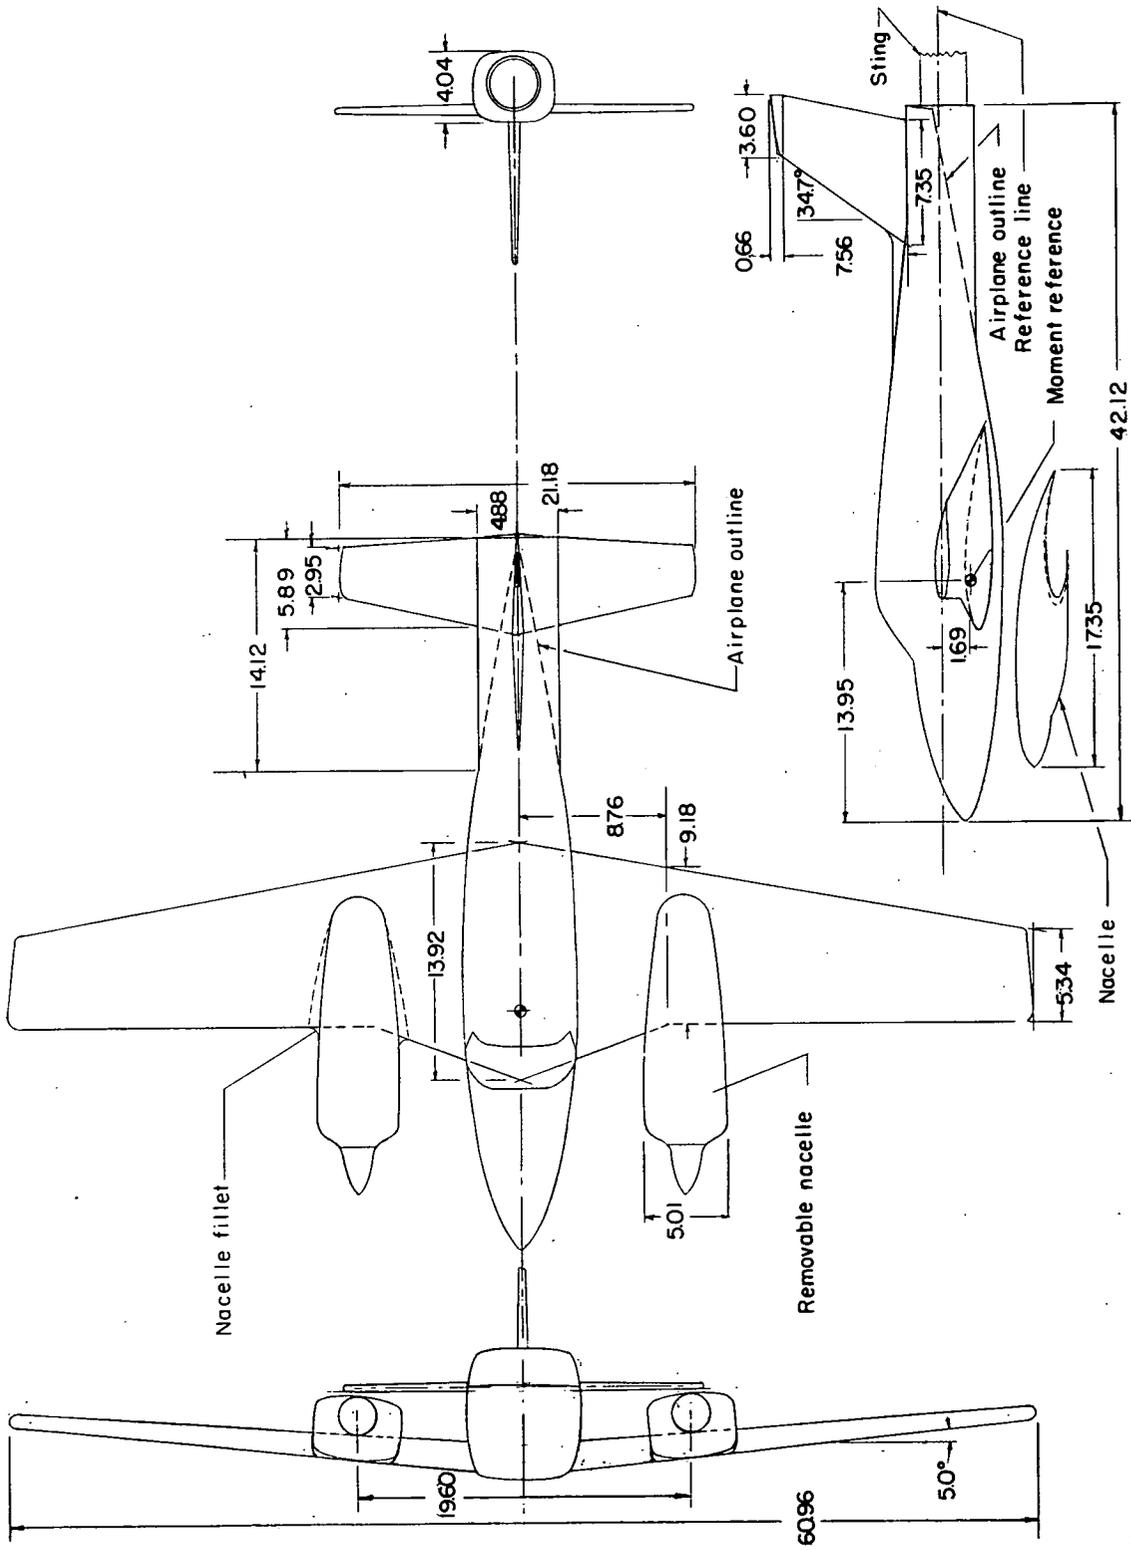


Figure 2.- Three-view drawing of the 1/18-scale model used in the investigation. All linear dimensions are in centimeters.

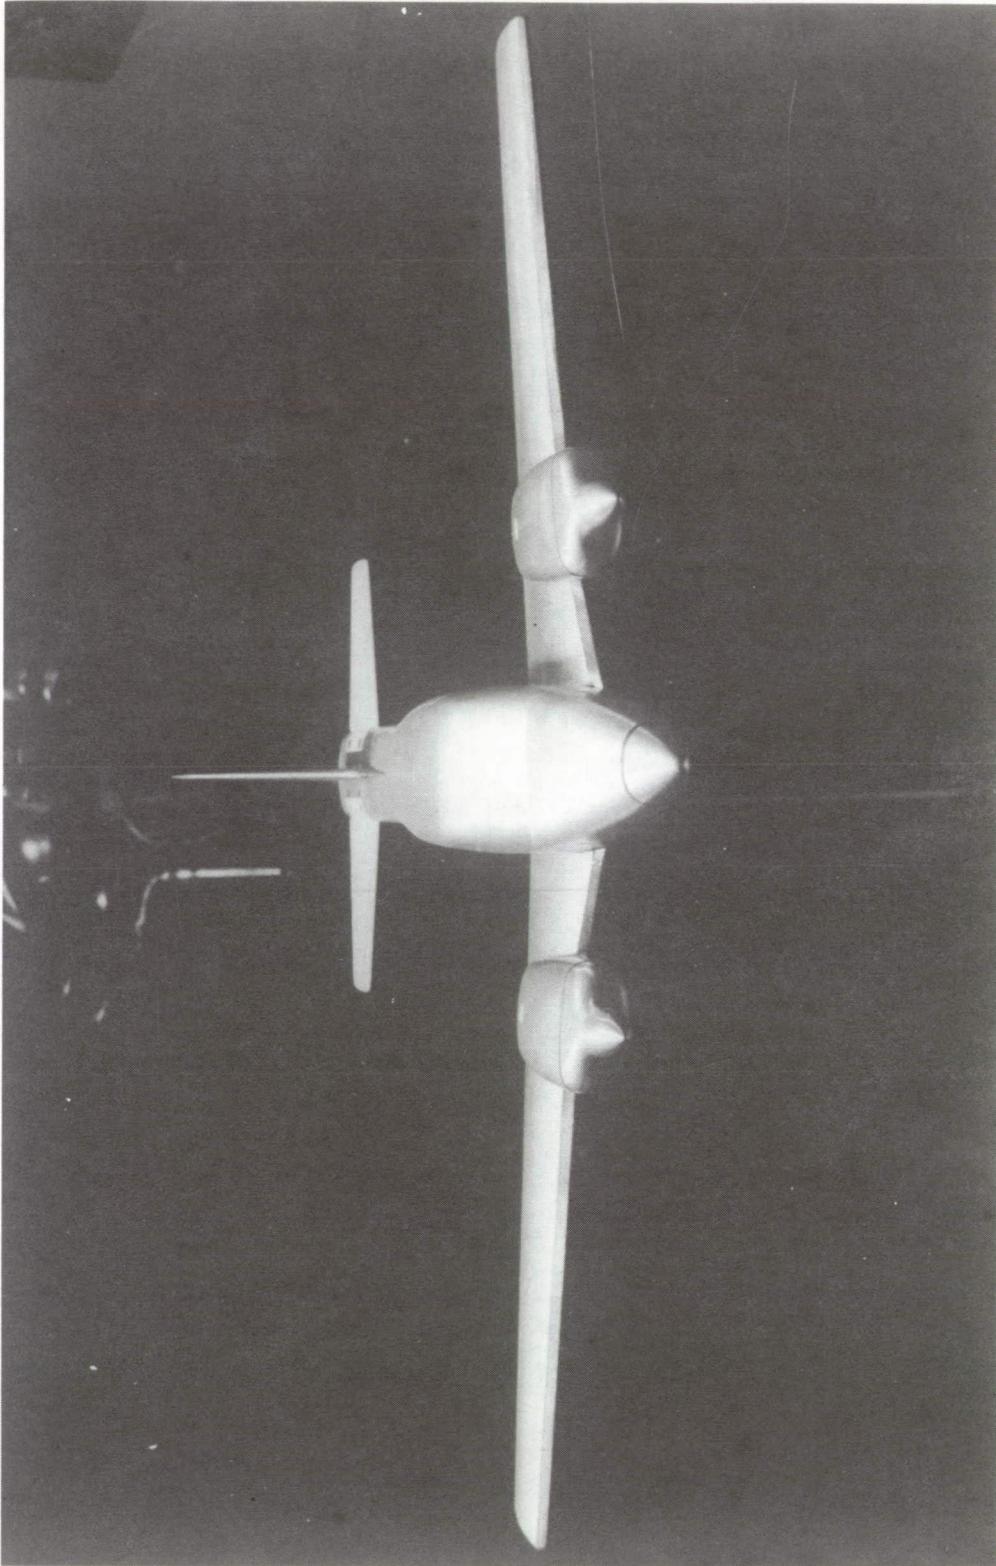

L-70-5453

Figure 3.- Photographs of the 1/18-scale model mounted in the Langley low-turbulence pressure tunnel.

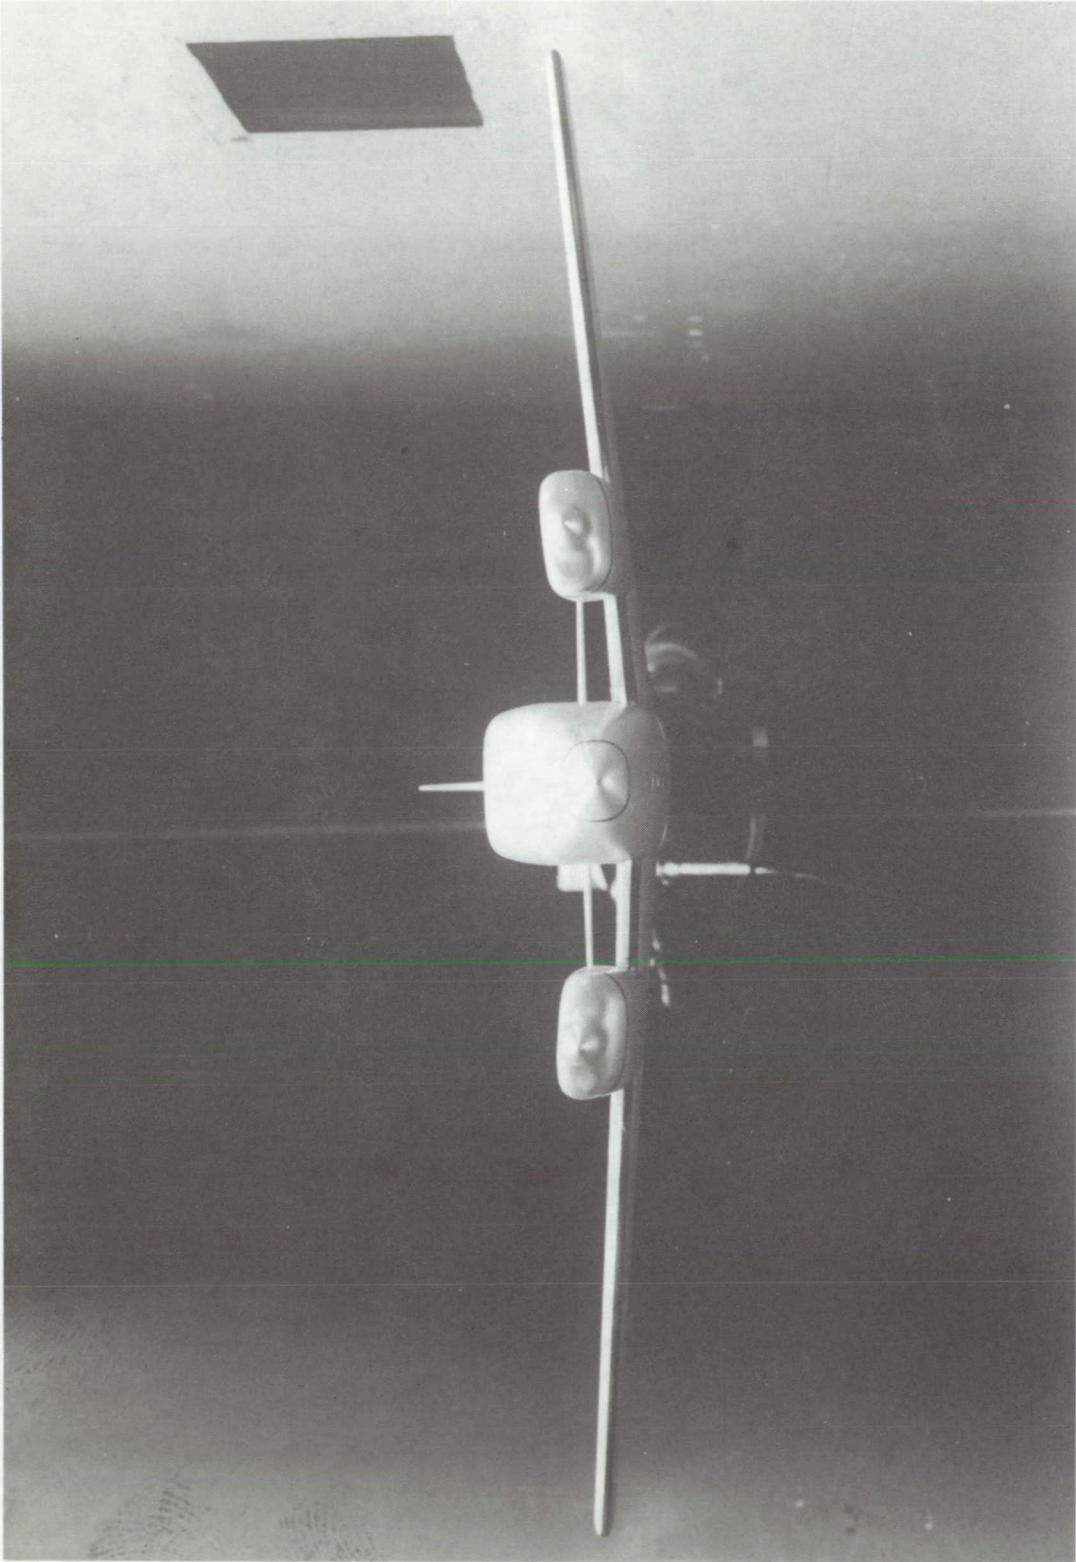

L-70-5454

Figure 3.- Concluded.

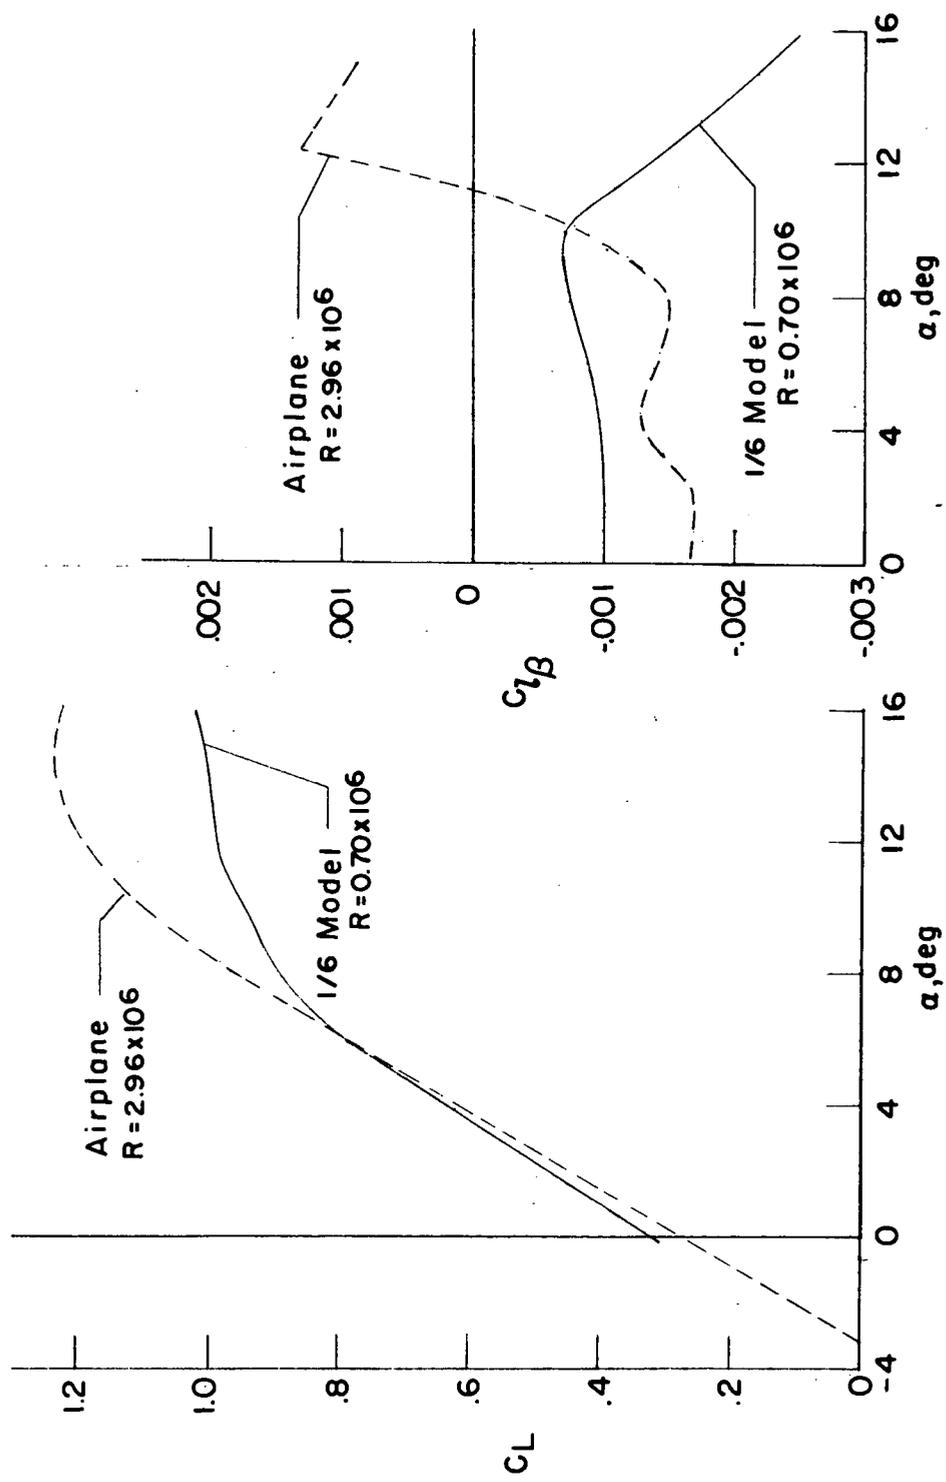


Figure 4.- Variation of lift coefficient C_L and effective dihedral parameter C_{l_β} with angle of attack for the airplane of reference 2 and the 1/6-scale model.



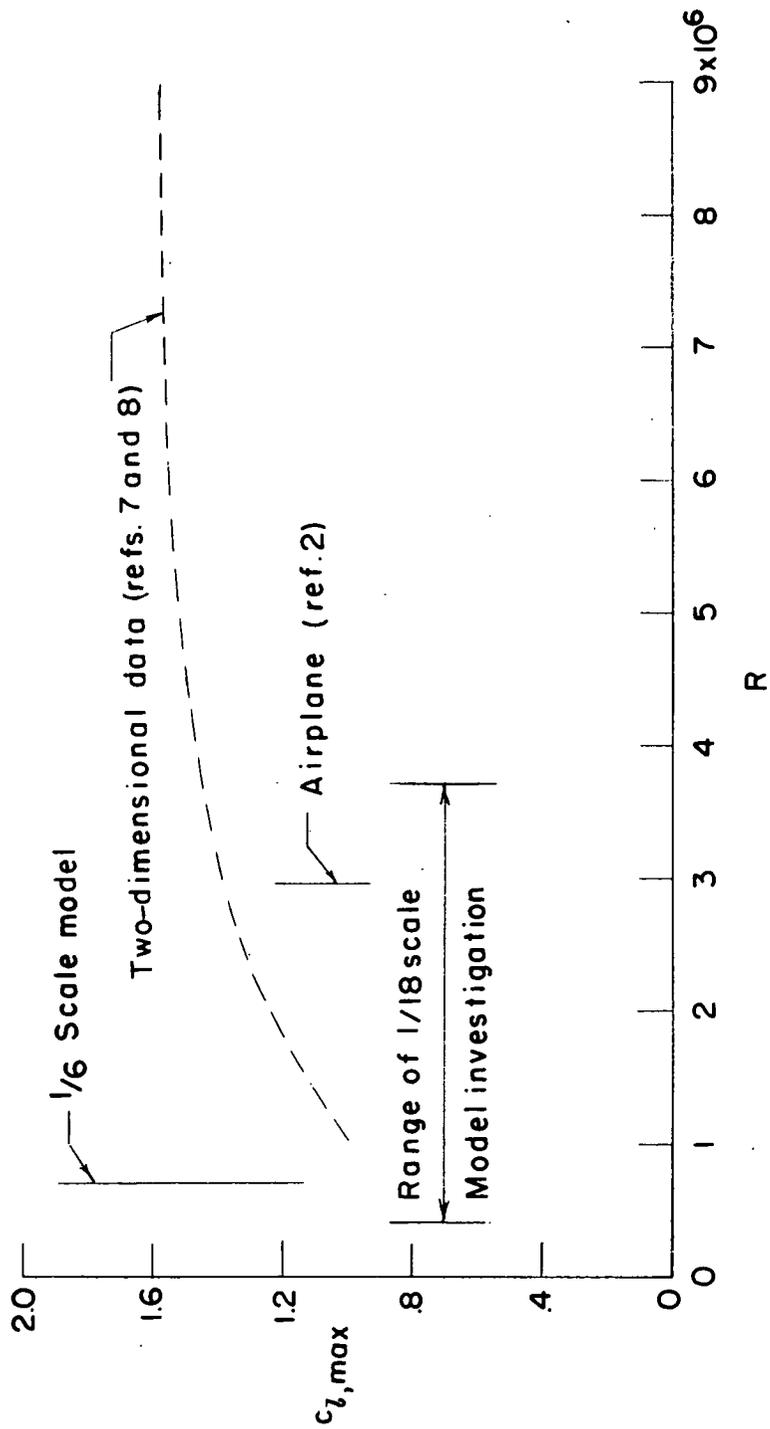


Figure 5.- Range of Reynolds numbers and section lift coefficients of interest to the current study.

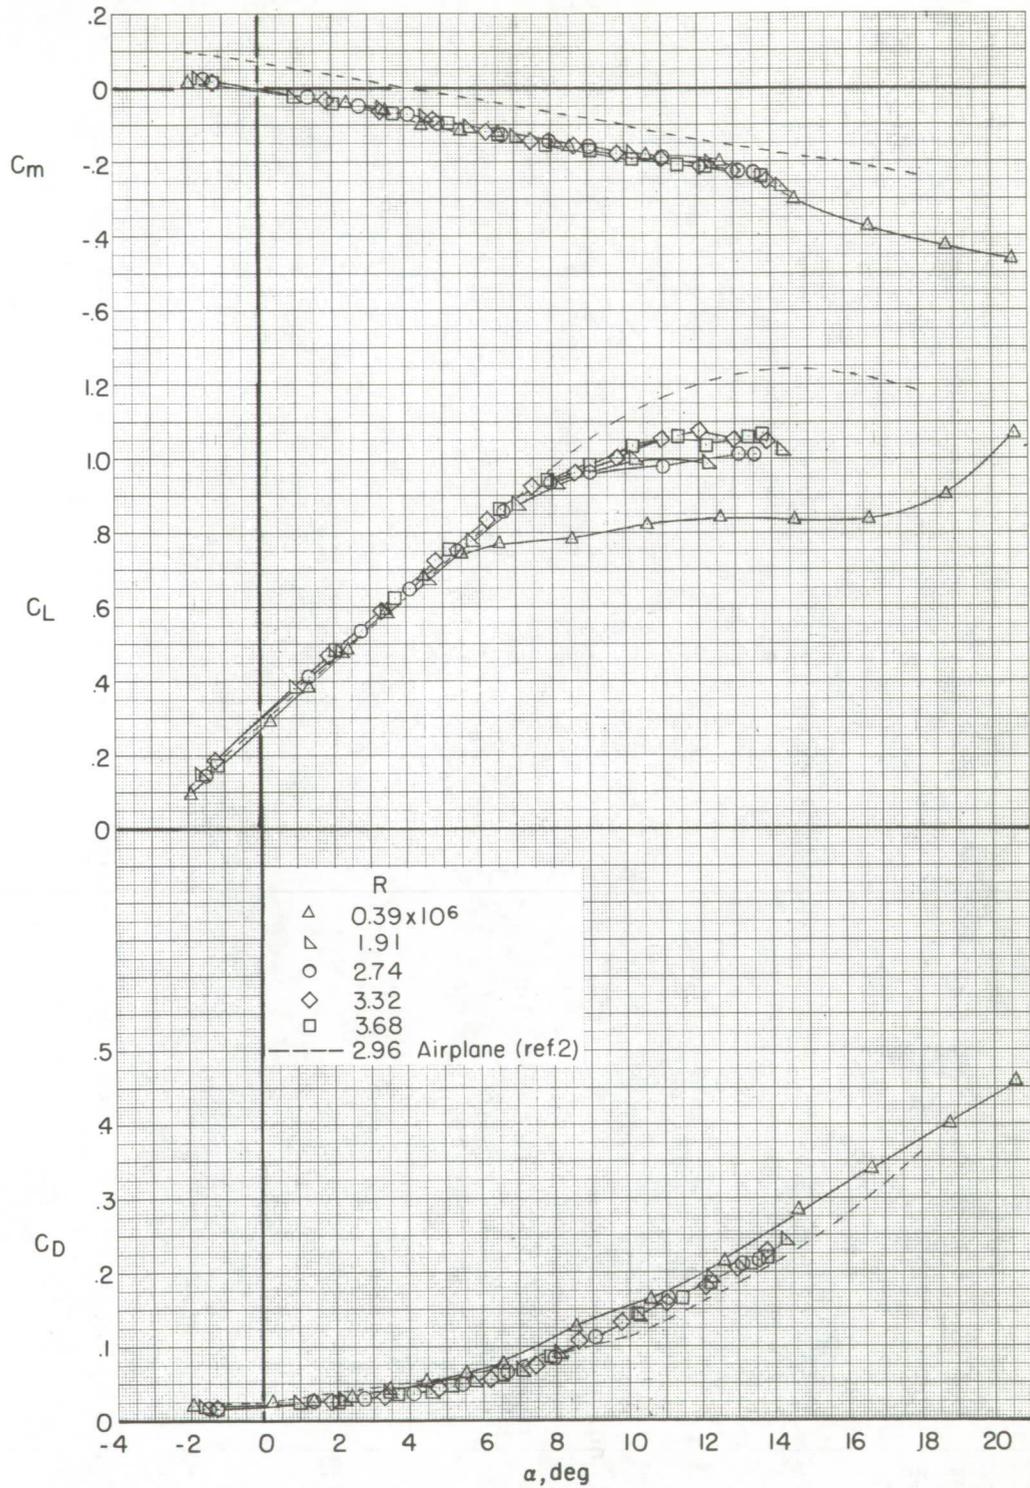


(a) BWHVN.

Figure 6.- Comparison of the model characteristics at various Reynolds numbers with those of the airplane. Transition free.

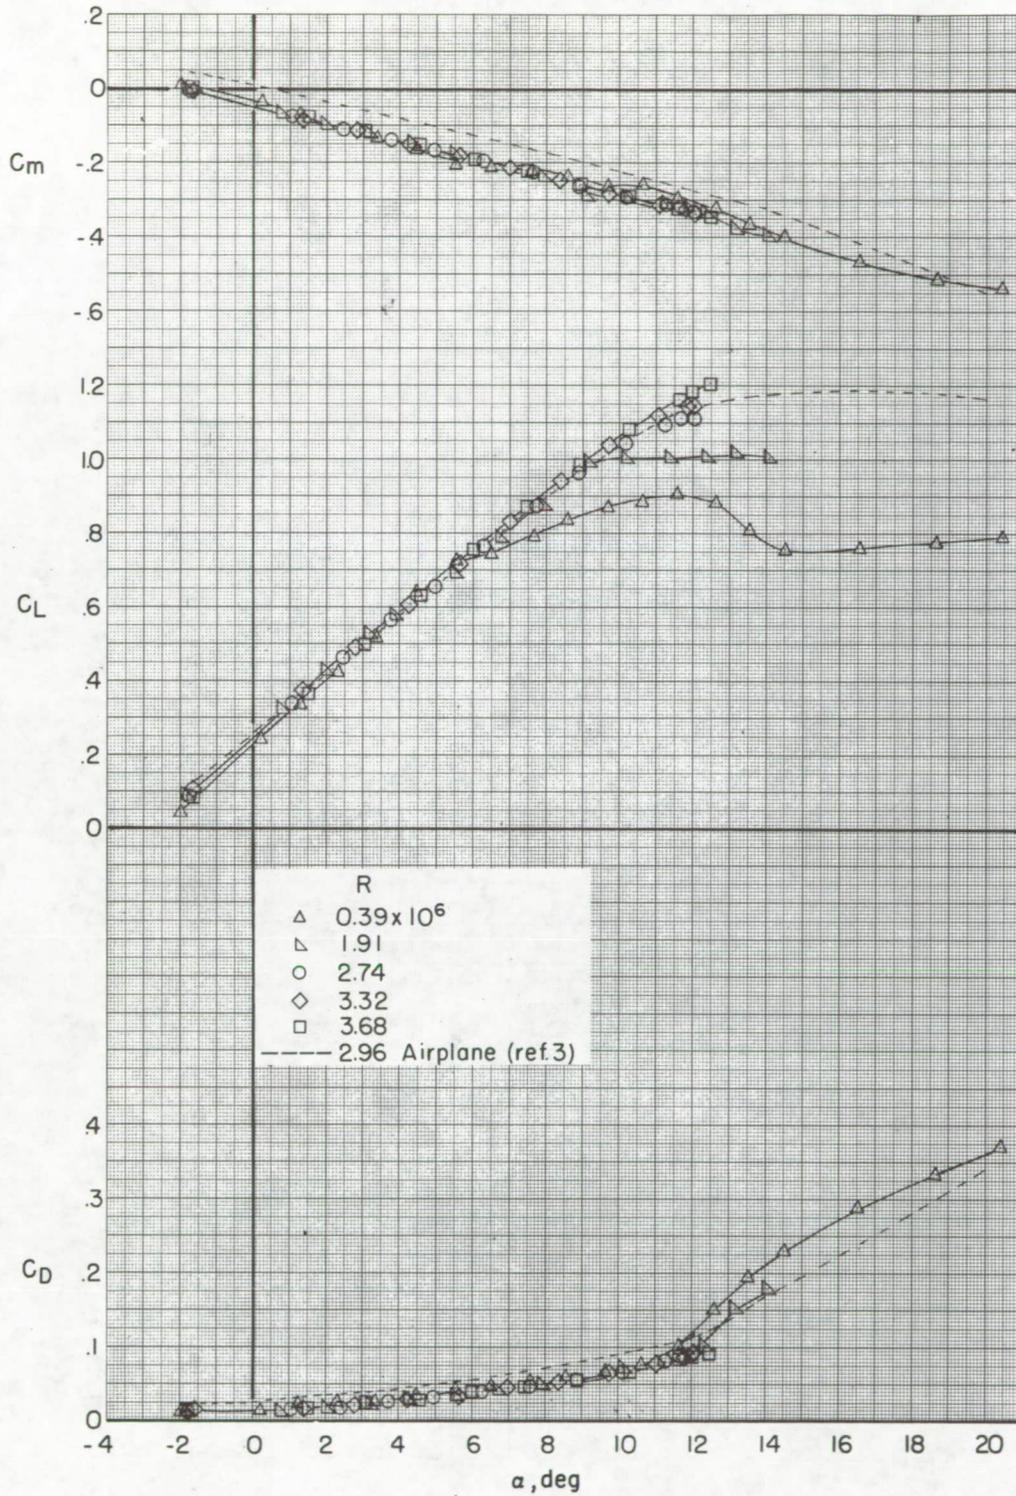


(b) BWHV.

Figure 6.- Concluded.

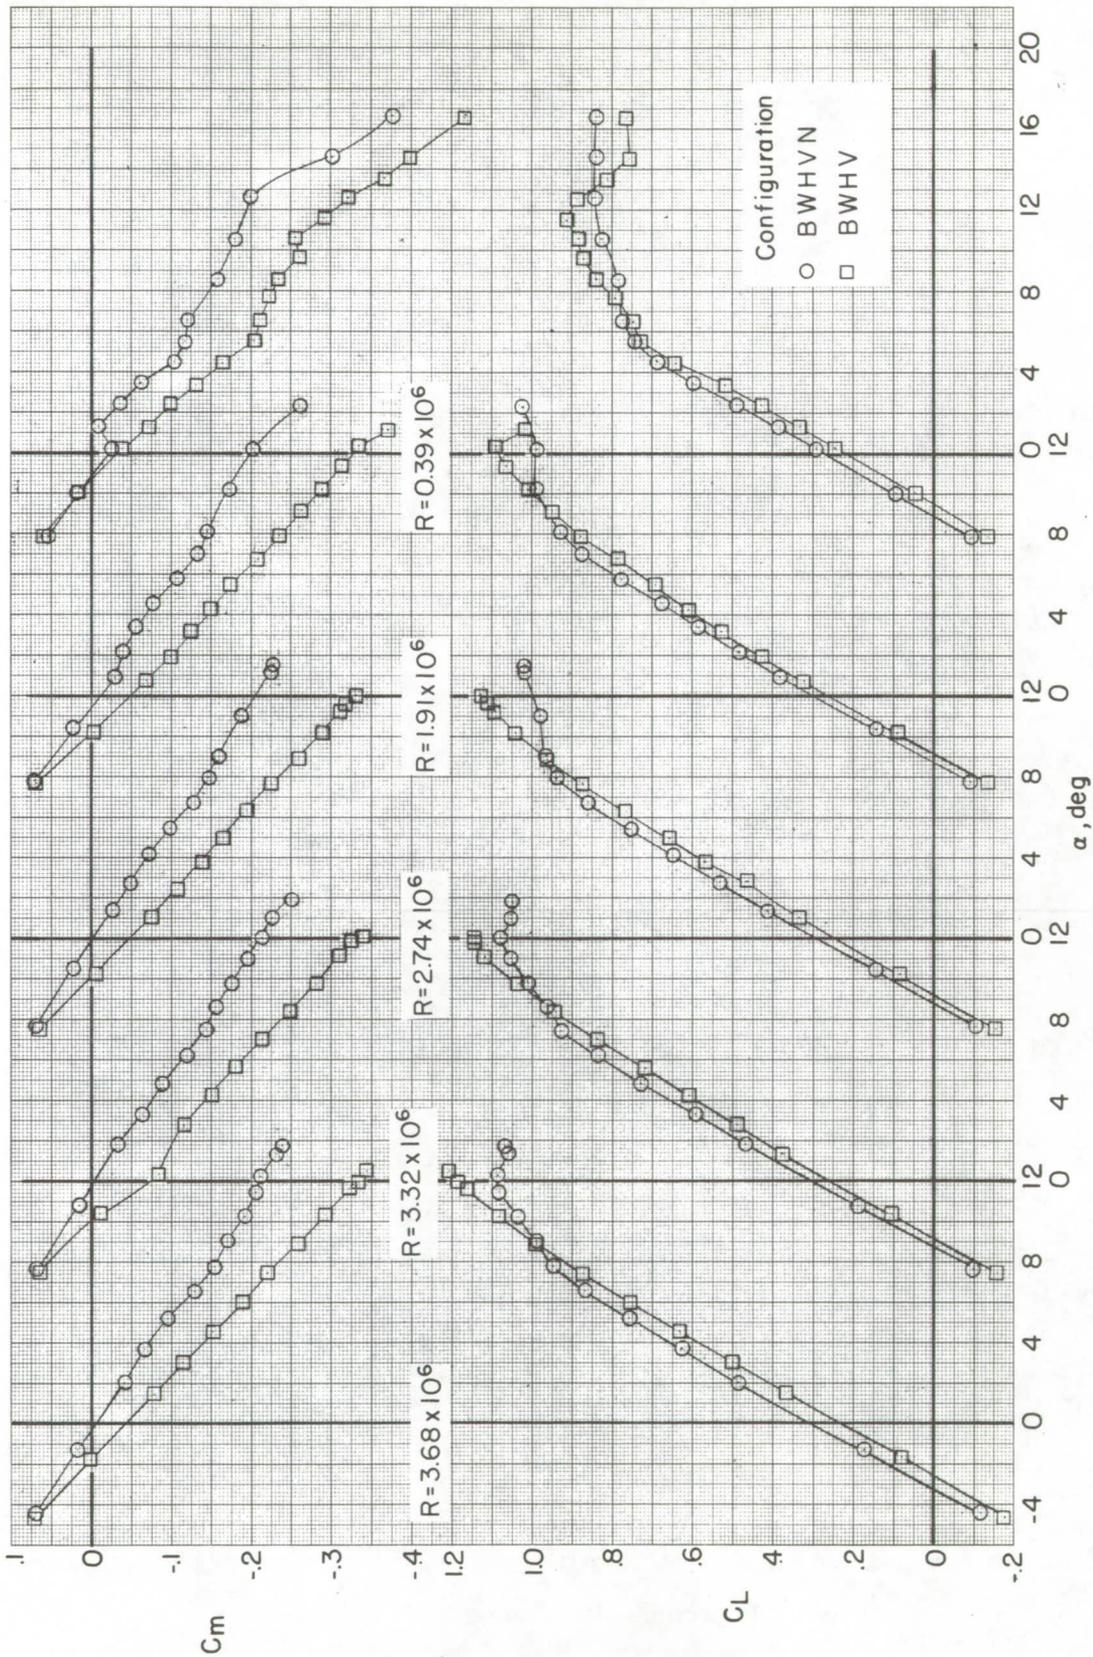

(a) C_L and C_m against α .

Figure 7.- Effect of the nacelles on the longitudinal characteristics. Transition free.

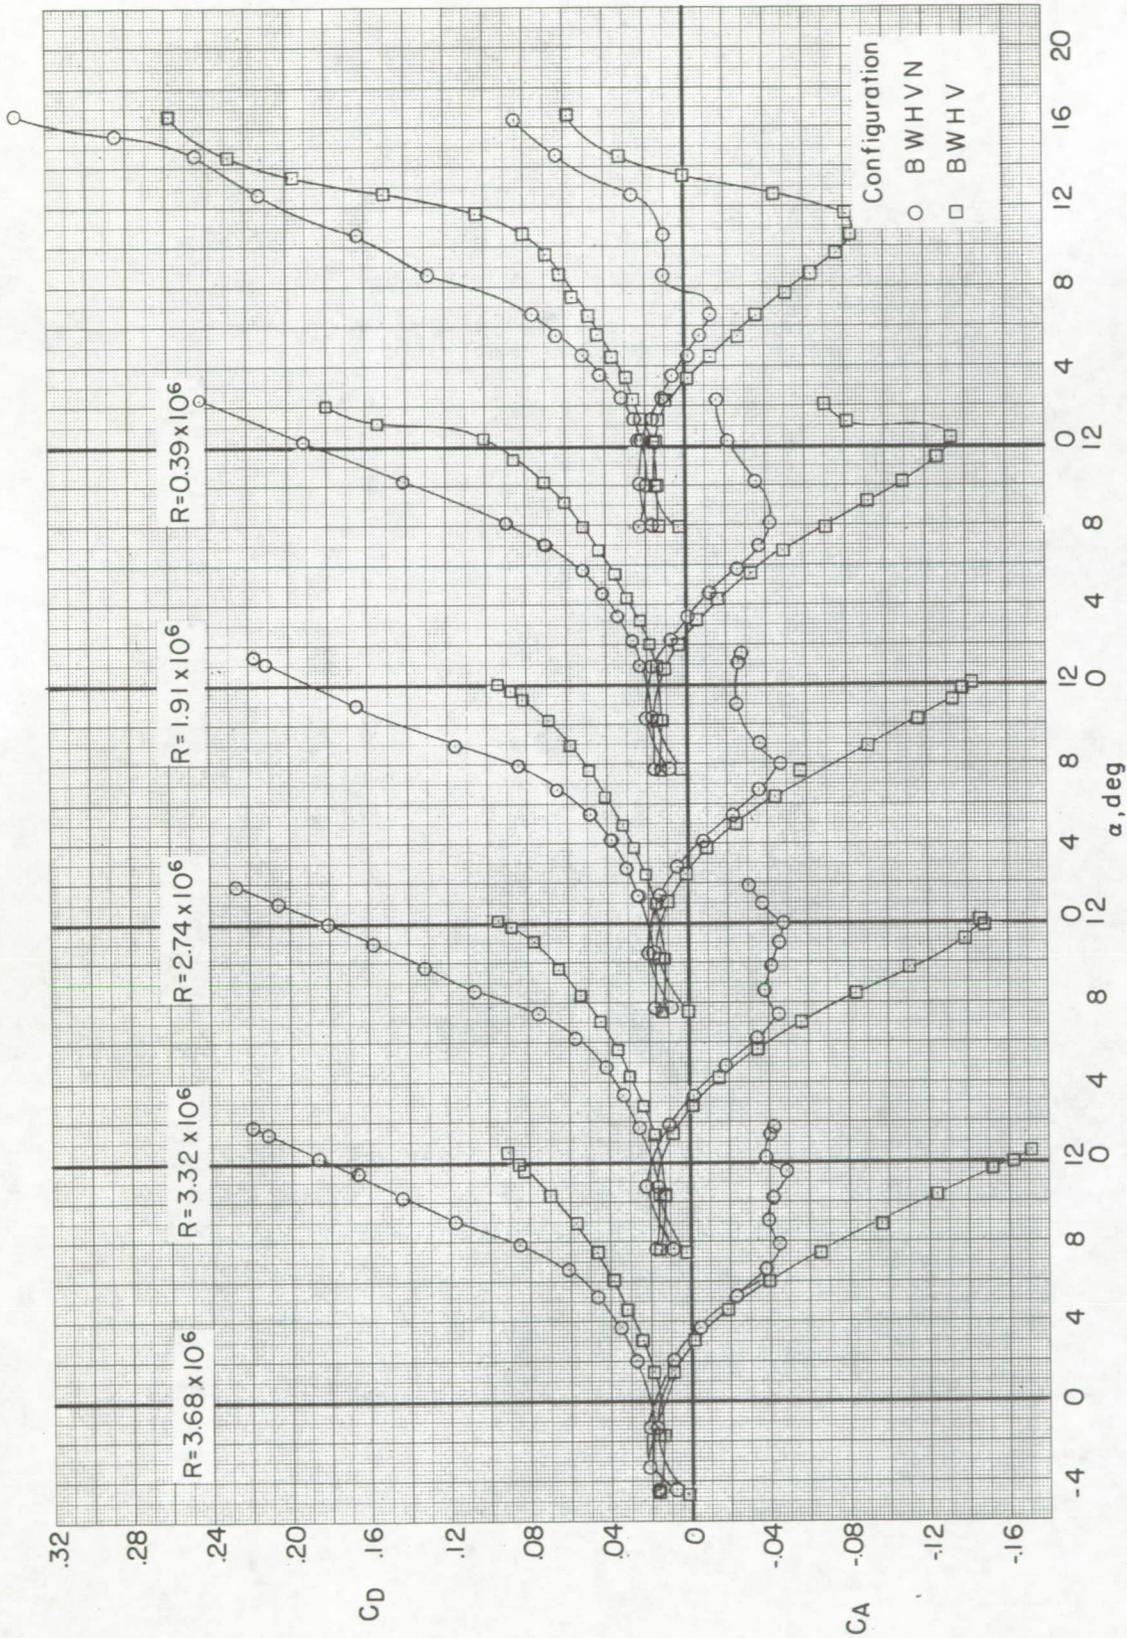

(b) C_A and C_D against α .

Figure 7.- Concluded.



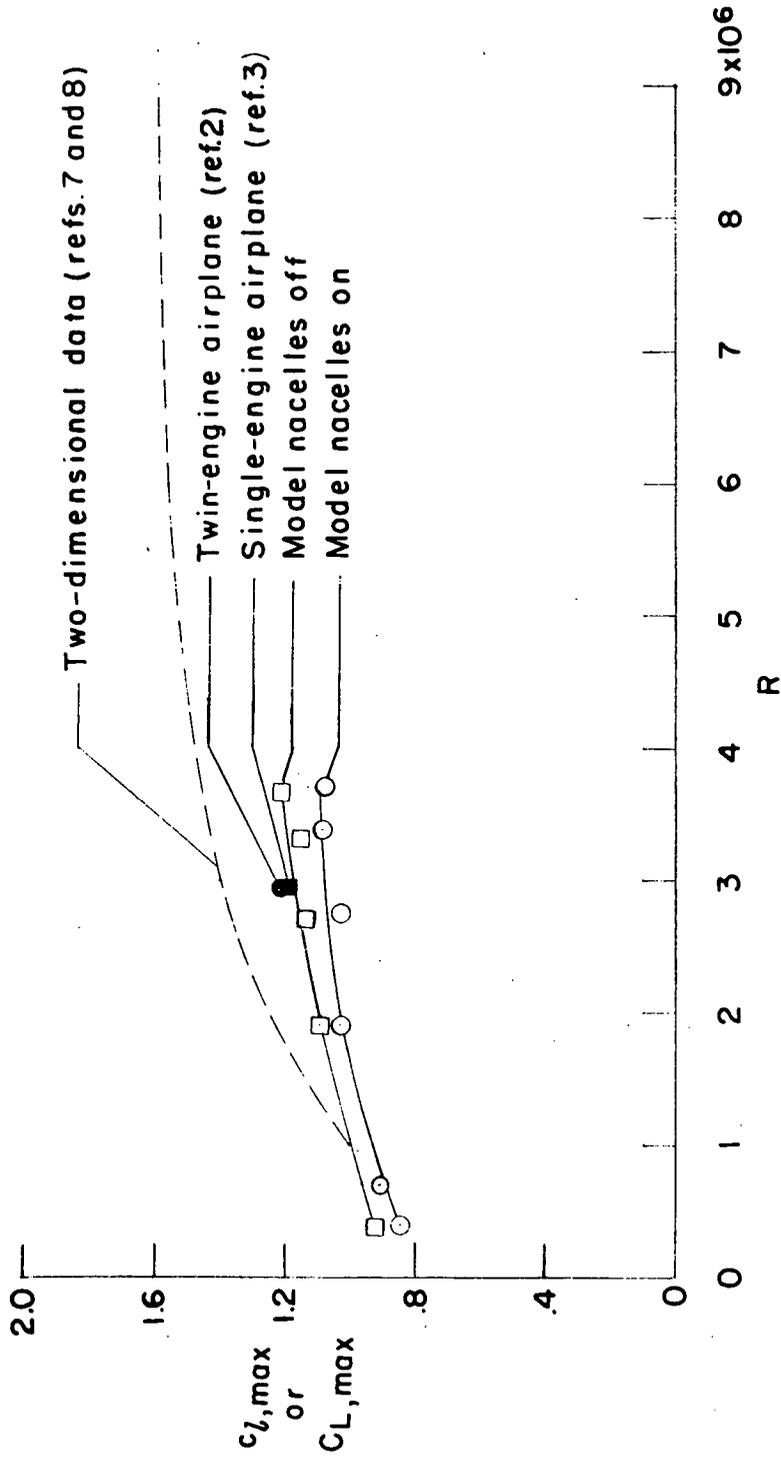


Figure 8.- Effect of Reynolds number on the maximum lift coefficients. Transition free.

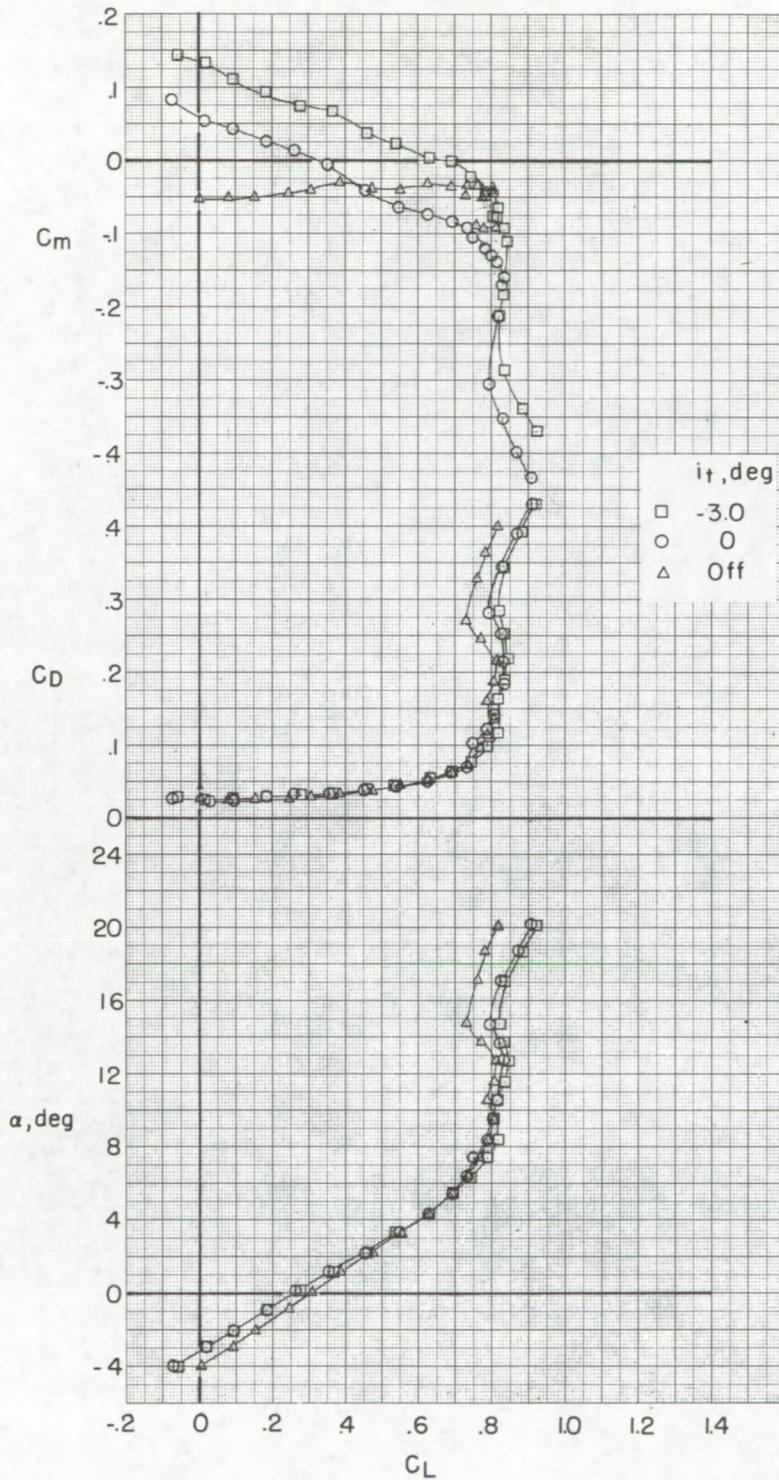


(a) $R \approx 0.38 \times 10^6$.

Figure 9.- Effect of the horizontal tail on the aerodynamic characteristics of the model at various Reynolds numbers. BWHVN.

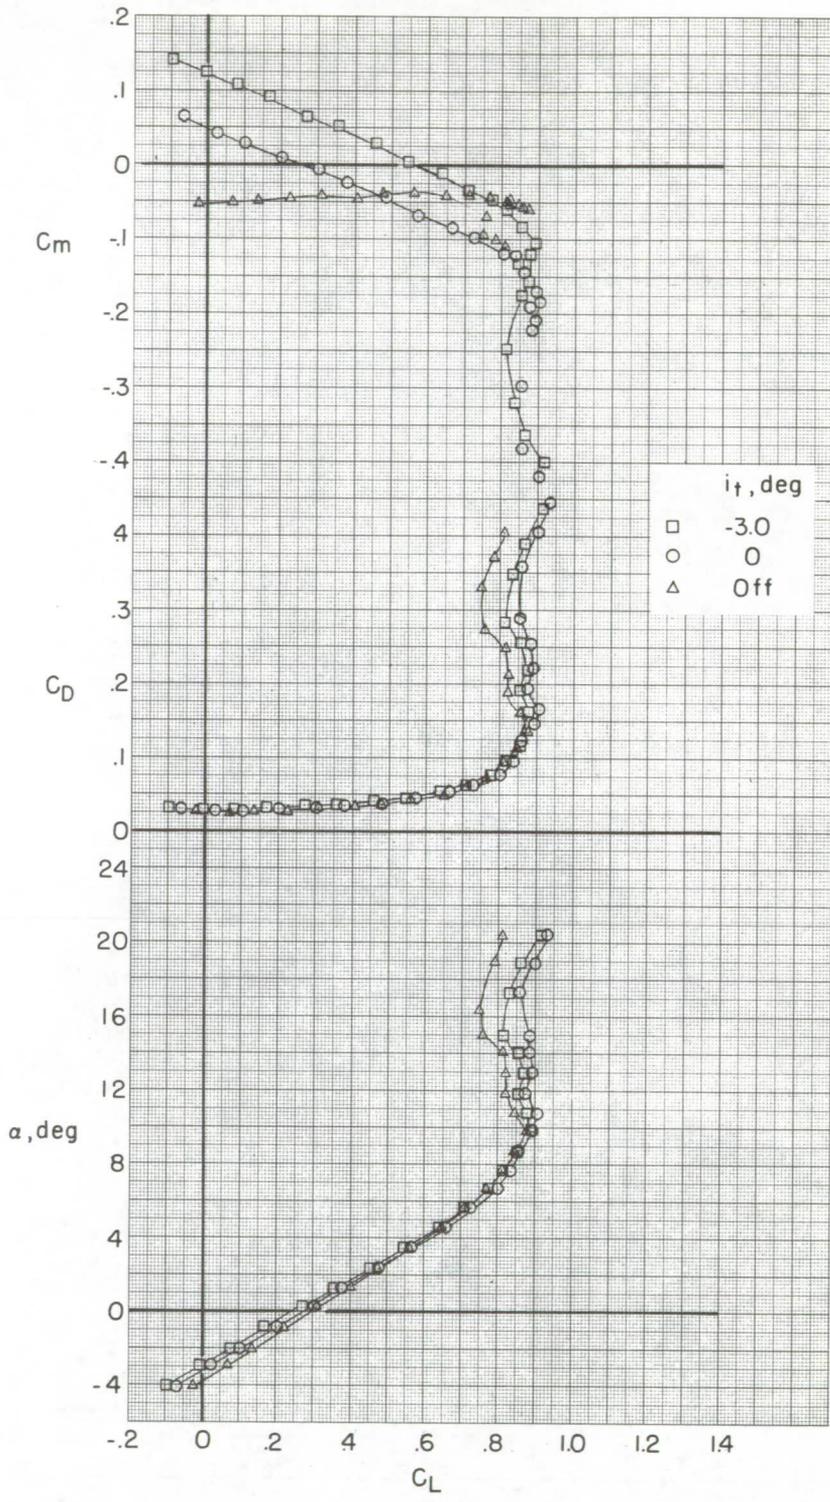


(b) $R \approx 0.69 \times 10^6$.

Figure 9.- Continued.

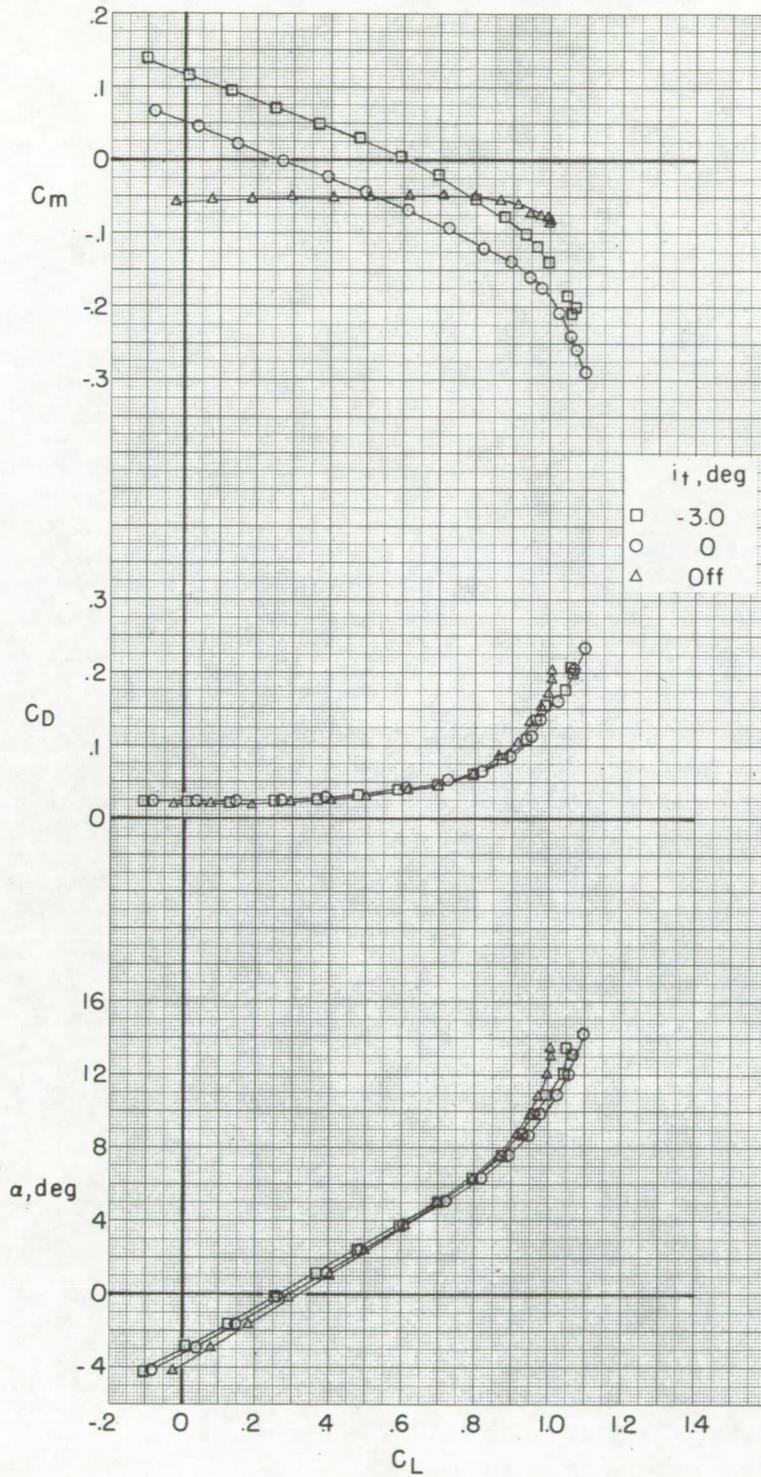


(c) $R \approx 2.81 \times 10^6$.

Figure 9.- Continued.

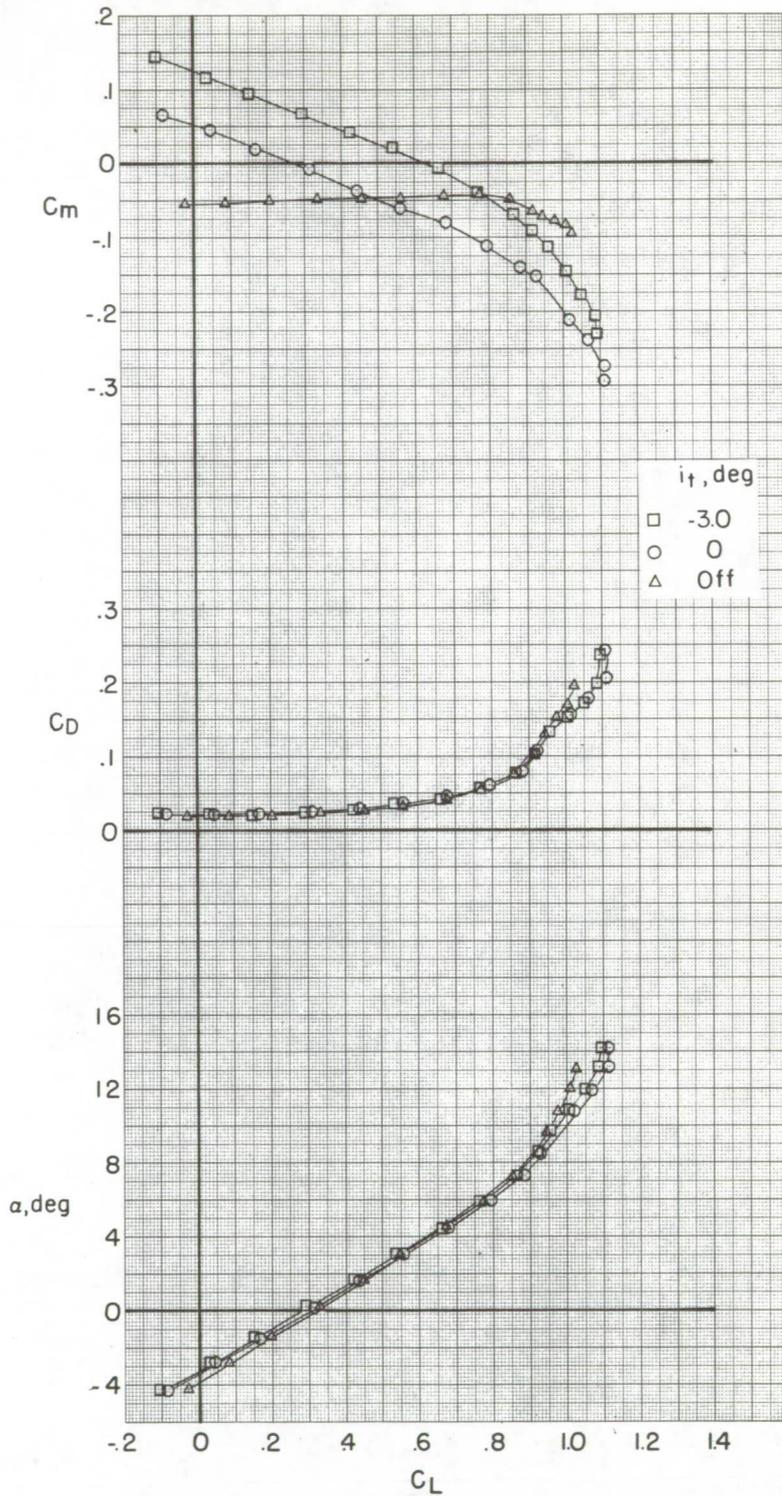


(d) $R \approx 3.67 \times 10^6$.

Figure 9.- Concluded.

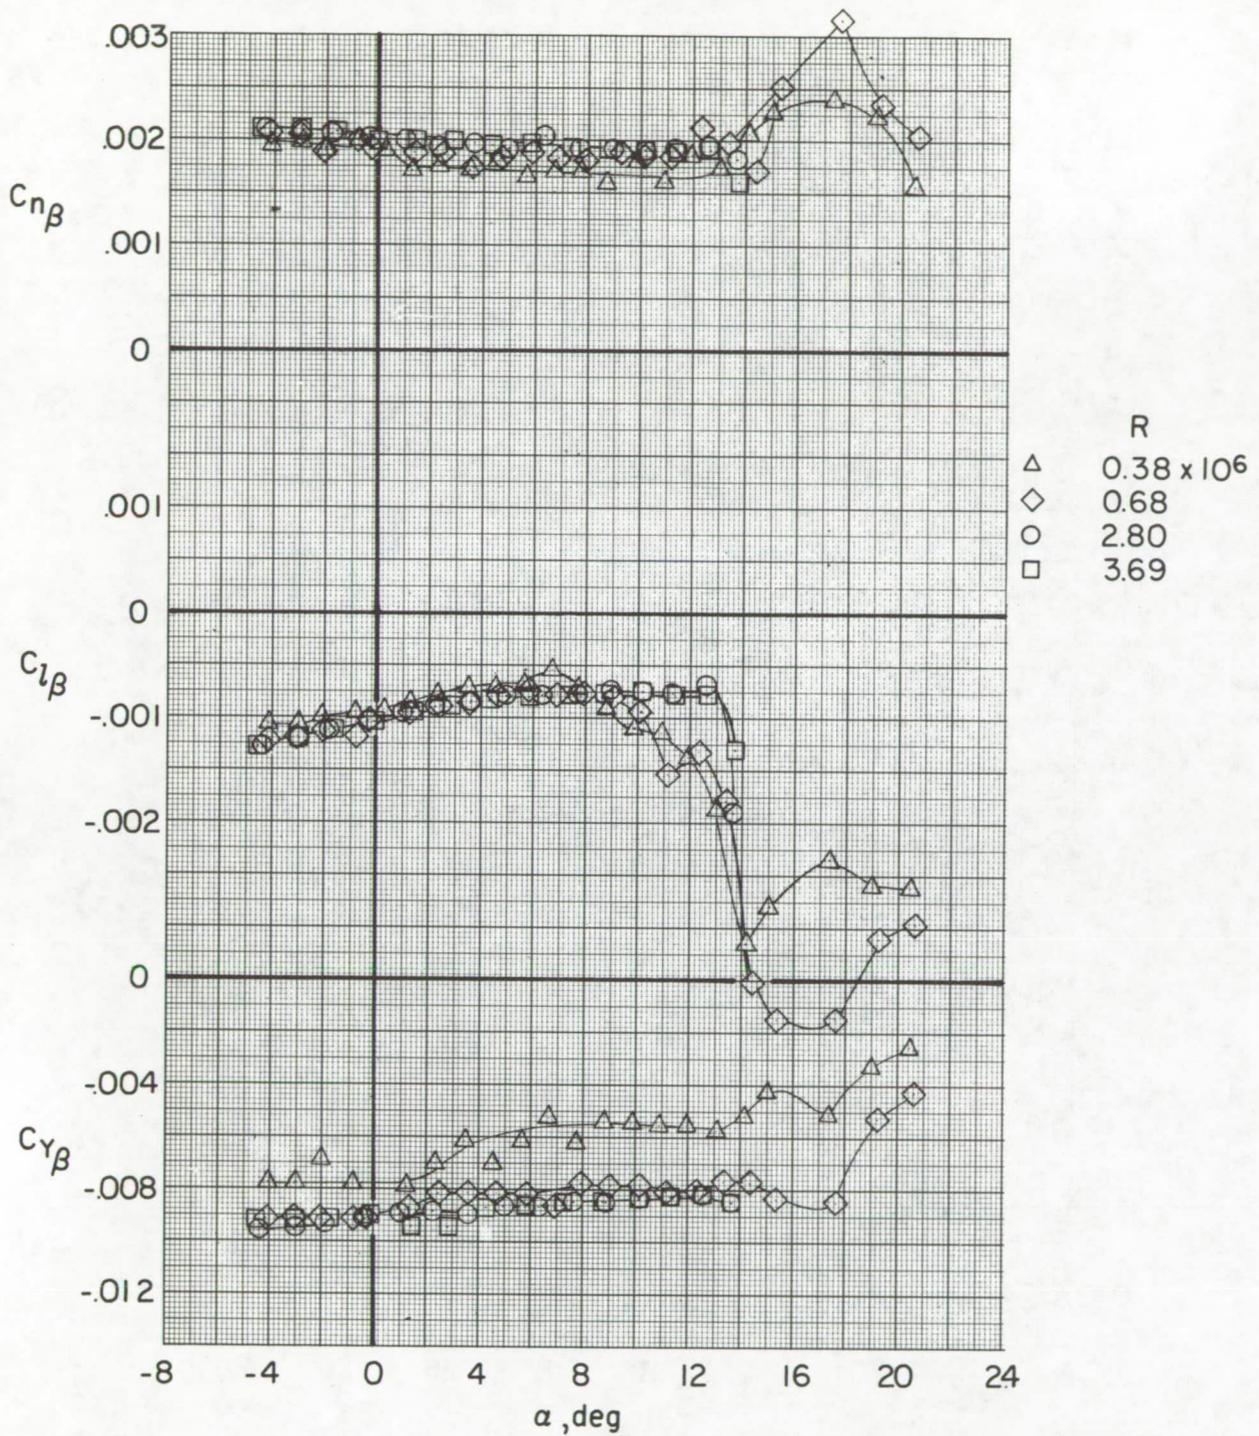


(a) Transition fixed; BWHV.

Figure 10.- Effect of Reynolds number on the lateral stability parameters.

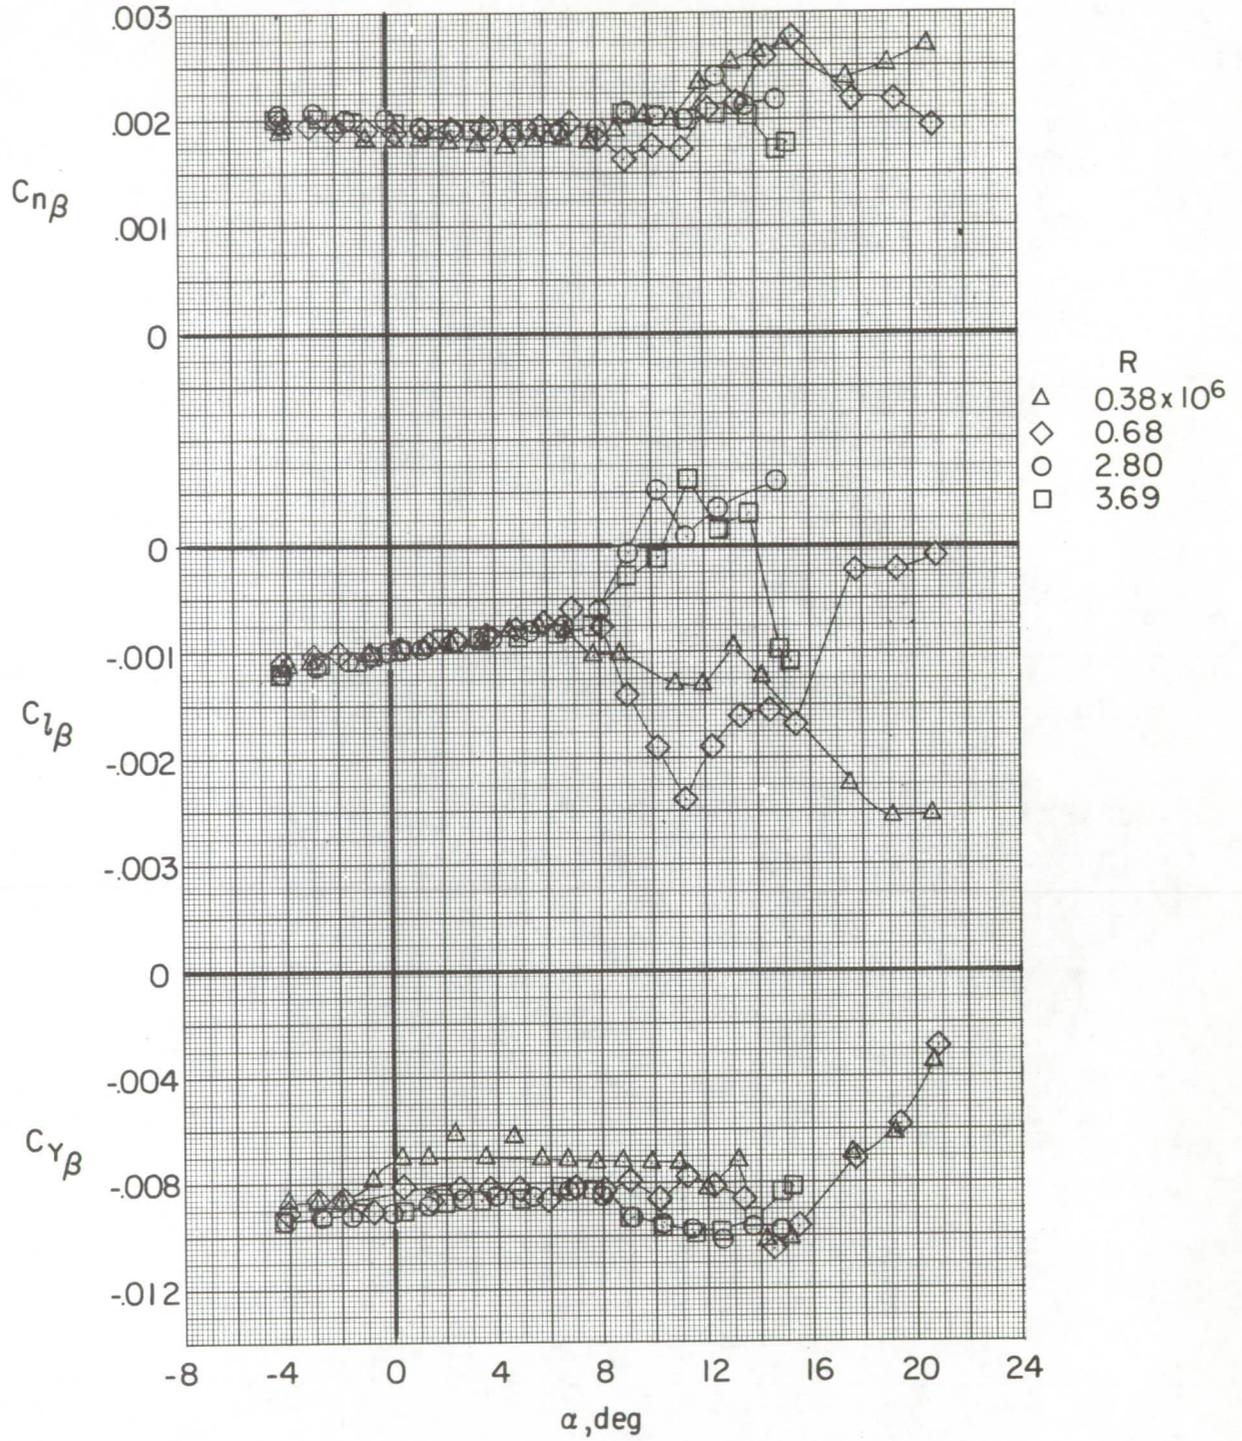


(b) Transition fixed; BWHVN.

Figure 10.- Continued.

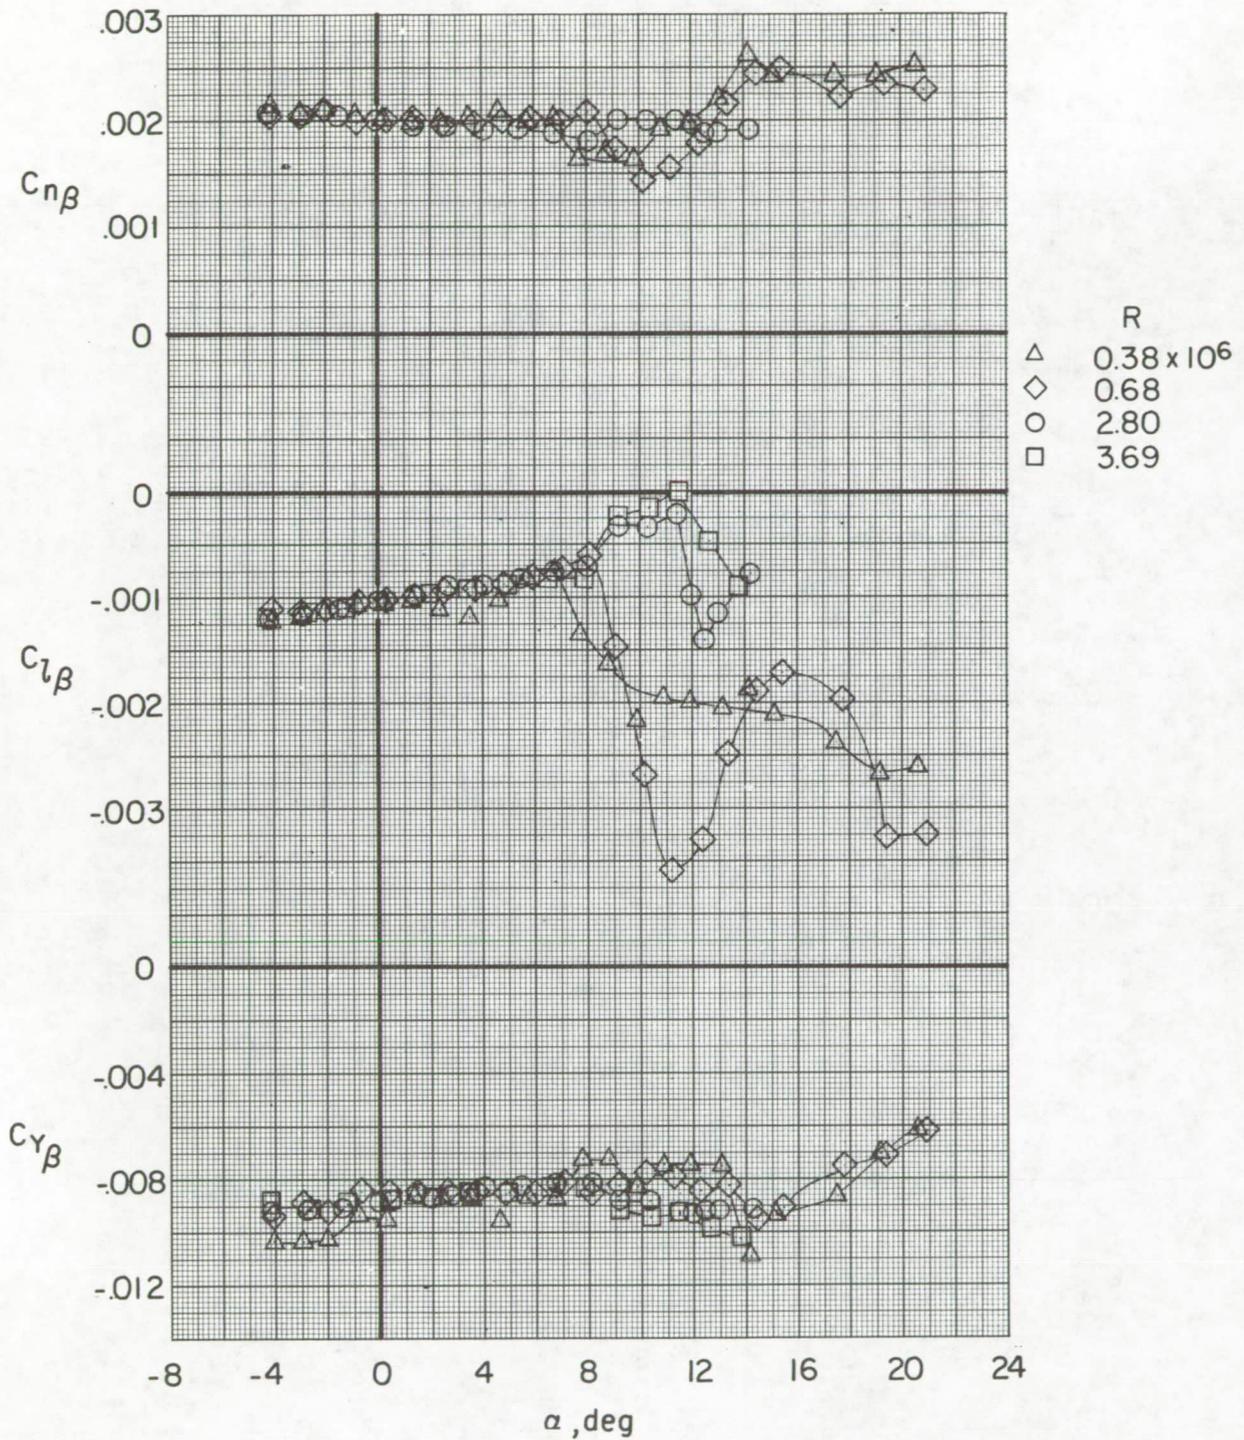


(c) Transition free; BWHVN.

Figure 10.- Concluded.

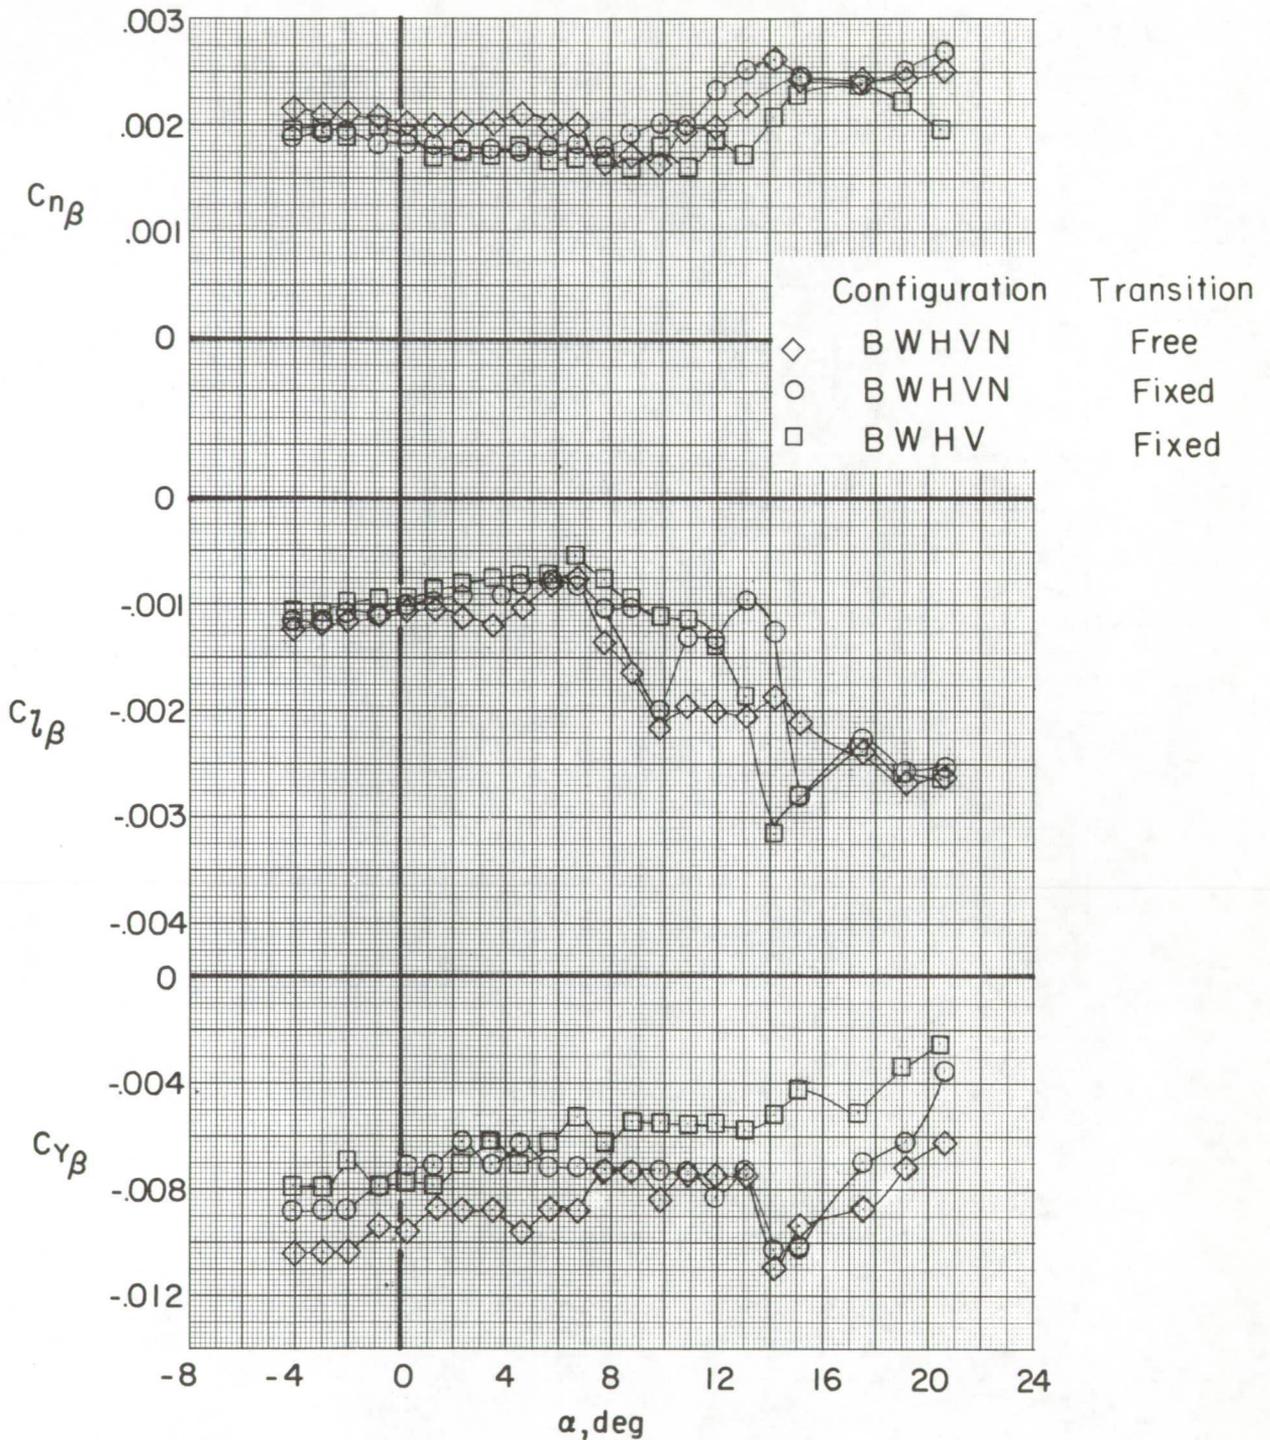


(a) $R = 0.38 \times 10^6$.

Figure 11.- Effect of nacelle and transition on the lateral-stability parameters at various Reynolds numbers.

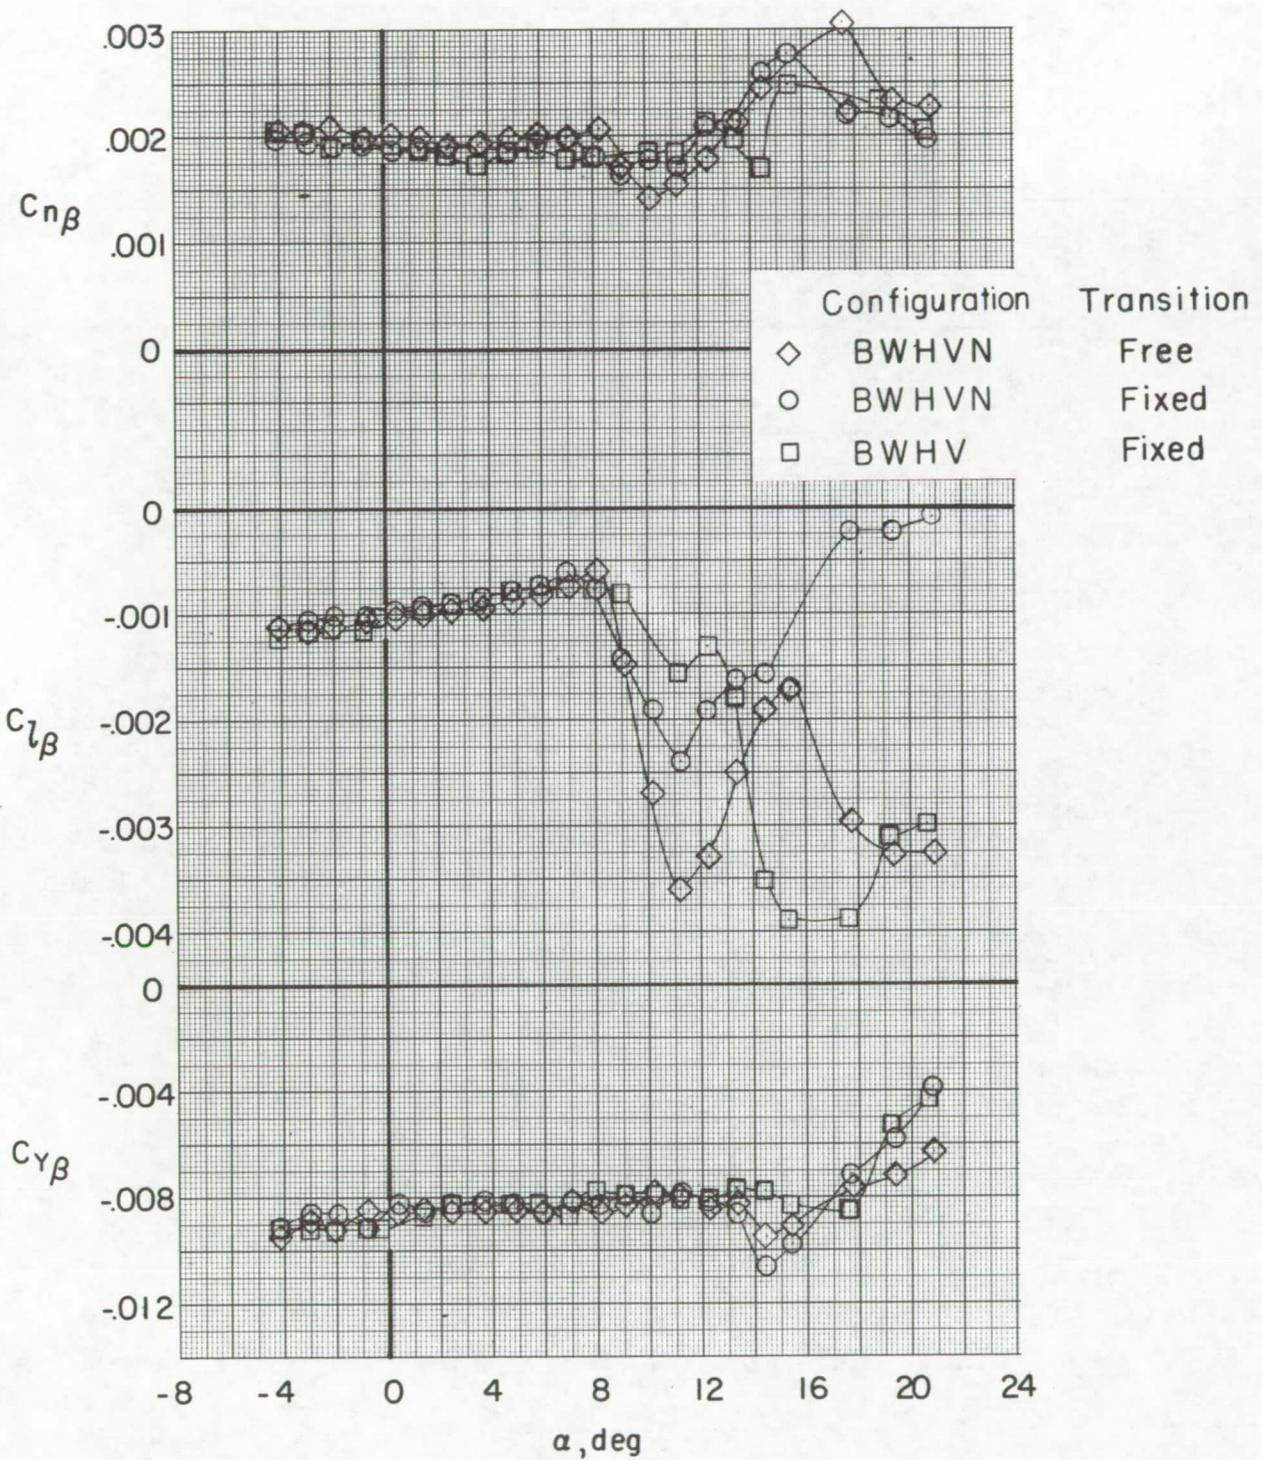


(b) $R = 0.69 \times 10^6$.

Figure 11.- Continued.

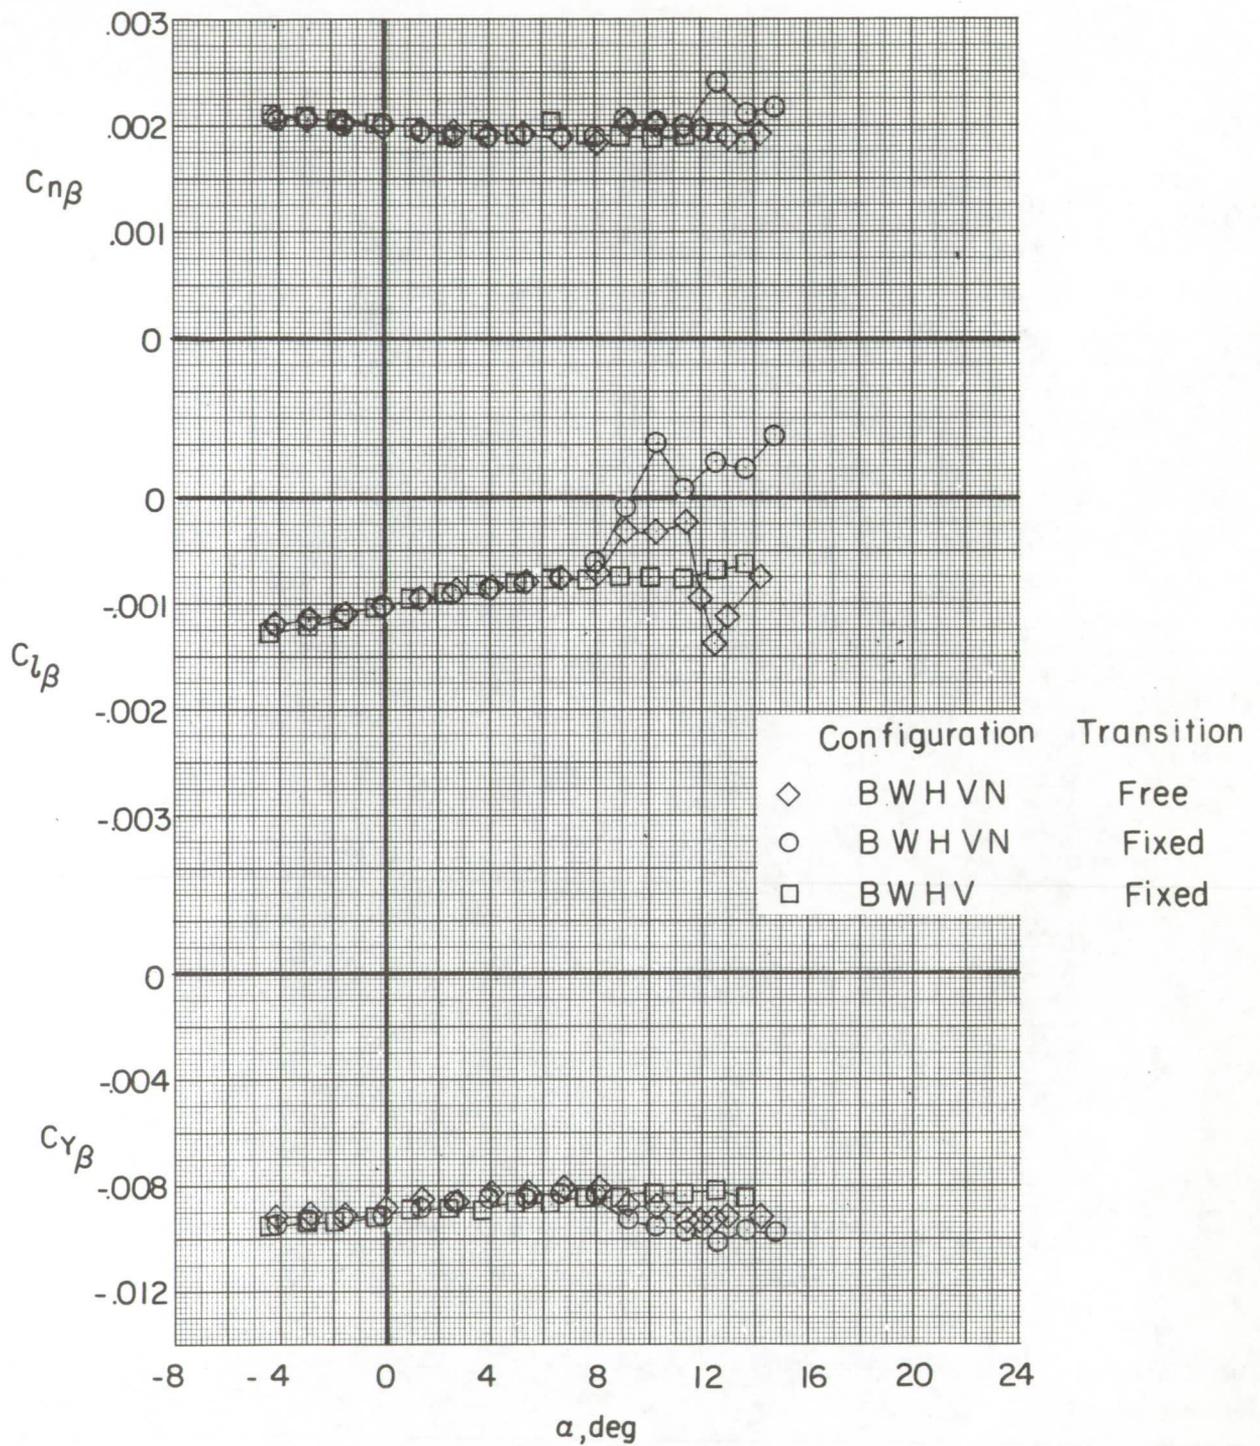


(c) $R = 2.80 \times 10^6$.

Figure 11.- Continued.

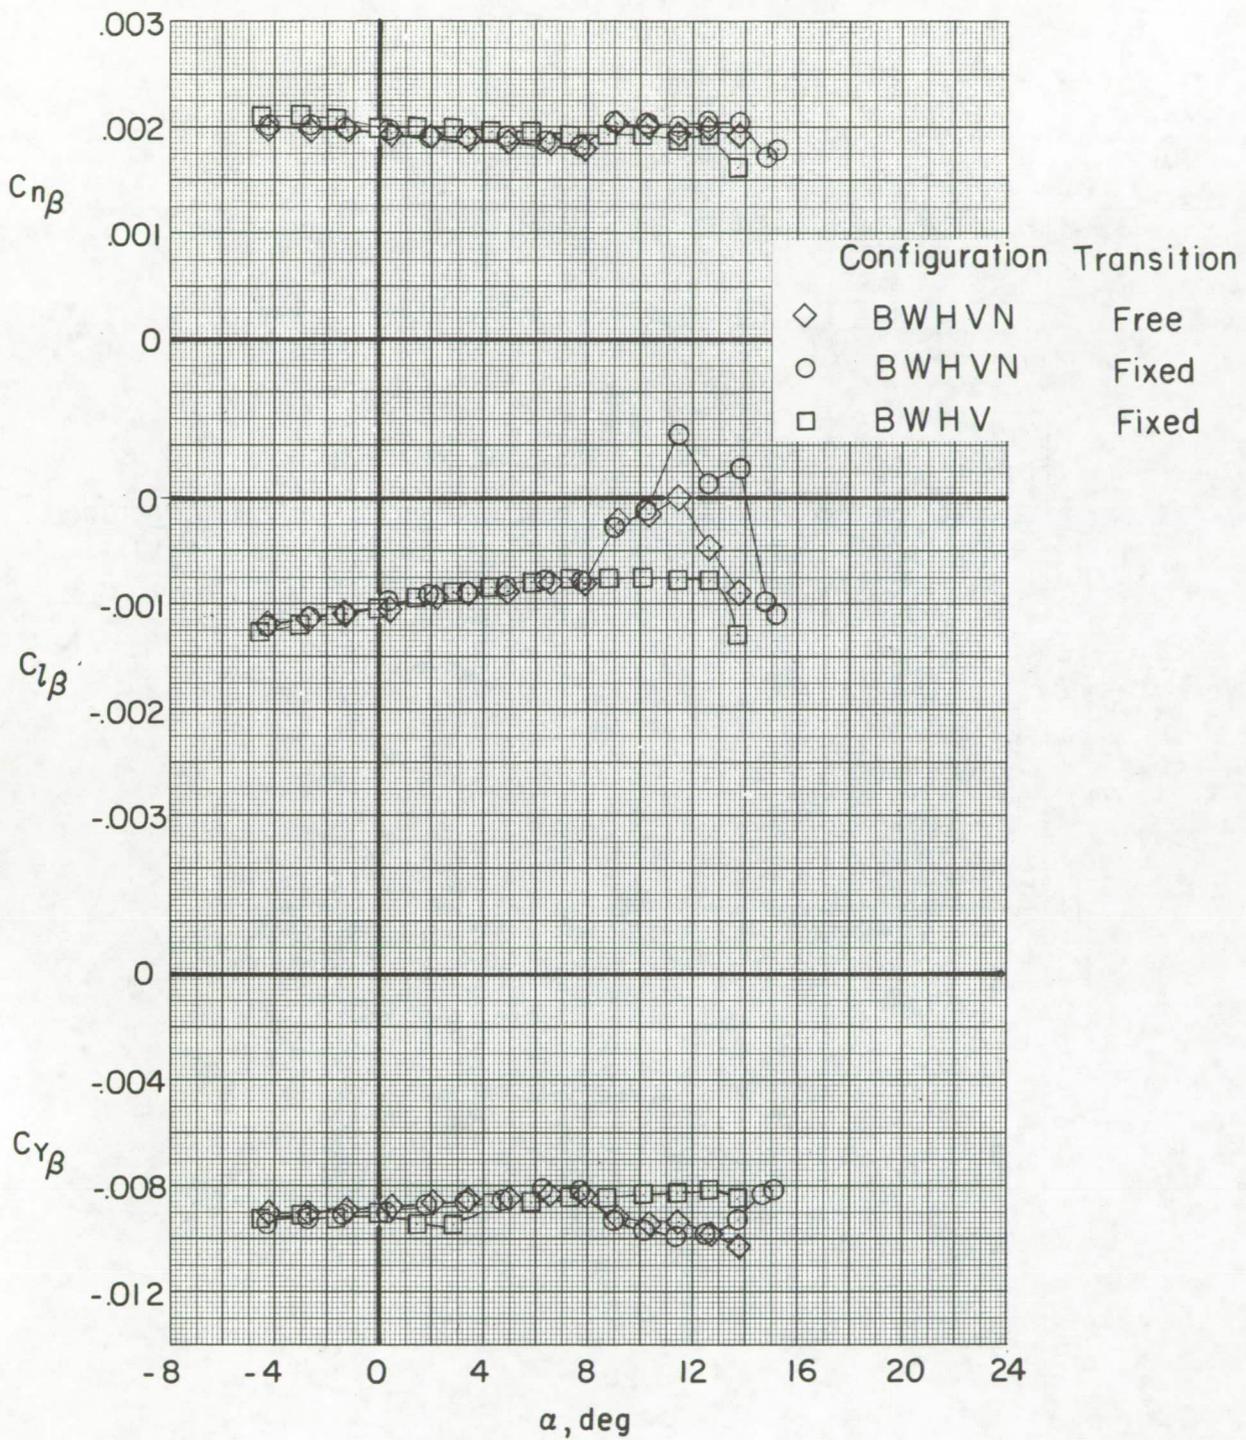


(d) $R = 3.69 \times 10^6$.

Figure 11.- Concluded.

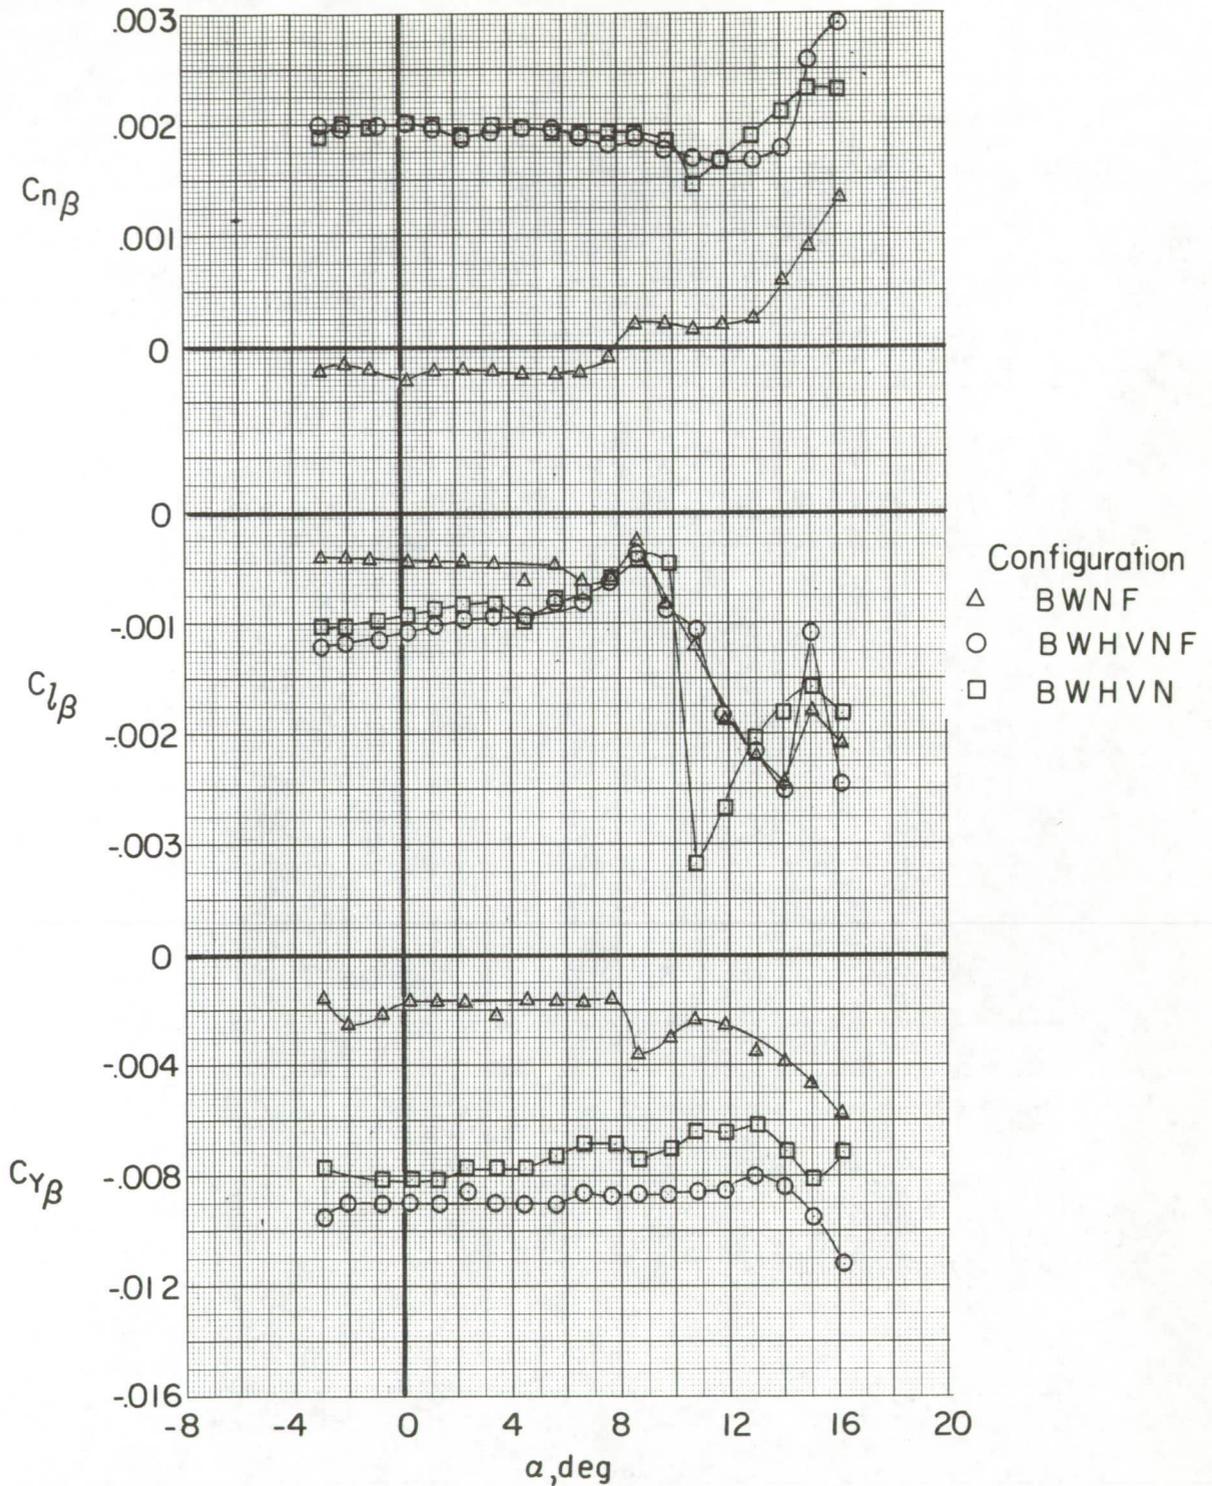


(a) $R \approx 0.72 \times 10^6$.

Figure 12.- Effect of nacelle fillet and tail configuration on the lateral-stability parameters. Transition free.

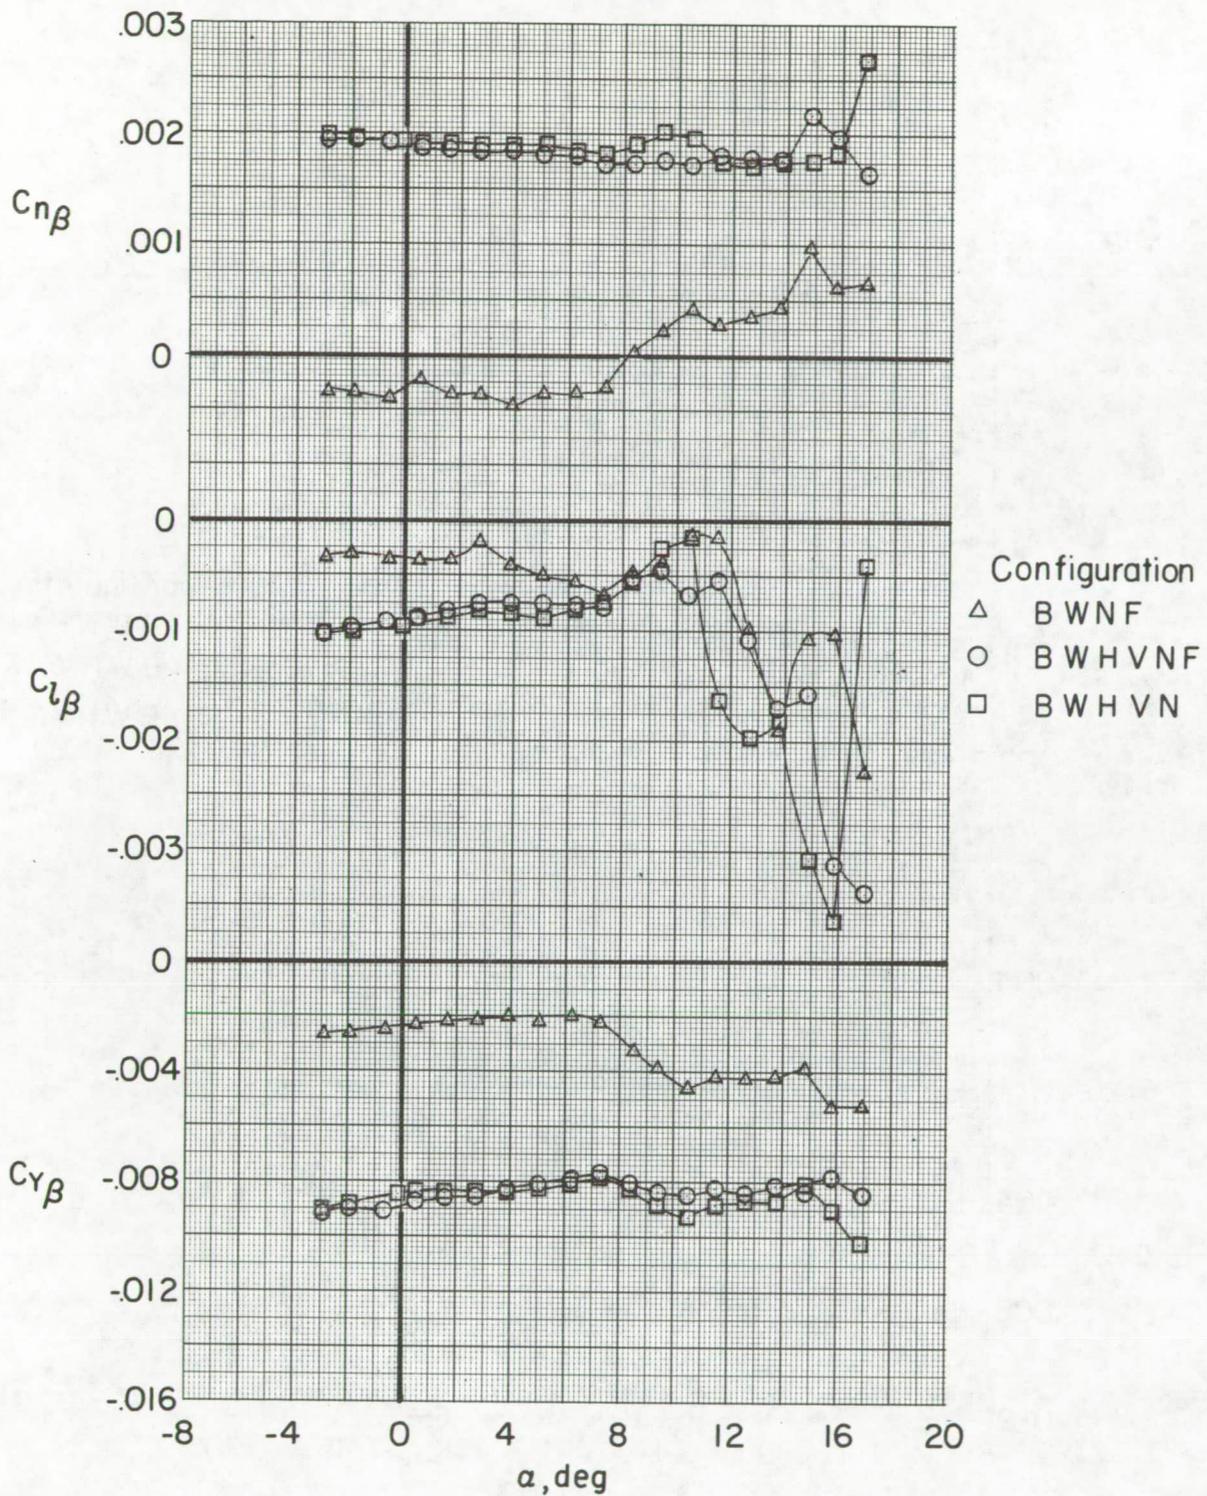


(b) $R \approx 2.00 \times 10^6$.

Figure 12.- Continued.

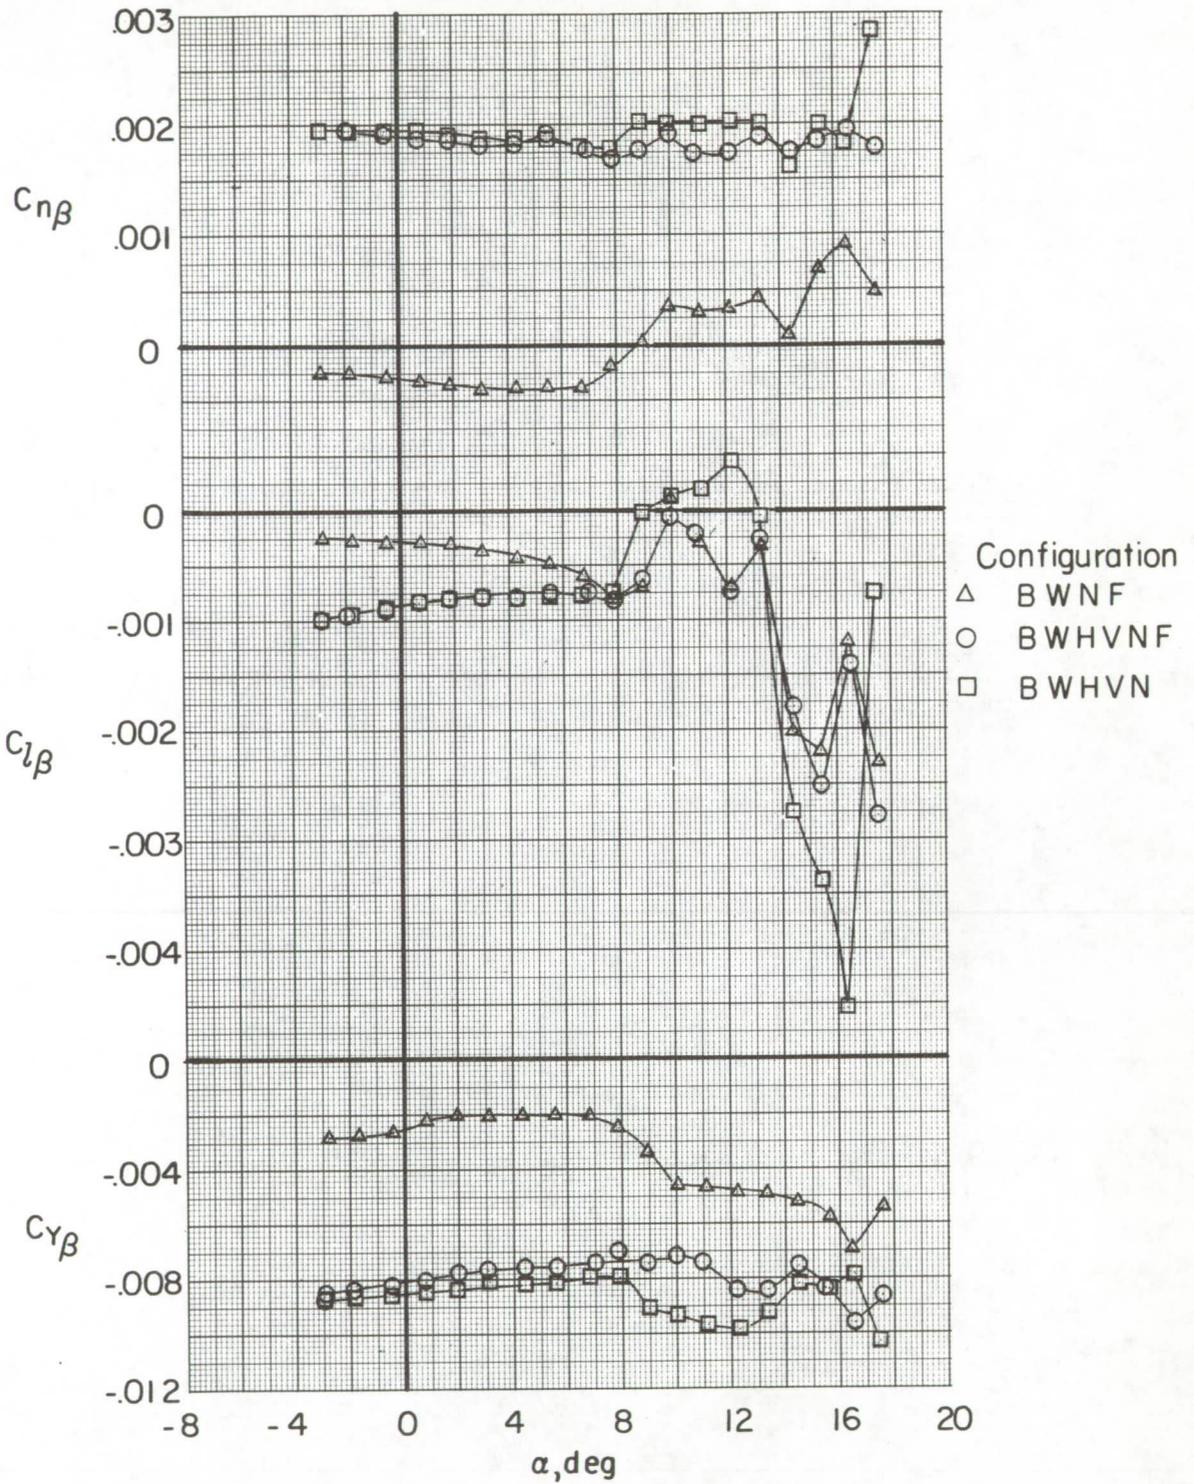

(c) $R \approx 2.80 \times 10^6$.

Figure 12.- Continued.

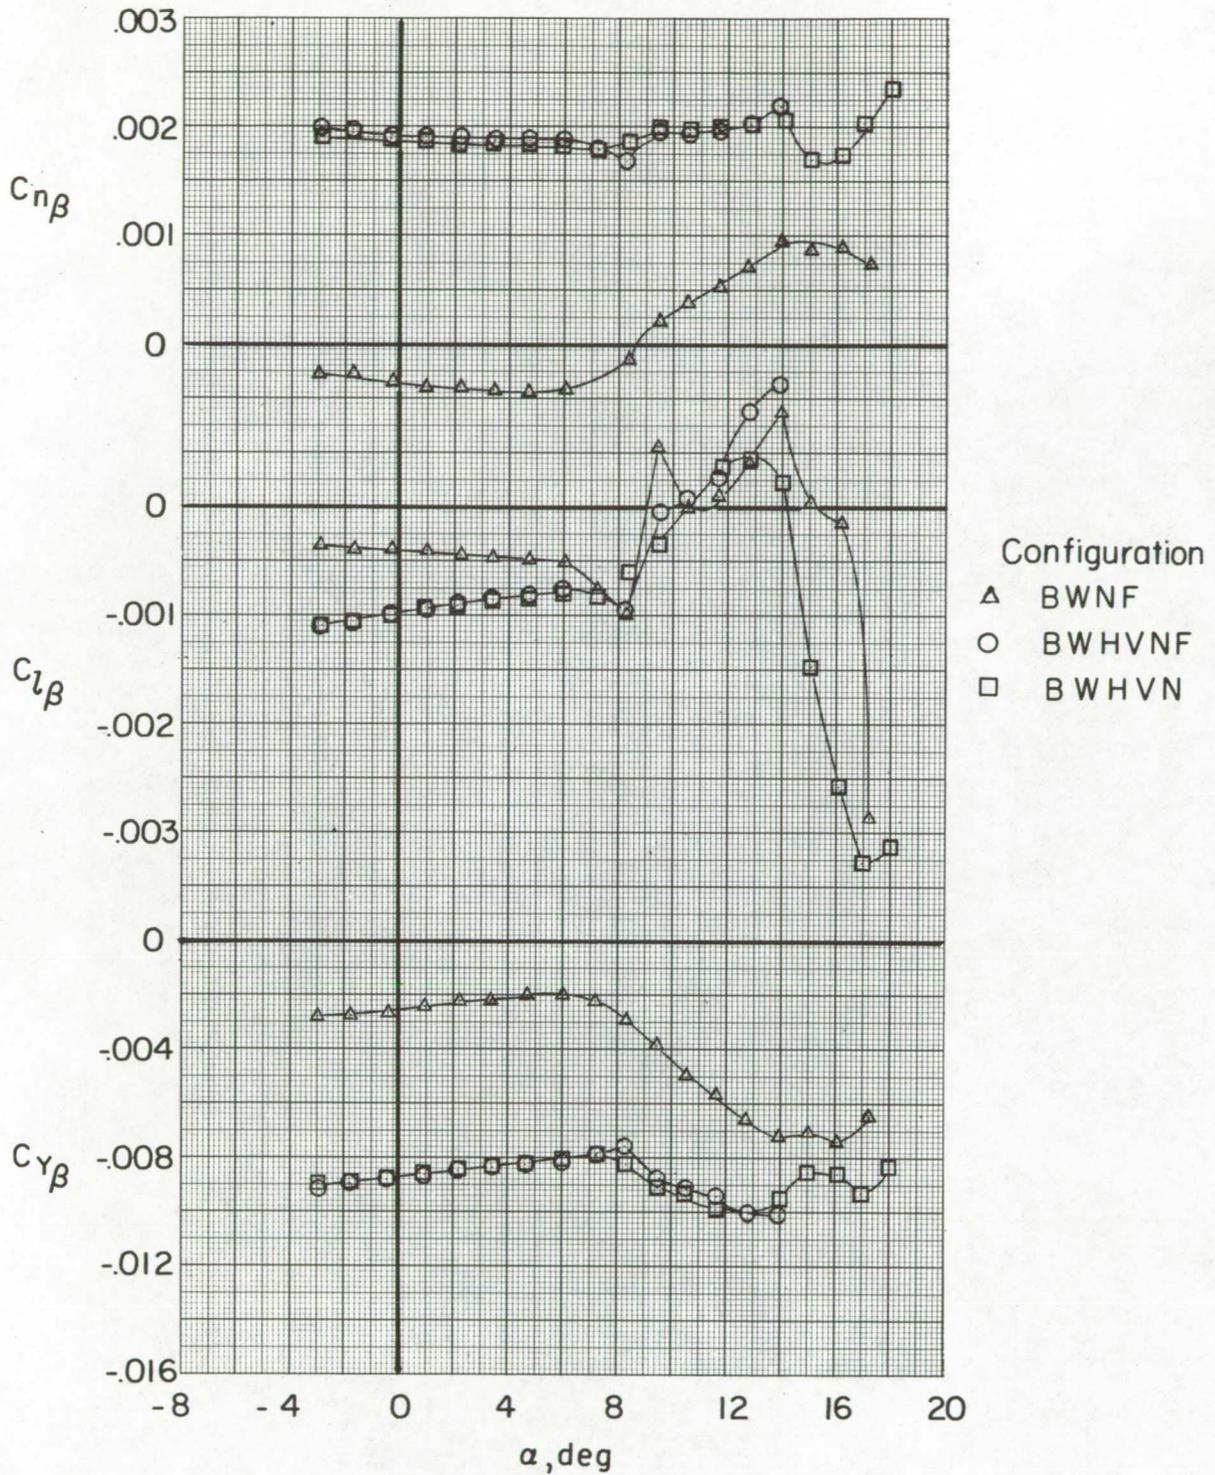

(d) $R \approx 3.84 \times 10^6$.

Figure 12.- Concluded.



POSTMASTER: If Undeliverable (Section 158
Postal Manual) Do Not Return

"The aeronautical and space activities of the United States shall be conducted so as to contribute . . . to the expansion of human knowledge of phenomena in the atmosphere and space. The Administration shall provide for the widest practicable and appropriate dissemination of information concerning its activities and the results thereof."

—NATIONAL AERONAUTICS AND SPACE ACT OF 1958

NASA SCIENTIFIC AND TECHNICAL PUBLICATIONS

TECHNICAL REPORTS: Scientific and technical information considered important, complete, and a lasting contribution to existing knowledge.

TECHNICAL NOTES: Information less broad in scope but nevertheless of importance as a contribution to existing knowledge.

TECHNICAL MEMORANDUMS: Information receiving limited distribution because of preliminary data, security classification, or other reasons. Also includes conference proceedings with either limited or unlimited distribution.

CONTRACTOR REPORTS: Scientific and technical information generated under a NASA contract or grant and considered an important contribution to existing knowledge.

TECHNICAL TRANSLATIONS: Information published in a foreign language considered to merit NASA distribution in English.

SPECIAL PUBLICATIONS: Information derived from or of value to NASA activities. Publications include final reports of major projects, monographs, data compilations, handbooks, sourcebooks, and special bibliographies.

TECHNOLOGY UTILIZATION PUBLICATIONS: Information on technology used by NASA that may be of particular interest in commercial and other non-aerospace applications. Publications include Tech Briefs, Technology Utilization Reports and Technology Surveys.

Details on the availability of these publications may be obtained from:

SCIENTIFIC AND TECHNICAL INFORMATION OFFICE

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

Washington, D.C. 20546