

P2

"Made available under NASA sponsorship
in the interest of worldwide dis-
semination of Earth Resources Survey
Program information without liability
for any use made thereof."

E7.4-10.198
CR-136363

APPLICABILITY OF ERTS TO ANTARCTIC ICEBERG RESOURCES

John L. Hult
Neill C. Ostrander

December 1973

(E74-10198) . APPLICABILITY OF ERTS TO
ANTARCTIC ICEBERG RESOURCES (RAND Corp.)
26 p HC \$3.50 CSCL 08L
27

N74-15006
Unclas
G3/13 00198

Original photography may be purchased from
EROS Data Center
10th and Dakota Avenue
Sioux Falls, SD 57198

The Rand Paper Series

Papers are issued by The Rand Corporation as a service to its professional staff. Their purpose is to facilitate the exchange of ideas among those who share the author's research interests; Papers are not reports prepared in fulfillment of Rand's contracts or grants. Views expressed in a Paper are the author's own, and are not necessarily shared by Rand or its research sponsors.

The Rand Corporation
Santa Monica, California 90406

PREFACE

This paper was prepared for the ERTS-1 Symposium at Washington, D.C., December 10-13, 1973. It was derived from a condensation of *Applicability of ERTS for Surveying Antarctic Iceberg Resources*, by J. L. Hult and N. C. Ostrander, The Rand Corporation, R-1354-NASA/NSF, November, 1973. The original work was supported jointly by NASA's ERTS program and by the Office of Exploratory Research and Problem Assessment of the National Science Foundation.

PRECEDING PAGE BLANK NOT FILMED

APPLICABILITY OF ERTS TO ANTARCTIC ICEBERG RESOURCES

John L. Hult and Neill C. Ostrander
The Rand Corporation, Santa Monica, Cal. 90406

ABSTRACT

This investigation explores the applicability of ERTS to (a) determine the Antarctic sea-ice and environmental behavior that may influence the harvesting of icebergs, and (b) monitor iceberg locations, characteristics, and evolution. Imagery sampling in the western Antarctic between the Peninsula and the Ross Sea is used in the analysis. It is found that the potential applicability of ERTS to the research, planning, and harvesting operations can contribute importantly to the glowing promise derived from broader scope studies for the use of Antarctic icebergs to relieve a growing global thirst for fresh water. Live Antarctic readout will permit timely acquisition of imagery on every orbital pass, which will be necessary to achieve adequate glimpses through the 80 percent cloud cover. Thermal sensor bands will provide coverage in daylight or darkness. Several years of comprehensive monitoring will be necessary to characterize sea-ice and environmental behavior and iceberg evolution. Live ERTS services will assist harvesting control and claiming operations and offer a means for harmonizing entitlements to iceberg resources. The valuable ERTS services will be more cost effective than other means and will be easily justified and borne by the iceberg harvesting operations.

INTRODUCTION

This investigation uses data from the first Earth Resources Technology Satellite (ERTS-1) [1] to determine the characteristics, abundance, and accessibility of Antarctic iceberg resources and also to evaluate the potential role and application of ERTS types of sensing systems to the future harvesting of Antarctic resources.

Preliminary studies of broader scope have exposed the potentially attractive global use of Antarctic icebergs for fresh water and cooling. [2,3] As population soars and standards of living increase, the fresh water deficiencies in certain areas of the world are rapidly becoming acute. Those areas that are particularly concerned include the Pacific Southwest United States, and parts of Mexico, Chile, Australia, the Middle East, and North Africa. In some of these arid regions, water may be available by transferring it from river basins with abundant water or by desalting seawater. However, the costs of transferring or desalting, which may be \$100 or more per 1000 m³ (or per acre-ft)¹ tend to put severe limits on such use.

For the thirsty areas of the world, the possibility of using Antarctic icebergs as a fresh water resource might become a very attractive prospect. The crucial problem is to devise a technology that can deliver melted iceberg water at much less cost than either desalting or inter-basin transfers, while at the same time ensuring acceptable environmental impact of such operations.

The idea of using Antarctic icebergs has been considered and even tried a number of times during the past century. Theoretically, icebergs could be floated to any point accessible by a deep water route (at least 200 m of water depth).

The abundance of icebergs has long been recognized (annual yield of about 1,000,000 million cubic meters or 1000 million acre-ft). If a way can be found to move the icebergs and control their melting so as to deliver, say, 10 percent of the *annual* yield economically, this operation could potentially satisfy the water demands of an urban population of 500 million (with a usage of 200 m³ per person). The potential direct economic impact of fully exploiting 10 percent of the annual yield is estimated to be as much as \$10 billion annually.

Past exploration of the Antarctic has indicated that a major portion of the sea ice that forms and builds up during the dark winter months thaws out during the daylight season. By March of each year most of the tabular icebergs naturally formed from the ice-shelf discharges are accessible for acquisition and export operations. Although the *sea* ice is generally less than 2 m thick (compared with a few hundred meters for most tabular, fresh water icebergs), the area of sea ice formed and thawed each year is thousands of times the total area of icebergs and about ten times the mass. Thus sea ice is a major factor to contend with in the acquisition of icebergs. Its moderating influence on the climate (together with that of the continental icecap) is so dominating over that of the icebergs that little climatic effect would be expected, even with the removal of most of the annual iceberg yield. It should be possible to process icebergs for high quality fresh water and thermal pollution abatement without adverse effects on the global or Antarctic climate.

¹An acre-ft of water is a quantity sufficient to cover one acre with water a foot deep. This is approximately 1,234 m³ = 1.234 k·m³.

In order to get a better understanding of the feasibility of moving icebergs and controlling their melting, a model of the transport operations from the Ross Sea to Southern California was made. The available environmental data on currents, winds, and temperatures were included in the model. Although these data are very crude and limited, they are adequate to test the preliminary feasibility. The model shows that the transport effort required need not be very sensitive to the winds, can benefit from the currents but is not dependent on them for feasible operations, is not too sensitive to the route selected, and will require insulation of the icebergs for acceptable survival en route to the Northern Hemisphere. The Coriolis forces,² which are proportional to the momentum (mass \times velocity) and the sine of the latitude, provide the principal resistance to the transport operations. These forces are applied at right angles to the velocity and require a large fraction of the transport effort to counteract their effects, particularly at more southerly latitudes.

The cost of delivering the icebergs will be determined by the design of the transport operations and the configuration of the iceberg "trains." Narrow trains (300 to 600 m wide) are desirable because they are estimated to reduce the net Coriolis effects on the icebergs. Also, when these trains are propelled at an angle with respect to the resultant velocity, they can more effectively obtain "lift" to counteract Coriolis forces. An asymptotic minimum transport effort per unit of iceberg is approached for iceberg "trains" longer than about 20 km. Greater lengths increase the mass, transport resistance, and insulation costs proportionately. The costs of insulation can be estimated without specifying many of the details of operational techniques for applying the insulation, which need to be tested by experience. Essentially, the iceberg surfaces exposed to ablation from the flowing seawater can be wrapped by unrolling plastic film that is designed to trap pockets of melt water to form a quilting of still water between the iceberg and the flowing seawater. Quilt-water thicknesses of 3 cm will limit the iceberg melting to less than 10 percent per year.

The operational cost of delivering a large iceberg train (1.22×10^{13} kg) to California on a one-year cycle is estimated to be about \$8 per 1000 m³ (\$10 per acre-ft). It is also estimated that designing operations for more nearly optimum speed or better train configurations will not significantly reduce these rates. On the other hand, these delivery costs should approximately hold for a variety of operations that would depart significantly from the asymptotic one that was costed.

The conceptual illustrations in Fig. 1 show a possible operational configuration with electrically driven propellers distributed along, and harnessed to, the train convoy. Also shown is a possible test configuration using more conventional tugs to pull a small three-piece iceberg train.

² Coriolis forces tend to deflect an object moving in the Northern Hemisphere to the right and one moving in the Southern Hemisphere to the left.

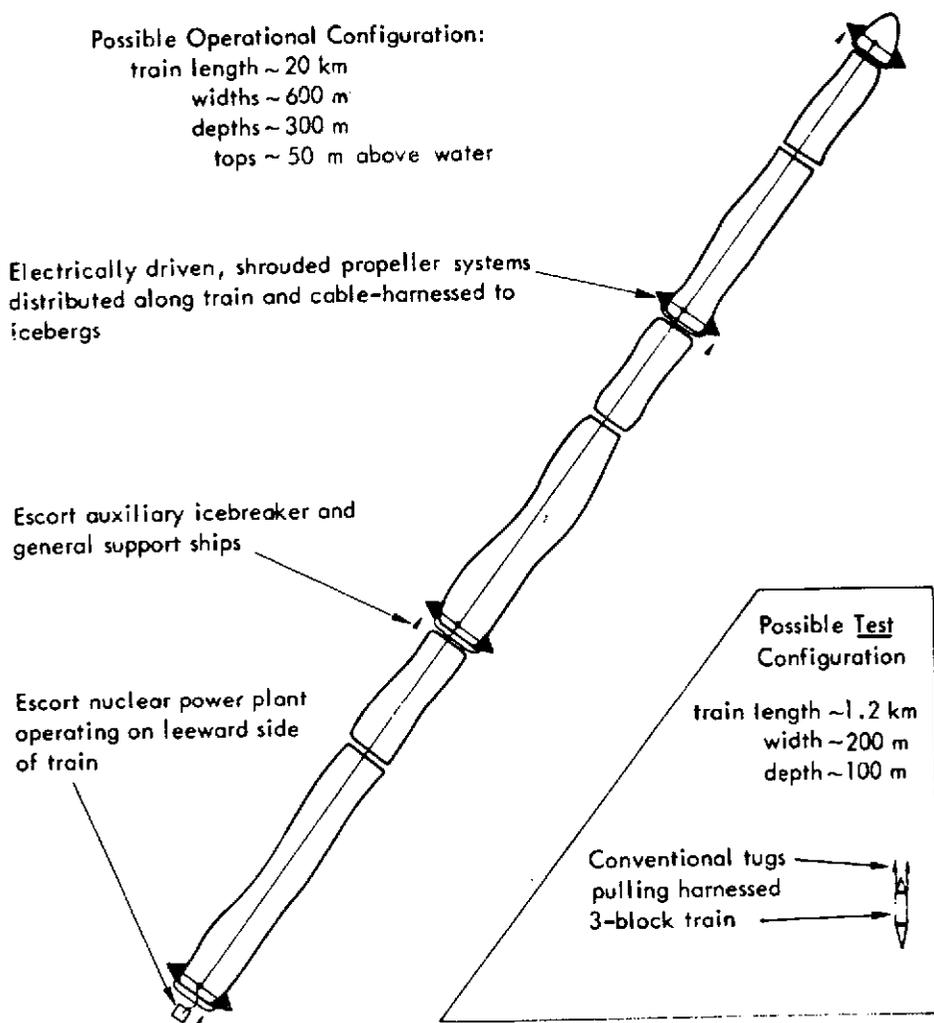


Fig. 1—Conceptual illustrations

Before designing and developing an operational system, and for refining cost estimates, a test program with icebergs would be desirable to: determine the nature of the submerged surfaces of tabular icebergs; test techniques for insulating and harnessing icebergs; measure the transport environment and performance; determine how well the Coriolis forces can be controlled; and test the performance of modeling to simulate operational control and performance.

The conversion of the icebergs for fresh water and heat sink was explored in a very preliminary way in order to uncover promising concepts and to estimate cost limits based on general physical principles. This exploration indicated that iceberg conversion to fresh water at sea level should be achievable in a variety of ways for about \$8 per 1000 m³. A preliminary engineering study and comparison of the more promising conversion techniques is needed to develop better cost estimates and the basis for the design of test systems for evaluating alternative approaches for operational systems.

The total costs of Antarctic iceberg transport, conversion to water, and delivery to wholesale distribution terminals in coastal areas appear to be of the order of \$24 per 1000 m³ (\$30 per acre-ft). This would be less costly and would require less energy expenditure than interbasin water transfers of a few hundred kilometers or desalting or costly water reclamation operations. Furthermore, nuclear energy could be used, thus eliminating competition for fossil fuel resources. Fresh water from icebergs should therefore become an attractive alternative for areas close to deep seawater access routes.

Before any large-scale operational use of Antarctic icebergs is implemented, there should be a comprehensive assessment of the potential societal and environmental impacts. A preliminary exploration of a variety of such factors reveals no obvious insurmountable obstacle. The factors to be investigated include: the international acceptability of exploiting Antarctic icebergs; the en route environmental constraints; the acceptability of terminal operations; the demand for iceberg water and the integration of its delivery system with other established systems for furnishing fresh water; icebergs as reservoirs and recreation areas; and the risk involved in implementing iceberg water resource systems. The more avenues that are explored, the more promising the concepts seem to become. However, a more refined assessment can be made when the potential operations become better defined, and when specific terminal applications can be examined in detail.

The objectives of this investigation were to explore the applicability of ERTS to (a) determine the Antarctic sea-ice and environmental behavior that may influence the harvesting of icebergs, and (b) monitor iceberg locations, characteristics and evolution. A very limited imagery sampling of portions of the western Antarctic was scheduled to collect data on cloud-cover obstruction, the capability to monitor and assess sea-ice behavior, the ability to distinguish and measure iceberg characteristics, and the general topographic surveillance capabilities of the ERTS system in the Antarctic environment. The results from ERTS-1 imagery are described in the next section. This is followed by a section on ERTS system potential which treats: live imagery, thermal and micro wavelengths, sea-ice behavior and iceberg evolution, tactical harvesting information, claiming and monitoring service, entitlements to Antarctic iceberg resources, and economical potentials for ERTS.

RESULTS FROM ERTS-1 IMAGERY

The applicability of ERTS for surveying Antarctic iceberg resources was evaluated by studying images of the ocean and coastal areas of the Western Antarctic between the Antarctic Peninsula and the Ross Sea. The test site was bounded by the four coordinate corners in clockwise order: 65°S, 160°E; 65°S, 75°W; 75°S, 75°W; 79°S, 160°E. Imagery was obtained only from November 1972 through March 1973. No cloud-cover limitations were specified, and imagery from bands 5 and 7 of the Multispectral Scanner (MSS) covering wavelengths of 0.6 to 0.7 and 0.8 to 1.1 micrometers, respectively, was used in the analyses. Most of the analyses were made with bulk black and white, 9.5-in. positive paper prints of band 7; however detailed visual measurements of iceberg surface dimensions were made from 70-mm positive transparencies which were readily magnified to a scale of about 1:150,000.

The ERTS systems are described in detail in the *Data Users Handbook*. [1] The principal deficiency of the ERTS-1 experimental system for this investigation was the lack of live readout in the Antarctic which could eliminate delays and permit much more imagery collection than is feasible by storage on board the satellite. Imagery for more than 900 scenes was interpreted in this investigation. The scene centers were plotted on a map of Antarctica as illustrated in Fig. 2. They were fairly well distributed over the originally defined test area. However, the analyses revealed that the useful *coverage* (openings in cloud cover) *was spotty both geographically and temporally*. For the purposes of analysis and to facilitate cataloging, the Antarctic was partitioned into sectors along orbital parallels as illustrated in Fig. 2.

All the imagery analyzed was obtained during the period from 16 November 1972 to 27 March 1973 and can be found listed in *Earth Resources Technology Satellite, Cumulative Non-U.S. Standard Catalog No. N-9*. [4] Imagery obtained for this investigation that contained useful information other than cloud coverage has been described and submitted to the Image Descriptor Data Bank file under one or more of the following descriptors: Ice, Sea Antarctic; Icebergs, Antarctic; Antarctic Topography.

CLOUD COVER

Previous data on cloudiness in the Southern Hemisphere indicate a total cloudiness that reaches maximum values in the coastal regions surrounding the Antarctic continent. [5] Climatologically, the mean cloudiness exceeds 80 percent most of the year over most of the region extending 1000 km north of the coast. Climatology also indicates that cloudiness is the most extensive during the daylight season when it persists to the high interior regions of the Antarctic with 50 percent likelihood as compared with perhaps only 20 percent during the night season. The primary area of interest for the harvesting of iceberg resources is in the regions of drift ice where cloud cover greater than 80 percent appears to persist, and it becomes essential to determine the potential utility of sensors that must exploit openings in cloud cover as well as to examine the characteristics of the openings themselves.

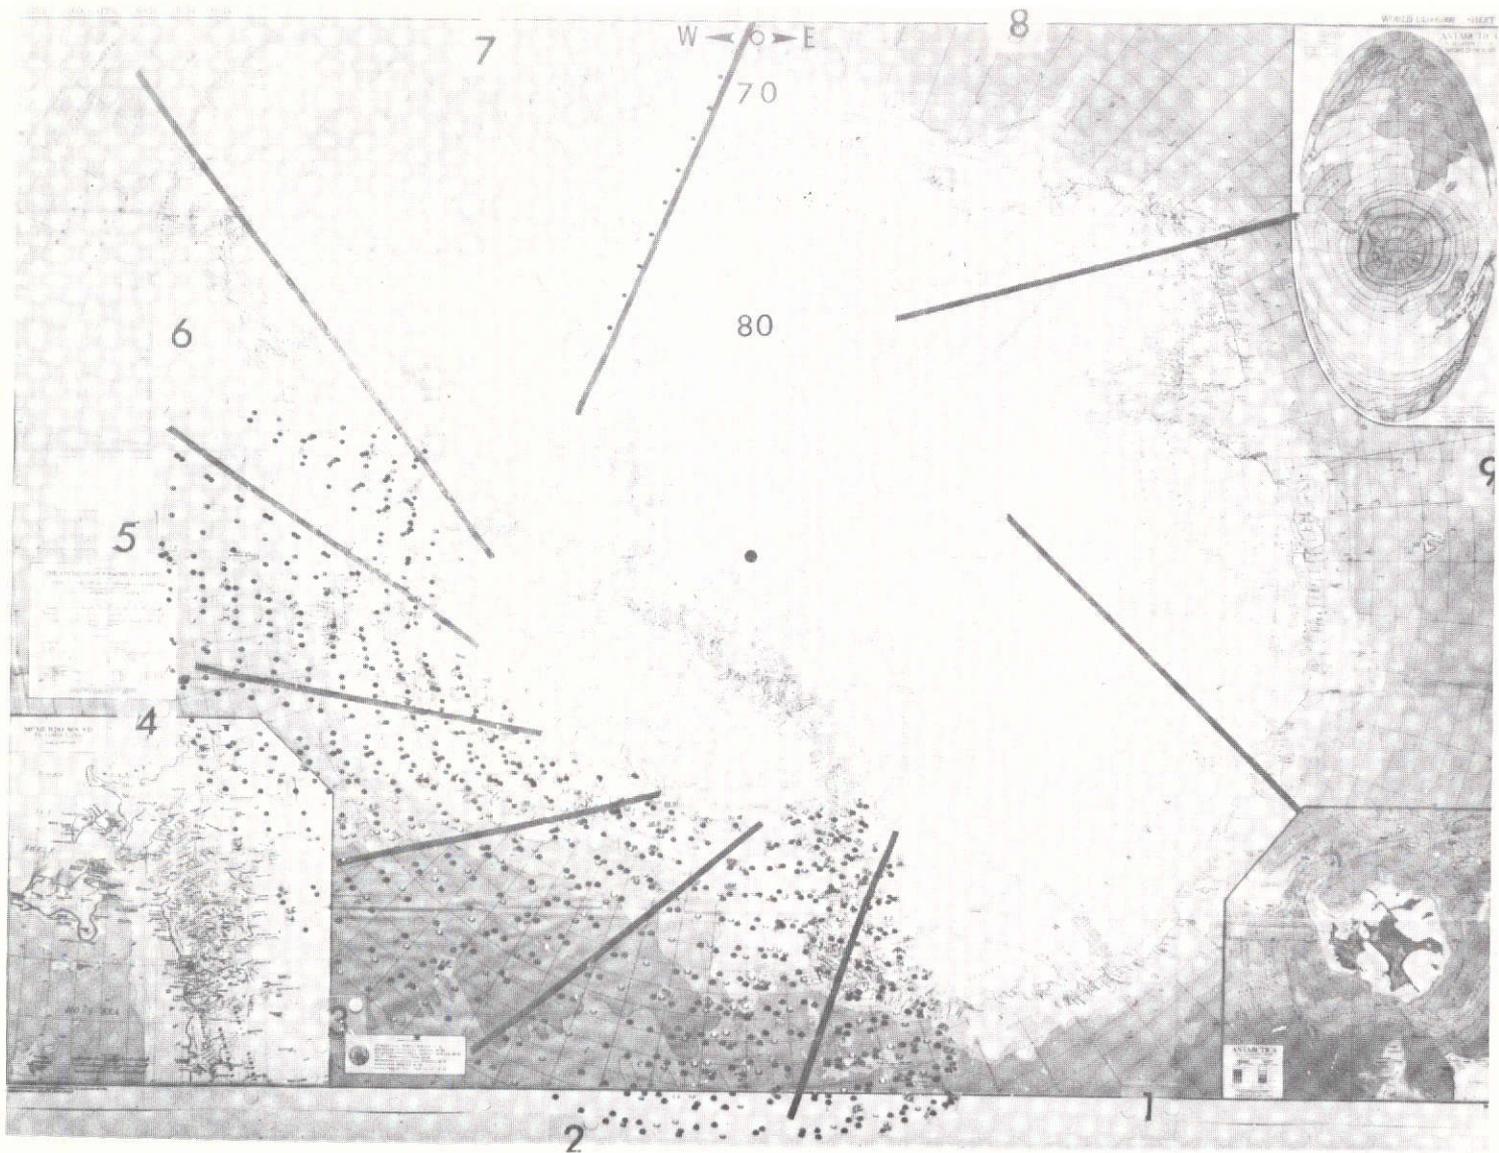


Fig. 2 — Division of Antarctica into 9 sectors and distribution of images

Cloud-cover information was obtained from more than 900 Antarctic scenes that were interpreted according to the authors' subjective estimation of the fraction of the scene area over which the obscuration was sufficient to degrade the ability to find icebergs and to measure their dimensions at the full resolution capability of the sensors. These interpretations can be compared with the cloud-cover values assigned to more than 2900 Antarctic scenes (including those interpreted in this study) in the *Cumulative Non-U.S. Standard Catalog No. N-9*. [4] Most frequently the scene areas were totally obscured and there was no question that the cloud cover was complete. Some scene areas had very thin cover through which the general nature of the sea ice below could easily be discerned, but the contrast needed to find imbedded icebergs and measure their dimensions was obscured. Such areas were interpreted to be cloud-covered. However, any scene with 90 percent or more of cloud cover through which a positive determination could be made about the presence or absence of sea ice below was arbitrarily assigned a value of 90 percent cloud cover. The cloud cover of scenes was then partitioned into categories of 0-40, 50-80, 90, and 100 percent. Some of the tabulated data of cloud cover over drift-ice areas within the study test site are illustrated in Fig. 3. They are tabulated by sector and sector combinations and by time period and time period combinations. Also the cloud-cover interpretations as defined for this study are compared with the catalog listings. The catalog listings of cloud cover are the routine subjective impressions of the processing crew that was operating at the time; they do not represent any precise interpretation of any particular cloud-cover definition, especially for the highly ambiguous scenes of the Antarctic involving so much cloud cover over the snow and ice. The scene-to-scene comparisons of cloud cover by the interpretations of this study are frequently at great variance with the catalog listings; however, the averages seem to have fairly consistent differences.

The season average of cloud cover over drift ice in sectors 2 through 6 as interpreted in this study was 0.84. The corresponding average as obtained from the catalog listing was 0.74. The season average of cloud cover over fixed ice for the same sectors was 0.70 as interpreted in this study and 0.60 as obtained from catalog listings. Similarly, the season average of cloud cover over drift ice in sector 1 as interpreted in this study was 0.91 whereas the corresponding average obtained from catalog listings was 0.81. Thus the averages of cloud cover as interpreted with the definitions of this study are about 0.1 greater than the corresponding averages obtained from the catalog listings. From the data it is concluded that for the daylight period from November 1972 through March 1973, the cloud cover over most of the drift-ice areas where iceberg harvesting operations are most promising exceeded 0.8 as interpreted by the definitions of this study. This is in substantial agreement with the climatological cloud cover described in other references, [5] which also indicate only very slight reductions in cloud cover over the drift-ice areas during the seasons of darkness.

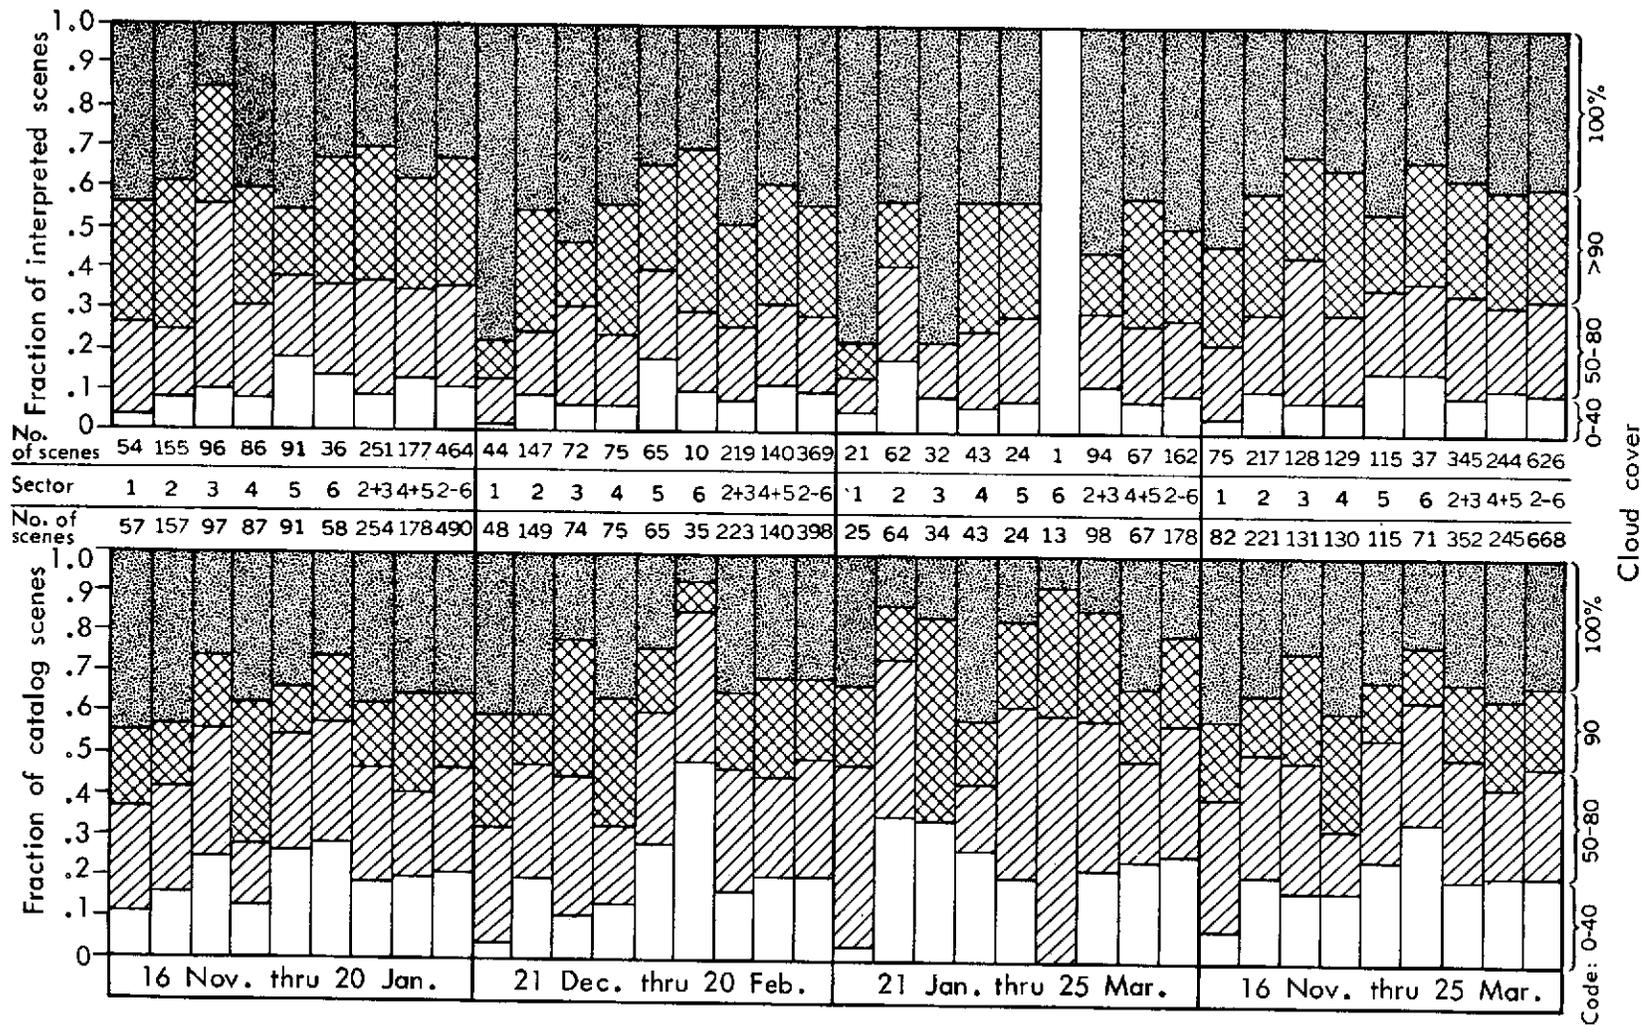


Fig. 3—Cloud-cover comparison over drift-ice areas: (Special interpretation and catalog, various period combinations)

There was inadequate sampling of scenes to provide conclusive evidence of cloud-cover variation with period or with sector. However, there seems to be a slight tendency for increased average cloud cover in the middle of the daylight season compared with the ends, and for decreased average cloud cover in sectors in which drift-ice areas extend farther south (sectors 2 and 3 including the Ross Sea and sector 7 including the Weddell Sea).

It is difficult to define the characteristics of the "openings" to be expected in the prevailing cloud cover over Antarctic iceberg scenes of interest. However, most open areas are comparable to or smaller than a scene of 185 km diameter, and in the small sample of this type of data there seemed to be no recognizable correlation between openings on scenes obtained 24 hours apart with average geographical overlap of 0.7 between scenes. Thus it is assumed that if complete imagery was obtained on every ERTS pass, the cloud-cover openings on successive passes would be statistically independent events, and the probability of a cloud-cover opening in all the potential ERTS images over a specified iceberg area should range between 0.3 and 0.7 in each 18-day cycle (or in each 9-day period when using a thermal sensor capable of operating in the dark during either the ascending or descending nodes). This estimate assumes a cloud-cover average between 0.8 and 0.9 and a day-to-day scene overlap between 0.7 and 0.8.

SEA ICE

In order to harvest Antarctic icebergs efficiently and to assemble them into trains for movement to using areas, it will be necessary to contend with the sea ice that surrounds Antarctica and the icebergs most of the time. The seasonal and geographical extents of the Antarctic sea ice have been described in various publications. [5,6] Also valuable are the historical accounts of sea-ice obstructions to navigation in these regions. [7] The descriptions of the various forms of ice that may be encountered and how they evolve are helpful to the understanding of the nature of this barrier to the otherwise easy access to the densest iceberg clusters. [8] ERTS types of observations over several years with scene sampling at nearly every orbital-pass opportunity should provide a valuable record of sea-ice behavior that could be very useful in planning the harvesting of iceberg resources. The very limited sampling obtained with ERTS-1 (less than 10 percent of the opportunities for October through March) was inadequate for a comprehensive interpolation of the sea-ice behavior over a daylight season. A much more complete sampling over two or more years and preferably over the full year (in darkness as well as daylight) seems highly desirable to gain a confident understanding of the sea-ice behavior and its potential influence on ocean operations in the Antarctic.

The sea ice observed in the portion of the western Antarctic from which this investigation obtained imagery consisted of a huge belt extending more than 1000 km northward from the coast in the early daylight season. By February, after erosion during a few months of the daylight season, the northern edge of the sea-ice belt had receded to about 70° south latitude over much of the western Antarctic lying within the test site.

At the same time the ice belt seemed to withdraw from the coast in many areas, with considerable erosion of coastal fast ice. The dissolution of the belt from both north and south seemed to be most severe in the Ross Sea in the vicinity of 180° longitude, where the belt separated in February to open the Ross-Ice-Shelf front and much of the coast eastward to the Getz Ice Shelf ($\sim 130^{\circ}$ W) to access without the necessity of breaking through the belt. Most of the Bellingshausen Sea and Amundsen Sea east of Cape Dart on Siple Island seemed to be closed off throughout the season by the sea-ice belt. However, the belt became the narrowest in this sector and would have required breaking through about 300 km or less of belt width to reach open-water areas near the coasts. The behavior of the belt seemed to be more consistent with that depicted in Ref. 5 than in Ref. 6; however, it may change from year to year without always following a detailed standard pattern.

During the daylight season when the sea-ice-belt width is receding, the deteriorating ice debris along the northern edge of the belt appeared to feather out into wisps as viewed with ERTS resolution. The central portion of the belt may be consolidated into a continuous snow-covered surface that may crack and then break up into floes of mixed and varied sizes and erosion shapes.

Icebergs that calve from the ice shelves and glacial ice streams along the coast may become locked up in coastal fast ice for years, but they tend to leak out of their locked-up coastal clusters and diffuse northward through the sea-ice belt. Most of the icebergs become locked into huge floes in the central portions of the belt for periods of one or more seasons. However, many icebergs may break loose, especially near the edges of the belt or near large fractures or leads, and plow through the sea ice or sweep it up in front of them as the iceberg is driven by deeper sea currents.

The collection and harnessing of icebergs into long trains will probably be easiest along the northern edge of the belt or in the open-water areas inside (south) of the belt where these operations would not need to contend with crowding sea-ice stresses. The greater density of the iceberg clusters near the coast would facilitate the formation of large trains with more favorable characteristics. Once a train of icebergs has been formed in open coastal waters, it may be feasible in some situations to propel it so as to plow through the belt. The thrust required to move the train in open waters will be large compared to that provided by natural currents in these regions. The train should, therefore, have a considerably greater capacity to plow through the belt than do the naturally imbedded icebergs. Techniques need to be developed for controlling the train when attempting to plow through the sea-ice belt in order to move it in the desired direction and avoid collisions with icebergs that are locked in or are themselves moving through the belt.


ICEBERG CHARACTERISTICS

The iceberg characteristics that were of greatest interest in this investigation were the effective widths available that would permit harnessing icebergs snugly together into long trains. Eight dense cluster areas representative of western Antarctica between the Ross and Bellingshausen Seas were selected and the maximum widths of the icebergs and their topside areas were tabulated. Individual visual measurements were made of each iceberg on a projected image with a scale of about 1:150,000. The widths were measured perpendicular to the dimension that appeared to offer the best opportunity for in-line harnessing of each iceberg into train formation. Figures 4 and 5 illustrate the various types of clusters.

Figure 4 shows a cluster of icebergs locked into the fast ice off Cape Colbeck (eastern edge of Ross Sea at the lower right). The much deeper and higher (~50m) icebergs stand out in relief against the fast ice and are easily recognized and measured under magnification. Also included in this sample are a number of icebergs in open water west of the locked-in cluster. In the open water the shadows of the higher icebergs do not provide recognizable signatures for distinguishing them from sea ice. However, tabular icebergs (large icebergs with flat tops) tend to break into pieces with crisp looking edges similar to the pieces of a broken window pane, as distinct from the eroded looking edges of many sea-ice floes. Also, the currents at the much greater depth of icebergs tend to move them differently from sea ice and they will frequently dam up or sweep out the sea ice to leave an open-water signature behind them. This is illustrated by the two icebergs, each about 6 km long by 1 km wide, that are about 15 km off the western tip of the fast ice containing the cluster of icebergs (the scene width is approximately 185 km). These two large icebergs were originally joined together end-to-end to form a single ship-shaped iceberg about 12 km long. In this scene, they are sweeping south the melting sea ice, including a bright eroded ice floe of comparable size within their swath. There are a number of other smaller icebergs in the open water to the south and between the pack ice and the fast ice that were also included in the data sample.


Figure 5 shows many clusters of icebergs in or near the fast ice, south and west of Thwaites Iceberg Tongue. One sample of dimensional statistics was taken from icebergs in the open water on the western edge of the fast ice, and a much larger sample was taken from the icebergs locked in the interior of the fast ice. In both cases, all large multiple-layered iceberg clumps were excluded so that the statistics of the basic layering widths of the Thwaites source would not be distorted.

Figure 6 displays the statistics of iceberg characteristics obtained from the eight areas sampled. The distribution of iceberg widths is illustrated in terms of the fraction of the total topside area of the sample of icebergs for each 0.1 km of width interval. Each sample area is identified by a geographical name and the ERTS frame from which it was selected. The

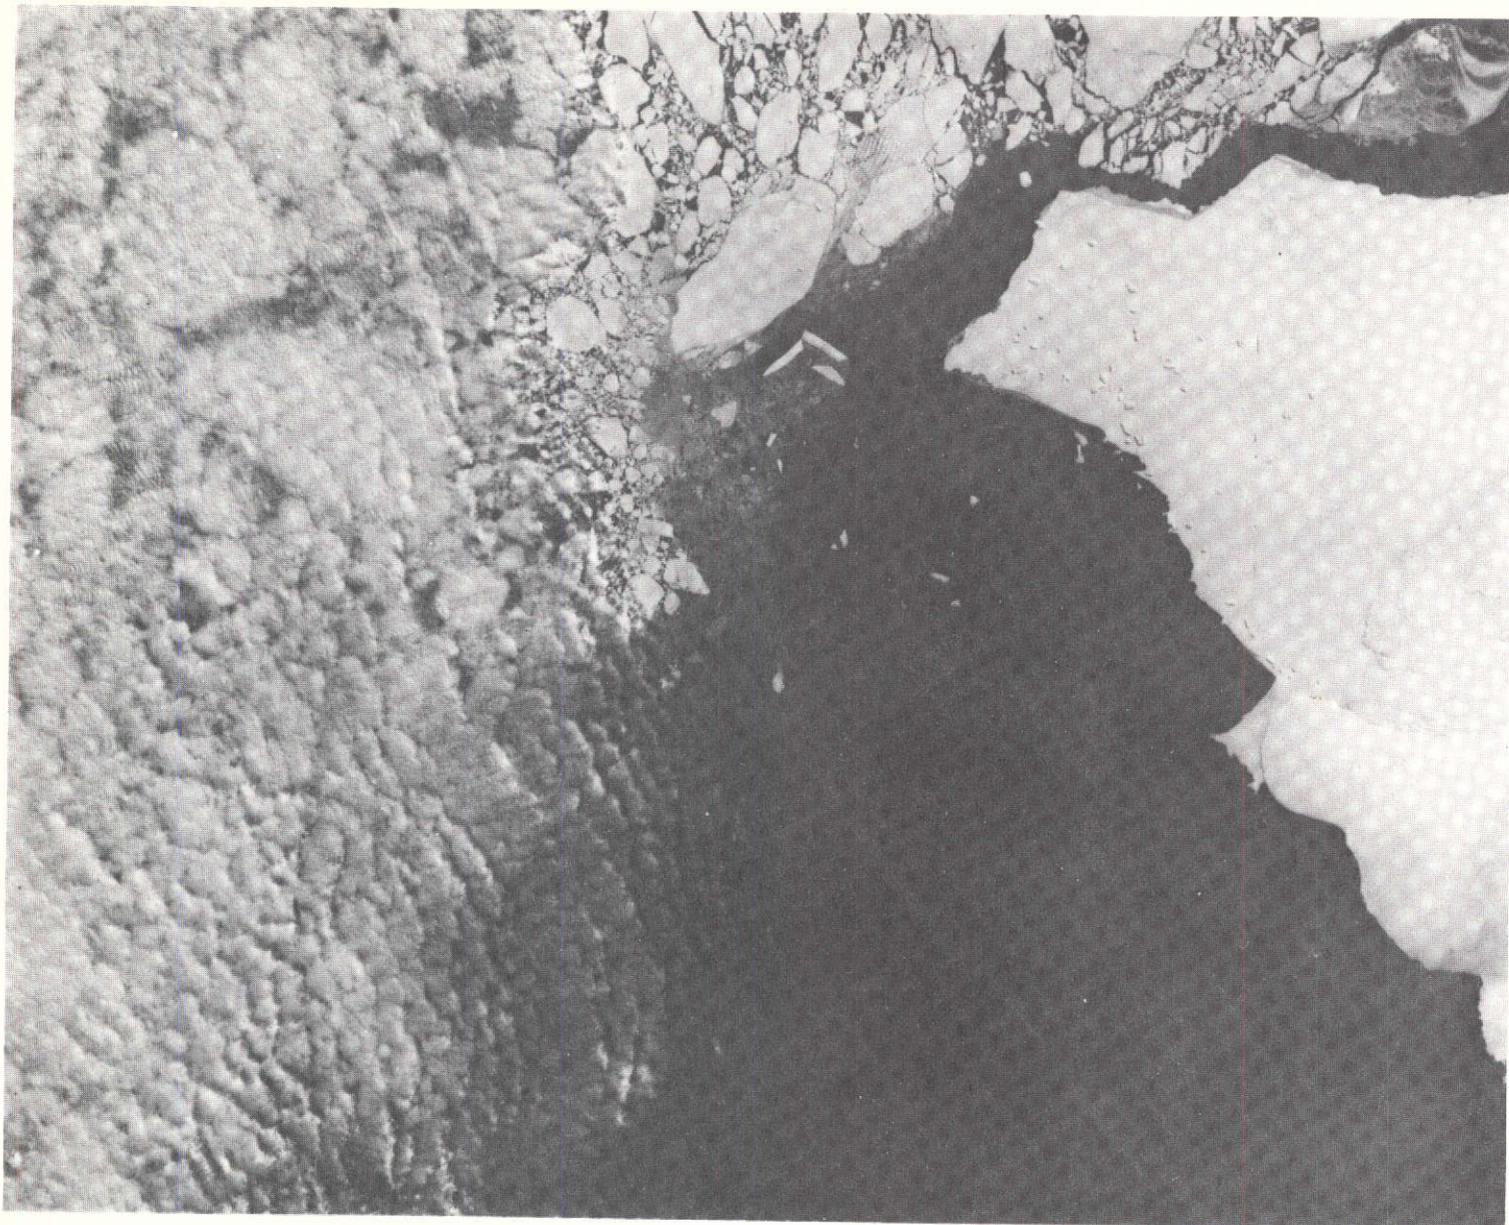

03DEC72 C S76-24/W159-09 N S76-32/W158-50 MSS W162-001 7 IS077-00 R SUN EL25 AZ079 221-1854-A-1-N-D-IL W160-001 NASA ERTS E-1133-17314-7 02

Fig. 4 — Iceberg cluster off Cape Colbeck

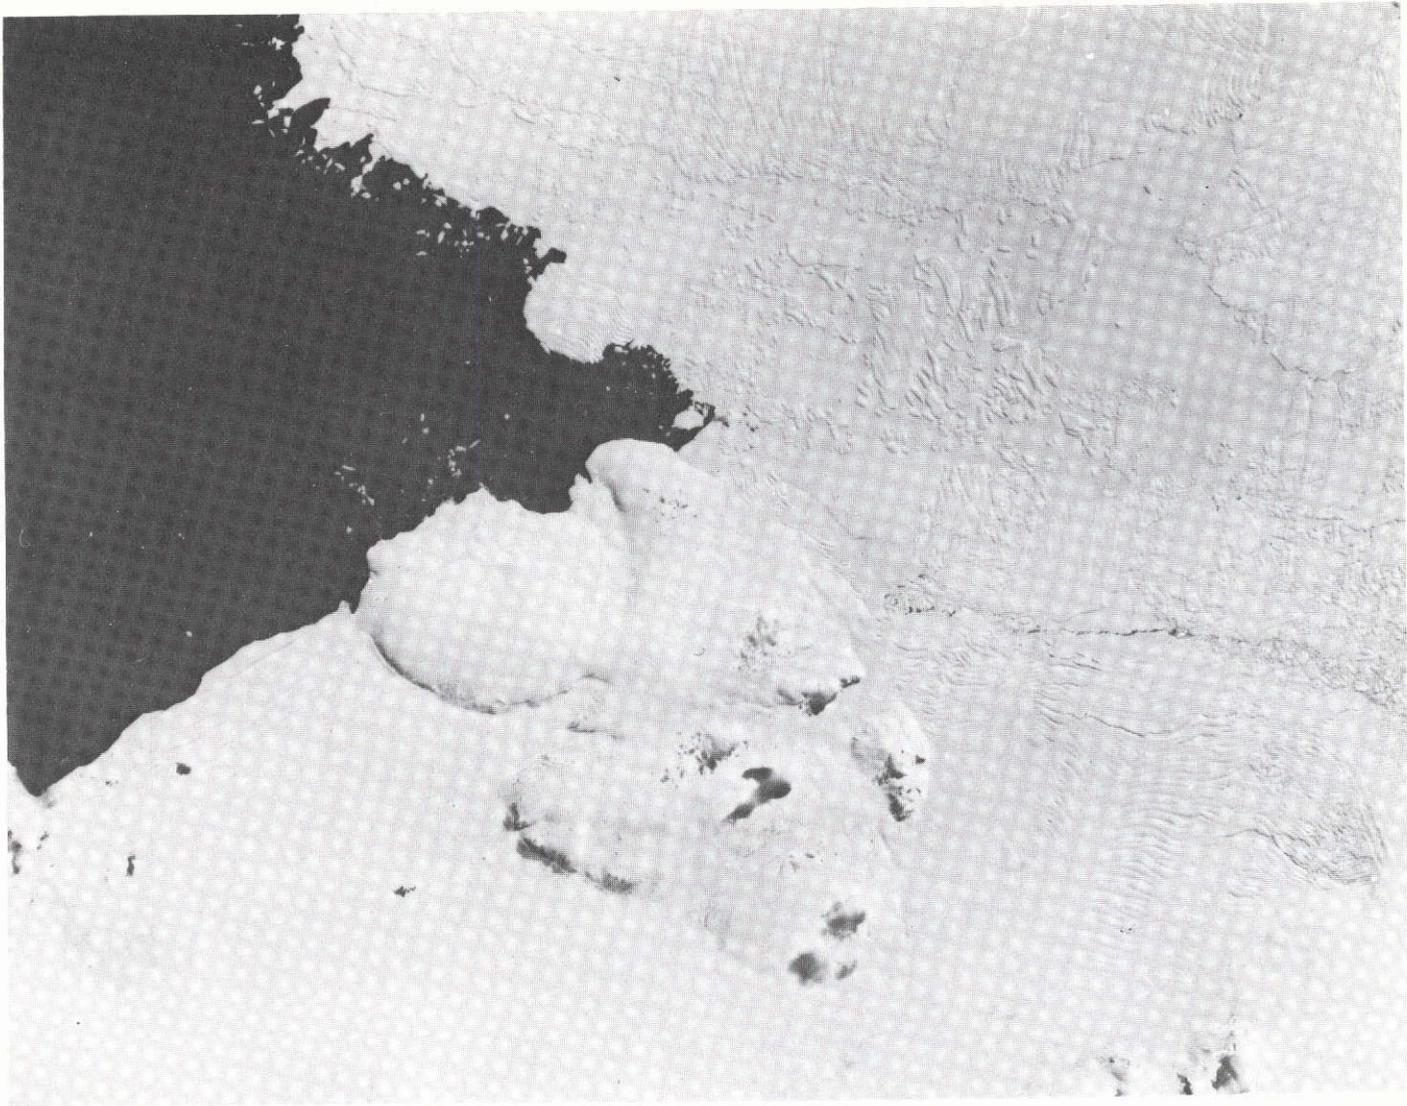

1W114-00 1W113-00 1S075-00 1W111-00
10DEC72 C S74-16/W110-25 N S74-23/W110-02 MSS 7 R SUN EL28 AZ074 214-1950-G-1-N-D-IL NASA ERTS E-1140-14442-7 01

Fig. 5 —Iceberg clusters south and west of Thwaites Iceberg Tongue

total number of icebergs included in each sample is given as well as the number in each interval (above the bars). The total topside area of the icebergs in the sample is given in km^2 .

Figure 6a, from a sample in Fig. 4, seems to indicate a bimodal distribution. However, major portions of the areas in the 1.0 and 1.1 intervals are derived from the two large icebergs--each about 6 km long--mentioned previously in connection with Fig. 4. If these two exceptional icebergs were excluded from the sample, it would subdue the distribution peak near 1.0 and reduce the average area per iceberg to about 0.6 km^2 , which would be more comparable with Figs. 6b and 6c.

The sample represented in Fig. 6d, which comes from north of the tip of Thwaites Iceberg Tongue, is anomalous in its distribution of large widths and of an average area per iceberg of 1 km^2 . The source of these icebergs is not known, but the shapes and large widths are not characteristic of those from Thwaites.

The small samples represented in Figs. 6e and 6f come from the northern edge of the sea-ice belt. They are biased toward smaller and narrower icebergs, which might be expected for these more northerly samples of icebergs that are probably older and more eroded than those near the coasts.

The icebergs in Figs. 6g and 6h were selected from the Thwaites area discussed with Fig. 5. Sample g is the one from near the western edge of the fast ice and may include some icebergs from other sources than Thwaites. The large sample, h, comes from the interior fast ice and should be a pure representation of Thwaites source characteristics.

The sample statistics of Fig. 6 indicate that until a substantial fraction of the annual iceberg yield is harvested, it may not be necessary to use icebergs of greater than 0.5 km width. However, if the samples of Fig. 6 are representative of all the Antarctic iceberg yield, it may be necessary to harvest icebergs up to 0.8 km wide if much more than half of the annual yield is to be used.

Inadequate data precluded an attempt to inventory the total mass of icebergs in the Antarctic, the annual yield, or the average or typical life of icebergs. The great abundance of icebergs that was observed was not inconsistent with a possible mass balance between the accumulation of precipitation in Antarctica and its discharge to the sea, which has been estimated to yield an average of 10^{12} m^3 of icebergs per year. [2] However, the data samples do indicate that there may be great variability in the life and evolution of the icebergs after they have been calved. In some areas they become trapped near the coast for many years and probably melt much more slowly than icebergs that are swept into oceanic gyres and experience significant current gradients over their immersed depths as they circulate through the belt of sea ice. The significantly smaller dimensions of the icebergs found in the

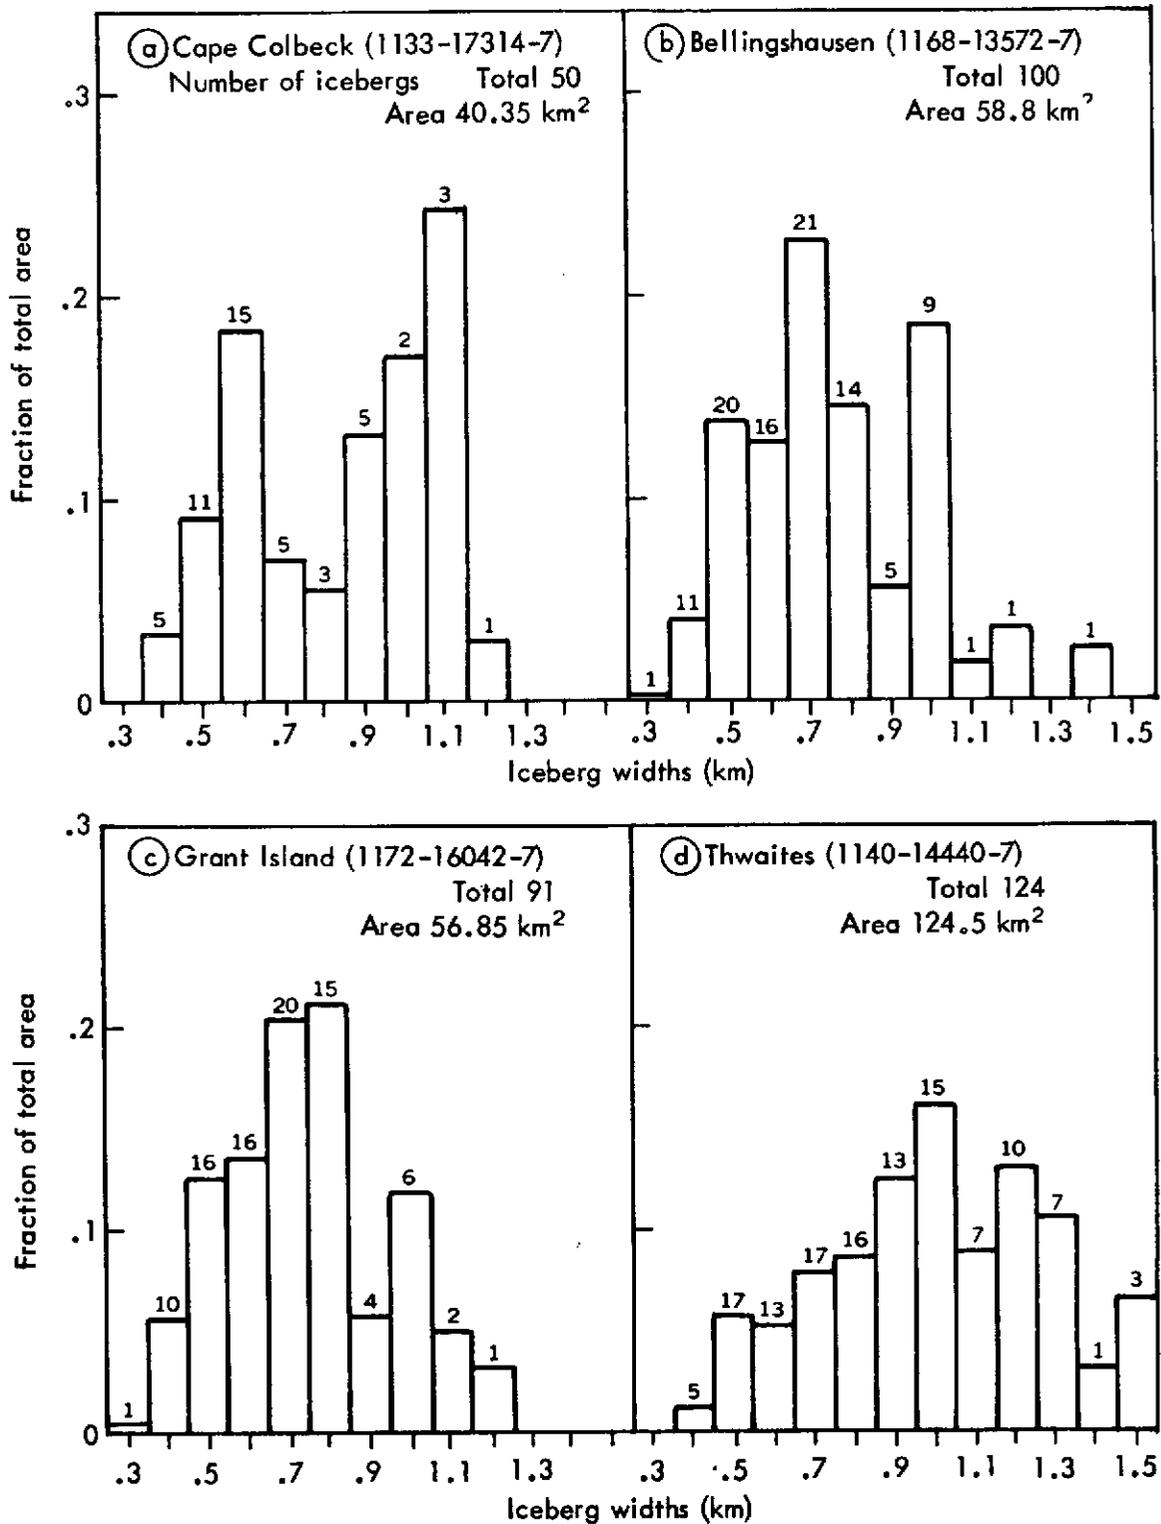


Fig. 6 — Distribution of iceberg widths in sampled areas

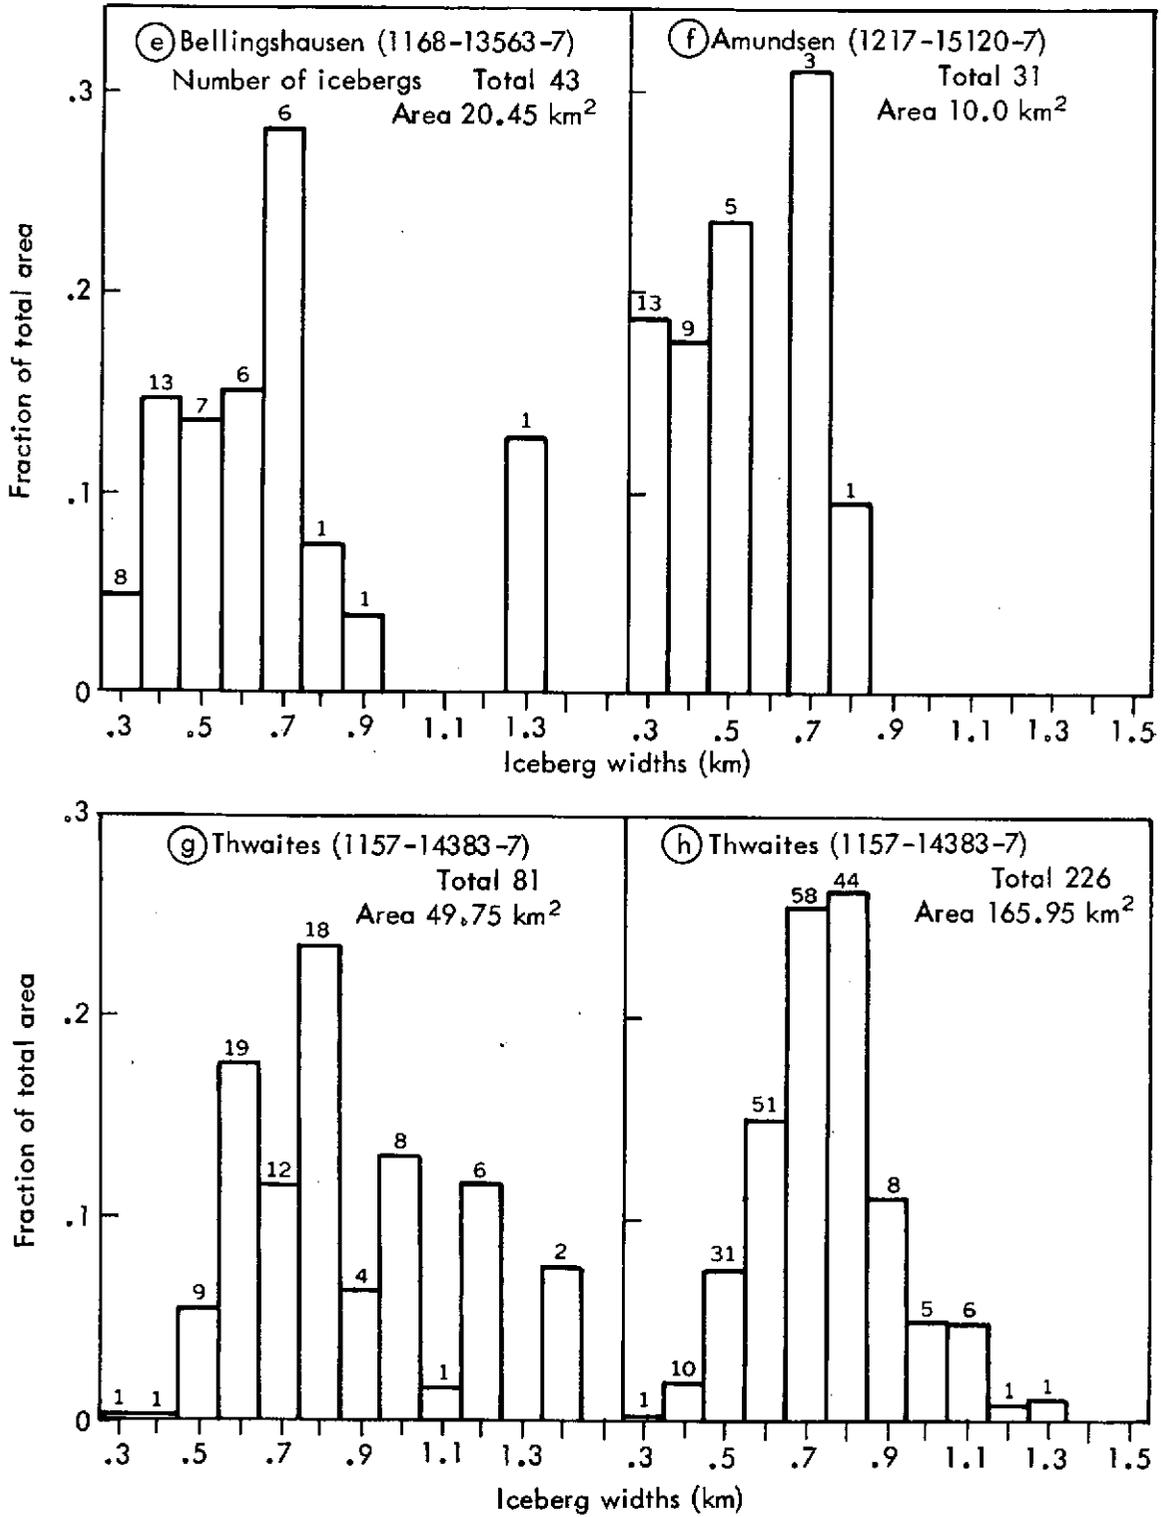


Fig. 6 — Continued

northern edge of the belt as compared with those near the coast indicate that the melting life of the average iceberg in a circulating gyre may be comparable to the circulating period of the icebergs.

The imagery from ERTS-1 did not provide any accurate means of determining height or thickness of icebergs. The shadows produced on surrounding sea ice give an approximate order of magnitude for the height of many of the icebergs (~50 m). However, more accurate determination from satellites will probably require different sensors (such as thermal imaging devices that could measure temperature differences with height, or radio waves using ranging techniques). There probably is some relationship between the thickness of glacial ice streams entering the ocean water and the characteristic widths at which the icebergs tend to break off. Also, the entering flow inclination, tides, and seasons may be influential factors. Additional ERTS data, especially from high-resolution thermal sensors, together with correlation with ground truth, seem desirable for reliable estimates of iceberg thickness.

Some iceberg characteristics, such as the nature and smoothness of the melting submerged surfaces and the expected variations with source and environmental history, will probably never be known without direct physical measurements. Much additional valuable information for achieving efficient harvesting operations will best be gained by experience in the operating environment.

ANTARCTIC TOPOGRAPHY

In addition to the information about iceberg resources that was obtained from ERTS imagery, considerable topographical information was obtained that may be useful for mapping and other Antarctic interests.

A complete listing of images that contain topographical information unobscured by cloud cover may be obtained from the Image Descriptor Data Bank file under the descriptor: Antarctic Topography.

ERTS SYSTEM POTENTIAL

The limited Antarctic imagery that was obtained for this investigation is adequate to extrapolate with reasonable confidence what the ERTS system could be in application to Antarctic iceberg resources. This estimate could be confirmed with suitable system modifications to planned experiments including those with ERTS-B.

LIVE IMAGERY

The principal advantages of live (real-time) imagery obtained with Antarctic readout stations are that it would be possible to collect complete imagery from every orbital pass over Antarctica and it could

be made available for immediate use. This would eliminate the storage capacity limitations and reliability problems of space-borne video recorders. Also, the information could be made available soon enough to be of tactical value in the control of harvesting operations.

There are a number of ways that live readout might be provided in Antarctica. Synchronous satellite relay could make live readout possible almost anywhere on earth. This could require the development and operation of the relay satellites and considerable modification to current ERTS designs, but it may be the ultimate solution. An earlier solution that could be made compatible with current ERTS configurations would be to provide a readout station on board a ship that could be moved to provide the service wherever it was needed. Or earth stations could be installed at suitable locations such as McMurdo station for year-round operation. It appears that such a site alone could provide live readout for most of Antarctica except for coastal and drift-ice areas in the sector of eastern Antarctica between the Weddell Sea and the Amery Ice Shelf. It could provide excellent coverage for readout of stored data because it could follow *every* orbital pass for a relatively long time. Therefore, it could obtain stored readout with very small delays from many areas that it could not reach for live readout.

An alternative to live readout for alleviating the deficiencies of the initial experimental ERTS system relative to Antarctic imagery would be to greatly increase the capacity and flexibility of the recording system. This might require improving the earth station network for readout of stored data in addition to increasing the recording capability in the satellite. A site at McMurdo may be an attractive augmentation that would permit much live readout as well as transmission of most of the stored data on every orbital pass.

The initial investment required to install a readout station near McMurdo is estimated to be comparable to the Fairbanks, Alaska installation--about \$500,000. A crew of 35 has proved satisfactory to provide four operating shifts of eight men each. If a "quick look" facility is to be provided, an initial investment of about \$100,000 would be added. It is estimated that about \$1.5 million per year will be required to cover the annual operating expenses and to recover the initial investment costs during its useful life. If the filtered imagery is to be transmitted to potential users by synchronous satellite relay, it may not increase greatly the costs of the McMurdo station if a suitable site is selected that is within a satisfactory look angle to the relay satellite, but the communication relay costs must be added as a part of the total user costs.

THERMAL AND MICRO WAVELENGTHS

A thermal wavelength band (10.4 to 12.6 micrometers) is planned for inclusion in ERTS-B. With imagery from this band it may be possible

to measure small surface temperature differences day or night. Such a capability may greatly aid in distinguishing icebergs from sea ice and may even permit height determinations of icebergs by temperature differences. Approximately the same ground resolution would be desirable at thermal wavelengths as is provided with the other wavelength bands. Also, approximately the same cloud-cover limitations will apply. Because most of the cloud cover in Antarctica consists of particles that are large compared to these wavelengths, the cloud cover is not expected to provide significantly greater openings at thermal than at the shorter wavelengths. The thermal band is used to record the one-way thermal emission from the surface, and the cloud cover attenuates or darkens this emission. At the shorter wavelength bands, the observations are of scattered sunlight and the brightness of the cloud-scattered sunlight degrades any contrast that might otherwise filter through the cloud cover. However, the distinction between the ways in which the bands obtain imagery is not expected to make any great operational difference in the effects of cloud cover. On the other hand, the many more observation opportunities available with the thermal band (every pass, independent of solar illumination) will permit obtaining two to six times as many glimpses through cloud openings and will enable monitoring throughout the year.

Microwaves could penetrate cloud cover, and the reflections from the top and bottom of ice have been used to measure ice-shelf thicknesses by ranging techniques from aircraft. However, these techniques are not yet feasible from ERTS and the angular resolution achievable at these ranges and wavelengths would not be very useful for observing most individual icebergs. However, synthetic aperture radar techniques could be used from aircraft or satellites to provide high resolution surface mapping independent of cloud cover or solar illumination. Although these techniques may not soon be available on operational ERTS type of satellites, they could be employed with aircraft to greatly reduce the flight effort required with sensors that are obstructed by cloud cover.

SEA-ICE BEHAVIOR AND ICEBERG EVOLUTION

In order to plan the operational harvesting of icebergs it is important to understand sea-ice behavior and iceberg evolution. Much of this knowledge could be obtained by monitoring and following iceberg processes over several yearly cycles of seasons in the areas of interest. Since this should be done prior to operational harvesting, the cost of obtaining the information should be treated as research cost to be recovered during the years of harvesting operations. It does not seem important to have a "quick-look" capability for this type of information. However, in order to achieve usefully complete coverage through the prevailing cloud cover, it would be desirable to obtain imagery on nearly every pass opportunity. The very limited sampling of part of western Antarctica that was accomplished with ERTS-1 will be useful for correlation with more comprehensive data that might be obtained in the next few years. Comprehensive satellite imagery should be buttressed with ground truth information that might be obtained from a test program to acquire, harness, insulate, and tow real (though small) icebergs in Antarctica. Only then

would it be possible to design and invest in operational systems with the necessary confidence.

TACTICAL HARVESTING INFORMATION

Tactical information for aid in acquiring icebergs and controlling the harvesting operations should be timely, and timeliness could be achieved with live readout and a "quick-look" capability. Each operational harvesting expedition could include this capability as an integral part of its facilities. Alternatively, it could be accomplished at a common central station, e.g., McMurdo, and the useful processed information could be forwarded to the harvesting expeditions by satellite relay. In either case, the costs of obtaining the information would be an operational expense that legitimately should be charged to the harvesting operations.

CLAIMING AND MONITORING SERVICE

When there is the possibility of independent harvesting operations competing for icebergs, a claiming procedure that will permit efficient planning and harvesting will be needed. This might be accomplished by practices established in other situations, e.g., staking claims perhaps a year or two in advance, or stationing a man on board so that the ice "ship" is not abandoned. However, a more attractive way of claiming might be to coordinate and monitor the claiming with ERTS imagery. This method could be used to coordinate the claiming early enough to permit efficient planning for harvest without excessive claiming effort or resource waste. The claiming service would be a legitimate operational harvesting expense, and the charge could be determined by the quantity or value of icebergs claimed.

ENTITLEMENTS TO ANTARCTIC ICEBERG RESOURCES

The Antarctic icebergs are a continuous yield resource. They simply melt and return to sea water without a direct benefit to mankind if they are not harvested and used in the process. They are part of the international waters and should be available to anyone as an extension of the freedom-of-the-seas doctrine. Furthermore, it would seem desirable to avoid the tradition practiced for water entitlements in parts of the world in which indefinite claims are established by the first to perfect their rights, so that future new needs may be denied if the resources are not adequate.

It is suggested that the claiming and monitoring service with satellite imagery be extended to include auction of the icebergs, with any surplus revenues used to increase the harvest and equalize the costs. The auction and claiming could be once a year, sufficiently in advance of the harvesting season to permit adequate planning and preparation for the operations. This method of granting entitlement to icebergs should secure the greatest economic benefits from this resource, and it would not deny anyone future access.

ECONOMIC POTENTIALS FOR ERTS

About \$1.5 million per year is estimated to be necessary to maintain a continuous ERTS readout and "quick-look" station in Antarctica. This would permit using the full capabilities of ERTS-1 and ERTS-B on every orbital pass to provide a wealth of information about Antarctica in general, in addition to that of primary value for the harvesting of icebergs. Also, a station near McMurdo would be able to read out any stored information on every ERTS orbit. This might permit greatly increased world-wide use of the image storage capability of ERTS by relieving readout constraints.

The estimated revenue requirement to procure and place an operational ERTS into orbit and control its operation will probably be between \$5 and \$10 million annually. However, the Antarctic harvesting of icebergs should only be assessed its fair share of this revenue requirement.

The total cost of delivering iceberg water to the final user or distributor is estimated to be about \$24 per $k \cdot m^3$. [2] This is only a small fraction of the cost of desalting sea water or of long distance interbasin transfer. Therefore it is not expected that iceberg water will suffer serious competition from these other sources even if the price is raised considerably. However, the demand for iceberg water for agricultural uses is expected to be very elastic about this point, and to supply the agricultural demands it will be necessary in most cases to reach the scale that will permit the attractive prices that have been estimated for iceberg water. Therefore, it is felt that the iceberg harvesting systems may only be able to afford an additional assessment of a few percent of the delivery price for the water before the demand might be seriously affected, i.e., large volume demand might fall rapidly with increasing assessments above about \$1 per $k \cdot m^3$ for ERTS aid.

If 10 percent of the annual yield of Antarctic icebergs were harvested, an assessment of \$0.10 per $k \cdot m^3$ would produce an annual revenue of about \$10 million, which would be adequate to compensate for the share of ERTS operating costs. However, since early harvesting operations may commence at only 1 percent of the annual yield and some research and development costs should be assumed by the iceberg harvesting operations, it would seem appropriate to begin assessing iceberg harvesting operations at a rate between \$0.1 and \$1.0 per $k \cdot m^3$.

In order to obtain as much useful imagery with optical sensors on board high altitude aircraft as might be obtained with full use of ERTS, at least 10 aircraft passes would be required for each ERTS pass to achieve a comparable coverage. The most suitable aircraft for such a task would require at least 1,000 hours of imaging flight every 24 hours in order to duplicate the ERTS coverage. Although a feasible basing and operational plan has not been conceived, an operating fleet of more than 120 aircraft and 400 flight crews would be required to maintain such operations over an extended period of time. This would be a prodigious and costly operation compared to that required with ERTS (at least 10 to 100

times as great an effort). Even with a likely requirement for coverage of only portions of the Antarctic, the task of doing it with optical sensors on board aircraft seems much larger than full coverage by satellite.

If satisfactory coverage could be obtained with synthetic aperture radar on board aircraft, it may be possible to do so for limited operations at costs comparable with the full use of ERTS. The capabilities and costs of both techniques need test and evaluation in order to select the appropriate operational role of each.

The costs of not having the equivalent of ERTS imagery for harvesting of icebergs in the Antarctic are also difficult to assess. Small bootleg operations would be possible without paying an ERTS toll. However, it should be very difficult to achieve dependable competitive operations or obtain user commitments with any operation that would try to harvest without coordination through an ERTS information system established for this purpose.

SUMMARY AND CONCLUSIONS

This investigation is one of a series exploring various aspects of the feasibility of using Antarctic icebergs as a global fresh water resource. Related investigations that have explored concepts for transporting and using the icebergs indicate great promise for this continuous yield resource. However, icebergs of appropriate size and shape must be available for assembly into trains for economical transport, and methods must be found to cope successfully with the surrounding sea ice. Also, ways of harmoniously harvesting this international resource must be developed. These problems have been the concern of this investigation.

The results from ERTS-1 for the period from November 1972 through March 1973 reveal a general prevailing cloud cover more than 80 percent of the time over the Antarctic coastal and sea areas of interest. However, openings in the cloud cover can be exploited to piece together imagery of a large fraction of the earth's surface off Antarctica every few weeks, if every ERTS imaging opportunity is taken.

The sea-ice belt girding Antarctica was very evident, but there was insufficient imagery to refine previous descriptions of its seasonal behavior. Many images of iceberg clusters were obtained that confirm the general abundance and dimensional characteristics of icebergs and that identify differing characteristics with different sample areas. However, the sea-ice and iceberg environment should be comprehensively and continuously monitored for several years in order to acquire enough information to confidently plan and design efficient iceberg harvesting operations. A wealth of additional information for mapping, resource exploration, and research can also be obtained when imagery for iceberg resources is collected.

The potential application for ERTS would be greatly enhanced with live Antarctic readout to enable the timely acquisition of complete imagery

on every orbital pass. Also, use of thermal bands should provide better imagery in daylight or darkness throughout the year. With these improvements in ERTS performance, the long-term monitoring for planning and design as well as the quick-use requirements for control of harvesting operations and the registering of claims and entitlements could be achieved. ERTS has capabilities that could support new concepts for claiming service and establishing entitlements that would drastically reduce the costs, conserve the resources, harmonize the operations, and reserve the opportunity for anyone to acquire any entitlement in the future.

The iceberg harvesting operations can easily bear the costs of the ERTS services that appear to be essential to the success of economical large-scale use of the continuous Antarctic iceberg yield that otherwise melts and returns to sea water without benefit to man in the process.

REFERENCES

1. *ERTS Data Users Handbook*, NASA Goddard Space Flight Center, Greenbelt, Maryland.
2. Hult, J. L., and N. C. Ostrander, *Antarctic Icebergs as a Global Fresh Water Resource*, The Rand Corporation, R-1255-NSF, October 1973.
3. Weeks, W. F., and W. J. Campbell, *Icebergs as a Fresh Water Source: An Appraisal*, Cold Regions Research and Engineering Laboratory, Hanover, N. H., Research Report 200, January 1973.
4. *Earth Resources Technology Satellite, Cumulative Non-U.S. Standard Catalog No. N-9*, NASA Goddard Space Flight Center, Greenbelt, Maryland, May 31, 1973.
5. Newton, Chester W. (ed.), *Meteorology of the Southern Hemisphere*, American Meteorological Society, Meteorological Monographs, Vol. 13, No. 35, November 1972.
6. *Atlas Antarktiki* (Atlas of Antarctica), published in 1966 in Moscow by the Main Administration of Geodesy and Cartography, Ministry of Geology USSR. Translated in *Soviet Geography: Review and Translation*, Vol. 8, nos. 5-6, May-June 1967, American Geographical Society, Lane Press, Burlington, Vermont.
7. *Sailing Directions for Antarctica, Including the Off-Lying Islands South of Latitude 60°S*, H. O. Pub. No. 27, U. S. Navy Hydrographic Office, 2d ed., 1960.
8. *Oceanographic Office Observers Manual: Ice Observations*, H. O. Pub. 606-d, U. S. Navy Oceanographic Office, rev. ed., 1968.