

NASA TECH BRIEF

NASA Pasadena Office



NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D.C. 20546.

Low-Cost Tool Set for Removing Brazed Fittings

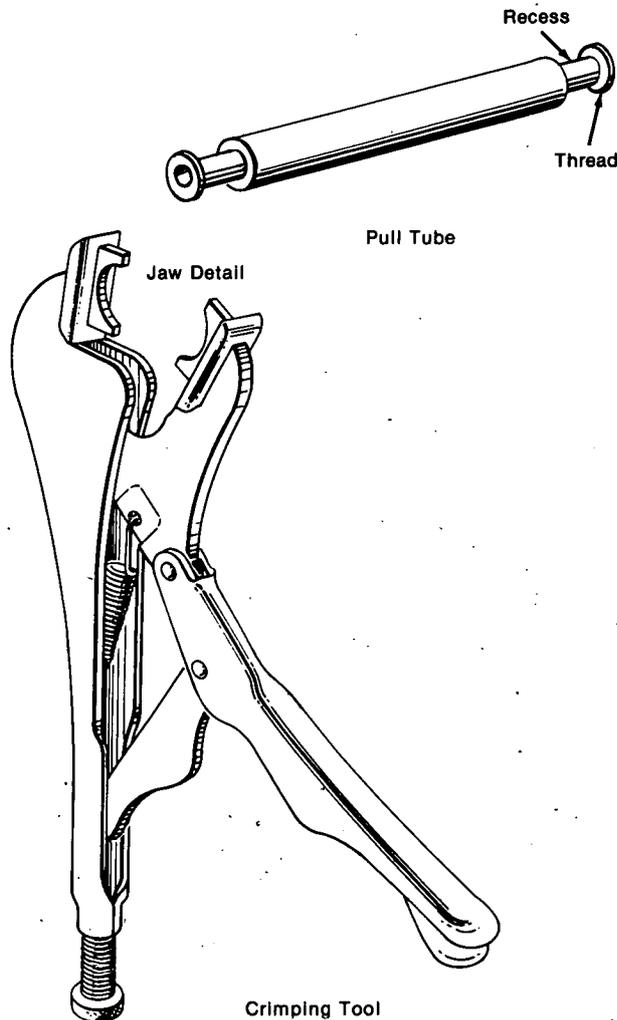


Figure 1. Tool Set for Removing Brazed Fittings

The problem:

In some critical applications fluid delivery tubes must be firmly connected to prevent leakages. A common method is to attach all fittings to the tubes by brazing. Threaded fittings cannot be used because they are more likely to leak. This creates a maintenance problem. Special tools designed to disconnect the brazed fittings are expensive and become useless after several applications.

The solution:

A low-cost tool set has been developed to disconnect brazed fittings.

How it's done:

The set includes a crimping tool and a pull tube as shown in Figure 1. The crimping tool is a modified vise-grip pliers which has special jaws designed to crimp the fittings. The pull tube has a single thread on each end. The tube can be used twice, once on each end, and then discarded.

The fittings are removed by following the procedure shown in Figure 2. The first step is to cut the fitting between the two tubes [Figure 2(a)] using a conventional tube cutter. Next the pull tube is inserted into the cut fitting [Figure 2(b)]. The thread of the pull tube must be worked in past the burr caused by the tube cutter. Then the fitting is crimped into the recess of the pull tube [Figure 2(c)]. An induction heater then is applied to the brazed portion of the fitting, and the fitting is removed by pulling the pull tube with regular pliers [Figure 2(d)].

(continued overleaf)

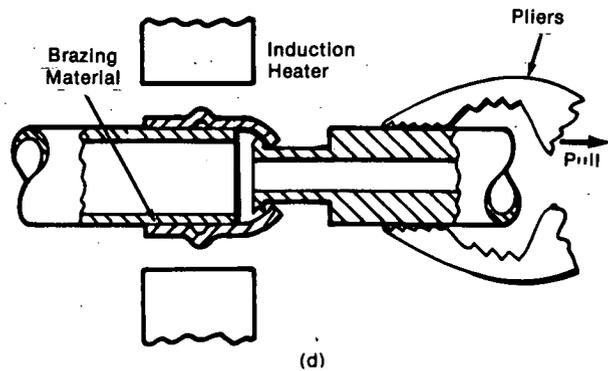
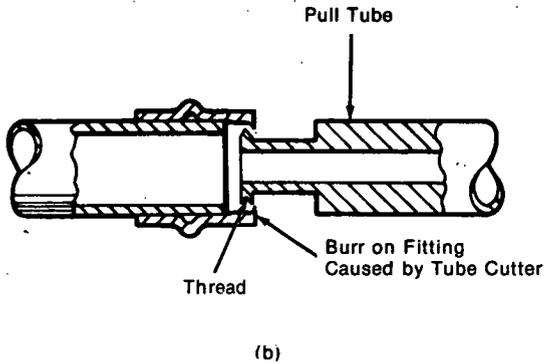
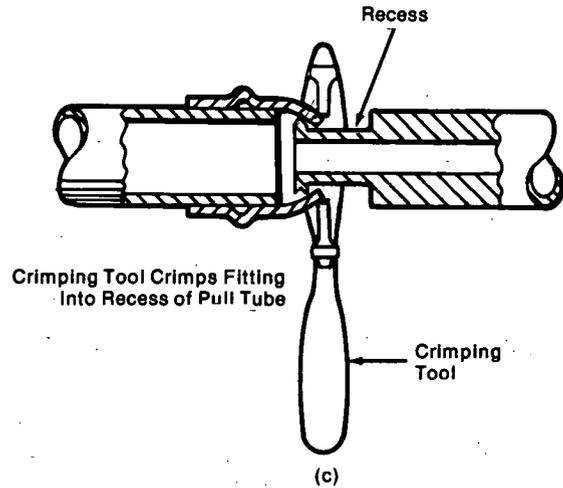
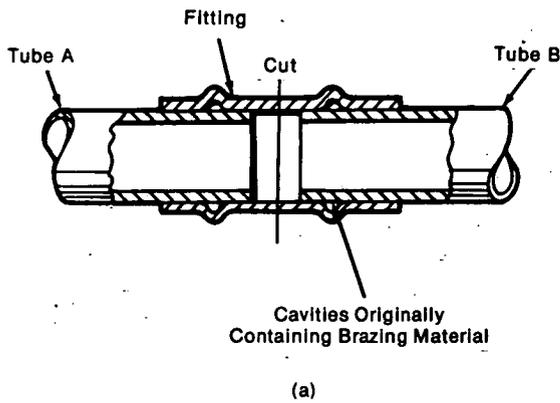


Figure 2. Fitting Removal Procedure: (a) Cutting, (b) Pull Tube Insertion, (c) Crimping, and (d) Fitting Removal

Note:

Requests for further information may be directed to:

Technology Utilization Officer
 NASA Pasadena Office
 4800 Oak Grove Drive
 Pasadena, California 91103
 Reference: TSP75-10054

Patent status:

NASA has decided not to apply for a patent.

Source: Anthony Giandomenico of
 Caltech/JPL
 under contract to
 NASA Pasadena Office
 (NPO-13495)