

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

Technical Memorandum 33-718

*Solution of the Equation of Heat Conduction
With Time-Dependent Sources: Programmed
Application to Planetary Thermal History*

James E. Conel

(NASA-CR-142546) - SOLUTION OF THE EQUATION OF HEAT CONDUCTION WITH TIME DEPENDENT SOURCES: PROGRAMMED APPLICATION TO PLANETARY THERMAL HISTORY (Jet Propulsion Lab.) : 28 p HC \$3.75 N75-20650 Unclas CSCL 20D G3/34 14687



JET PROPULSION LABORATORY
CALIFORNIA INSTITUTE OF TECHNOLOGY
PASADENA, CALIFORNIA

February 15, 1975

1. Report No. 33-718	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle SOLUTION OF THE EQUATION OF HEAT CONDUCTION WITH TIME-DEPENDENT SOURCES: PROGRAMMED APPLICATION TO PLANETARY THERMAL HISTORY		5. Report Date February 15, 1975	
		6. Performing Organization Code	
7. Author(s) James E. Conel		8. Performing Organization Report No.	
9. Performing Organization Name and Address JET PROPULSION LABORATORY California Institute of Technology 4800 Oak Grove Drive Pasadena, California 91103		10. Work Unit No.	
		11. Contract or Grant No. NAS 7-100	
		13. Type of Report and Period Covered Technical Memorandum	
12. Sponsoring Agency Name and Address NATIONAL AERONAUTICS AND SPACE ADMINISTRATION Washington, D.C. 20546		14. Sponsoring Agency Code	
15. Supplementary Notes			
16. Abstract A computer program (Program SPHERE) solving the inhomogeneous equation of heat conduction with radiation boundary condition on a thermally homogeneous sphere is described. The source terms are taken to be exponential functions of the time. Thermal properties are independent of temperature. The solutions are appropriate to studying certain classes of planetary thermal history. Special application to the Moon is discussed.			
17. Key Words (Selected by Author(s)) Lunar Interior Planetary Interiors Thermal History		18. Distribution Statement Unclassified -- Unlimited	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 20	22. Price

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

Technical Memorandum 33-718

*Solution of the Equation of Heat Conduction
With Time-Dependent Sources: Programmed
Application to Planetary Thermal History*

James E. Conel

JET PROPULSION LABORATORY
CALIFORNIA INSTITUTE OF TECHNOLOGY
PASADENA, CALIFORNIA

February 15, 1975

**Prepared Under Contract No. NAS 7-100
National Aeronautics and Space Administration**

Preface

The work described in this report was performed by the Space Sciences Division of the Jet Propulsion Laboratory.

PRECEDING PAGE BLANK NOT FILMED

Foreword

A need to investigate solutions to the inhomogeneous equation of heat conduction with time-dependent sources and the so-called linearized radiation (or insulation) boundary condition arose directly from a study of the constraints on lunar thermal history posed by systematic analysis of returned lunar samples and geophysical data reported by Conel et al. in 1972 (see Ref. 1). A great deal of numerical modelling was carried out to support and guide us to the principal conclusions presented in that report; these specific model results will be published elsewhere. The present document describes only the mathematical problem involved and its numerical solution.

Studies of planetary thermal history have, with time, evolved mathematical models of ever-increasing complexity. Added complications have involved inclusion of radiative transfer with the (radiative) thermal conductivity as a prescribed function of temperature, inclusion of latent heat associated with phase changes, simulated convection in molten and solid zones, redistribution of heat sources upon solidification according to specified laws, etc. Most of these refinements render the mathematical problem nonlinear, and hence force numerical integration of the heat equation from the outset. Sophisticated models also require specification of an increasing number of material parameters that are often poorly determined. In my opinion, it is hard to justify an increase in model complexity when the fundamental data to be used are not well known. An increase in the degrees of freedom accompanying construction of elaborate model schemes also allows an investigator to achieve his desired result by more and more diverse means. To avoid some of these possible sources of difficulty, I have purposely chosen to deal with comparatively simple analytic solutions to the equation of heat conduction. My attitude is that until it is compellingly shown that elementary procedures and simple assumptions fail to explain the observations, it is not worthwhile abandoning such procedures and assumptions.

Ordinarily, there is no place for publication of the details of complex computer codes in the scientific literature. I consider this an unfortunate necessity, since it may mean that there is no way of checking the procedure or accuracy of a lengthy numerical exercise, and thus no basis for judging its validity. I have prepared the present report to compensate in part for any such deficiency in my own work. I hope in addition that the documentation and code may prove useful to others with their special problems.

Acknowledgment

I want to thank John B. Morton of the Jet Propulsion Laboratory for coding this program.

Contents

I. Introduction	1
II. Statement of Problem	2
III. Solution of the Differential Equation	3
IV. Specification of Initial Temperature and Distribution of Radioactivity	4
V. Solution for Change in Boundary Insulation at Time t'	8
VI. Input Data	10
References	14
Appendix	15

Table

1. Radionuclide heat generation and decay constants	8
---	---

Figures

1. Three-shell radioactive sphere	5
2. Initial temperature and radionuclide distributions	5
3. Listing of "input data" and first five roots of transcendental equation $\tan(\alpha \cdot R) + \alpha/h = 0$	12
4. Listing of radius and temperature for accompanying plots for $t = 7.5 \times 10^{16}$ sec and $[U] = 30$ ppb	13
5. Temperature distribution in three-zone model at time indicated for 30 ppb U	13

Abstract

A computer program (Program SPHERE) solving the inhomogeneous equation of heat conduction with radiation boundary condition on a thermally homogeneous sphere is described. The source terms are taken to be exponential functions of the time. Thermal properties are independent of temperature. The solutions are appropriate to studying certain classes of planetary thermal history. Special application to the Moon is discussed.

Solution of the Equation of Heat Conduction with Time-Dependent Sources: Programmed Application to Planetary Thermal History

I. Introduction

This report is a concise documentation of a programmed solution to the inhomogeneous equation of heat conduction in spherical coordinates with time-dependent sources (Program SPHERE). The application here is in the study of planetary thermal history, and in particular the Moon (see Ref. 1). The sphere is homogeneous in density and thermal properties. The particular example given is specialized from a general case for radial distribution of heat sources and initial temperature given by Lowan (Ref. 2). The boundary condition at the outer surface is the so-called linearized radiation boundary condition or "Fourier's problem of the third kind"; in this particular instance the body is considered to radiate to a medium at constant temperature. This condition also applies to problems where a *thin* skin of insulating material exists on the exterior of the body (Ref. 3) such that the heat capacity of the skin can be neglected. This is tantamount to saying that if a change in temperature occurs on the inner insulating boundary, then the exterior medium responds "instantaneously" to establish a linear temperature gradient in the insulation itself. In this case the outer surface temperature of the insulation is held fixed, which corresponds mathematically to the case previously discussed where radiation is to a medium at constant temperature.

Two points should be emphasized in applying these results: (1) The *surface* temperature solved for is the temperature of the medium *just beneath* the insulating layer, and (2) Instead of dealing with the more complicated problem of varying *surface* temperature (i.e., the temperature at the outer physical surface), we have chosen the boundary temperature to be fixed, in most cases taking it to be the average value of whatever the expected sinusoidal variation might be on

an atmosphereless body rotating with given angular velocity about its own axis, and around the Sun. The boundary temperature, of course, can be assigned arbitrarily. Thus, the details of the fourth power nonlinearity in the usual boundary conditions are not dealt with; at the same time, these details are completely unimportant in understanding thermal problems of deep planetary interiors. (They may, of course, become important in applications where near-surface regolith conditions are of interest; in this case numerical techniques would be advisable from the outset, although viable alternative procedures, still requiring computers for hard answers, are useful (see Ref. 4 for details)).

The reason for utilizing this general approach in analyzing problems involving insulation is that the full, more complicated problem of dealing with the thermal properties of the outer layer is avoided by a simple mathematical trick. At the same time, we have been forced to neglect any radioactively generated heat contribution in the insulating blanket itself. This could normally be dealt with in practice by an approximate separate calculation of equating sources to flow, since the insulating layer is usually thin relative to the planetary radius.

An additional feature has been added to the original Lowan calculations. In considering the physical problem of lunar thermal history, it became evident that the boundary condition might necessarily be a function of time. The specific problem treated is that of having the insulation vary in thickness as a step function of time at some specified time $t' > 0$. In this instance, $t = 0$ corresponds to the time of formation of the Moon, 4.6×10^9 years ago. In the lunar example, $t' \simeq 1 \times 10^9$ years (3.1536×10^{16} s), although in general the value of t' may be anything, in many practical circumstances zero. When a *nonzero* t' is used in the program, the new origin of time coordinates is such that $t = 0$ corresponds to t' , and the calculations are made in specified, time incremental steps Δt with the first being $t' + \Delta t$. Thus, for example, if $t' = 1 \times 10^9$ years, the time corresponding to the present would be 3.6×10^9 years, and if 10 time-increments were needed, $\Delta t = 3.6 \times 10^8$ years. The first calculated value would correspond to an actual time from the standpoint of radioactive source strength of 1.0×10^9 years plus 3.6×10^8 years or 1.36×10^9 years. Once t' and Δt have been assigned, a specific portion of the time-history may be examined by redefining the origin of time, and specifying N , the number of time steps, in a suitable fashion. Suppose, for example, that the thermal regime at a single time 4.5×10^9 years is wanted. The time origin (program statement 999) is simply redefined as $\text{TIME} = 1.41912\text{D}17 - \Delta t$, and N is set equal to one.

II. Statement of Problem

The formal boundary value problem for temperature T as a function of r and t which we solve, is as follows:

$$\frac{\partial T}{\partial t} - \frac{K}{\rho c} \frac{2}{r} \frac{\partial T}{\partial r} - \frac{K}{\rho c} \frac{\partial^2 T}{\partial r^2} = \phi(r,t) \quad (1)$$

$$\lim_{t \rightarrow 0} T(r,t) = f(r) \quad (2)$$

$$\frac{\partial T}{\partial r} = 0, \quad r = 0 \quad (3)$$

$$\frac{\partial T}{\partial r} + hT = hT_s, \quad r = R \quad (0 < t < t') \quad (4)$$

In Eqs. (1) through (4),

ρ = density in g/cm³

c = specific heat in cal g⁻¹ °K⁻¹

K = thermal conductivity in cal cm⁻¹ sec⁻¹ °K⁻¹

The factor $h = K'/Kd$, where

K' = thermal conductivity of insulation

d = thickness of insulation in cm

At time t' the thickness of insulation is assumed to change to d' , and Eq. (4) becomes

$$\frac{\partial T}{\partial r} + h'T = h'T_s, \quad t \geq t' \quad (5)$$

The source function $\phi(r,t)$ pertains to heat production from exponential decay of radioactive sources and is given by

$$\phi(r,t) = \frac{1}{\rho c} \sum_{j=1}^4 \rho A_j(\bar{T}, r) H_j \exp[\lambda_j(\bar{T} - t)] \quad (6)$$

where $A_j(\bar{T}, r)$ are abundances (in g/g) of radionuclide species j at time $\bar{T} = 4.6 \times 10^9$ years, i.e., the present. The H_j are rates of heat generation in cal g⁻¹ sec⁻¹ and λ_j are the decay constants. The radionuclides considered are ⁴⁰K, ²³²Th, ²³⁵U, and ²³⁸U ($j = 1, 2, 3, 4$). The following relations between these have been assumed or are to be specified:

$$[^{40}\text{K}] = 1.19 \times 10^{-4} [\text{K}]; \quad \frac{[^{232}\text{Th}]}{[\text{U}]} = 4; \quad \frac{[^{235}\text{U}]}{[^{238}\text{U}]} = \frac{1}{137.7}; \quad \frac{[\text{K}]}{[\text{U}]} = \beta \quad (7)$$

The parameter β may be specified arbitrarily but has not in the present problem been taken as a function of r . The final variable of the source function is [U], and may be specified arbitrarily. In all of the above, [\cdot] signifies concentration in g/g.

III. Solution of the Differential Equation

As a result of the boundary condition (Eq. 5), the solution for $T(r,t)$ subsequent to t' requires the solution of a new boundary-value problem with a new "initial" temperature distribution $f'(r)$ appropriate to whatever problem is embodied in the

solutions to Eqs. (1) through (4) and Eq. (5). The formal solution to the system of Eqs. (1) through (4) is given by Lowan (Ref. 2; see his Eq. 21') as

$$T(r,t) - T_0 = \frac{2}{r} \sum_{n=1}^{\infty} \frac{(\bar{h}^2 + \lambda_n^2) \sin \lambda_n r}{R \lambda_n^2 + \bar{h}(R\bar{h} + 1)} \exp(-\kappa \lambda_n^2 t) \left\{ \int_0^R \xi f(\xi) \sin \lambda_n \xi d\xi + \int_0^R \xi \sin \lambda_n \xi d\xi \int_0^t \phi(\xi, \tau) \exp(-\kappa \lambda_n^2 \tau) d\tau \right\} \quad (8)$$

where

$$\bar{h} = \frac{K'}{Kd} - \frac{1}{R} \quad (9)$$

and the λ_n are roots of

$$\alpha \cot \alpha R + \bar{h} = 0 \quad (10)$$

The conductivity of the insulating layer is K' ; R is the planetary radius. It is ordinarily not known how many roots of this equation may be required to achieve a given stability to the convergence of the series in Eq. (8), so it is possible to specify the maximum number of solutions to Eq. (10) independently. These are ordinarily computed first and stored. In a typical problem using double-precision arithmetic, 75 to 100 terms may be summed for any given radial and time increment, so that at least this many λ_n are required. As a safety factor, the value MAXIT, defined in the Appendix, is usually given a value like 500. The summation over n is continued until ten consecutive values in the series give values differing by less than 10^{-3} . This criterion naturally depends upon uniform convergence of the series. The question of nonuniformity of convergence has not been formally investigated. Thusfar, however, no numerical instability has been noted in any calculation carried out to date.

IV. Specification of Initial Temperature and Distribution of Radioactivity

In problems dealing with the Moon, we have considered spherical shell geometries like that shown in Fig. 1.

For initial temperature, the Moon is divided into two radial, spherically symmetric zones:

$$f(\xi) = T(r,0) = T_0 + [T_m(\tau_1) - T_0] \frac{r^2}{r_1^2}, \quad 0 \leq r \leq r_1 \quad (11)$$

$$= T_m(R) + T'_m(R - r), \quad r_1 \leq r \leq R \quad (12)$$

Here, T_0 is equal to the initial temperature of accreting material (on the independent spherical accretion model) adjusted appropriately for any increase due

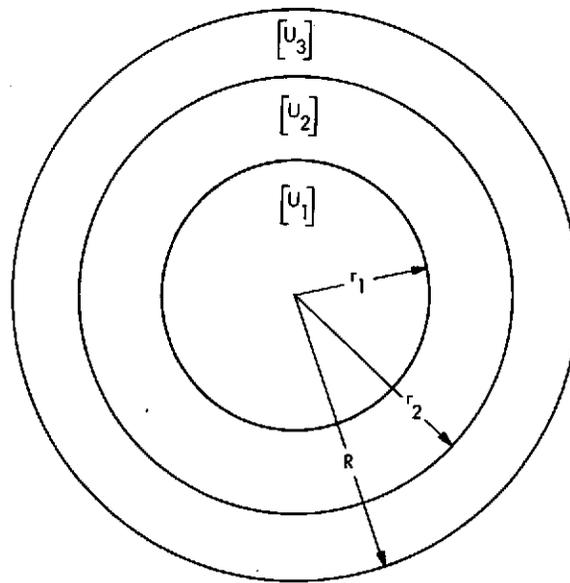


Fig. 1. Three-shell radioactive sphere

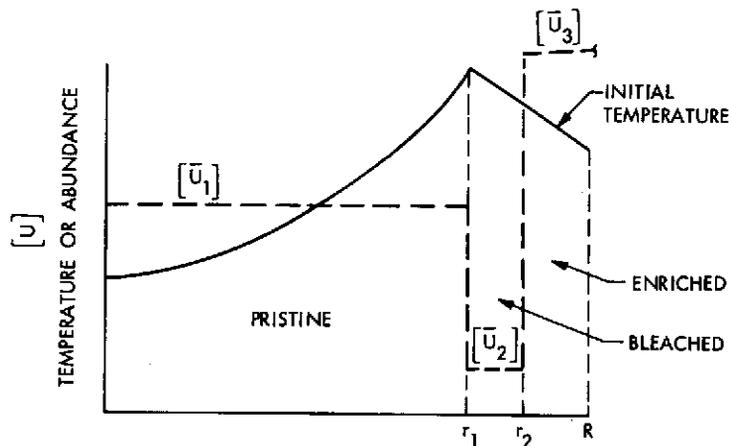


Fig. 2. Initial temperature and radionuclide distributions

to adiabatic compression. At 1 AU at the present time, for example, uncompressed material would have a temperature of about 400°K while, for lunar mass, adiabatic compression would account for about a 50°K increase. The central temperature T_0 for such problems is thus near 450°K . In Eqs. (11) and (12), $T_m(r_1)$ is the melting point of postulated lunar material at radius r_1 , $T_m(R)$ is the melting point at the surface, and T'_m is the melting point gradient in $^{\circ}\text{K}/\text{cm}$.

The graphical form of Eqs. (11) and (12) describing independent accretion and surficial melting and differentiation is shown in Fig. 2. For numerical purposes, these quantities, where required, have been taken from experimental values

obtained from returned lunar samples. Thus, Ringwood and Essene (Ref. 5) would give the following values for Apollo 11 basalt:

$$T_m(R) = 1360^\circ\text{K}$$

$$T_m(r_1) = 1480^\circ\text{K}$$

$$T'_m = 4.8 \times 10^{-6} \text{ }^\circ\text{K/cm}$$

Equations (11) and (12) may be modified to describe other models of planetary origin. If a lunar-sized object is taken to be at the melting point throughout initially, the starting temperature in the absence of phase changes will be quite nearly a parabolic function of radius. To describe such a temperature profile, in Eq. (11) we set r_1 equal to R , and $T_m(r_1)$ equal to $T_m(R)$, the melting point at the surface; in Eq. (12), $T_m(R) = T'_m = 0$. The quantity T_0 is then interpreted as the melting point at $r = 0$.

The abundances of radioactive species on the accretion model are taken to be *constant* values within each zone, not exponentially decreasing functions of depth as assumed, for example, by Hanks and Anderson (Ref. 6). While there is field evidence for decrease of radioactive sources with depth in the Earth according to a law such as $[U] = [U_0] e^{-\mu z}$ (z positive downward), this has been substantiated only for crustal regions and most firmly in relatively localized batholithic portions of the crust. At any rate, if the portions of the Moon involved in any primordial melting are small, i.e., $R - r_2 \ll R$, then the detailed distribution of sources near the surface is of no consequence as far as the deeper temperature is concerned.

The value of $[U_1]$ is equal to the *present* "primordial" U abundance, $[U_2]$ is equal to the present U abundance of the depleted zone, and $[U_3]$ is equal to the present U abundance in the "crust," and determined as follows: $[U_1]$ is the assumed primordial value of "untouched" or undifferentiated lunar material; $[U_2]$ and $[U_3]$ then follow by mass conservation arguments once it has been hypothesized what fraction \bar{f} of $[U_1]$ has been removed from the bleached zone by a differentiation process. If complete bleaching has occurred, then $\bar{f} = 1$ for zone two and the entire mass of U in the zone between r_2 and r_1 has been concentrated into the zone between r_2 and R .

With the concentration $[U_1]$ specified, together with the factor \bar{f} , we get for a homogeneous body

$$[U_2] = (1 - \bar{f}) [U_1] \quad (13)$$

and

$$[U_3] = \frac{R^3 - r_2^3 + \bar{f}(r_2^3 - r_1^3)}{R^3 - r_2^3} [U_1] \quad (14)$$

Note that Eqs. (13) and (14) allow treatment of a variety of two-zone models as well. If the uranium abundance of postulated primordial material is $[U_1]$ and the planet is conceived to differentiate into two portions with core of radius r_2 and (present) abundance $[U'_1]$, we set \bar{f} equal to $1 - [U'_1]/[U_1]$, and r_1 equal to zero. The factor \bar{f} must be calculated by hand. It does not matter mathematically

that $[U_1]$ is specified for a region of zero volume. To obtain the temperature increase from radioactive sources alone, T_s must be set equal to zero, and the initial temperature distribution taken zero throughout as well.

Specification of the U abundance has been emphasized here and we have relied upon connections between U , Th , and K cited earlier to specify abundances of the other species involved, and their corresponding heat generations. It may well be that such systematic connections do not exist in all instances (except the $^{235}U/^{238}U$ ratio). Thus β , the $[K]/[U]$ ratio from the orbital gamma ray data, can be shown to vary *laterally* over the Moon's surface. There is also *no* guarantee that it is constant throughout the lunar interior. A similar situation exists on the Earth where xenoliths from the deep interior (Ref. 7) have lunar-like rather than terrestrial-like $[K]/[U]$ ratios. So the real distributions may be ones of great complexity.

We have noted that there is room for considerable computational flexibility in the distributions of initial temperature or radioactivity in spite of specific analytic forms taken here. The user is cautioned, however, that calculations for decay of initial temperature or temperature changes for radioactive heating must be done sequentially *unless* boundaries of zones in the initial profiles coincide, as they are shown to do in Figs. 1 and 2. The assumption of spherical symmetry is always made.

Integration of Eq. (8) is routine for the conditions given in Eqs. (11) and (12) and the constant radioactivity specified, i.e.,

$$\begin{aligned} [U] &= [U_1], & 0 < r < r_1 \\ &= [U_2], & r_1 < r < r_2 \\ &= [U_3], & r_2 < r < R \end{aligned}$$

The result is

$$T(r,t) - T_s = \frac{2}{r} \sum_{n=1}^{\infty} \frac{(\bar{h}^2 + \alpha_n^2) \sin \alpha_n r}{R\alpha_n^2 + \bar{h}(R\bar{h} + 1)} [I_1(n) + I_2(n)] \exp(-\kappa\alpha_n^2 t) \quad (15)$$

where

$$I_1(n) = I_{11}(n) + I_{12}(n) + I_{13}(n) \quad (16)$$

$$I_{11}(n) = \frac{T_0}{\alpha_n^2} (\sin \alpha_n r_1 - \alpha_n r_1 \cos \alpha_n r_1) + \left[\frac{T_m(r_1) - T_0}{r_1^2 \alpha_n^4} \right] \quad (17)$$

$$\begin{aligned} I_{12}(n) &= \frac{[T_m(R) + T'_m R]}{\alpha_n^2} (\sin \alpha_n R - \sin \alpha_n r_1 - \alpha_n R \cos \alpha_n R + \alpha_n r_1 \cos \alpha_n r_1) \\ &\quad - \frac{T'_m}{\alpha_n^3} [2\alpha_n (R \sin \alpha_n R - r_1 \sin \alpha_n r_1) - (\alpha_n^2 R^2 - 2) \cos \alpha_n R \\ &\quad + (\alpha_n^2 r_1^2 - 2) \cos \alpha_n r_1] \end{aligned} \quad (18)$$

$$I_{1s}(n) = -\frac{T_s}{\alpha_n^2} (\sin \alpha_n R - \alpha_n R \cos \alpha_n R) \quad (19)$$

$$I_2(n) = \frac{1}{\rho c} \sum_{j=1}^4 C_j(n,t) [S_{21}(j,n) + S_{22}(j,n) + S_{33}(j,n)] \quad (20)$$

with

$$C_j(n,t) = \frac{1 - \exp [-(\lambda_j - \kappa \alpha_n^2)t]}{(\lambda_j - \kappa \alpha_n^2) \alpha_n^2} \quad (21)$$

$$S_{21}(j,n) = s_{1j} (\sin \alpha_n r_1 - \alpha_n r_1 \cos \alpha_n r_1) \quad (22)$$

$$S_{22}(j,n) = s_{2j} (\sin \alpha_n r_2 - \sin \alpha_n r_1 - \alpha_n r_2 \cos \alpha_n r_2 + \alpha_n r_1 \cos \alpha_n r_1) \quad (23)$$

$$S_{33}(j,n) = s_{3j} (\sin \alpha_n R - \sin \alpha_n r_2 - \alpha_n R \cos \alpha_n r + \alpha_n r_2 \cos \alpha_n r_2) \quad (24)$$

The α_n are consecutive positive roots of Eq. (10). The s_{ij} are given by

$$s_{ij} = \rho A_{ij} H_j \exp(\lambda_j \bar{T}), \quad (j = 1, 2, 3, 4) \quad (25)$$

where the A_{ij} are abundances of species j in the i th shell and $\bar{T} = 4.6 \times 10^9$ years or an appropriate age for the object in question.

The heat generation and decay constants used are taken from Clark (Ref. 8) and are listed in Table 1 in calories and in calories per gram units.

Table 1. Radionuclide heat generation and decay constants

j	Nuclide	H_j (cal sec ⁻¹ g ⁻¹)	λ_j (sec ⁻¹)
1	⁴⁰ K	6.658×10^{-9}	1.682×10^{-17}
2	²³² Th	6.314×10^{-9}	0.1582×10^{-17}
3	²³⁵ U	1.363×10^{-7}	3.082×10^{-17}
4	²³⁸ U	2.25×10^{-8}	0.488×10^{-17}

V. Solution for Change in Boundary Insulation at Time t'

If the insulation changes at time $t' > 0$ to a value such that the constant \bar{h} changes from \bar{h} to \bar{h}_1 (corresponding to insulation thickness changes d to d_1 , all other parameters remaining invariant), the solution for the subsequent temperature is $\tilde{T}(r,t)$ ($t > t'$):

$$\begin{aligned} \tilde{T}(r,t) - T_s = & \frac{2}{r} \sum_{n=1}^{\infty} \psi(n) \sin \alpha_n r \left\{ \sum_{m=1}^{\infty} \psi(m) \right. \\ & \times \left[I_1(m) \exp [-\kappa(\alpha_m^2 t' + \alpha_n^2 t)] \right. \end{aligned}$$

$$\begin{aligned}
& + \frac{4}{K} \sum_{j=1}^4 \bar{C}(j,m,n;t,t') Q(j,m) \Big] U(m,n) \\
& + \frac{\kappa}{K} \sum_{j=1}^4 \bar{C}'(j,n;t) Q'(j,n) \Big\} \quad (26)
\end{aligned}$$

where

$$\psi(m) = \frac{\bar{h}^2 + \alpha_m^2}{R\alpha_m^2 + \bar{h}(R\bar{h} + 1)}, \quad (\alpha_m \text{ roots of } \alpha \cot \alpha R + \bar{h} = 0) \quad (27)$$

$$\psi(n) = \frac{\bar{h}_1^2 + \alpha_n^2}{R\alpha_n^2 + \bar{h}_1(R\bar{h}_1 + 1)}, \quad (\alpha_n \text{ roots of } \alpha \cot \alpha R + \bar{h}_1 = 0) \quad (28)$$

$$I_1(m) = I_{11}(m) + I_{12}(m) + I_{13}(m) \quad (29)$$

where I_{11} , I_{12} , I_{13} , are given by Eqs. (17), (18) and (19), changing m for n . Note however that in Eq. (17), $T_m(r_1)$ refers to the melting temperature at r_1 ; there is no summation over m implied. Also in Eq. (26)

$$\bar{C}(j,m,n;t,t') = \frac{\exp[-\kappa(\alpha_m^2 t' + \alpha_n^2 t)] - \exp[-(\lambda_j t' + \kappa \alpha_n^2 t)]}{(\lambda_j - \kappa \alpha_m^2) \alpha_n^2} \quad (30)$$

$$\bar{C}'(j,n;t) = \frac{\exp(-\kappa \alpha_n^2 t) - \exp(-\lambda_j t)}{(\lambda_j - \kappa \alpha_n^2) \alpha_n^2} \quad (31)$$

$$U(m,n) = \frac{\sin(\alpha_m - \alpha_n)R}{(\alpha_m - \alpha_n)} - \frac{\sin(\alpha_m + \alpha_n)R}{(\alpha_m + \alpha_n)} \quad (32)$$

$$Q(j,m) = S_{21}(j,m) + S_{22}(j,m) + S_{23}(j,m) \quad (33)$$

$$S_{21}(j,m) = s_{1j}(\sin \alpha_m r_1 - \alpha_m r_1 \cos \alpha_m r_1) \quad (34)$$

$$S_{22}(j,m) = s_{2j}(\sin \alpha_m r_2 - \sin \alpha_m r_1 - \alpha_m r_2 \cos \alpha_m r_2 + \alpha_m r_1 \cos \alpha_m r_1) \quad (35)$$

$$S_{23}(j,m) = s_{3j}(\sin \alpha_m R - \sin \alpha_m r_2 - \alpha_m R \cos \alpha_m R + \alpha_m r_2 \cos \alpha_m r_2) \quad (36)$$

with the s_{ij} given by Eq. (25).

The $[A_{ij}]$ ($i = 1,2,3$ for core, mantle, and crust; $j = 1,2,3,4$ for nuclide species) are

$$[A_{ij}] = \begin{bmatrix} 1.19 \times 10^{-4} \beta[U_1] & 1.19 \times 10^{-4} \beta[U_2] & 1.19 \times 10^{-4} \beta[U_3] \\ 3.7 [U_1] & 3.7 [U_2] & 3.7 [U_3] \\ \frac{[U_1]}{138.7} & \frac{[U_2]}{138.7} & \frac{[U_3]}{138.7} \\ \frac{137.7}{138.7} [U_1] & \frac{137.7}{138.7} [U_2] & \frac{137.7}{138.7} [U_3] \end{bmatrix}$$

$$\equiv \begin{bmatrix} A_{11} & A_{21} & A_{31} \\ A_{12} & A_{22} & A_{32} \\ A_{13} & A_{23} & A_{33} \\ A_{14} & A_{24} & A_{34} \end{bmatrix} \quad (37)$$

and the relations between $[U_1]$, $[U_2]$, $[U_3]$ as given by Eqs. (13) and (14) are

$$Q'(j,n) = S'_{21}(j,n;t') + S'_{22}(j,n;t') + S'_{23}(j,n;t') \quad (38)$$

$$\left. \begin{aligned} S'_{21}(j,n;t') &= s'_{1j}(\sin \alpha_n r_1 - \alpha_n r_1 \cos \alpha_n r_1) \\ S'_{22}(j,n;t') &= s'_{2j}(\sin \alpha_n r_2 - \sin \alpha_n r_1 - \alpha_n r_2 \cos \alpha_n r_2 + \alpha_n r_1 \cos \alpha_n r_1) \\ S'_{23}(j,n;t') &= s'_{3j}(\sin \alpha_n R - \sin \alpha_n r_2 - \alpha_n R \cos \alpha_n R + \alpha_n r_2 \cos \alpha_n r_2) \end{aligned} \right\} \quad (39)$$

$$s'_{ij} = \rho A_{ij} H_j \exp [\lambda_j (\bar{T} - t')] \quad (40)$$

A "complete" discussion of a planetary thermal history thus involves a two-stage calculation with the present program: 1) the interval $0 \leq t \leq t'$, and 2) the interval $t' < t < \bar{T}$ (present).

Planetary density and $[K]/[U]$ ratio are to be specified internally in the main program.

VI. Input Data

The following input data are required to make a calculation, in the order and format specified.

- (1) First card: Maximum number of time steps, maximum number of radial steps (16I5).
- (2) Second card: Time increment Δt (seconds); T_s , T_o , $T_m(R)$, T'_m (5D15.5).
- (3) Third card: r_1 , r_2 , R , κ , K (5D15.5).
- (4) Fourth card: Maximum value of ordinate for temperature in degrees Kelvin in plots (example, 3500°K) (5D15.5).

(5) Fifth card: d, K', t', d' (5D15.5).

(6) Sixth card: $[U_1], \bar{f}$ (5D15.5).

The output consists of a printout of the input data (Fig. 3) and the temperature at specific times given as a function of radius (Fig. 4), and plots (Fig. 5), which each give initial temperature, as well as temperature at time t .

The maximum number of radial steps in a calculation as well as the maximum number of iterations MAXIT in the main program (solutions to transcendental equations), are specified only in the main program. All input data are in calories and cgs units. Temperatures are printed in degrees Kelvin and times in seconds and years. Radii are given in centimeters.

While we have dealt with homogeneous spheres, the solution given by Lowan (Ref. 2) is general enough to allow K , the thermal conductivity, to vary with radius. Whether the problem dealt with can be solved analytically depends upon whether expressions given in the original paper can be integrated. There is also no necessary restriction on forms for distribution of radioactivity; uniform distributions have been used here lacking any reason to suppose otherwise in the Moon, but exponential distributions could be handled as well. Problems involving thermal properties varying with temperature must be treated numerically.

A listing of the main program and subroutines is given in the Appendix.

ORIGINAL PAGE IS
OF POOR QUALITY

N	M					
3	20					
TIME INCREMENT	SURFACE TEMPERATURE	INITIAL TEMPERATURE OF ACCRETING MATERIAL			MELTING POINT AT ZERO PRESSURE	
.150000+017	.250000+003	.450000+003			.136000+004	
MELTING POINT GRADIENT	TMR1	'CORE' RADIUS	'MANTLE' RADIUS	PLANETARY RADIUS	THERMAL DIFFUSIVITY	
.480000+005	.148000+004	.148800+009	.171400+009	.173800+009	.164000+001	
THERMAL CONDUCTIVITY	MAXIMUM ABSCISSA VALUE IN PLOTS					
.110000+001	.350000+004					
THICKNESS OF INSULATING LAYER	THERMAL CONDUCTIVITY OF INSULATING LAYER					
.100000+000	.100000+004					
'T-PRIME'	NEW THICKNESS OF INSULATING LAYER					
.300000+017	.100000+004					
	U1	F				
	.300000+007	.100000+001				
SOURCE TERMS						
	.17743-014	.29500-014	.82040-014	.45085-014		
	.00000	.00000	.00000	.00000		
	.16174-013	.26890-013	.74783-013	.41097-013		
DECAY CONSTANTS						
K40:	.168200+016					
TH232:	.158200+017					
U235:	.308200+016					
U238:	.488000+017					
ROOTS OF EQUATION: $\tan(\alpha \cdot R) + \alpha/h = 0$.						
1	.107672323506+007					
2	.278012319980+007					
3	.456100055506+007					
4	.635674580711+007					
5	.815768264820+007					

Fig. 3. Listing of "input data" and first five roots of transcendental equation $\tan(\alpha \cdot R) + \alpha/h = 0$

TIME (SEC)	TIME (YEARS)	NO. OF TERMS IN SUMMATION
.7500000+017	.2378234+010	
RADIUS	T1+VS	
.8690000+007	.2339513+04	62
.1738000+008	.2341481+04	47
.2607000+008	.2343264+04	41
.3476000+008	.2344303+04	38
.4345000+008	.2341946+04	36
.5214000+008	.2333929+04	28
.6083000+008	.2320373+04	26
.6952000+008	.2292757+04	26
.7821000+008	.2251677+04	25
.8690000+008	.2193342+04	25
.9559000+008	.2111307+04	24
.1042800+009	.2001994+04	24
.1129700+009	.1866203+04	23
.1216600+009	.1700109+04	25
.1303500+009	.1503824+04	24
.1390400+009	.1279133+04	27
.1477300+009	.1026541+04	27
.1564200+009	.7675109+03	35
.1651100+009	.5251613+03	41
.1738000+009	.2893931+03	75

Fig. 4. Listing of radius and temperature for accompanying plots for $t = 7.5 \times 10^{16}$ sec and $[U] = 30$ ppb

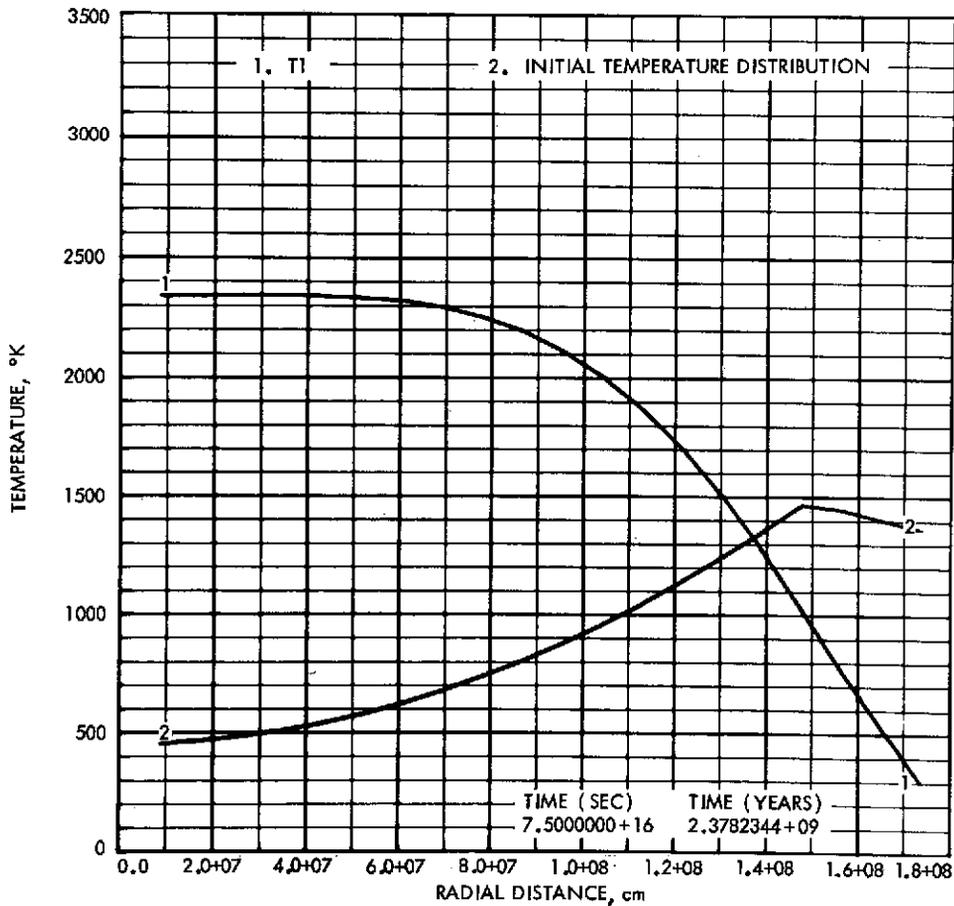


Fig. 5. Temperature distribution in three-zone model at time indicated for 30 ppb U

References

1. Conel, J. E., Fanale, F. P., and Phillips, R. J., *Physical Constraints on Lunar Thermal History: An Analysis of Results from Investigation of Lunar Samples and Geophysical Data*, Technical Document 900-522, Jet Propulsion Laboratory, Pasadena, Calif., 1972 (JPL internal document).
2. Lowan, A. N., "On the Cooling of a Radioactive Sphere," *Phys. Rev.*, Vol. 44, 1933, pp. 769-775.
3. Carslaw, H. S., and Jaeger, J. C., *Conduction of Heat in Solids*, 2nd edition, Oxford, 1959.
4. Watson, K., "Periodic Heating of a Layer Over a Semi-Infinite Solid," *J. Geophys. Res.*, Vol. 78, 1973, pp. 5904-5910.
5. Ringwood, A. E., and Essene, E., "Petrogenesis of Apollo 11 Basalts, Internal Constitution and Origin of the Moon," in *Proceedings of the Apollo 11 Lunar Science Conference*, January 5-8, Houston, Texas, A. A. Levinson (ed.), Vol. 1, Pergamon, New York, pp. 769-799.
6. Hank, T. C., and Anderson, D. L., "The Early Thermal History of the Earth," *Phys. Earth Planet. Interiors*, Vol. 2, No. 1, 1969, pp. 19-29.
7. Haines, E. L., Jet Propulsion Laboratory, Personal Communication, 1973.
8. Clark, S. P., (ed.), "Handbook of Physical Constants," *Geol. Soc. Am. Bull. Memoir*, Vol. 97, 1966.

Appendix

Program SPHERE

```

'RUN,/R JEC3,J5N25Z,SPHERE,06,400/0,,183/516 . CONEL
'SC4020 BLDG/183,BOX/516,CAMERA/9IN,FRAMES/90
'FOR,IS MAIN,MAIN
C
C PARAMETER' MAXR -- MAXIMUM NUMBER OF RADIAL STEPS.
C MAXIT -- MAXIMUM NUMBER OF ITERATIONS
C
PARAMETER MAXR=40
PARAMETER MAXIT=500
IMPLICIT DOUBLE PRECISION (A-H,O-Z)
DIMENSION A(3,4),H(4)
COMMON /BLK1/ ALPHA(MAXIT),ALPHAM(MAXIT),S(3,4),XLAMDA(4),
1 PSI(MAXIT),PSIBAR(MAXIT),XII(MAXIT),
2 S21(MAXIT),S22(MAXIT),S23(MAXIT),
3 SBAR1(MAXIT),SBAR2(MAXIT),SBAR3(MAXIT),
4 TPR,TIME,XKAPPA,XKOK,R3,SPR(3,4)
INTEGER JX(3),JY(3),NP(3),INTERP(3)
REAL XY(MAXR,4),ROW2(2)
REAL YMAX
INTEGER SYMBOL(3),TITLE2(14),XNAME(14),YNAME(10),ROW1(2,2)
DIMENSION ICONRG(4),SUMO(4),SUM1(4),KOUNT(4),IFLAG(4)
DATA XLAMDA/1.682D-17,.1582D-17,3.082D-17,.488D-17/
DATA PI/3.141592653589793D0/
DATA JX/1,1,1/JY/2,3,4/INTERP/1,1,1/
DATA SYMBOL/6H1 ,6H2 ,6H3 /
DATA TITLE2/6H ,6H ,6H ,6H1. T1 ,6H ,6H ,
1 6H2. INI,6HTIAL T,6HEMPERA,6HTURE D,6HISTRIB,6HUTION ,
2 6H ,6H /
DATA XNAME/6H ,6H ,6H ,6H ,6H ,6H ,
1 6HRADIAL,6H DISTA,6HNCE ,6H ,6H ,6H ,
2 6H ,6H /
DATA YNAME/6H ,6H ,6H ,6H ,6H ,6HTEMPER,6HATURE ,
1 6H ,6H ,6H ,6H /
DATA IDIM/MAXR/
TAU=1.435D17
RHO=3.34D0
BETA=2.D3
H(1)=6.658D-9
H(2)=6.341D-9
H(3)=1.363D-7
H(4)=2.250D-8
ROW1(1,1)=6HTIME (
ROW1(2,1)=6HSEC)
ROW1(1,2)=6HTIME (
ROW1(2,2)=6HYEARS)
EPS=1.D-3
NCOUNT=9
C
C INPUT' N -- NUMBER OF TIME STEPS
C M -- NUMBER OF RADIAL STEPS
C
10 READ(5,500,END=400) N,M
WRITE(6,600) N,M
IF(M.LE.MAXR) GO TO 15
MTEMP=MAXR
WRITE(6,607) MTEMP
STOP
C
C INPUT' DELT -- TIME INCREMENT
C VS -- SURFACE TEMPERATURE
C TO -- 'INITIAL' TEMPERATURE OF ACCRETING MATERIAL
C TMO -- MELTING POINT AT ZERO PRESSURE
C IMPR -- MELTING POINT GRADIENT
C R1 -- 'CORE' RADIUS
C R2 -- 'MANTLE' RADIUS
C R3 -- PLANETARY RADIUS
C XKAPPA -- THERMAL DIFFUSIVITY
C XK -- THERMAL CONDUCTIVITY
C ABMAX -- MAXIMUM ORDINATE VALUE IN PLOTS (MINIMUM VALUE IS ASSUMED
C TO BE 0)

```

```

C
15 READ(5,501) DELT,VS,TU,TM0,TMPR,R1,R2,R3,XKAPPA,XK
   READ(5,501) ABMAX
   TMR1=TM0+TMPR*(R3-R1)
   WRITE(6,601) DELT,VS,T0,TM0,TMPR,TMR1,R1,R2,R3,XKAPPA,XK,ABMAX
   YMAX=ABMAX
C
C INPUT: D -- THICKNESS OF INSULATING LAYER
C         XKPR -- THERMAL CONDUCTIVITY OF INSULATING LAYER
C         TPR -- 'T-PRIME'
C         U1 -- NEW THICKNESS OF INSULATING LAYER
C
   READ(5,501) D,XKPR,TPR,D1
   WRITE(6,608) D,XKPR
   WRITE(6,610) TPR,D1
C
C INPUT: U1
C         F
C
   READ(5,501) U1,F
   WRITE(6,613) U1,F
   U2=(1.D0-F)*U1
   U3=U1*(R3**3-R2**3+F*(R2**3-R1**3))/(R3**3-R2**3)
   FAC1=1.19D-4*BETA
   FAC2=137.7D0/138.7D0
   FAC3=1.D0/138.7D0
   A(1,1)=FAC1*U1
   A(2,1)=FAC1*U2
   A(3,1)=FAC1*U3
   A(1,2)=3.7*U1
   A(2,2)=3.7*U2
   A(3,2)=3.7*U3
   A(1,3)=FAC3*U1
   A(2,3)=FAC3*U2
   A(3,3)=FAC3*U3
   A(1,4)=FAC2*U1
   A(2,4)=FAC2*U2
   A(3,4)=FAC2*U3
   DIF=TAU-TPR
   DO 16 J=1,4
   EX1=DEXP(XLAMDA(J)*TAU)
   EX2=DEXP(XLAMDA(J)*DIF)
   DO 16 I=1,3
   S(I,J)=RHO*A(I,J)*H(J)*EX1
   SPR(I,J)=RHO*A(I,J)*H(J)*EX2
16 CONTINUE
   WRITE(6,602) ((S(I,J),J=1,4),I=1,3)
   WRITE(6,603) XLAMDA
   DO 17 I=1,3
   NP(I)=M
17 CONTINUE
   XKOK=XKAPPA/XK
   R1R1=R1*R1
   R3R3=R3*R3
   SIGMA=XKPR/(XK*D)
   H0=SIGMA-1./R3
   HH=H0*H0
   TIME=0.D0
C STATEMENT 999 DEFINES NEW TIME ORIGIN ,T-DELT
999 TIME=1.387584D17
   DELTR=R3/M
C
C OBTAIN ROOTS OF: TAN(X*R3)+(X/H0)=0.
C
   DO 19 I=1,MAXIT
   ALPHA(I)=ALPH(I,H0,R3,JFLAG)
   IF(JFLAG.EQ.0) GO TO 18
   WRITE(6,609)
   GO TO 10
18 AK=ALPHA(I)
   AKAK=AK*AK
   AKR1=AK*R1
   AKR2=AK*R2
   AKR3=AK*R3
   AAR1R1=AKAK*R1R1
   SAKR1=DSIN(AKR1)

```

```

CAKR1=DCOS(AKR1)
SAKR2=DSIN(AKR2)
CAKR2=DCOS(AKR2)
SAKR3=DSIN(AKR3)
CAKR3=DCOS(AKR3)
PSI(I)=(HH+AKAK)/(R3*AKAK+H0*(R3*H0+1.))
XI11=(T0/AKAK)*(SAKR1-AKR1*CAKR1)
1   +((TMR1-T0)/(AAR1R1*AKAK))*(3.*(AAR1R1-2.)*SAKR1-
2   AKR1*(AAR1R1-6.)*CAKR1)
XI12=((TMO+TMPR*R3)/AKAK)*(SAKR3-SAKR1-AKR3*CAKR3+AKR1*CAKR1)
1   -(TMPR/(AK*AKAK))*(2.*AK*(R3*SAKR3-R1*SAKR1)
2   -(AKAK*R3R3-2.)*CAKR3+(AAR1R1-2.)*CAKR1)
XI13=(-VS/AKAK)*(SAKR3-AKR3*CAKR3)
XI1(I)=XI11+XI12+XI13
S21(I)=SAKR1-AKR1*CAKR1
S22(I)=SAKR2-SAKR1-AKR2*CAKR2+AKR1*CAKR1
S23(I)=SAKR3-SAKR2-AKR3*CAKR3+AKR2*CAKR2
19  CONTINUE
190 SIGMA1=XKPR/(XK*D1)
HI=SIGMA1-1./R3
HIH1=HI*HI
C
C OBTAIN ROOTS OF TAN(X*R3)+(X/H1)=0.
C
DO 230 I=1,MAXIT
ALPHAM(I)=ALPH(I,H1,R3,JFLAG)
IF(JFLAG.EQ.0) GO TO 210
WRITE(6,609)
GO TO 10
210 AK=ALPHAM(I)
AKAK=AK*AK
AKR1=AK*R1
AKR2=AK*R2
AKR3=AK*R3
SAKR1=DSIN(AKR1)
CAKR1=DCOS(AKR1)
SAKR2=DSIN(AKR2)
CAKR2=DCOS(AKR2)
SAKR3=DSIN(AKR3)
CAKR3=DCOS(AKR3)
PSIBAR(I)=(HIH1+AKAK)/(R3*AKAK+H1*(R3*H1+1.))
SBAR1(I)=SAKR1-AKR1*CAKR1
SBAR2(I)=SAKR2-SAKR1-AKR2*CAKR2+AKR1*CAKR1
SBAR3(I)=SAKR3-SAKR2-AKR3*CAKR3+AKR2*CAKR2
230 CONTINUE
DO 280 I=1,N          'LOOP OVER TIME
TIME=TIME+DELT
TIMEYR=TIME/3.1536D07
ROW2(1)=TIME
ROW2(2)=TIMEYR
R=0.D0
WRITE(6,611) TIME,TIMEYR
DO 270 J=1,M          'LOOP OVER RADIAL DISTANCE
R=R+DELTR
C
C INITIALIZE CONVERGENCE FLAGS AND SUMS
C
ICONRG(1)=0
KOUNT(1)=0
IFLAG(1)=0
SUM0(1)=0.D0
SUM1(1)=0.D0
DO 250 K=1,MAXIT
AK=ALPHAM(K)
AKAK=AK*AK
AKR=AK*R
SAKR=DSIN(AKR)
X1=X1EX(AKAK,AK,K)
SUM1(1)=SUM1(1)+PSIBAR(K)*SAKR*X1
IF(DABS((SUM1(1)-SUM0(1))/SUM1(1)).GT.EPS) GO TO 240
KM1=K-1
IF(IFLAG(1).NE.KM1) KOUNT(1)=1
IF(IFLAG(1).EQ.KM1) KOUNT(1)=KOUNT(1)+1
IFLAG(1)=K
240 SUM0(1)=SUM1(1)
ICONRG(1)=K
IF(KOUNT(1).GT.NCOUNT) GO TO 260

```

```

250 CONTINUE
260 T1=2.*SUM1(1)/R
    XY(J,1)=R
    XY(J,2)=T1+VS
    IF(R.GT.R1) GO TO 262
    XY(J,3)=T0+(TMR1-T0)*R*R/R1R1
    GO TO 264
262 XY(J,3)=TMO+TMPR*(R3-R)
264 WRITE(6,612) R,XY(J,2),ICONRG(1)
270 CONTINUE
    CALL KCPL(XY,IDIM,0,JX,JY,NP,INTERP,SYMBOL,TITLE2,XNAME,YNAME,
1      ROW1,ROW2,2)
    CALL GRIDY(-.1,YMAX,0,0,0,6H
    CALL KCPL1(2,2,1)
280 CONTINUE
    GO TO 10
400 STOP
500 FORMAT(16I5)
501 FORMAT(5D15.5)
502 FORMAT(4D15.5)
600 FORMAT('0 N M'/1H ,2I5)
601 FORMAT('0TIME INCREMENT SURFACE TEMPERATURE ''INITIAL'' TEMPER
    LATURE OF ACCRETING MATERIAL MELTING POINT AT ZERO PRESSURE'/1H ,
2D14.7,8X,D14.7,32X,D14.7,19X,D14.7/'0MELTING POINT GRADIENT
3 TMR1 ''CORE'' RADIUS ''MANTLE'' RADIUS PLANETARY RADIUS
4S THERMAL DIFFUSIVITY'/1H ,8X,D14.7,2X,D14.7,3X,D14.7,4X,D14.7
5,5X,D14.7,10X,D14.7/'0THERMAL CONDUCTIVITY MAXIMUM ABSISSA VALUE
6 IN PLOTS'/1H ,6X,D14.7,19X,D14.7)
602 FORMAT('0SOURCE TERMS'/1H ,4D15.5/1H ,4D15.5/1H ,4D15.5)
603 FORMAT('0 DECAY CONSTANTS'/1 K40'' ,4X,D14.7/'1 TH232'' ,2X,
1 D14.7/' U235'' ,3X,D14.7/' U238'' ,3X,D14.7)
604 FORMAT('0 TIME'/1H ,D14.7/'0 RADIUS T1+VS
1 TR+VS V=T1+TR+VS')
605 FORMAT(1H ,4D14.7,4I10)
606 FORMAT('0 PARTIAL(TI) PARTIAL(TR) FLUX 1 FLUX 2
1 TOTAL FLUX'/1H ,5D14.7)
607 FORMAT('0NUMBER OF RADIAL STEPS EXCEEDS MAXIMUM DIMENSION'/
1 ' MAXIMUM DIMENSION'',14)
608 FORMAT('0THICKNESS OF INSULATING LAYER THERMAL CONDUCTIVITY OF I
INSULATING LAYER'/1H ,15X,D14.7,29X,D14.7)
609 FORMAT('0FAULTY ROOT OBTAINED FROM SOLUTION TO' TAN(X*R3)+(X/R3)=0
1. COMPUTATIONS TERMINATED.')
610 FORMAT('0 ''T-PRIME'' NEW THICKNESS OF INSULATING LAYER'/
1 1H ,D14.7,23X,D14.7)
611 FORMAT('0 TIME (SEC) TIME (YEARS)'/1H ,D14.7,5X,D14.7/
1 1H0,8X,'RADIUS',9X,'T1+VS')
612 FORMAT(1H ,D14.7,E14.7,28X,I10)
613 FORMAT('0 U1 F'/1H ,2D14.7)
END
*FOR,IS X1EX,X1EX
DOUBLE PRECISION FUNCTION X1EX(AKAK,AK,K)
PARAMETER MAXIT=500
IMPLICIT DOUBLE PRECISION (A-H,O-Z)
COMMON /BLK1/ ALPHA(MAXIT),ALPHAM(MAXIT),S(3,4),XLAMDA(4),
1 PSI(MAXIT),PSIBAR(MAXIT),X11(MAXIT),
2 S21(MAXIT),S22(MAXIT),S23(MAXIT),
3 SBAR1(MAXIT),SBAR2(MAXIT),SBAR3(MAXIT),
4 TPR,TIME,XKAPPA,XKOKK,R3,SPR(3,4)
DATA EPS/1.D-5/NCOUNT/9/
KOUNT=0
IFLAG=0
SUM0=0.D0
SUM1=0.D0
DO 20 I=1,MAXIT
AI=ALPHA(I)
AIAI=AI*AI
DIF=AI-AK
SUM=AI+AK
SDR3=DSIN(DIF*R3)
SSR3=DSIN(SUM*R3)
POWER1=-XKAPPA*AIAI*TPR-XKAPPA*AKAK*TIME
POWER2=-XKAPPA*(AIAI*TPR+AKAK*TIME)
EX=DEXP(POWER1)
EX2=DEXP(POWER2)
X11EX=X11(I)*EX
X12EX=0.D0

```

```

DO 8 J=1,4
POWER3=- (XLAMDA(J)*TPR+XKAPPA*AKAK*TIME)
CBAR=(EX2-DEXP(POWER3))/((XLAMDA(J)-XKAPPA*AIAI)*AIAI)
Q=S(1,J)*S21(I)+S(2,J)*S22(I)+S(3,J)*S23(I)
X12EX=X12EX+CBAR*Q
8 CONTINUE
X12EX=X12EX*XKOKK
SUM1=SUM1+PSI(I)*(X11EX+X12EX)*((SDR3/DIF)-(SSR3/SUM))
IF(DABS((SUM1-SUM0)/SUM1).GT.EPS) GO TO 10
IM1=I-1
IF(IFLAG.NE.IM1) KOUNT=1
IF(IFLAG.EQ.IM1) KOUNT=KOUNT+1
IFLAG=I
IF(KOUNT.GT.NCOUNT) GO TO 40
10 SUM0=SUM1
20 CONTINUE
WRITE(6,30)
30 FORMAT('FAILURE TO CONVERGE IN X1BAR1')
40 POWER2=-XKAPPA*AKAK*TIME
EX2=DEXP(POWER2)
DO 50 J=1,4
POWER3=-XLAMDA(J)*TIME
CBARPR=(EX2-DEXP(POWER3))/((XLAMDA(J)-XKAPPA*AKAK)*AKAK)
QPR=SPR(1,J)*SBAR1(K)+SPR(2,J)*SBAR2(K)+SPR(3,J)*SBAR3(K)
SUM1=SUM1+XKOKK*CBARPR*QPR
50 CONTINUE
X1EX=SUM1
RETURN
END
*FOR, IS ALPH,ALPH
DOUBLE PRECISION FUNCTION ALPH(K,H,R3,JFLAG)
IMPLICIT DOUBLE PRECISION (A-H,O-Z)
C
C FUNCTION ROUTINE WHICH CALCULATES SUCCESSIVE POSITIVE ROOTS OF THE
C FUNCTION: TAN(ALPHA*R3) + (ALPHA/H) = 0.
C
DATA PI/3.141592653589793240/
DATA NCOUNT/4/
KOUNT=1
ICHECK=0
IF(K.NE.1) GO TO 10
WRITE(6,5)
5 FORMAT('ROOTS OF EQUATION: TAN(ALPH*R3) + (ALPH/H) = 0.')
JFLAG=0
STEP=PI/R3
STEPO2=STEP/2.
EPS=H/1000.
X=STEPO2+EPS
ONEOH=1./H
GO TO 20
10 X=K*STEP-STEPO2+EPS
20 DO 30 I=1,200
IM1=I-1
THETA=X*R3
TEMP=1./DCOS(THETA)
F=DTAN(THETA)+X/H
FPR=R3*TEMP*TEMP+ONEOH
XNEW=X-F/FPR
IF(DABS((XNEW-X)/XNEW).GT.1.0-12) GO TO 25
IF(ICHECK.NE.IM1) KOUNT=1
IF(ICHECK.EQ.IM1) KOUNT=KOUNT+1
ICHECK=I
IF(KOUNT.GT.NCOUNT) GO TO 50
25 X=XNEW
30 CONTINUE
WRITE(6,40) X,XNEW,F
40 FORMAT('NEWTON METHOD FAILED TO SATISFY TERMINATING CRITERIA
I X XNEW F/1H ,52X,3D16.8)
STOP
50 ALPH=XNEW
WRITE(6,55) K,XNEW
55 FORMAT(1H ,110,D22.12)
MID=K*PI/R3
XLBND=XMID-STEPO2
UBOUND=XMID+STEPO2
IF(XLBND.LT.X.AND.X.LT.UBOUND) RETURN

```

```

WRITE(6,60) K,XLBNB,X,UBOUND
60  FORMAT('SOLUTION NOT PROPERLY BOUNDED      K      LOWER BOUND
1      X      UPPER BOUND',/1H ,30X,15,3D16.8)
      JFLAG=1
      RETURN
      END
'MAP,L
LIB LIB*PLOTS
'XQT
3  20
   1.5D16 250. 450. 1360. 4.8D-6
   1.488D08 1.714D08 1.738D08 1.64D-2 1.10D-2
3500.
100000. .00001 .3D+17 1000.
.3000D-07 1.
   1.5D16 130. 250. 1373 5.0D-6
3  20
   1.5D16 250. 450. 1360. 4.8D-6
   1.488D08 1.714D08 1.738D08 1.64D-2 1.10D-2
3500.
100000. .00001 .3D+17 1000.
.4000D-07 1.

```