

# Space Shuttle



NATIONAL  
AERONAUTICS  
AND  
SPACE  
ADMINISTRATION



(NASA-SP-407) SPACE SHUTTLE (NASA)  
\$2.25; SOD HC \$3.40

97 P MF  
CSCCL 22B

N76-31268

H1/16

Unclas  
02794

SEP 1976  
RECEIVED  
NASA CENTER FOR  
SPACE EDUCATION  
WASHINGTON, D.C.

*Any discussion of future space initiatives must start with the Space Shuttle, the key to opening up near space to quick, easy, and economical access.*


*With the Space Shuttle, operations to and from low-altitude Earth orbit—for both manned and unmanned exploration, science, and applications—will become routine and relatively inexpensive.*

*James C. Fletcher  
Administrator  
National Aeronautics and  
Space Administration*

*January 14, 1976*

**ORIGINAL CONTAINS  
COLOR ILLUSTRATIONS**



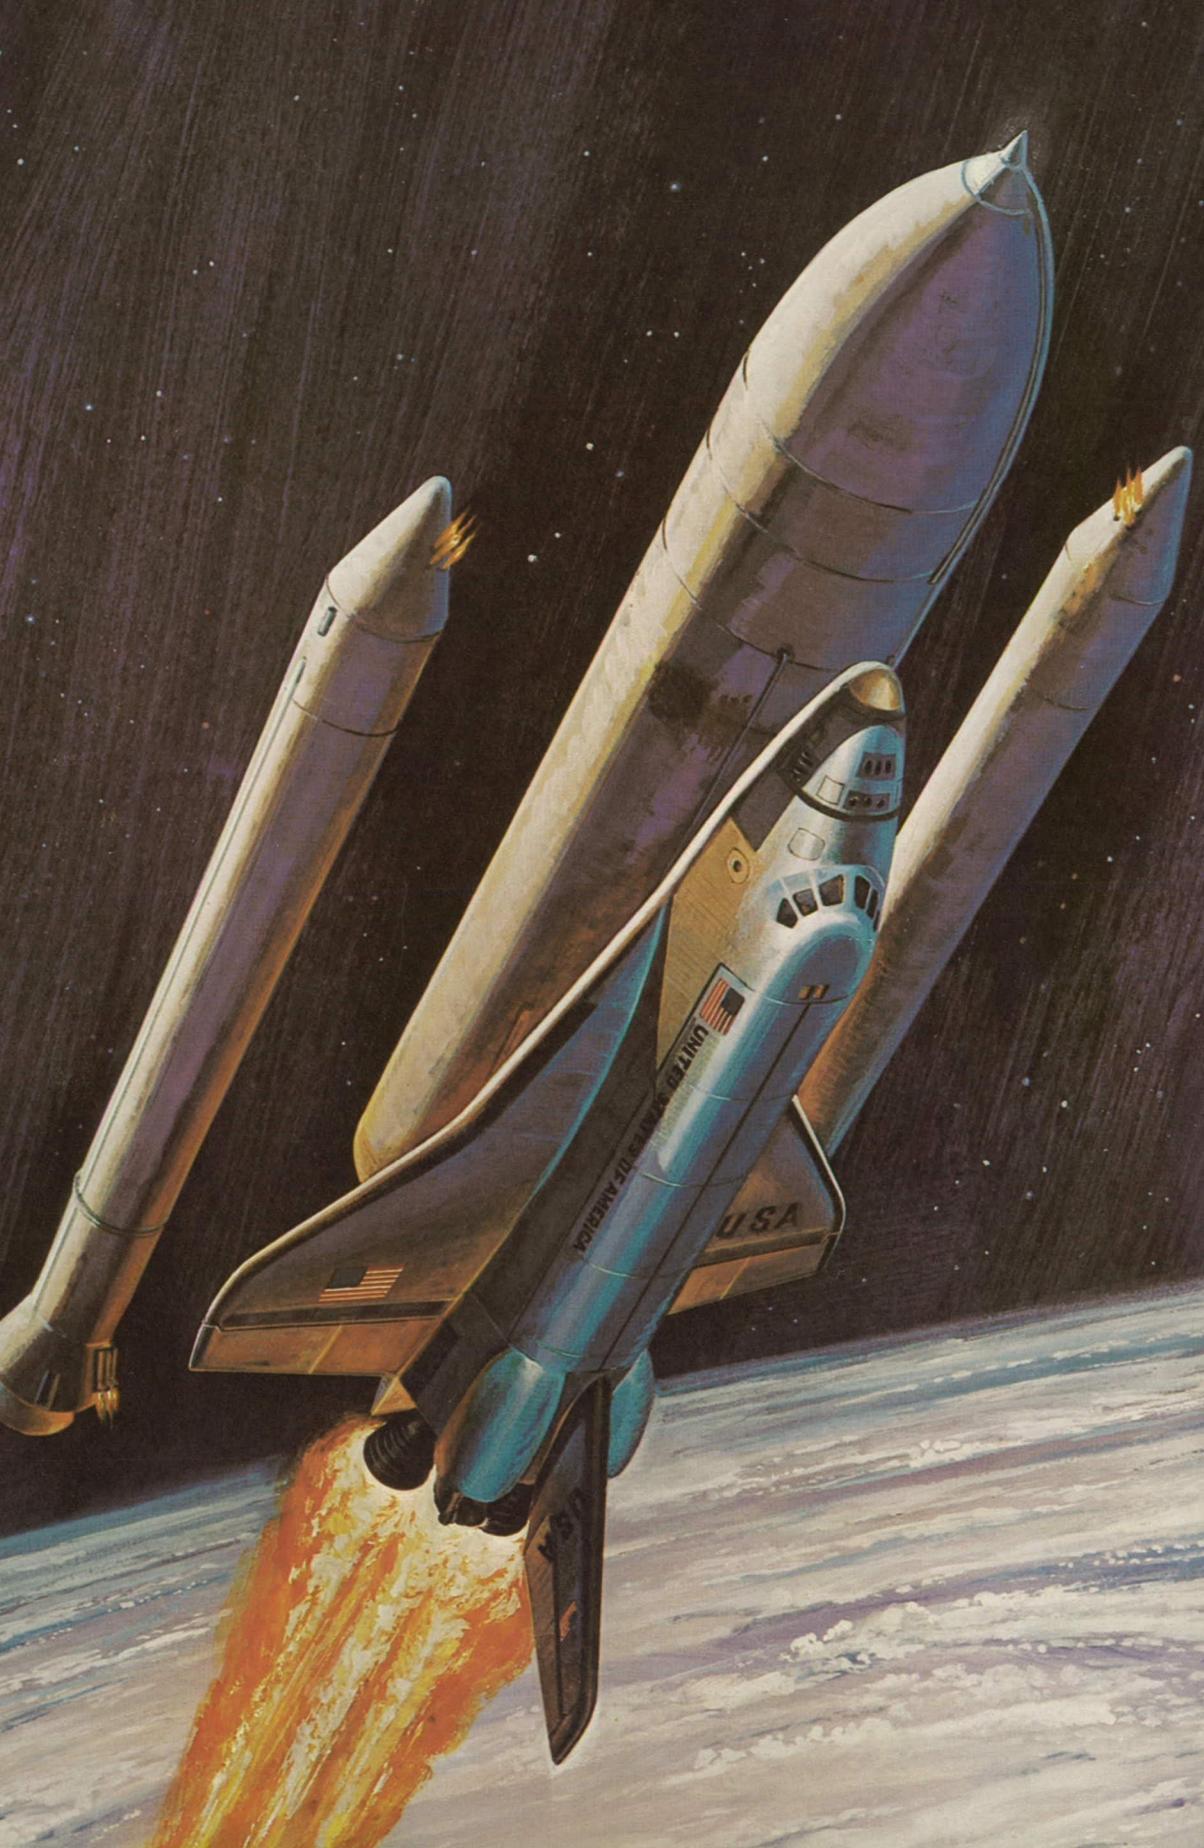

# *SPACE SHUTTLE*

Prepared by

LYNDON B. JOHNSON SPACE CENTER



*Scientific and Technical Information Office*


**NATIONAL AERONAUTICS AND SPACE ADMINISTRATION**

*Washington, D.C.*

1976

---

For sale by the Superintendent of Documents,  
U.S. Government Printing Office, Washington, D.C. 20402  
Price \$3.40 Stock Number 033-000-00651-9  
*Library of Congress Catalog Card Number 76-600045*

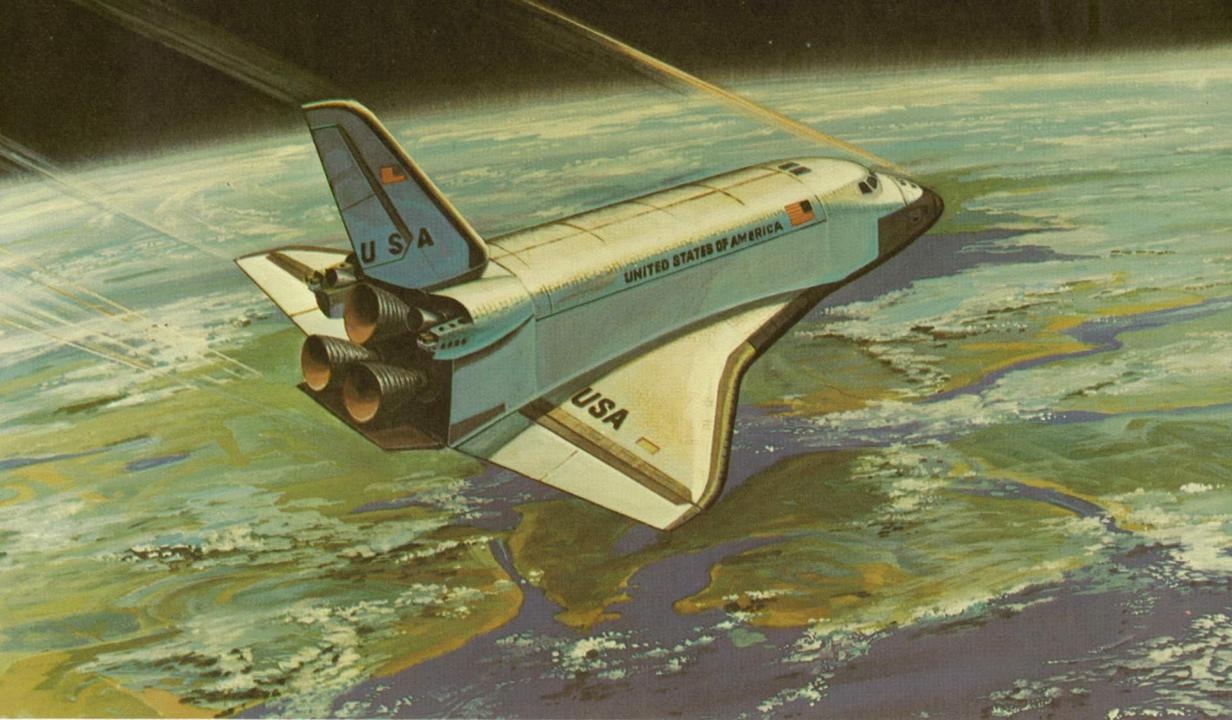

## FOREWORD

# *A New Era in Space*

On December 17, 1903, Orville and Wilbur Wright successfully achieved sustained flight in a power-driven aircraft. The first flight that day lasted only 12 seconds over a distance of 37 meters (120 feet), which is about the length of the Space Shuttle Orbiter. The fourth and final flight of the day traveled 260 meters (852 feet) in 59 seconds. The initial notification of this event to the world was a telegram to the Wrights' father.

Sixty-six years later, a man first stepped on the lunar surface and an estimated 500 million people throughout the world saw the event on television or listened to it on radio as it happened.

Historic events *ARE* spectacular. The space program, however, has always been much more than a television spectacular. Today, space transportation is working in many ways for us all, and we have come to expect this.

A whole new era of transportation will come into being in the 1980's with the advent of the Space Shuttle and its ability to inexpensively transport a variety of payloads to orbit. It is designed to reduce the cost and increase the effectiveness of using space for commercial, scientific, and defense needs.

With its versatility and reusability, the Space Shuttle will truly open the door to the economical and routine use of space. As a transportation system to Earth orbit, it will offer the workhorse capabilities of such earthbound carriers as trucks, ships, and airlines and will be as vital to the nation's future in space as the more conventional carriers of today are to the country's economic life and well-being.

So often have the man-machine relationships in space been proven to be highly effective that the Space Shuttle is being designed and built to take advantage of the most efficient characteristics of both humans and complex machines. This combination, coupled with the flexible characteristics of Shuttle, will provide an efficient system for our future national space program activities. The Shuttle will truly provide our nation with routine space operations in near-Earth orbit that can contribute substantially to improving the way of life for all the peoples of our world.


The Space Shuttle era will begin approximately 20 years after the first U.S. venture into space, the launching of Explorer I on January 31, 1958. Since that date, unmanned satellites have probed the near and distant reaches of space. Manned systems have been used to explore the lunar surface and expand the present knowledge of the Earth, the Sun, and the adaptability of man to extended space flight in near-Earth orbit. To serve the future needs of space science and applications, the technological and operational experience underlying these accomplishments is being applied to the development of the Space Shuttle. This vehicle is the basic element in a space transportation system that will open a new era of routine operations in space.

The primary design and operations goal for the Space Shuttle Program is to provide routine access to space. Spacelabs will be carried aloft by the Shuttle in support of manned orbital operations. Free-flying or automated satellites will be deployed and recovered from many types of orbits. Automated satellites with propulsive stages attached will be deployed from the Space Shuttle and placed in high-energy trajectories. This approach to space operations will provide many avenues for conducting investigations in space. Many participants, representing diverse backgrounds and capabilities, will work routinely in these space operations of the future.

# Contents

	Page
<b>A New Era in Space</b> .....	v
<b>Space Shuttle System and Mission Profile</b> .....	1
PROFILE OF SHUTTLE MISSION .....	2
GROUND TURNAROUND .....	4
SPACE SHUTTLE VEHICLE .....	6
CREW AND PASSENGER ACCOMMODATIONS .....	8
WIDE VARIETY OF MISSIONS .....	9
PLACEMENT AND RECOVERY OF SATELLITES .....	10
PLACEMENT OF FREE-FLYING SCIENTIFIC LABORATORIES IN SPACE .....	11
DELIVERY OF PAYLOADS THAT USE PROPULSION STAGES .....	12
ON-ORBIT SERVICING OF SATELLITES BY THE SPACE SHUTTLE .....	14
SPACELAB AND ORBITER—INTERNATIONAL COOPERATION IN SPACE .....	16
<b>Space in Everyday Living</b> .....	19
EARTHLY BENEFITS TODAY .....	19
EARTHLY PAYOFF TOMORROW .....	30
<b>Space Shuttle Vehicle</b> .....	37
SPACE SHUTTLE ORBITER .....	37
EXTERNAL TANK .....	38
SOLID ROCKET BOOSTERS .....	39
ORBITER MAIN PROPULSION .....	40
ORBITER REACTION CONTROL SUBSYSTEM .....	43
ORBITAL MANEUVERING SUBSYSTEM .....	44
ORBITER STRUCTURE SUBSYSTEM .....	46
ORBITER THERMAL PROTECTION SYSTEM .....	48
PAYLOAD ACCOMMODATIONS .....	50
PAYLOAD HANDLING—INTERNATIONAL COOPERATION .....	52
CREW CABIN AND CREW ACCOMMODATIONS .....	54
EXTRAVEHICULAR ACTIVITIES .....	58
PAYLOAD ATTACHMENTS .....	60
POWER SYSTEMS .....	62
ENVIRONMENTAL CONTROL .....	66
AVIONICS .....	68
COMMUNICATIONS, TRACKING, AND DATA MANAGEMENT .....	70
PAYLOAD POINTING AND STABILIZATION .....	72
GUIDANCE, NAVIGATION, AND CONTROL SUBSYSTEM .....	74
REUSABLE SPACE HARDWARE .....	75
MISSION KITS .....	75
LAUNCH SITES, OPERATIONAL DATES, PERFORMANCE AND INCLINATION LIMITS .....	76
U.S. MANNED SPACE-FLIGHT OVERVIEW .....	80
<b>Economic Impact of Space Shuttle</b> .....	82
<b>Space Shuttle Participants</b> .....	86

# PLATEAUS IN AIR/SPACE TRANSPORTATION SYSTEMS

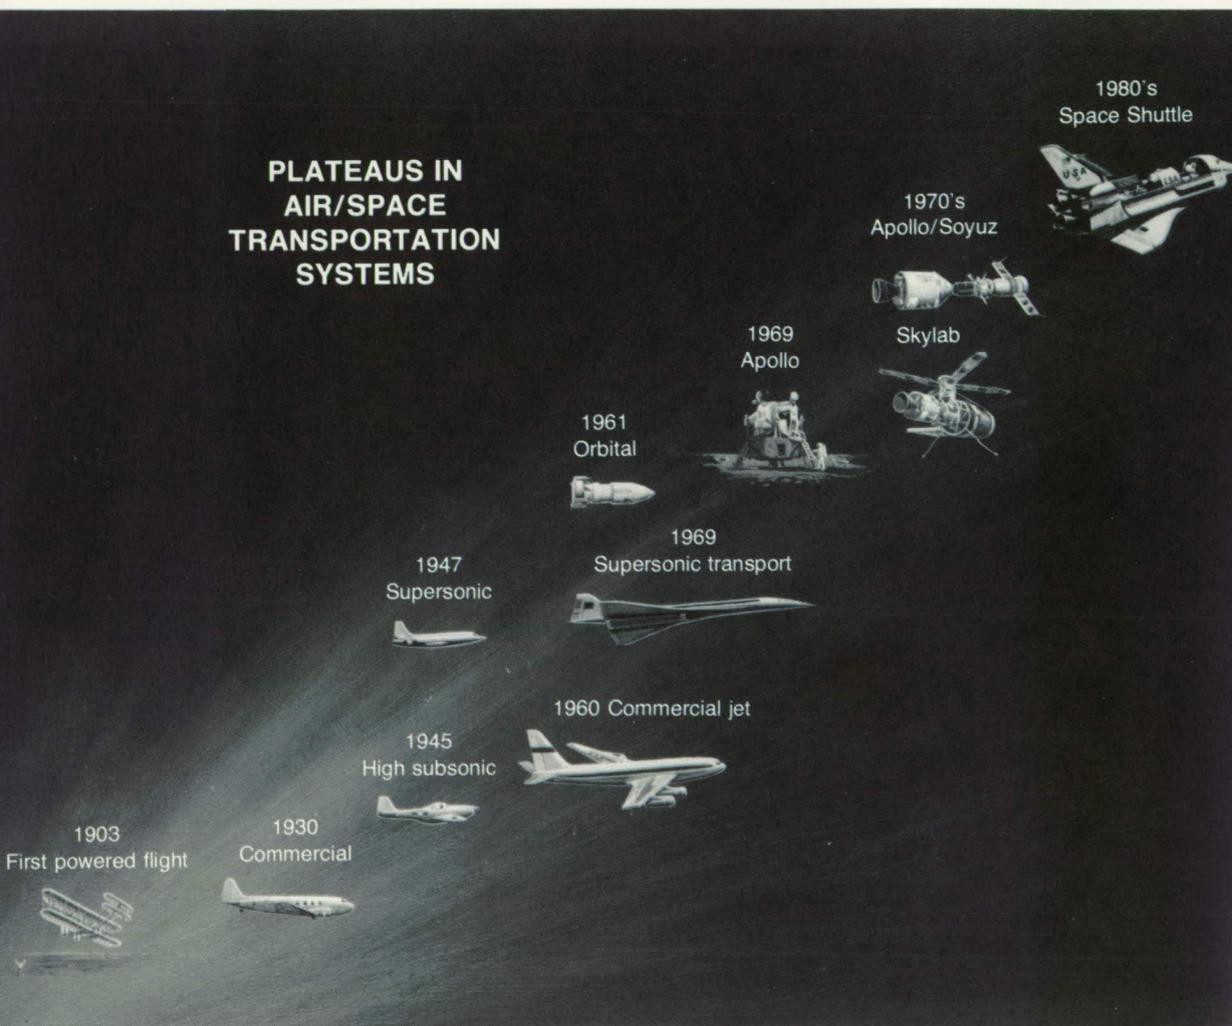

# *Space Shuttle System and Mission Profile*

The Space Shuttle flight system is composed of the Orbiter, an external tank (ET) that contains the ascent propellant to be used by the Orbiter main engines, and two solid rocket boosters (SRB's). The Orbiter and SRB's are reusable; the external tank is expended on each launch.


The Space Shuttle mission begins with the installation of the mission payload into the Orbiter payload bay. The payload will be checked and serviced before installation and will be activated on orbit. Flight safety items for some payloads will be monitored by a caution and warning system.

The SRB's and the Orbiter main engine will fire in parallel at lift-off. The two SRB's are jettisoned after burnout and are recovered by means of a parachute system. The large external tank is jettisoned before the Space Shuttle Orbiter goes into orbit. The orbital maneuvering system (OMS) of the Orbiter is used to attain the desired orbit and to make any subsequent maneuvers that may be required during the mission. When the payload bay doors in the top of the Orbiter fuselage open to expose the payload, the crewmen are ready to begin payload operations.


After the orbital operations, deorbiting maneuvers are initiated. Reentry is made into the Earth's atmosphere at a high angle of attack. At low altitude, the Orbiter goes into horizontal flight for an aircraft-type approach and landing. A 2-week ground turnaround is the goal for reuse of the Space Shuttle Orbiter.

The nominal duration of the missions is 7 days. The mission duration can be extended to as long as 30 days if the necessary consumables are added.

# PROFILE OF SHUTTLE MISSION

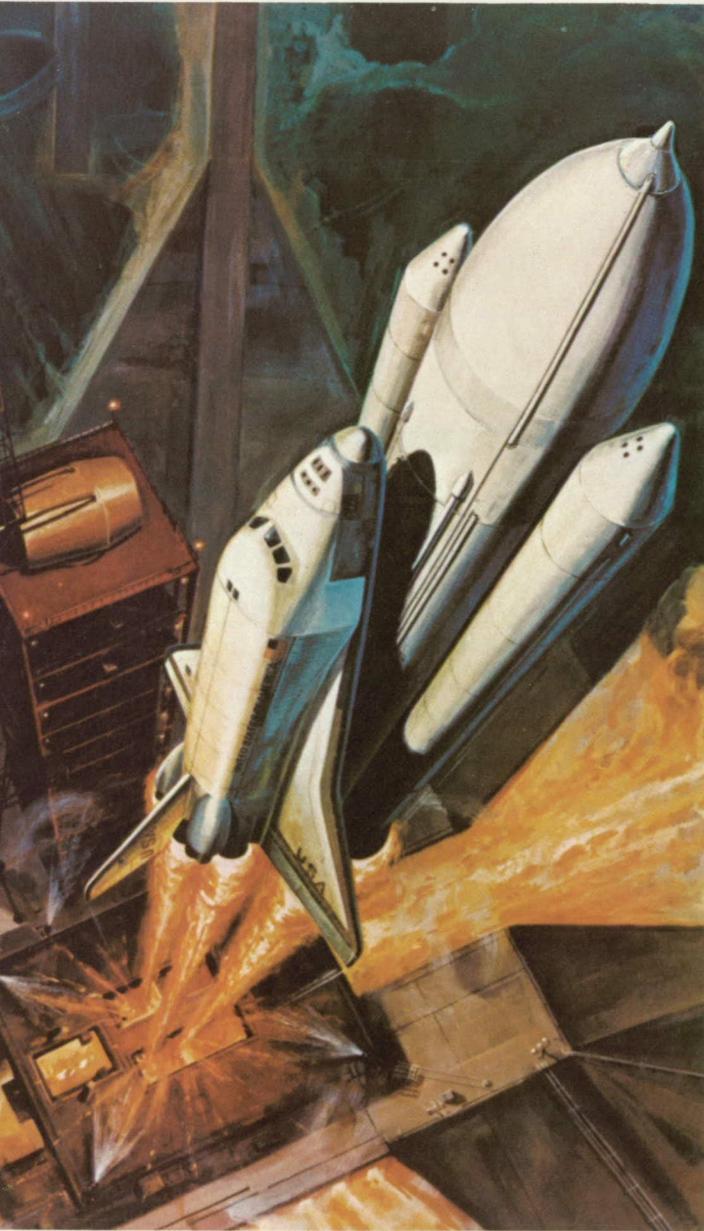

SHUTTLE LAUNCH

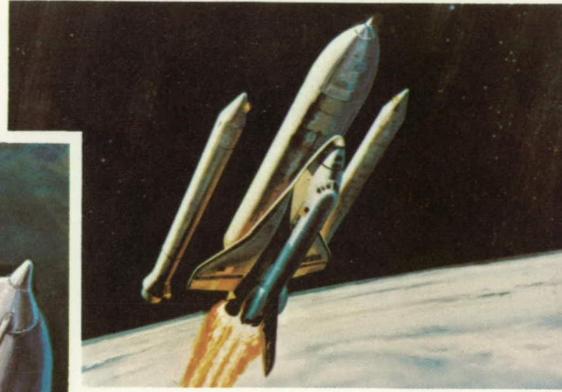

SEPARATION OF SOLID ROCKET BOOSTERS

Height:  
45.6 km (24.6 n mi)  
Velocity:  
1391 m/sec (2704 kn)

## SHUTTLE CHARACTERISTICS

(Values are approximate)

### Length

System: 56 m (184 ft)  
Orbiter: 37 m (122 ft)

### Height

System: 23 m (76 ft)  
Orbiter: 17 m (57 ft)

### Wingspan

Orbiter: 24 m (78 ft)

### Weight

Gross lift-off: 2 000 000 kg  
(4 500 000 lb)  
Orbiter landing: 85 000 kg  
(187 000 lb)

### Thrust

Solid rocket boosters (2):  
11 880 000 N  
(2 685 000 lb) each  
Orbiter main engines (3):  
2 100 000 N  
(470 000 lb) each

### Cargo bay

Dimensions: 18 m (60 ft) long,  
5 m (15 ft) in diameter  
Accommodations: Unmanned  
spacecraft to fully equipped  
scientific laboratories

## LANDING


Crossrange:  
 $\pm 1850$  km (999 n mi) — Mission I  
Velocity:  
112 m/sec (217 kn)  
(From entry path)



### ORBIT INSERTION AND CIRCULARIZATION

Height:  
277.8 km (150 n mi) - typical  
Velocity:  
7847 m/sec (15 254 kn)

### SOLID ROCKET BOOSTER RECOVERY OPERATIONS

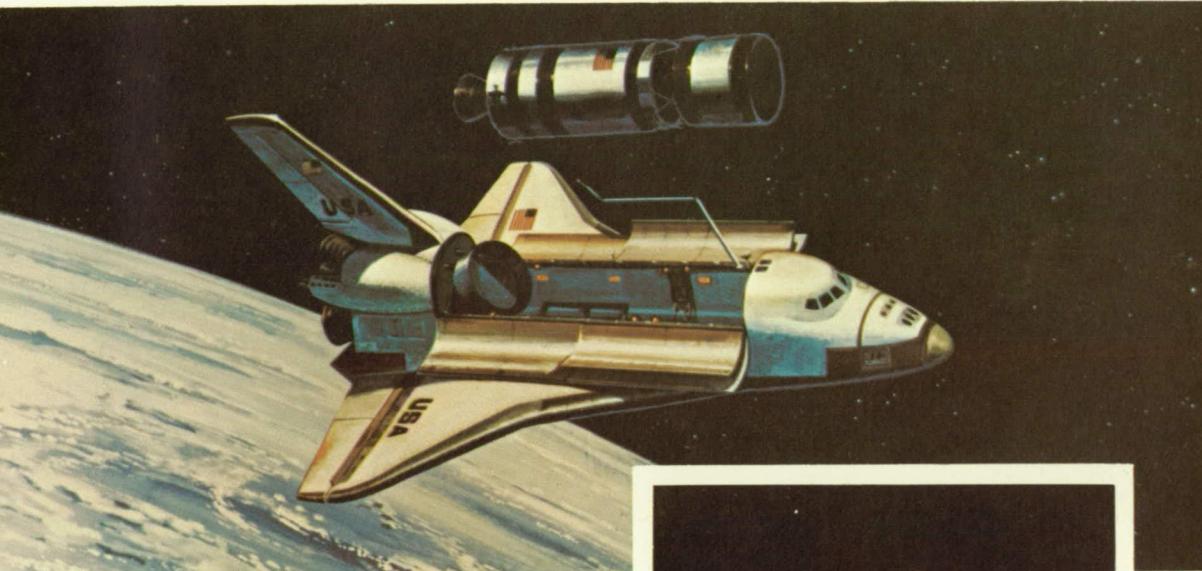

### ORBITAL OPERATIONS


Height:  
185 to 1110 km (100 to 600 n mi)  
Duration:  
Up to 30 days



### ATMOSPHERIC ENTRY

Height:  
121.9 km (76 n mi)  
Velocity:  
7434 m/sec (14 451 kn)



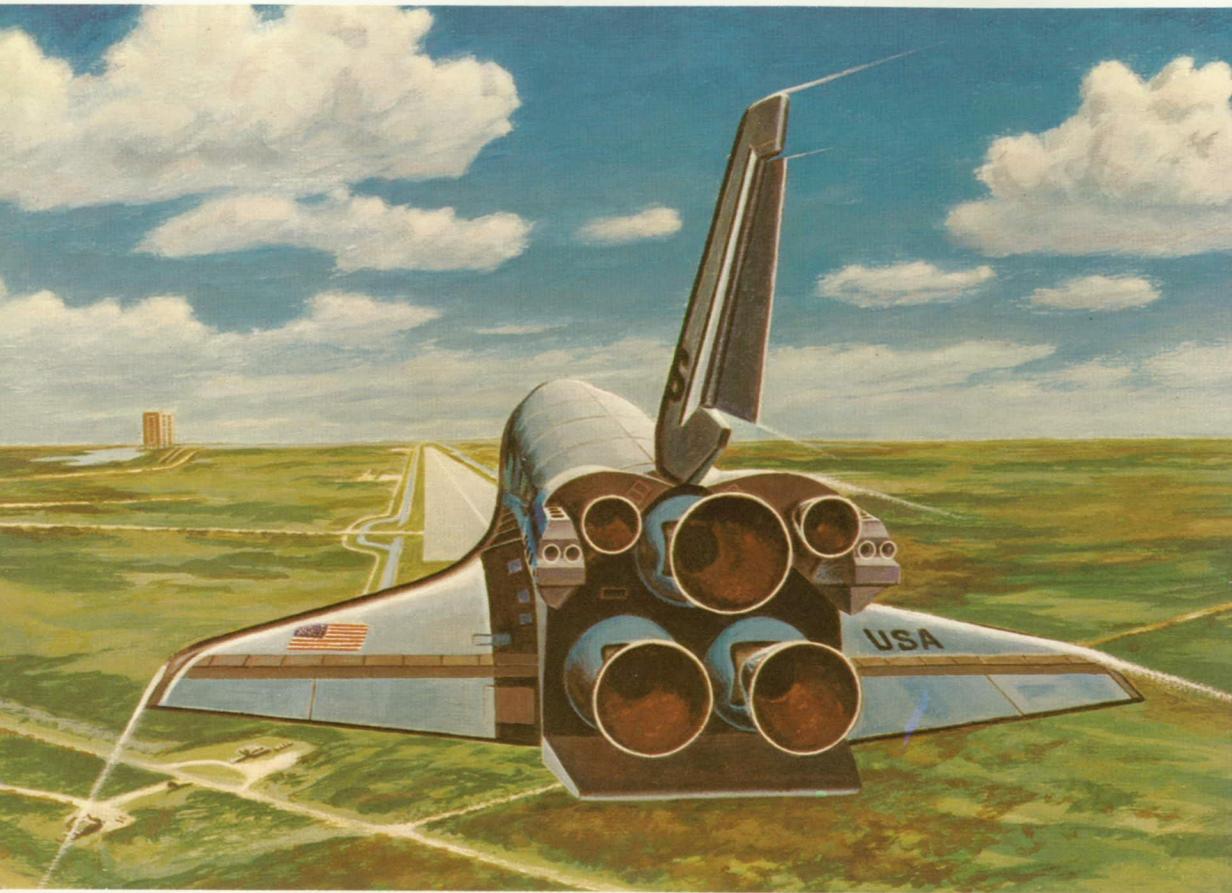

## GROUND TURNAROUND

The Space Shuttle Orbiter is designed for a 2-week ground turnaround, from landing to relaunch. About 160 hours of actual work will be required.


As soon as the Orbiter returns from space, it must undergo safing before payloads can be removed and maintenance and refurbishment begun. Safing operations include draining and purging of the propellant feedlines and removal of explosive actuators.

Next, the payload-bay support equipment must be inspected and serviced. New payloads will be installed. The thermal protection system, landing gear system, main and

auxiliary propulsion systems, power units, flight instrumentation, and communications systems must also be inspected and, if necessary, repaired.


These functions will take approximately two-thirds of the total processing time before relaunch. From there, the Orbiter will be towed to the assembly building, where it will be lifted to vertical and mated to the solid rocket boosters and external tank, already in place on the mobile launcher platform.

The integrated Space Shuttle will then be moved to the launch pad for another trip into space.

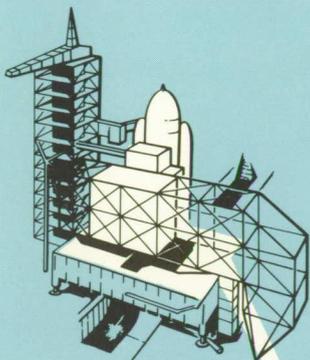

### PRELAUNCH



- Move to pad
  - Interface verification
  - Propellant loading
  - Crew ingress
  - Systems check
- } 2-hr launch capability

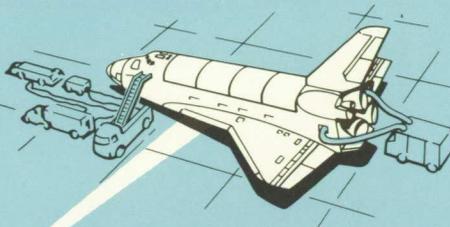

### LANDING


- Safety inspection
- Connect ground-support-equipment cooling
- Connect tow equipment
- Crew exchange

• 160-hr total

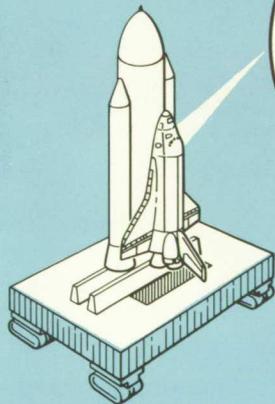


### SHUTTLE ASSEMBLY

- Assemble solid rocket booster (SRB)
- External tank mating to SRB
- Orbiter mating
- Interface verification
- Ordnance installation/connection
- Closeout




### ORBITER SAFING, MAINTENANCE, AND CHECKOUT

- Safe and deservice
- Remove payload
- Maintenance/refurbishment
- Payload installation
- Functional verification



### PREMATE PREPARATION


- Retract landing gear
- Connect cranes
- Rotate to vertical

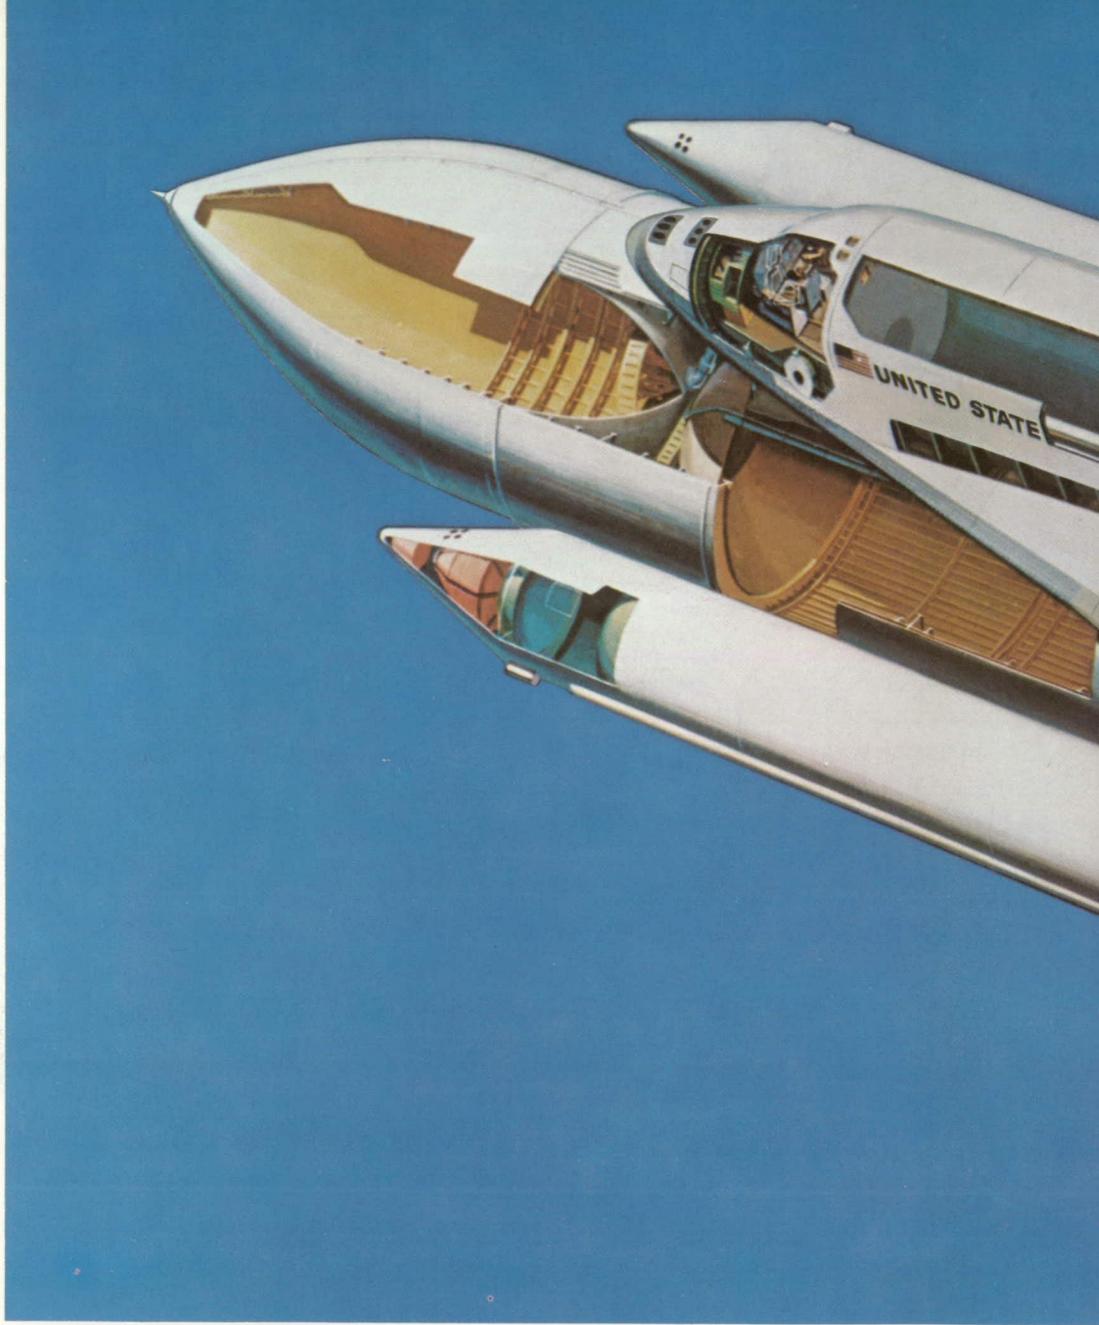

## SPACE SHUTTLE VEHICLE


The Orbiter is designed to carry into orbit a crew of up to seven, including scientific and technical personnel, and the payloads. The rest of the Shuttle system (SRB's and external fuel tank) is required to boost the Orbiter into space. The smaller Orbiter rocket engines of the orbital maneuvering system (OMS) provide maneuvering and control during space flight; during atmospheric flight the Orbiter is controlled by the aerodynamic surfaces on the wings and by the vertical stabilizer.

On a standard mission, the Orbiter can remain in orbit for 7 days, return to Earth with personnel and payload, land like an airplane, and be readied for another flight in 14 days. The Shuttle can be readied for a rescue mission launch from standby status within 24 hours after notification. For emergency rescue, the cabin can accommodate as many as 10 persons; thus, all occupants of a disabled Orbiter could be rescued by another Shuttle.

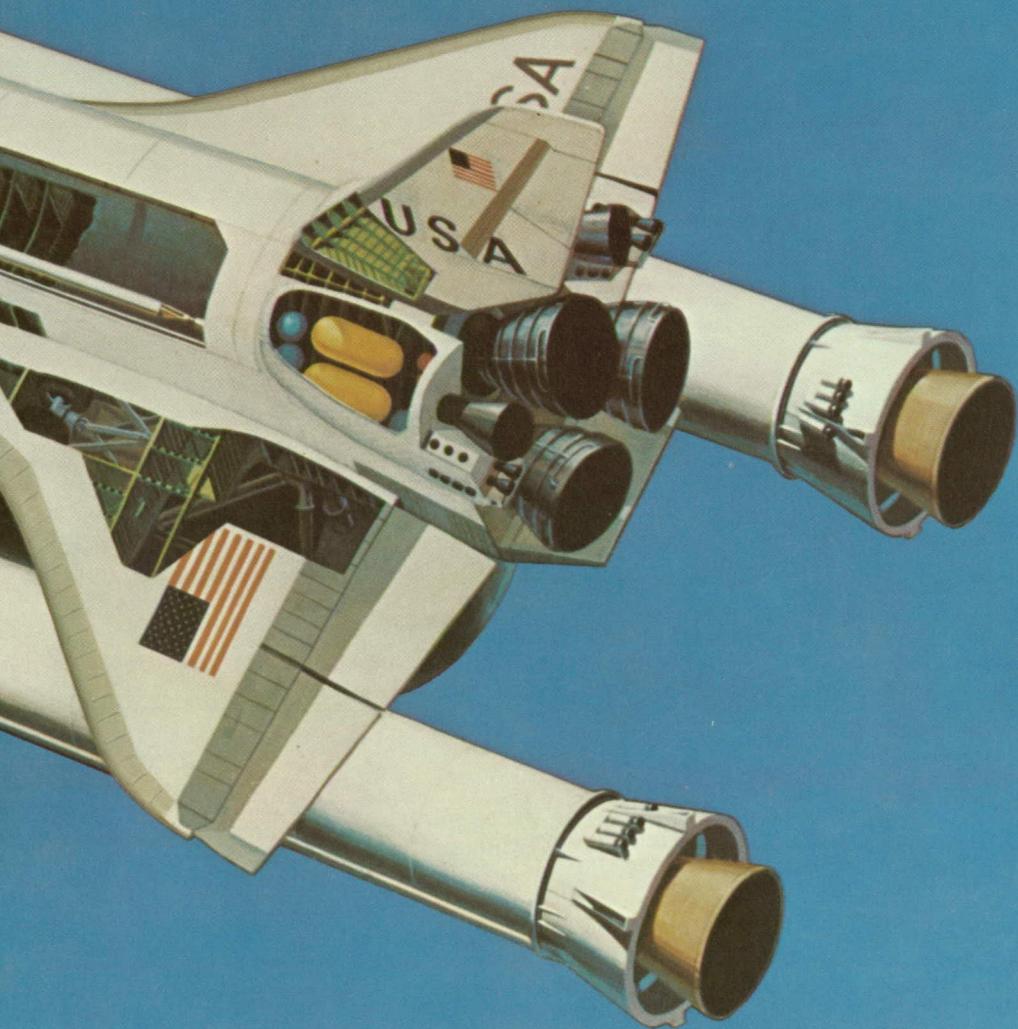

The SRB's, which burn in parallel with the Orbiter main propulsion system, are separated from the Orbiter/external tank at an altitude of approximately 45 kilometers (24 nautical miles), descend on parachutes, and land in the ocean approximately 278 kilometers (150 nautical miles) from the launch site. They are recovered by ships, returned to land, refurbished, and then reused.

After SRB separation, the Orbiter main propulsion system continues to burn until the Orbiter achieves a velocity just short of orbital requirements. The external tank then separates and falls into a remote area of the Indian or the South Pacific Ocean, depending on the launch site and mission. The OMS completes insertion of the Orbiter into the desired orbit.

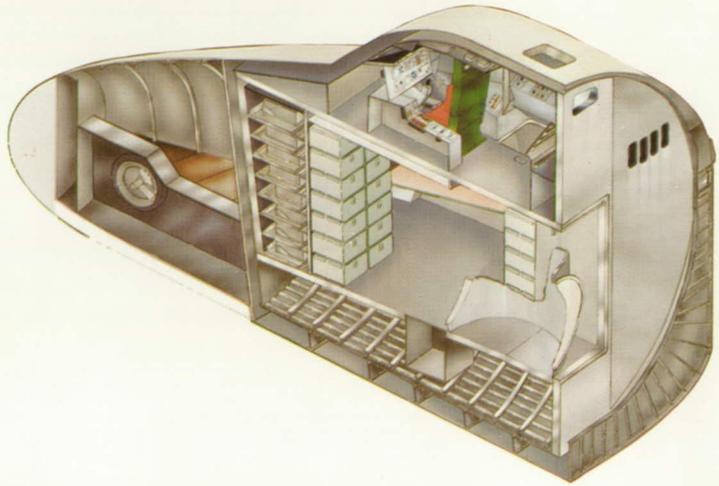

## **CREW AND PASSENGER ACCOMMODATIONS**

The crew and passengers occupy a two-level cabin at the forward end of the Orbiter. The crew controls the launch, orbital maneuvering, atmospheric entry, and landing phases of the mission from the upper level flight deck. Payload handling is accomplished by crewmen at the aft cabin payload station.

Seating for passengers and a living area are provided on the lower deck. The cabin will have a maximum of utility; mission flexibility is achieved with a minimum of volume, complexity, and weight. Space flight will no longer be limited to intensively trained, physically perfect astronauts but will now accommodate experienced scientists and technicians.



## WIDE VARIETY OF MISSIONS

The Space Shuttle has the capability to conduct space missions in response to currently projected national and worldwide needs and the flexibility to respond to policy, discovery, and innovation. The primary mission for the Space Shuttle is the delivery of payloads to Earth orbit. The shuttle system can place payloads of 29 500 kilograms (65 000 pounds) into orbit. Payloads with propulsion stages can place satellites into high Earth orbit or into lunar or planetary trajectories.


The Space Shuttle is more than a transport vehicle. The Orbiter has the capability to carry out missions unique to the space program: to retrieve payloads from orbit for reuse; to service or refurbish satellites in space; and to operate space laboratories in orbit. These capabilities result in a net savings in the cost of space operations while greatly enhancing the flexibility and productivity of the missions.

Among the multifaceted uses of Space Shuttle during its operational life, which will extend beyond the 1990's, will be a wide range of applications of the environment of space and of space platforms. The applications can be achieved through operation of satellites, satellites with propulsion stages, space laboratories, or combinations as appropriate to the specific objectives and requirements. The Shuttle also provides a laboratory capability to do research and to develop techniques and equipment that may evolve into new operational satellites.

The Space Shuttle will not be limited to uses that can be forecast today. The reduction in the cost of Earth-orbital operations and the new operational techniques will enable new and unforeseen solutions of problems.

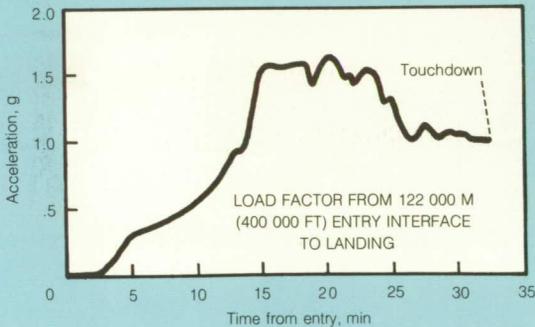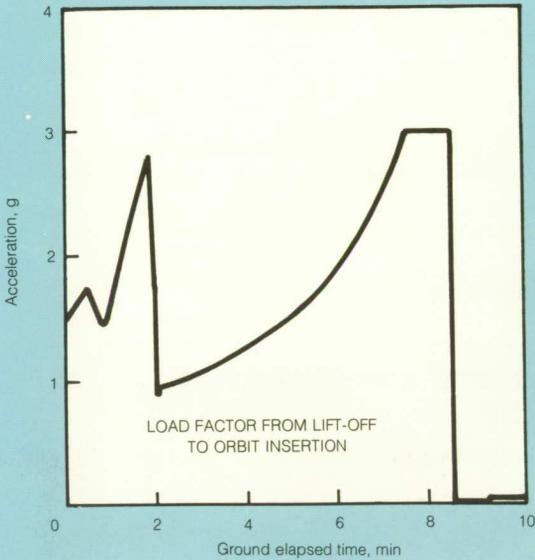

Crewmembers and passengers will experience a designed maximum gravity load of only 3g during launch and less than 1.5g during a typical reentry. These accelerations are about one-third the levels experienced on previous manned flights. Many other features of the Space Shuttle, such as a standard sea-level atmosphere, will welcome the nonastronaut space worker of the future.

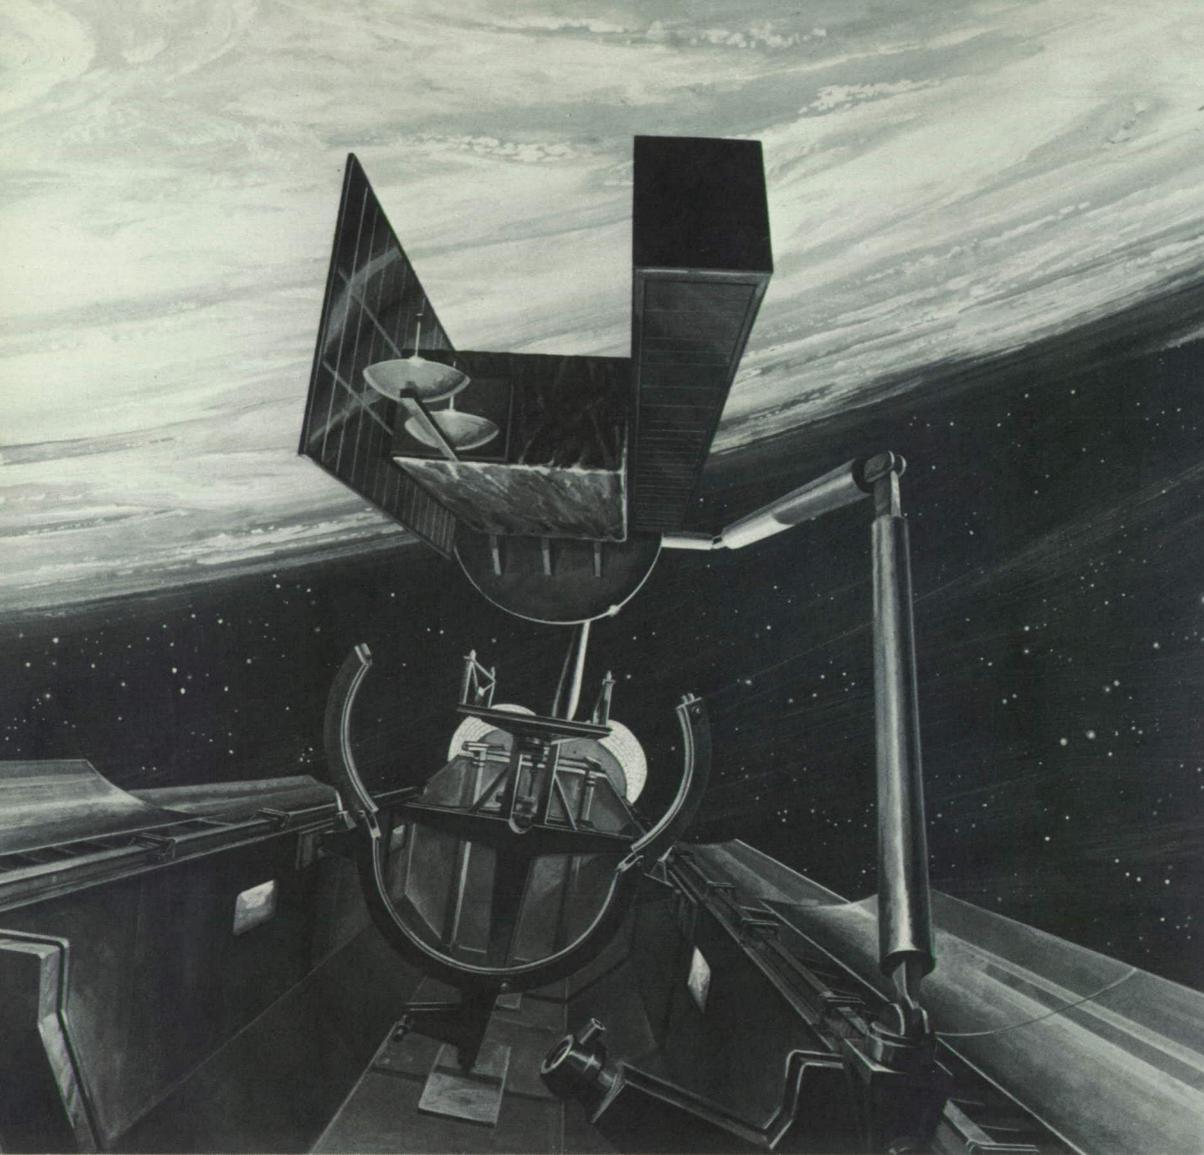

## PLACEMENT AND RECOVERY OF SATELLITES

One important Space Shuttle mission will be the placement of satellites in Earth orbit. A satellite launched on a previous mission can be retrieved and returned to Earth for refurbishment and reuse.

As many as five individual satellites may be delivered on a single mission. The satellites are serviced, checked out, and loaded into the Orbiter. The crew will consist of Shuttle pilots and mission and payload specialists. Upon reaching the desired orbit, the mission and payload specialists will conduct predeployment checks and operations. After determining that the satellite is ready, the crew will operate the payload deployment system, which lifts the

satellite from the cargo-bay retention structure, extends it away from the Orbiter, and releases it. The final activation of the satellite will be by radio command. The Orbiter will stand by until the satellite is performing satisfactorily before proceeding with the remainder of the mission.



To recover a satellite, the Orbiter will rendezvous with it, maneuver close, and grab it with the remote manipulator arm. After the satellite is deactivated by radio command, it will be lowered into the cargo bay and locked into place. The Orbiter will perform deorbit maneuvers, enter the atmosphere, and land, returning the expensive satellite for reuse.

## PLACEMENT OF FREE-FLYING SCIENTIFIC LABORATORIES IN SPACE

The space telescope represents an international facility for on-orbit space research controlled by the investigating scientists on the ground. Design studies are now being conducted and sponsored by the NASA Marshall Space Flight Center and the Goddard Space Flight Center. The Space Shuttle would deliver the telescope to orbit, and the crewmen assist in preparing the facility for operation. During scheduled revisits to the facility, the Space Shuttle crewmen would service supporting subsystems, exchange scientific hardware, and,

several years later, return the facility to Earth at the end of its mission.

The long duration exposure facility (LDEF) is a basic research project being implemented by the NASA Langley Research Center. The LDEF is a reusable, unmanned, low-cost, free-flying structure on which a variety of passive experiments can be mounted to study the effects of their exposure to space over a relatively long period of time. After an extended period in orbit, the LDEF will be retrieved by an Orbiter and returned to Earth for experiment analysis.

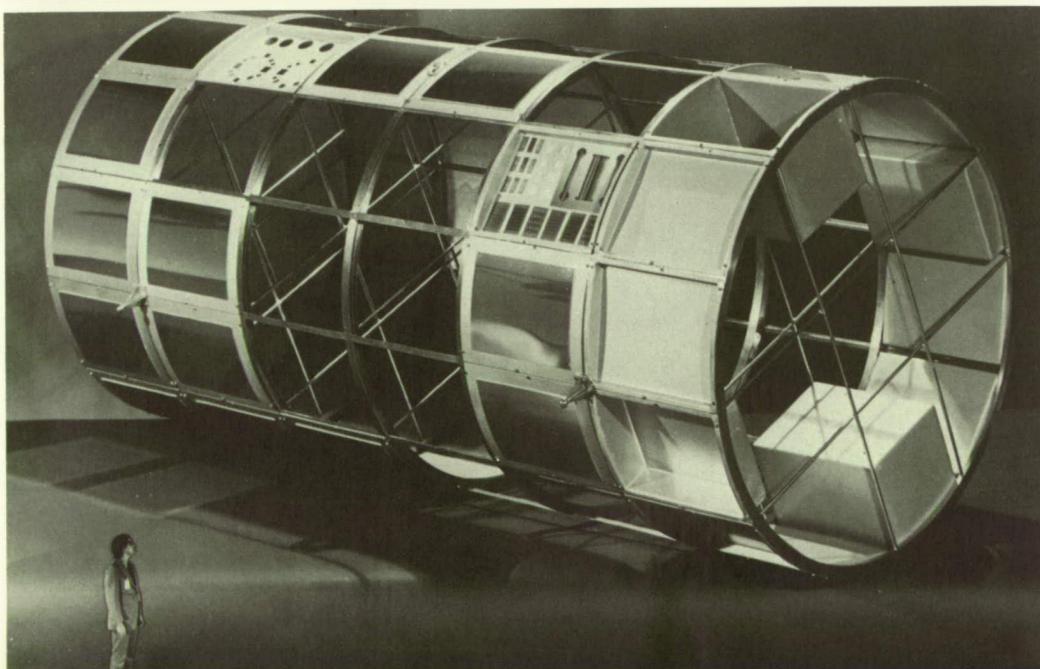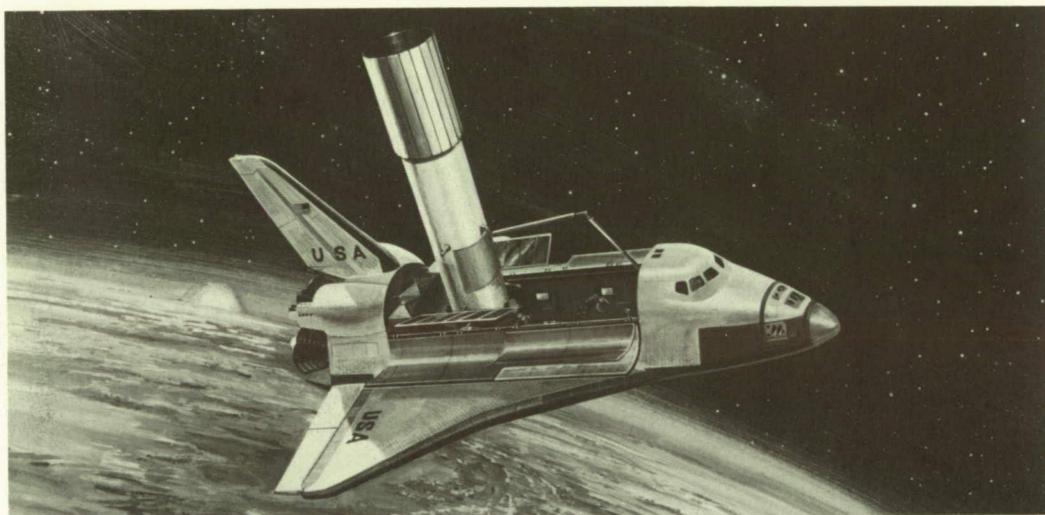




## **DELIVERY OF PAYLOADS THAT USE PROPULSION STAGES**


Major activity is forecast for geosynchronous orbits, deep-space missions, elliptical orbits, and higher circular orbits. Payloads with such destinations will require a propulsion stage in addition to the Shuttle. Both the satellite and the propulsion stage will be delivered to orbit and deployed as illustrated. Before release, the combined propulsion-stage/satellite system will be checked and readied for launch, and guidance information will be updated. The Orbiter will move a safe distance away before ground control gives radio command signals to fire the propulsion stage engines.

The Shuttle payload crew can do both visual and remote monitoring. In the event of a malfunction, the stage and satellite can be retrieved for inspection and possible repair. Should it be determined that repair is beyond the onboard capability, the entire payload (propulsion stage and satellite) would be returned to Earth for refurbishment.

Initially, a solid propulsion stage will be adapted for this on-orbit launch. This first design, referred to as interim upper stage (IUS), is not reusable but could lead to fully reusable propulsion stages in the future.


The Mariner Jupiter Orbiter/IUS will be launched by the Shuttle in the mid-1980's for the purpose of obtaining additional data about the planet Jupiter, its satellites, and the space surrounding it.

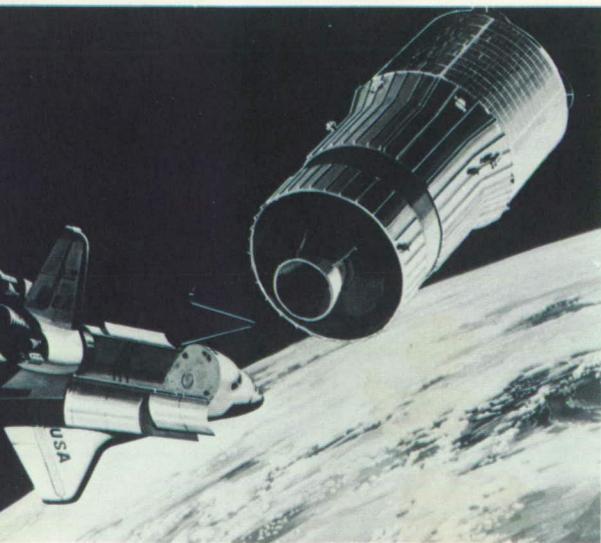

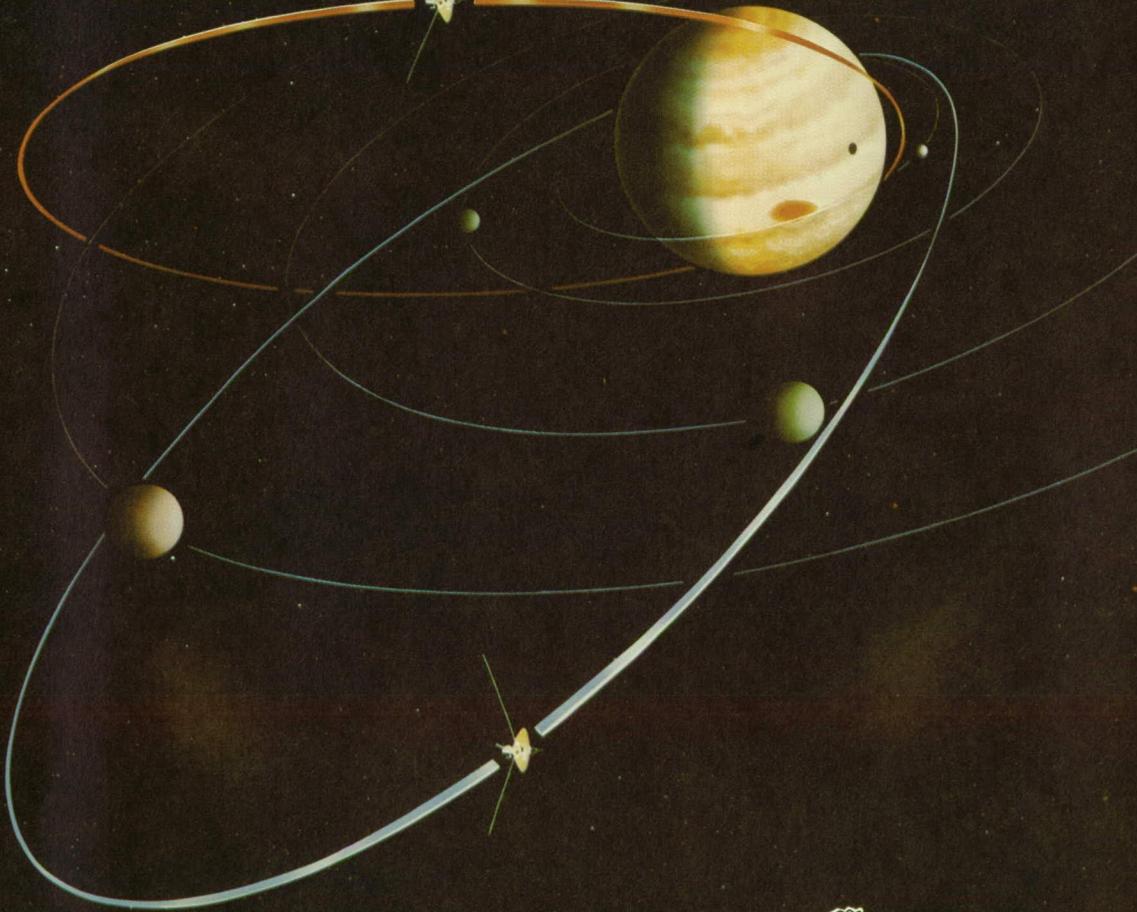


Typical Equatorial or  
High-Inclination Orbit

**MARINER JUPITER  
ORBITER SPACECRAFT**

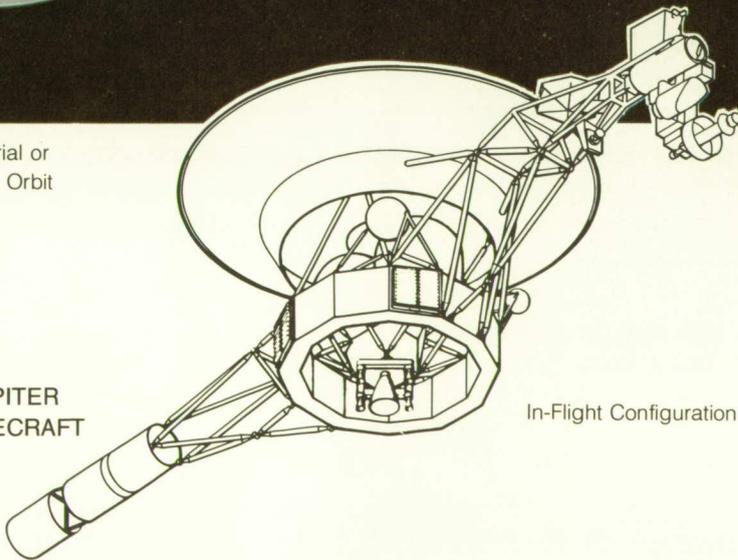

In-Flight Configuration

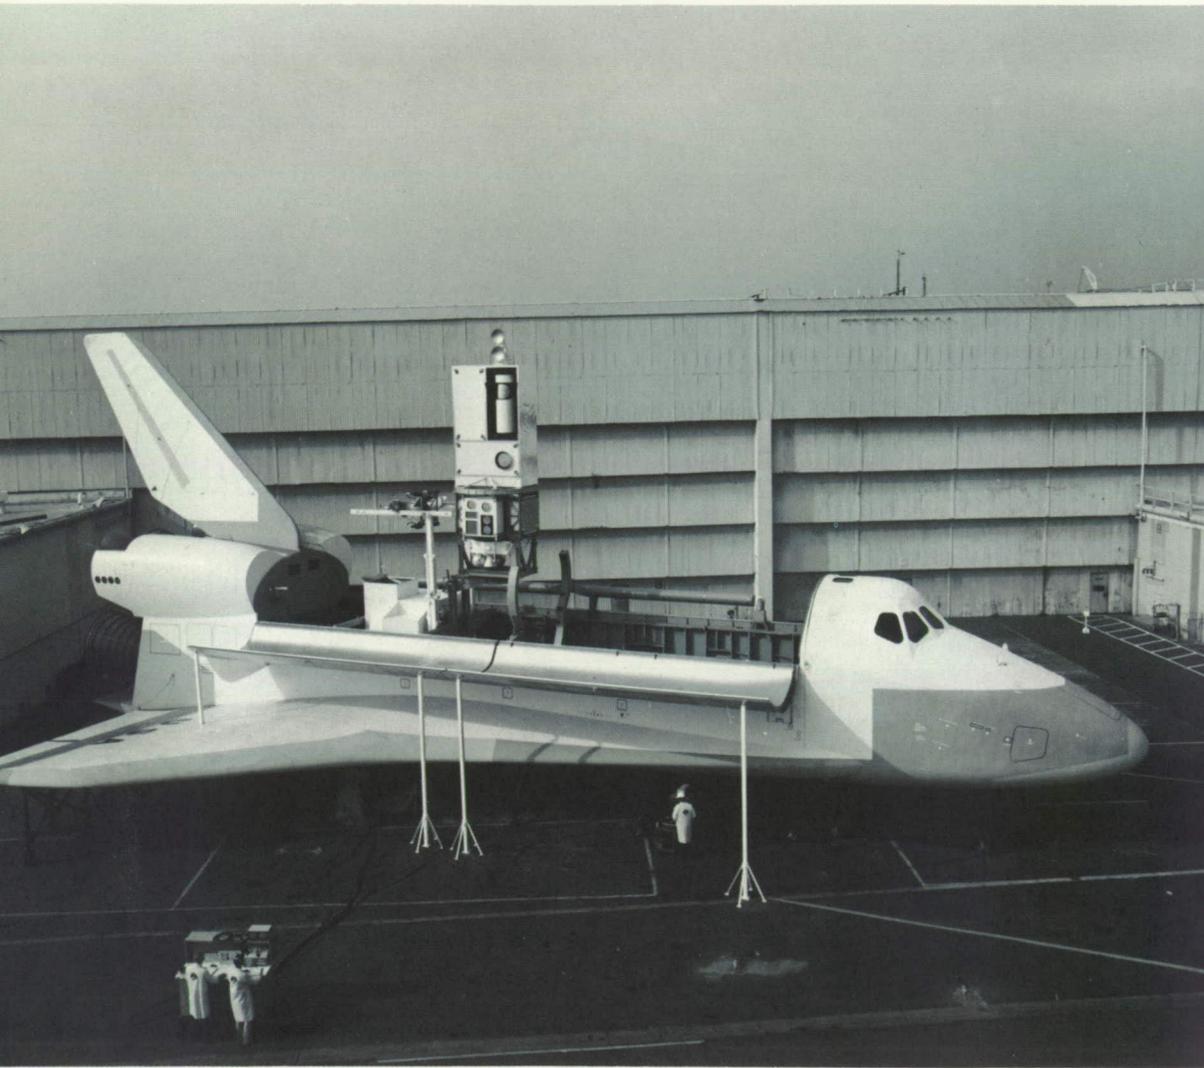


## ON-ORBIT SERVICING OF SATELLITES BY THE SPACE SHUTTLE

The NASA Goddard Space Flight Center is studying a family of modular spacecraft satellites to be placed in orbits of various inclinations and altitudes. The low-cost standard hardware is expected to comprise much of each satellite. Among other features, the design of this hardware will provide for on-orbit servicing by changeout of supporting subsystem assemblies and applications sensors. These system features, in association with the Shuttle-based equipment and Shuttle operational techniques,

will permit on-orbit maintenance and updating of this family of satellites. Combined with the large weight and volume capacity of the Shuttle, this capability provides the payload designer new freedom in developing and operating satellites that can reduce payload costs as well as improve performance.


Alternative techniques for on-orbit servicing of satellites are under study. The approach illustrated is based on current simulations of prototype hardware with replaceable modules.

## ORBITAL SERVICING AND CONTINGENCY RETRIEVAL OF SATELLITES

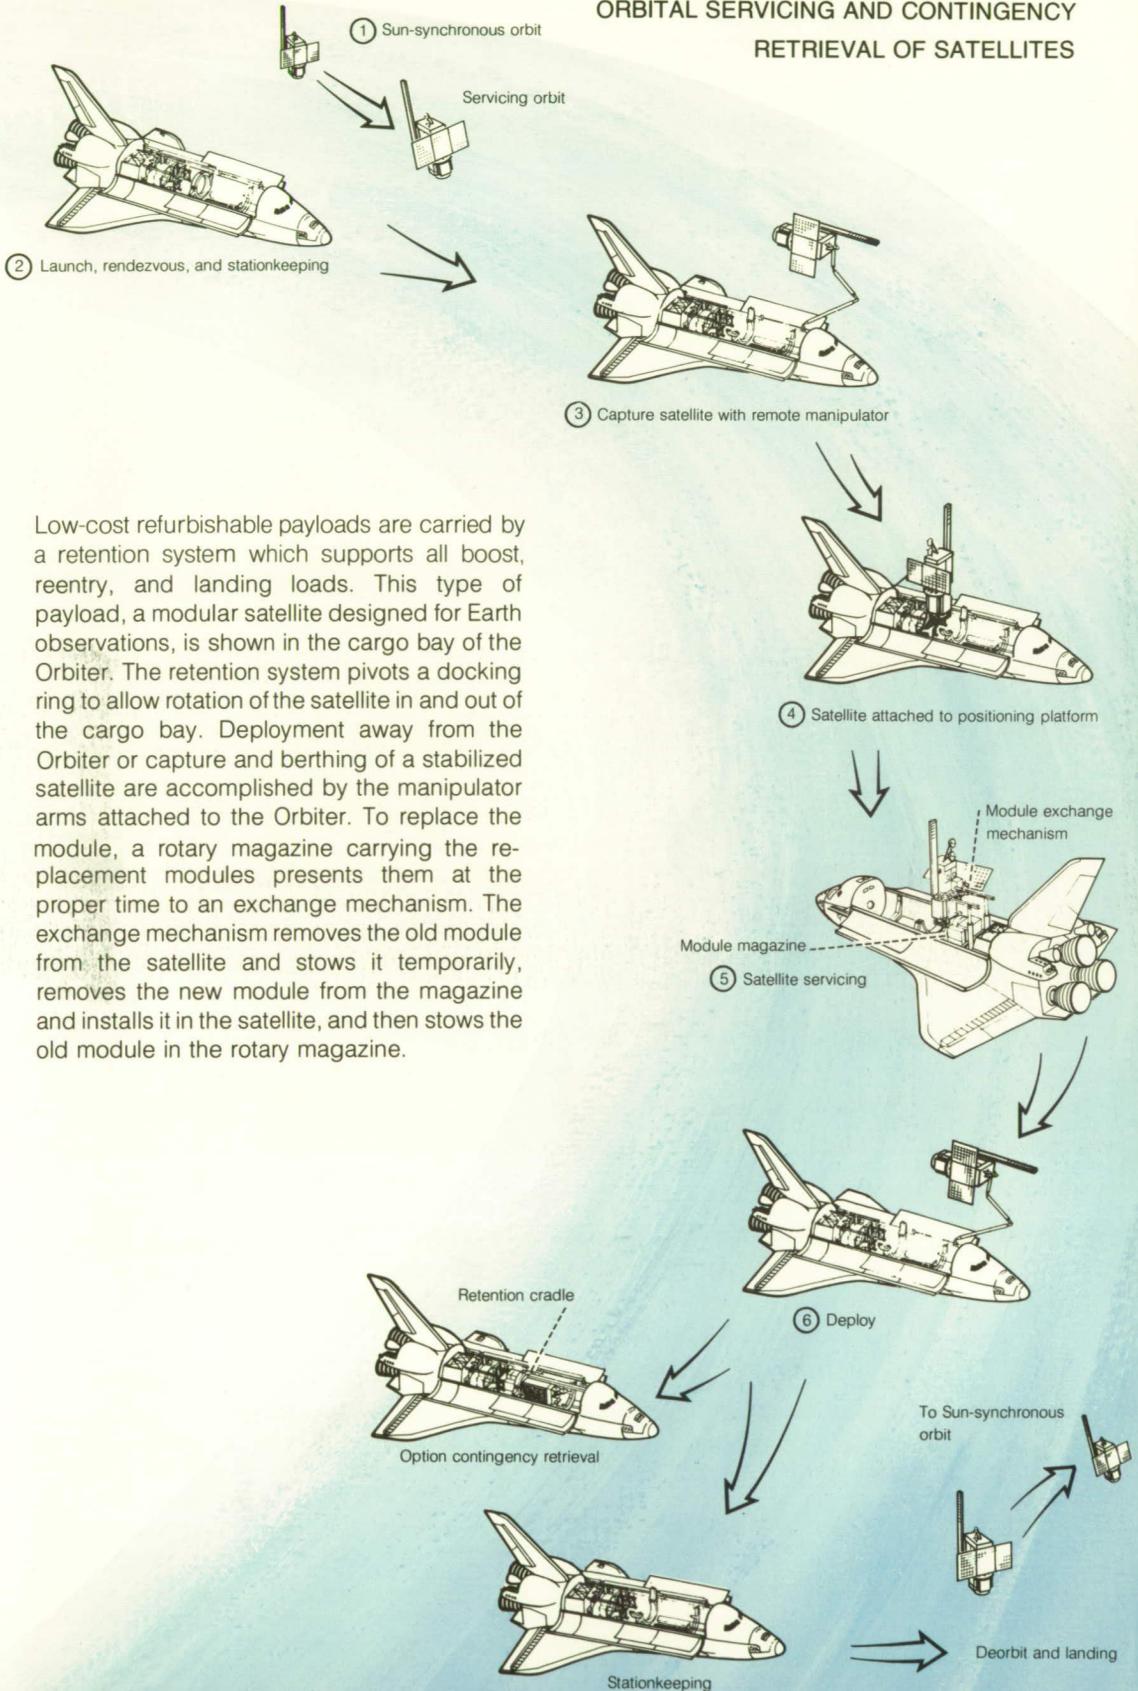

Low-cost refurbishable payloads are carried by a retention system which supports all boost, reentry, and landing loads. This type of payload, a modular satellite designed for Earth observations, is shown in the cargo bay of the Orbiter. The retention system pivots a docking ring to allow rotation of the satellite in and out of the cargo bay. Deployment away from the Orbiter or capture and berthing of a stabilized satellite are accomplished by the manipulator arms attached to the Orbiter. To replace the module, a rotary magazine carrying the replacement modules presents them at the proper time to an exchange mechanism. The exchange mechanism removes the old module from the satellite and stows it temporarily, removes the new module from the magazine and installs it in the satellite, and then stows the old module in the rotary magazine.

# SPACELAB AND ORBITER — INTERNATIONAL COOPERATION IN SPACE

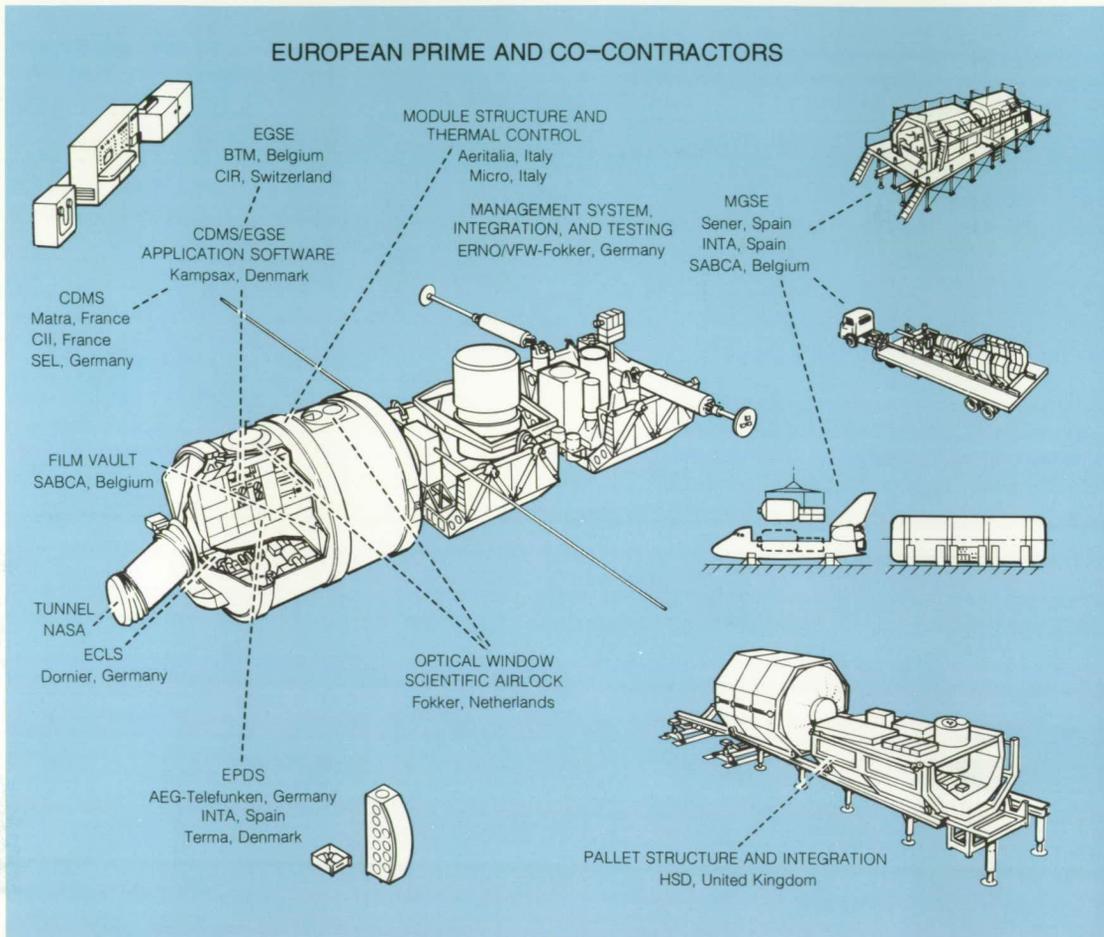

*This is an unprecedented cooperative enterprise which represents a most generous contribution by the European nations to the basic space facility of the 1980's, one which we can use in common on either a cooperative or reimbursable basis as circumstances warrant.*

*James C. Fletcher  
NASA Administrator*

Spacelab is an international program being developed by the European Space Agency (ESA). The large pressurized Spacelab module with an external equipment pallet will be a frequent payload carrier during the Space Shuttle era. Spacelab will provide an extension of the experimenter's ground-based laboratories with the added qualities which only

space flight can provide, such as a long-term gravity-free environment, a location from which Earth can be viewed and examined as an entity, and a place where the celestial sphere can be studied free of atmospheric interference.

Several Spacelab system configurations will be flown. The configuration illustrated includes a pressurized module where experimenters can work in a shirt-sleeve environment. A tunnel connects the Orbiter crew compartment with the Spacelab. Instruments can be mounted on a pallet aft of the pressurized module if they require exposure to the space vacuum or are too bulky to place inside or for convenience in viewing. The Orbiter may be flown in an inverted attitude to orient the instruments toward Earth for surveys of Earth resources and for investigations of geophysical and environmental parameters.



Other Spacelab configurations include those which, in place of a pressurized module, have a large pallet on which numerous instruments are installed and controlled from the payload specialist's station within the Orbiter. Pressure-suit operations in the payload bay are practical when instrument service is required.

Ten member nations of the European space community have agreed to commit almost \$500 million to design and deliver one flight unit to the United States. Agreements provide for purchase of additional units by the United States. Cooperating nations are West Germany, Italy, France, United Kingdom, Belgium, Spain, the

Netherlands, Denmark, Switzerland, and Austria. Many types of scientific, technological, medical, and applications investigations can be accomplished with this flight hardware. Each Spacelab is designed to be flown as many as 50 times over a 10-year period. This system will provide an entirely new capability for manned participation, which will increase the effectiveness of space research as well as reduce the cost of the application of space technology.

Some crewmembers and payloads for Spacelab will be international in origin and others will be provided by U.S. Government and industry.



# Space in Everyday Living

## **EARTHLY BENEFITS TODAY**

Of what *EARTHLY* benefit is the space program?

In the early years of America's space program, men with vision forecast that multiple benefits would someday be derived from the research and development activities associated with this program. Those benefits are no longer a promise; they are realities.

And this is just the beginning. The versatility and flexibility of the Space Shuttle will open up opportunities for more and longer investigations.


Benefits from past space efforts have already worked their way into daily life, to a far greater extent than most people realize. We apply what we learn in space to improve the quality of life on Earth. Advances in medicine, environmental monitoring and control, meteorology, the study of oceans and Earth resources, communications, education, products and materials, and international peace are taken for granted. These benefits together with the acknowledged impetus given to our technical leadership in the world supply overwhelming evidence of value received.

Most of these benefits are available to mankind throughout the world and some are in current use in countries other than the United States.

Some specific examples of these benefits follow. However, any list is obsolete as soon as it is written, because the applications of technology are constantly increasing.

The real extent of Earthly benefits from future space efforts can scarcely be predicted. The space program is an essential element in keeping our nation strong — scientifically, technologically, and economically — and thus it keeps us secure.



Photographs and other imagery from both manned and unmanned spacecraft have changed the ways we see our Earth.

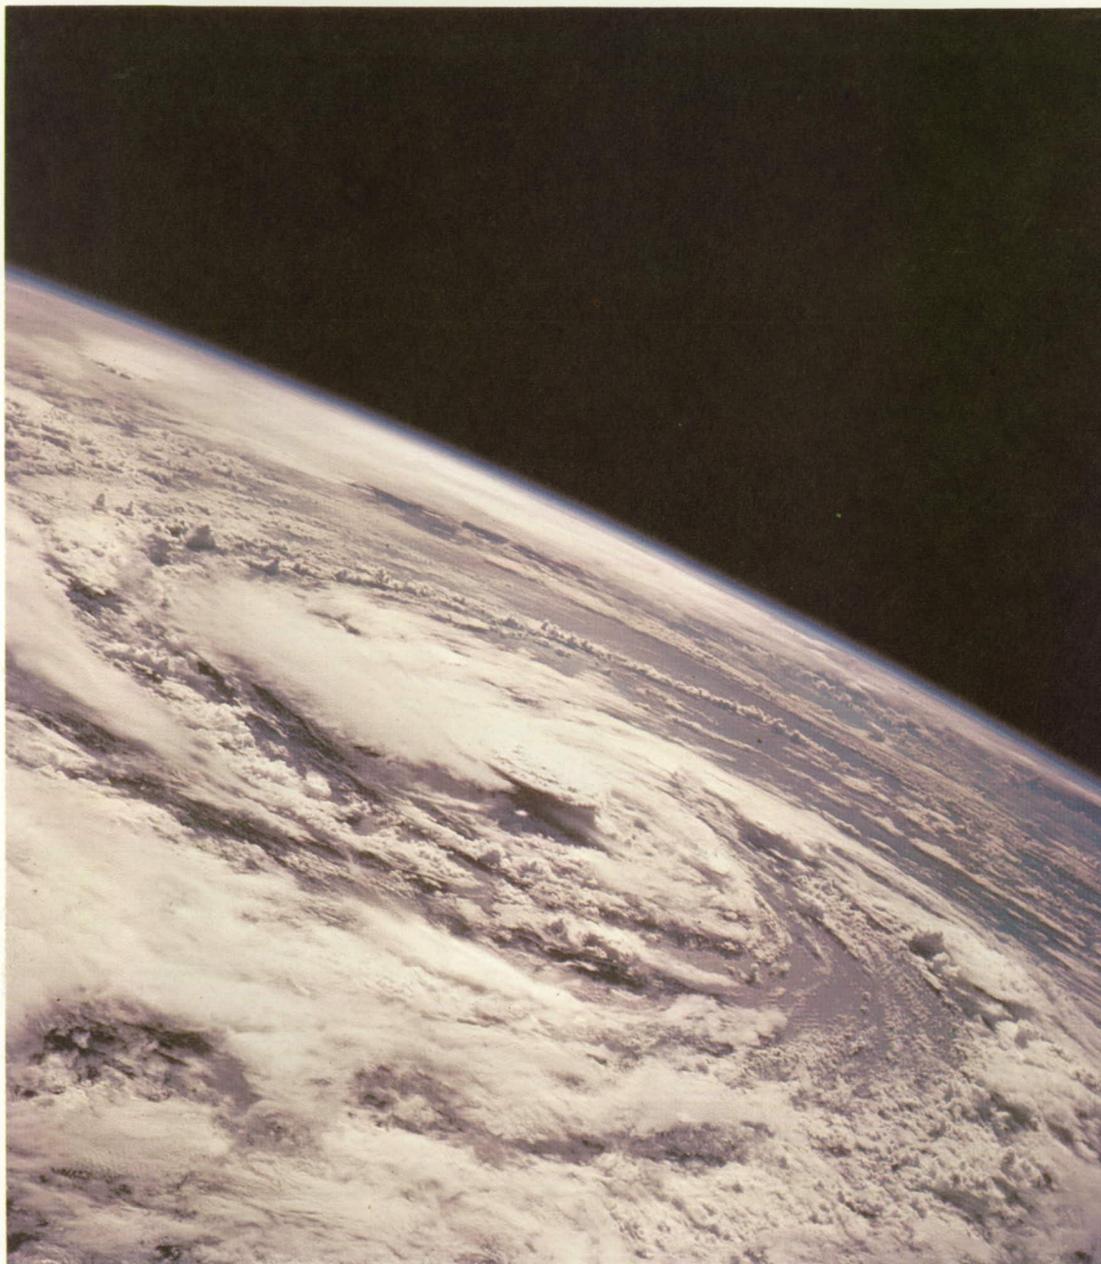

## Weather

Weather satellite photographs are perhaps the best known applications that affect our daily lives. Since the first weather satellite was launched in 1960, meteorological spacecraft have returned to Earth more information about the atmosphere than had been learned since man first began to study weather. An estimated

100 000 American lives have been saved as a result of early warnings of hurricanes and other severe weather.

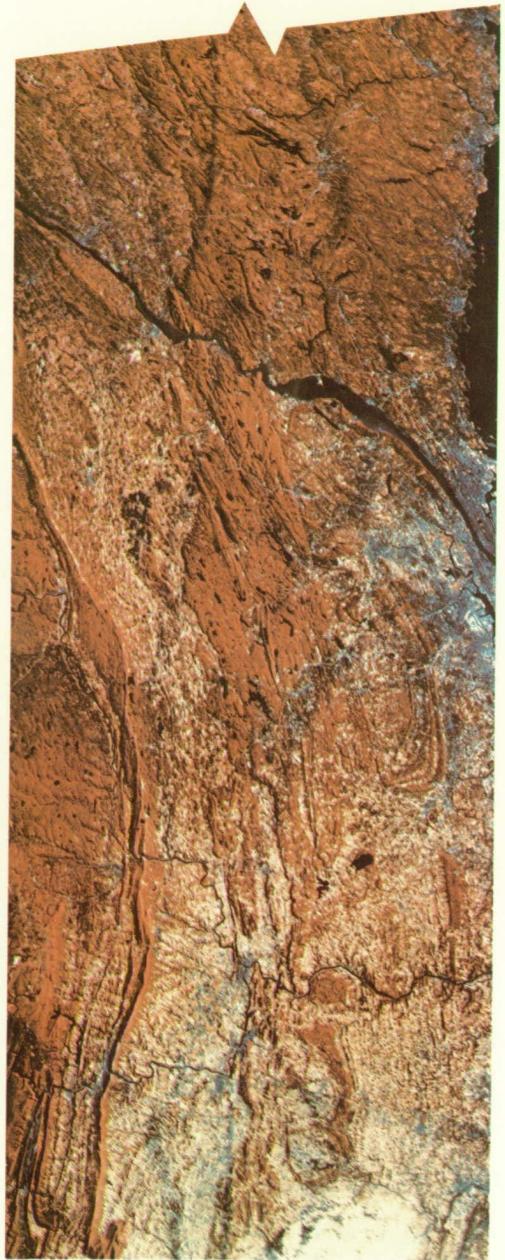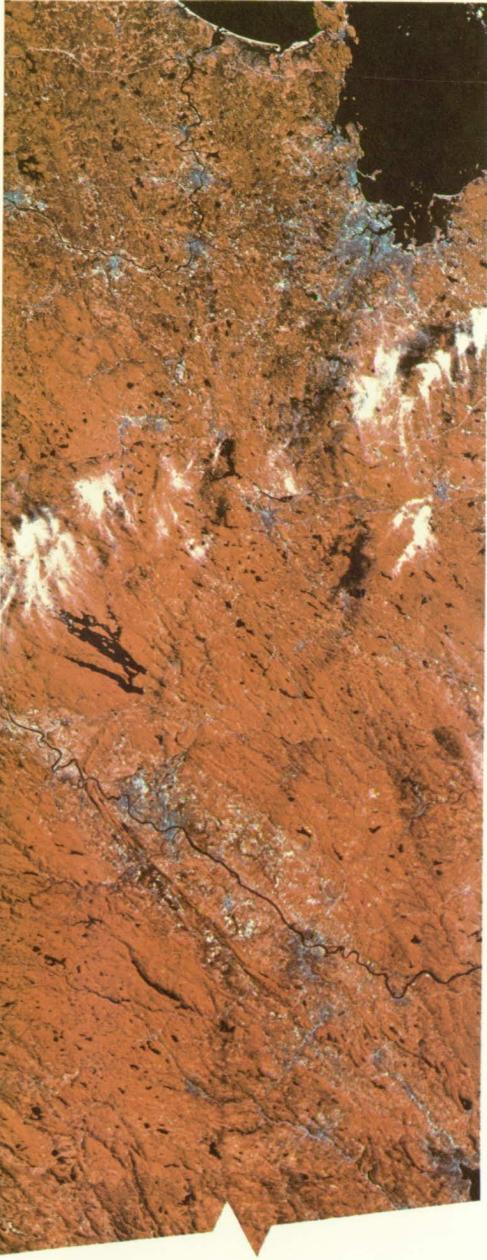

## Mapping and Charting

High-altitude photographs taken straight down can help mapmakers work efficiently and accurately. Because much larger areas can be covered by spacecraft than by aircraft in the same amount of time, maps can be changed frequently and accurately. The mosaic shown is part of one that was made from color infrared


photographs taken of the East Coast from Skylab. Massachusetts is at the top (with Boston Harbor on the right edge of the photograph). The mosaic extends through the New York metropolitan area, New Jersey, and almost to Philadelphia. The Appalachian Mountains extend along the left side.

## Land Use


Images transmitted from the Landsat satellites are used for a variety of studies, including determining land use patterns, forecasting crop yields, and helping to find land and water resources in hard-to-reach areas. The various spectral bands are sensitive to different colors. They can be compared (for example, the four bands of the same scene on the page opposite) to help photointerpreters identify features or

combined to create a false-color image (as shown below). This scene is the Houston, Texas, area.



Landsat-1 and Landsat-2 combined provide coverage of every area of the United States every 9 days. The data from Landsat can also be computerized and displayed in block format.

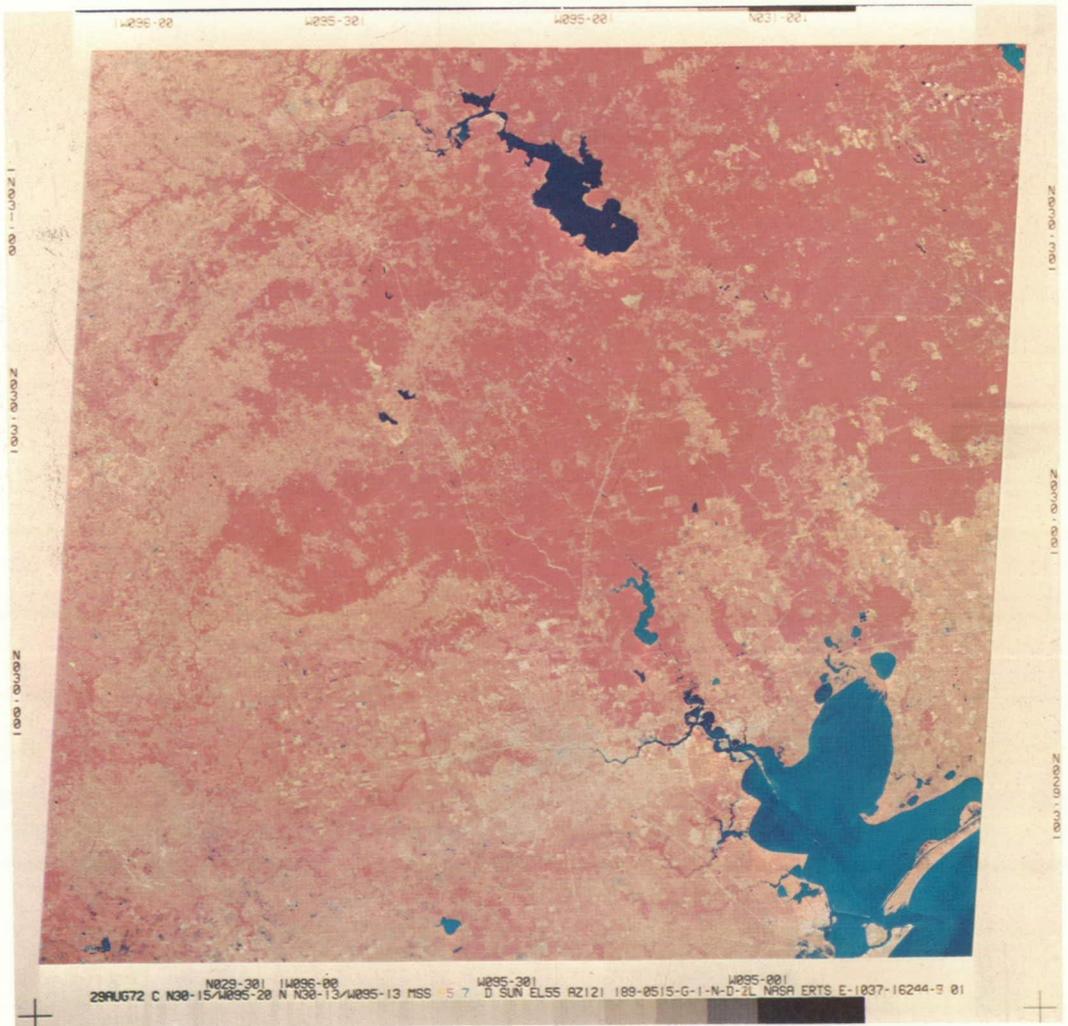


Band 4

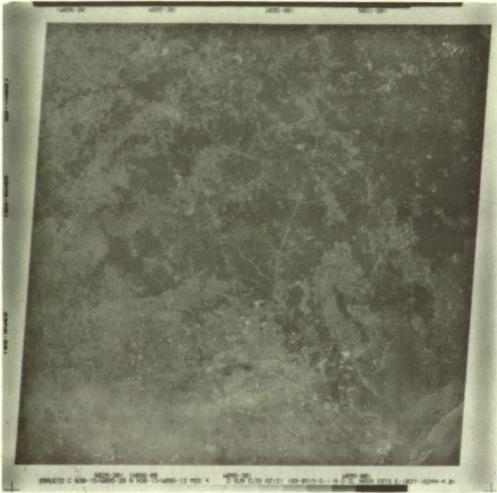

Band 5

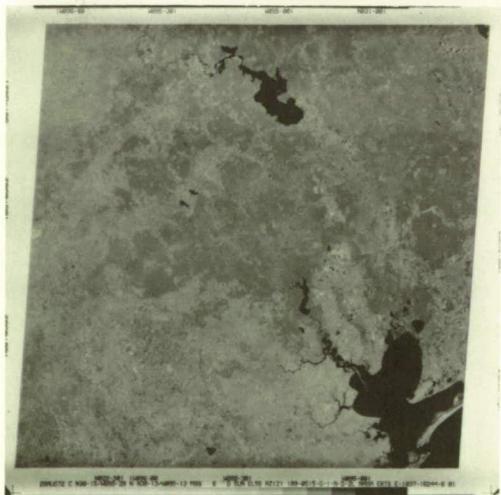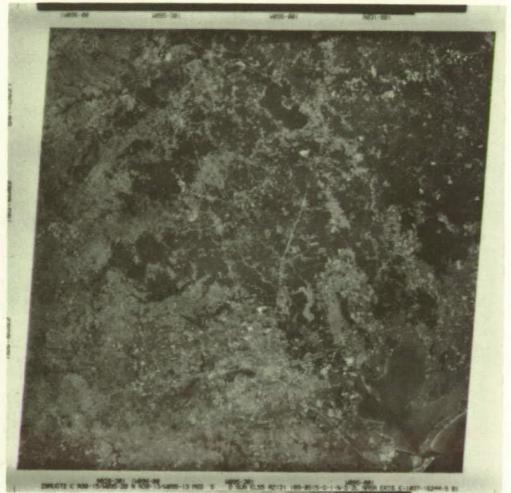

Band 6

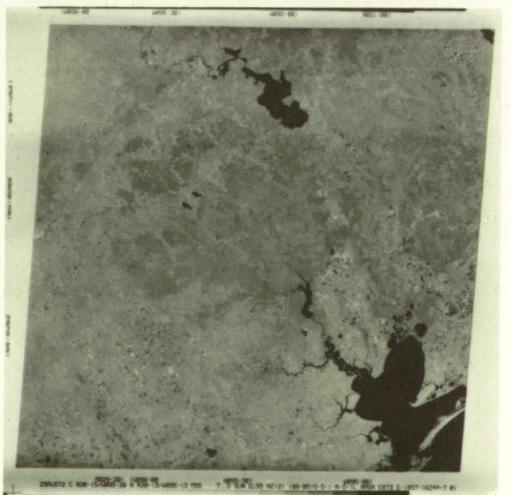

Band 7



## Pollution

The extent of water and air pollution and sometimes their sources can be established by space photography. Water pollution is visible as fuzziness along the southern shores of the Great Salt Lake. The sharp line across the lake near the top of the photograph represents a railroad bridge that impedes water circulation


in the lake; the lighter area north of the bridge is much saltier than the darker area. On the right side of the photograph is Lake Utah, a fresh-water body. Salt Lake City lies between the two lakes. The light splotch in the highlands next to Salt Lake City is the world's largest open-pit copper mine.



## Water Resources

Water resources, especially in inaccessible areas, can be monitored from space. For example, a study of this photograph of snow along the Mogollon Rim in Arizona can lead to accurate prediction of how much water will be

available after the thaw to irrigate the desert. Flagstaff is at the bottom center of the photograph and the Painted Desert is across the top. The Meteor Crater is visible slightly to the right of the center of the photograph.

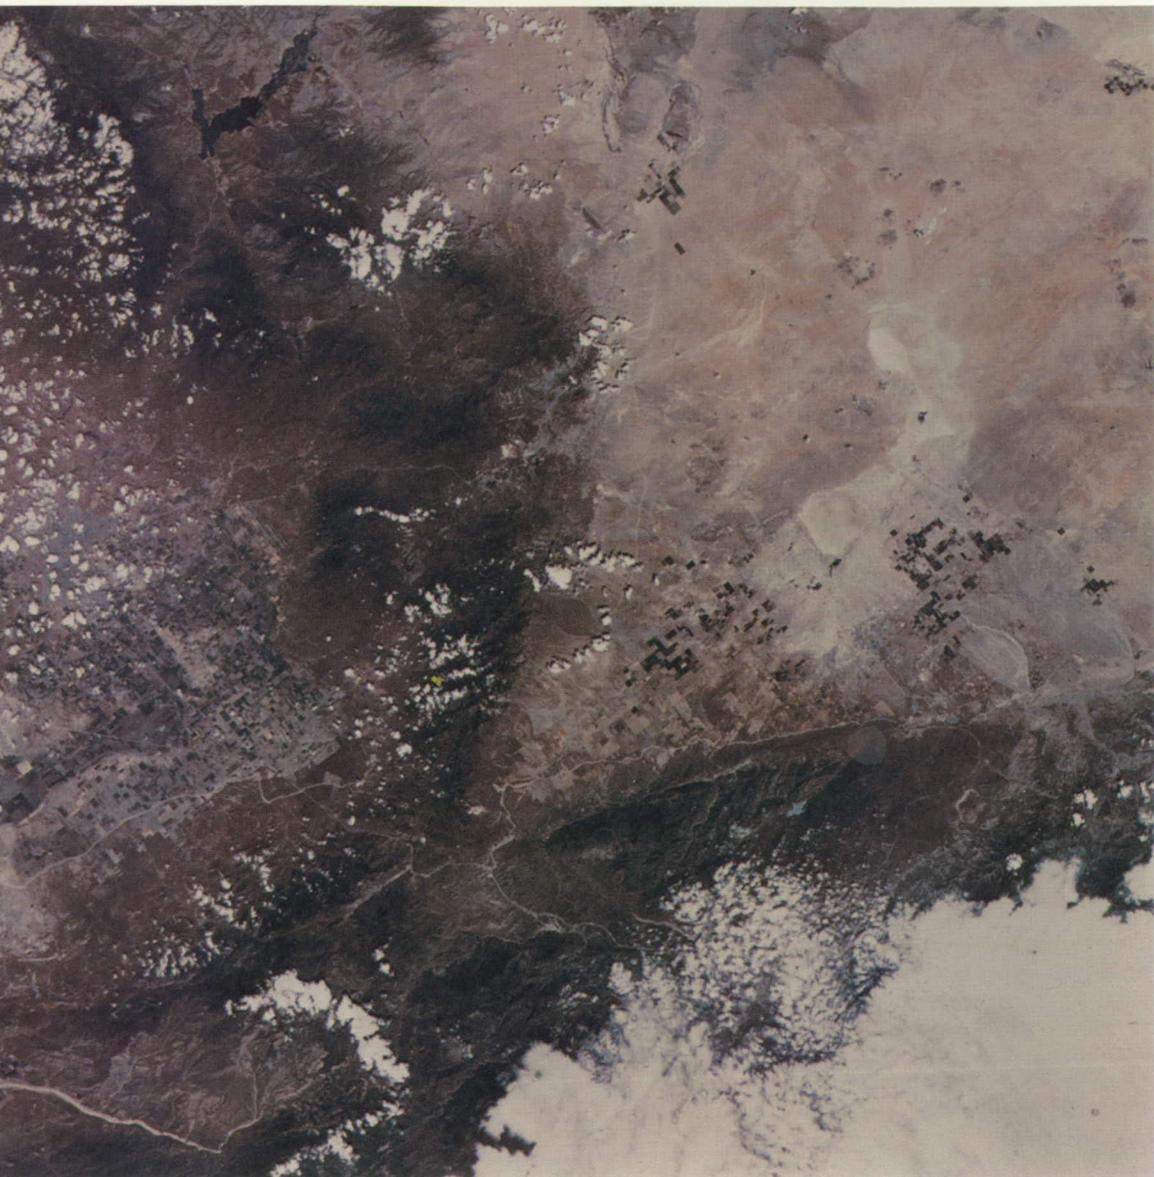

## Geology

Geological studies can be made from photographs such as this to support mineral exploration throughout the world. Geological faults often stand out in space imagery. The photograph of California just north of Los Angeles clearly defines where three faults meet in a populated area. If mankind can learn to monitor these faults from space, it might become possible to accurately predict the time, loca-

tion, and intensity of earthquakes. The dark line across the lower third of the photograph is the San Andreas Fault. Angling into the lower right corner and partially hidden by clouds is the San Gabriel Fault. The Garlock Fault is the dark area extending up the middle of the photograph. Lake Isabella is in the upper right and the city of Bakersfield below it. On the right is Palmdale, where the Orbiter is being built.



## Oceanography

Many features of the ocean can be studied more easily from space than any other way. The photograph taken from Skylab shows a current boundary in the Atlantic Ocean south of Bermuda. Oceanographers had never been able to verify this interaction of currents and ocean swells until they had pictures showing water patterns in extremely large areas — pictures that only a camera in space could provide.

Areas of nutrients, such as algae and plankton, are also clearly visible from space.

This information is important to commercial fishermen because fish are likely to be concentrated in these areas.

Space imagery can be used to chart the movement of icebergs to indicate ocean currents and to aid routing of ships to safer areas.

A computer using radiance data from a multispectral scanner aboard Skylab charted water depths; this method would simplify updating and correction of hydrographic charts.

## Communications

Because of communications satellites, television viewers all over the world take for granted that they can watch sports and news events as they happen. The communications satellites in stationary orbit transmit a variety of other educational, governmental, and commercial data as well.

A new light beam voice communications de-

vice has been developed by NASA scientists because of space-oriented requirements. These communications are immune to interception and jamming and are completely private. Because the remote microphone requires no power, the system offers many possible applications in industry, at sea, and in air/sea rescue operations.

## Health Care



Many advances in health care have resulted from devices originally designed to monitor astronauts in space and send data back to Earth. For example, a lightweight battery-powered mobile unit that fits into an ambulance and links trained emergency medical technicians to a physician is already being used by some communities; the city of Houston, Texas, has equipped 28 rescue vehicles with these units.

Inside hospitals, too, automatic monitoring systems similar to the ones used for Apollo astronauts can collect several channels of physiological data from as many as 64 patients and transmit the data in digital form to a central control station for processing by a computer.

Spacesuits and portable life-support systems have inspired other medical advances such as a mobile biological isolation system and a portable volume-controlled respirator.



## Materials and Manufacturing



In industry, new materials and changed manufacturing processes have resulted from space-oriented research. Fireproof materials, for example, are constantly being improved to provide better protection (including facial covering) for firefighters.

Still in the experimental stage is the growing of crystals in space (such as the one in the photograph at left), which can be used in various applications, including the production of electronic devices. Experiments have indicated that this type of production in space is feasible and provide data on the conditions under which products of this kind can be made.

These are just a few examples of the ways space research is affecting our daily lives in unexpected ways. And the list lengthens after every space venture.




ENVIRONMENT



AGRICULTURE



PETROLEUM RESOURCES



MINERAL RESOURCES

## EARTHLY PAYOFF TOMORROW


Man goes into space to explore the unknown — to increase our understanding of the past, present, and future of the universe and humanity's place in it. When the Space Shuttle becomes operational in 1980, it will be an important tool to provide mankind with information to help in managing and preserving our crowded Earth. Users of the versatile Shuttle system will include communications networks, research foundations, universities, observatories, federal




COMMUNICATIONS



OCEANOGRAPHY

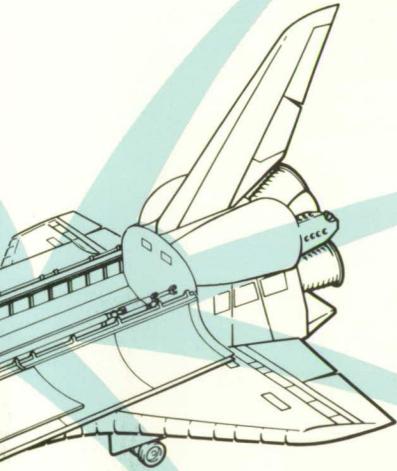

TIMBER



SCIENTIFIC STUDIES

departments and agencies, state agencies, county and city planners, public utilities, farm cooperatives, the medical profession, the fishing industry, the transportation industry, and power generation and water conservation planners.

Payloads launched by the Space Shuttle will provide practical data that will affect both the daily lives of people and the long-term future of mankind.



## Agriculture

Sensor systems in space can help the world solve its food problems. The sensors can identify crops in each field, tell the vigor and probable yield of those crops, and determine plant diseases or insect infestation. This information will help agricultural specialists predict total food available on a worldwide basis.



## Petroleum Resources


Photographs of the Earth taken from space have already supported explorations of oil and natural gas around the world. The improved satellites of the Space Shuttle era will be able to locate new sources of fossil fuels.

## Environment

In environmental studies, satellites can send weather information to the ground, survey land use patterns, track air pollution and identify its source, monitor air quality, and locate oil slicks. A pollution-mapping satellite can cover the entire United States in about 500 photographs; cameras carried in high-altitude airplanes would use about 500 000 frames to cover the same area. What would take years to monitor by air can be monitored from space in a few days.

## Mineral Resources


Potentially large mineral deposits have been identified in many parts of the world as a result of Skylab photographs. The advanced satellites emplaced by the Space Shuttle are expected to make many more valuable mineral discoveries.

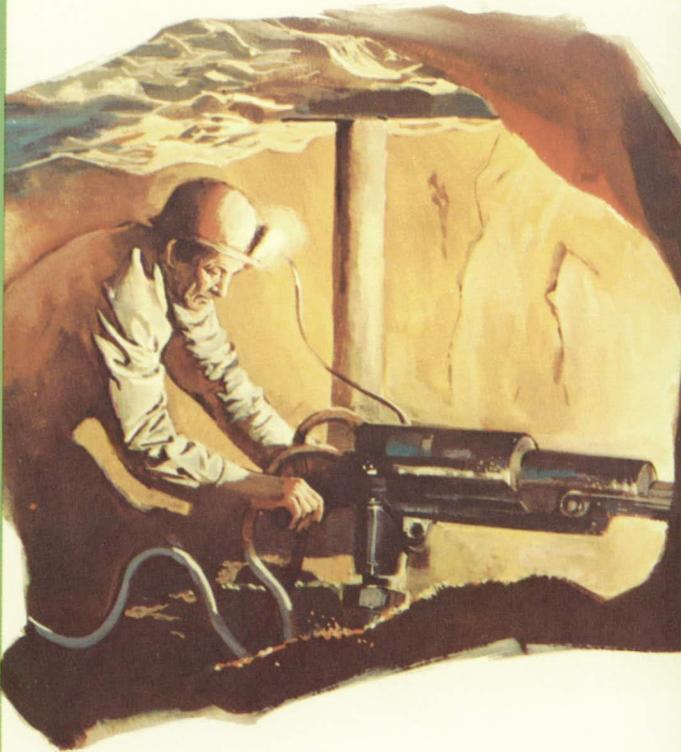



## Oceanography

By mapping the ocean surface temperature, Earth resources satellites will help oceanographers understand current patterns. This, in turn, will enable fishing experts to predict the movements of schools of fish. Ice movements in the ocean can also be tracked from space.

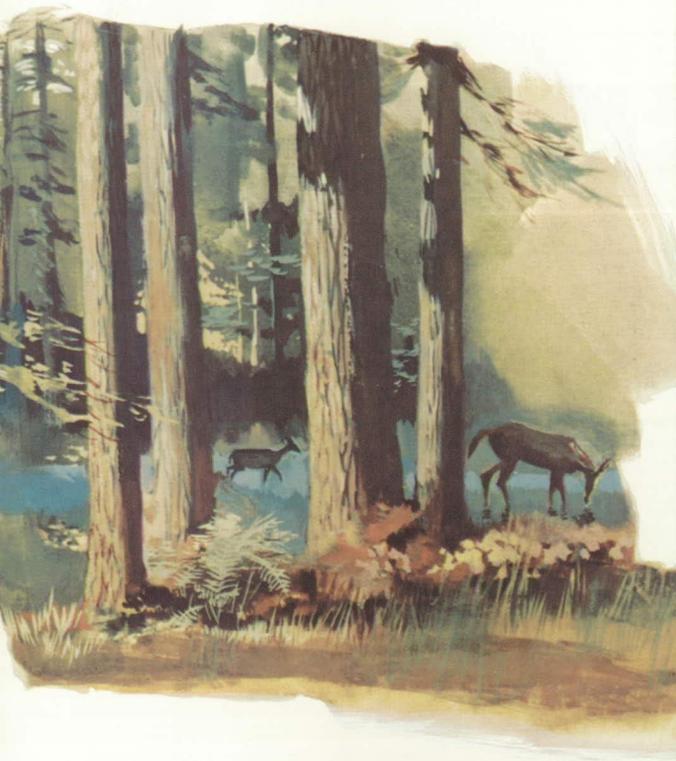


## Timber

Shuttle-launched satellites can help conserve our forest resources, especially in remote areas, by discovering fires, by detecting tree diseases and infestations of pests, and by providing accurate inventories of our timberlands.

## Scientific Studies

Shuttle is capable of taking into Earth orbit completely equipped scientific laboratories manned by scientists and technicians. In the weightless environment of space, researchers can perform many tasks that cannot be accomplished against the gravitational pull of Earth.

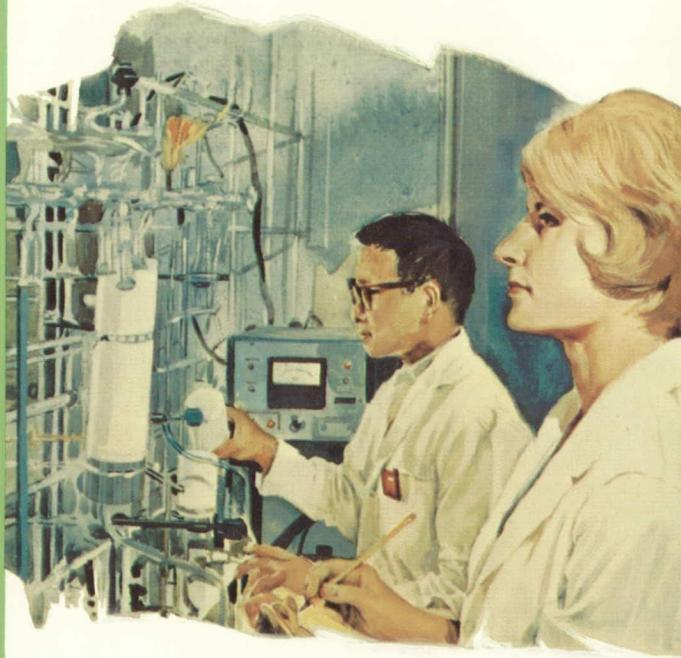


## Communications

Communications satellites have made intercontinental television possible and are reducing the costs of transoceanic telephone calls. The costs will decrease again when the reusable Shuttle takes new and improved satellites into Earth orbit.





# Space Shuttle Vehicle

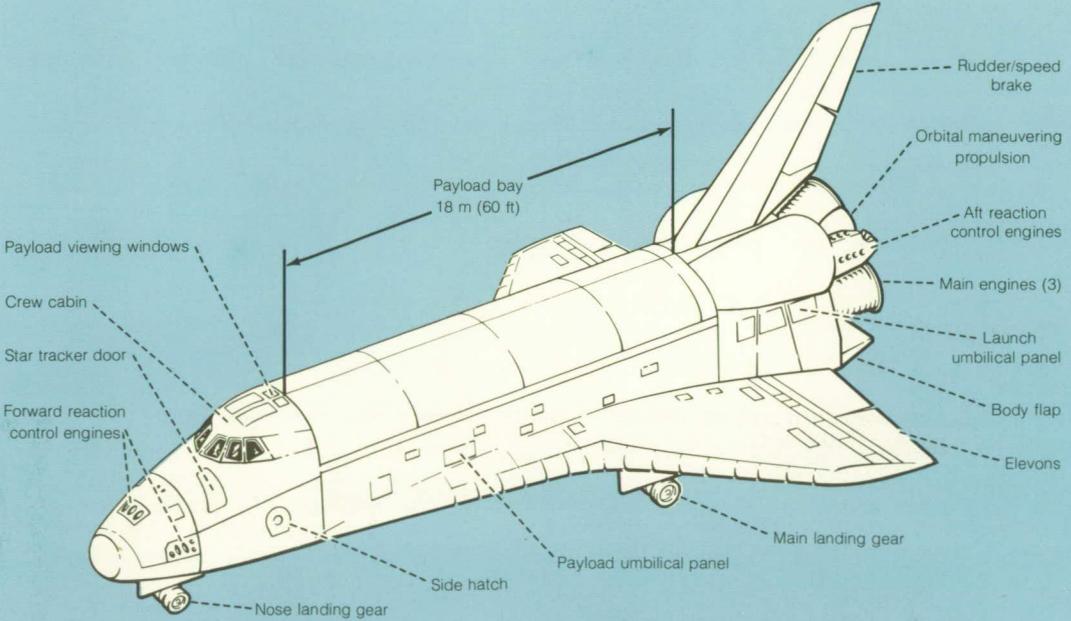

## SPACE SHUTTLE ORBITER


The Orbiter spacecraft contains the crew and payload for the Space Shuttle system. The Orbiter can deliver to orbit payloads of 29 500 kilograms (65 000 pounds) with lengths to 18 meters (60 feet) and diameters of 5 meters (15 feet). The orbiter is comparable in size and weight to modern transport aircraft; it has a dry weight of approximately 68 000 kilograms (150 000 pounds), a length of 37 meters (122 feet), and a wingspan of 24 meters (78 feet).

The crew compartment can accommodate seven crewmembers and passengers for some missions but will hold as many as 10 persons in emergency operations.

The three main propulsion rocket engines used during launch are contained in the aft fuselage. The rocket engine propellant is contained in the external tank (ET), which is jettisoned before initial orbit insertion. The orbital

maneuvering subsystem (OMS) is contained in two external pods on the aft fuselage. These units provide thrust for orbit insertion, orbit change, rendezvous, and return to Earth. The reaction control subsystem (RCS) is contained in the two OMS pods and in a module in the nose section of the forward fuselage. These units provide attitude control in space and precision velocity changes for the final phases of rendezvous and docking or orbit modification. In addition, the RCS, in conjunction with the Orbiter aerodynamic control surfaces, provides attitude control during reentry. They take effect in the lower, more dense atmosphere providing control of the Orbiter at speeds less than Mach 5. The Orbiter is designed to land at a speed of 95 m/sec (185 knots), similar to current high-performance aircraft.

## EXTERNAL TANK

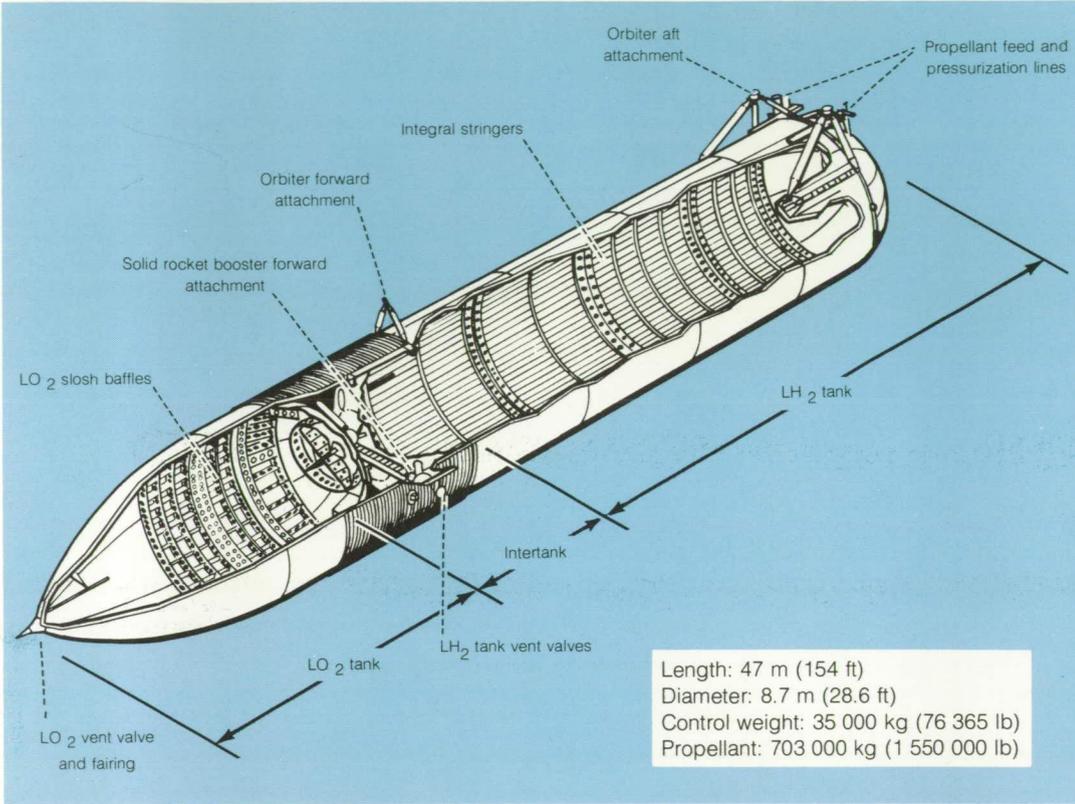

The external tank contains the propellants for the Orbiter main engines: liquid hydrogen ( $LH_2$ ) fuel and liquid oxygen ( $LO_2$ ) oxidizer. All fluid controls and valves (except the vent valves) for operation of the main propulsion system are located in the Orbiter to minimize throwaway costs. Antivortex and slosh baffles are mounted in the oxidizer tank to minimize liquid residuals and to damp fluid motion. Five lines (three for fuel and two for oxidizer) interface between the external tank and the Orbiter. All are insulated except the oxidizer pressurization line. Liquid-level point sensors are used in both tanks for loading control.


At lift-off, the external tank contains 703 000 kilograms (1 550 000 pounds) of usable propellant. The  $LH_2$  tank volume is  $1523\text{ m}^3$  ( $53\,800\text{ ft}^3$ ) and the  $LO_2$  tank volume is  $552\text{ m}^3$  ( $19\,500\text{ ft}^3$ ). These volumes include a 3-percent ullage provision. The hydrogen tank is pressurized to a range of 220 600 to 234 400  $N/m^2$  (32 to 34

psia) and the oxygen tank to 137 900 to 151 700  $N/m^2$  (20 to 22 psia).

Both tanks are constructed of aluminum alloy skins with support or stability frames as required. The sidewalls and end bulkheads use the largest available width of plate stock. The skins are butt-fusion-welded together to provide reliable sealed joints. The skirt aluminum structure uses skin/stringers with stabilizing frames.

Spray-on foam insulation (SOFI) is applied to the complete outer surface of the external tank, including the sidewalls and the forward bulkheads. This spray-on ablator is applied to all protuberances, such as attachment structures, because shock impingement causes increased heating to these areas. The thermal protection system (TPS) coverage is minimized by using the heat-sink approach provided by the sidewalls and propellants.

## SOLID ROCKET BOOSTERS

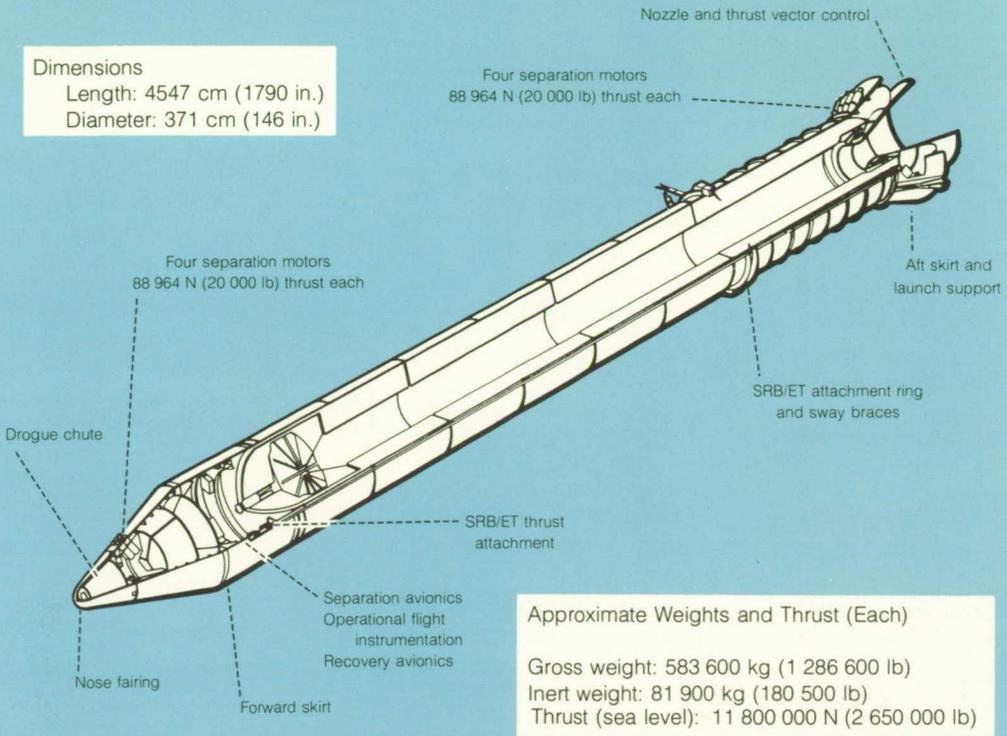

Two solid rocket boosters (SRB's) burn for 2 minutes with the main propulsion system of the Orbiter to provide initial ascent thrust. Primary elements of the booster are the motor, including case, propellant, igniter, and nozzle; forward and aft structures; separation and recovery avionics; and thrust vector control subsystems. Each SRB weighs approximately 583 600 kilograms (1 286 600 pounds) and produces 11 800 000 newtons (2 650 000 pounds) of thrust at sea level. The propellant grain is shaped to reduce thrust approximately one-third 55 seconds after lift-off to prevent overstressing the vehicle during the period of maximum dynamic pressure. The thrust vector control subsystem has a maximum omniaxial gimbal capability of slightly over 7° which, in conjunction with the Orbiter main engines, provides flight control during the Shuttle boost phase.


The SRB is attached to the tank at the forward end of the forward skirt by a single thrust attachment. The pilot, drogue, and main parachute risers of the recovery subsystem are attached to the same thrust structure.

The SRB's are released by pyrotechnic separation devices at the forward thrust attachment and the aft sway braces. Eight separation rockets on each SRB (four aft and four forward) separate the SRB from the Orbiter and external tank. They continue through a 67 000-meter (220 000-foot) apogee, then at 5800 meters (19 000 feet) the SRB nose cap is deployed for recovery initiation. The pilot chute deploys the drogue chute, which, after stabilizing the SRB, then deploys the aft frustum with the main parachute packs. The three main chutes inflate to a reefed condition at 2700 meters (8800 feet) and are fully extended at 1000 meters (3400 feet). When the SRB impacts the water approximately 300 kilometers (160 nautical miles) downrange, the parachutes are jettisoned and the tow pendant deployed. The recovery ship deploys a nozzle plug which is inserted in the SRB to facilitate inflation and dewatering so that the booster will float on the surface horizontally for towing to port for refurbishing and subsequent reuse.

## ORBITER MAIN PROPULSION

The Orbiter main propulsion engines burn for approximately 8 minutes. For the first 2 minutes, the engines of the main propulsion system burn in parallel with the SRB motors. These two systems provide the velocity increment necessary to almost achieve the initial mission orbit. The final boost into the desired orbit is provided by the orbital maneuvering system.



Each of the three main engines is approximately 4.3 meters (14 feet) long with a nozzle almost 2.4 meters (8 feet) in diameter, and each produces a nominal sea-level thrust of

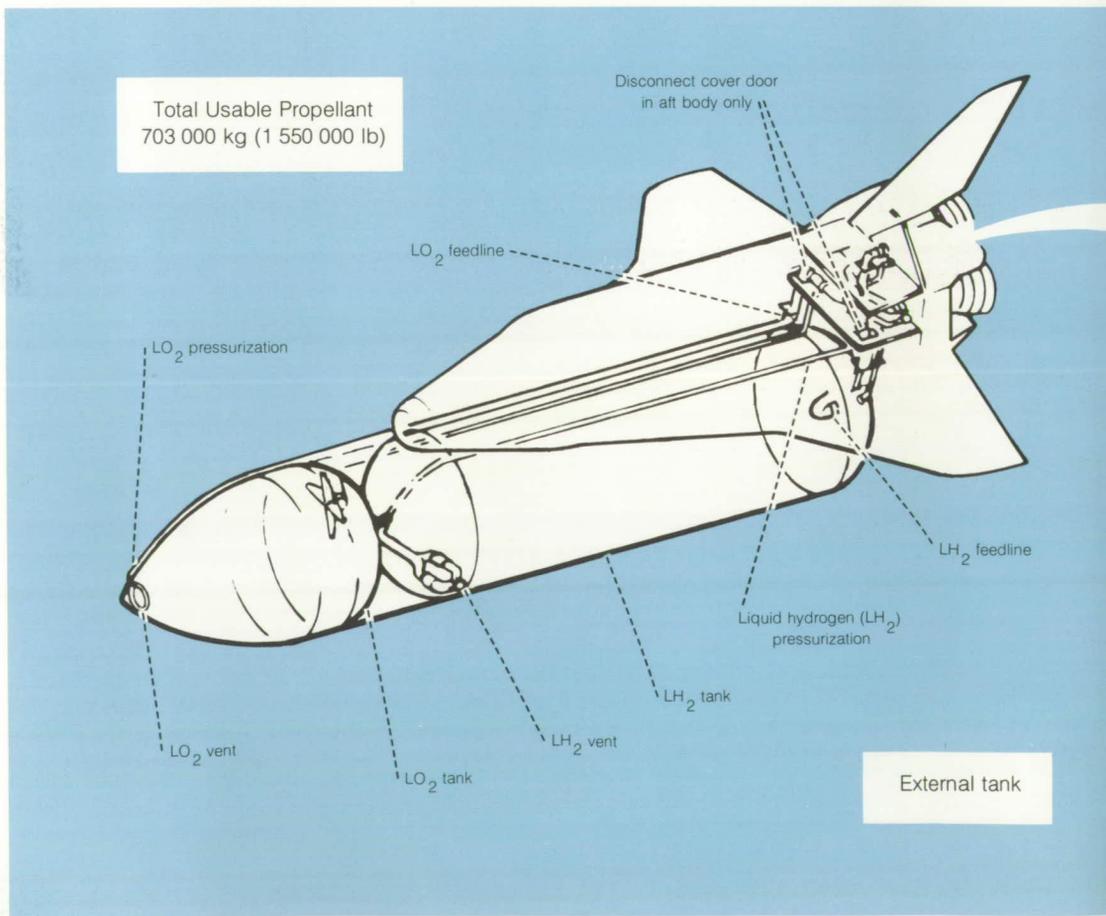


1 668 100 newtons (375 000 pounds) and a vacuum thrust of 2 100 000 newtons (470 000 pounds). The engines are throttleable over a thrust range of 50 to 109 percent of the nominal thrust level, so Shuttle acceleration can be limited to 3g. The engines are capable of being gimbaled for flight control during the Orbiter boost phase.

The 603 300 kilograms (1 134 000 pounds) of liquid oxygen and 99 800 kilograms (226 000 pounds) of liquid hydrogen used during ascent are stored in the external tank. The propellant is

expended before achieving orbit and the tank falls to the ocean after separating from the Orbiter. The fluid lines interface with the external tank through disconnects located at the bottom of the Orbiter aft fuselage. The hydrogen disconnects are mounted on a carrier plate on the left side of the Orbiter and the oxygen disconnects are mounted on the right side. These disconnect openings are covered by large doors immediately after tank separation from the Orbiter. Ground servicing is done through umbilicals on both sides of the aft fuselage.

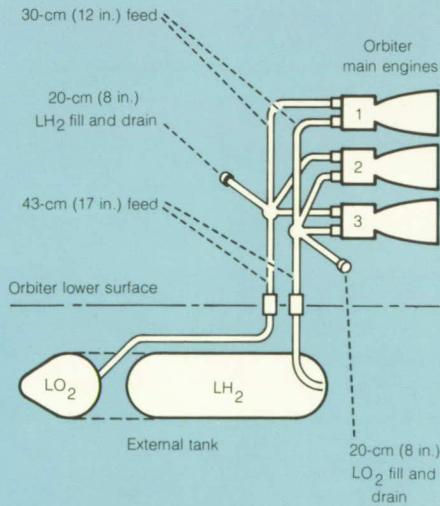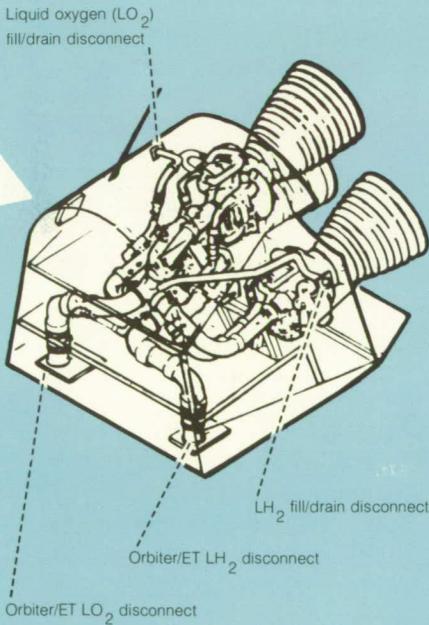


Three Main Engines  
2 100 000 N (470 000 lb) vacuum thrust each

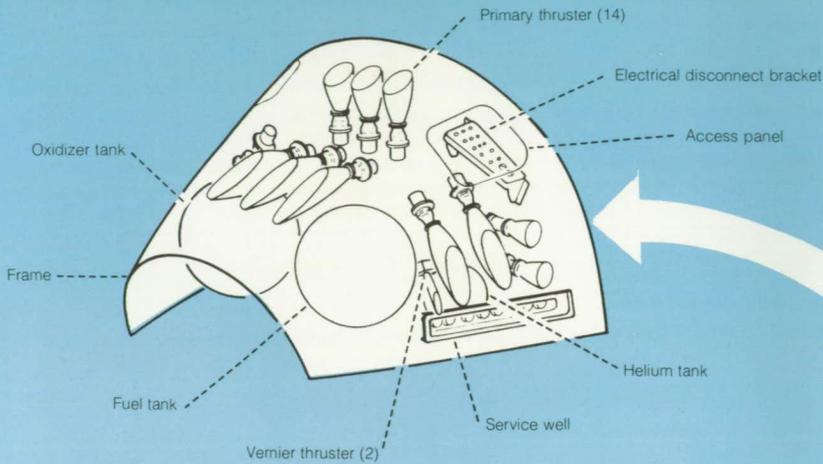


FORWARD RCS MODULE

1 forward RCS module, 2 aft RCS subsystems in pods  
 38 main thrusters (14 forward, 12 per aft pod)  
 Thrust level = 3870 N (870 lb) (vacuum)  
 Specific impulse = 289 sec  
 MIB = 70.28 N-sec (15.8 lbf-sec)  
 6 vernier thrusters (2 forward and 2 per aft pod)  
 Thrust level = 111 N (25 lb)  
 Specific impulse = 228 sec  
 MIB = 3.34 N-sec (0.75 lbf-sec)  
 Propellants:  $N_2O_4$  (oxidizer), MMH (fuel)  
 Usable propellant quantity: 2104 kg (4220 lb) aft  
 1011 kg (2225 lb) forward

(MIB = minimum impulse bit)

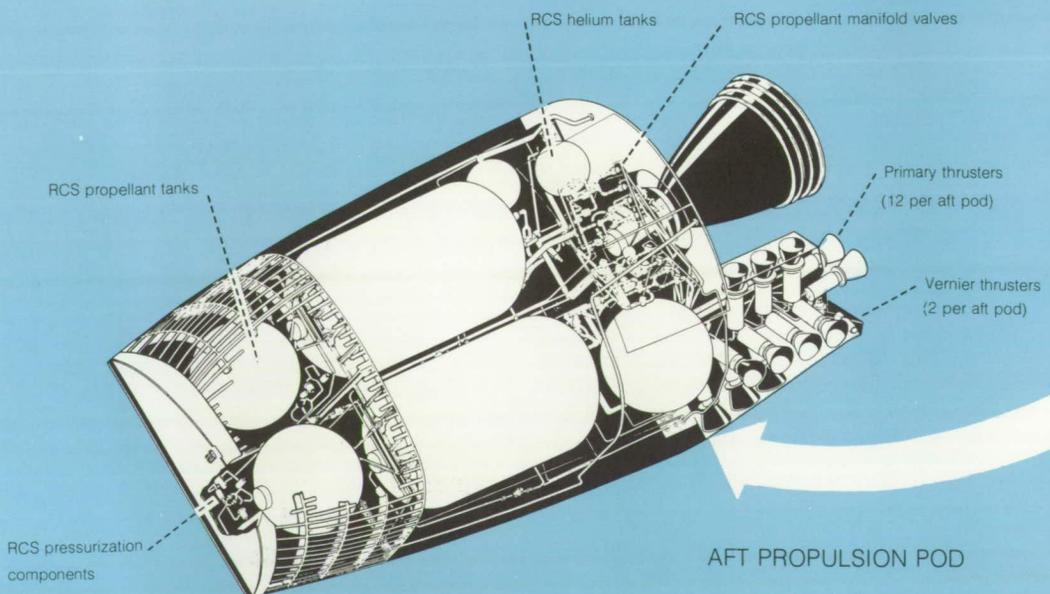

AFT PROPULSION POD

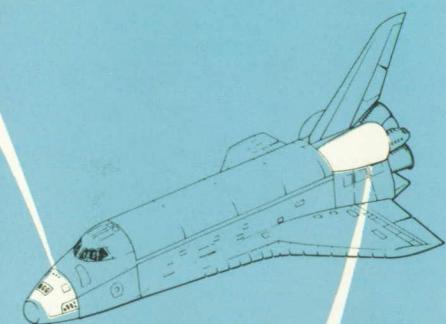

## ORBITER REACTION CONTROL SUBSYSTEM


The reaction control subsystem (RCS) has 38 bipropellant primary thrusters and 6 vernier thrusters to provide attitude control and three-axis translation during the orbit insertion, on-orbit, and reentry phases of flight. The RCS consists of three propulsion modules, one in the forward fuselage and one in each of the aft propulsion pods. All modules are used for external tank separation, orbit insertion, and orbital maneuvers. Only the aft RCS modules are used for reentry attitude control.

The RCS propellants are nitrogen tetroxide ( $N_2O_4$ ) as the oxidizer and monomethylhydrazine (MMH) as the fuel. The design mixture ratio of 1.6:1 (oxidizer weight to fuel weight) was set to permit the use of identical propellant tanks for both fuel and oxidizer. The capacity of each propellant tank in each module is 675 kilograms (1488 pounds) of  $N_2O_4$  and 422 kilograms (930 pounds) of MMH. The usable propellant quantity for each location is 622 kilograms (1369 pounds) of  $N_2O_4$  and 389 kilograms (856 pounds) of MMH in the nose section module and 1321 kilograms (2905 pounds)  $N_2O_4$  and 825 kilograms (1815 pounds) in both aft section modules.

## ORBITAL MANEUVERING SUBSYSTEM

After external tank separation, the orbital maneuvering subsystem (OMS) provides the thrust to perform orbit insertion, orbit circularization, orbit transfer, rendezvous, and deorbit. The integral OMS tankage is sized to provide propellant capacity for a change in velocity of 305 m/sec (1000 ft/sec) when the vehicle carries a payload of 29 500 kilograms (65 000 pounds). A portion of this velocity change capacity is used during ascent. The 10 852 kilograms (23 876 pounds) of maximum deliverable propellant is contained in two pods, one on each side of the aft fuselage. Each pod contains a high-pressure helium storage bottle; tank pressurization regulators (4) and controls; a fuel tank; an oxidizer tank; and a pressure-fed regeneratively cooled rocket engine. Each engine produces a vacuum thrust of 26 700 newtons (6000 pounds) at a chamber pressure of 861 850 N/m<sup>2</sup> (125 psia) and a specific impulse of 313 seconds.

The OMS and RCS propellant lines are interconnected (1) to supply propellant from the OMS tanks to the RCS thrusters on orbit and (2) to provide crossfeed between the left and right OMS and RCS systems. In addition, propellant lines from the auxiliary OMS tanks in the Orbiter cargo bay (if carried as a mission kit) interconnect with the OMS propellant lines in each pod.

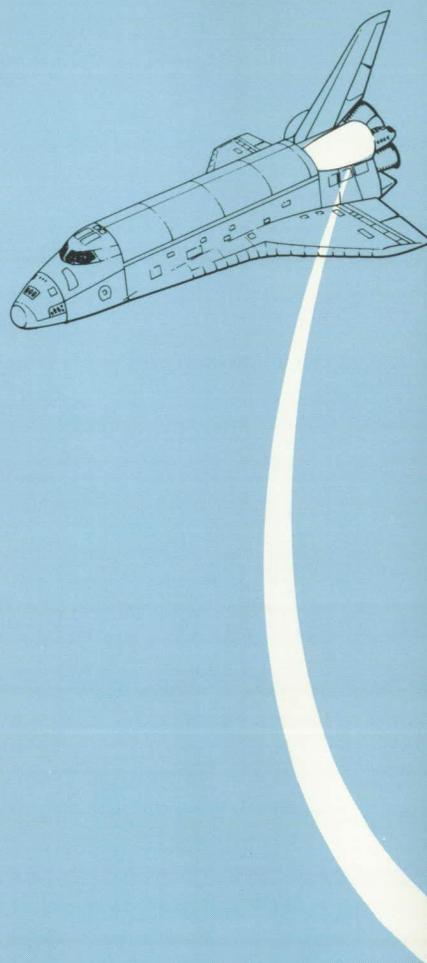


### OMS Engine Characteristics

Thrust: 26 700 N (6000 lb) vacuum  
Specific impulse: 313 sec  
Chamber pressure: 861 850 N/m<sup>2</sup> (125 psia)  
Mixture ratio: 1.65:1

Gimbal capability: {  $\pm 7^\circ$  pitch  
 $\pm 8^\circ$  yaw

OMS Tankage Capacity (total—2 pods)  
for 305 m/sec (1000 ft/sec) Velocity Change

Fuel (MMH) weight:	4300 kg (9475 lb)	} usable
Oxidizer (N <sub>2</sub> O <sub>4</sub> ) weight:	7100 kg (15 640 lb)	

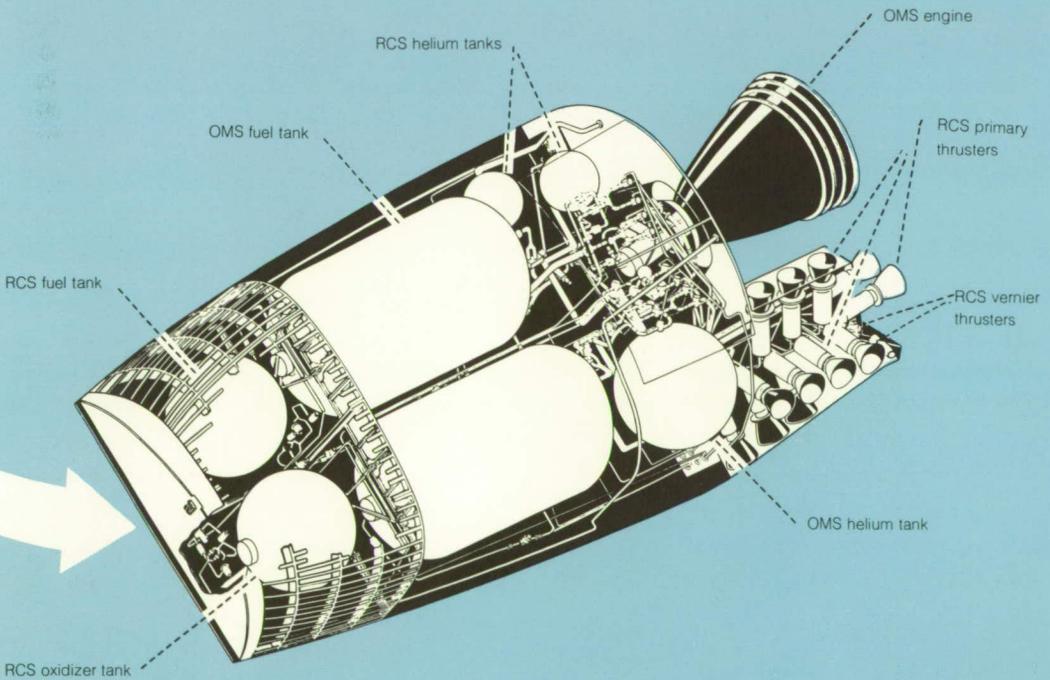

## ORBITER STRUCTURE SUBSYSTEM

The Orbiter structure is constructed primarily of aluminum protected by reusable surface insulation. The primary structural subassemblies are the crew module and forward fuselage, midfuselage and payload bay doors, aft fuselage and engine thrust structure, wing, and vertical tail.

The crew module is machined aluminum alloy plate with integral stiffening stringers. The module has a side hatch for normal ingress and egress, a hatch into the airlock from the crew living deck, and a hatch from the airlock into the payload bay. The forward fuselage structure is aluminum alloy skin/stringer panels, frames, and bulkheads. The window frames are machined parts attached to the structural panels and frames.


The midfuselage is the primary load-carrying structure between the forward and aft fuselage; it also includes the wing carrythrough structure and payload-bay doors. The frames are constructed as a combination of aluminum panels with riveted or machined integral stiffeners and a truss structure center section. The upper half of the midfuselage consists of structural payload bay doors, hinged along the side and split at the top centerline. The doors are made of graphite epoxy honeycomb material.


The main engine thrust loads to the midfuselage and external tank are carried by the aft fuselage structure. This structure is an aluminum integral machined panel and includes a truss-type internal titanium structure reinforced with boron epoxy. A honeycomb-base aluminum heat shield with insulation at the rear protects the main engine systems.

The wing is constructed with corrugated spar web, truss-type ribs, and riveted skin/stringer covers of aluminum alloy. The elevons are constructed of aluminum honeycomb.

The vertical tail is a two-spar, multirib, stiffened-skin box assembly of aluminum alloy. The tail is bolted to the aft fuselage at the two main spars. The rudder/speed brake assembly is divided into upper and lower sections.

- Conventional aluminum structure
- Maximum temperature 450 K (350° F)
- Protected by reusable surface insulation

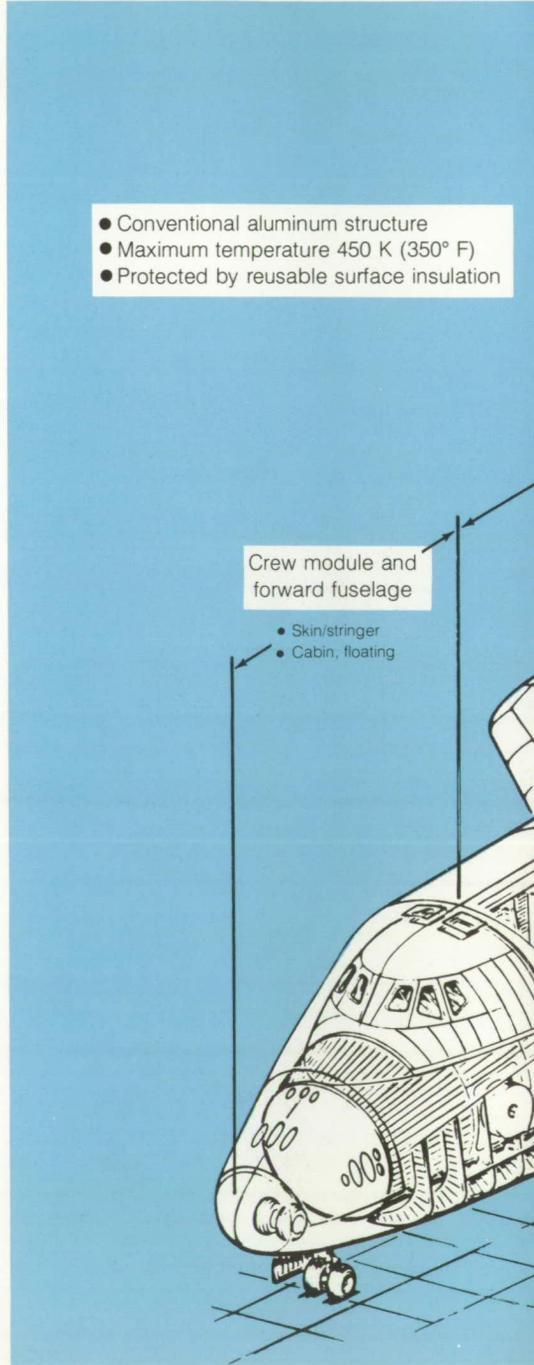

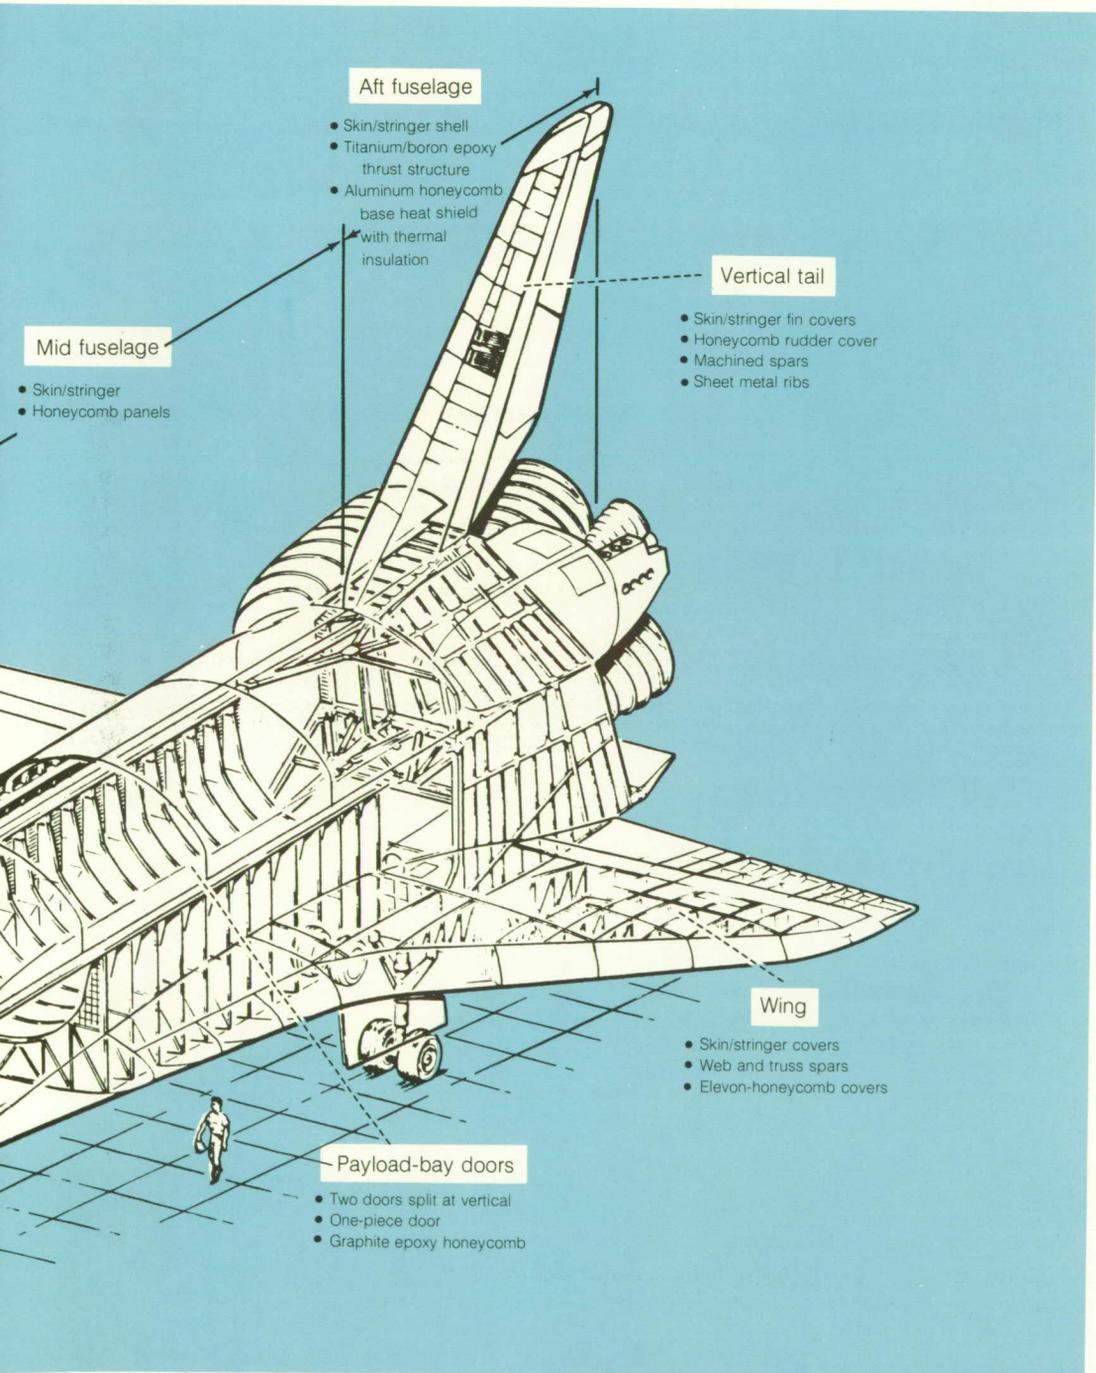

Aft fuselage

- Skin/stringer shell
- Titanium/boron epoxy thrust structure
- Aluminum honeycomb base heat shield with thermal insulation

Mid fuselage

- Skin/stringer
- Honeycomb panels

Vertical tail

- Skin/stringer fin covers
- Honeycomb rudder cover
- Machined spars
- Sheet metal ribs

Wing


- Skin/stringer covers
- Web and truss spars
- Elevon-honeycomb covers

Payload-bay doors

- Two doors split at vertical
- One-piece door
- Graphite epoxy honeycomb

# ORBITER

## THERMAL PROTECTION SYSTEM

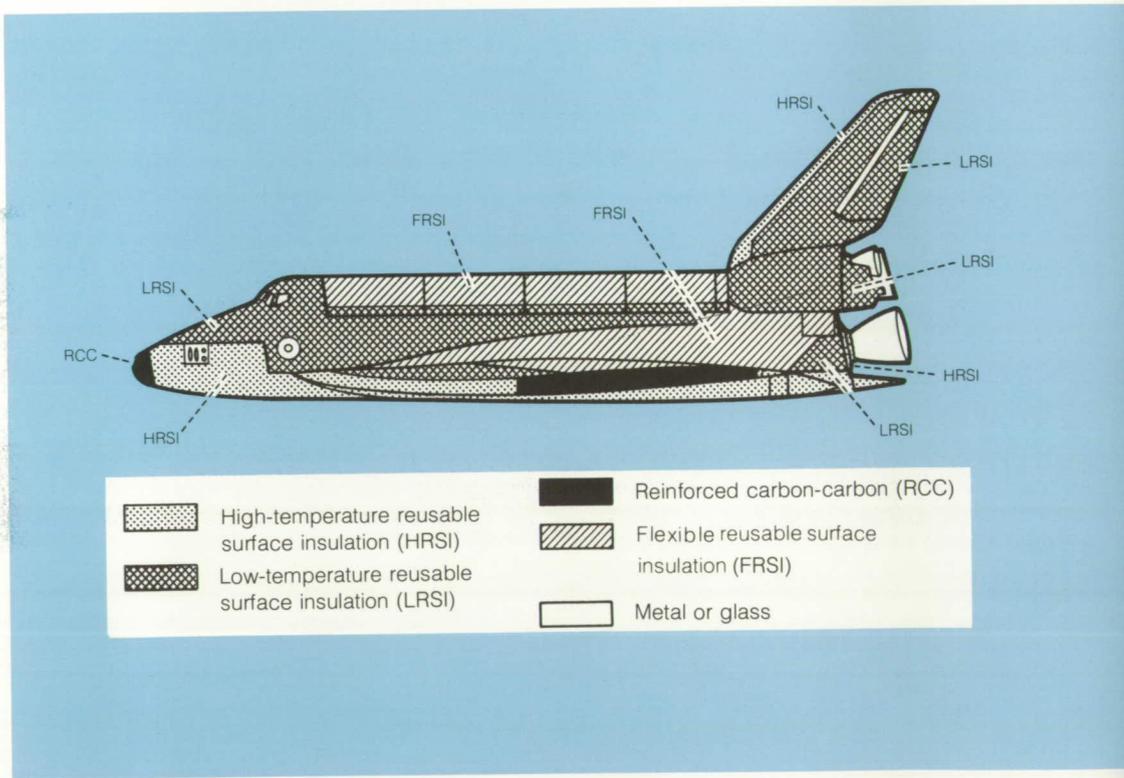


The thermal protection subsystem includes those materials which are installed on the outer surface of the vehicle to protect it from the high temperatures generated during launch and entry back into the atmosphere from orbit. The peak heating rates and the longest exposure to these rates occur during entry when equilibrium surface temperatures may range from 1925 K (3000° F) at stagnation points on the nose and leading edges of the wing and tail

down to about 590 K (600° F) on leeward surfaces. The TPS is composed of two types of reusable surface insulation (RSI) tiles, a high-temperature structure coupled with internal insulation, thermal window panes, coated Nomex felt, and thermal seals to protect against aerodynamic heating. The RSI tiles covering the Orbiter are made of coated silica fiber. The two types of RSI tiles differ only in surface coating to provide protec-

## ORBITER 102 CONFIGURATION

Insulation	Area, m <sup>2</sup> (ft <sup>2</sup> )	Weight, kg (lb)
FRSI	304.2 (3 275)	357 (788)
LRSI	281.7 (3 032)	845 (1 862)
HRSI	475.4 (5 117)	3812 (8 403)
RCC	37.9 (409)	1371 (3 023)
Misc <sup>a</sup>	—	643 (1 418)
<b>Total</b>	<b>1099.2 (11 833)</b>	<b>7028 (15 494)</b>

<sup>a</sup>Includes bulk insulation, thermal barriers, and closeouts

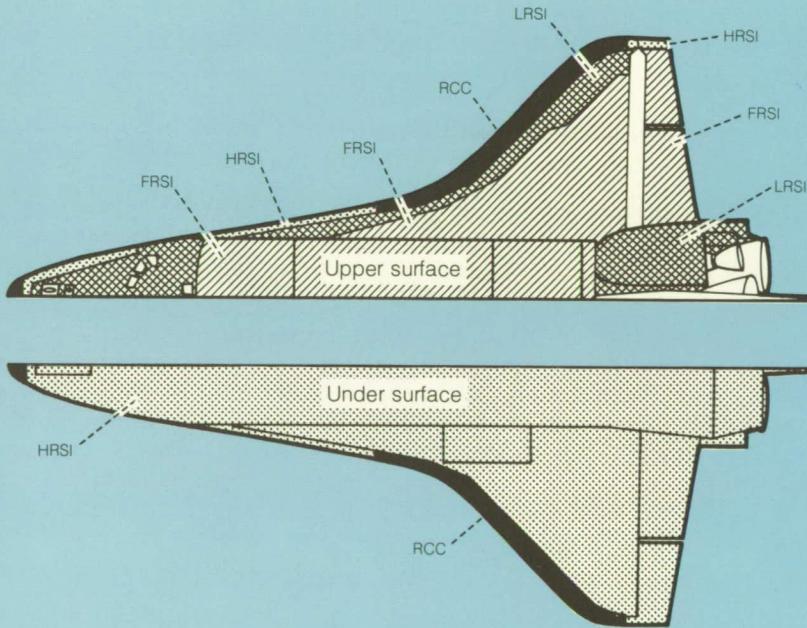

tion for different temperature regimes. The low-temperature reusable surface insulation (LRSI) consists of 20-centimeter (8-inch) square silica tiles and covers the top of the vehicle where temperatures are less than 925 K (1200° F). The high-temperature reusable surface insulation (HRSI) is 15-centimeter (6-inch) square silica tiles and covers the bottom and some leading edges of the Orbiter where temperatures are below 1500 K (2300° F). A high-tempera-

ture structure of reinforced carbon-carbon (RCC) is used with internal insulation for the nose cap and wing leading edges where temperatures are greater than 1500 K (2300° F). Flexible reusable surface insulation (FRSI) consisting of coated Nomex felt is used on the upper cargo-bay door, lower aft fuselage sides, and upper aft wing where temperatures are less than 645 K (700° F).


## PAYLOAD ACCOMMODATIONS

The Orbiter systems are being designed to handle various payloads and to support a variety of payload functions. The payload and mission stations on the flight deck provide command and control facilities for payload operations required by the cognizant scientist (the user). Remote-control techniques can be employed from the ground when desirable. The Spacelab payload provides additional command and data management capability plus a work area in the payload bay for the payload specialists. The crew will be able to go into the space environment for Orbiter or payload

servicing, deployment, repair, retrieval or inspection tasks, or the crew can use a manipulator to handle complete payloads or selected packages.

The manipulator arm, complemented by the television display system, allows the payload operator to transfer experiment packages and cargo in and out of the Orbiter bay, to place into orbit spacecraft carried up by the Shuttle, and to inspect retrieved orbital spacecraft. The system can also aid in inspection of critical areas on the vehicle exterior, such as the heat shield.

## PAYLOAD/ORBITER INTERFACES

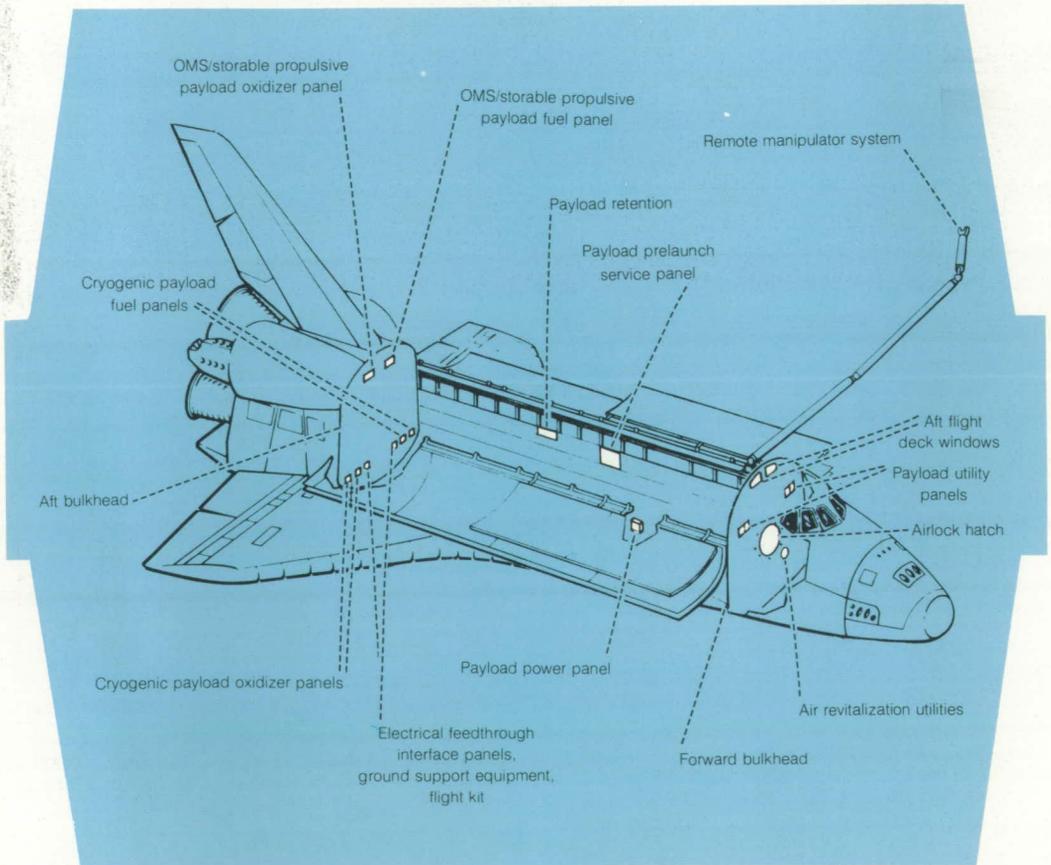


## SUPPORTING SUBSYSTEMS FOR PAYLOADS

- Payload attachments
- Remote manipulator handling system
- Electrical power/fluid/gas utilities
- Environmental control
- Communications, data handling, and displays
- Guidance and navigation
- Mission kits
- Extravehicular capability




## PAYLOAD DEPLOYMENT/RETRIEVAL MECHANISM

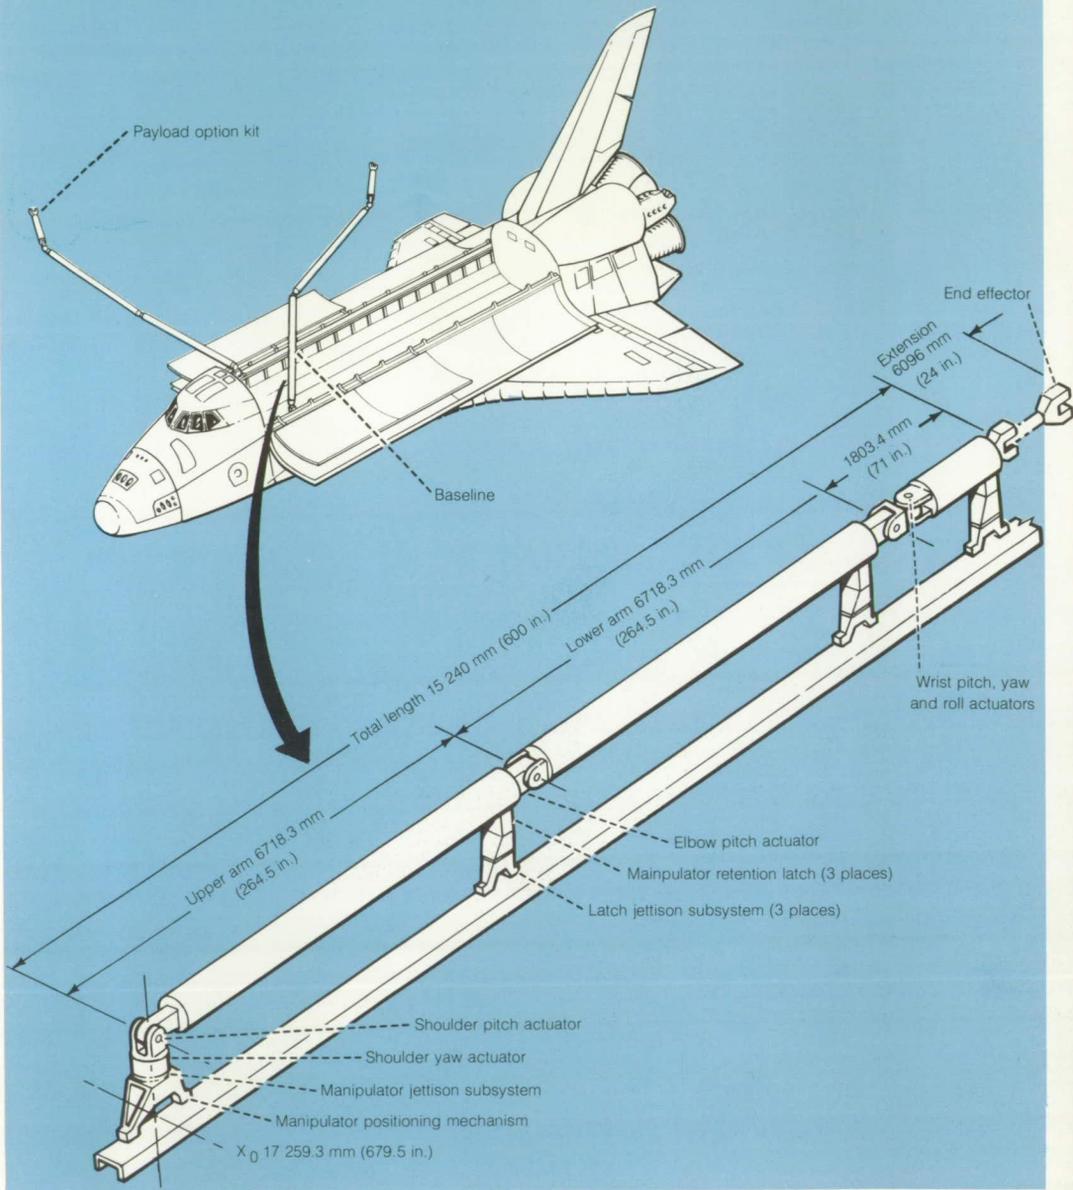

## PAYLOAD HANDLING—INTERNATIONAL COOPERATION

The deployment and retrieval of payloads are accomplished by using the general purpose remote manipulator system. Payload retrieval involves the combined operations of rendezvous, stationkeeping, and manipulator arm control. One manipulator arm is standard equipment on the Orbiter and may be mounted


on either the left or right longeron. A second arm can be installed and controlled separately for payloads requiring handling with two manipulators. Each arm has remotely controlled television and lights to provide side viewing and depth perception. Lights on booms and side walls provide appropriate illumination levels for

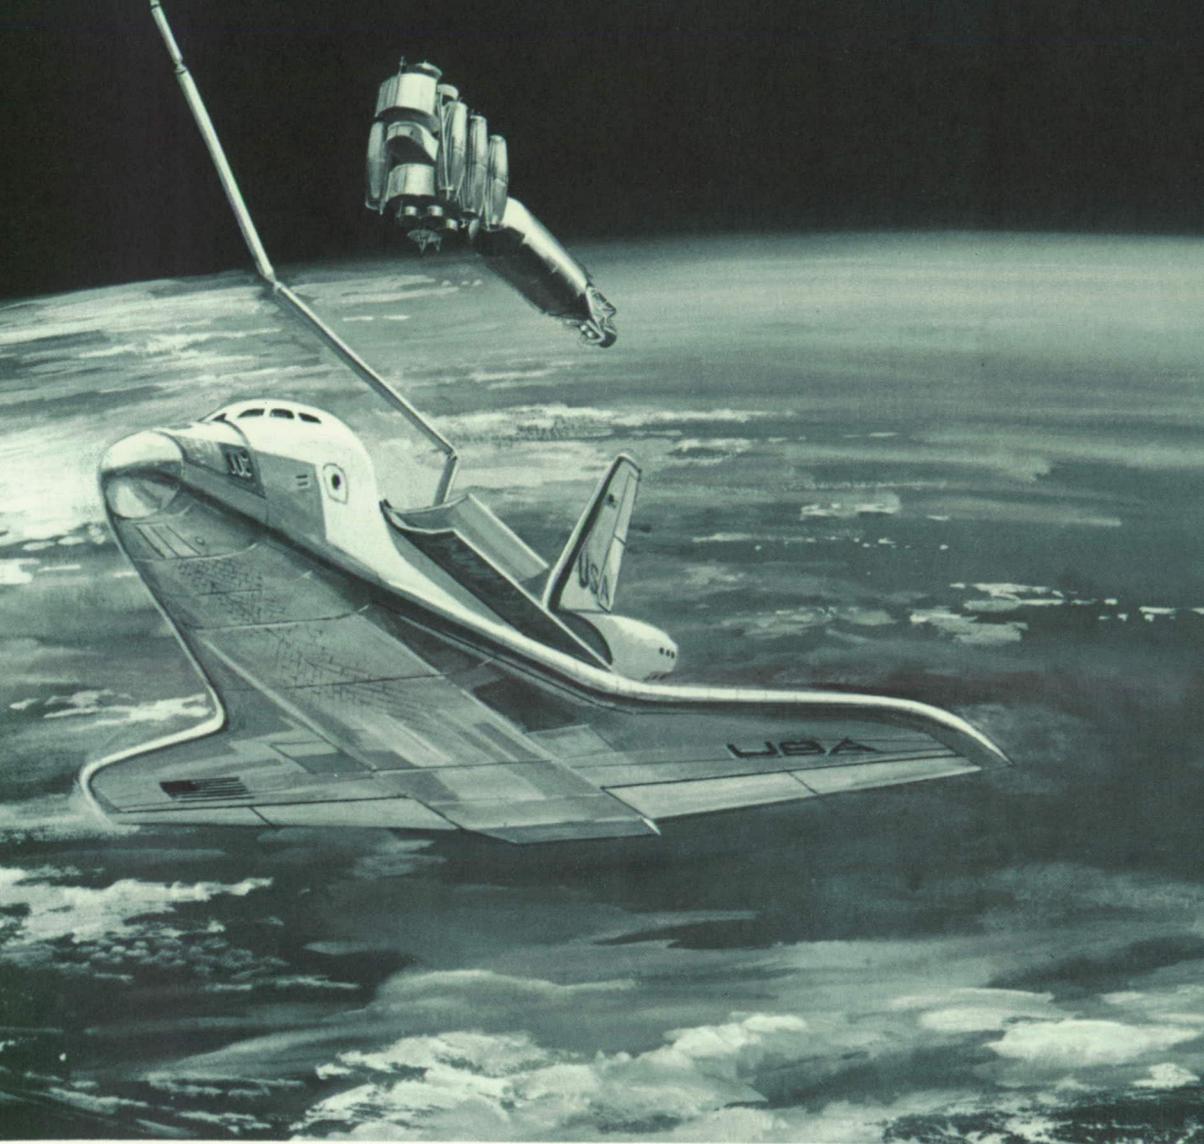


any task that must be performed in the payload bay.

The remote manipulator system is being funded, designed, developed, and manufactured by a Canadian industrial team under the overall direction of the National Research Council of Canada.

## CREW CABIN AND CREW ACCOMMODATIONS

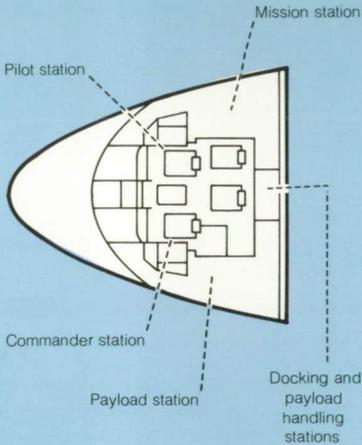

FLIGHT SECTION

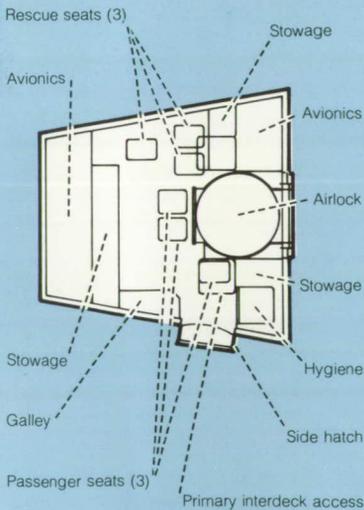

MIDSECTION


The Orbiter cabin is designed as a combination working and living area. The pressurized crew compartment has a large volume, 71.5 m<sup>3</sup> (2525 ft<sup>3</sup>), and contains three levels. The upper section, or flight deck, contains the displays and controls used to pilot, monitor, and control the Orbiter, the integrated Shuttle vehicle, and the mission payloads. Seating for as many as four crewmembers can be provided. The midsection contains passenger seating, the living area, an airlock, and avionics equipment compartments. An aft hatch in the airlock provides access to the cargo bay. The lower section contains the environmental control equipment and is readily accessible from above through removable floor panels.

Flight deck displays and controls are organized into four functional areas: (1) two forward-facing primary flight stations for vehicle operations, (2) two aft-facing stations, one for payload handling and the other for docking, (3) a payload station for management and checkout of active payloads, and (4) a mission station for Orbiter subsystem/payload interface, power, and communications control in the remaining flight deck area.

The forward-facing primary flight stations are organized in the usual pilot-copilot relationship, with duplicated controls that permit the vehicle to be piloted from either seat or returned to Earth by one crewmember in an emergency. Manual flight controls include rotation and translation hand controllers, rudder pedals, and speed brake controllers at each station.

The payload handling station, the aft-facing station nearest to the payload station, contains those displays and controls required to manipulate, deploy, release, and capture payloads. The person at this station can open and close payload bay doors; deploy the coolant system radiators; deploy, operate, and stow the manipulator arms; and operate the lights and television cameras mounted in the payload bay. Two closed-circuit television monitors display video from the payload bay television cameras for monitoring payload manipulation.

The rendezvous and docking station, the aft-facing station nearest to the mission station, contains the displays and controls required to execute Orbiter attitude/translation maneuvers for terminal-phase rendezvous and docking. Located at this station are rendezvous radar controls and displays (including a crosspointer for displaying pitch and roll angles and

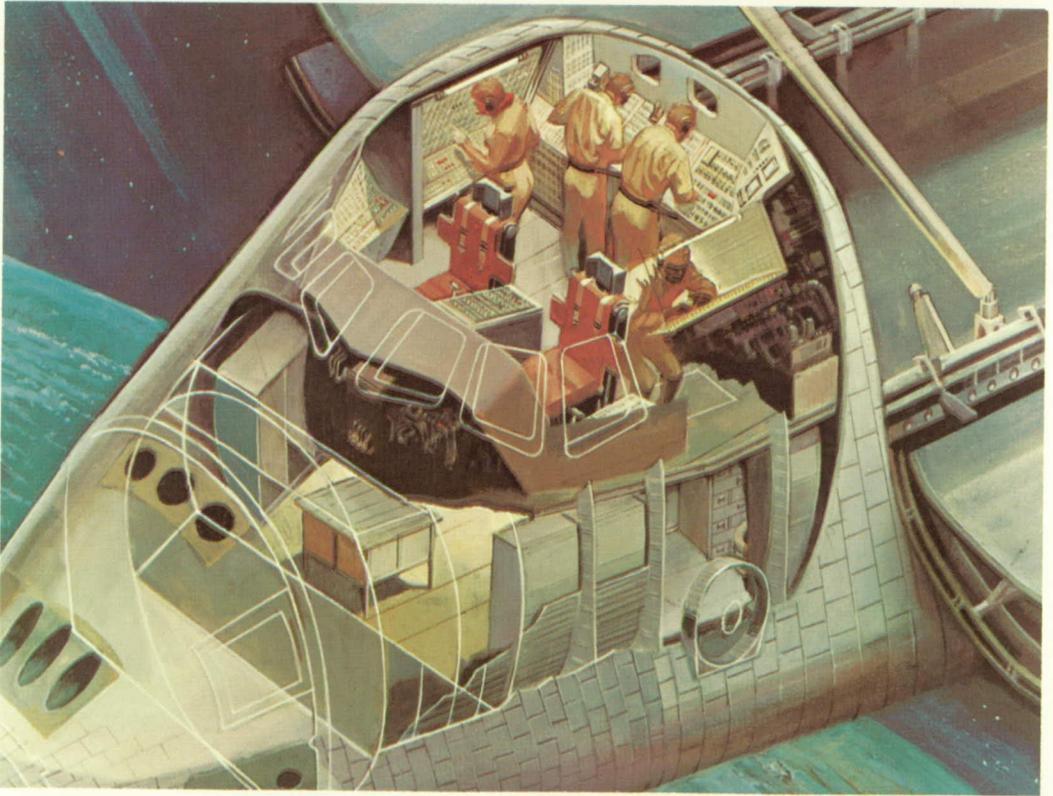

rates), rotation and translation hand controllers, flight control mode switches, and an attitude direction indicator.

The payload station, just aft and to the left of the commander's station, includes a 2-square-meter (21.5 square foot) surface area for installing displays and controls unique to a specific payload. A cathode ray tube (CRT) display and keyboard may be added for communication with payloads through the Orbiter data processing subsystem. Standardized electrical interfaces are provided for payload power, monitoring, command, and control. Forced-air cooling can be provided for equipment requiring heat removal.


The mission station, just aft and to the right of the pilot's station, contains the displays and controls required to manage Orbiter/payload interfaces and payload subsystems that are critical to the safety of the Orbiter. An auxiliary caution and warning display can be provided at this station to detect and alert the crew to critical malfunctions in the payload systems. This station is equipped to monitor, command, control, and communicate with attached or detached payloads. It also provides for the management of on-orbit housekeeping functions and of Orbiter subsystem functions that are not



flight critical and that do not require immediate access.

A total volume of approximately 4.2 cubic meters (150 cubic feet) will be provided in the crew compartment for Orbiter and payload loose equipment stowage, of which approximately 95 percent will be on the mid deck. Loose equipment includes those items which are not permanently mounted in the cabin. The allocation of containers to payload unique loose equipment is mission dependent. Any excess stowage capacity available above the Orbiter requirements may be utilized for stowage of payload loose equipment.

The standard containers provided for the loose equipment will be attached to the Orbiter structure in the mid-deck stowage areas. The Orbiter supporting structure to which the containers are attached has an average rated capacity of 320 kilograms per cubic meter (20 pounds per cubic foot) with a rating of 480 kilograms per cubic meter (30 pounds per cubic foot) for each attach point.

The size of packages and equipment which can be moved through the side hatch into the central mid-deck area is limited by placement of mid-deck structures as well as the opening size of the side hatch.

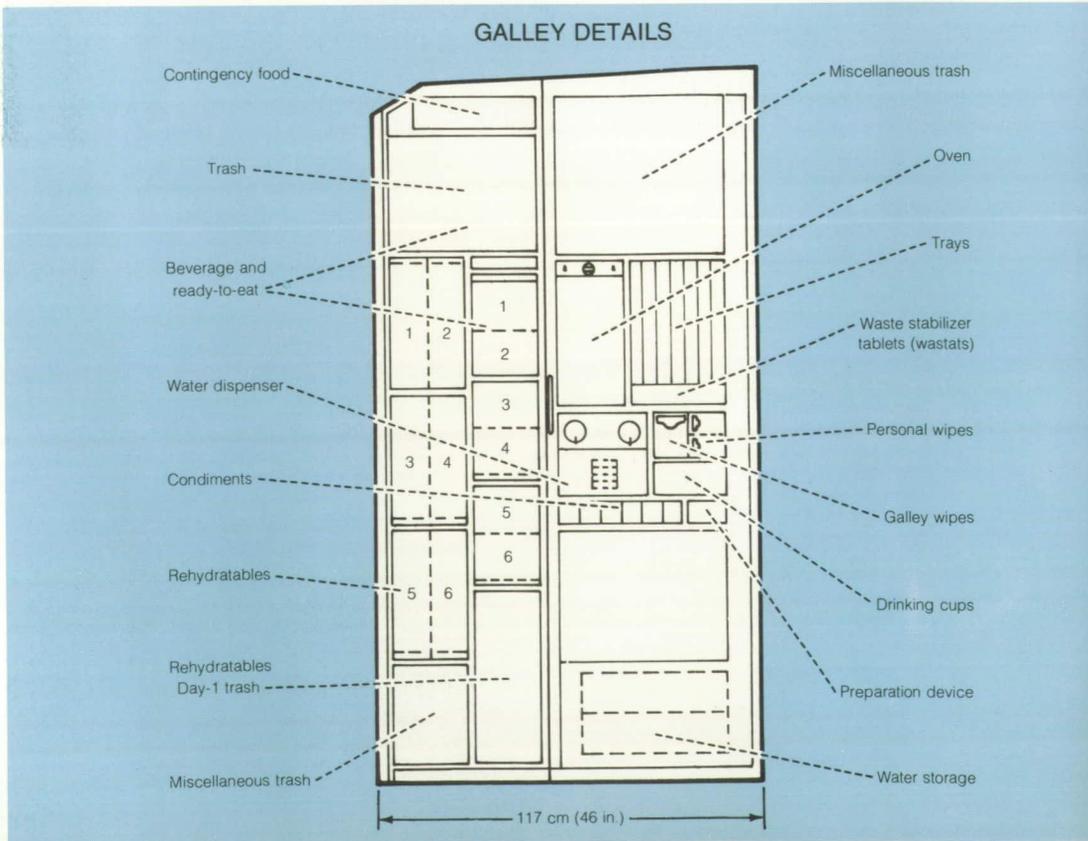

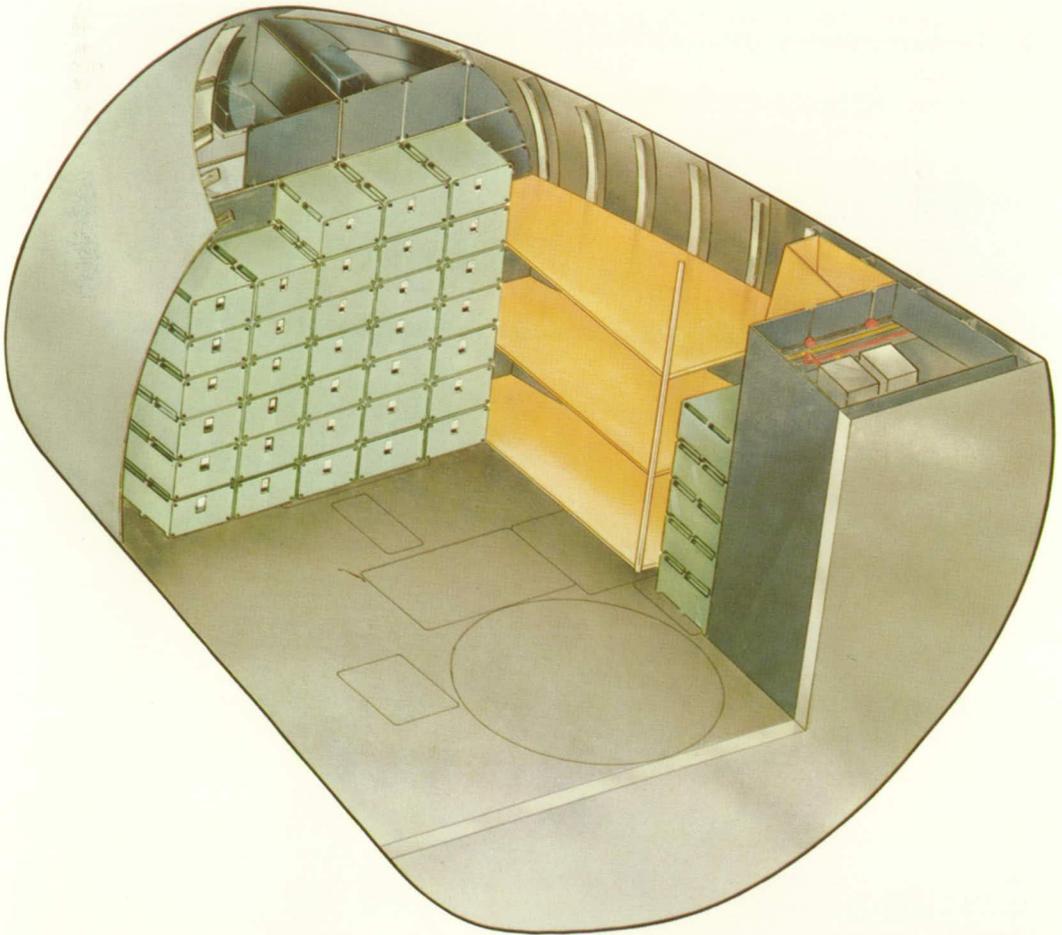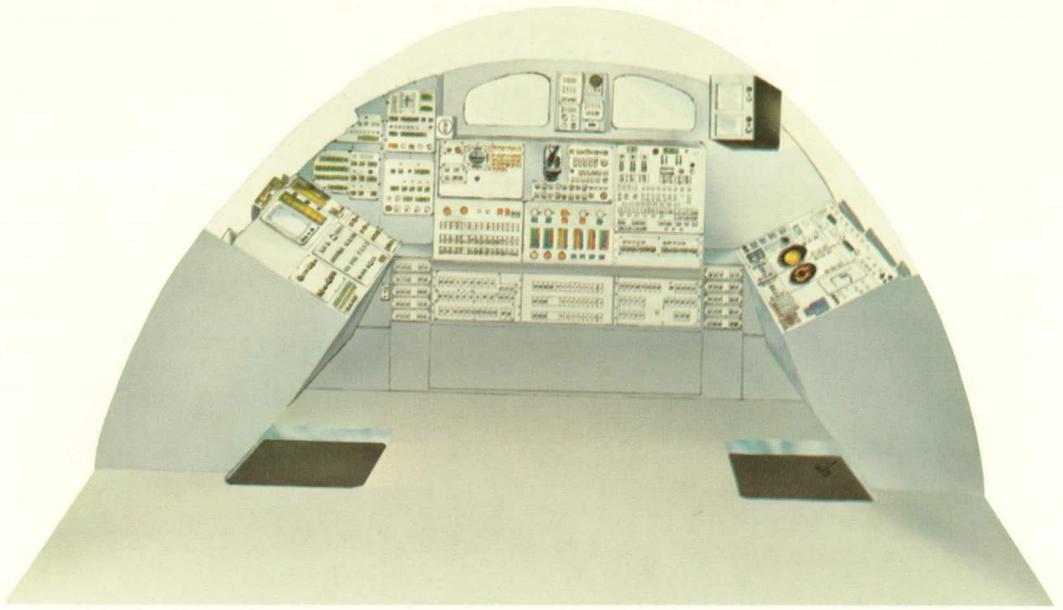

## EXTRAVEHICULAR ACTIVITIES


A versatile extravehicular capability is provided by an airlock, two extravehicular mobility units (spacesuits), and mobility aids, such as handrails. A variety of tasks can be performed during extravehicular activity (EVA) to support either the Orbiter or its payloads. Typical tasks are as follows.

- Inspection, photography, and possible manual override of vehicle and payload systems, mechanisms, and components
- Installation, removal, and transfer of film cassettes, material samples, protective covers, and instrumentation

- Operation of equipment, including assembly tools, cameras, and cleaning devices
- Connection, disconnection, and storage of fluid and electrical umbilicals
- Repair, replacement, calibration, repositioning, and inspection of modular equipment, antennas, and instrumentation on the spacecraft or payload

The airlock can be located in several places: inside the Orbiter middle deck on the aft bulkhead, outside the cabin on the aft bulkhead, or on top of a tunnel adapter which

### POSSIBLE AIRLOCK ARRANGEMENTS

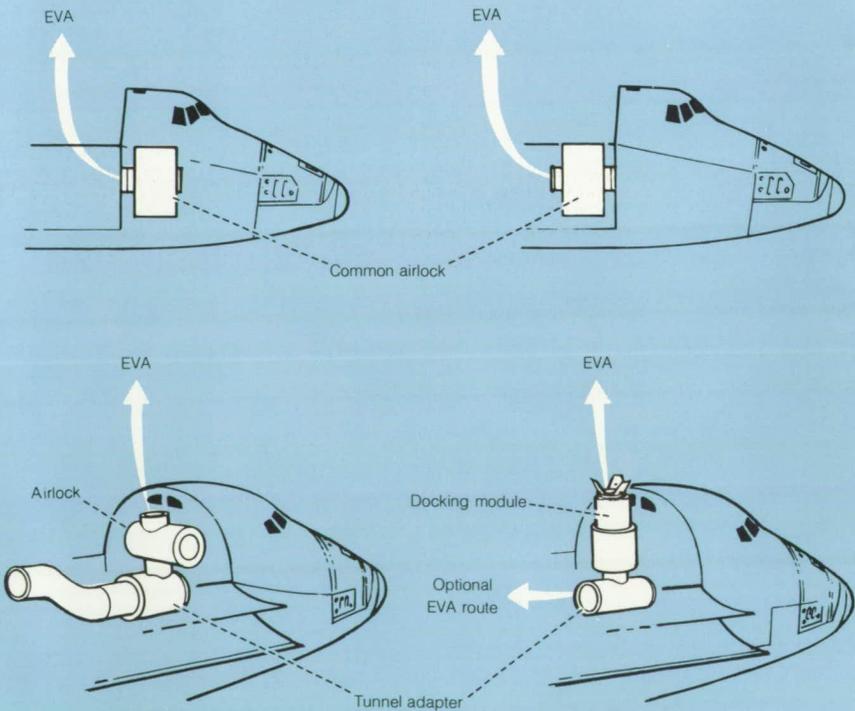


connects the Spacelab pressurized module with the Orbiter cabin. When docking is planned, the docking module serves as the EVA airlock.


The airlock hatches are located to allow passage straight through to facilitate transfer of equipment. The hatches are D-shaped. The flat side of the D makes the minimum clearance 91 centimeters (36 inches). The inside diameter of the airlock is 160 centimeters (63 inches) and it is 211 centimeters (83 inches) long. This volume allows two EVA crewmen to transport a package 45 by 45 by 127 centimeters (18 by 18 by 50 inches) through the airlock.

Life support expendables are carried for two 6-hour payload EVA's and one contingency or emergency EVA.

Restraints for planned EVA will normally consist of the Skylab foot restraint. Unplanned EVA in support of a payload may often be accomplished with no impact to a payload, because attachment to available structures will often provide sufficient restraint. Translation aids are provided for moving about in the payload bay. Handrails extend from the airlock hatch, down the hinge line of the door, and into the payload bay, are located at intermediate points if required, and at the aft bulkhead.

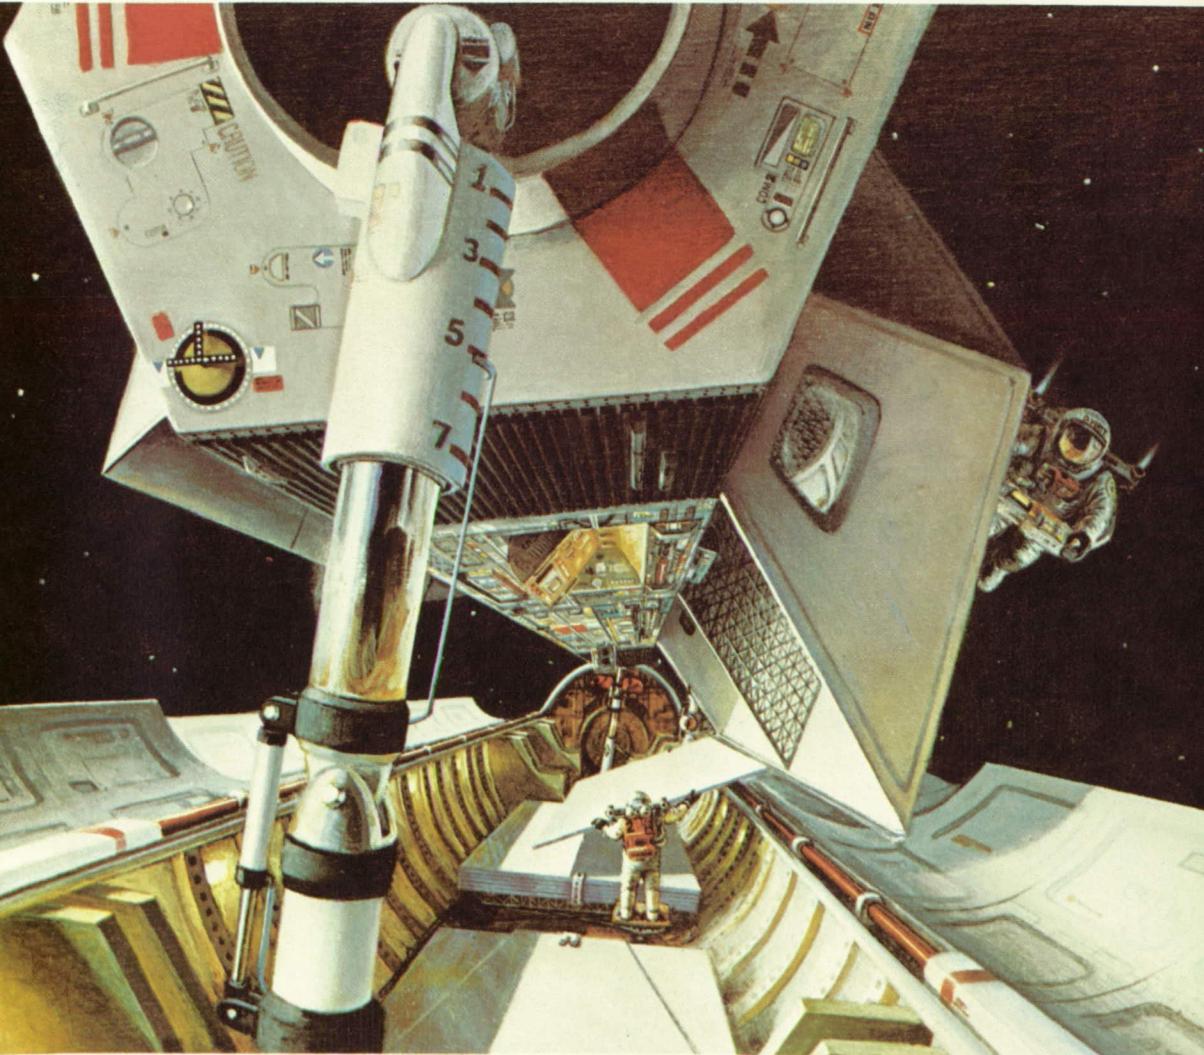


## MIDFUSELAGE STRUCTURE

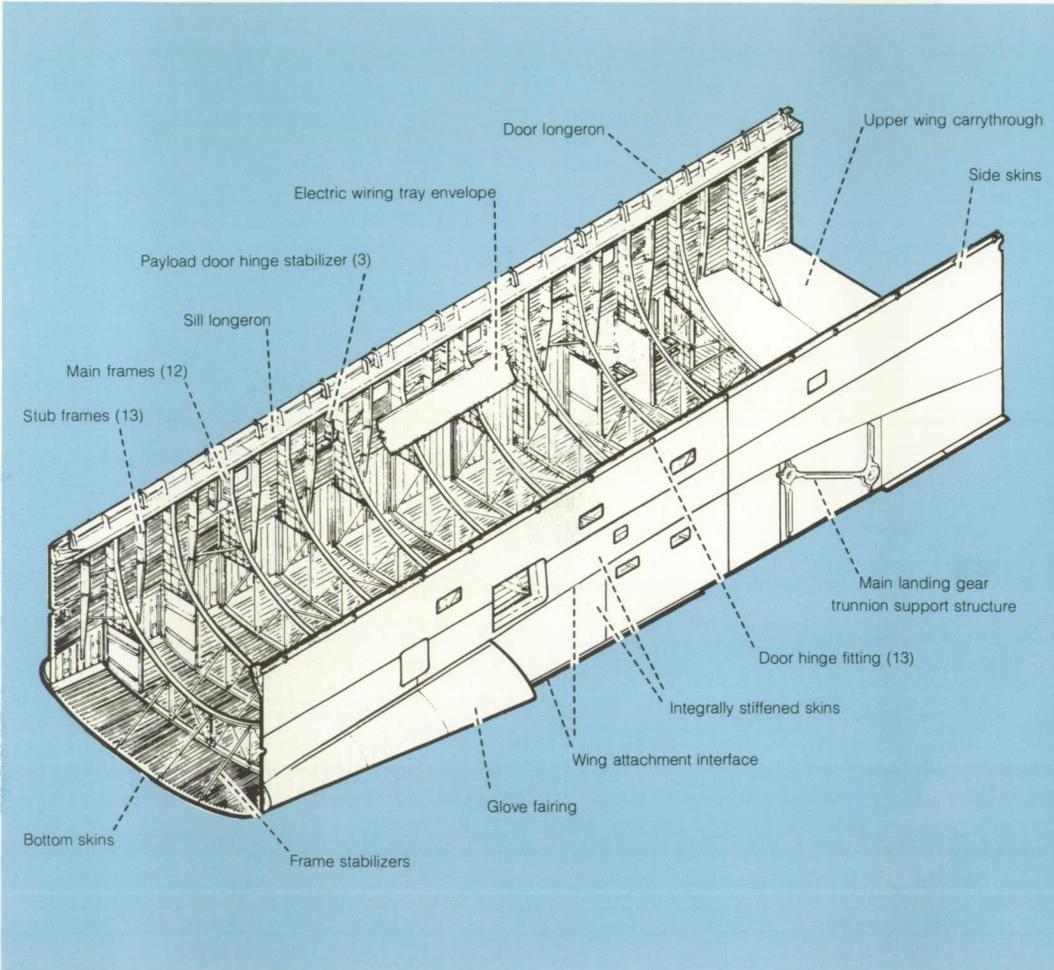

## PAYLOAD ATTACHMENTS

Numerous attachment points along the sides and bottom of the 18-meter (60 foot) payload bay provide places for the many payloads to be accommodated. All primary attachment points along the sides accept longitudinal and vertical loads. All positions along the keel take lateral loads. The proposed design of the standard attachment fitting includes adjustment capability to adapt to specific payload weight distributions in the bay.

# PAYLOAD BAY UTILIZATION

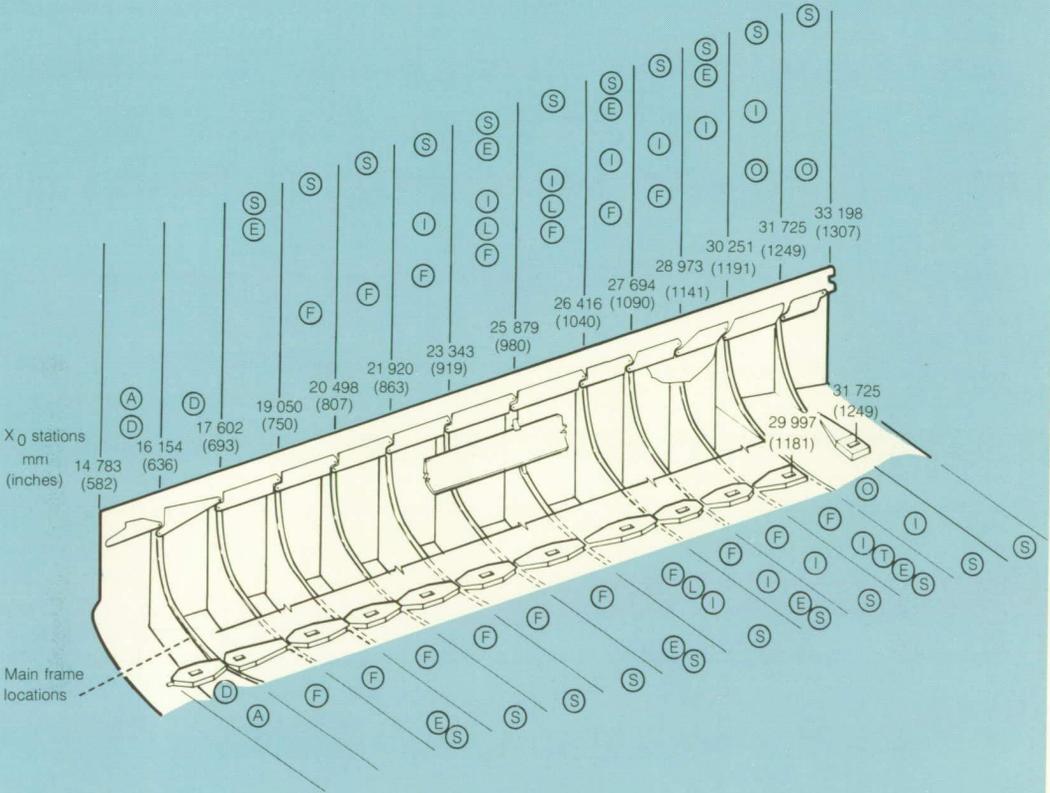

- (A) Airlock module
- (S) Spacelab
- (E) Earth observations satellite
- (I) Interim upper stage
- (L) Space telescope
- (F) Long-duration exposure facility
- (O) Orbital maneuvering system kit
- (D) Docking module

## POWER SYSTEMS

The Orbiter has one system to supply electrical power and another system to supply hydraulic power. Electrical power is generated by three fuel cells that use cryogenically stored hydrogen and oxygen reactants. Each fuel cell is connected to one of three independent electrical buses. During peak and average power loads, all three fuel cells and buses are used; during minimum power loads, only two fuel cells are used but they are interconnected to the three buses. The third fuel cell is placed on standby, but can be reconnected instantly to support higher loads. Alternately, the third fuel cell is shut down under the condition of a 278 K (40° F) minimum temperature environment and can be reconnected within 15 minutes to support higher loads. Excess heat from the fuel cells is transferred to the Freon cooling loop through heat exchangers. Hydraulic power is derived from three independent hydraulic pumps, each driven by its own hydrazine-fueled auxiliary power unit (APU) and cooled by its own water boiler. The three independent hydraulic fluid systems provide the power to actuate the elevons, rudder/speed brakes, body flap, main engine gimbal and control systems, landing gear brakes, and steering. While on orbit, the hydraulic fluid is kept warm by heat from the Freon loop.

The electrical power requirements of a payload will vary throughout a mission. During the 10-minute launch-to-orbit phase and the 30-minute deorbit-to-landing phase when most of the experiment hardware is in a standby mode or completely turned off, 1000 watts average to 1500 watts peak are available from the Orbiter. During payload equipment operation on orbit, the capability exists to provide as much as 7000 watts maximum average to 12 000 watts peak for major energy-consuming payloads. For the 7-day-mission payload, 50 kilowatt-hours of electrical energy are available. Mission kits containing consumables for 840 kilowatt-hours each are available in quantities required according to the flight plan.

The operational use of fuel cells for manned space flight evolved during the Gemini and Apollo Programs. The Space Shuttle fuel cells will be serviced between flights and reflown until each one has accumulated 5000 hours of online service.

### ORBITER ELECTRICAL POWER SUBSYSTEM

#### Payload support

Fuel cell power plant (FCP)—3

- 2-kW min; 7-kW continuous
- 12-kW peak/FCP, 15-min duration once every 3 hr

#### FCP subsystem

- 14-kW continuous/24-kW peak
- 27.5 to 32.5 V dc


#### Reactant storage

- 1530-kWh mission energy
- 264-kWh abort/survival energy

- 42 kg (92 lb) hydrogen/tank
  - 354 kg (781 lb) oxygen/tank
- } total loaded quantity

#### Also included

- 51 kg (112 lb) oxygen for environmental control and life support system

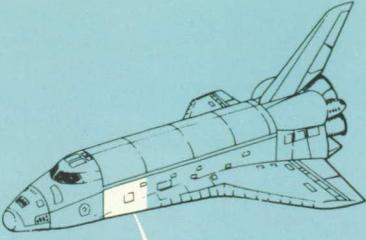

Product water  
valve module

Fuel cell power/environmental  
control and life support  
system heat exchanger

Prelaunch umbilical  
(disconnected at T-4 hours)

Water vent



Oxygen dewars  
Hydrogen dewars

Main bus distribution assemblies,  
typical (3 places)

Fuel cell power plants (3)

Coolant loop service panel

# AUXILIARY POWER UNIT SUBSYSTEM

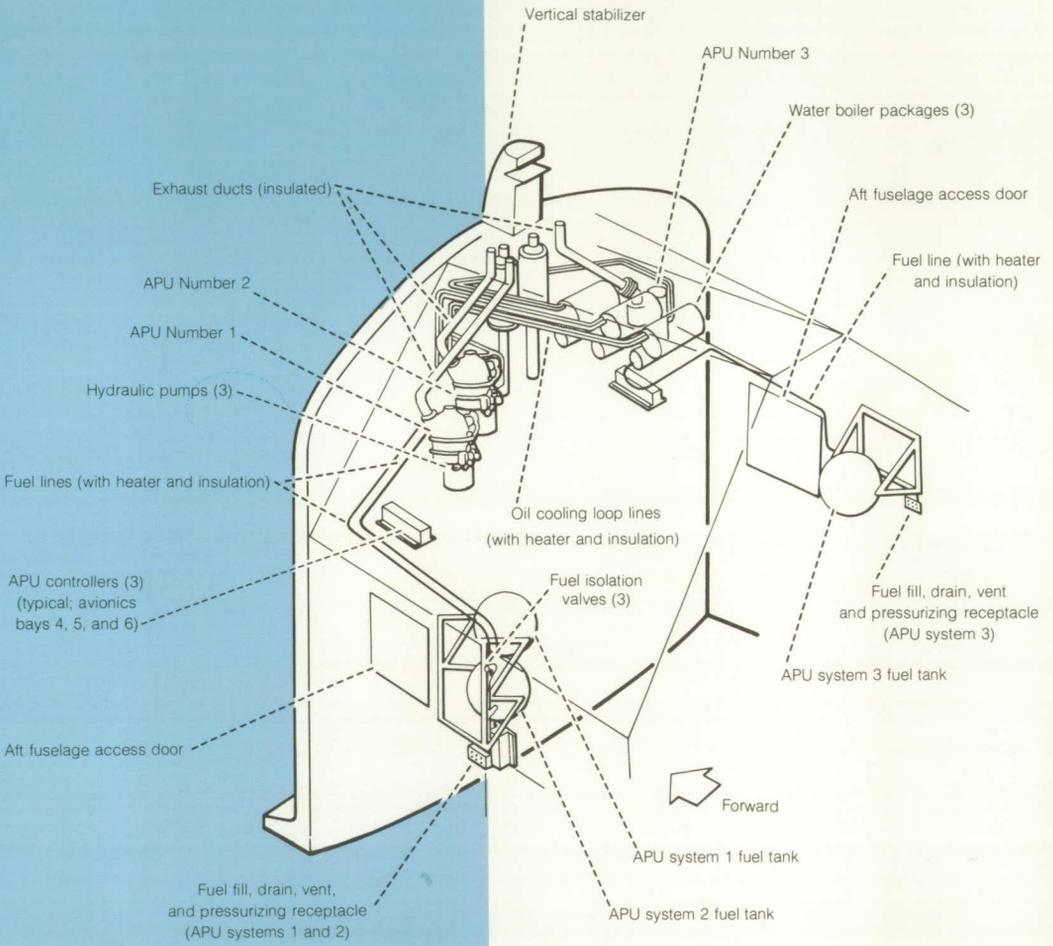

- APU (three independent systems)
  - 100 kW (135 hp)/APU
  - Monopropellant: hydrazine (N<sub>2</sub>H<sub>4</sub>)
  
- Hydraulic pump
  - 0.24 m<sup>3</sup>/min (63 gal/min)
  - 20 700 kN/m<sup>2</sup> (3000 psi)

## ORBITER PROPULSION AND POWER SUBSYSTEM

### Auxiliary Power for Hydraulic System


- Three hydrazine APU's (100 kW (135 hp) each)  
20 700-kN/m<sup>2</sup> (3000 psi) hydraulic pumps

### Orbital Maneuvering System

- Two engines (26 700 N (6000 lb) vacuum thrust each)  
N<sub>2</sub> O<sub>4</sub>/MMH propellant 10 830 kg (23 900 lb) capacity

### Electrical Power

- Three 7-kW fuel cells (hydrogen, oxygen)  
1530 kWh energy  
27.5 to 32.5 V dc

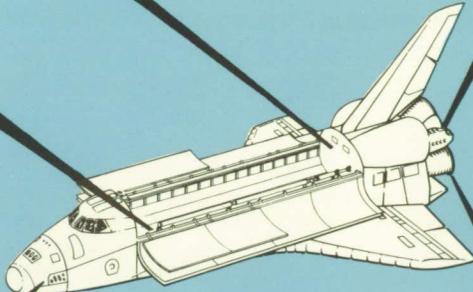

### Reaction Control System

- One forward module and two aft modules  
38 thrusters (3870 N (870 lb) vacuum)  
and 6 verniers (111 N (25 lb))  
total N<sub>2</sub> O<sub>4</sub>/MMH propellant  
2970 kg (6550 lb)

### Main Propulsion

- Three engines (2 100 000 N (470 000 lb)  
vacuum thrust each)  
Hydrogen, oxygen propellant

## PAYLOAD POWER INTERFACE CHARACTERISTICS

Mission phase	Interface	X <sub>0</sub> station	Voltage range	Power, kW		Comments	ATCS <sup>a</sup> payload heat rejection configuration, kJ/hr (Btu/hr)
				Average	Peak		
Ground operation (ground power)	Dedicated fuel cell connector	≈ 695	24 to 32 27 to 32	1 7	1.5 12	Normal checkout Orbiter powered down	Limited to 5486 kJ/hr (5200 Btu/hr) with or without radiator kit unless payload has GSE connection for cooling or Orbiter is powered down
	Main bus connector	≈ 695	24 to 32	1 5	1.5 8	Normal checkout Orbiter powered down	
	Aft (bus B)	1307	24 to 32	1.5	2	May be used simultaneously	
	Aft (bus C)	1307	24 to 32	1.5	2		
Ascent/descent	Dedicated fuel cell connector	≈ 695	27 to 32	1	1.5	Power limited to a total of 1 kW average and 1.5 kW peak for 2 min	5486 (5200) with or without radiator kit
	Main bus connector	≈ 695	27 to 32	1	1.5		
	Aft (bus B)	1307	24 to 32	1	1.5		
	Aft (bus C)	1307	24 to 32	1	1.5		
On-orbit payload operations	Dedicated fuel cell connector	≈ 695	27 min. Max. TBD <sup>b</sup>	7 6	12 TBD <sup>b</sup>	Peak power limited to 15 min once every 3 hr	31 100 (29 500) (kit) 22 700 (21 500) (no kit)
	Main bus connector	≈ 695	27 to 32	5	8		
	Aft (bus B)	1307	24 to 32	1.5	2	Power may be utilized from both interfaces simultaneously; buses must be isolated on the payload side of the interface	22 700 or 31 100 (21 500 or 29 500)
	Aft (bus C)	1307	24 to 32	1.5	2		

<sup>a</sup>Active thermal control subsystem

<sup>b</sup>To be determined

## ENVIRONMENTAL CONTROL

Cooling services are provided to payloads by the Space Shuttle. Ground support equipment provides a selectable temperature range during prelaunch activities. After the Orbiter lands, ground support equipment similar to airline support hardware is connected to the cabin and payload bay to control temperature levels.

The payload bay is purged with conditioned air at the launch pad until 80 minutes before the start of propellant loading; then dry nitrogen gas is supplied until lift-off. The payload bay is vented during the launch and entry phases and is unpressurized during the orbital phase of the mission. The pressure difference between the payload bay and outside air is minimized to allow a lightweight structure and thus an economical design for the payload bay.

The cabin atmosphere (temperature, pressure, humidity, carbon dioxide level, and odor)

is controlled by the cabin heat exchanger and associated equipment. The temperature is maintained between 289 and 305 K (61° and 90° F). An oxygen partial pressure of  $22\,065 \pm 1725 \text{ N/m}^2$  ( $3.2 \pm 0.25 \text{ psia}$ ) is maintained, and nitrogen is added to achieve a total pressure of  $101\,355 \text{ N/m}^2$  (14.7 psi). The oxygen is supplied from the same cryogenic tanks that supply the fuel cells. Nitrogen for normal operation and emergency oxygen is supplied from 20 700-kN/m<sup>2</sup> (3000 psi) pressure vessels mounted in the midfuselage. The cabin atmosphere and part of the avionic equipment cooling is controlled by air that is ducted through the cabin heat exchanger.

The radiator system located on the inside of the payload bay doors is the primary on-orbit heat rejection system. A water loop transports the excess heat from the cabin heat exchanger

### ORBITER PURGE AND VENT SYSTEM



#### PURGE DUCT SYSTEM

- Consists of three separate/dedicated systems

- 1 Forward fuselage, forward RCS, OMS pods, wing, vertical stabilizer
- 2 Midfuselage (payload and lower equipment bays)
- 3 Aft fuselage (dedicated)

- Each provides

- Thermal conditioning
- Moisture control
- Hazardous-gas dilution

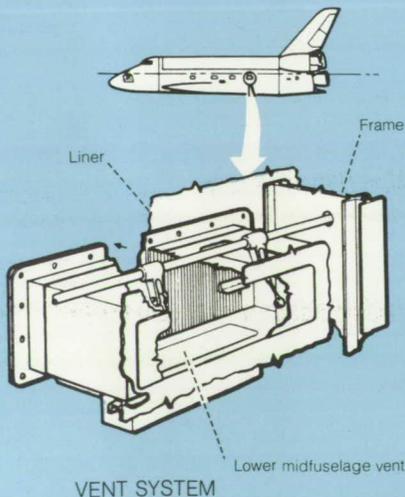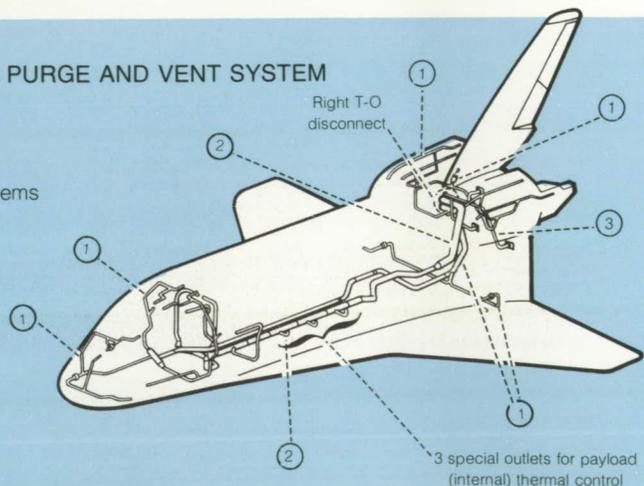

Gas type	Prelaunch pad operations		Postlanding and runway to OPF <sup>a</sup>	Transfers: VAB <sup>b</sup> to OPF, VAB to pad, OPF to VAB
	Noncryogenic payload	Cryogenic payload		
Temperature range, $\pm 1.1 \text{ K}$ ( $\pm 2^\circ \text{ F}$ )	Air/GN <sup>2</sup> <sup>c</sup> 280 to 311 (45 to 100)	GN <sup>2</sup> 280 to 311 (45 to 100)	Air 280 to 311 (45 to 100)	Air 291 to 303 (65 to 85)
Flow rate, kg/min (lb/min) Spigots closed	45 (100)	165 (364)	50 (111)	50 (111)
Spigots open Spigots Manifold	68 (150) 50 (110)	68 (150) 97 (214)	57 (126) 43 (94)	57 (126) 43 (94)
Total spigots open	118 (260)	165 (364)	100 (220)	100 (220)
Supply pressure, $\text{N/m}^2$ (psig)	17 235 (2.5)	68 940 (10)	13 788 (2.0)	13 788 (2.0)

<sup>a</sup> OPF = Orbiter Processing Facility.

<sup>b</sup> VAB = Vehicle Assembly Building.

<sup>c</sup> Initiate gaseous nitrogen (GN<sub>2</sub>) purge 80 min before cryogenic tanking to inert payload bay.

and remaining avionic equipment (through cold plates) to the Freon cooling loop by way of the cabin heat interchanger. The Freon cooling loop delivers this heat, together with heat from the fuel cells, payloads, and cold plates of the aft avionic equipment, to the 113-square-meter (1220 square foot) (effective area) baseline radiators, where the heat is radiated into space. The water flash evaporator is used to supplement the radiator cooling capacity. Extra radiator panels can be added to accommodate payloads with high heat loads.

During the ascent and descent (down to an altitude of 30 500 meters (100 000 feet), when the cargo bay doors are closed and the radiators are ineffective), cooling is provided by the flash evaporator. From the altitude of 30 500 meters (100 000 feet) to landing and connection with the ground support equipment, the ammonia boiler provides the required cooling.

## ATMOSPHERIC REVITALIZATION SUBSYSTEM


### Functions

- Carbon dioxide, odor, and water vapor control in pressurized cabin
- Cabin pressure maintenance and control
- Cabin atmosphere thermal control
- Cabin and aft section avionics thermal control
- Atmospheric revitalization for habitable payloads (when required)
- Oxygen and cooling water in support of EVA
- Oxygen outlets throughout the cabin for emergency breathing

### Design performance requirements

- Mission
  - Nominal: 42 man-days
  - Extravehicular activity: 3 two-man periods
  - Contingencies: 16 man-days or 1 cabin repressurization or maintain pressure with cabin leak
- Personnel (crew and passengers)
  - Design operation, 3 to 10
  - Cabin
    - Normal, 3 to 7
    - Rescue, 6 to 10
  - Cabin pressure: 101 354 N/m<sup>2</sup> (14.7 psia)
  - Atmospheric composition: 22 065 N/m<sup>2</sup> (3.2 psia) oxygen; 79 980 N/m<sup>2</sup> (11.6 psia) nitrogen

## ORBITER ENVIRONMENTAL CONTROL

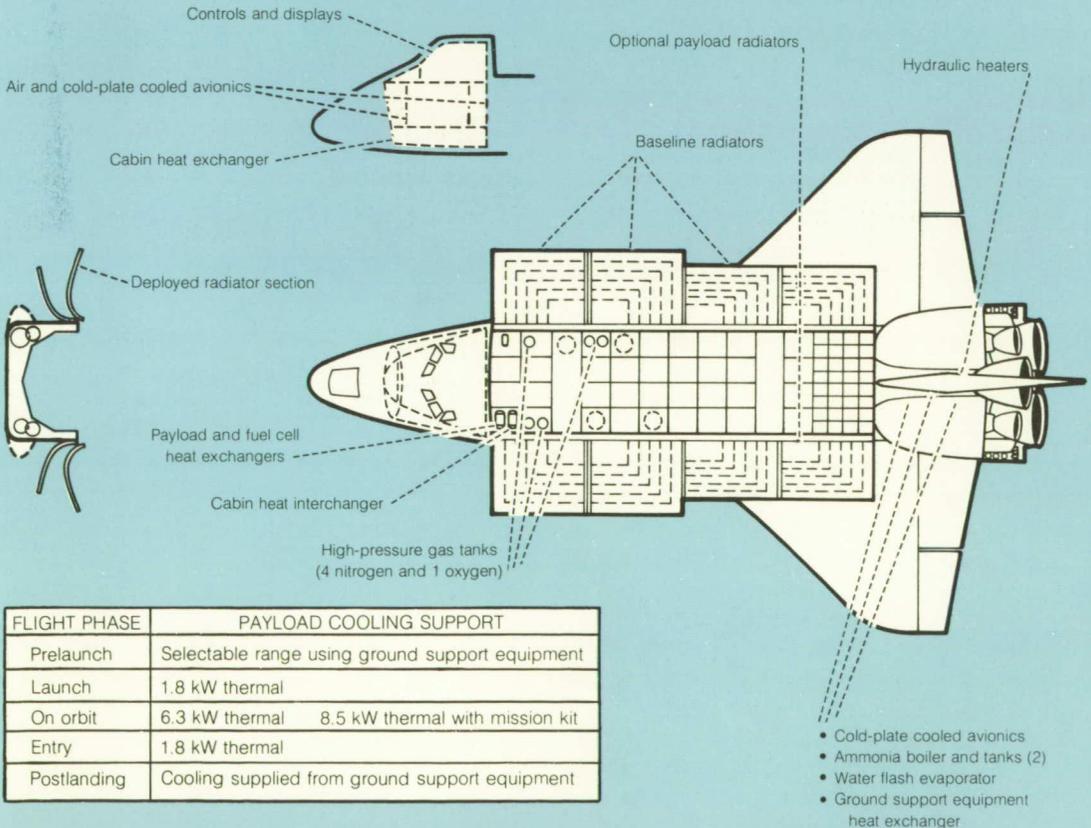

FLIGHT PHASE	PAYLOAD COOLING SUPPORT	
Prelaunch	Selectable range using ground support equipment	
Launch	1.8 kW thermal	
On orbit	6.3 kW thermal	8.5 kW thermal with mission kit
Entry	1.8 kW thermal	
Postlanding	Cooling supplied from ground support equipment	

## ORBITER SUBSYSTEM SUMMARY

SGLS - Space-ground link subsystem  
STDN - Space tracking and data network  
TDRS - Tracking and data relay satellite

### Communication and Tracking

- SGLS-compatible (S-band) transceiver
- STDN/TDRS compatible (S-band) transceiver
- Payload S-band interrogator
- Tacan interrogator
- Radar altimeter and microwave search beam landing system
- Rendezvous radar/Ku-band communications
- Black and white and color television
- Audio center
- Signal processors
- Doppler extractor
- Extravehicular activity UHF transceiver

### Data Processing

- Five digital computers
  - Three dedicated to G&N
  - One reconfigurable (G&N or payload and performance monitoring)
  - One dedicated to payload and performance monitoring
- Mass memory
- Keyboards and CRT displays

### Guidance, Navigation, and Control


- Star sensors
- Inertial measurement units
- Rate gyros
- Accelerometers
- Air data sensors

### Operational Flight Instrumentation

- PCM data acquisition and distribution
- Recorders
- Master timing unit

### Displays and Controls

- Two primary flight stations
- Payload handling station
- Mission station
- Payload station
- Subsystem management and power distribution panels

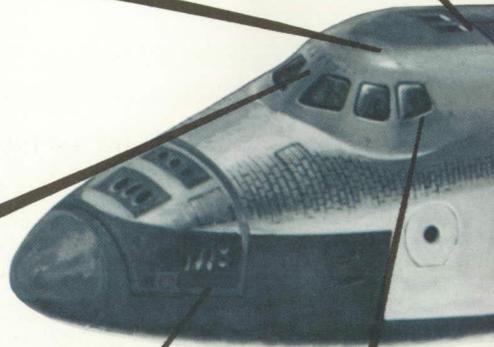


## AVIONICS

The Shuttle avionics subsystem provides commands; guidance and navigation (G&N) and control; communications; computations; displays and controls; instrumentation; and electrical power distribution and control for the Orbiter, the external tank, and the SRB. The avionics equipment is arranged to facilitate checkout, access, and replacement with minimal disturbance to other subsystems. Almost

all electrical and electronic equipment is installed in three areas of the Orbiter: the flight deck, the forward avionic equipment bays, and the aft avionic equipment bays.

The Orbiter flight deck is the center of both in-flight and ground activities except during hazardous servicing. Automatic vehicle flight control is provided for all mission phases except docking; manual control options are

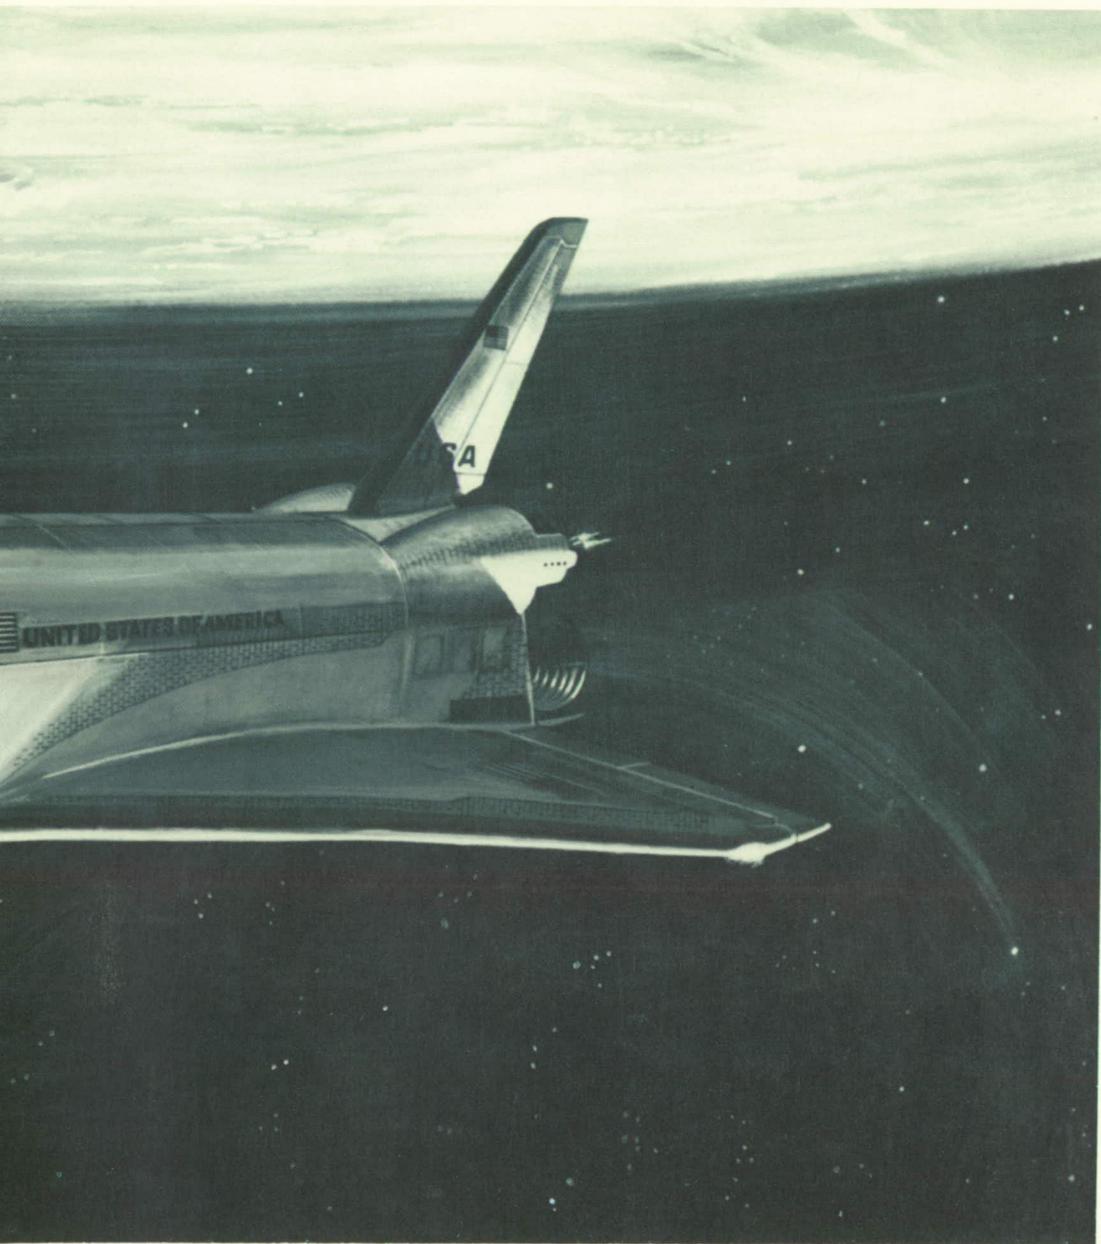

available at all times. Side-stick rotation controllers, rudder pedals, and trim controls allow manual control, and a computer provides commands for automatic flight control to the aerosurfaces or propulsive elements as required. Attitude information is obtained from the inertial measuring unit. Air data are provided by redundant probes deployed at lower altitudes. Gimbaled inertial measuring units provide the

navigation reference with star sensors for autonomous alignment and state vector update. During active rendezvous, a rendezvous radar is used to obtain range and bearing information. Orbiter-to-ground communication is by radiofrequency transmission in both frequency modulation and pulse code modulation (PCM) modes.


## **COMMUNICATIONS, TRACKING, AND DATA MANAGEMENT**


The payload communications, tracking, and data management baseline configuration has sufficient flexibility to accommodate most payloads so that between-flight changes will be required only infrequently for special missions. Voice, television, and data-handling capabilities support onboard control or remote control from the ground when desirable. The on-orbit and ground facility handling system must be very efficient to support the many payloads to be flown.

The communications and tracking subsystem in the Orbiter supports Orbiter-to-payload communications as well as the transfer of payload telemetry, uplink data commands, and voice signals to and from the space networks.

The data processing and software subsystem furnishes the onboard digital computation required to support payload management and handling. Functions in the computer are controlled by the crew through main memory loads from the tape memory. Flight deck stations for payload management and handling are equipped with data displays, CRT's, and keyboards for monitoring by the crew and for controlling payload operations on a flight-by-flight basis using equipment supplied as part of the payload.

# ORBITAL COMMUNICATIONS AND TRACKING LINKS

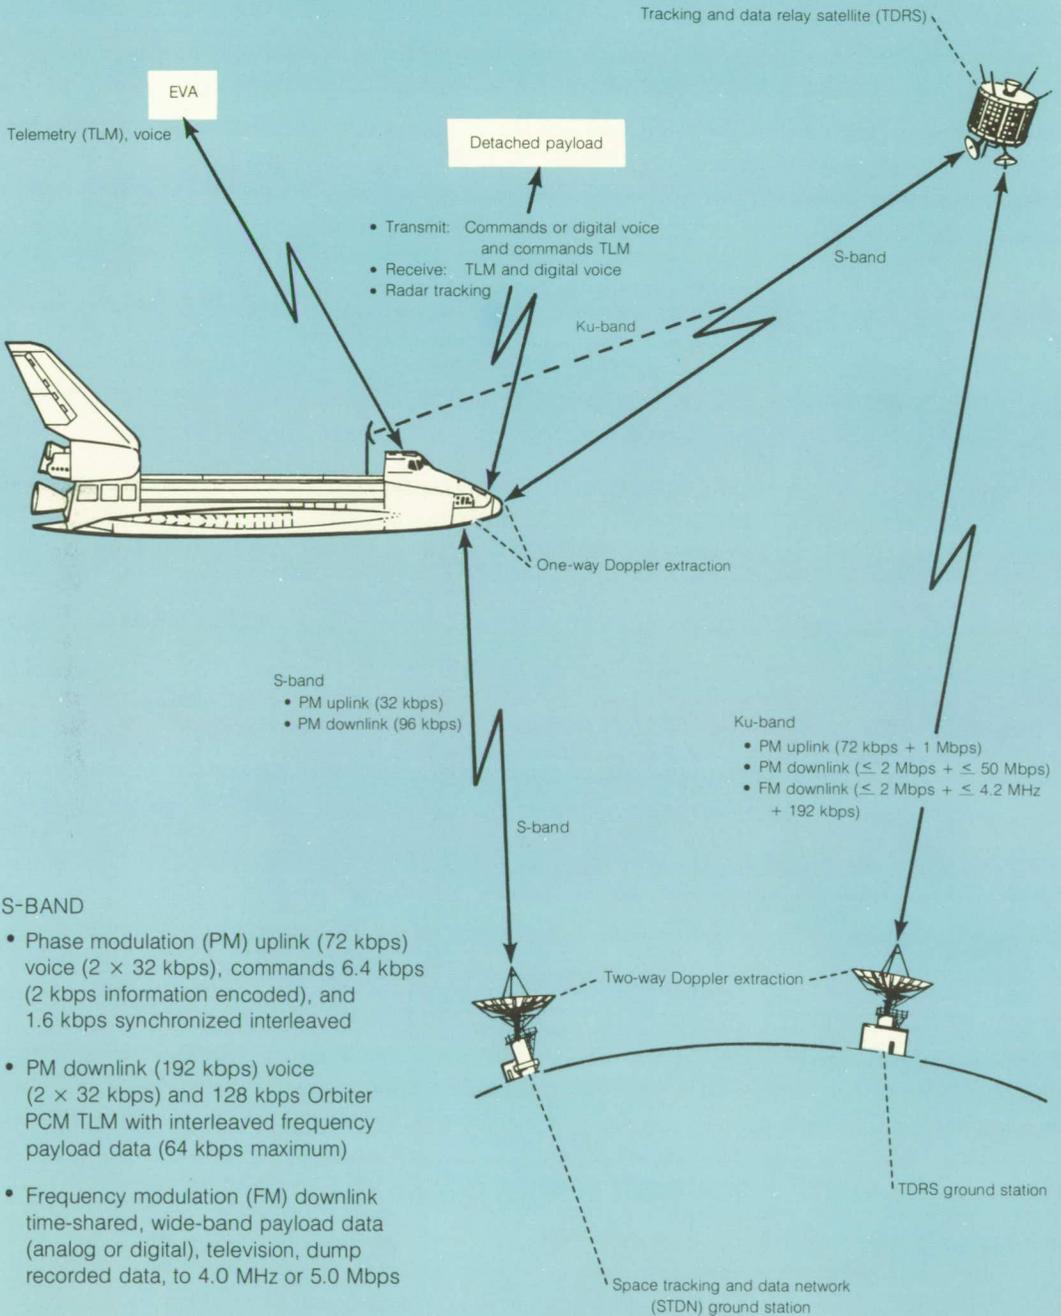

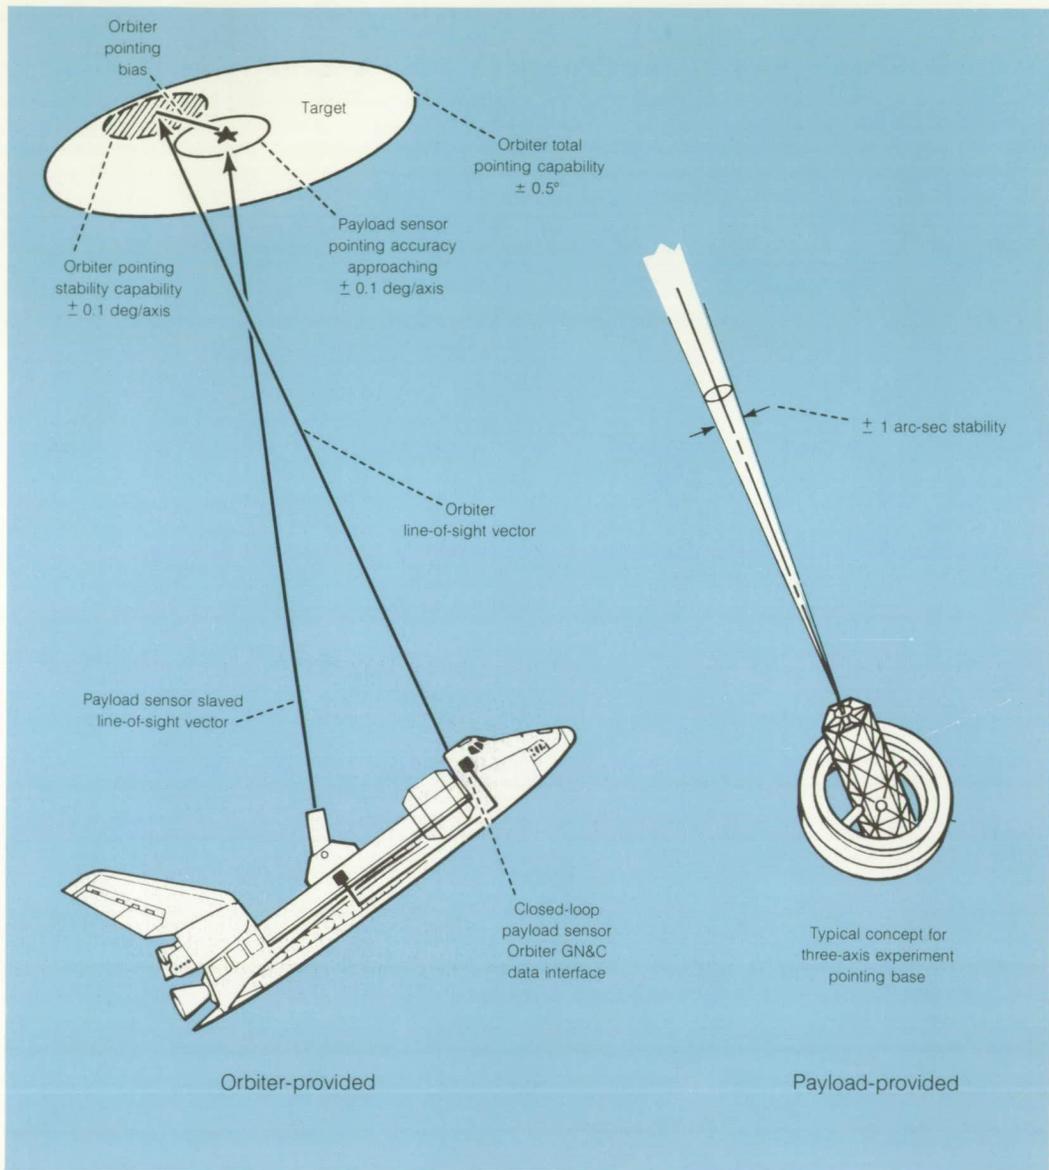


## PAYLOAD POINTING AND STABILIZATION

The Orbiter is capable of achieving any desired vehicle attitude and initiating a pointing vector defined in its sensor-fixed axis system to any ground or celestial object within an accuracy of  $\pm 0.5^\circ$ . Pointing vector accuracies with respect to an open loop payload sensor-fixed axis system are not as exact as the vehicle pointing accuracies because large misalignment and structural deformation error sources exist between the sensors. However, when the Orbiter guidance, navigation, and control system and a more accurate payload-

mounted sensor are operated in a closed loop, payload pointing accuracies approaching  $\pm 0.1$  deg/axis are possible. In either case, the Orbiter can be stabilized at a rate as low as  $\pm 0.01$  deg/sec. Payloads requiring more stringent pointing and stability accuracies must provide their own stabilization and control system for that particular experiment. Orbiter guidance, navigation, and control system data interfaces are also provided to accommodate these types of payload requirements.



# GUIDANCE, NAVIGATION, AND CONTROL SUBSYSTEM

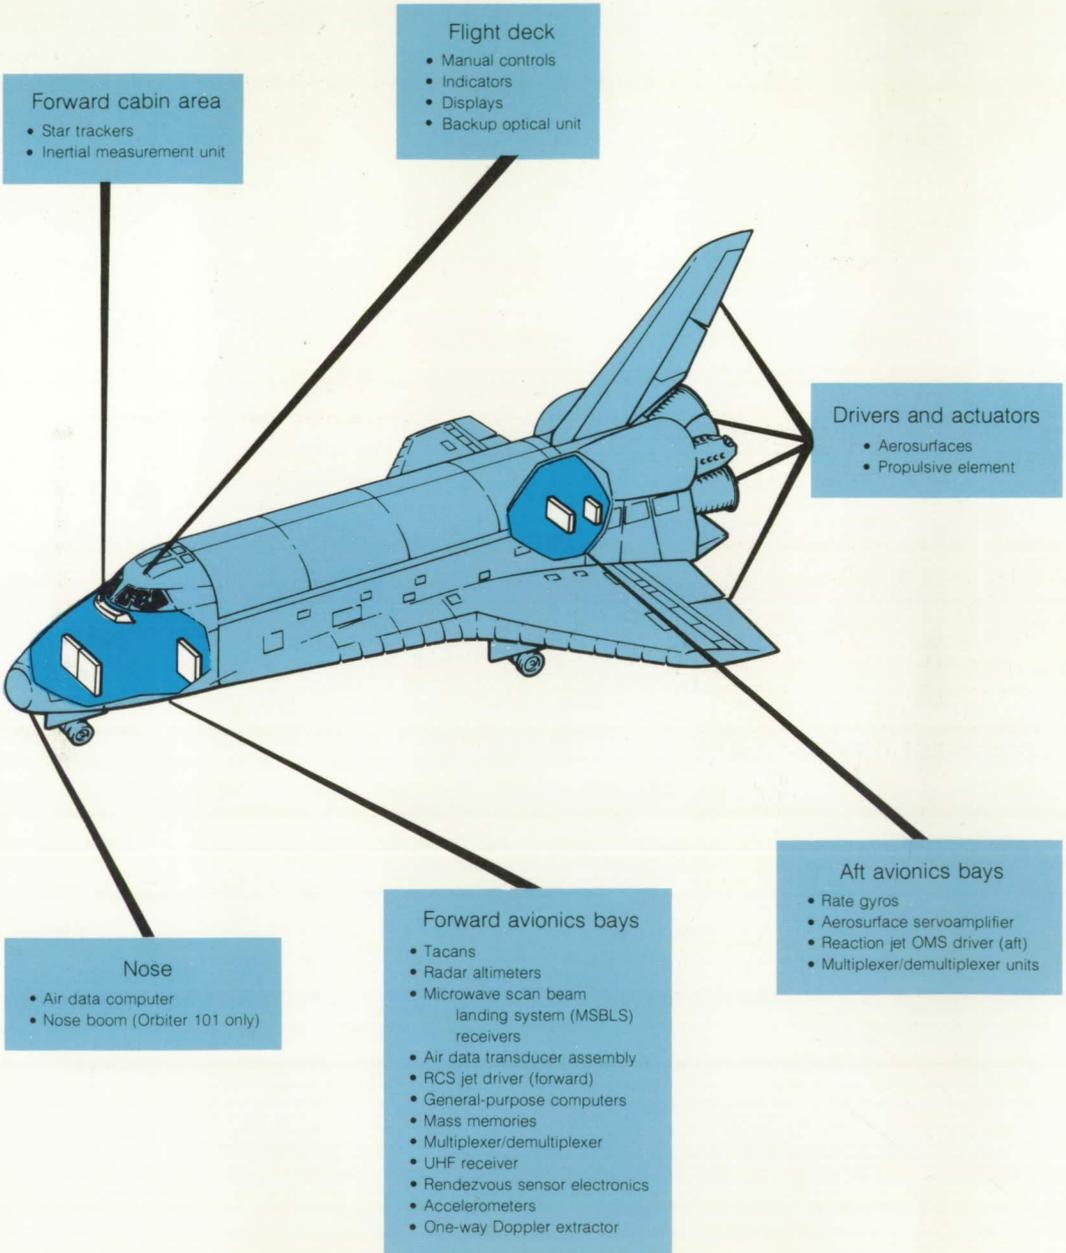

The Orbiter guidance, navigation, and control (GN&C) system is capable of providing guidance, navigation, and control for the Orbiter through all phases of orbital space flight from launch through entry, and for aircraft aerodynamic flight modes. During the on-orbit phases, the guidance and navigation of the Orbiter can be independent of direct ground support. Information from the GN&C computer subsystem can be transferred to the payload bay via hardwire. As a minimum, the information will include timing, state vector initialization and extrapolation (if desired), and spacecraft attitudes and attitude rates.

The Orbiter has the onboard capability to rendezvous with an in-plane cooperative target up to 560 kilometers (300 nautical miles), and is the active vehicle during rendezvous, docking, and undocking. By using ground facilities and other aids, the Orbiter is capable of rendezvous with and retrieval of a passive stabilized orbiting element.

The dominant errors involved in pointing a payload with the spacecraft systems are contributed by the structural misalignments and thermal distortions. The guidance and navigation (G&N) subsystem errors, including an equivalent angular error due to navigation uncertainty, are less at  $0.2^\circ$  (1 sigma). Control system errors (i.e., attitude deadband excursions) must also be added to the stated error sources.

The Orbiter is capable of pointing the payload continuously for one orbit every other orbit for one 24-hour period per mission at any ground, celestial, or orbital object within  $\pm 0.5^\circ$ . Payload requirements in excess of this capability should be provided by the payload or experiment systems.

## REUSABLE SPACE HARDWARE


The Space Shuttle era will emphasize operational reuse of flight hardware, which will result in low cost per flight to the users. Low cost was and continues to be the basic concept on which the total space transportation system is being developed. In addition, the Space Shuttle operational phase will last much longer than the developmental phase. Multiuse mission support equipment, like the Space Shuttle Orbiter, is being readied and will also be reflown in support of a wide variety of payloads.

## MISSION KITS

A group of mission kits to provide special or extended services for payloads will be added when required and will be designed to be quickly installed and easily removed. The major mission kits are as follows.

- Oxygen and hydrogen for fuel cell usage to generate electrical energy
- Life support for extended missions
- Added propellant tanks for special on-orbit mission maneuvers
- Extra or specialized attachment fittings
- Airlocks, transfer tunnels, and docking modules
- A second remote manipulator arm and an extra high-gain antenna
- Fill, vent, drain, purge, and dump lines
- Additional radiator panels for increased heat rejection
- Additional storage tanks
- Electrical harnesses

# KSC SHUTTLE SYSTEM GROUND FLOW

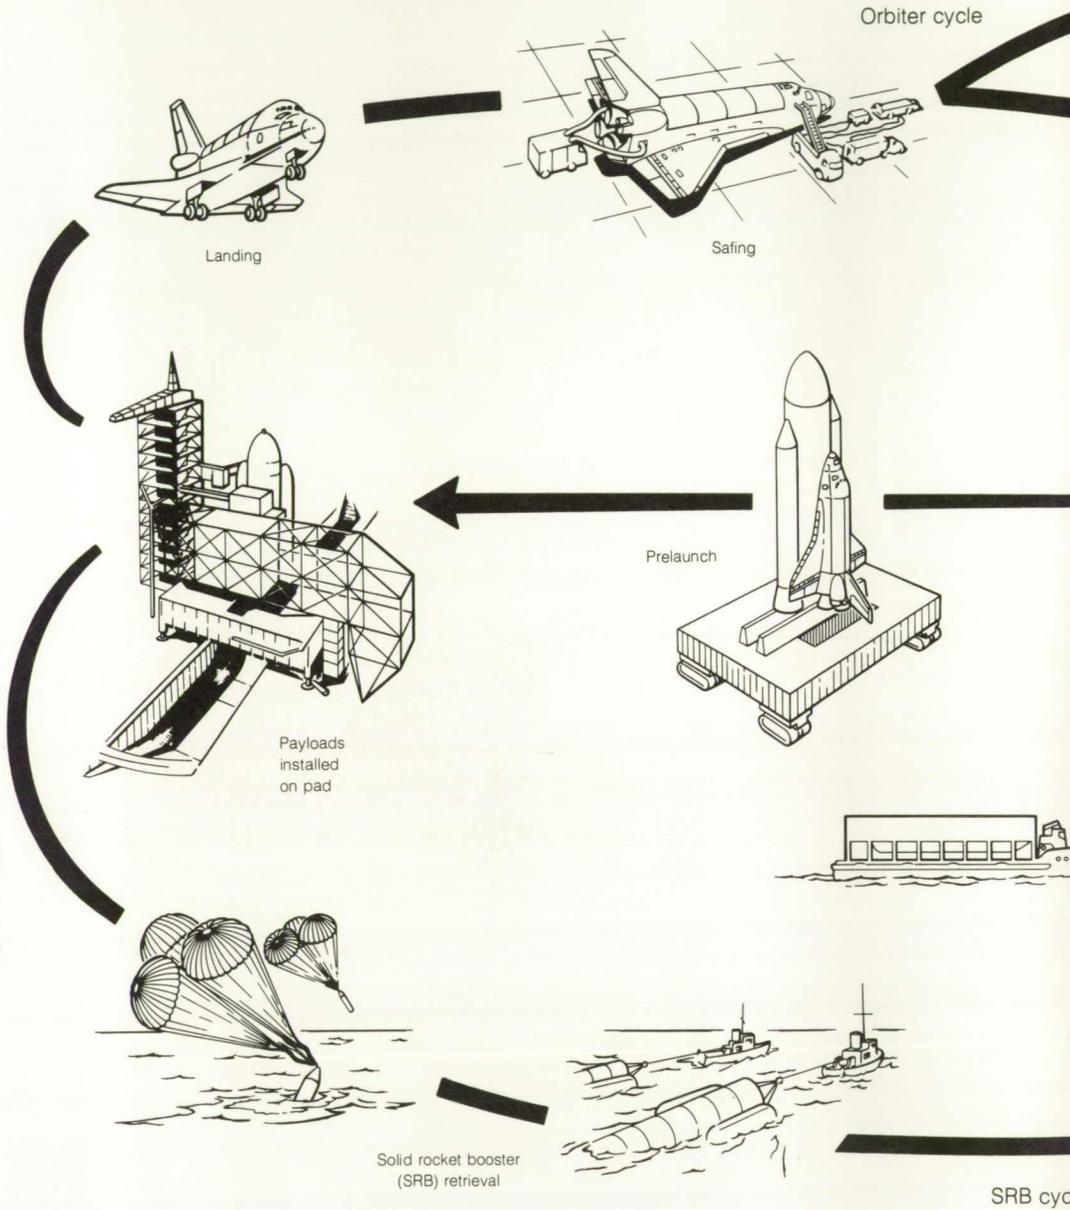

## LAUNCH SITES, OPERATIONAL DATE


Space Shuttle flights will be launched from two locations, the NASA John F. Kennedy Space Center (KSC) in Florida and the Vandenberg Air Force Base (VAFB) in California. Present program planning calls for a gradual buildup of 40 to 60 total flights per year into many varying orbits and inclinations.

To attain operational status by 1980, Space Shuttle orbital test flights are scheduled to begin from KSC during 1979; VAFB is planned

to be available in the early 1980's.

Launch Complex 39 and the Vehicle Assembly Building at KSC, used for the Apollo and Skylab Programs, will be modified for Space Shuttle use. Modification includes widening the doors approximately 12.2 meters (40 feet) to accommodate the Orbiter wingspan.

The KSC launch pads themselves will undergo major changes. Whereas launch towers for the Apollo/Saturn were on the mobile

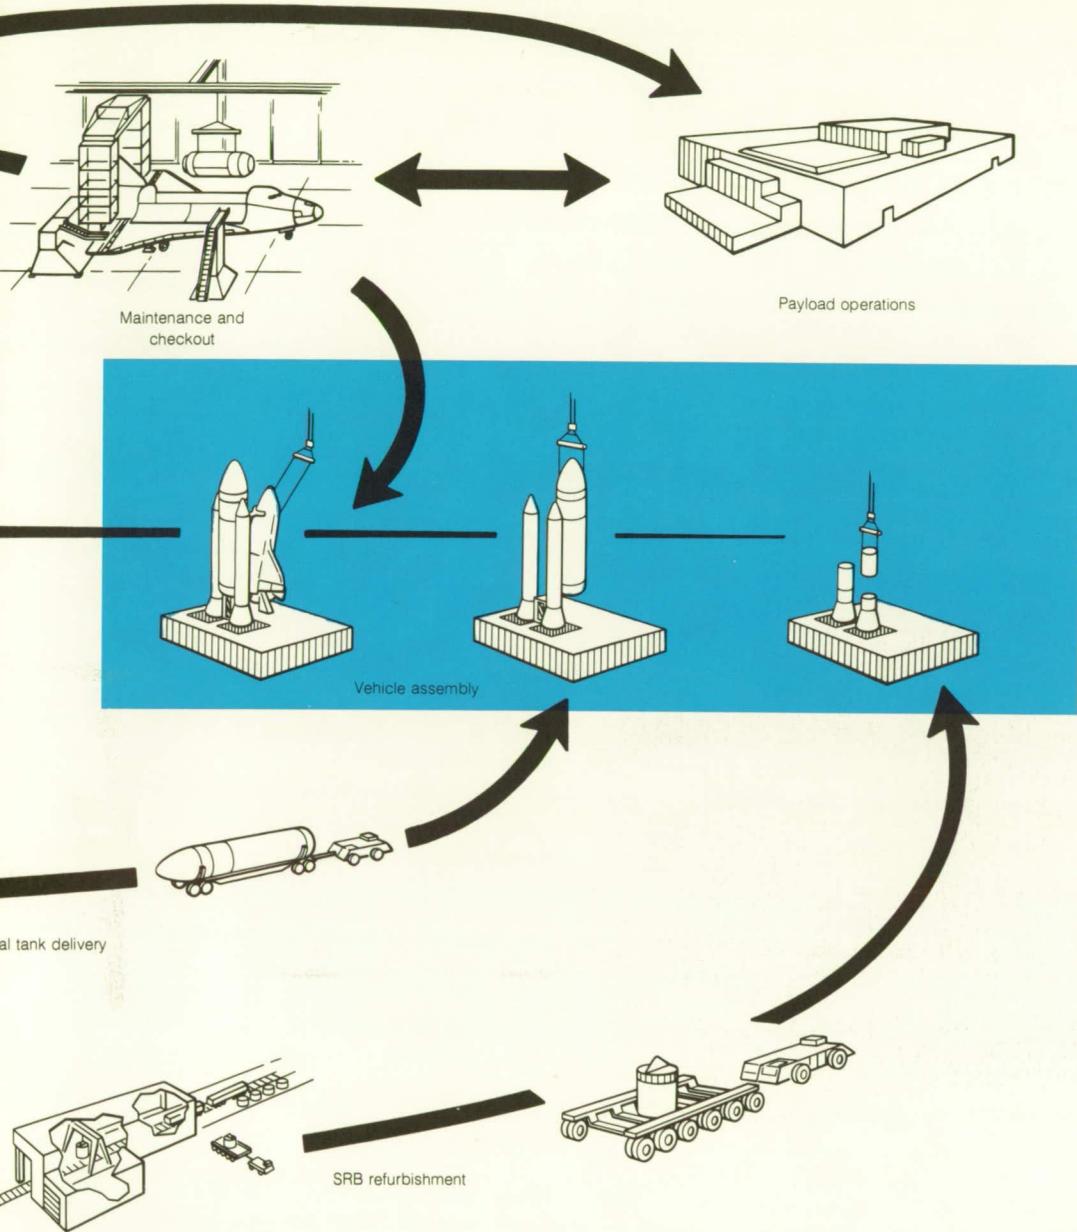

## PERFORMANCE AND INCLINATION LIMITS

launcher platform, the towers for Shuttle will be fixed at each launch pad.

The solid rocket boosters will be received, processed, stored, disassembled, and refurbished nearby. Most of this work space will be in existing buildings. The external tank will arrive by barge at the turning basin. Payloads will be processed in various locations.


The various orbital inclinations and their related launch azimuths are illustrated for each

site. Together, these capabilities satisfy all known future requirements. Payloads as large as 29 500 kilograms (65 000 pounds) can be launched due east from KSC into an orbit of 28.5° inclination. Payloads of 14 500 kilograms (32 000 pounds) can be launched from VAFB into an orbit as high as 104° inclination. Polar orbiting capabilities up to 18 000 kilograms (40 000 pounds) can be achieved from VAFB.


# ORBIT INCLINATIONS AND LAUNCH AZIMUTHS FROM KSC AND VAFB


Allowable 

**KENNEDY SPACE CENTER**

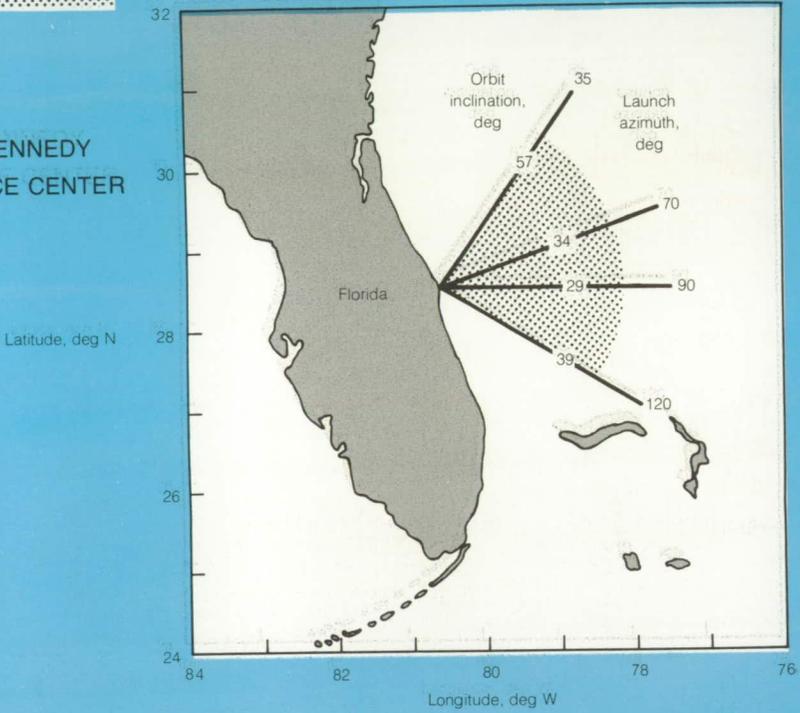


**VANDENBERG AIR FORCE BASE**

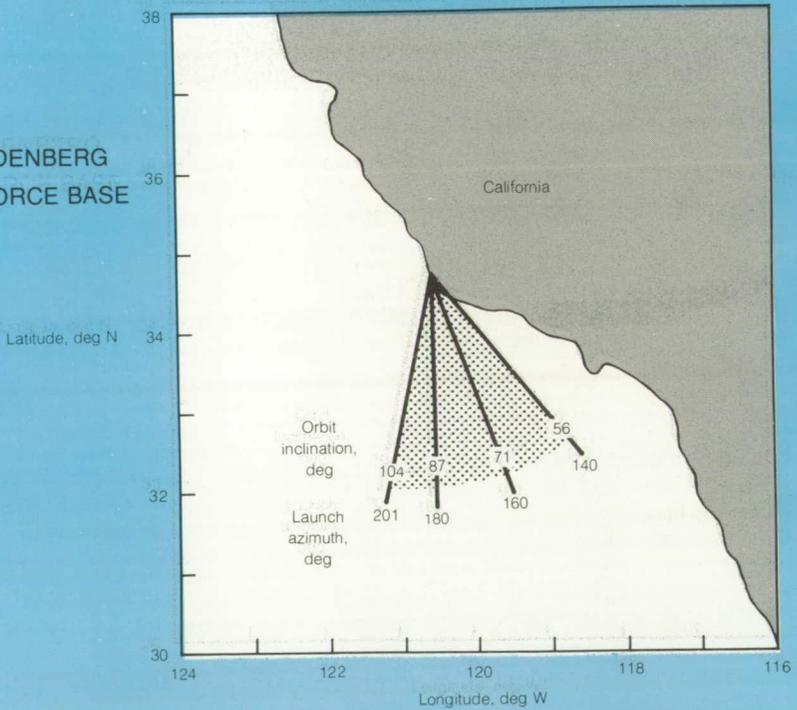


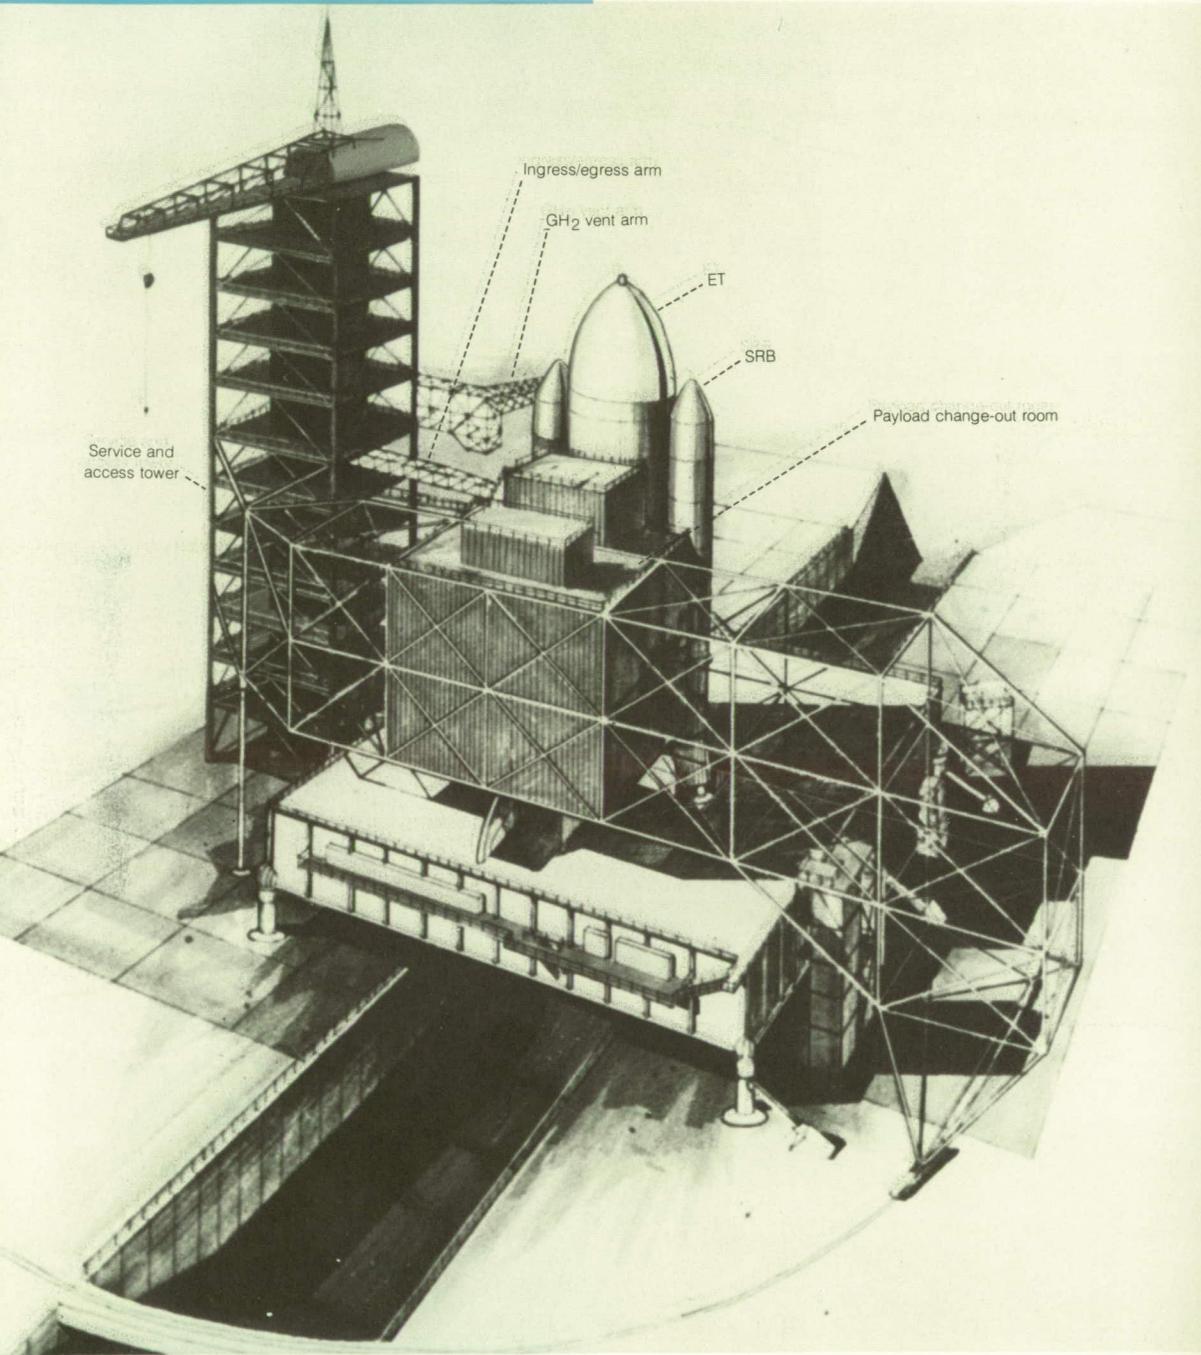


LAUNCH PAD SERVICE AND ACCESS TOWER

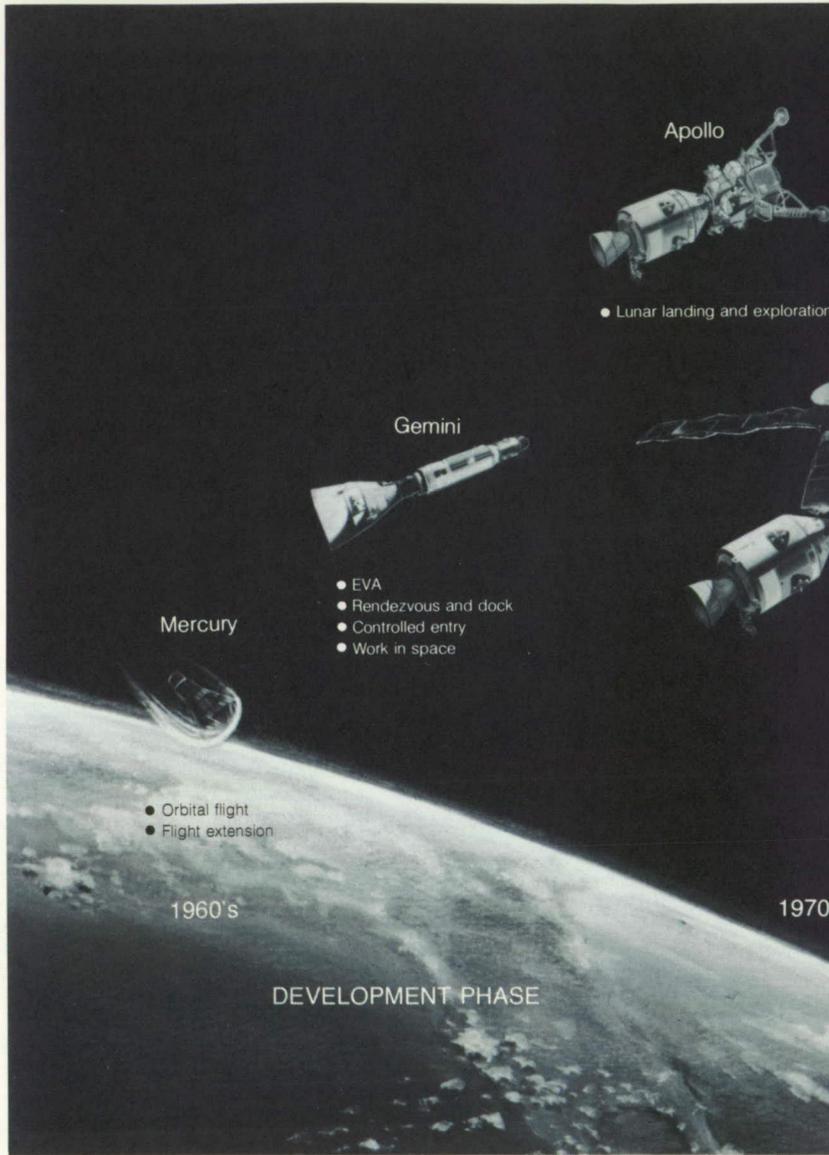

### U.S. MANNED SPACE-FLIGHT OVERVIEW

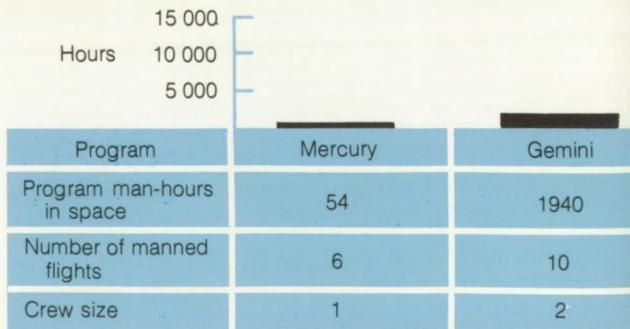

Cumulative Man-Hours in Space . . . .

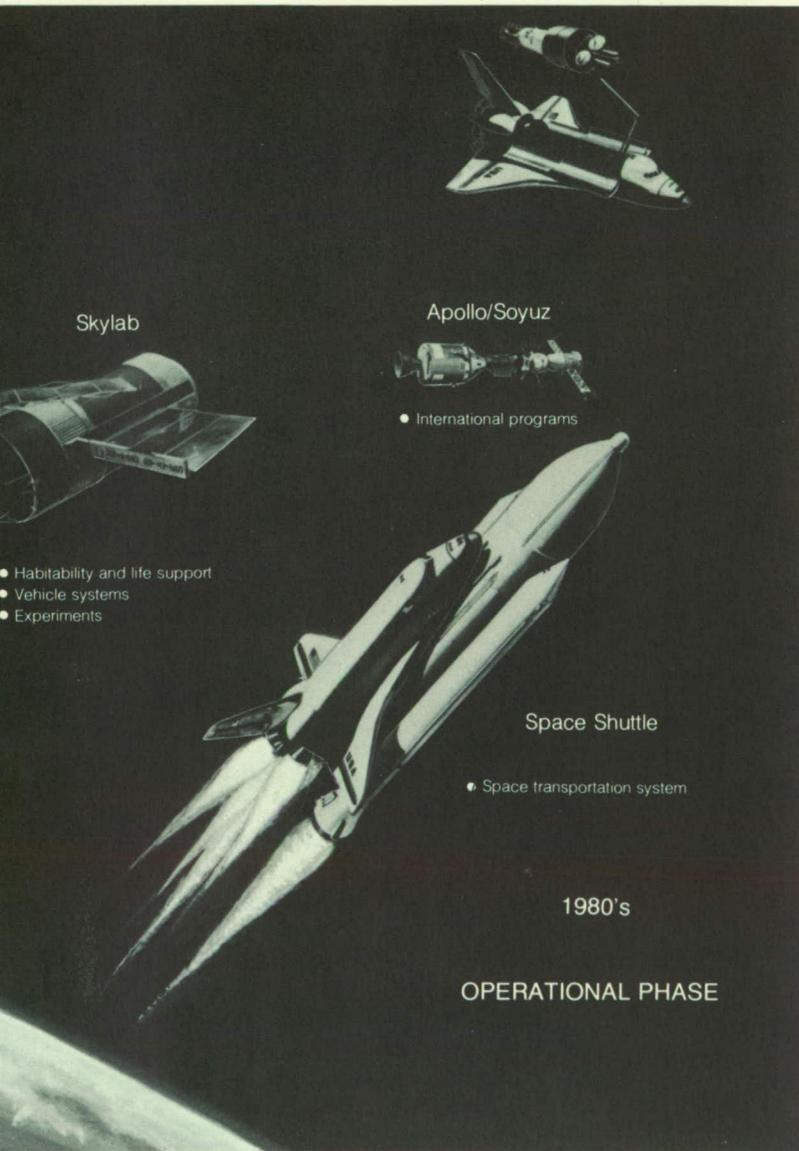

Skylab

Apollo/Soyuz

Space Shuttle

- Habitability and life support
- Vehicle systems
- Experiments

- International programs

- Space transportation system

1980's

OPERATIONAL PHASE

Apollo	Skylab	Apollo/Soyuz
7506	12 351	652
11	3	1
3	3	3

.. 22 503 hours, 49 minutes, 50 seconds




## *Economic Impact*

There is abundant and well-documented evidence of the widespread benefits flowing from the space program to the nation and, indeed, to the world. The fields of medicine, communications, navigation, meteorology, Earth resources exploitation, and many others have been enriched. The Shuttle will increase these benefits and bring others in the future. However, the space program also spawns many less apparent economic benefits that are potentially as significant as the direct contributions. These indirect economic effects are not widely recognized, nor do they constitute the primary justification for the space program. Yet several recent studies have shown that they strengthen the nation's economy by making important contributions in our efforts to solve our basic economic problems.

Economists have long known that technological advance is the primary source of higher productivity and economic growth, and that research and development (R&D) is the chief contributor of technology. What is new is the preponderance of recent evidence that high-technology efforts such as the Shuttle and other space programs have a more potent effect on

# f Space Shuttle

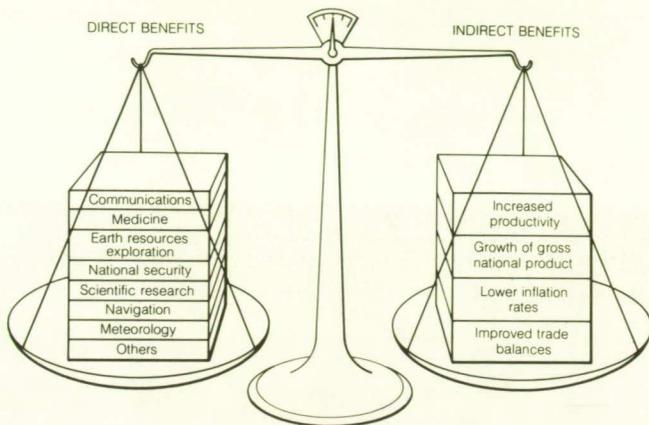

the economy than most other forms of R&D activity.

The reasons for the high technological leverage of the space program are straightforward. One is that the government-industry space team has consciously developed and implemented highly effective mechanisms for identifying and transferring space technology to other sectors of the economy for subsequent non-space applications. Another reason is that industries performing space research are among the most technology-intensive and -innovative in the economy; they generate the all-important technology stimulus the U.S. economy must have for improved productivity rates and expanded output.


These same industries are the ones the United States relies on in its efforts to maintain favorable trade balances. Expanded exports of high-technology products will offset the traditional negative balances in minerals, raw materials, fuels, and low-technology manufactured goods. In this regard, the Space Shuttle Program will contribute favorably to the U.S. trade posture in two ways. It will help speed the pace of technology because of its highly

stimulative effects on those technology-intensive industries that are depended on for a high dollar volume of exports. And it will contribute directly by launching and servicing the satellites of other nations. The ability of the Shuttle to provide launch services at lower costs and to offer orbital maintenance services never before available should markedly increase foreign participation in space exploration and exploitation.

The U.S. accomplishments in science, technology, exploration, and Earth applications attest to our success in meeting the goals of the National Aeronautics and Space Act during the past 16 years. The ancillary benefits of the space program — its ability to stimulate the economy; its applications to the solutions of earthbound problems; its contributions to international cooperation; and its creation of tens of thousands of jobs for our highly skilled scientists, engineers, and technicians — provide further proof of this success. These accomplishments and benefits should weigh heavily in the determination of the level of resources to be allocated to the Space Shuttle and the payloads in this and coming decades.

# SPACE SHUTTLE ERA


Trends of the 1980's — Integrated Space Operations

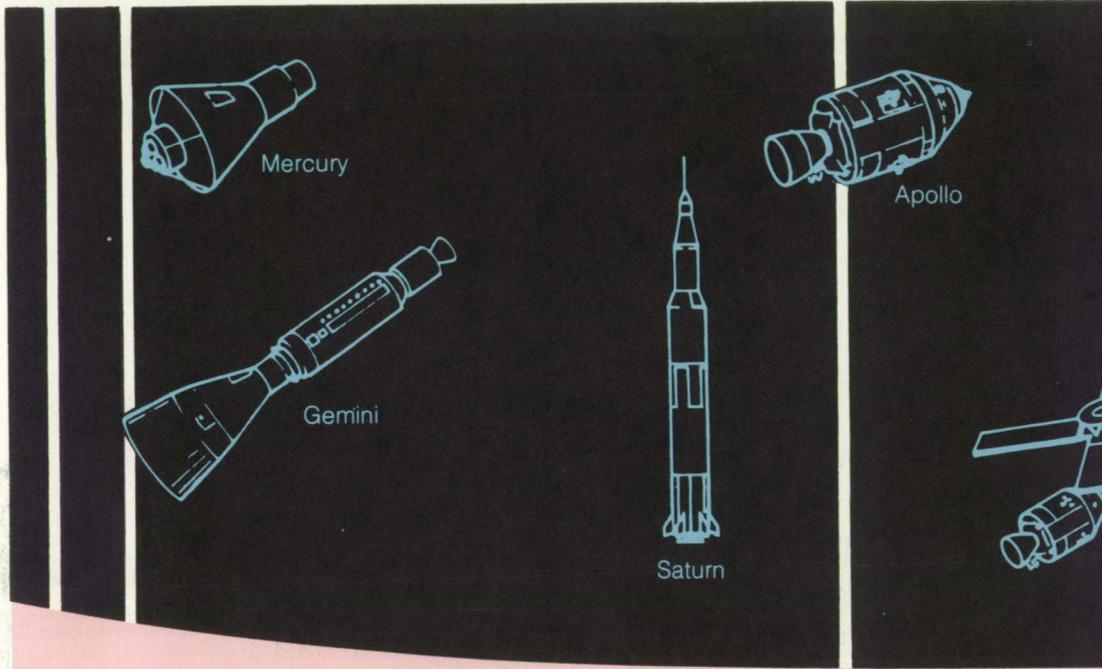

MANNED PROGRAMS


Manned and Unmanned Space Systems

UNMANNED SATELLITES

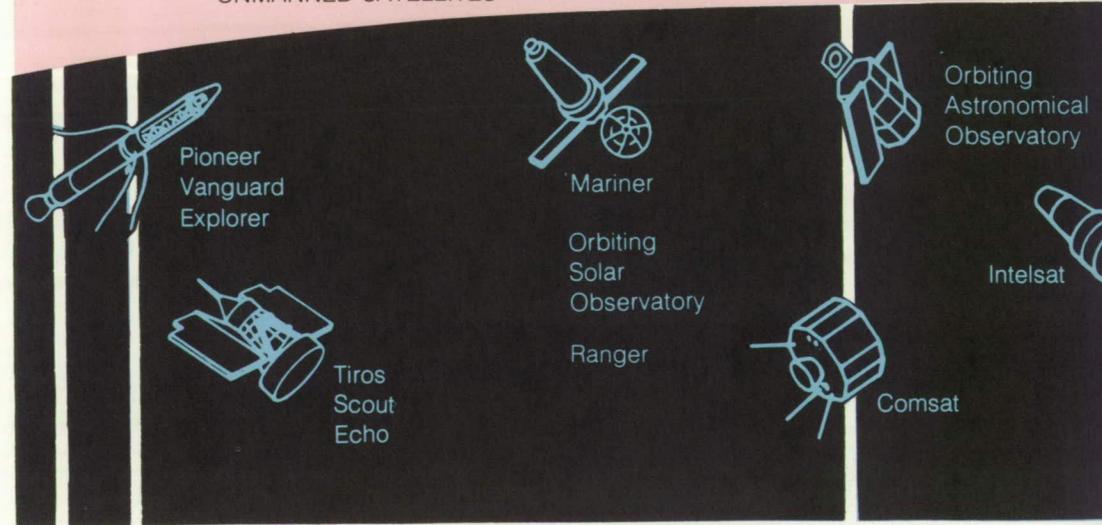

1959 1960

1970




Apollo/Soyuz



Skylab


Reusable hardware



Applications  
Technology  
Satellite



Viking

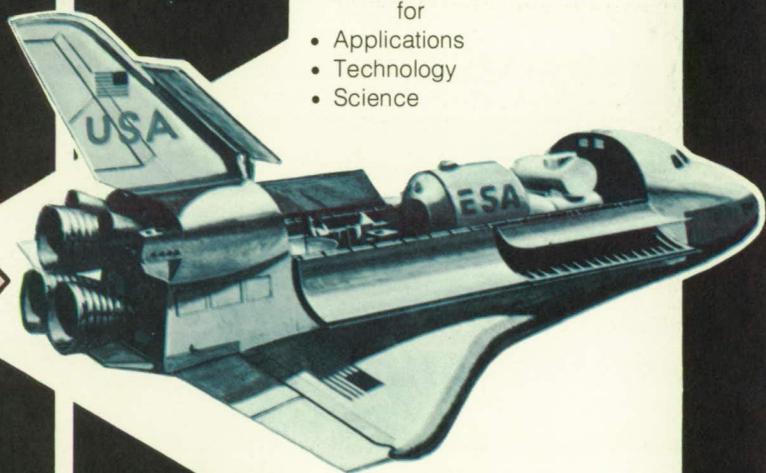

- Spacelabs
- Satellites
- Propulsion stages  
for
- Applications
- Technology
- Science


used by

- NASA Centers
- Other Government agencies
- Universities
- Industry
- International


1980

1990

The Space Division of Rockwell International is prime contractor to NASA for total integration of Space Shuttle systems

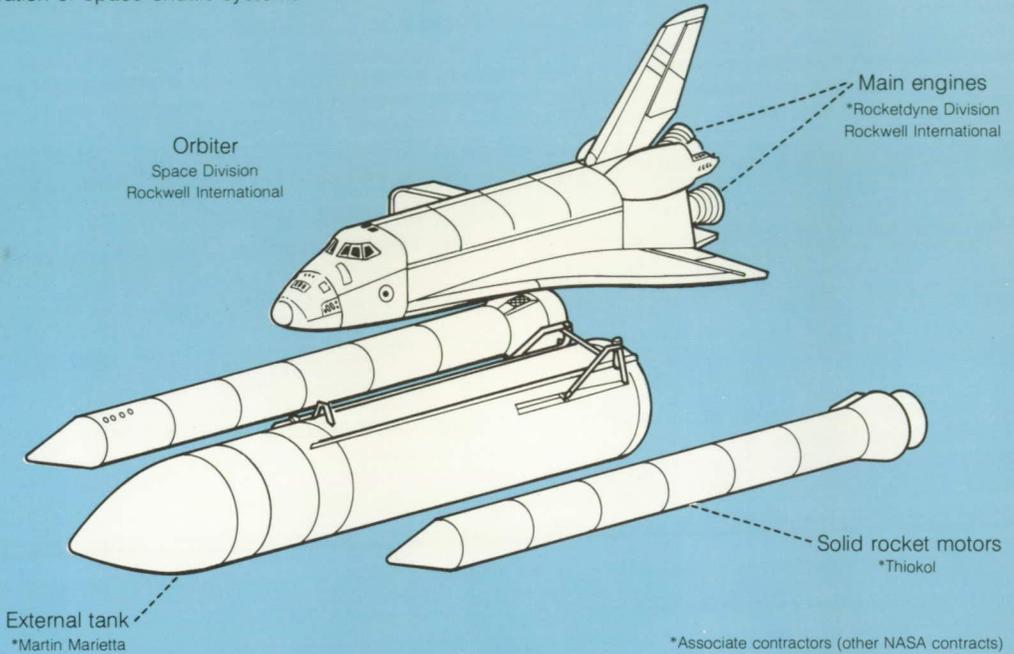

The Space Division of Rockwell International is also prime contractor to NASA for designing, developing, and building the Space Shuttle Orbiter

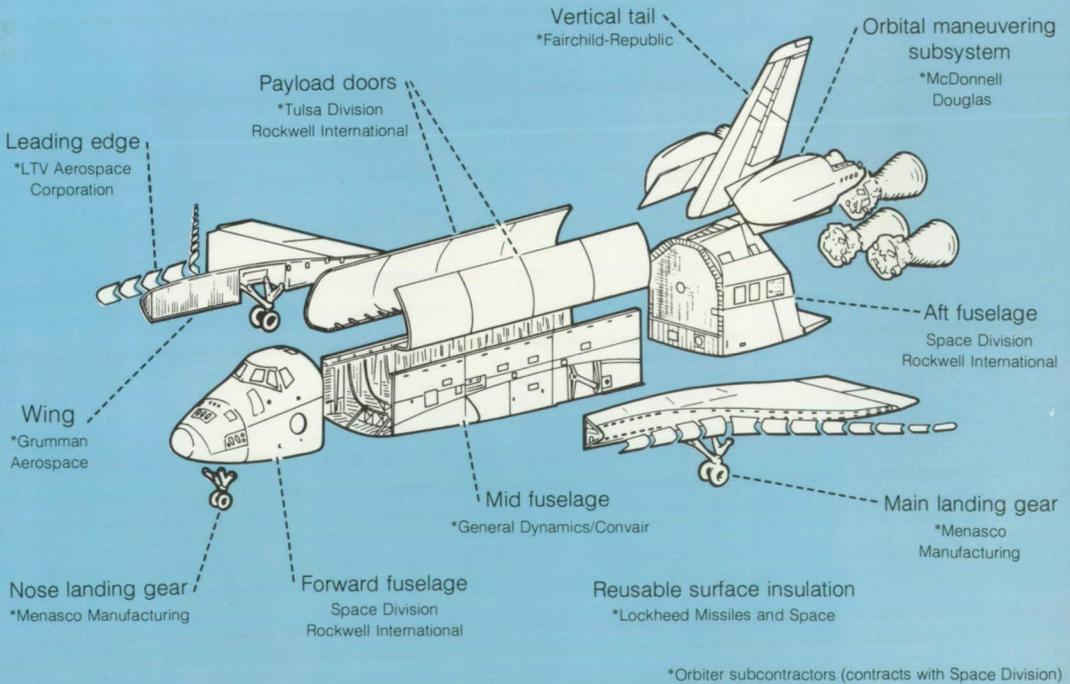

# *Space Shuttle Participants*


Overall direction of the Space Shuttle Program is at NASA Headquarters in Washington, D.C. The Space Shuttle Program Office, a part of the Office of Space Flight, is responsible for the detailed assignment of responsibilities, basic performance requirements, control of major milestones, and funding allocations to the various NASA field centers.

The Lyndon B. Johnson Space Center (JSC) in Texas is the lead Center and as such has program management responsibility for program control, overall systems engineering and systems integration, and overall responsibility and authority for definition of those elements of the total system that interact with other elements, such as total configuration and combined aerodynamic loads. JSC also is responsible for development, production, and delivery of the Shuttle Orbiter and manages the contract with Rockwell International Space Division.

The John F. Kennedy Space Center (KSC) in Florida is responsible for the design of launch and recovery facilities and will serve as the launch and landing site for the Space Shuttle development flight and for operational missions requiring launches in an easterly direction.

The George C. Marshall Space Flight Center (MSFC) in Alabama is responsible for the development, production, and delivery of the Orbiter main engine, the solid rocket booster, and the hydrogen/oxygen propellant tank.

The contractor team is still growing as the manufactured hardware takes form.

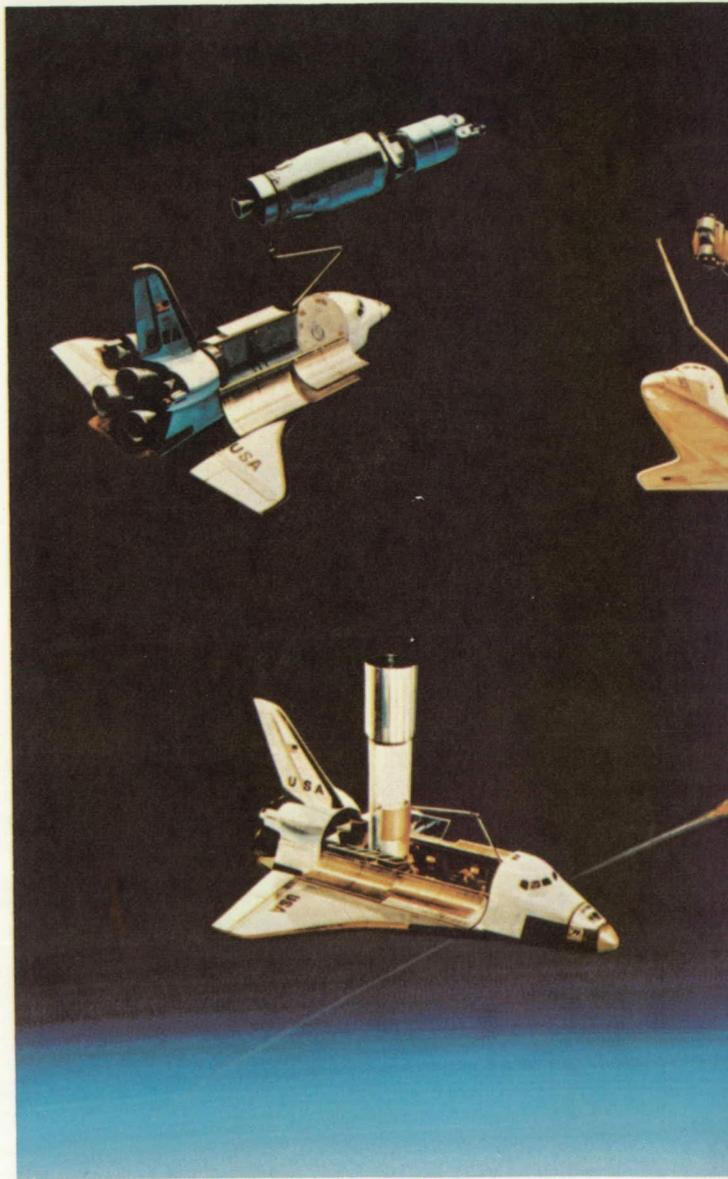

## PROGRAM OBJECTIVE

To establish a national space transportation capability that will

- Substantially reduce the cost of space operations and
- Provide a capability designed to support a wide range of scientific applications, defense, commercial, and international uses

