

1

NASA Technical Memorandum 83198

DO NOT DESTROY
RETURN TO LIBRARY


NASA-1M-83198

An Approximate Analytical Method for Vortex-Lift and Center of Pressure on the Slender Wing

Yin Xieyuan

DECEMBER 1981

*Translation from Acta Aeronautica
et Astronautica Sinica, Volume 1,
Number 1, 1980, pp. 1-6*

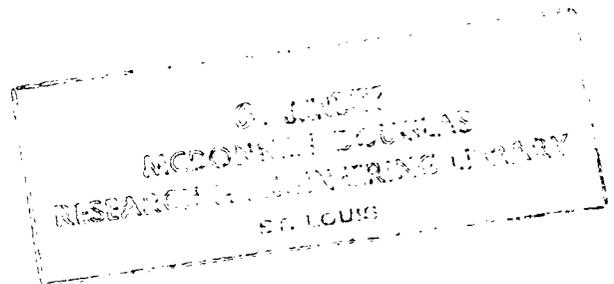

NASA

M82-10175

NASA Technical Memorandum 83198

An Approximate Analytical Method
for Vortex-Lift and Center
of Pressure on the Slender Wing

Yin Xieyuan
Science and Technology University of China
Hofei, China

Translated by
Grace C. Liu
Langley Research Center
Hampton, Virginia

Translation from Acta Aeronautica
et Astronautica Sinica, Volume 1,
Number 1, 1980, pp. 1-6

NASA

National Aeronautics
and Space Administration

**Scientific and Technical
Information Branch**

1981

ABSTRACT

This paper presents a simplified approximate analytical method for predicting vortex-lift and its center of pressure on the slender wing at high angle of attack, and proposes two empirical correlations. In comparison with other methods and experimental data, this method provides good accuracy and is suitable for preliminary design.

In recent years, interest in the high angle of attack nonlinear aerodynamics has increased considerably. This interest has led to studies of the separated vortex flow as an important nonlinear effect on flow characteristics: the theory of growth and breakdown of the separation vortex; the influence of vortex separation on aerodynamic characteristics related to aircraft; and how to utilize and control the separation vortex effectively. This is a very important and active research subject in aeronautics.

Currently, many theoretical methods have been developed in calculating the aerodynamic characteristics of leading-edge vortex separation, but they primarily relied on high speed computers. The object of this paper is to seek an approximate analytical method that can provide a fast estimate for various different wing planforms. This method will be extremely useful in the preliminary design stage for designers. Several years ago, the author suggested a simple method for the calculation of tip vortex-lift. Based upon the fundamental work in reference (1) this paper derived a formula for vortex-lift and its center of pressure. For the convenience of engineering estimation, two empirical correlation formulas were given as well. Recently, Purvis⁽²⁾ derived a similar analytical method. A comparison of references (1) and (2) shows that the results of reference (2) are achieved.

1. ANALYSIS

The Polhamus⁽³⁾ "leading-edge suction analogy" theory compares well with experimental work and has been widely used in engineering. The following expressions for vortex-lift coefficient come from that theory:

$$C_{L_{V,LE}} = K_{V,T} \sin^2 \alpha \cos \alpha / \cos \Lambda$$
$$K_{V,T} = K_P \left(1 - \frac{K_P}{\pi A} \right) \quad (1)$$

where K_P , $K_{V,T}$ are the constants for the potential-flow lift coefficient and the leading-edge thrust coefficient, respectively. Λ is the leading-edge swept angle. An important advantage of this theory is that one can study the nonlinear effect by using the potential flow theory. In application, equation (1) proves to be simple and reliable, but it provides only the total lift. If one desires the potential flow of the vortex-lift distribution, then panel or kernel function methods must be used to compute the leading-edge suction distribution. Nevertheless, this is not the

intent of this paper. In order to compute the vortex-lift and its center of pressure, we assume, as shown in figure 1, that the vortex-lift in the inboard wing section $E_1O'E$ is equivalent to the vortex-lift for the isolated wing section $E_1O'E$. In other words, we consider that the leading-edge-suction analogy is not only applicable to the whole wing planform but is also applicable to each individual inboard wing segment. Therefore,

$$C_{L_{V,LE}}'(y) = C_{L_{V,LE}}'(y)S'(y)/S_w \quad (2)$$

$$C_{L_{V,LE}}'(y) = K_{V,T}'(y) \sin^2 \alpha \cos \alpha / \cos \Lambda \quad (3)$$

$$K_T'(y) = K_P'(y) \left(1 - \frac{K_P'(y)}{\pi A'(y)} \right) \quad (4)$$

where the primed variables are for the inboard wing $E_1O'E$. $S'(y)$ and S_w denote the area of inboard wing and the area of whole wing, respectively.

In the calculation of tip-vortex-lift, one can further let the tips AB and A_1B_1 extend outboard an angle ϵ such that tips AB and A_1B_1 become part of the leading edge. Applying the suction analogy to the whole wing and inboard wing segment separately, one can obtain the total thrust and the thrust of the inboard wing segment. When $\epsilon \rightarrow 0$, it gives the tip-vortex-lift (see fig. 1).

$$C_{L_{V,SE}} = K_{V,SE} \sin^2 \alpha \cos \alpha \quad (5)$$

$$K_{V,SE} = \lim_{\epsilon \rightarrow 0} (K_{V,T}' / \tan \epsilon)_{AB' \text{ \& } A_1B_1'} \quad (6)$$

In addition, by the definition of vortex-lift distribution

$$C_{L_{V,LE}}(y) = \frac{2}{S_w} \int_0^y c(y) c_{l_V}(y) dy \quad (7)$$

where $c(y)$ is the local chord length and $c_{l_V}(y)$ is the sectional vortex-lift coefficient. Substituting equations (2) and (3) into equation (7) yields

$$c(y) c_{l_V}(y) = \frac{1}{2} \frac{d}{dy} \left[K_{V,T}'(y) S'(y) / \cos \Lambda \right] \sin^2 \alpha \cos \alpha \quad (8)$$

Inserting equations (5) and (6), one obtains the tip-vortex-lift

$$C_{L_{V,SE}} = \lim_{\epsilon \rightarrow 0} \left\{ \frac{1}{S_w^*} \int_{b/2}^{\frac{b}{2} + c_t \epsilon} \frac{d}{dy} [K'_{V,T}(y) S'(y) / \tan \epsilon] dy \sin^2 \alpha \cos \alpha \right\} \quad (9)$$

or

$$C_{L_{V,SE}} = \left[\frac{dK'_{V,T}}{d\epsilon} + \frac{K'_{V,T}}{S_w} \frac{dS'}{d\epsilon} \right]_{\epsilon=0} \sin^2 \alpha \cos \alpha \quad (10)$$

where b is span and c_t is wing tip chord length. Equation (10) has been derived in reference (2). Similarly, one can obtain the center of pressure of the leading edge and the tip-vortex-lift as

$$\frac{x_{V,LE}}{c_r} = \frac{\cos \Lambda}{S_w c_r K_{V,T}} \int_0^{b/2} x_{LE} \frac{d}{dy} [K'_T(y) S'(y) / \cos \Lambda] dy \quad (11)$$

$$\frac{x_{V,SE}}{c_t} = \frac{1}{S_w c_t K_{V,SE}} \lim_{\epsilon \rightarrow 0} \int_{b/2}^{\frac{b}{2} + c_t \epsilon} x'_{LE} \frac{d}{dy} [K'_T(y) S'(y) / \tan \epsilon] dy \quad (12)$$

respectively, where c_r is wing root chord length; x_{LE} is the chordwise distance measured from the leading edge; $x'_{LE} = x - x_{LE,t}$ is the chordwise distance measured from the wing tip leading edge. Equations (9) to (12) are the general expressions for the tip-vortex-lift and its center of pressure. From the expression, one can see that they are functions of potential-flow lift and the geometric configuration.

For slender wing, according to Jones' slender body theory, $K_p = \frac{\pi}{2} A$, $K_{V,T} = \frac{\pi}{4} A$. Substituting into equation (8) yields equation (13):

$$c(y) c_{t_v}(y) = \pi y / \cos \Lambda \sin^2 \alpha \cos \alpha \quad (13)$$

From the above equation, vortex-lift distribution obtained from the slender-body theory is a linear distribution; it agrees with conic flow assumptions. Figure 2 presents a comparison of the sectional vortex-lift and inboard-wing-section vortex-lift with reference (2). It shows very good agreement.

Substituting K_p and $K_{V,T}$ into equation (9) or (10), one obtains

$$C_{L_{V,SE}} = \pi A \left(\frac{c_t}{b} \right) \sin^2 \alpha \cos \alpha \quad (14)$$

$$C_{L_{V,SE}} = 4 \left(\frac{c_t}{b} \right) \frac{K_p^2}{\pi A} \sin^2 \alpha \cos \alpha$$

*Translator's note: error in original text.

Equation (14) is obtained under the slender-body theory; one can get better results by using more accurate values of K_p . Following the above equation $K_{V,SE} = \pi$ for a rectangular wing with a small aspect ratio, which agrees with Lamar's results in reference (4). Figure 3 compares the results obtained from equation (14) with

Lamar's (ref. (4)) and Purvis' (ref. (2)) results at $K_p = 2\pi A / (\sqrt{A^2 + 4} + 2)$. From the figures, it is shown that our results agree quite well with Lamar's. Purvis' results seem too high.

Substituting K_p and $K_{V,T}$ into equations (11) and (12), yields

$$\frac{x_{V,LE}}{c_r} = \frac{2}{3} \quad \text{(Triangular wing/delta wing)} \quad (15)$$

$$\frac{x_{V,SE}}{c'_r} = \frac{2}{3} \quad \text{(Trapezoidal wing)} \quad (16)$$

$$\frac{x'_{V,SE}}{c_t} = \frac{1}{2} \quad (17)$$

where c'_r is the wing root chord length corresponding to the trapezoidal wing leading edge, $c'_r = \frac{b}{2} \tan \Lambda$.

From equations (15), (16), and (17), one can see that center of pressure of the leading-edge vortex-lift and tip-vortex-lift obtained from the slender-body theory agrees with the existing results in the literature. Furthermore, one discovers that the center of pressure of the leading-edge vortex-lift and the center of pressure of tip-vortex-lift for a trapezoidal wing can be obtained separately. This gives the theoretical basis for the following empirical corrections.

2. EMPIRICAL CORRECTIONS

Experiments proved that the "suction analogy" theory is only applicable for a certain range of angle of attack and aspect ratio. In order to extend the applicability of this theory to a wider range, many researchers have introduced different empirical or semiempirical correction factors; as examples, the correction factor $K_{V,LE}^*$ for the leading-edge vortex-lift for a delta wing in reference (5), and the improvement factor $K_{V,SE}$ of tip-vortex-lift in reference (6), etc. This paper also provides the correction formula.

1. Center of pressure correction.

From equation (15), under the conic flow assumption, the center of pressure of tip-vortex-lift is located at $2/3$ root chord. However, the physical vorticity strength does not quite have a conic distribution, especially near the trailing edge. As angle of attack increases, the vortex core moves inboard. Following the experimental data analysis, the center of pressure for a delta wing is

$$\frac{x_{V,LE}}{c_r} = \frac{2}{3} - 0.3729/\tan \Lambda \quad (18)$$

If one further considers the effect of angle of attack on the movement of center of pressure, one should use

$$\frac{x_{V,LE}}{c_r} = \frac{x_p}{c_r} - \left[\left(\frac{x_p}{c_r} \right) - \left(\frac{2}{3} - 0.3729/\tan \Lambda \right) \right] \sin (3.6\alpha) \quad (19)$$

where x_p/c_r is the corresponding center of pressure for potential flow. The above equation is good for $\alpha < 25^\circ$.

2. Vortex-lift increment.

Experiments proved, due to the effects of the leading-edge vortex on the tip and rear half of the wing planform, that the vortex-lift for a delta wing obtained from experiments is higher than the calculated value. Reference (7) gives a correction factor.

$$k_V = 1.77 \left\{ 1 - \sin \frac{\pi\lambda}{2} \right\} \sin \frac{\pi\lambda}{2} + 1 \quad (20)$$

to represent the lift increment due to vortex interaction. Including the effect of trailing-edge sweep back angle, the above equation becomes

$$k_V = \left\{ 1.77 \left(1 - \sin \frac{\pi\lambda'}{2} \right) \sin \frac{\pi\lambda'}{2} + 1 \right\} \frac{\lambda'}{\lambda} \quad (21)$$

where λ is taper ratio, $\lambda = c_t/c_r$, $\lambda' = \frac{c_t}{c_t + b \tan \Lambda}$ is the taper ratio for a reference tapered delta wing. The above equations (19) and (20) are plotted in figure 4 and figure 5, respectively.

Based on the above analysis, for a trapezoidal wing, total vortex-lift and its center of pressure can be expressed as

$$C_{L_V} = K_{V,tot} \sin^2 \alpha \cos \alpha \quad (22)$$

$$K_{V,tot} = k_V \left[K_{V,LE}^* K_{V,T} / \cos \Lambda + K_{V,SE} \right] \quad (23)$$

$$\left(\frac{x}{c_r} \right)_V = k_V \left\{ K_{V,LE}^* K_{V,T} / \cos \Lambda \left(\frac{x_{V,LE}}{c_r'} \right) \left(\frac{c_r'}{c_r} \right) + K_{V,SE} \left(\frac{x_{后重心}}{c_r} \right) \right\} / K_{V,tot} \quad (24)$$

where $x_{后重心}$ represents the geometric center of the trapezoid. According to equation (17), the center of pressure of tip-vortex-lift is located near the center of the tip. By considering the effect of trailing-edge sweep back angle, one can approximately consider that center of pressure of the tip (vortex) is located at the geometric center of the trailing wing planform.

3. CONCLUDING REMARKS

Applying current methods to a set of trapezoid wings, the results compare quite well with experiments as shown in figure (6).

This method can be extended to the calculation of vortex-lift and its center of pressure for a wing-body combination. It is also not difficult to apply to a wing with a cranked leading edge such as a straked wing.

The compressibility effect can be taken care of by the Prandtl-Gothert law.

From the equations obtained in this paper, one can find a best combination of sweep back angle, taper ratio, and aspect ratio to achieve maximum vortex-lift. This method is suitable for preliminary design.

The author expresses his thanks to Professor Tung for his continued support and for reading the manuscript.

Langley Research Center
National Aeronautics and Space Administration
Hampton, VA 23665
November 6, 1981

REFERENCES*

- (1) Yin Xieyuan: An Approximate Estimate Method for Vortex-Lift on an Arbitrary Wing Planform With Small Aspect Ratio. The Science and Technology University of China, Study in Mechanics, No. 4, Apr. 1976.
- (2) Purvis, J. W.: Analytical Prediction of Vortex Lift. AIAA Paper 79-0363, Jan. 1979.
- (3) Polhamus, Edward C.: A Concept of the Vortex Lift of Sharp-Edge Delta Wings Based on a Leading-Edge Suction Analogy. NASA TN D-3767, 1966.
- (4) Lamar, John E.: Extension of Leading-Edge-Suction Analogy to Wings With Separated Flow Around the Side Edges at Subsonic Speeds. NASA TR R-428, 1974.
- (5) Mendenhall, Michael R.; and Nielsen, Jack N.: Effect of Symmetrical Vortex Shedding on the Longitudinal Aerodynamic Characteristics of Wing-Body-Tail Combinations. NASA CR-2473, 1975.
- (6) Lamar, John E.: Some Recent Applications of the Suction Analogy to Vortex-Lift Estimates. Aerodynamic Analyses Requiring Advanced Computers, Part II, NASA SP-347, 1975, pp. 985-1011.
- (7) Huang, T. L.: Method of Computation for Aerodynamic Characteristics in Longitudinal Plane for a Projectile at Large Angle of Attack. The Science and Technology University of China, Internal Report, Dec. 1976.
- (8) Kirby, D. A.: Low-Speed Wind-Tunnel Measurements of the Lift, Drag and Pitching Moment of a Series of Cropped Delta Wings. R. & M. No. 3744, British A.R.C., Nov. 1972.

*Editorial note: Titles have been added for references (3) through (6) and reference (8), which was used on a figure, has been added to list.

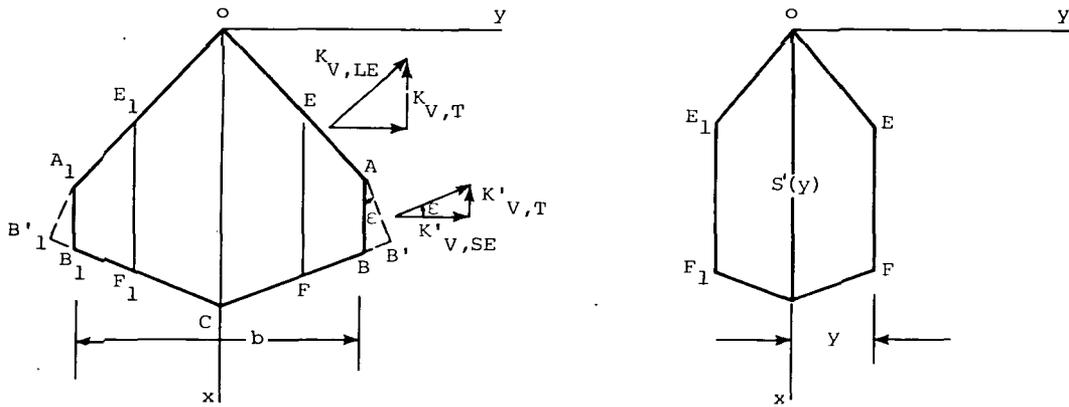


Figure 1.- Geometric relationship and configuration for tip-vortex-lift calculation.

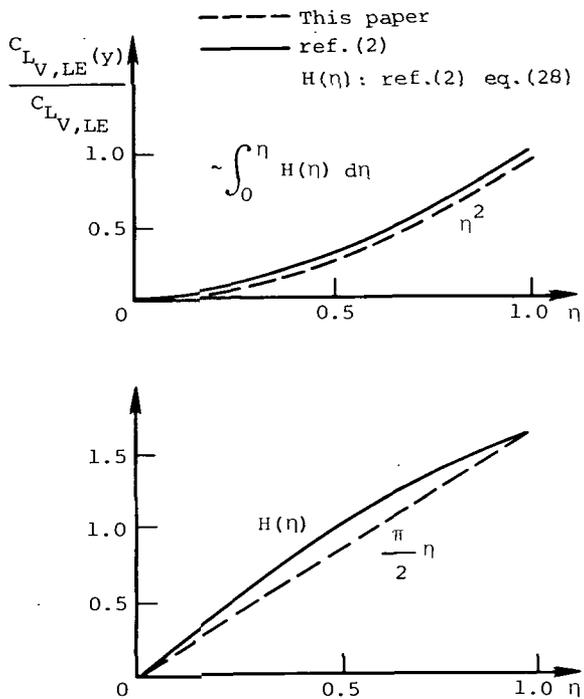


Figure 2.- Vortex-lift distribution: A comparison between this paper and ref. (2).

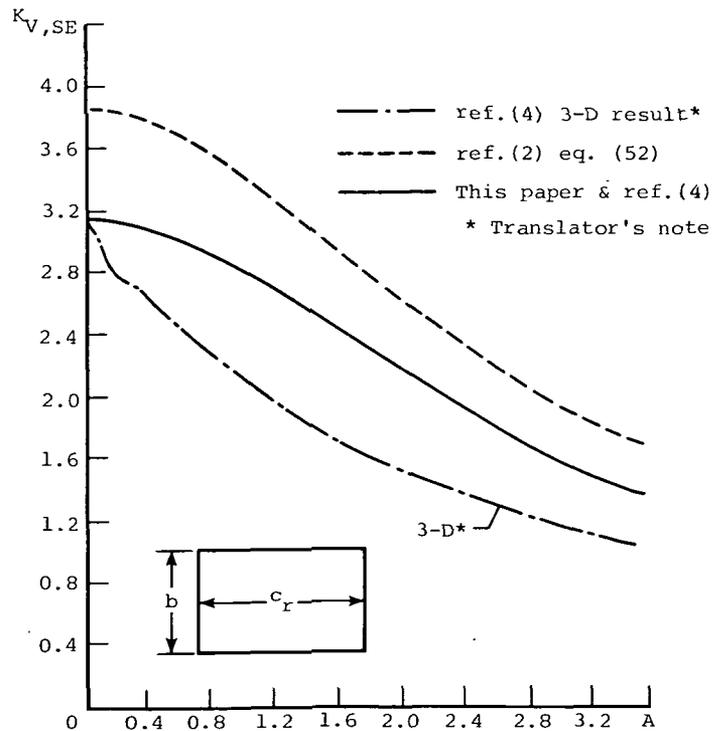


Figure 3.- Comparison of $K_{V,SE}$ for rectangular wing.

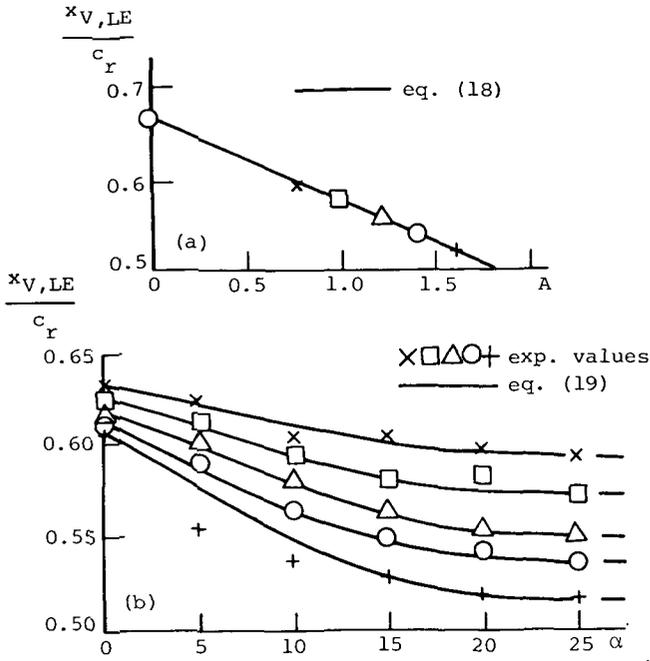


Figure 4.- Variation of center of pressure for vortex-lift as a function of aspect ratio and angle of attack, delta wing.

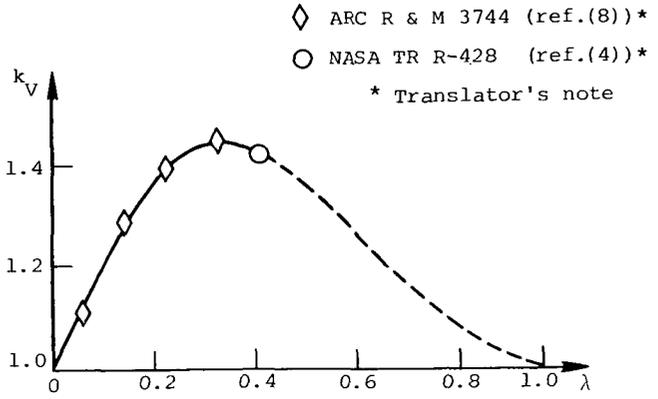


Figure 5.- Vortex-lift increment for a cropped delta wing.

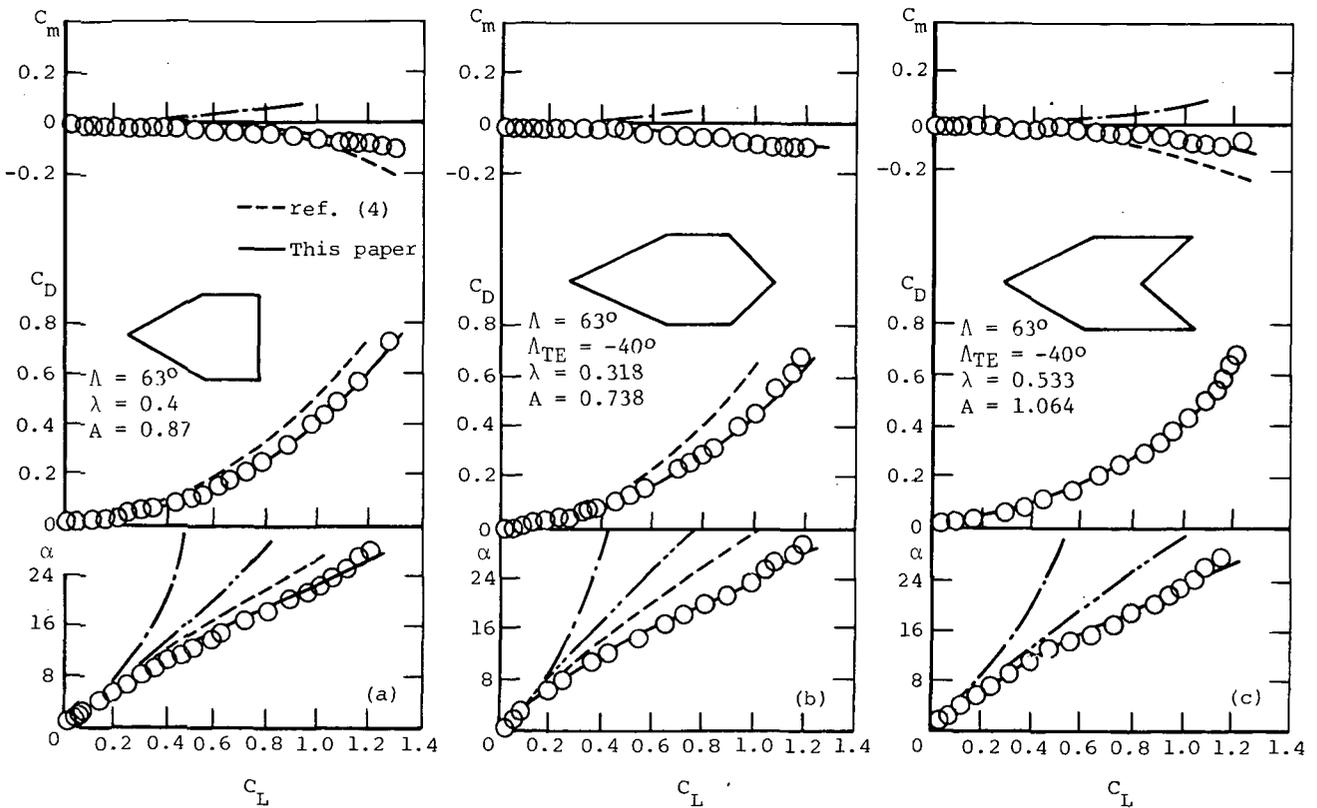


Figure 6.- Comparison of aerodynamic characteristics for a set of tapered trapezoidal wings.

1. Report No. NASA TM-83198		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle AN APPROXIMATE ANALYTICAL METHOD FOR VORTEX-LIFT AND CENTER OF PRESSURE ON THE SLENDER WING				5. Report Date December 1981	
				6. Performing Organization Code 530-04-13-01	
7. Author(s) Yin Xieyuan Science and Technology University of China				8. Performing Organization Report No. L-14848	
				10. Work Unit No.	
9. Performing Organization Name and Address NASA Langley Research Center Hampton, VA 23665				11. Contract or Grant No.	
				13. Type of Report and Period Covered Technical Memorandum	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, DC 20546				14. Sponsoring Agency Code	
15. Supplementary Notes Translated by Grace C. Liu, Langley Research Center, from Acta Aeronautica et Astronautica Sinica, Volume 1, Number 1, 1980, pp. 1-6.					
16. Abstract A simplified approximate analytical method for predicting vortex-lift and center of pressure on slender wings is presented. Two empirical corrections are proposed. The method is compared with experimental data and is shown to provide accurate estimates. (Translator)					
17. Key Words (Suggested by Author(s)) Center of pressure Vortex-lift Slender wings			18. Distribution Statement Unclassified - Unlimited Subject Category 01		
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 10	22. Price A02