

EXPERIMENTAL STUDY OF THE THERMAL STABILITY OF MATERIALS
IN HIGH TEMPERATURE OXYGEN-CONTAINING MEDIA

FOR U.S. GOVERNMENT AGENCIES
AND THEIR CONTRACTORS ONLY.

Y. Ye. Abaltusov, A. R. Bagramyan, A. M. Grishin and
V. I. Yukhvid

LIBRARY COPY

MAR 20 1986

LANGLEY RESEARCH CENTER
LIBRARY, NASA

HAMPTON, VIRGINIA

Translation of "Eksperimental'noye issledovaniye teplostoykosti materialov v vysokotemperaturnykh kislorodsoderzhashchikh sredakh", IN: Fizika Goreniya i Vzryva, vol. 17, Jan-Feb. 1981, pages 147-148, (A81-28022).

EXPERIMENTAL STUDY OF THE THERMAL STABILITY OF MATERIALS
IN HIGH TEMPERATURE OXYGEN-CONTAINING MEDIA

EXPERIMENTAL STUDY OF THE THERMAL STABILITY OF MATERIALS IN HIGH TEMPERATURE OXYGEN-CONTAINING MEDIA (National Aeronautics and Space Administration) 5 p
HC A02/MF A01 CSCL 07D G3/25 N86-21633
Unclas 05732

Y. Ye. Abaltusov, A. R. Bagramyan, A. M. Grishin and
V. I. Yukhvid

Translation of "Eksperimental'noye issledovaniye teplostoykosti materialov v vysokotemperaturnykh kislorodsoderzhashchikh sredakh", IN: Fizika Goreniya i Vzryva, vol. 17, Jan-Feb. 1981, pages 147-148, (A81-28022).



Y. Ye. Abaltusov, A. R. Bagramyan,
A. M. Grishin and V. I. Yukhvid


Recently, the problem of the thermal protection of hypersonic devices has become very pressing [1,2]. In order to determine the most effective materials for systems of thermal protection for such devices, an experimental study has been made of the interaction of several materials (graphites, of the brands ARV, PG-50 and V-1, tungsten and chromium carbide) with a high temperature medium containing oxygen.

The study used cast chromium carbide with a mass content of oxygen $C_{\text{свнз}}=13,1\%$, obtained by the SVS^{**} method [3-5]. The total content of the $(\text{Al}_2\text{O}_3-\text{C}_{\text{свнз}})$ admixtures did not exceed 1%. The initial components for the synthesis of chromium carbide were a powder of chromium anhydride CrO_3 (GOST 3776-6), aluminum, (АСД1) and carbon black (ИМ-15Т).

Comparative tests of the semi-spherical models made of the materials to be studied were carried out in a stream of an acetylene oxygen gas generator with the parameters $T_e=3000 \text{ R}$, $u_e=40 \text{ м/с}$, $C_e=0,2$, where T_e, u_e are the temperature and velocity of the flow on the stream axis, C_e -- concentration of oxygen. The required volume of information obtained during the tests, was provided by measuring the temperature of the surface T_p as a function of the time t , and determining the velocity of the mass removal from the surface of the samples $(\rho v)_w$ as a function of T_p , using the method described in [6]. In order to identify the processes of heat and mass exchange occurring on the surface, dimensionless measurements were performed of the velocity of the mass removal:

* Numbers in margin indicate pagination of foreign text.

** Expansion unknown.

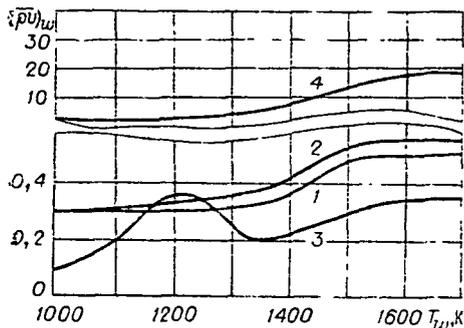

$(\bar{\rho v})_w = \frac{(\rho v)_w^*}{(\rho v)_w}$, where $(\rho v)_w^*$ --velocity of mass removal from the surface of the reference sample (B-1), $(\rho v)_w$ --velocity of mass removal from the surface of the sample being studied.

/148

Relative effectiveness of the materials studied. 1,2--PG-50, ARV graphite, respectively; 3--tungsten; 4--chromium carbide

The results are shown in the figure as a function of the surface temperature T_w . The higher the values of $(\bar{\rho v})_w$, the more effective is the material from the viewpoint of heat resistance. The figure graphically

shows the advantage of chromium carbide as compared with tungsten and graphite. The results of photographing and making a detailed study of the structure of the sample surfaces showed that on the surface of the models made of chromium carbide, a protective film of high melting Cr_2O_3 oxide is formed, whose melting point is higher than the melting point of chromium. With regard to the samples of tungsten and graphite, they oxidize intensively at temperatures which are far below the melting point. Thus, chromium carbide is the most effective of the materials examined for thermal protection in high temperature media containing oxygen in a temperature range of $300 < T_w < 1800$ K and an oxidant concentration of $0,1 < C_{\text{O}_2} < 0,3$ in a gas flow.

REFERENCES

1. A.M. Grishin. Matematicheskoye modelirovaniye nekotorykh nestatsionarnykh aerotermokhimicheskikh yavleniy (Mathematical modeling of certain nonstationary aerothermochemical phenomena). Tomsk, Izdatel'stvo TGU, 1973.
2. B.V. Alekseyev, A.M. Grishin. Vvedeniye v aerotermokhimiyyu (Introduction to Aerothermochemistry). Saratov, SGU Press, 1978.
3. A.G. Merzhanov, I.P. Borovinskaya. Dokl. AN SSSR, 1972, 204, 2.

4. A.G. Merzhanov, V.I. Yuhvid, et al. Authors abstract No. 617485; Byul. Otkrytiya izobreteniya, promyshlennyye obraztsy, tavarnyye znaki, 1978, 28.

5. A.R. Bagramyan, V.I. Yuhvid, et a. Zakonomernosti SVS litogo karbida khroma (Features of SVS of cast chromium carbide). Preprint OIKhF, 1979.

6. V.Ye. Abaltusov, G.N. Isakov. FGV, 1973, 9, 6.

ORIGINAL PAGE IS
OF POOR QUALITY

STANDARD TITLE PAGE

1. Report No. TM-88404		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle EXPERIMENTAL STUDY OF THE THERMAL STABILITY OF MATERIALS IN HIGH TEMPERATURE OXYGEN-CONTAINING MEDIA				5. Report Date March, 1986	
				6. Performing Organization Code	
7. Author(s) Y.Ye. Abaltusov, A.R. Bagramyan, A.M. Grishin and V.I. Yuxhvid				8. Performing Organization Report No.	
				10. Work Unit No.	
9. Performing Organization Name and Address SCITRAN Box 5456 Santa Barbara, CA 93108				11. Contract or Grant No. NASw- 4004	
				13. Type of Report and Period Covered Translation	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, D.C. 20546				14. Sponsoring Agency Code	
15. Supplementary Notes Translation of "Eksperimental'noye issledovaniye teplostoykosti materialov v vysokotemperaturnykh kislorodsoderzhashchikh sredakh", IN: Fi zika Goreniya i Vzryva, vol. 17, Jan-Feb. 1981, pages 147-148 (A81-28022).					
16. Abstract An experimental study is made of the interaction of several materials with a high temperature medium containing oxygen. The temperature of the surface was measured as a function of time. It is found that the higher the velocity of mass removal from the surface, the more effective is the material from the viewpoint of heat resistance.					
17. Key Words (Selected by Author(s))			18. Distribution Statement Unclassified - Unlimited		
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 5	22. Price