

**NATIONAL ADVISORY COMMITTEE
FOR AERONAUTICS**

REPORT No. 595

**FULL-SCALE TESTS OF A NEW TYPE N. A. C. A.
NOSE-SLOT COWLING**

**By THEODORE THEODORSEN, M. J. BREVOORT
GEORGE W. STICKLE, and M. N. GOUGH**



1937

AERONAUTIC SYMBOLS

1. FUNDAMENTAL AND DERIVED UNITS

	Symbol	Metric		English	
		Unit	Abbrevia- tion	Unit	Abbrevia- tion
Length-----	<i>l</i>	meter-----	m	foot (or mile)-----	ft. (or mi.)
Time-----	<i>t</i>	second-----	s	second (or hour)-----	sec. (or hr.)
Force-----	<i>F</i>	weight of 1 kilogram-----	kg	weight of 1 pound-----	lb.
Power-----	<i>P</i>	horsepower (metric)-----		horsepower-----	hp.
Speed-----	<i>V</i>	{kilometers per hour-----	k.p.h.	miles per hour-----	m.p.h.
		{meters per second-----	m.p.s.	feet per second-----	f.p.s.

2. GENERAL SYMBOLS

<p><i>W</i>, Weight = mg</p> <p><i>g</i>, Standard acceleration of gravity = 9.80665 m/s² or 32.1740 ft./sec.²</p> <p><i>m</i>, Mass = $\frac{W}{g}$</p> <p><i>I</i>, Moment of inertia = mk^2. (Indicate axis of radius of gyration <i>k</i> by proper subscript.)</p> <p><i>μ</i>, Coefficient of viscosity</p>	<p><i>ν</i>, Kinematic viscosity</p> <p><i>ρ</i>, Density (mass per unit volume)</p> <p>Standard density of dry air, 0.12497 kg-m⁻⁴-s² at 15° C. and 760 mm; or 0.002378 lb.-ft.⁻⁴ sec.²</p> <p>Specific weight of "standard" air, 1.2255 kg/m³ or 0.07651 lb./cu.ft.</p>
--	--

3. AERODYNAMIC SYMBOLS

<p><i>S</i>, Area</p> <p><i>S_w</i>, Area of wing</p> <p><i>G</i>, Gap</p> <p><i>b</i>, Span</p> <p><i>c</i>, Chord</p> <p><i>b²</i>, Aspect ratio</p> <p>\bar{S}, True air speed</p> <p><i>V</i>, True air speed</p> <p><i>q</i>, Dynamic pressure = $\frac{1}{2}\rho V^2$</p> <p><i>L</i>, Lift, absolute coefficient $C_L = \frac{L}{qS}$</p> <p><i>D</i>, Drag, absolute coefficient $C_D = \frac{D}{qS}$</p> <p><i>D_o</i>, Profile drag, absolute coefficient $C_{D_o} = \frac{D_o}{qS}$</p> <p><i>D_i</i>, Induced drag, absolute coefficient $C_{D_i} = \frac{D_i}{qS}$</p> <p><i>D_p</i>, Parasite drag, absolute coefficient $C_{D_p} = \frac{D_p}{qS}$</p> <p><i>C</i>, Cross-wind force, absolute coefficient $C_C = \frac{C}{qS}$</p> <p><i>R</i>, Resultant force</p>	<p><i>i_w</i>, Angle of setting of wings (relative to thrust line)</p> <p><i>i_t</i>, Angle of stabilizer setting (relative to thrust line)</p> <p><i>Q</i>, Resultant moment</p> <p><i>Ω</i>, Resultant angular velocity</p> <p>$\frac{\sqrt{l}}{\mu}$, Reynolds Number, where <i>l</i> is a linear dimension (e.g., for a model airfoil 3 in. chord, 100 m.p.h. normal pressure at 15° C., the corresponding number is 234,000; or for a model of 10 cm chord, 40 m.p.s. the corresponding number is 274,000)</p> <p><i>C_p</i>, Center-of-pressure coefficient (ratio of distance of <i>c.p.</i> from leading edge to chord length)</p> <p><i>α</i>, Angle of attack</p> <p><i>ε</i>, Angle of downwash</p> <p><i>α_o</i>, Angle of attack, infinite aspect ratio</p> <p><i>α_i</i>, Angle of attack, induced</p> <p><i>α_a</i>, Angle of attack, absolute (measured from zero-lift position)</p> <p><i>γ</i>, Flight-path angle</p>
--	--

REPORT No. 595

**FULL-SCALE TESTS OF A NEW TYPE N. A. C. A.
NOSE-SLOT COWLING**

By **THEODORE THEODORSEN, M. J. BREVOORT
GEORGE W. STICKLE, and M. N. GOUGH**

Langley Memorial Aeronautical Laboratory

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

HEADQUARTERS, NAVY BUILDING, WASHINGTON, D. C.

LABORATORIES, LANGLEY FIELD, VA.

Created by act of Congress approved March 3, 1915, for the supervision and direction of the scientific study of the problems of flight (U. S. Code, Title 50, Sec. 151). Its membership was increased to 15 by act approved March 2, 1929. The members are appointed by the President, and serve as such without compensation.

JOSEPH S. AMES, Ph. D., *Chairman*,
Baltimore, Md.

DAVID W. TAYLOR, D. Eng., *Vice Chairman*,
Washington, D. C.

CHARLES G. ABBOT, Sc. D.,
Secretary, Smithsonian Institution.

LYMAN J. BRIGGS, Ph. D.,
Director, National Bureau of Standards.

ARTHUR B. COOK, Rear Admiral, United States Navy,
Chief, Bureau of Aeronautics, Navy Department.

WILLIS RAY GREGG, B. A.,
Chief, United States Weather Bureau.

HARRY F. GUGGENHEIM, M. A.,
Port Washington, Long Island, N. Y.

SYDNEY M. KRAUS, Captain, United States Navy,
Bureau of Aeronautics, Navy Department.

CHARLES A. LINDBERGH, LL. D.,
New York City.

WILLIAM P. MACCRACKEN, Jr., LL. D.,
Washington, D. C.

AUGUSTINE W. ROBINS, Brigadier General, United States Army,
Chief Matériel Division, Air Corps, Wright Field, Dayton,
Ohio.

EUGENE L. VIDAL, C. E.,
Director of Air Commerce, Department of Commerce.

EDWARD P. WARNER, M. S.,
New York City.

OSCAR WESTOVER, Major General, United States Army,
Chief of Air Corps, War Department.

ORVILLE WRIGHT, Sc. D.,
Dayton, Ohio.

GEORGE W. LEWIS, *Director of Aeronautical Research*

JOHN F. VICTORY, *Secretary*

HENRY J. E. REID, *Engineer in Charge, Langley Memorial Aeronautical Laboratory, Langley Field, Va.*

JOHN J. IDE, *Technical Assistant in Europe, Paris, France*

TECHNICAL COMMITTEES

AERODYNAMICS

POWER PLANTS FOR AIRCRAFT

AIRCRAFT STRUCTURES AND MATERIALS

AIRCRAFT ACCIDENTS

INVENTIONS AND DESIGNS

Coordination of Research Needs of Military and Civil Aviation

Preparation of Research Programs

Allocation of Problems

Prevention of Duplication

Consideration of Inventions

LANGLEY MEMORIAL AERONAUTICAL LABORATORY

LANGLEY FIELD, VA.

Unified conduct, for all agencies, of
scientific research on the fundamental
problems of flight.

OFFICE OF AERONAUTICAL INTELLIGENCE

WASHINGTON, D. C.

Collection classification, compilation,
and dissemination of scientific and tech-
nical information on aeronautics.

REPORT No. 595

FULL-SCALE TESTS OF A NEW TYPE N. A. C. A. NOSE-SLOT COWLING

BY THEODORE THEODORSEN, M. J. BREVOORT, GEORGE W. STICKLE, and M. N. GOUGH

SUMMARY

An extended experimental study has been made in regard to the various refinements in the design of engine cowlings as related to the propeller-nacelle unit as a whole, under conditions corresponding to take-off, climb, and normal flight. The tests were all conducted at full scale in the 20-foot wind tunnel. This report presents the results of a novel type of engine cowling, characterized by the fact that the exit opening discharging the cooling air is not, as usual, located behind the engine but at the foremost extremity or nose of the cowling. This type of cowling is inherently capable of producing two to three times the pressure head obtainable with the normal type of cowling because the exit opening is located in a field of considerable negative pressure. Thus identical conditions of cooling can be obtained at correspondingly lower air speeds. In gen-

eral, the efficiency is found to be high, owing to the fact that higher velocities may be used in the exit opening.

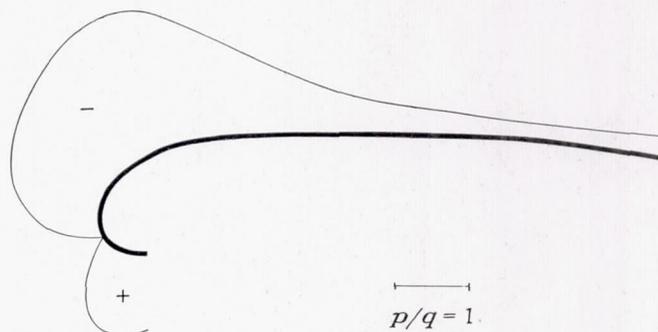


FIGURE 1.—Typical pressure distribution on cowlings. Test arrangement 7-2-0-3-0.

Flight tests of a temporary installation showed promising results.

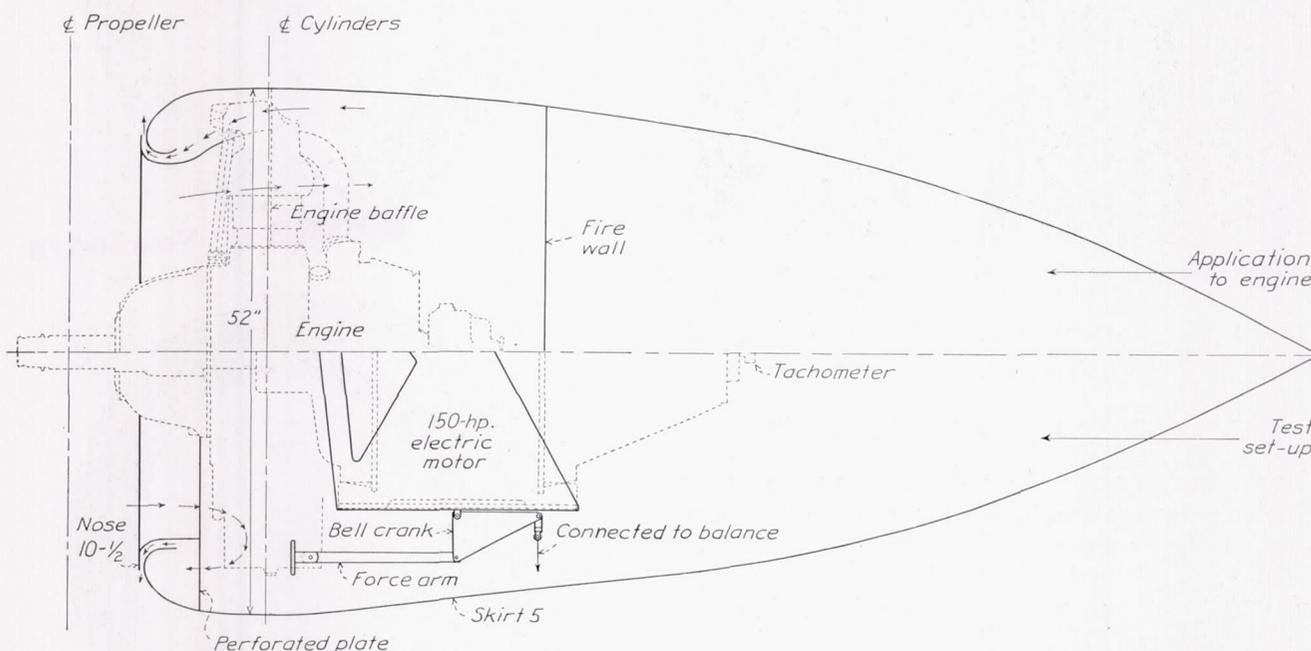


FIGURE 2.—Drawing showing the principle of operation of the nose-slot cowling. The upper half of the drawing shows the practical application; the lower half shows the arrangement of the test installation with nose 10-1/2.

INTRODUCTION

It has been shown in the report on conventional cowlings (reference 1) that the available pressure head across the engine is very nearly equal to $1 q$ and that only in very extreme cases, as by the use of skirt flaps, may this

value be exceeded by about 20 percent. The pressure-distribution tests reported in the same reference show that a negative pressure of several times the velocity head is available near the nose of the cowling. (See fig. 1.) Since cases may be expected to occur in which a

large pressure drop is desired, a special type of cowling was designed to have the exit opening at or very near the front portion of the cowling in order to make use of this available pressure drop. At first thought, this arrangement might be expected to be inefficient as a fairly large disturbance in the entire boundary layer is normally expected. Peculiarly enough the contrary seemed to be the case, the very first design showing a very high efficiency. The air enters the cowling in the central front opening in the usual manner, passes through the engine baffles, and is then returned across

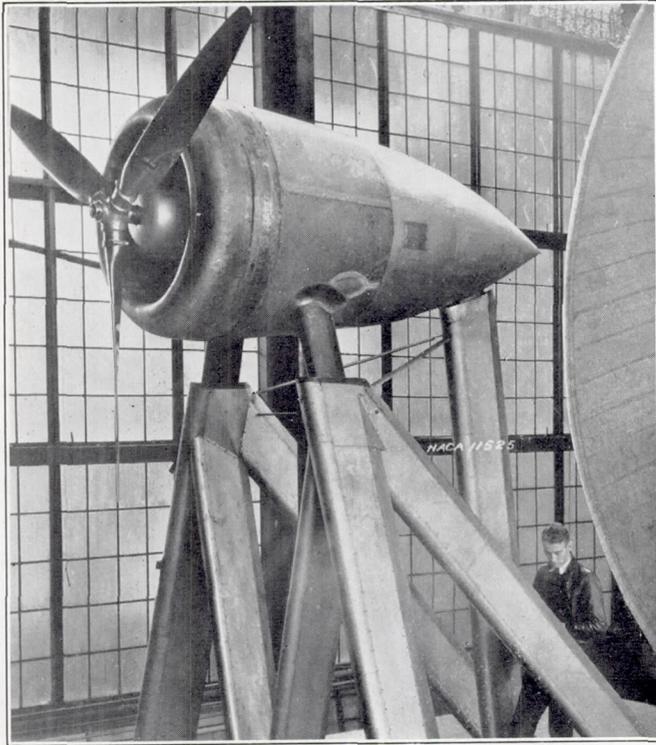


FIGURE 3.—The test installation in the 20-foot wind tunnel.

the top of the cylinders, guided into the nose ring, and discharged through the slot.

DESCRIPTION OF TEST ARRANGEMENT

Figure 2 gives a general idea of the test arrangement; the engine resistance was replaced by a perforated plate just behind the nose ring, as shown in the lower half of the figure. This plate contained several hundred 1-inch holes, any number of which could be closed as desired, thus representing engines of a wide variety of conductivities. Figure 3 is a photograph of the installation with the original nose, which is designated 10- $\frac{1}{2}$, the first numeral giving the number of the nose and the second numeral giving the exit opening in inches, as some of these noses were tested with two sizes of exit opening. Figure 4 (a) is a photograph of nose 10- $\frac{1}{2}$; figures 4 (b) and 4 (c) show two more designs, 11-1 and 12-1, tested successively. A total of nine cowlings of



(a) Nose 10- $\frac{1}{2}$. (b) Nose 11-1



(b) Nose 11-1. (a) Nose 10- $\frac{1}{2}$



(c) Nose 12-1.

FIGURE 4.—Photographs of noses tested.

this type were tested, all of which are shown with the proper designations in the scale drawing (fig. 5). All the cowling nose rings were given the same major di-

tests were conducted in connection with these tests as the requisite information was available from reference 1.

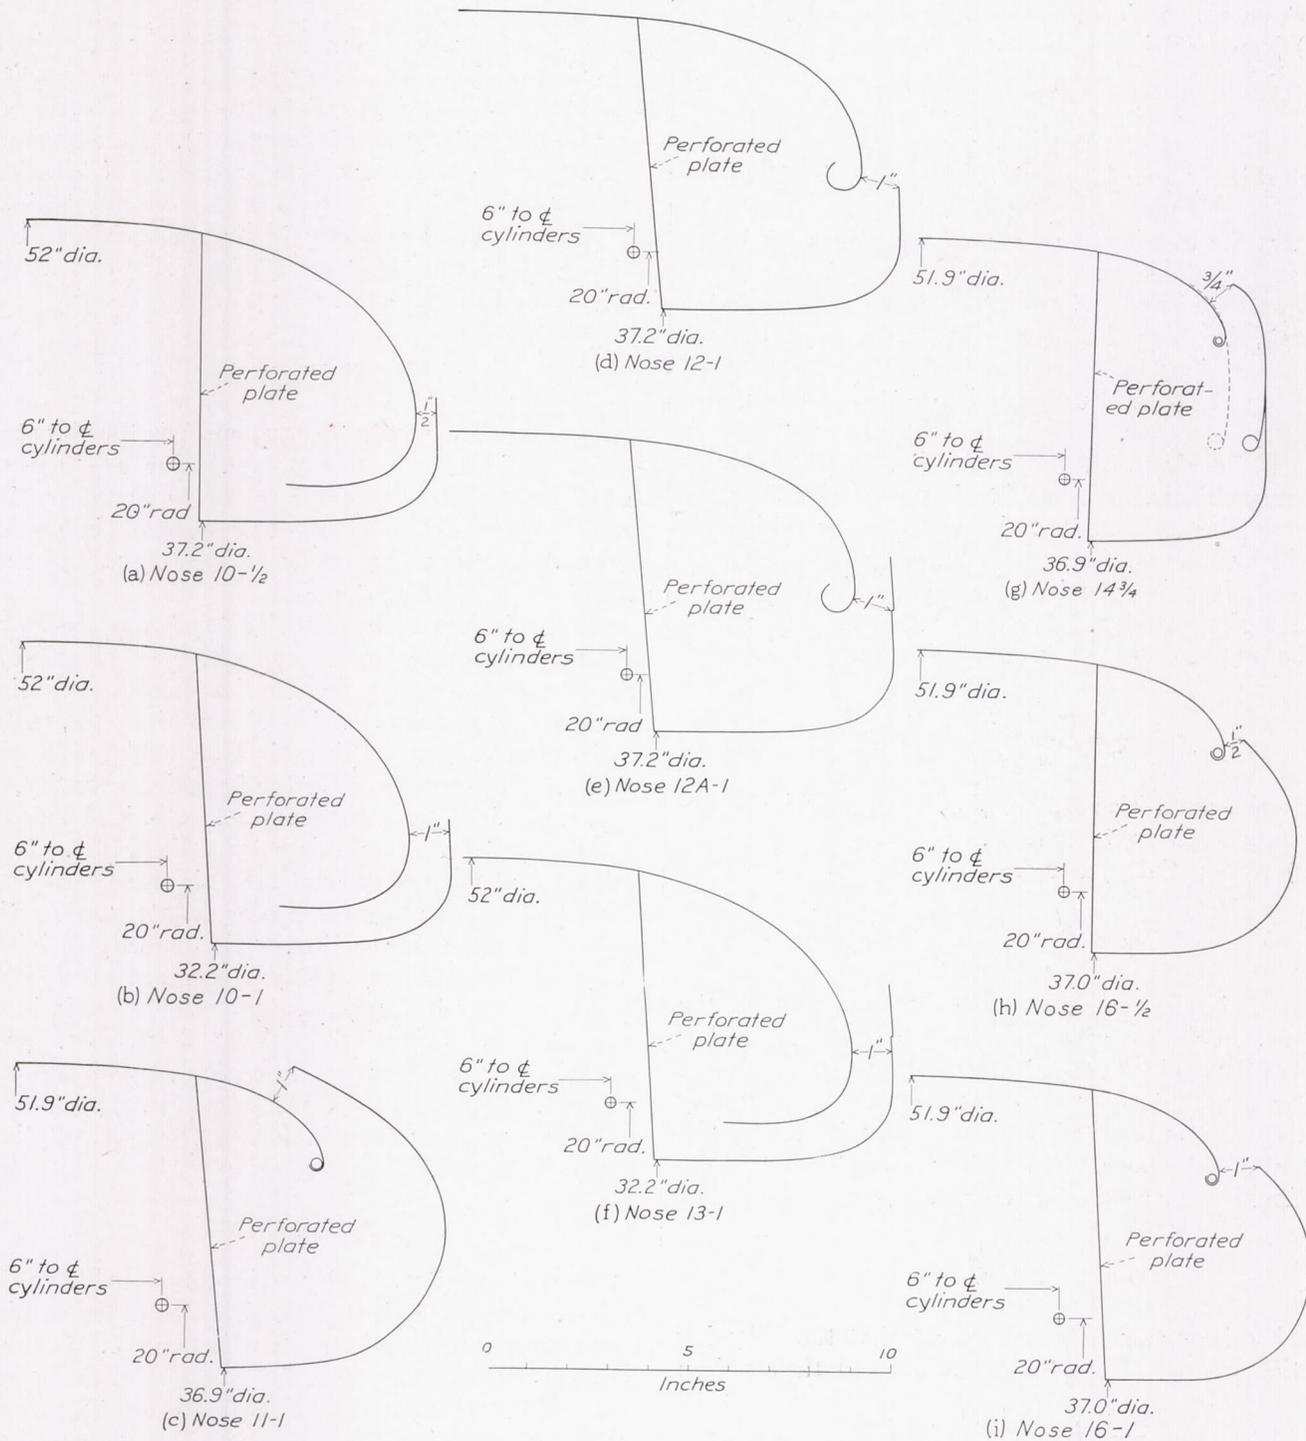


FIGURE 5.—Drawings of the nine nose-cowlings tested.

mensions; all were fitted to the same perforated disk comprising the test resistance. The conductivity of this perforated disk could be changed at will between the limits of 0 to 0.09, thus simulating the complete range of actual installations. No heat-transmission

The tests were performed at both high and low air speeds, the low speeds for the purpose of obtaining the cooling from the propeller slipstream alone. The tests were conducted as usual, with the propeller both on and off for the sake of completeness.

DEFINITION OF PARAMETERS USED

The various terms used in the paper will be defined and briefly discussed. These terms are taken from the report on conventional cowlings (reference 1).

(1) Pump efficiency, defined as

$$\eta_p = \frac{Q\Delta p}{(D-D_0)V}$$

where Q is the quantity of air per second which is forced through the resistance.

Δp , the associated pressure drop across the same resistance.

D , the observed drag of the cowling-nacelle unit.

D_0 , the drag of a body of identical major dimensions but with the cooling channels closed and the outline faired into a streamline contour.

V , the air speed.

It may thus be seen that $Q\Delta p$ is the useful work done per second and that $(D-D_0)V$ is the work expended. It will be realized from the following that the pump efficiency is a very precise measure of the aerodynamic quality of the design. For the case of the power run, or the propeller on, the pump efficiency is given by the formula

$$\eta_p = \frac{(\Delta p/q)^{3/2}}{\eta_0 - \eta} \frac{P_c S}{KF}$$

where the quantities K , F , P_c , S , η_0 , and η will be defined under the next headings.

(2) Conductivity, defined as

$$K = \frac{A/F}{\sqrt{\Delta p/q}} = \frac{Q}{\sqrt{\Delta p/q} F V}$$

where F is the maximum cross-sectional area of the nacelle. This quantity gives the inverse of the resistance of the engine to the air flow and is nondimensional.

The apparent conductivity of the exit opening may similarly be represented by a value K_2 which is simply the ratio of the area of the exit opening to that of the maximum cross section of the nacelle, or

$$K_2 = \frac{A_2}{F}$$

It has been shown in reference 1 that the following relation exists in regard to the flow through the cowling:

$$\frac{\Delta P}{q} = \left(\frac{Q}{FV} \right)^2 \left[\frac{1}{K^2} + \frac{1}{K_2^2} \right]$$

where ΔP is equal to the total head of the air entering the cowling minus the static pressure in the region of the exit opening. The former pressure is always found to be very nearly equal to the total head of the air stream. This equation will be referred to as "the equation of flow regulation."

(3) Propeller load factor or disk-loading coefficient, defined as

$$P_c = \frac{P}{qSV}$$

where P is the power supplied to the propeller shaft, and S is the disk area of the propeller. This quantity is in the first order proportional to the contraction of the propeller slipstream (reference 1). Equal values of P_c thus essentially represent geometrically identical flow pictures. In the analysis of the results obtained for various propellers a certain simplicity is achieved in comparing such results at a fixed value of P_c .

(4) Net efficiency, defined as

$$\eta_n = \frac{RV}{P}$$

in the case of the power runs, where R is the thrust of the unit as given by the thrust scale. The net efficiency obtained with the cooling air shut off and the outline faired into a carefully streamline contour is needed to determine the pump efficiency for the case of propeller on and is designated η_0 .

(5) In reference 2 the quantity $\Delta p/n^2$ was chosen as a characteristic function to represent the cooling properties of any particular combination of engine cowling and propeller at the condition of zero air speed, representing the case of cooling airplane engines on the ground. The square root of the foregoing quantity, or $\sqrt{\Delta p}/n$, obtained from experimental data, is given as a function of the advance-diameter ratio V/nD . It is realized that the propeller at zero air speed acts very much the same as any other blower in regard to the pressure produced for cooling. The quantity $\Delta p/n^2$ or $\sqrt{\Delta p}/n$ is therefore very nearly a constant for a given propeller at a given blade-angle setting and is independent of the revolution speed of the propeller. It is referred to in the following discussion as the "pressure constant." The speed of the propeller may be considered known from the results of a previous investigation (reference 3).

TEST RESULTS

The test results are shown in condensed form in table I. Column 1 gives the designation of the cowling nose corresponding to those given in figure 5. Column 2 shows the propeller used, the zero standing for propeller off and the B_x and C, for the purpose of the present paper, representing two normal 10-foot propellers (reference 3). The main difference between B_x and C is that B_x has a well-shaped airfoil section extending down close to the hub, whereas C has a round shank. Column 3 shows the apparent conductivity of the exit opening. Column 4 is the conductivity of the test resistance or "engine." Columns 5, 6, and 7 show the pressures (in terms of q) with respect to the test resist-

ance. Column 5 gives values of p_f , the pressures in front of, and column 6 gives values of p_r , the pressures in the rear of the resistance; column 7 gives values of Δp , the pressure difference across the resistance. Column 8 gives the drag in usual coefficient form C_D . Column 9 is given, for convenience, to illustrate the approximate forces involved by giving the drag at 100 miles per hour or, more exactly, at a q of 25.6 pounds per square foot for the drag run; i. e., the forward net

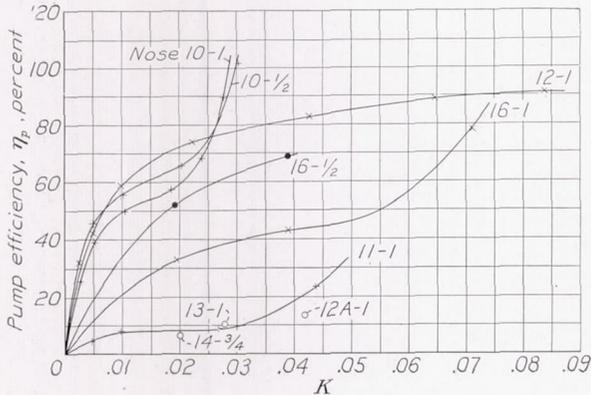


FIGURE 6.—Dependency of pump efficiency on conductivity.

thrust at the same tunnel speed and at a fixed disk loading for the propeller runs. Column 10 gives the net efficiency η_n for the propeller runs, and column 11 the pump efficiency η_p as defined in the preceding section.

In figure 6 the pump efficiency has been plotted against the conductivity for various noses. It was the very successful result on the original nose 10-1/2 that prompted the study of several other designs, which were later tested. Noses 10, 12, and 16 all tend to reach a 100-percent efficiency at conductivities beyond 0.07 and 0.08. Nose 10 actually exceeds 100-percent pump efficiency even at the low conductivity 0.03.

The reason for the relatively large efficiencies obtained with this type of cowling lies in the fact that the velocities in the exit opening more nearly equal those of the external air stream. The beneficial effect of large exit velocities on the pump efficiency has been conclusively demonstrated in reference 1. The reason for the larger exit velocities is due to the fact that a much larger pressure difference is available and that part of this difference may be used in the exit opening, leaving at least the usual pressure drop for cooling.

The noses showing a very low efficiency in figure 6 were designed primarily with the intention of obtaining a large available pressure drop at zero air speed. On the whole, the design was found to be critical, a minor change in the external contour sufficing to drop the efficiency from near 100 percent to a small quantity. It was found that a projecting edge at the slot, such as embodied in cowlings 12, 13, or 14 in figure 5, was very detrimental to the efficiency. It was also noted that the highest efficiency was obtained by locating the

outlet in a converging-flow field, as for nose 10, in contrast to the low efficiency obtaining by locating the outlet back of the maximum velocity, as for nose 11.

As is evident from the introduction, the main reason for designing and testing the new nose-slot cowling is the large pressure available for cooling. Figure 7 is a plot of the results in table I giving the available pressure against the engine conductivity, K . It is seen that the available pressure difference created by this type of cowling lies in the region of $2q$ and in a few cases even exceeds $2.5q$. The decrease in available pressure with increased conductivity is caused by the fairly small size of the apparent exit conductivities. It may be observed from the equation of flow regulation previously given that a small value of K_2 means that a large part of the pressure difference created by the cowling is used to produce velocity head in the exit opening and the remaining pressure Δp available for cooling is correspondingly reduced. If the pressure available for cooling Δp is added to the velocity head in the slot, it is found that the total, which is ΔP , is of a nearly constant magnitude for any given cowling.

The values K_2 have been inserted for the various noses shown in figure 7. It has been shown in reference 1 that $K=0.05$ may be considered as the normal value of the conductivity of a well-baffled single-row radial engine. The average available pressure of the nose cowling at this conductivity is seen to approximate $1q$ and to reach a maximum of about $1\frac{1}{4}q$ with nose 16-1. A comparison of the available pressure drops and efficiencies at any desired conductivity with those obtained

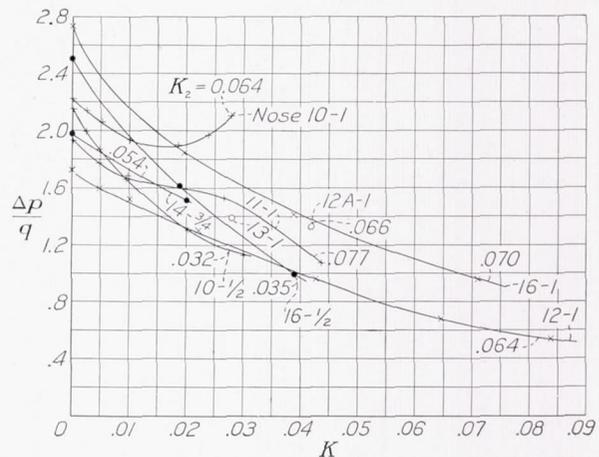


FIGURE 7.—Available pressure differences across the engine plotted against conductivity.

on the regular cowlings (reference 1) shows that the nose-slot cowlings for most conditions are superior; hence, at an available pressure drop across the engine of about $1q$, the efficiencies on some of the nose-slot cowlings approach 100 percent, while in the normal type they were of the order of 60 to 80 percent.

No attempt was made during the present investigation to test nose-slot cowlings with large exit conductivities. Such cowlings should provide a larger pres-

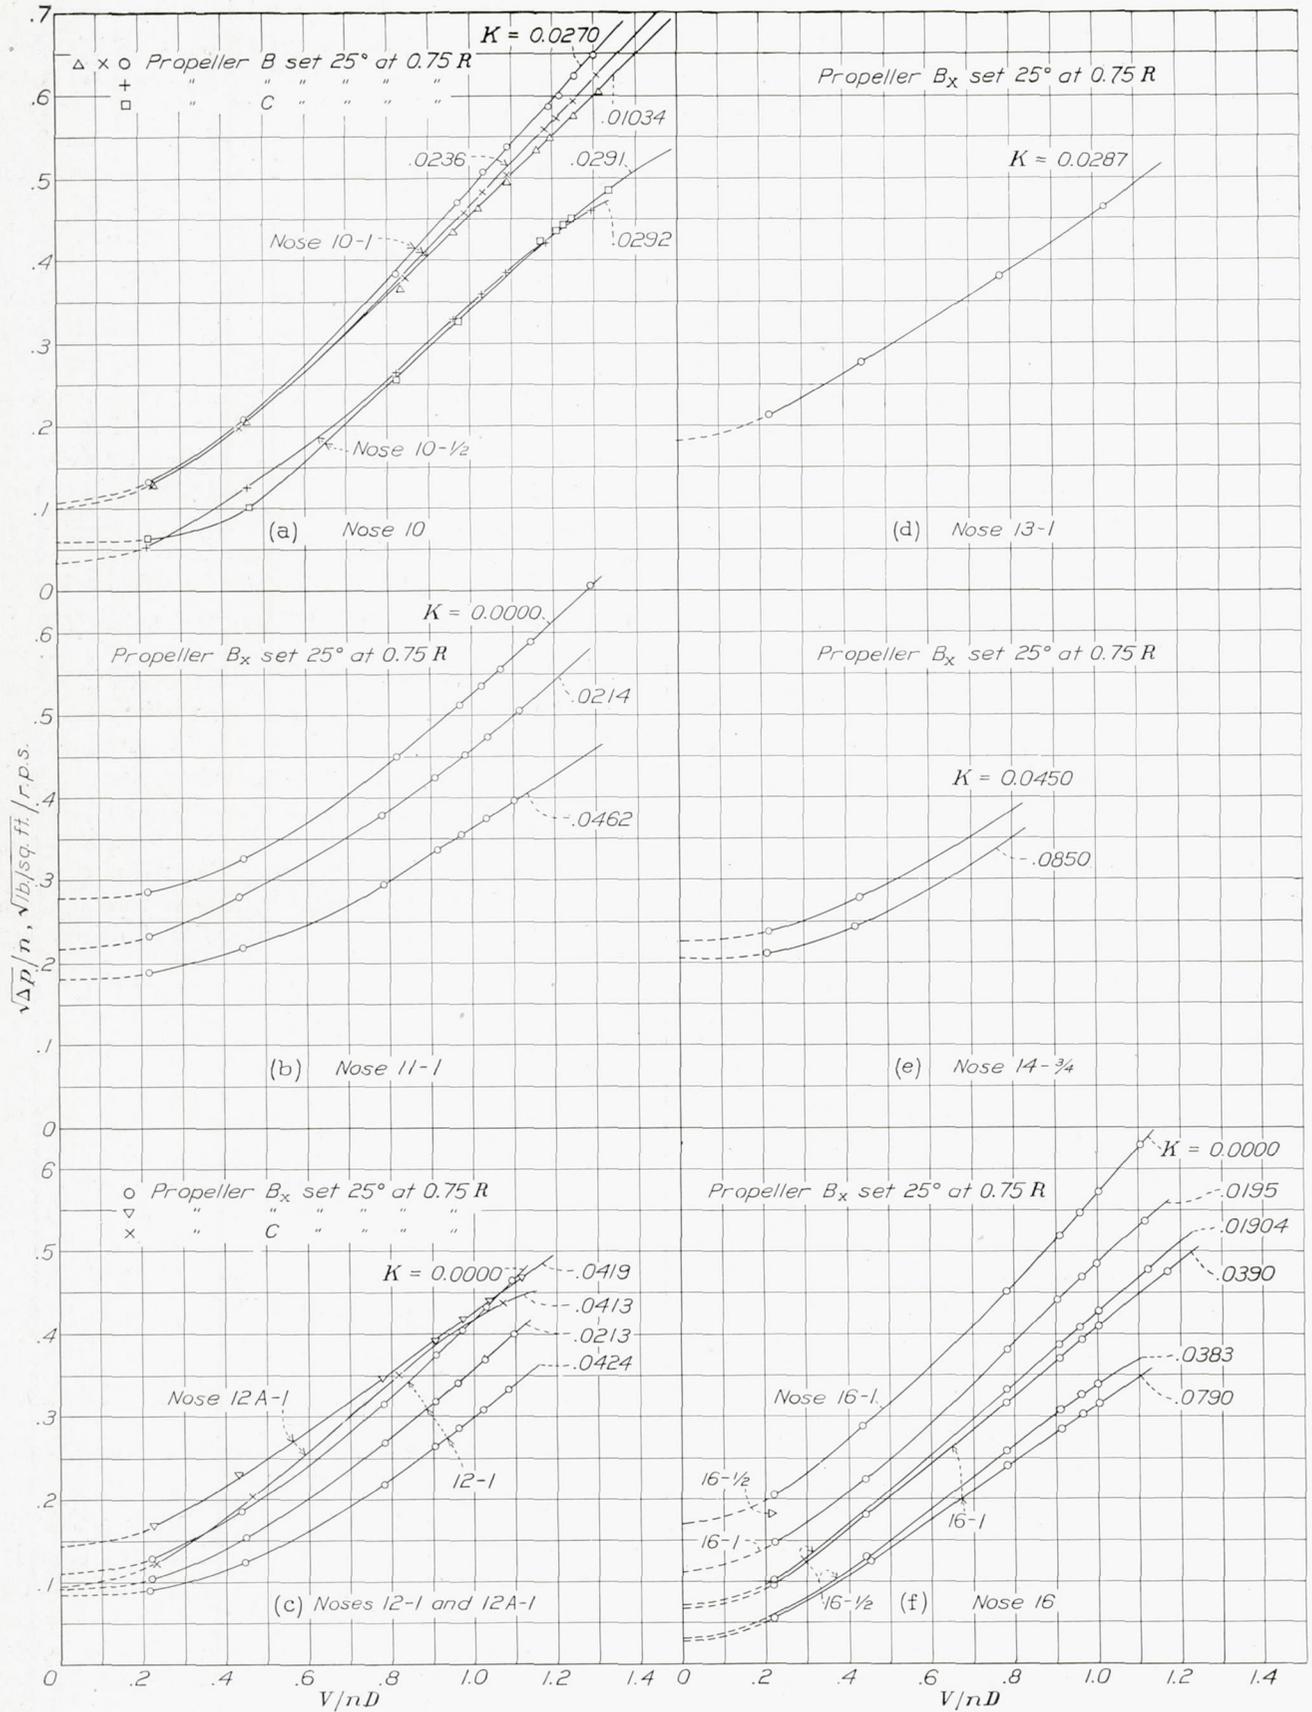


FIGURE 8.—Pressure constants $\sqrt{\Delta p}/n$ against V/nD for the several noses tested.

sure drop for cooling, probably at some expense of pump efficiency. Since the largest pressure drop is



FIGURE 9.—Original cowling installation on the Curtiss BFC-1 airplane.

needed only at low speed, the matter of some efficiency loss is not important. It is perfectly possible to provide means for changing the exit opening during flights.



FIGURE 10.—Close-up of the original cowling on the Curtiss BFC-1 airplane

The experimental results in regard to the pressure drop available for cooling with the propeller slipstream

at zero air speed are given in figure 8 for noses 10, 11, 12, 13, 14, and 16. These results will be more fully understood by a study of reference 2, which shows the pressure constant at zero air speed for various normal and special arrangements. Noses 10, 12, and 16 are seen to give very low pressure constants at the ground point. Nose 11 compares favorably with the best results previously obtained on normal cowlings. Noses 13 and 14 also give large available pressures on the ground. It is noticed, in general, that the noses giving high available pressures on the ground are not efficient in the flight condition, and vice versa.

PRELIMINARY FLIGHT TESTS OF THE NEW TYPE N. A. C. A. COWLING ON BFC-1 AIRPLANE

In order that the practical value of the information on the new type of cowling might be demonstrated,



FIGURE 11.—The Curtiss BFC-1 airplane equipped with the nose-slot cowling.

the following flight tests were made with a preliminary cowling installation on the Curtiss BFC-1 airplane.

The Curtiss BFC-1 airplane (fig. 9) has a Wright SGR-1510 twin-row, 14-cylinder, geared engine, completely equipped with pressure baffles and a wide-chord ring cowling (fig. 10). A selective thermocouple installation allowed the determination of temperature for 28 positions on the heads and bases of the 14 cylinders. In this condition a level flight was made for reference purposes at maximum allowable continuous power for a sufficient length of time to allow all temperatures to stabilize. Complete data identifying the flight were recorded.

The new N. A. C. A. nose-slot cowling was then installed as shown in figure 11. This photograph does not show the external oil cooler, as in figure 1, as it had been removed just before the picture was taken. The installation used nose 16-1 (fig. 5) and was arranged as shown in the upper part of figure 2, except for the fact that the internal dividing wall was located between the heads and the cylinder barrel and below the spark plugs. The wall extended back to the second row. The flow is approximately as indicated by arrows in the upper part of figure 2. Close-up photographs of the design are shown in figure 12.

Another change consisted in reversing the pressure baffles on the cylinder heads to suit the reversed flow direction; the baffles on the barrel were redesigned to fit the new installation. Three thermocouples on front cylinders were moved from the rear to the front spark-plug bosses. It should be noted that the location of the exhaust manifold (see fig. 10) could not be

flight reproducing the conditions of the one with the original cowling was made. From this flight the following comparison was obtained.

At the same density altitude and with the same power but with a free-air temperature lower by 13°C ., the indicated air speed was, within the accuracy of measurement, the same. The oil, both in and out, was 6°C ..

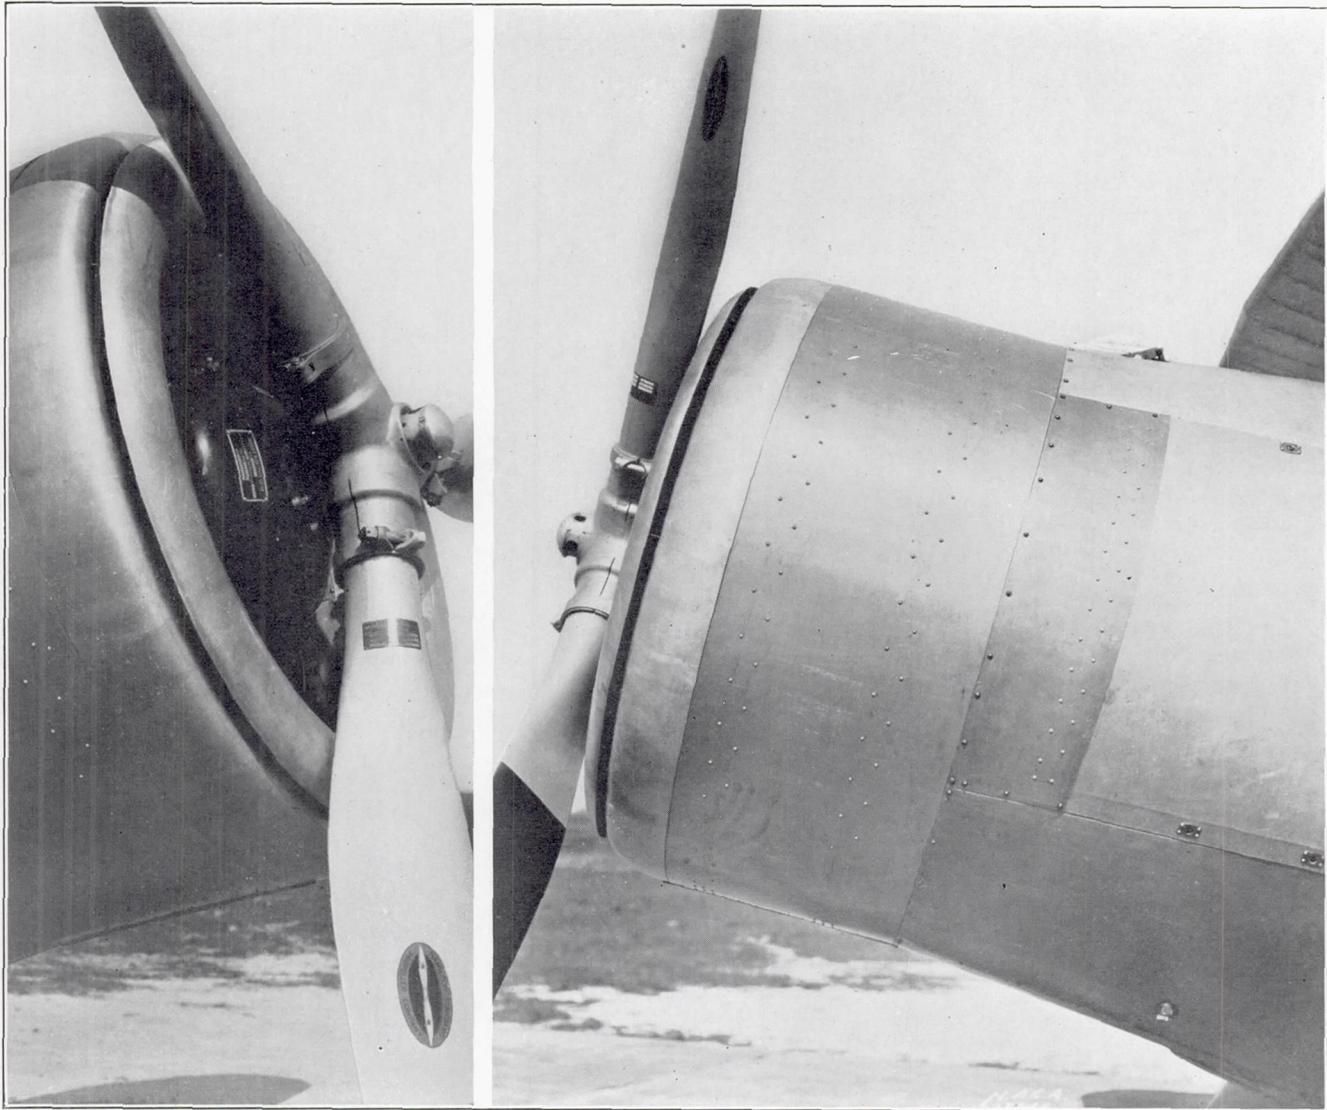


FIGURE 12.—Close-ups of the nose-slot cowling installed on a Curtiss BFC-1 airplane.

changed for these tests and that therefore it was entirely enclosed within the new cowling.

The operation on the ground of the engine with the new nose-slot cowling indicated the absence of excessive heating, which would have prevented flight tests. There was some evidence of unusual local heating, mainly of the rubber connections on the intake manifold. It is appreciated that the completely new arrangement might cause some change in local heating of parts not designed for the type of air flow provided by this cowling. No evidence of overheating appeared. After a cautious take-off and climb, a level

cooler; the cylinder bases consistently averaged 30°C .. cooler; the heads, 35°C .. hotter, there being little difference between the front and rear plugs; and the magneto, 30°C .. cooler. No difficulties were experienced. The handling characteristics of the airplane, the visibility, the local cockpit heating, and the engine-operating conditions appeared unchanged. Another flight verified the results.

An inspection immediately after the engine was stopped on the ground revealed nothing amiss; the engine accessory or auxiliary compartment and the cowling aft of the cylinders was exceptionally cool. It

was interesting to observe that, as expected, the nose of the cowling was the hottest point.

In view of the fact that the air used to cool the heads contains also the accumulated heat obtained from the exhaust manifold, the results obtained indicate very promising possibilities for considerably improved cooling when the baffling and manifold locations are designed specifically for this type cowling. Possible speed gains are also indicated when the external cowling lines may be incorporated in a new design rather than adapted to an already existing afterbody shape.

GENERAL CONCLUSIONS

1. It has been found that the new type nose-slot cowling produces pressure differences of 2 to 2.5 times the velocity head of the air stream, as compared with 1 velocity head for the normal cowling. This fact is important as regards cooling in climb and at low air speeds.

2. A well-designed nose-slot cowling shows pump efficiencies close to 100 percent, owing to the fact that a smaller fraction of the total available pressure head is needed in the resistance, thus leaving a larger velocity head in the exit opening and reducing the impact or mixing losses that take place as the low-energy cooling air re-enters the main air stream.

3. Nose-slot cowlings designed for high efficiency at normal speed were found to be slightly inferior to normal cowlings in regard to cooling in the propeller slipstream. A specially designed nose-slot cowling for improving the cooling on the ground was found to be inefficient at normal-flight speeds in comparison with normal cowlings. A two-slot design, in which one slot may be closed at will, may therefore be recommended for cases in which good cooling from the propeller slipstream is particularly important.

4. The nose-slot cowling is critical in regard to design. It has been found that the exit opening should be located so as to permit the low-energy air to join the main air stream in a convergent-flow field, that is, ahead of the point of maximum velocity. High efficiency is obtained only by exercising great care in the detail design.

5. Preliminary flight tests gave promising results.

LANGLEY MEMORIAL AERONAUTICAL LABORATORY,
NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS,
LANGLEY FIELD, VA., June 5, 1936.

REFERENCES


1. Theodorsen, Theodore, Brevoort, M. J., and Stickle, George W.: Full-Scale Tests of N. A. C. A. Cowlings. T. R. No. 592, N. A. C. A., 1937.


2. Theodorsen, Theodore, Brevoort, M. J., and Stickle, George W.: Cooling of Airplane Engines at Low Air Speeds. T. R. No. 593, N. A. C. A., 1937.

3. Theodorsen, Theodore, Stickle, George W., and Brevoort, M. J.: Characteristics of Six Propellers Including the High-Speed Range. T. R. No. 594, N. A. C. A., 1937.

TABLE I.—CONDENSED TEST RESULTS

1	2	3	4	5	6	7	8	9	10	11	
Nose	Propeller	K_2	K	$\frac{P_r}{q}$	$\frac{P_r}{q}$	$\frac{\Delta P}{q}$	C_D	Drag in pounds at $q=25.6$ pounds/square foot, or thrust at $1/\sqrt{P_r} = 1.8$ and $q=25.6$ pounds/square foot	η_n	η_p	
10-1/2	0	0.032	0.0000	0.922	-1.250	2.170	0.1287	48.6	-----	0.000	
10-1/2	0		.00248	.904	-1.083	1.986	.1330	50.2	-----	.318	
10-1/2	0		.00497	.904	-.955	1.860	.1388	52.4	-----	.457	
10-1/2	0		.00981	.929	-.756	1.683	.1499	56.6	-----	.552	
10-1/2	0		.0200	.926	-.388	1.313	.1573	59.4	-----	.652	
10-1/2	0		.0304	.918	-.216	1.135	.1475	55.7	-----	1.013	
10-1/2	B	.0292	.881	-.153	1.034	-----	250	-----	0.716	1.278	
10-1/2	C	.0291	.854	-.190	1.043	-----	247	-----	.708	.998	
10-1	0	0.064	.0000	.911	-1.313	2.223	.1372	51.8	-----	.000	
10-1	0		.00267	.930	-1.209	2.140	.1433	54.1	-----	.260	
10-1	0		.00527	.923	-1.117	2.040	.1510	57.0	-----	.386	
10-1	0		.01034	.927	-1.010	1.938	.1671	63.1	-----	.500	
10-1	C		.01862	.926	-.966	1.894	.1965	74.2	-----	.568	
10-1	0		.0238	.925	-1.058	1.983	.209	78.9	-----	.680	
10-1	0		.0278	.928	-1.166	2.005	.205	77.6	-----	.899	
10-1	B		.0270	.891	-1.101	1.992	-----	236.0	-----	.676	1.243
10-1	B		.0236	.887	-.955	1.840	-----	239.0	-----	.685	1.117
10-1	B		.01034	.901	-.907	1.808	-----	242.0	-----	.693	.555
11-1	0	0.077	.0000	.925	-1.009	1.935	.209	113.0	-----	.000	
11-1	B _x		.0000	.913	-1.306	2.220	-----	200.0	-----	.573	.000
11-1	0		.00484	.918	-.849	1.768	.342	129.0	-----	.0493	
11-1	0		.00979	.934	-.731	1.665	.381	144.0	-----	.0780	
11-1	0		.0267	.943	-.593	1.536	.416	157.0	-----	.0865	
11-1	B _x		.0214	.923	-.800	1.723	-----	166.0	-----	.476	.197
11-1	B _x		.0462	.918	-.172	1.090	-----	180.0	-----	.516	.252
11-1	0		.0438	.950	-.114	1.064	.318	120.0	-----	.233	
12-1	0		0.064	.0000	.933	-.794	1.725	.1245	47.0	-----	.000
12-1	B _x			.0000	.920	-.561	1.482	-----	244.0	-----	.698
12-1	0	.00493		.914	-.681	1.594	.1345	50.8	-----	.426	
12-1	0	.00988		.910	-.595	1.504	.1427	53.9	-----	.584	
12-1	0	.0222		.914	-.386	1.301	.1557	58.8	-----	.739	
12-1	B _x	.0213		.920	-.175	1.095	-----	243.0	-----	.696	.574
12-1	0	.0427		.932	-.017	.948	.1589	60.0	-----	.827	
12-1	0	.0647		.939	.261	.679	.1520	57.4	-----	.890	
12-1	B _x	.0424		.915	.137	.779	-----	242.0	-----	.693	.645
12-1	0	.0839		.933	.397	.536	.1475	55.7	-----	.908	
12A-1	B _x	0.066	.0419	.920	-.613	1.531	-----	150.5	-----	.431	.276
12A-1	0		.0419	.957	-.373	1.330	.580	219.0	-----	.137	
12A-1	C		.0413	.863	-.569	1.433	-----	147.0	-----	.42	.240
13-1	0	0.066	.0281	.938	-.446	1.384	.575	217.0	-----	.099	
13-1	B _x		.0287	.913	-.767	1.679	-----	143.0	-----	.41	.203
14-3/4	0	0.054	.0000	.948	-1.038	1.983	.527	199.0	-----	.000	
14-3/4	B _x		.0000	-----	-----	-----	-----	-----	-----	.44	.000
14-3/4	B _x		.0201	.955	-.563	1.519	.651	246.0	-----	.070	
14-3/4	0		-----	-----	-----	-----	.625	236.0	-----	-----	
14-3/4	0		-----	-----	-----	-----	-----	105.0	-----	.30	-----
14-3/4	B _x		-----	-----	-----	-----	-----	-----	-----	-----	-----
16-1	0	0.070	.0000	.921	-1.809	2.730	.1324	50.0	-----	.000	
16-1	B _x		.0000	.897	-1.750	2.645	-----	244.0	-----	.700	.000
16-1	B _x		.01950	.894	-1.030	1.923	-----	219.0	-----	.627	.490
16-1	0		.01965	.903	-.946	1.848	.263	99.5	-----	.325	
16-1	0		.0388	.918	-.488	1.408	.263	99.5	-----	.427	
16-1	B _x		.0390	.893	-.499	1.391	-----	216.0	-----	.620	.568
16-1	B _x		.0790	.888	-.061	.826	-----	226.0	-----	.648	.683
16-1	0		.0711	.908	-.049	.958	.1967	74.3	-----	.782	
16-1/2	0	0.035	.0000	.890	-1.621	2.513	.1290	48.7	-----	.000	
16-1/2	B _x		.01904	.878	-.668	1.547	-----	234.0	-----	.671	.557
16-1/2	0		.01920	.903	-.712	1.614	.1872	70.7	-----	.518	
16-1/2	0		.0390	.907	-.095	1.000	.1679	63.4	-----	.688	
16-1/2	0		.0383	.875	-.082	.955	-----	235.0	-----	.673	.561
16-1/2	B _x		-----	-----	-----	-----	-----	-----	-----	-----	-----



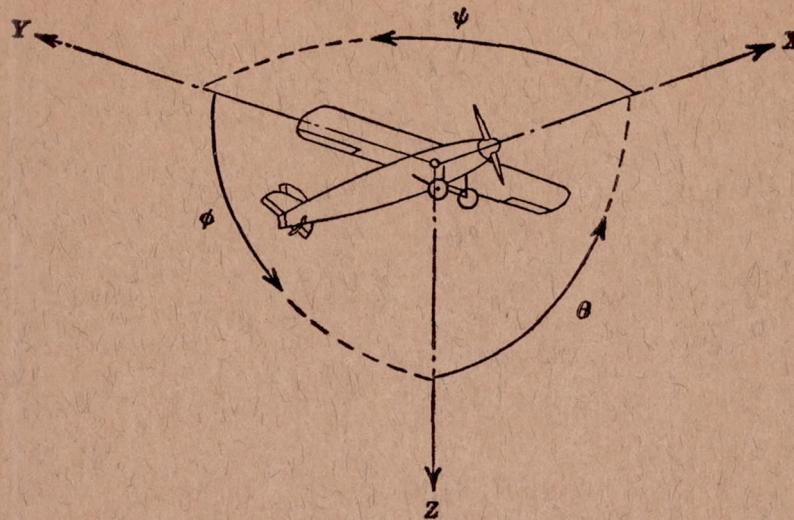

Positive directions of axes and angles (forces and moments) are shown by arrows

Axis		Force (parallel to axis) symbol	Moment about axis			Angle		Velocities	
Designation	Sym- bol		Designation	Sym- bol	Positive direction	Designa- tion	Sym- bol	Linear (compo- nent along axis)	Angular
Longitudinal	X	X	Rolling	L	Y → Z	Roll	ϕ	u	p
Lateral	Y	Y	Pitching	M	Z → X	Pitch	θ	v	q
Normal	Z	Z	Yawing	N	X → Y	Yaw	ψ	w	r

Absolute coefficients of moment

$$C_l = \frac{L}{qbS}$$

(rolling)

$$C_m = \frac{M}{qcS}$$

(pitching)

$$C_n = \frac{N}{qbS}$$

(yawing)

Angle of set of control surface (relative to neutral position), δ . (Indicate surface by proper subscript.)

4. PROPELLER SYMBOLS

D , Diameter

p , Geometric pitch

p/D , Pitch ratio

V , Inflow velocity

V_s , Slipstream velocity

T , Thrust, absolute coefficient $C_T = \frac{T}{\rho n^2 D^4}$

Q , Torque, absolute coefficient $C_Q = \frac{Q}{\rho n^2 D^5}$

P , Power, absolute coefficient $C_P = \frac{P}{\rho n^3 D^5}$

C_s , Speed-power coefficient = $\sqrt[5]{\frac{\rho V^5}{P n^2}}$

η , Efficiency

n , Revolutions per second, r.p.s.

Φ , Effective helix angle = $\tan^{-1} \left(\frac{V}{2\pi r n} \right)$

5. NUMERICAL RELATIONS

1 hp. = 76.04 kg-m/s = 550 ft-lb./sec.

1 metric horsepower = 1.0132 hp.

1 m.p.h. = 0.4470 m.p.s.

1 m.p.s. = 2.2369 m.p.h.

1 lb. = 0.4536 kg

1 kg = 2.2046 lb.

1 mi. = 1,609.35 m = 5,280 ft.

1 m = 3.2808 ft.

