

*PAINTING  
10-27  
50228*

NASA Case No. LEW-15,896-1  
PRINT FIG. 1

NOTICE

*P-12*

The invention disclosed in this document resulted from research in aeronautical and space activities performed under programs of the National Aeronautics and Space Administration. The invention is owned by NASA and is, therefore, available for licensing in accordance with the NASA Patent Licensing Regulation (14 Code of Federal Regulations 1245.2).

To encourage commercial utilization of NASA-owned inventions, it is NASA policy to grant licenses to commercial concerns. Although NASA encourages nonexclusive licensing to promote competition and achieve the widest possible utilization, NASA will consider the granting of a limited exclusive license, pursuant to the NASA Patent Licensing Regulations, when such a license will provide the necessary incentive to the licensee to achieve early practical application of the invention.

Address inquiries and all applications for license for this invention to NASA Patent Counsel, Lewis Research Center, Mail Stop LE-LAW, 21000 Brookpark Road, Cleveland, OH 44135. Approved NASA forms for application for nonexclusive or exclusive license are available from the above address.

Serial No.: 08/439,544

Filed Date: 5/11/95 (NASA-Case-LEW-15896-1) PROCESS  
FOR NON-CONTACT REMOVAL OF ORGANIC  
COATINGS FROM THE SURFACE OF  
PAINTINGS Patent Application  
(NASA. Lewis Research Center) 12 p

N95-27702

Unclas

G3/27 0050228

NASA CASE NO. LEW-15,896-1

AWARDS ABSTRACT

PROCESS FOR NON-CONTACT REMOVAL OF ORGANIC COATINGS FROM  
THE SURFACE OF PAINTINGS

The present invention discloses a method of removing organic protective coatings from a painting. In the present invention degraded protective coatings such as lacquers, acrylics, natural resins, carbons, soot, and polyurethane are safely removed from the surface of a painting without contact to the surface of the painting. This method can be used for restoration of paintings when they have been damaged, through age, fire, etc.

INVENTOR(S): Bruce A. Banks  
Sharon K. Rutledge

Employer: NASA Lewis Research Center  
Serial No.: 08/439,544  
Filed: 5/11/95

PROCESS FOR NON-CONTACT REMOVAL OF  
ORGANIC COATINGS FROM THE  
SURFACE OF PAINTINGS

ORIGIN OF THE INVENTION

5           The invention described herein was made by employees of the United States Government and may be manufactured and used for the Government for governmental purposes without the payment of any royalties thereon or therefore.

FIELD OF THE INVENTION

10           The method disclosed in the instant application enables the removal of degraded organic coatings. In the present invention, degraded organic protective coatings such as lacquers, acrylics, natural resins, and polyurethane are safely removed without contact of the surface of the painting. The invention can remove all types of organic protective  
15 coatings uniformly over the surface without any surface structure altering physical contact. Low spots, as well as high spots on the painting surface, can be cleaned equally well. Polyurethane is easily removed by reacting with atomic oxygen without damage to the underlying painting.

DESCRIPTION OF RELATED ART

20           Patents 5,019,441, 4,330,586; and 4,234,621 are processes for removal and rebinding of paintings. This involves the surface that the painted canvas is attached to, which is the back of the painting and does not involve the removal of discolored organic coatings from the front painted surface. Patents 4,246,295 and 3,698,925 involve the application  
25 of a protective coating to the surface of a painting which does not

involve removal of discolored organic coatings from the surface. Patent 3,698,925 involves the application of a coating to a painting surface which is water soluble and can be removed by dissolving, but the coating of the patent must be what is on the surface in order to remove it in this manner. Patent 5,236,672 involves a process for removal of gaseous organic species from gas exhaust systems to enable meeting of the Clean Air Standard. This process does not involve removal of stable, solid, organic surface coatings and does not discuss rastering techniques for uniform exposure.

#### SUMMARY OF THE INVENTION

This invention is directed to the combination of an atomic oxygen source, means for forming an atomic oxygen beam, and means for controlling the beam to remove a protective organic coating from the surface of a painting. In the specific embodiment of the invention, a painting consisting of inorganic paints and a translucent protective organic layer is subjected to an atomic oxygen beam in a controlled manner which removes the protective coating without damaging the underlying paint. Previous techniques used to remove organic protective coatings typically consisted of immersion of the painting in organic solvents or rolling a swab containing the solvent over the surface of the painting.

There is no known solvent which will remove polyurethane without damaging the painting. For acrylic lacquer and natural resins, the current cleaning techniques allow contact of either a swab or liquid with the surface of the painting which alters the surface by removing pigment.

smearing the pigment or altering the shape of the canvas surface.

Swabbing is unable to remove lacquer effectively from the low spots on the paintings without damaging the adjoining pigment. Thus, restoration  
5 typically invites damage to the painting.

It is an object of the present invention to use an atomic oxygen plasma to remove organic protective coatings from paintings.

It is another object of the invention to use a directed beam of atomic oxygen to remove organic protective coatings from paintings.

10 It is a further object of the invention to use a directed beam of atomic oxygen which rapidly oxidizes surface organic protective coatings until inorganic pigment particles are exposed, which then greatly slows down the rate of oxidation of organic binder materials surrounding the pigment particles.

15 It is still yet another object of the present invention to use the differences between the fast rate of surface organic protective coatings removal and the subsequent slow rate of oxidation of the organic binder surrounding the pigment particles, thus allowing all the surface organic protective coating to be removed independent of its thickness and surface  
20 shape.

It is a further object of the invention to use a translating system to allow rastering of the atomic oxygen beam by moving the painting under the beam to enable uniform oxidation of the painting surface.

#### BRIEF DESCRIPTION OF THE DRAWINGS

25 The object, advantages, and novel features of the invention will be

more fully apparent from the following detailed description when read in connection with the accompanying drawings in which:

5 Figure 1. displays a cross section of the painting prior to atomic oxygen beam treatment.

Figure 2. displays the same painting as in figure 1. after a small amount of atomic oxygen exposure.

Figure 3. displays the painting in figure 2 with the thinner areas of organic coating removed.

10 Figure 4. displays the area in figure 3 after continued atomic oxygen bombardment.

Figure 5. displays a drawing in which oxidation of the protective coating is complete.

15 Figure 6. displays the overall apparatus for performing the method disclosed in the instant application.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

In the preferred embodiment a painting is placed inside a vacuum chamber and exposed to an atomic oxygen directed beam generated by an electron cyclotron resonance plasma or other atomic oxygen beam source.

20 The atomic oxygen chemically reacts with the organic protective coating, forming a gaseous byproduct which leaves the surface and is pumped out through the vacuum system. The atomic oxygen penetrates the organic protective coating until it comes into contact with the paint pigment particles, which are usually inorganic. The atomic oxygen does not react

25 with the inorganic pigment, and the pigment acts as a shield to the binder layer underneath. The reaction slows as more pigment is exposed because the pigment consist of largely unreactive inorganic material. This

continues until all of the organic protective coating is removed from the surface.

Figure 1 shows a cross section of the painting prior to atomic oxygen beam treatment. In figure 1 inorganic paint pigment particles 30 intermixed with organic paint binders 20, rest on a canvas fabric 40. A layer of organic protective coating 10 rest on top of the mixture of inorganic paint pigment particles 30 and the organic paint binder 20. Figure 2 shows the same painting location after a small amount of atomic oxygen exposure. In Figure 3, the thinner areas of protective organic coating 10 have been removed, but the thicker areas have not. Figure 4 shows the same region after further directed atomic oxygen bombardment. As can be seen from figures 1 through 4 the inorganic paint pigment particles 30 prevent line-of-sight atomic oxygen attack of the organic matrix surrounding the pigment particles. This greatly slows down the oxidation of binder material, allowing time for all of the organic protective coating 10 to be oxidized without extensive loss of the pigment particles. When oxidation of the protective coating 10 is complete, as in figure 5, the painting can be removed from the vacuum and a fresh organic protective coating can then be applied. In figure 6 the apparatus utilized to perform the method disclosed in the instant application is displayed. In figure 6 a vacuum chamber 50 houses a painting 100 which is mounted on an x-y translation table 90. Oxygen 60 is pumped into an atomic oxygen beam source 70 to form a atomic oxygen beam 80. If the painting is larger than the size of the beam area, it is moved slowly under the atomic oxygen beam source to enable the beam to effectively

raster over the painting to treat the entire surface uniformly, as shown in figure 6.

Alternate Embodiments of the Invention:

5 The source of atomic oxygen can be a thermal plasma generated by RF, microwave, or DC discharges of air, oxygen, or a mixture of oxygen with inert gases. The atomic oxygen can be produced using multiple sources operated simultaneously or using a single source with movement of the painting underneath in a rastering pattern with a vacuum compatible  
10 translation system.

The method disclosed in the present invention can also be used to remove contaminants from the surface of a painting resulting from a fire. These contaminants include carbon, soot and other hydrocarbons.

15 While several embodiments of the invention are disclosed and described it will be apparent that various modifications may be made without departing from the scope of the invention or the scope of the subjoined claims.



## ABSTRACT

The present invention discloses a method of removing organic protective coatings from a painting. In the present invention degraded protective coatings such as lacquers, acrylics, natural resins, carbons, soot, and polyurethane are safely removed from the surface of a painting without contact to the surface of the painting. This method can be used for restoration of paintings when they have been damaged, through age, fire, etc.

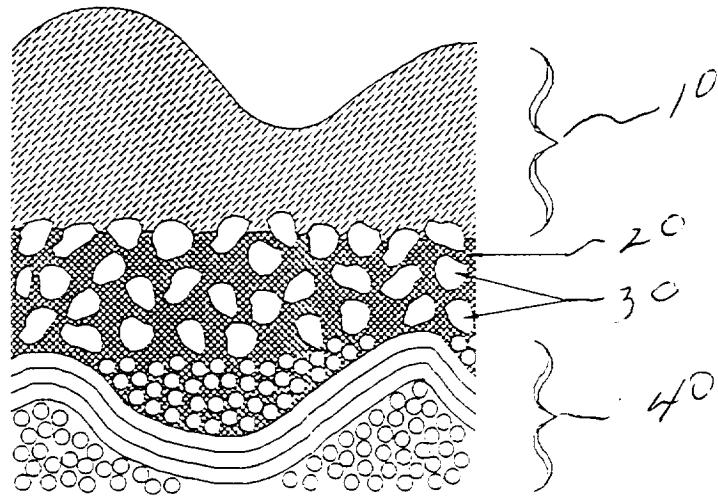


Figure 1

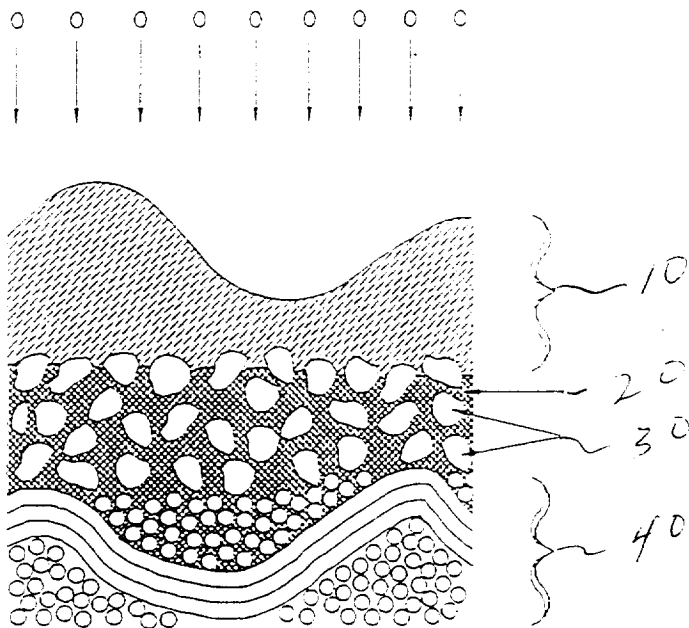


Figure 2

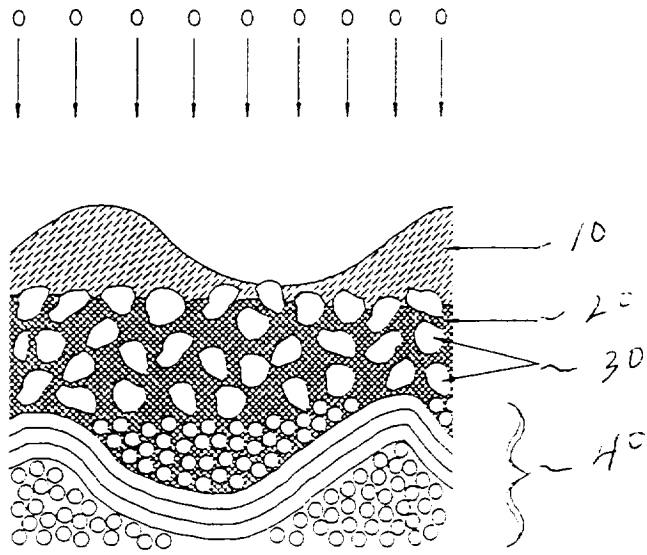


Figure 3

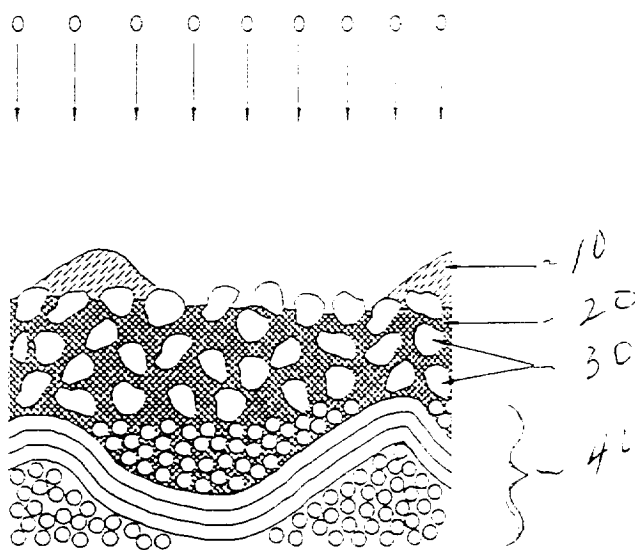


Figure 4

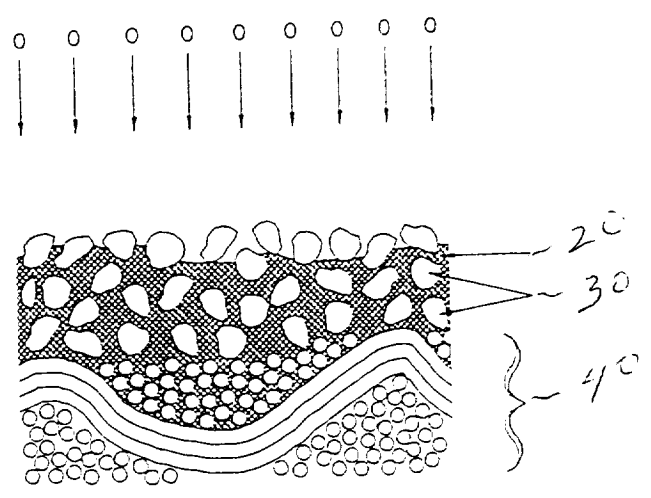


Figure 5

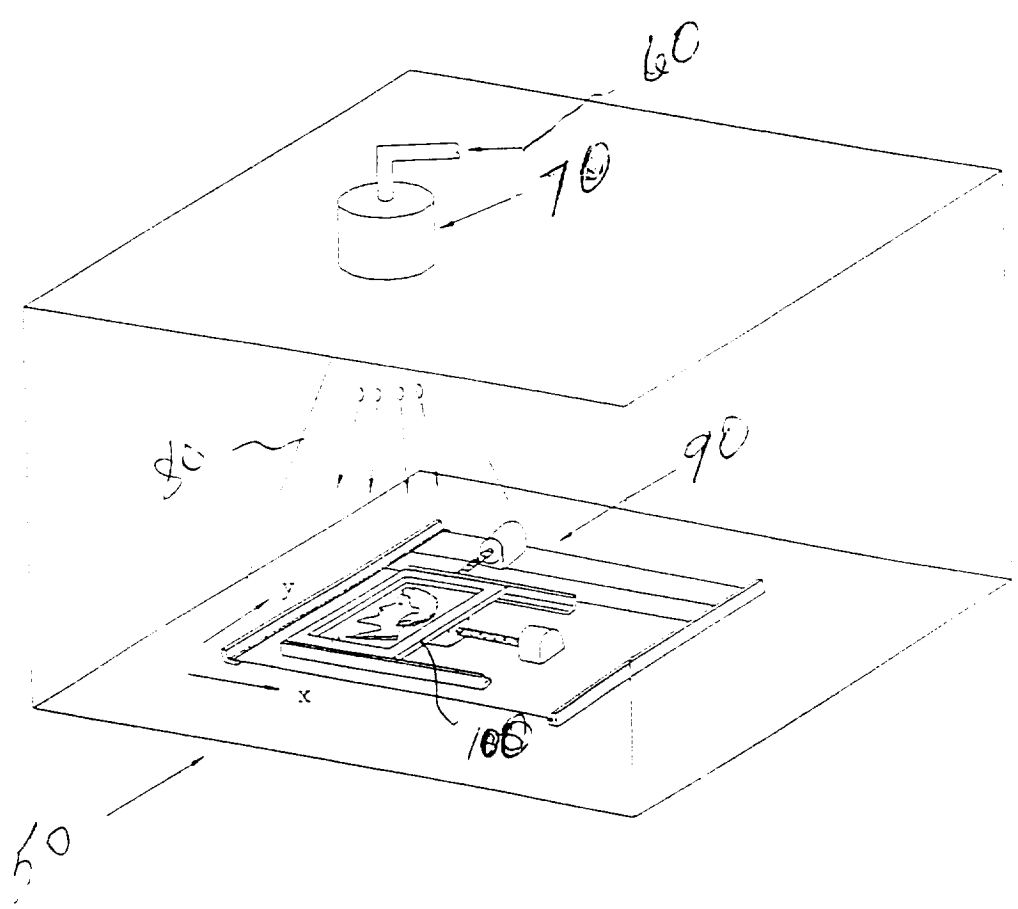


Figure 6