



INFORMATION PRESENTATION

Human Research Program - Space Human Factors & Habitability
Space Human Factors Engineering Project

K.L. Holden¹ (PI), J.L. Boyer¹, A. Sándor¹, S.G. Thompson¹,
R.S. McCann², D.R. Begault², B.D. Adelstein², B.R. Beutler², L.S. Stone²
¹NASA JSC, Lockheed Martin (2101 NASA Parkway Houston, Texas 77058, kritina.l.holden@nasa.gov)
²NASA Ames Research Center

ABSTRACT

The goal of the Information Presentation Directed Research Project (DRP) is to address design questions related to the presentation of information to the crew. The major areas of work, or subtasks, within this DRP are: 1) Displays, 2) Controls, 3) Electronic Procedures and Fault Management, and 4) Human Performance Modeling. This DRP is a collaborative effort between researchers at Johnson Space Center and Ames Research Center.

DISPLAYS – Visual displays

FY08 Studies

Label Alignment

Three studies investigated the effects of label alignment in small and large data groupings: 4, 8, and 16 label/value pairs, as well as high fidelity displays. The task was to find a value that corresponded to a target label.

method up	translational	82
sys 35	extravehicular	in
data 31	supplemental	close
period down	pharmaceutical	14
valve out	microgravity	14
period 34	period	out
error count 50	ventilation	yes
extravehicular true	output time	23

Figure 1. Examples of labeled data columns using left and data-alignment

step 17	step 20
step 18	step 21
step 19	step 22
step 20	step 23
step 21	step 24
step 22	step 25
step 23	step 26
step 24	step 27
step 25	step 28
step 26	step 29
step 27	step 30
step 28	step 31
step 29	step 32
step 30	step 33
step 31	step 34
step 32	step 35
step 33	step 36
step 34	step 37
step 35	step 38
step 36	step 39
step 37	step 40
step 38	step 41
step 39	step 42
step 40	step 43
step 41	step 44
step 42	step 45
step 43	step 46
step 44	step 47
step 45	step 48
step 46	step 49
step 47	step 50
step 48	step 51
step 49	step 52
step 50	step 53
step 51	step 54
step 52	step 55
step 53	step 56
step 54	step 57
step 55	step 58
step 56	step 59
step 57	step 60
step 58	step 61
step 59	step 62
step 60	step 63
step 61	step 64
step 62	step 65
step 63	step 66
step 64	step 67
step 65	step 68
step 66	step 69
step 67	step 70
step 68	step 71
step 69	step 72
step 70	step 73
step 71	step 74
step 72	step 75
step 73	step 76
step 74	step 77
step 75	step 78
step 76	step 79
step 77	step 80
step 78	step 81
step 79	step 82
step 80	step 83
step 81	step 84
step 82	step 85
step 83	step 86
step 84	step 87
step 85	step 88
step 86	step 89
step 87	step 90
step 88	step 91
step 89	step 92
step 90	step 93
step 91	step 94
step 92	step 95
step 93	step 96
step 94	step 97
step 95	step 98
step 96	step 99
step 97	step 100

Figure 2. Example of a high fidelity display

- For large data groupings, such as the 16-label group, data-alignment is faster than left-alignment
- In high fidelity displays, there was no difference in search times between left and data-aligned labels.

Label Orientation

The purpose of the study was to investigate the effects of label orientation.

0° (horizontal)	90° left	90° right	marquee
TEXT	TEXT	TEXT	T E X T

Figure 3. Examples of labels in different orientations.

- Horizontal labels improve reading time compared to vertical labels
- Additional label orientation studies are needed and being planned so that a solid design recommendation can be made

Studies Planned for FY09

Follow-up on alignment studies from FY08, further investigating left-aligned versus data-aligned labels for performance differences. The experimental task will be varied, and eye tracking will be used to gather higher precision data.

- Investigate methods of distinguishing between labels and values, such as colons, spaces, and bolding.
- Investigate methods of indicating "clickable" areas on a display.
- Investigate tradeoffs between color-coding on text versus color-coding on an associated symbol/icon.

Readability under vibration

Follow-up on the FY08 vibration study to examine the effects of different fonts and sizes, line spacing, and color. Complete preparations and training for the Vibration Readability DSO (first flight scheduled for Feb 2009). Perform a detailed comparative analysis between data collected in a vibration only condition with data collected in g+ vibration (from separately funded effort occurring in Fall 2008) to determine the added value of the centrifuge, and the data lost without the high-g environment. Investigate the feasibility of performing eye tracking under vibration.

DISPLAYS – Auditory displays

- Three studies examined the suitability of candidate alarm sounds for four types of alarms: class 1 emergency (fire-smoke and depressurization), class 2 warning and class 3 caution. Crew participants were asked to rate the sounds on a 5-point suitability scale.
- Emergency (Class 1):** This is the most serious type of event. It is used in a life threatening condition that requires immediate action in order to protect the crew.
- Warning (Class 2):** This is less serious than emergency. It is used in a situation that requires immediate correction to avoid loss or a major impact to mission or potential loss of crew.
- Caution (Class 3):** This is a situation of a less time critical nature, but with a potential for further degradation if crew attention is not given.

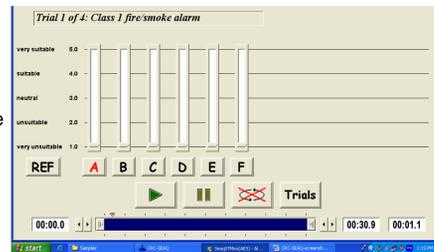


Figure 4. Software user-interface used in the study.

- Results indicate that the most suitable alarm sound types are based on currently-used alarms.
- Crew results differed from the non-crew slightly (different caution alarm was selected).
- Recommended alarm sounds will be modified per ISO recommendations to reduce the startle effect and accommodate sleeping crew.

Studies Planned for FY09

FY09 studies will build on FY08 experiments, attempting to validate previous results, compare results with speech alarms, and examine the impacts of hearing these sounds in a suit.

Speech Communication under Vibration

This is a new area of work that will begin in FY09. The question of interest is: To what extent will the intelligibility of crewmembers' speech communication with ground control during launch be degraded as a result of vibration? If speech communication intelligibility from crew to ground is degraded severely enough, there are important implications for developing displays for non-verbal means of communication during launch. The need is particularly severe during launch since solutions to off-nominal conditions may require descriptions of situations and acknowledgment of commands under high vibration conditions.

CONTROLS

FY08 Studies

Cursor Movement

The study examined three cursor movement modes: continuous, discrete, and gravity well, using trackball and a 4-way castle switch, with and without EVA gloves.

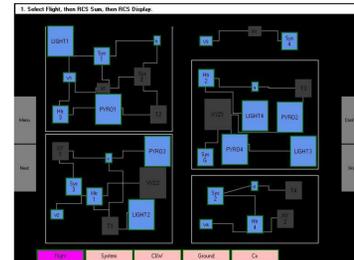


Figure 5. Display used in the cursor movement study

- Discrete mode and gravity well provide the most accuracy regardless of device.
- Continuous cursor mode is fastest if the device is a continuous device (e.g., trackball).
- Gravity well mode improved accuracy rates with the trackball and castle switch.

Dual-task Study

The study examined single-task and dual task comparisons with a cursor control and a hand controller.

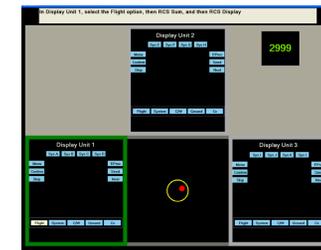


Figure 6. Dual-task Cursor Control Study

- Requiring subjects to perform multiple actions sequentially in time results in poorer performance and higher levels of perceived difficulty than allowing them to perform these actions simultaneously.
- Coordinating motor movements across the hands only results in a decrement in accuracy of operations, not in task completion times.
- Requiring subjects to perform more than one task with the left hand while performing a concurrent task with the right hand results in poorer performance and higher levels of perceived difficulty than only performing one task with the left hand, or all tasks with the right hand. The former scenario should be avoided whenever possible.

Studies Planned for FY09

Cursor control device investigations will continue under vibration and in microgravity.

EVA OPERATIONS

Study on HMD use in lunar lighting



Figure 7. Head Mounted Display

- Collaboration with Orion lighting expert in the lighting lab
- First study to look at HMD in lunar lighting conditions

Gloved Dexterity and Tactility



Figure 8. EVA gloves

- First study to look at glove dexterity in high pressure environment

Demonstration of spatially localized beacons

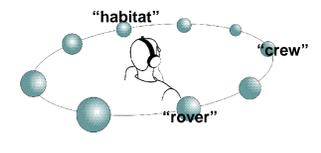


Figure 9. Spatially localized beacons

- Concept prototype for localizing critical mileposts such as lander, habitat, crewmember

VIBRATION STUDIES

- Orion-Ares exposure will be at levels that may exceed the 0.25 g limit imposed by earlier programs during ascent
- There is a serious risk that higher vibration will cause unacceptable degradation of human performance, due in part to decrements in visual function
- Present study began the process of quantifying this risk by examining how different vibration levels impact ability to make speeded yes/no responses to alphanumeric symbology while in a semi-supine position
- 5 blocks of 60 self-paced trials, 40 with vibration, 20 without
- Each block at one vibration level: 0 gx, .15 gx, .30 gx, .5 gx, or .7gx



Figure 10. Apparatus used for the vibration study.

Letter processing task (8 participants)

- Orient to magenta box
- Do the three letters in the middle row form a word or a non-word?
- Press one button for "Yes", another for "No"

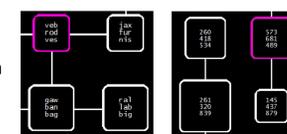


Figure 11. Letter task and digit task stimuli

Digit processing task (8 participants)

- Orient to magenta box
- Is center digit intermediate in magnitude between flanking digits?
- Press one button for "Yes", another for "No"

Results

- Errors increased with increased vibration
- There were more errors for smaller compared to larger font
- Vibration effects appeared at smaller vibrations levels for 10 pt font than 14 pt font
- No significant differences between vibration effects on lexical decision and magnitude comparison tasks
- No effects of vibration on follow-up trials
- Response times showed very similar pattern to errors

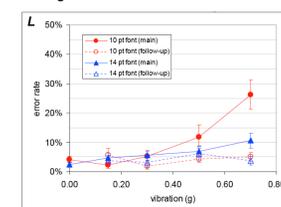


Figure 12. Error Rates for Letter Task

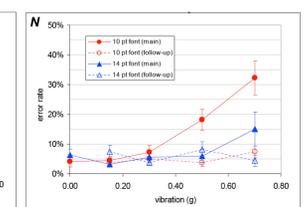


Figure 13. Error Rates for Digit Task

Conclusions

- For both number and letter processing, performance is significantly worse at both 0.5 g and 0.7 g for 10 pt font and at 0.7 g for 14 pt font.
- Vibration levels above 0.3 g (0-to-peak) will significantly compromise the processing of alphanumeric symbology in the currently anticipated Orion display viewing conditions.