

## ADVANCES IN THE *RXTE* PROPORTIONAL COUNTER ARRAY CALIBRATION: NEARING THE STATISTICAL LIMIT

NIKOLAI SHAPOSHNIKOV<sup>1,2</sup>, KEITH JAHODA<sup>2</sup>, CRAIG MARKWARDT<sup>2</sup>, JEAN SWANK<sup>2</sup>, TOD STROHMAYER<sup>2</sup>

*Draft version May 1, 2012*

### ABSTRACT

During its 16 years of service Rossi X-ray Timing Explorer (*RXTE*) mission has provided an extensive archive of data, which will serve as a primary source of high cadence observation of variable X-ray sources for fast timing studies. It is, therefore, very important to have the most reliable calibration of *RXTE* instruments. The Proportional Counter Array (PCA) is the primary instrument on-board *RXTE* which provides data in 2-50 keV with higher than millisecond time resolution in up to 256 energy channels. In 2009 *RXTE* team revised the response residual minimization method used to derive the parameters of the PCA physical model. The procedure is now based on the residual minimization between the model spectrum for Crab nebula emission and a calibration data set consisting of a number of spectra from the Crab and the on-board Am<sub>241</sub> calibration source, uniformly covering a whole *RXTE* span. The new method led to a much more effective model convergence and allowed for better understanding of the behavior of the PCA energy-to-channel relationship. It greatly improved the response matrix performance. We describe the new version of the *RXTE*/PCA response generator PCARMF v11.7 along with the corresponding energy-to-channel conversion table (version *e05v04*) and their difference from the previous releases of PCA calibration. The new PCA response adequately represents the spectrum of the calibration sources and successfully predicts the energy of the narrow iron emission line in Cas-A throughout the *RXTE* mission.

*Subject headings:* instrumentation: detectors — space vehicles: instruments

### 1. INTRODUCTION

The Rossi X-ray Timing Explorer (*RXTE*) was launched on December 30, 1995 and successfully operated until January 4, 2012. *RXTE* is an X-ray observatory with a powerful and unique combination of large collecting area, broad-band spectral coverage, high time resolution, flexible scheduling, and ability of quick response and frequent monitoring of time-critical targets of opportunity. *RXTE* observations have led to breakthroughs in our understanding of physics of strong gravity, high density, and intense magnetic field environments found in neutron stars, galactic and extragalactic black holes and other sources. The mission combined two pointing instruments, the Proportional Counter Array (PCA) developed to provide data for energies between 3 and 50 keV, and the High Energy X-ray Timing Experiment (HEXTE) covering the 20-250 keV energy range. These instruments were equipped with collimators yielding a FWHM of one degree. In addition, *RXTE* carried an All-Sky Monitor (ASM) that scans about 80% of the sky every orbit, allowing monitoring at time scales of 90 minutes or longer. Data from PCA and ASM are processed on board by the Experiment Data System (EDS).

The PCA is array of five large-area proportional counter units (PCUs) designed to perform observations of bright X-ray sources with high timing and modest spectral resolution. The main chamber of each PCU is divided into three volumes or layers filled with xenon. In ad-

dition, all PCUs were initially equipped with a propane-filled "veto" layer in front of the top xenon layer. The calibration of the PCA, as well as the details on its design and operation, are described in Jahoda et al. (2006, J06 hereafter). The response generation software for the PCA is based on the physical model of the instrument. The main components of the model are the quantum efficiency, which gives the probability of an X-ray photon to be absorbed in one of the detector volumes, and the redistribution matrix, which provides the probability for a photon to be detected in one of the PCU energy channels. The model has a complex dependence on many parameters, which have to be properly optimized to minimize a difference between the predicted model and the observed spectrum of one or more calibration sources, i.e. sources with well known spectral characteristics. Implementation of effective parameter optimization procedure is vital in performing this task.

The set of PCA parameters describing the instrument response since the start of the mission and until 2004 has been calculated in J06. However, calibration observation of the Crab and other sources after 2004 suggested that the model and its parameters have to be updated to provide a consistent response for new science observations. In 2009 the *RXTE* team has revised the PCA model and the response minimization method. The new model provided significant response improvement for the entire mission span, and especially for the data collected after 2004.

In this paper we describe in detail the new fitting procedure and the results of the PCA response modeling. The paper is structured as follows. In the next §we provide a brief review of the PCA physical model and the response generation software. In §4 we provide the de-

<sup>1</sup> CRESST/University of Maryland, Department of Astronomy, College Park MD, 20742, nikolai.v.shaposhnikov@nasa.gov

<sup>2</sup> Goddard Space Flight Center, NASA, Astrophysics Science Division, Greenbelt MD 20771

<sup>3</sup> CRESST/Universities Space Research Association, Columbia MD, 21044

tails of our PCA model implementation and the response minimization fitting environment in XSPEC astrophysical fitting package. We describe and discuss the results in §5. Conclusions follow in §6.

## 2. THE PCA DETECTOR MODEL AND THE RESPONSE GENERATOR PCARMF

For spectral analysis of PCA data with spectral modeling tools like XSPEC (Arnaud 1996), one must compute a response matrix. This matrix is defined as probability of a photon of a particular energy to be detected in a specific channel of an instrument detector. Response calculation for PCA is provided by the `pcarmf` tool, which is a part of FTOOLS astrophysical data analysis environment, maintained by HEASARC<sup>4</sup>.

The `pcarmf` tool has several major components: quantum efficiency (i.e. effective area), redistribution matrix (i.e. the spectral resolution), and the energy-to-channel relationship (i.e. the gain). Different components of the response are controlled by various parameters. The quantum efficiency and redistribution parameters are stored in the task parameter file `pcarmf.par`. The energy-to-channel relationship is described by coefficients in a table which resides in calibration database CALDB, the so-called "e2c" file (which can alternatively be supplied as a stand-alone FITS or ASCII file). The previous e2c relationship (released in 2004, J06) is referred to as *e05v03*, while a new e2c relationship described here is designated as *e05v04*.

The detailed description of the physical model of the PCA response is presented in J06. While the major design of the physical model is kept the same in the new response, some modifications are introduced to improve the model performance. We provide detailed description of differences between new and previous models below. The changes are related both to We adopt largely the same model for the new calibration. However, on the course of response modeling to obtain a new PCARMF parameter set which best reproduce the calibration data, we have made additions and modifications to the model, which were needed to better describe the data.

In particular, The new PCA e2c *e05v04* now has an "instantaneous" quadratic relationship between channel and the apparent photon energy  $E_p$  (see J06):

$$ch(E, T) = A + BE_p + CE_p^2 + DE_p^3, \quad (1)$$

where

$$A = A_0 + A_1\Delta T \quad (2)$$

and

$$B = B_0 + B_1\Delta T. \quad (3)$$

The above new e2c relationship has several major differences with respect to the previous response version. Namely, we drop the quadratic terms in time dependence of  $A$  and  $B$ , and we add a cubic term in the energy dependence (compare with Eq. 3-5 in J06). The energy-to-channel relationship (i.e. six coefficients  $A_0, A_1, B_0, B_1, C$  and  $D$ ) is determined by various calibration-type observations. Gradual changes in the e2c relationship controlled by the  $A_1$  and  $B_1$  parameters are due to slow xenon leak from the top layer to the propane layer. In

addition, abrupt shifts in the relationship are caused by such events as PCU high voltage change or propane layer loss. Planned voltage changes were made on March 21, 1996, April 15, 1996 and March 22, 1999. The propane layers of PCUs 0 and 1 were lost on May 12, 2000 and December 25, 2006 correspondingly, due to dehermetization of a veto layer, presumably, because of a micrometeorite impact (we adopt 0-4 PCU numbering convention throughout the Paper). Due to these events the entire *RXTE* mission span is divided into epochs, each having an individual sets of e2c parameters. The previous e2c *e03v04* had 5 epochs. The epochs 1,2,3,4 were divided by voltage changes, while the PCU0 propane pressure loss event defined the start of epoch 5 (see J06). We find that for e2c *e05v04* the epoch 5 is required only for PCUs 0 and PCU 1 beginning on the propane layer loss event (see below). We, therefore, redefine epoch 5 as starting on veto layer loss event and we effectively drop epoch 5 for PCUs 2,3 and 4. These changes in e2c relationship are the most important ingredients of the response improvement.

Another area where PCARMF v11.7 differs significantly from v11.1 is treatment of xenon L-escape lines. In the previous response version L-escape lines were ignored. While L-escape contribution for the PCU layer 1 is indeed negligible, this is not true for layers 2 and 3. Most probably, this can be explained by the following scenario. Almost all photons entering the detector with energies near the L-edge ( $\sim 5$  keV) are absorbed in the top layer and most of L-escape photons produced in this layer are vetoed. However, a small fraction of L-escape photons in layer 1 do not get absorbed in the same layer and therefore are not vetoed. Some fraction of these photons is detected in layers 2 and 3. For these layers the contribution from these photons is not small. In fact, these L-escape photons from the top layer contribute significantly to the overall signal in these layers which can be seen by eye as apparent spikes in spectra of layer 2 and 3 below PCA channel 10. This effect was not accounted for in previous PCA calibration versions. It led to an artificial feature at about 4~5 keV, when data from all PCU layers were analyzed jointly, which is a common approach. In the PCARMF v11.7 The L-escape contribution is described for each layer individually. According to expectations, the normalization for L-escape line is effectively zero for the top layer and non-zero for the second and third layers. They are implemented as parameters *EscNormL2* and *EscNormL3*.

## 3. CALIBRATION DATA

The PCA calibration relies on the data from the Crab nebula and the on-board Am<sup>241</sup> calibration source. Each PCU is equipped with a radioactive Am<sub>241</sub> calibration source which produces six fixed-energy lines at 13.93, 17.53, 21.13, 26.35, 29.8, 59.54 keV. The Crab provides information on quantum efficiency, while the Am<sup>241</sup> data constrain the energy redistribution and e2c relationship. The PCA calibration data is provided in two different data modes. The Am<sup>241</sup> data is available in GoodXenon PCA data mode, providing the most detailed data description in 256 energy channels. The Crab data is packaged in Standard2 mode, having 129 energy channels. We implemented two XSPEC spectral models producing 129 bin spectrum for the absorbed power law input

<sup>4</sup> <http://heasarc.gsfc.nasa.gov/docs/software.html>

source spectrum and 256-bin spectrum for the sum of six Gaussian to model the Crab emission and the Am<sup>241</sup> energy-to-channel calibration source spectra correspondingly.

Calibration data were extracted using the following strategy. We first selected a sample of 20 longest pointed *RXTE* observations of the Crab roughly uniformly covering the period between 1996 and 2012 for which all five PCUs were active. Although the most clean Am<sup>241</sup> data is available during the dedicated background observations, we found that using individual observations does not provide enough statistics to fit individual Am<sup>241</sup> spectral lines. We, therefore, have taken the following path to generate Am<sup>241</sup> calibration spectra. We identified the dates when optimal number of the background observations are accompanied by the observations of faint sources, for which the Am<sup>241</sup> calibration data is not strongly contaminated by the signal from the observed source. For each selected date we generated good time intervals for an entire day by filtering out the periods when the total PCU count rate exceeds 1500 counts per second. This would exclude observations of very bright sources such as Sco X-1, GRS 1915+105, Cyg X-1. Using this selection criteria spectra with exposure of a few tens of kiloseconds were produced for individual dates, so the evolution of the energy-to-channel relationship can be modeled. With these selections in place we extracted spectra for each individual layer of each PCUs, applying additional standard selection criteria to filter out episodes of Earth occultations, South Atlantic Anomaly passages, PCU breakdowns, etc. Examples of the Crab nebula and Am<sup>241</sup> calibration spectra are shown in Figure 1. In Figure 2 we dates when the "calibration" observations were taken.

#### 4. THE RESPONSE MINIMIZATION METHOD

The *pcarmf* parameter minimization procedure implemented prior to the version v11.7 was divided into several steps. First, the *e2c* parameters were obtained by approximating the *e2c* relationship to best represent energies of the Am<sup>241</sup> lines and the iron K<sub>α</sub> lines derived from a set of Cas-A observations. Then, individual Crab observations were fitted with the response model. Because of lack of sensitivity of the fits to individual observations, only a subset of response parameters was allowed to vary in this approach. This required several consequent runs to optimize different parameter subsets. As the last step, the results were averaged to get the final parameter values. This method provided a reliable PCA calibration for the data taken before 2004. However, for more recent observations calibration tests showed degrading quality of the energy-to-channel relationship as well as representation of the Crab nebula data by the calibration model. To produce a reliable response for the entire *RXTE* performance period of more than 15 years, a new, more effective method of response parameter minimization was required.

To optimize a response modeling procedure we created a new *RXTE*/PCA calibration environment within XSPEC astrophysical fitting software. First, we implemented the PCA response model as an XSPEC model. Because the *e2c*-relationship is a part of the model, it operates in a raw PCA instrumental channel space. Namely, assuming a particular source spectrum (e.g.

power law or sum of Gaussians), it convolves the spectral shape with the PCA response, defined by a set of parameters identical to *pcarmf* parameters, and yields the expected number of counts in each spectral channel for a given input energy spectrum. The model has the same set of parameters as *pcarmf* task plus normalization, which is effectively a PCU area modified by a PCU offset factor (see below).

A set of PCA response parameters describing one particular PCU unit is obtained by fitting a "calibration" set of the Crab and Am<sup>241</sup> spectra. A "calibration" data set is a collection of spectra for selected dates (shown in Figure 2), uniformly covering an entire *RXTE* mission span, beginning on April 15, 1996 (MJD 50188), i.e. the start time of the calibration epoch 3. Observations taken before this date during epoch 1 and 2, i.e. during the first few months of *RXTE* in-orbit performance, are regarded as a science validation and verification observations. Moreover, high voltage setting during this period may have resulted in non-linear effects which are not accounted for in the physical PCA response model. This can result in a systematic effects which would affect the response quality for the entire mission. To avoid this, we excluded observations taken before April 15, 1996 from "calibration" data.

After data selection and extraction "calibration" spectra are loaded in one XSPEC session and a separate response model is assigned to each spectrum, convolved with an appropriate source spectrum (e.g. absorbed power law for Crab or a sum of six Gaussians for the Am<sup>241</sup> source). In the Crab spectra we ignore PCA Standard2 mode channels 1-3, which corresponds to the first seven channels of the raw PCU 256 channels. The Am<sup>241</sup> data below PCU channel 25 does not contain any information on the *e2c* relationship and are also ignored in our fits. Despite the enormous number of total parameters for all model components (several thousands per fitting session), the number of independent parameters is less than a hundred as most parameters are interlinked with each other.

The following parameter linking has been implemented:

- all spectra have their source spectral parameters (i.e. power law index and normalization for the Crab spectra and parameters describing six gaussians for the Am<sup>241</sup> data) interlinked and fixed, except for the Gaussian normalizations which are free but interlinked for spectra from the same layer
- all spectra had the parameters describing xenon and propane amounts and parameters describing PCU geometry (i.e. normalization, thickness of mylar and aluminum windows) linked for all spectra
- parameters of physical model describing quantum efficiency and redistribution are the same for all "calibration spectra"
- energy-to-channel parameters are the same for all spectra belonging to the same layer and gain epoch

As a spectral model for the Crab emission spectra we used a standard absorbed power law model with the same

Crab spectral properties which were assumed for previous PCA response versions: the index  $\Gamma_{Crab} = 2.11$ , normalization  $N_{Crab} = 11.0$  and  $N_H Crab = 0.34 \times 10^{22} \text{ cm}^{-2}$  (however, see Kirsch et al. (2005) and Weisskopf et al. (2010) for the detailed discussion of the Crab spectral shape in context of X-ray multi-mission data). We note, that in recent analysis of multi-mission lightcurve from the Crab nebula (including major contribution from *RXTE*) Wilson-Hodge et al. (2011) identified a quasi-periodic modulation in the Crab flux with a period of approximately 3 year and amplitude of a several percent. Our analysis of the Crab pulsed emission, also reported in Wilson-Hodge et al. (2011), have strongly suggested the nebula as a origin of the modulation. This result would undermine validity of the calibration obtained by fitting the Crab data collected over the period much smaller than the observed periodicity. However, we model the *RXTE* PCA response based on the data collected for  $\sim 15$  years. We, therefore, assume that any variations in Crab spectrum are averaged out.

As a first step, we determined response parameters for PCU 2 we used data for 20 Crab observations and  $\text{Am}^{241}$  spectra for 15 days totaling in 96 individual spectra. The model have 4668 parameters in total from which 75 are free. After a minimum fit statistic is achieved for the session including both Crab and  $\text{Am}^{241}$  data, we perform an additional fit on a reduced data set using the Crab data only with the e2c coefficients fixed. This is done to remove any possible contribution from the unmodeled residuals from  $\text{Am}^{241}$  data to the response parameter values. The resulting parameter values are given in Tables 1 and 2. Then, this procedure is repeated for other PCUs, although this time we fixed the PCA parameters universal for all PCUs, i.e. *kEdge\_veto*, *lEdge\_veto*, etc., (see Table 1). This implies that the universal PCA parameters obtained by the fit to PCU2 data are valid for all other PCUs. This is a good assumption as the PCA universal parameters describe PCU physics and geometry which are quite similar for all PCUs.

## 5. RESULTS

As a zeroth approximation for our fits we use have used parameter values from the previous release of PCA calibration, i.e. PCARMF v11.1 and e2c *e05v03*. We remind that the previous e2c table has 5 epochs, with the fifth epoch starting on May 13, 2000 00:00 (MJD 51677). As described below, in the new e2c table the fifth epoch is retained for PCUs 0 and 1 only with individual start dates corresponding to the moments of a propane layer loss.

Major improvements in performance was achieved as a result of the following modifications to the PCA response model and e2c relationship:

- First, we observed that the non-linear terms of the time dependence in the e2c relationship, namely, coefficients  $A_2$  and  $B_2$  in Equations 4 and 5 of J06 are not required to account for the e2c relationship evolution. This is consistent with a slow linear time evolution as a result of a small leak of xenon from the first layer to the propane veto layer. Fixing these parameters at zero led to a dramatic improvement in the convergence speed and fit quality. Subsequent thawing of these parameters did not

improve the statistic and showed that their values are consistent with being effectively zero.

- The next important observation concerning the behavior of e2c relationship was that the e2c parameters obtained for epoch 5 were statistically identical to the best-fit values for corresponding parameters of e2c epoch 4. This effectively showed that, in accordance with expectations, a new e2c epoch is required only when an abrupt change in e2c relationship occurs either due to the PCU anode voltage change or due to the loss of the PCU propane layer. This renders the epoch 5 obsolete for PCUs 2,3 and 4. Epoch 5 is retained for PCUs 0 and 1 starting at the corresponding date of propane layer loss.
- The energy resolution in channel space is modeled as

$$\Delta ch = (\sqrt{aE + b})B \quad (4)$$

where B is defined in Equation 3. In e2c *e05v03* energy resolution coefficients are set to  $a = 0.121$  and  $b = 0.442$  to formally satisfy the ground test which showed resolution  $\Delta E/E \sim 0.17$  at 6 keV and  $\sim 0.08$  at 22 keV (J06). We note, however, that two values are generally not constrained by two measurements. Our fits to the  $\text{Am}^{241}$  data showed that resolution coefficients have quite different values, i.e.  $a \approx 0.18$  and  $b \approx 0.0$  (see below), which are dictated by  $\text{Am}^{241}$  line widths and are also consistent with the ground prelaunch data.

We show PCU 2 calibration data fitted with the PCA response model in Figure 3. The final set of best fit parameters is given in Table 1. In Table 2 we also present a complete set of e2c parameters. The quality of the model fit which includes the Crab data only is  $\chi^2/N_{dof} = 3.4$ . This quite impressive, taking the fact that we did not assume any systematic error in the data. In light of the evidence of the multi-year periodicity in the Crab emission at a level of a few per cent presented by Wilson-Hodge et al. (2011), which is not modeled in our fits, the achieved fit quality may indicate that we are nearing the statistical limit and that the further attempts to improve the fit will not lead to actual improvement of the PCA instrument response. This however, allow us to estimate the range of systematic error to use in spectral fitting of *RXTE*/PCA spectra. Namely, if we assume systematic error of 0.5%, 1% and 1.5% we get the corresponding fit quality of 1.9 and 1.6 and 1.3. This illustrates the range of systematic errors to use for *RXTE* spectral analysis. For the most observations, the systematic error of 0.5% is sufficient, while for the extreme cases it can be raised up to 1.5%.

To check the consistency and the quality of the resulting response we fitted the complete set of *RXTE* observations of Crab throughout the mission with the absorbed power law model keeping the  $N_H$  frozen at  $0.34 \times 10^{22} \text{ cm}^{-2}$  and keeping the index and normalization free. We performed the fits with both the previous and the new response versions. We show the results of the test fits of the Crab nebular data from PCU 2 in Figure 4. It can be clearly seen that the quality of the PCA calibration

Table 1  
PCARMF Parameters<sup>a</sup> for PCU 2

Parameter	Units	Domain	Value	Description
<i>xe_gmcm2.l1</i>	gm/cm <sup>2</sup>	PCU Layer 1	$(6.921 \pm 0.029) \times 10^{-3}$	Xenon amount
<i>xe_gmcm2.l3</i>	gm/cm <sup>2</sup>	PCU Layer 2	$(5.739 \pm 0.026) \times 10^{-3}$	Xenon amount
<i>xe_gmcm2.l3</i>	gm/cm <sup>2</sup>	PCU Layer 3	$(5.799 \pm 0.024) \times 10^{-3}$	Xenon amount
<i>xe_gmcm2.pr</i>	gm/cm <sup>2</sup>	PCU Propane Layer	$(1.312 \pm 0.056) \times 10^{-4}$	Xenon amount at the reference date
<i>xe_gmcm2.dl</i>	gm/cm <sup>2</sup>	PCU Dead Layer	$(4.41 \pm 0.27) \times 10^{-4}$	Xenon amount
<i>pr_gmcm2</i>	gm/cm <sup>2</sup>	PCU Propane Layer	$(2.646 \pm 5.272) \times 10^{-3}$	Propane amount
<i>my_gmcm2</i>	gm/cm <sup>2</sup>	PCU	$(6.893 \pm 5.3) \times 10^{-3}$	Mylar window thickness
<i>al_gmcm2</i>	gm/cm <sup>2</sup>	PCU	$(1.204 \pm 4.23) \times 10^{-4}$	Aluminum window thickness
<i>xe_pr.daily</i>	gm/cm <sup>2</sup> /day	PCU	$(3.93 \pm 0.02) \times 10^{-8}$	Xenon Leak Rate
<i>kEdge_veto</i>		PCA	0.813 ± 0.007	
<i>lEdge_veto</i>		PCA	0.934 ± 0.005	
<i>EscFracKc</i>		PCA	0.399 ± 0.004	
<i>EscFracKb</i>		PCA	0.298 ± 0.003	
<i>EscFracL2</i>		PCA Layer 2	$(5.61 \pm 0.60) \times 10^{-3}$	
<i>EscFracL3</i>		PCA Layer 3	$(2.028 \pm 0.60) \times 10^{-2}$	
<i>EscNormKb</i>		PCA	0.404 ± 0.022	
<i>EscNormL2</i>		PCA Layer 2	5.44 ± 0.62	
<i>EscNormL3</i>		PCA Layer 3	126.6 ± 12.6	
<i>epoint</i>		PCA	18.4 ±	
<i>track_coeff</i>		PCA	$(3.72 \pm) \times 10^{-2}$	
<i>track_exp</i>		PCA	3.32 ± 0.04	
<i>pcc_coeff</i>		PCA	$(1.37 \pm 0.06) \times 10^{-2}$	
<i>wxef</i>		PCA	0.492 ± 0.007	
<i>resp1</i>		PCU	0.1733 ± 0.0003	

<sup>a</sup> See J06 for the detailed description and definition of individual PCA response parameters

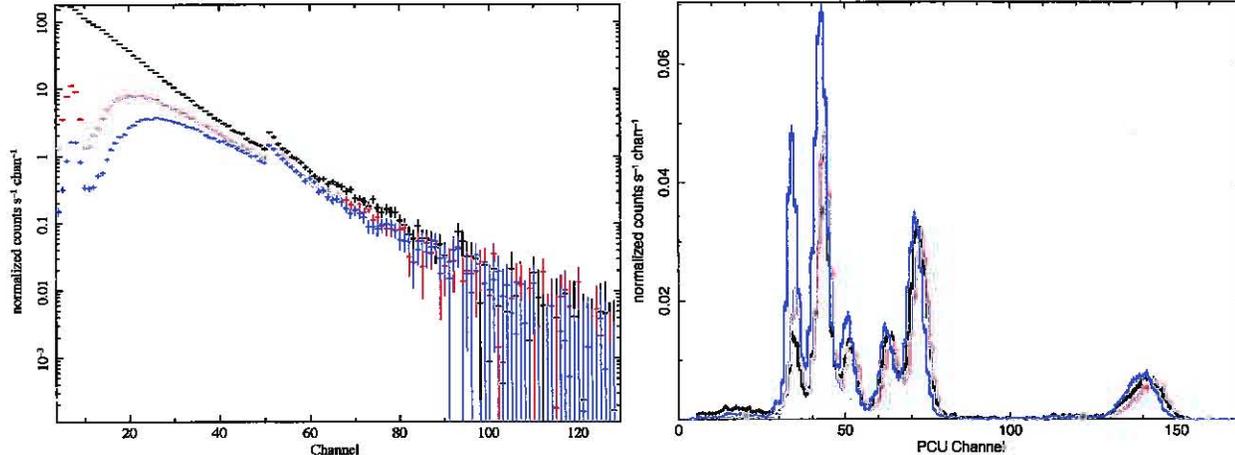


Figure 1. *RXTE* calibration data. *Top*: Example of the Crab spectra for each layer (black for the top, red for the second and blue for the third layers). *Bottom*: The same as the top diagram for the Am<sub>241</sub> on-board source.

provided by the PCARMF v11.1 is degrading exponentially starting around MJD 52500. On the other hand PCARMF v11.1 combined with e2c *e03v05* is showing uniform fit quality with the reduced  $\chi^2 \sim 1.0$  throughout the entire period of *RXTE* performance.

## 6. CONCLUSIONS


We present a new *RXTE*PCA response version v11.7. This response is based on data set presenting the entire *RXTE* mission span. While the new response is largely based on the physical model developed in J06, some significant modifications are made, especially for energy-to-channel conversion relationship. The new response shows a superior performance with respect to the previous *RXTE* response versions.

## REFERENCES


- Arnaud, K. A. 1996, *Astronomical Data Analysis Software and Systems V*, 101, 17
- Kirsch, M. G., Briel, U. G., Burrows, D., et al. 2005, *Proc. SPIE*, 5898, 22
- Jahoda, K., Markwardt, C. B., Radeva, Y., Rots, A. H., Stark, M. J., Swank, J. H., Strohmayer, T. E., & Zhang, W. 2006, *ApJS*, 163, 401
- Weisskopf, M. C., Guainazzi, M., Jahoda, K., et al. 2010, *ApJ*, 713, 912
- Wilson-Hodge, C. A., Cherry, M. L., Case, G. L., et al. 2011, *ApJ*, 727, L40

**Table 2**  
E2C Parameters for PCU 2

Parameter	Epoch 3 03/15/96-//99	Epoch 4 //99-Present
Layer 1		
$A_0$	$-0.761 \pm 0.009$	$-0.658 \pm 0.007$
$A_1$	$(-5.33 \pm 0.52) \times 10^{-5}$	$(-9.12 \pm 1.22) \times 10^{-6}$
$B_0$	$2.895 \pm 0.001$	$2.476 \pm 0.001$
$B_1$	$(6.22 \pm 0.08) \times 10^{-5}$	$(1.05 \pm 0.01) \times 10^{-5}$
$C_0$	$(-6.84 \pm 0.06) \times 10^{-3}$	$(-5.17 \pm 0.04) \times 10^{-3}$
$D_0$	$(5.57 \pm 0.09) \times 10^{-5}$	$(4.10 \pm 0.06) \times 10^{-5}$
Layer 2		
$A_0$	$-0.560 \pm 0.005$	$-0.577 \pm 0.005$
$A_1$	$(2.61 \pm 0.78) \times 10^{-5}$	$(-1.8 \pm 1.5) \times 10^{-6}$
$B_0$	$2.815 \pm 0.001$	$2.434 \pm 0.001$
$B_1$	$(4.69 \pm 0.10) \times 10^{-5}$	$(1.04 \pm 0.01) \times 10^{-5}$
$C_0$	$(-1.32 \pm 0.06) \times 10^{-3}$	$(-1.71 \pm 0.04) \times 10^{-3}$
$D_0$	$(-7.68 \pm 0.94) \times 10^{-6}$	$(6.9 \pm 5.5) \times 10^{-7}$
Layer 3		
$A_0$	$-0.374 \pm 0.008$	$-0.217 \pm 0.008$
$A_1$	$(2.7 \pm 1.7) \times 10^{-5}$	$(-5.35 \pm 3.25) \times 10^{-6}$
$B_0$	$2.810 \pm 0.001$	$2.391 \pm 0.001$
$B_1$	$(4.35 \pm 0.16) \times 10^{-5}$	$(1.00 \pm 0.02) \times 10^{-5}$
$C_0$	$(-5.45 \pm 0.06) \times 10^{-3}$	$(-3.46 \pm 0.04) \times 10^{-3}$
$D_0$	$(4.24 \pm 0.09) \times 10^{-5}$	$(2.46 \pm 0.05) \times 10^{-5}$

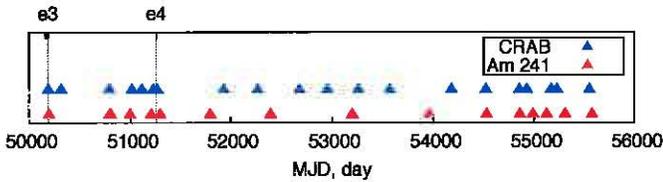

**Figure 2.** Calibration data set for PCA response minimization. Blue triangles show Crab observations dates while red data show dates when  $\text{Am}^{241}$  data is collected. Vertical dotted lines show start dates for epochs 3 and 4 (5th gain epoch is obsolete in the new PCA calibration, see text).

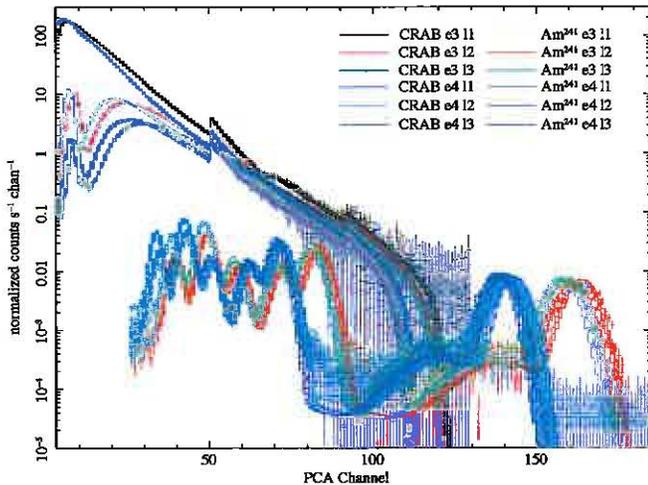

**Figure 3.** PCA response fit to the PCU 2 data in XSPEC.