

COHERENT DOPPLER WIND LIDAR DEVELOPMENT AT NASA LANGLEY RESEARCH CENTER FOR NASA SPACE-BASED 3-D WINDS MISSION

Upendra N. Singh, Michael J. Kavaya, Jirong Yu, Mulugeta Petros, and Grady J. Koch

NASA Langley Research Center, MS 433, Hampton, VA USA, upendra.n.singh@nasa.gov

ABSTRACT

We review the 20-plus years of pulsed transmit laser development at NASA Langley Research Center (LaRC) to enable a coherent Doppler wind lidar to measure global winds from earth orbit. We briefly also discuss the many other ingredients needed to prepare for this space mission.

1. INTRODUCTION

The measurement of global wind velocities from earth orbit is both much desired and very difficult. The measurements would be highly useful to several fields such as atmospheric physics (weather prediction, severe weather, climate research, air quality, and trace gases), aviation, and wind power. The various scientific fields use different names to refer to wind such as advection, circulation, currents, dynamics, flows, fluxes, streams, transport, and waves. For active remote sensing instruments such as lidar, the mission is difficult for three primary reasons. First, the range to target is always large, from 400 km for the lowest reasonable orbit heights and nadir angles, to over 1,000 km for the highest reasonable LEO orbit heights and nadir angles [1]. Second, the speed of the orbiting lidar will be about 7,000 m/s while the desired overall wind velocity accuracy is about 1 m/s (0.014%). Third, the pulsed laser must pulse continuously over the life of the mission. For example, a 10 Hz laser requires 315.4 million shots per mission year in addition to pre-launch shots. In the US, NASA and NOAA and DOD researchers have been working to enable this space mission since the 1970s.

2. ENABLING THE MISSION

The over 40 years of work towards the global winds mission in the US has included over 50 studies [2], theoretical development, computer simulation of the wind measurement technique and of the utility of the wind measurements, measurement requirements development, space mission design, lidar technology development, and ground and airborne validation [3-5].

NASA and NOAA scientists have worked with lidar scientists to formulate the wind measurement requirements appropriately stated for a lidar solution. These requirements are occasionally updated, but a

comprehensive statement of the requirements as of 2005 is available in [6].

There is a consensus among researchers that the final operational wind sensor should be a hybrid pulsed Doppler wind profiling lidar with scanning [7-8]. The term hybrid refers to the complementary, simultaneous wind measurement by both a coherent-detection and direct-detection lidar. Conceptually, the coherent lidar uses aerosol particles for its signal and favors the lower altitudes, while the direct lidar uses molecules for its signal and favors higher altitudes. The US National Research Council's advice to NASA [9] recently endorsed both the global winds mission and the hybrid lidar concept.

We now concentrate on technology development of the coherent-detection Doppler wind lidar at LaRC.

3. COHERENT LIDAR REQUIREMENTS

The logical flow of requirements at NASA is from societal benefit to measurement to mission to instrument. Here we discuss the requirements on the coherent Doppler lidar system portion of the hybrid Doppler lidar instrument.

Researchers have synthesized computer simulations of both coherent and direct Doppler lidar performance [10] with a different set of computer simulations of the numerical weather prediction (NWP) benefit from various notional wind products [11]. The result is a set of requirements for the coherent lidar system *provided* a direct lidar system accompanies it. The requirements include:

- Pulse energy $E > 0.25$ J/pulse
- Pulse rate (PR) = 10 Hz
- Excellent beam quality, $M^2 < 1.2$
- Single frequency pulse with near transform limited spectrum, minimal chirp
- >100 ns pulse duration with >175 ns desired
- Conductively cooled laser heads and pump laser diode arrays (LDAs)
- Laser wall plug efficiency (WPE) $> 1.2\%$ (not including control electronics, heat removal, or seed laser)
- Laser lifetime $>630M$ shots for initial 2-year mission

4. TECHNOLOGY DEVELOPMENT AT LARC

Our group at LaRC has been developing the pulsed laser and other coherent lidar technologies for the global wind mission since the late 1980s. The causal path followed has been from space mission requirements to coherent lidar requirements to component requirements to technology development and finally to ground and aircraft validation, as depicted in Figure 1. During the 20+ yearlong time, the requirements on the pulsed laser parameters and their priorities changed slightly due to wisdom gained in mission studies. This refers to the relative priorities of mass, volume, electrical efficiency, beam quality, spectral purity, and shot lifetime.

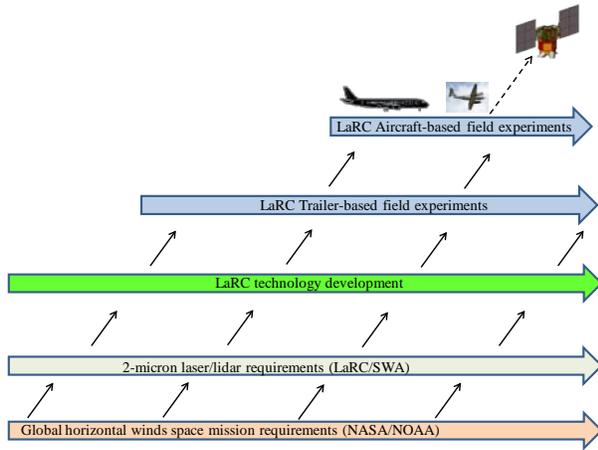


Figure 1: Depiction of flow from mission to instrument requirements, followed by technology development, and then field validation.

As depicted in Figure 1, we utilized interim stages in the technology development path for ground and airborne validation, and for various science applications. In a sense, the technology development path does not end as long as there are future space missions and ideas for further improving the technology. We show some of the milestones in the pulsed laser development in Table 1.

In Table 1 the legend is:

- E – less than 0.25 J/pulse
- PR – less than 10 Hz
- Component count – more than 2 amplifiers
- IS – injection seeding not done
- Crystal – YLF used, before upgrade to LuLiF
- Cooling x2 – both LDAs and rod liquid cooled, x1 – rod liquid cooled
- Packaging – not compactly packaged
- AF – not demonstrated on aircraft
- SQ – not space qualified by testing

Table 1: Selected pulsed laser development milestones

Date	Milestone [Ref]	Further Improvement Needed for Space
12/96	0.7 J, 1Hz	PR, component count, crystal, cooling x2, packaging, AF, SQ
7/97	0.6 J, 10 Hz	Component count, crystal, cooling x2, packaging, AF, SQ
12/97	0.125 J, 6 Hz [12]	E, PR, IS, crystal, cooling x2, packaging, AF, SQ
6/02	0.135 J, 2 Hz [13,14]	E, PR, IS, cooling x1, packaging, AF, SQ
12/05	1.2 J, 2 Hz [15]	PR, IS, cooling x1, packaging, AF, SQ
8/07	0.4J, 5 Hz	PR, IS, AF, SQ
11/07	0.355 J, 10 Hz	Cooling x1, AF, SQ
8/10	0.25 J, 10 Hz	Cooling x1, SQ

The Table does not address WPE since this requirement was achieved throughout the steps. The third column in Table 1 reveals how we pursued multiple threads of laser development to meet the various requirements. The 12/96 milestone met the required pulse energy for the first time, and almost tripled the requirement. In 7/97, our group achieved both pulse energy and PR requirements. The 12/97 achievement was a laser oscillator advancement. Milestone 6/02 demonstrated the new laser crystal material LuLiF, invented at LaRC. The demonstration in 12/05 exceeded 1 J pulse energy with only two laser amplifiers. Our group succeeded at all-conductive cooling in an engineered package in 8/07, surpassing the pulse energy requirement. The 11/07 milestone met energy, PR, and component count in an engineered package. In 8/10, we flew the compact packaged coherent lidar system on the NASA DC-8.

The August-September 2010 DC-8 aircraft flights in the NASA hurricane Genesis and Rapid Intensification Program (GRIP) [5, 16] used a pulsed laser that is very close to the goal for space. The laser only lacked conductive cooling of the laser rods and space qualification tests. However, as shown in Table1, conductive cooling was separately achieved.

5. HARDWARE PHOTOGRAPHS

We present below selected photographs documenting the laser and lidar hardware development.

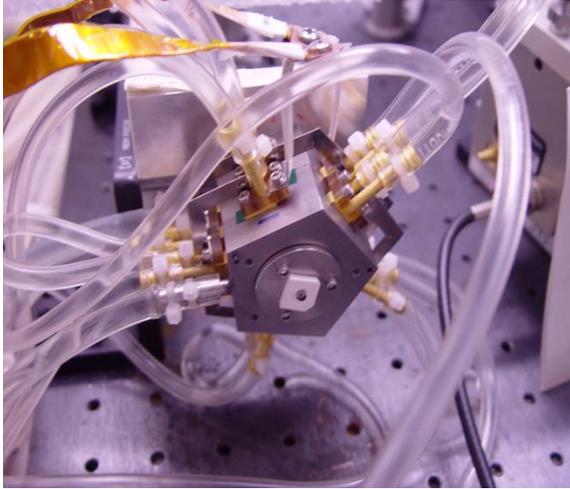


Figure 2: Early version of laser head containing laser rod and pump LDAs. Ten LDAs produced 3.6 J of pump energy. There were 22 water channels.

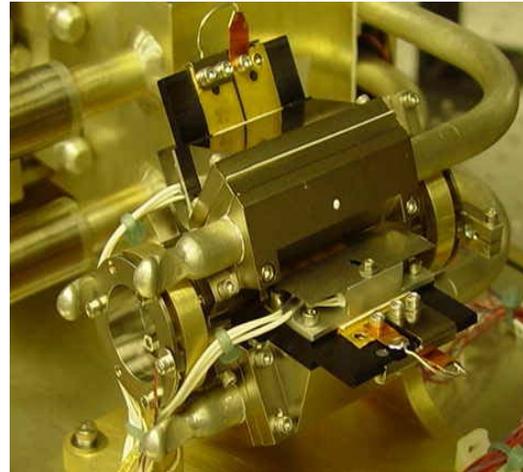


Figure 4: Most recent version of laser head. Six LDAs produced 3.6 J of pump energy. Cooling is completely conductive with no water channels.

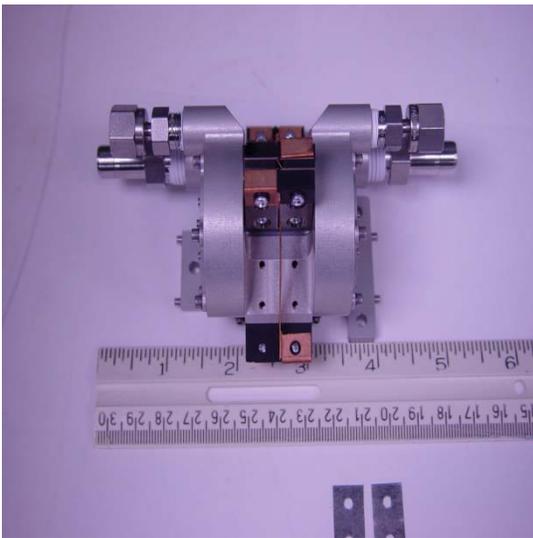


Figure 3: Later version of laser head. Six LDAs produced 3.6 J of pump energy. There were 4 water channels.

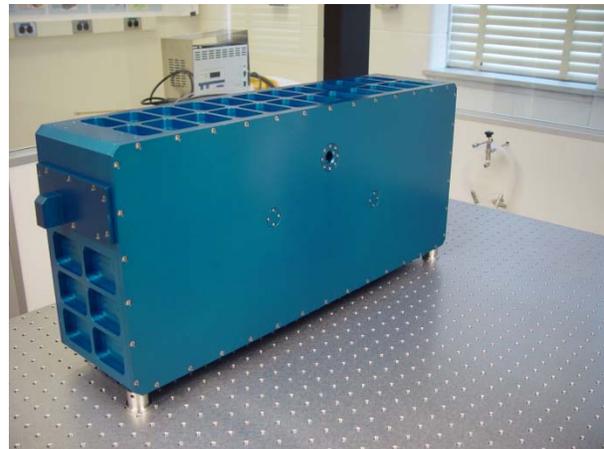


Figure 5: First version of a compact-packaged, coherent lidar transceiver. The transceiver comprises the pulsed 0.25-J, 10-Hz laser, CW seed laser, lidar transmit-receive switch, and dual-balanced detectors. The beam exits from the side hole.

Figures 2 and 3 show two versions of the laser head advancing from 10 LDAs and 22 water channels to 6 LDAs and 4 water channel. Not shown is an intermediate design with 6 LDAs and 8 water channels. Figure 4 is the most recent conductive cooled laser head. The first compact lidar transceiver is shown in Figure 5. Figure 6 presents the first compact lidar optics including the transceiver integrated into the NASA DC-8.

6. ACKNOWLEDGMENTS

The author acknowledges a long history of helpful discussions and funding from NASA's Science Mission Directorate (SMD) Earth Science Division (ESD), from the SMD/ESD Earth Science Technology Office (ESTO), and from Langley Research Center.



Figure 6: Compact-packaged coherent lidar optics in the cargo level of the NASA DC-8. The optics canister comprises the lidar transceiver, a beam-expanding telescope, an optical wedge for beam scanning, and a pressure window.

7. REFERENCES

1. U. N. Singh, S. Ismail, M. J. Kavaya, D. M. Winker, and F. Amzajerdian, "Space-Based Lidar," Chapter 9 in "Laser Remote Sensing," Takashi Fujii and Tetsuo Fukuchi, editors, CRC Press, Optical Science and Engineering Series, Vol. 97, ISBN 0824742567 (6/24/05)
2. Beginning with Huffaker, R.M. (ed.), "Feasibility Study of Satellite-Borne Lidar Global Wind Monitoring System," NOAA Technical Memorandum ERL WPL-37, DOC/NOAA/ERL/WPL for DOD/AF/DMSP (September 1978)
3. G. J. Koch, J. Y. Beyon, B. W. Barnes, M. Petros, J. Yu, F. Amzajerdian, M. J. Kavaya, and U. N. Singh, "High-Energy 2-micron Doppler Lidar for Wind Measurements," *Opt. Engr.* 46(11), 116201-1 to 116201-14 (2007)
4. G. J. Koch, J. Y. Beyon, P. J. Petzar, M. Petros, Jirong Yu, B. C. Trieu, M. J. Kavaya, U. N. Singh, E. A. Modlin, B. W. Barnes, and B. B. Demoz, "Field Testing of a High-Energy 2-Micron Doppler Lidar," *Journal of Applied Remote Sensing*, Vol. 4, 043512 (2010)
5. M. J. Kavaya, J. Y. Beyon, G. A. Creary, G. J. Koch, M. Petros, P. J. Petzar, U. N. Singh, B. C. Trieu, and J. Yu, "DAWN Coherent Wind Profiling Lidar Flights on NASA's DC-8 during GRIP," 16th Coherent Laser Radar Conference, Long Beach, CA USA (20-24 June 2011)
6. A. Valinia, J. Neff, S. Ismail, M. J. Kavaya, U. N. Singh, et al, "Lidar Technologies Working Group Report," Final Report of the NASA Earth Science Technology Office (ESTO) Laser/Lidar Technology Requirements Working Group (June 2006) [pp. 24-25, 89-113]
7. Baker, W. E., et al, "Lidar-measured winds from space: A key component for weather and climate prediction," *Bull. Amer. Meteor. Soc.* 76, 869-888 (1995)
8. G. D. Emmitt, "Feasibility and science merits of a hybrid technology DWL," Proceedings 11th Coherent Laser Radar Conference, 19-22, Great Malvern, UK (1-6 July 2001)
9. National Research Council (NRC), "Earth Science and Applications from Space: National Imperatives for the Next Decade and Beyond," The National Academies Press, Wash DC 2005, (Jan. 2007), Known as the "Earth Science Decadal Survey"
10. D. Emmitt, S. Wood, S. Greco, B. Gentry, and M. Kavaya, "Simulation Studies in support of an ISS GWOS mission: TropWinds," meeting of the Working Group on Space-Based Lidar Winds, Bar Harbor, ME (24-26 Aug 2010)
11. G. D. Rohaly and T. N. Krishnamurti, "An Observing System Simulation for the Laser Atmospheric Wind Sounder (LAWS)," *J. Appl. Meteorol.* 32 (9), 1453-1471 (1993)
12. J. Yu, U. Singh, N. Barnes, and M. Petros, "125-mJ diode-pumped injection-seeded Ho:Tm:YLF laser," *Opt. Lett.* 23, 780 (1998)
13. M.G. Jani, F.L. Naranjo, N.P. Barnes, K.E. Murray, and G.E. Lockard, "Diode-pumped long-pulse-length Ho:Tm:YLiF4 laser at 10 Hz," *Optics Letters*, 20 (8) 872-874 (1995)
14. M. Jani, N. Barnes, K. Murray, D. Hart, G. Quarles, and V. Castillo, "Diode-Pumped Ho:Tm:LuLiF4 Laser at Room Temperature," *IEEE J. Quantum Electron.* 33, 112 (1997)
15. J. Yu, B. C. Trieu, E. A. Modlin, U. N. Singh, M. J. Kavaya, S. Chen, Y. Bai, P. J. Petzar, and M. Petros, "1 J/pulse Q-switched 2-micron solid-state laser," *Optics Letters* 31(4), 462-464 (2006)
16. S. Braun et al, "NASA's Genesis and Rapid Intensification Processes (GRIP) Field Experiment—Bringing New Technologies to the Hurricane Intensity Problem," *Bull. Amer. Meteorol. Soc.*, submitted (Nov. 2011)