

General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

Production of methane and water from crew plastic waste

Janine Captain, Eddie Santiago. *NASA – KSC*

Clyde Parrish. *C Parrish Consulting*

Richard F. Strayer, Jay L. Garland. *Dynamac Corporation*

Abstract

Recycling is a technology that will be key to creating a self sustaining lunar outpost. The plastics used for food packaging provide a source of material that could be recycled to produce water and methane. The recycling of these plastics will require some additional resources that will affect the initial estimate of starting materials that will have to be transported from earth, mainly oxygen, energy and mass. These requirements will vary depending on the recycling conditions. The degradation products of these plastics will vary under different atmospheric conditions. An estimate of the the production rate of methane and water using typical ISRU processes along with the plastic recycling will be presented.

Outline

- Amount of plastic waste produced
- Pyrolysis techniques and products
- Product use (what do we want to make?)
- Reactor designs/ previous work
- Projected products
- Use of leftover propellants
- Possible use of biodegradable plastics
- Potential use of biological breakdown
- Possible products/ timeline / power savings?
- ESM to be determined
- Chemistry vs biology – architecture may decide which one is more suited toward the mission design

Need for recycling of resources

- In order to minimize resupply needs from Earth, we must maximize use of all resources
- One aspect of that is production of water and methane from 'waste'
- 'waste' includes plastic food packaging, human dry solid waste, and dry food waste
- Experimental work will focus on plastic food packaging

Resources available from waste

- Values based on data from ISS and Space Shuttle, given in quantity per crew member day (CM-d)

Type	kg/CM-d	% of total waste
Plastic food packaging	0.262	74.5
Crew dry solid waste	0.028	8
Food attached to plastic packaging	0.062	17.5

Ref 2-3

Thermal analysis of plastic packaging currently used on ISS and Shuttle

- 4 plastic pouches obtained
- Polymer composition identified for samples

Table I. Composition of the plastic bags used on the ISS and Shuttle and quantity used

Pouch Description	Composition
Clear Pouch – XX115	PE/PA/EVOH/PA 4.5 mil total thickness
Green Pouch – Altiivity MRE-70467	40 Gage PET/adhesive ^a /60 gage Biax/ Nylon/adhesive ^a /0.0004 Aluminum foil/adhesive/3.2 mil cast polypropylene
White Pouch	0.00048” Polyester / 0.0007” White LDPE / 0.0005” Aluminum foil / 0.002” Surlyn
Beverage Pouch	0.00048” Polyester / 0.00050” Aluminum foil / 0.0040” LLDPE & LDPE
Plastic Part	LDPE, Silicone valve, patch PET/Al, Foil/LLDPE+LDPE

^a The adhesive used to bind the layers is polyethylene

Approximate elemental composition of polymers for plastic packaging

Weight percent of the elements in each of the polymers

Polymer Acronym	Wt% C	Wt% H	Wt% O	Wt% N
PE	86	14		
HDPE	86	14		
LDPE	86	14		
LLDPE	86	14		
PET	63	4	33	
EVOH	67	11	22	
PA	69	6	13	12
CPP	86	14		
Surlyn	82	13	6	
Polyester	63	4	33	
Biax Nylon	69	6	13	12

- Basis for estimating amount of oxygen available in polymers to oxidize nitrogen, sulfur, carbon and hydrogen

Elemental generation from plastic packaging estimated per crew member day

Crew member daily estimated packaging used and generation rates of elements in grams (g/CM-d)

Name Pouch	No. ^a	Wt.	C	H	O	N	Al
MRE	3	24.18	15.81	2.39	0.43	0.38	5.17
Beverage	10	68.10	49.07	7.70	1.58	0.00	2.93
Clear	15	58.50	42.18	5.31	7.36	3.66	0.00
White (small)	6	29.70	10.78	1.32	2.44	0.00	15.14
White (large)	7	51.45	18.69	2.28	4.23	0.00	26.23
Plastic part	10	30.20	25.97	4.23	0.00	0.00	0.00
Total	51	262.13	162.51	23.23	16.04	4.04	56.32


^a The number of pouches is estimated from weight of packaging plastic used (0.262kg) and how crew members might use pouches

DSC/TGA

- Thermal analysis analytical tool to study the behavior of a sample as function of temperature
- DSC (differential scanning calorimetry) provides information on heat flow during the analysis (endothermic/exothermic)
- TGA (thermal gravimetric analysis) provides information on the weight change as a function of temperature
- STA (simultaneous thermal analysis) combines DSC/TGA into a single analytical tool

Example of STA curves

- Endothermic curve (ex. Pyrolysis, Aluminum melting)
- Exothermic curve (incineration or combustion process)
- Comparing the weight loss with the heat flow indicates how much of the sample lost weight due to each process
- Purge gas can be changed to simulate different atmospheres (presence of oxygen or lack of oxygen)

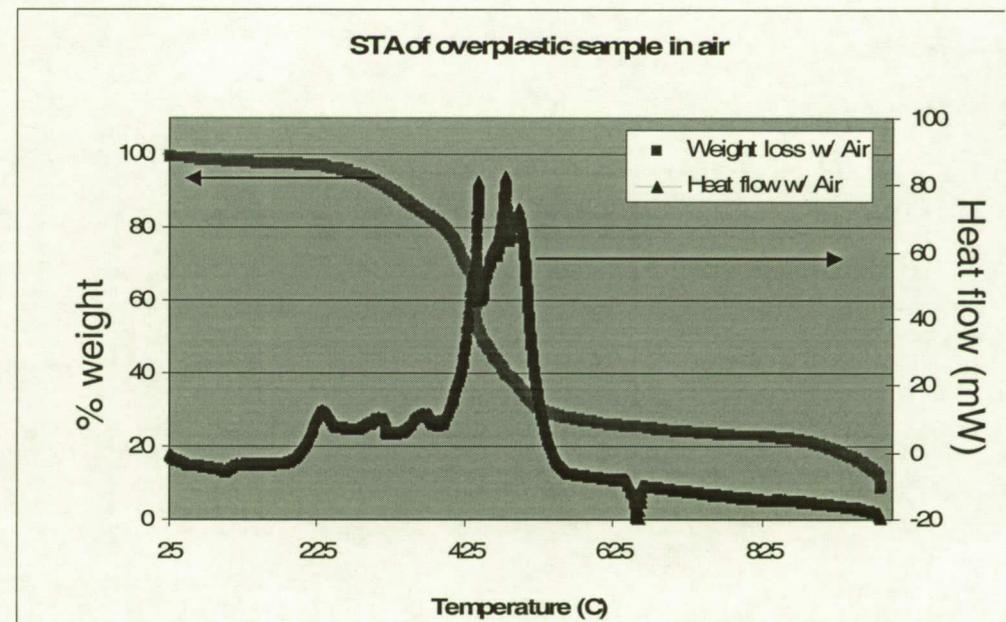

Experimental Conditions

- 8 -15 mg samples were analyzed in platinum pans
- Samples taken from 25 – 1000 °C at a rate of 10 °C/min
- Atmosphere during analysis was either air or argon, the presence of oxygen provided excess oxygen for combustion of samples for comparison to an inert atmosphere

MRE pouch analysis


- Polymer composition of sample
 - Polyethelene 160-300 °C
 - Polyethelene terephthalate 380-515 °C
 - Poly(vinyl alcohol) 400-500 °C
 - Polyamide (Nylon)
- Sample also contains aluminum foil layer
 - Endothermic dip at 660 °C corresponds to melting pont of aluminum

STA of Overwrap Sample in Air

STA

File Name: overwrap white bag Clyde2 STA
 Size: 9.4927
 Desc: 1: Overwrap bag sample; Clyde
 Desc: 2: silver metallic
 Applied Chemistry Lab, KSC

Operator: JC
 Date: 05/09/2007
 Time: 13:56:09
 Instrument: STA 1000

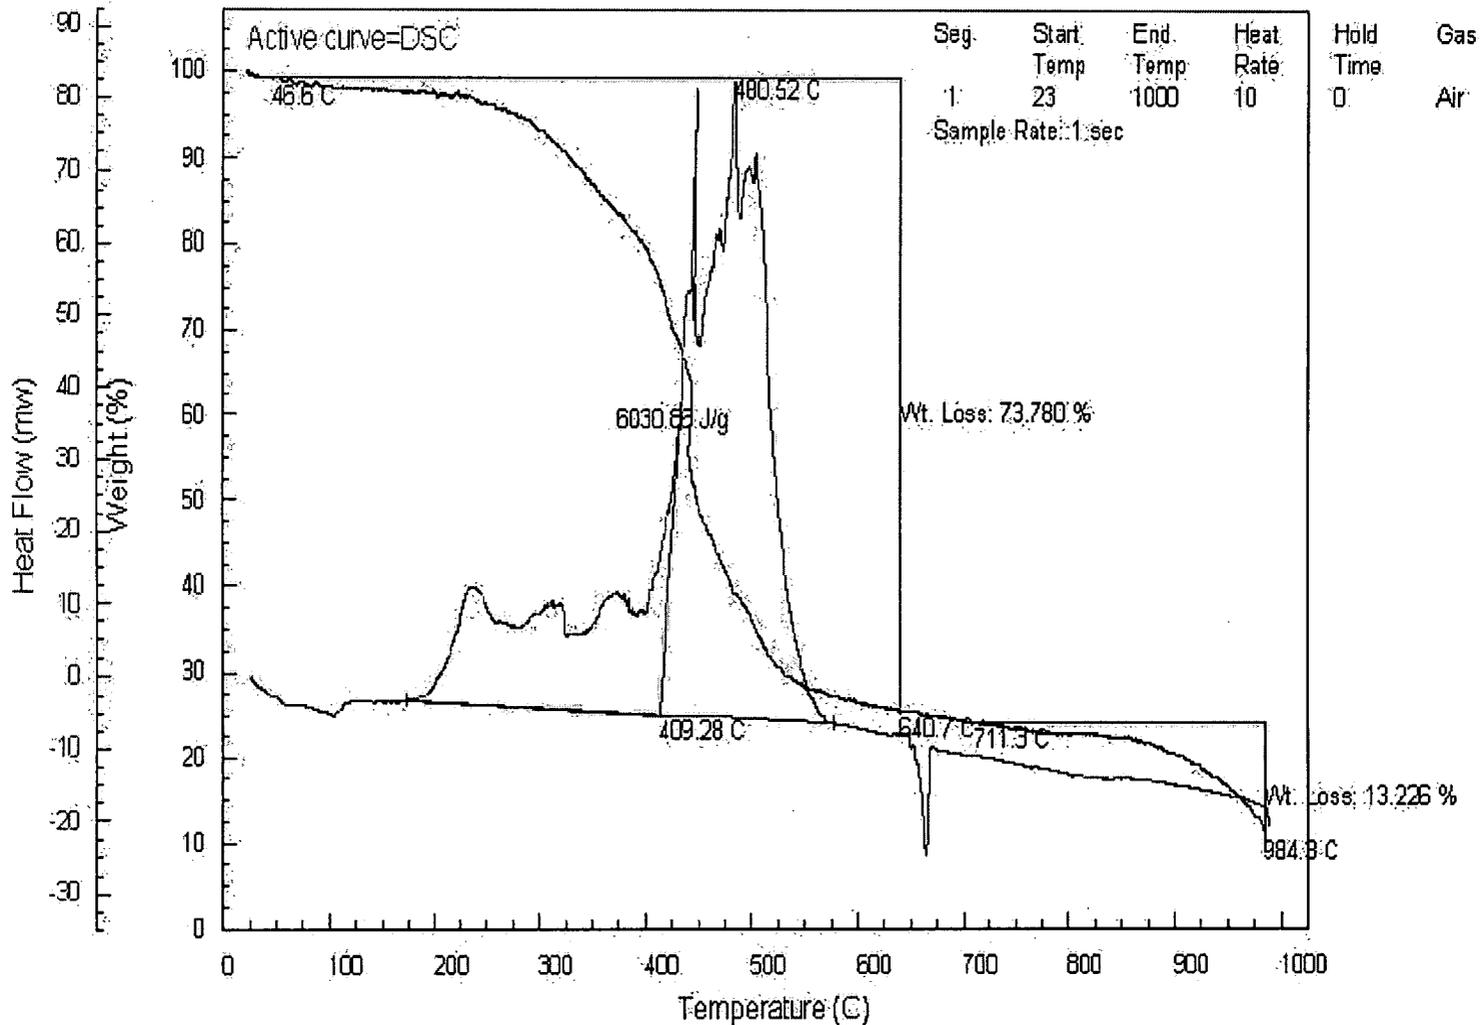


STA of Overwrap Sample in Argon

STA

File Name: overwrap white bag Clyde Argon STA
 Size: 7.9226
 Desc. 1 : White overwrap bag - Clyde's samples
 Desc. 2: metallic liner
Applied Chemistry Lab, KSC

Operator: JC
 Date: 02/06/2008
 Time: 06:52:20
 Instrument: STA 1000

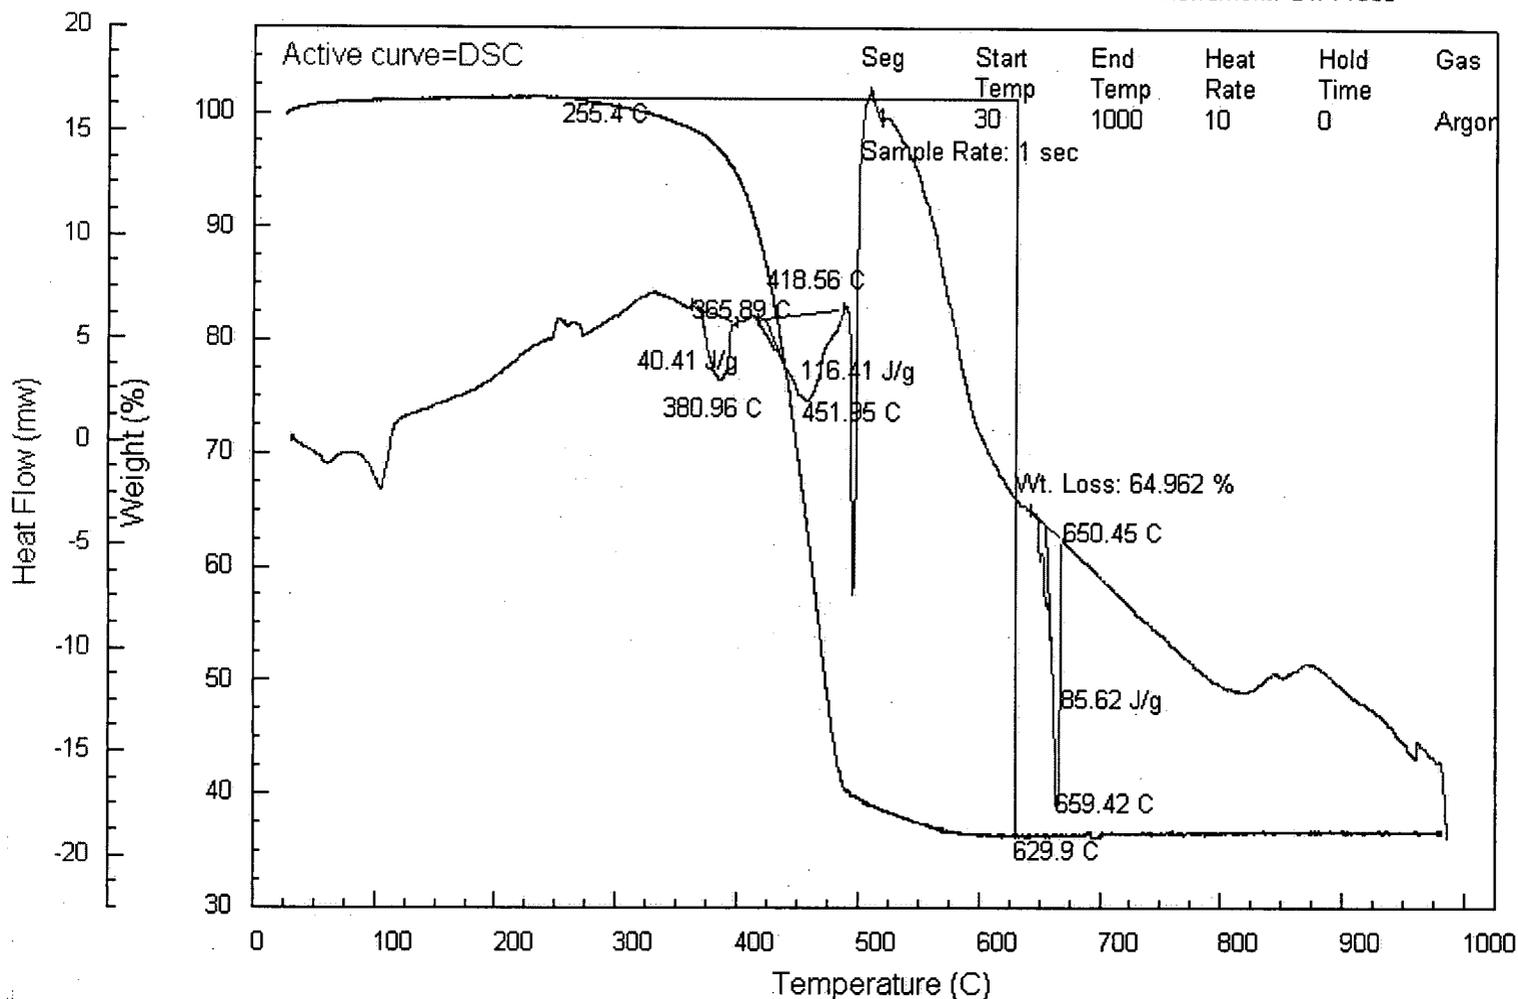


MRE-like sample bag in air

STA

File Name: MRE-like green bag Clyde sample STA
 Size: 10.1142
 Desc: 1: MRE-like green bag
 Desc: 2: Clyde sample plastic
 Applied Chemistry Lab, KSC

Operator: JC
 Date: 05/03/2007
 Time: 09:02:56
 Instrument: STA-1000

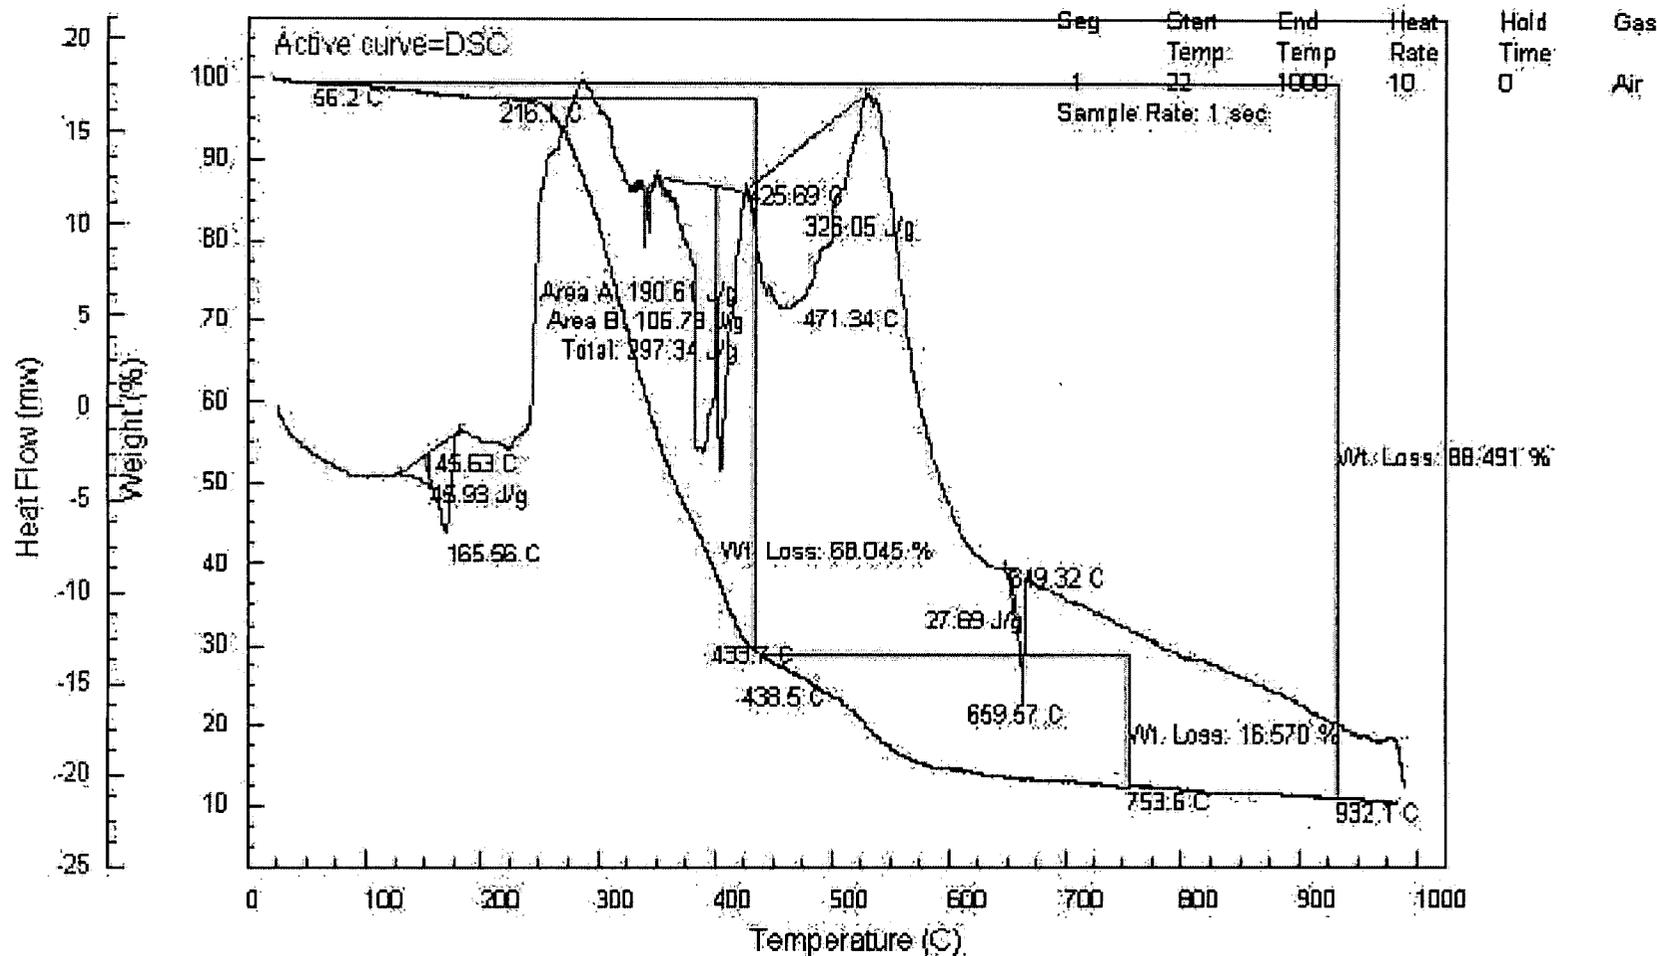

MRE like sample bag in Argon

STA

File Name: fluid bag silver Clyde argon STA

Size: 7.087

Desc. 1 : Fluid bag Clyde argon

Desc. 2: metallic bag


Applied Chemistry Lab, KSC

Operator: JC


Date: 02/06/2008

Time: 15:11:20

Instrument: STA 1000

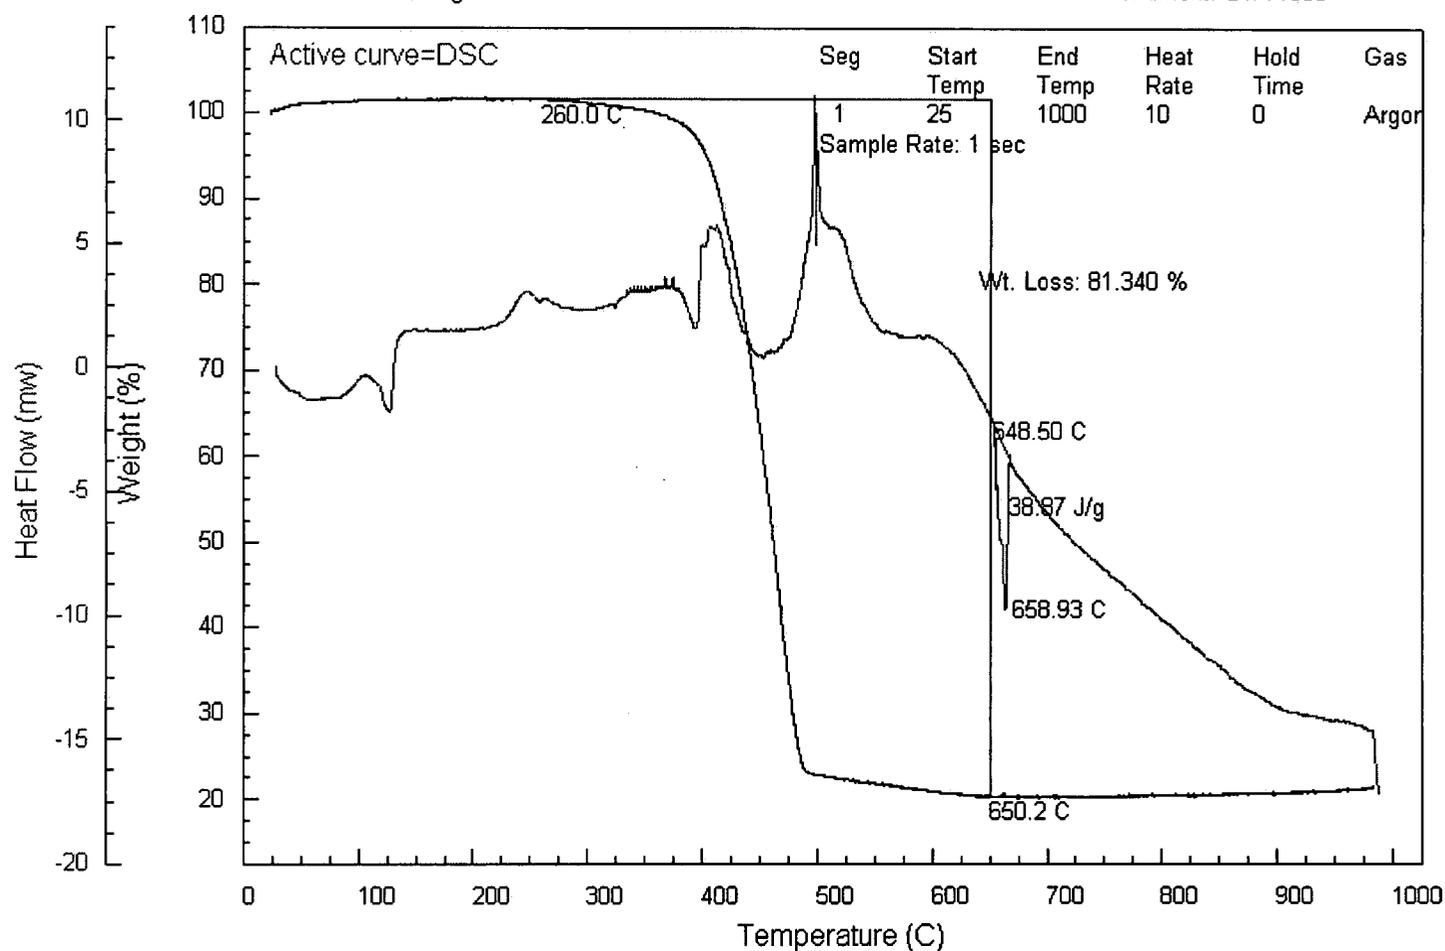

STA of overwrap sample in argon and air atmosphere

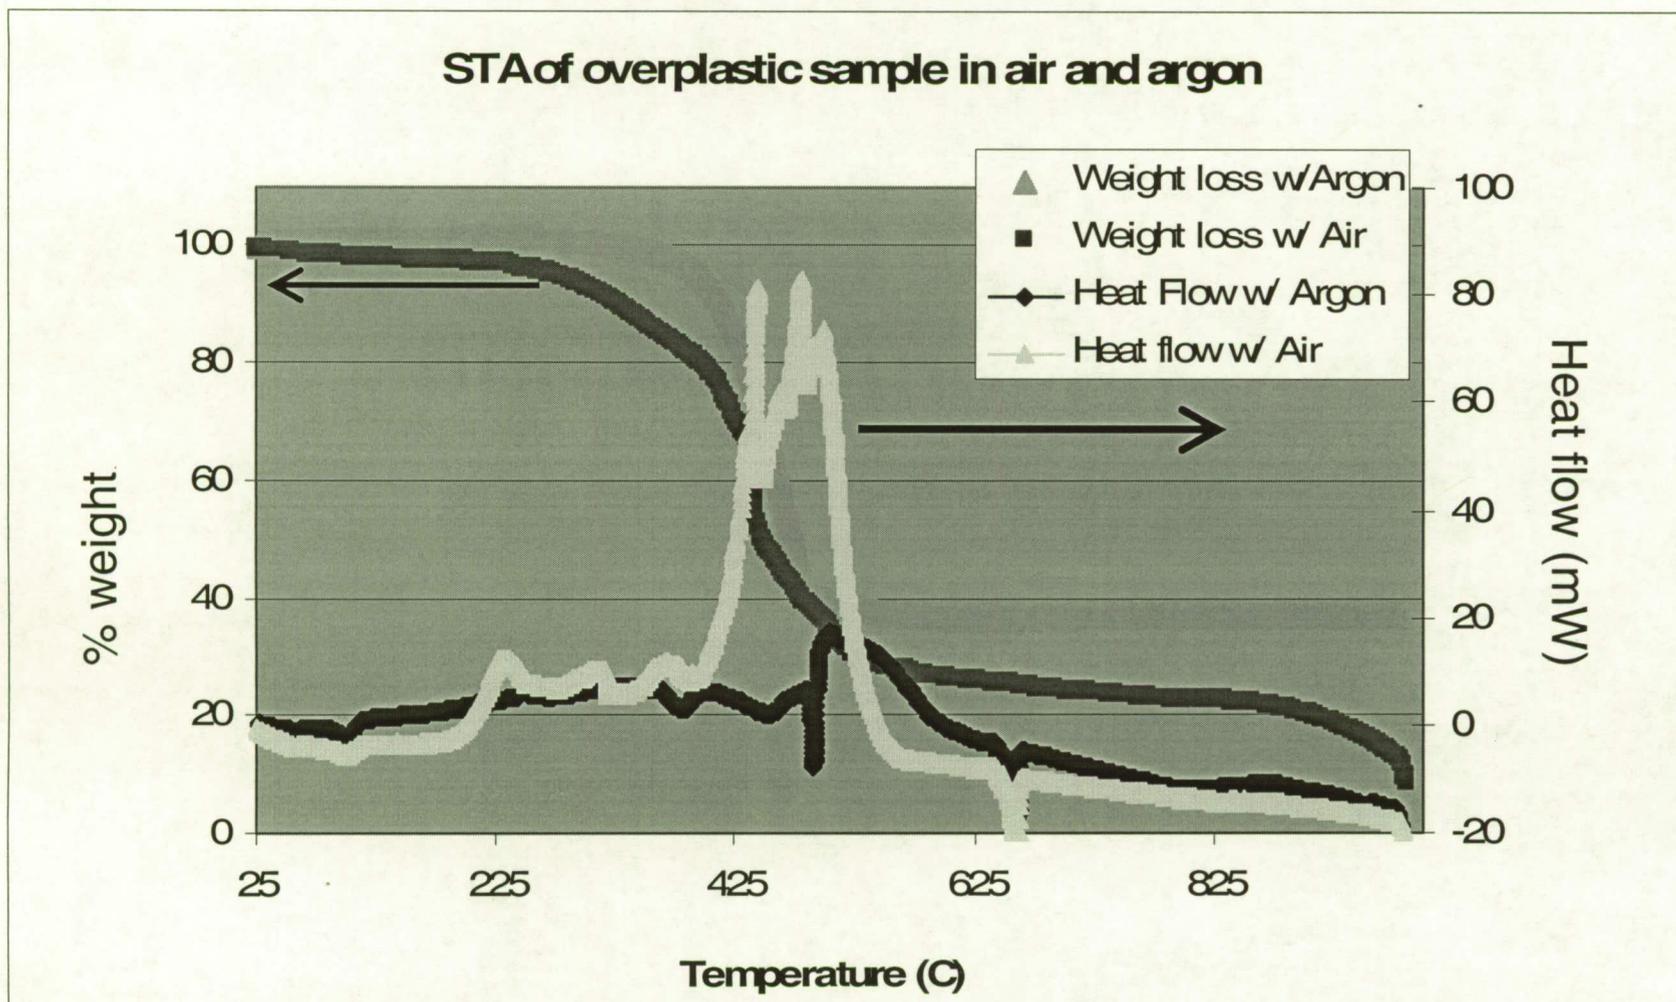

Summary of STA of polymers

- Majority of weight loss for all polymers occurs from 200-600 °C
- Pyrolysis at 600 °C will decompose polymers and leave aluminum or aluminum oxide when present in samples (no oxygen will be consumed oxidizing the aluminum)
- Further analysis will determine exact products in different atmospheres

Composition used for estimation of water and methane production

Table VIII Elemental composition of the plastic packaging, human solid, and food wastes attached to plastic packaging expressed as grams on a dry ash-free basis per CM-d

Waste Type	Total Wt	C	H	O	N	S	Al
Plastic Packaging	262.13	162.5	23.23	16.04	4.04	0.000	56.32
Human Solid (dry/ash-free)	28.00	15.71	2.30	8.80	0.86	0.32	0.00
Food Attached to Packaging (dry)	15.03	7.14	0.93	6.40	0.09	0.47	0.00
Total	305.16	185.4	26.46	31.24	5.00	0.79	56.32

- Plastic packaging represents the majority of the waste
- Use values to estimate the oxidation products (assume that process occurs at a temp less than 660 to prevent oxidation of aluminum)

Waste Treatment Options

- Several treatment options could be applied to this production scheme
 - Incineration
 - Pyrolysis/gasification
 - Aerobic biodegradation (long mission durations)
 - Anaerobic biodegradation (long mission durations)
 - Supercritical water oxidation (emerging technology)

Comparison of Processes

- Hydrogen is the limiting resource on the lunar surface (typically less than 100ppm)
- Excess H₂, between 125 and 152 kg, will remain when O₂ tank is empty after power generation in LSAM tanks
- This hydrogen can be used in the Sabatier process for methane production from CO₂ produced in thermal degradation of waste

Water & Methane Production from Trash/Crew Waste

- The moon is poor in carbon and possibly hydrogen (permanently shadowed crater question)
- Plastic trash and crew waste may be a worthwhile in-situ resource (after processing by ECLSS) for water and methane fuel production
 - Currently only 50% of water will be removed from crew waste
- Elemental Composition of Plastic Packaging, Human Solid, and Food Wastes Attached to Pkg (Crew of 4-day)

Waste Type	Total Wt	C	H	O	N	S	Al
Plastic Packaging	1048	650	93	64	16	0	225
Human Solid (dry/ash-free)	111	63	9	35	3	1	0
Food Attached to Packaging (dry)	62	29	4	26	0	3	0
Total per day for Crew of 4 (gms)	1221	742	106	125	19	4	225
Total for Crew of 4 per year (kg)	446	271	39	46	7	1	82

- Incineration *currently* considered best waste processing approach
 - Low temperature incineration (below 660 C) with subsequent oxidation/methanation of released gas
 - Consumes internal oxygen and hydrogen with carbon (prevents oxidation of aluminum) but leaves behind large amount of solid char (carbon)
 - High temperature incineration with sabatier conversion of carbon dioxide into methane and water

Plastic/Crew Waste Processing at Outpost (Values for Crew of 4)

	In Waste			Added		Waste Gases				Products		50% H ₂ O In Solids
	C	H	O ₂	O ₂	H ₂	NO	SO ₂	CO	Al ₂ O ₃	H ₂ O	CH ₄	
Process 1: Low Temp. Pyrolysis (per day gm)	741	106	125	759	0	43	6	17	0	932	10	5780
w/ Methanation/Oxidation (per year kg)	270	39	46	277	0	16	2	6	0	340	4	2110
Process 2: High Temperature (per day gm)	741	106	125	2082	388	43	6	0	426	2225	989	5780
Pyrolysis w/ Sabatier (per year kg)	270	39	46	760	142	16	2	0	155	812	361	2110

Conclusion

- Low temperature pyrolysis provides some water production benefit but little methane
- High temperature pyrolysis provides water and methane that could be used for ascent top-off
- Water remaining in solid waste/trash after ECLSS processing is a significant amount per year

Biodegradable plastics

- They are currently available
 - Telles (www.metabolix.com) produces a bioplastic family named Mirel™
 - NatureWorks LLC (www.natureworksllc.com) produces plastics used by a variety of companies
- Slight increase in cost should not be an obstacle to this technology application
- Provides alternative method for degradation – microbial organisms which are typically found in terrestrial environments (composting)

Biological production of methane

- Chynoweth et al. and Xu et al. have reported on a 3 stage anaerobic composting system for solid waste treatment expected in an Advanced Life Support System for space habitation
- System is named Sequential Batch Anaerobic Composter (SEBAC)
- Methane production rate averaged 0.3 L CH₄ per gram (dry weight) of volatile solids added

Add ref.

System trades

- Thermal/Chemical system
 - Capable of dealing with current waste stream
 - Power requirements
 - Gas clean up requirements
 - Maintenance
- Biological system
 - Typically slower process
 - Lower power req'ts
 - Require breakdown of current waste or transition to biodegradeable plastics
 - Maintenance
 - Environmental factors

Each system may fit better into specific architectures (mobile vs stationary)

Ongoing work

- Further analysis of biological systems will be performed to determine applicability to lunar missions
- Equivalent system mass (ESM) will be determined for comparison to chemical / thermal systems for production of methane from plastics
 - Mass, volume, consumables, maintenance, etc.

LSAM Power & Hydrogen Scavenging for Water Production

- The total recoverable mass varies between 132 and 801 kg for the oxygen system and 141 and 252 kg for the hydrogen system
 - Exact amount of unusable propellants will vary on the detailed design of the feed system
- The amount of recoverable propellants will vary from mission to mission depending on the reserves used
- For unshielded tanks in view of the sun
 - Estimated O₂ boiloff rate is 388 g/hr and H₂ boiloff rate is 503 g/hr
 - Boil off rates can be reduced if the remaining residuals can be transferred into a single storage tank and that tank is not in view of the sun
 - Oxygen boil off reduces to 67 g/hr and Hydrogen boil off reduces to 46.7 g/hr
 - O₂ loss is minimal and H₂ loss is between 5 kg and 67 kg, depending on the ullage temperature.
- Current estimates of fuel cell use rates are 1600 g/hr oxygen and 200 g/hr hydrogen (82 hours to 500 hours of operation) at 4 kW
 - LSAM oxygen will be entirely consumed first.
 - Excess H₂, between 125 and 152 kg, will remain when O₂ tank is empty after power generation**
- Significant amount of water can be made for fuel cell power, ECLSS, EVA, and radiation shielding from *each mission***

		LOX		LH2
Usable Propellant		20891	kg	3482
	Nominal	20222	kg	3371
	Reserve	669	kg	111
Unusable Propellant				
	Residual Vapor	2.23	kg	100.2
	Residual Liquid	211.0	kg	54.5
Unrecoverable Mass				
	Feedline Liquid	33.69	kg	5.67
	Low Pressure Vapor	47	kg	8.27
Total Recoverable Mass				
	Minimum	132.1	kg	140.8
	Maximum	800.6	kg	252.2

Water from Fuel Cell				Water from ISRU O ₂			
LSAM Residual		Water Made	Residual H ₂ Needed	Extra H ₂	In-Situ O ₂	Extra Water	Total Water
O ₂	H ₂						
132	141	149	17	125	996	1121	1269
801	252	901	100	152	1215	1367	2268

- **Large volume and mass associated with H₂ gaseous storage concludes that best method of H₂ recovery is to convert quickly to water with In-situ oxygen**