

Robotic Transfer and Interfaces for External ISS Payloads

3rd Annual ISS Research and Development Conference

June, 2014

Phillip Callen
Software, Robotics, and Simulation Division
Engineering Directorate
NASA/JSC

External payloads will be interacting with ISS robotic systems in one way or another.

Robots on ISS provide a lot of flexibility, but that also brings increased options and complexity that must be taken into account.

The purpose of this presentation is to provide an overview of the robotic systems and the options available.

Agenda


- Robotic Systems
- Transport
- Payload Locations
- Payload Interfaces
- Robotic Forums (How To Get Started)

ISS Robotic Systems

Space Station Remote Manipulator System (SSRMS)



Special Purpose Dexterous Manipulator (SPDM)

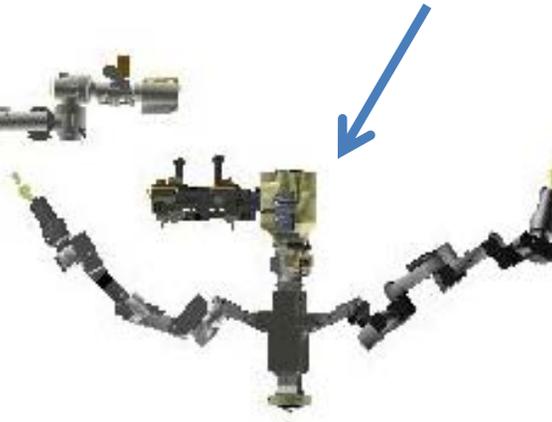


EVA Crewman
(for scale)




JEM Remote Manipulator System (JEM RMS)






Mobile Base System (MBS)
On Mobile Transporter (MT)

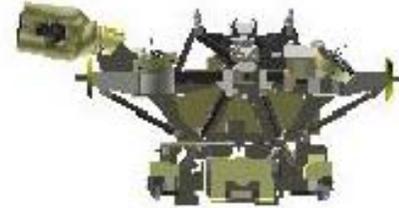


ISS Robots

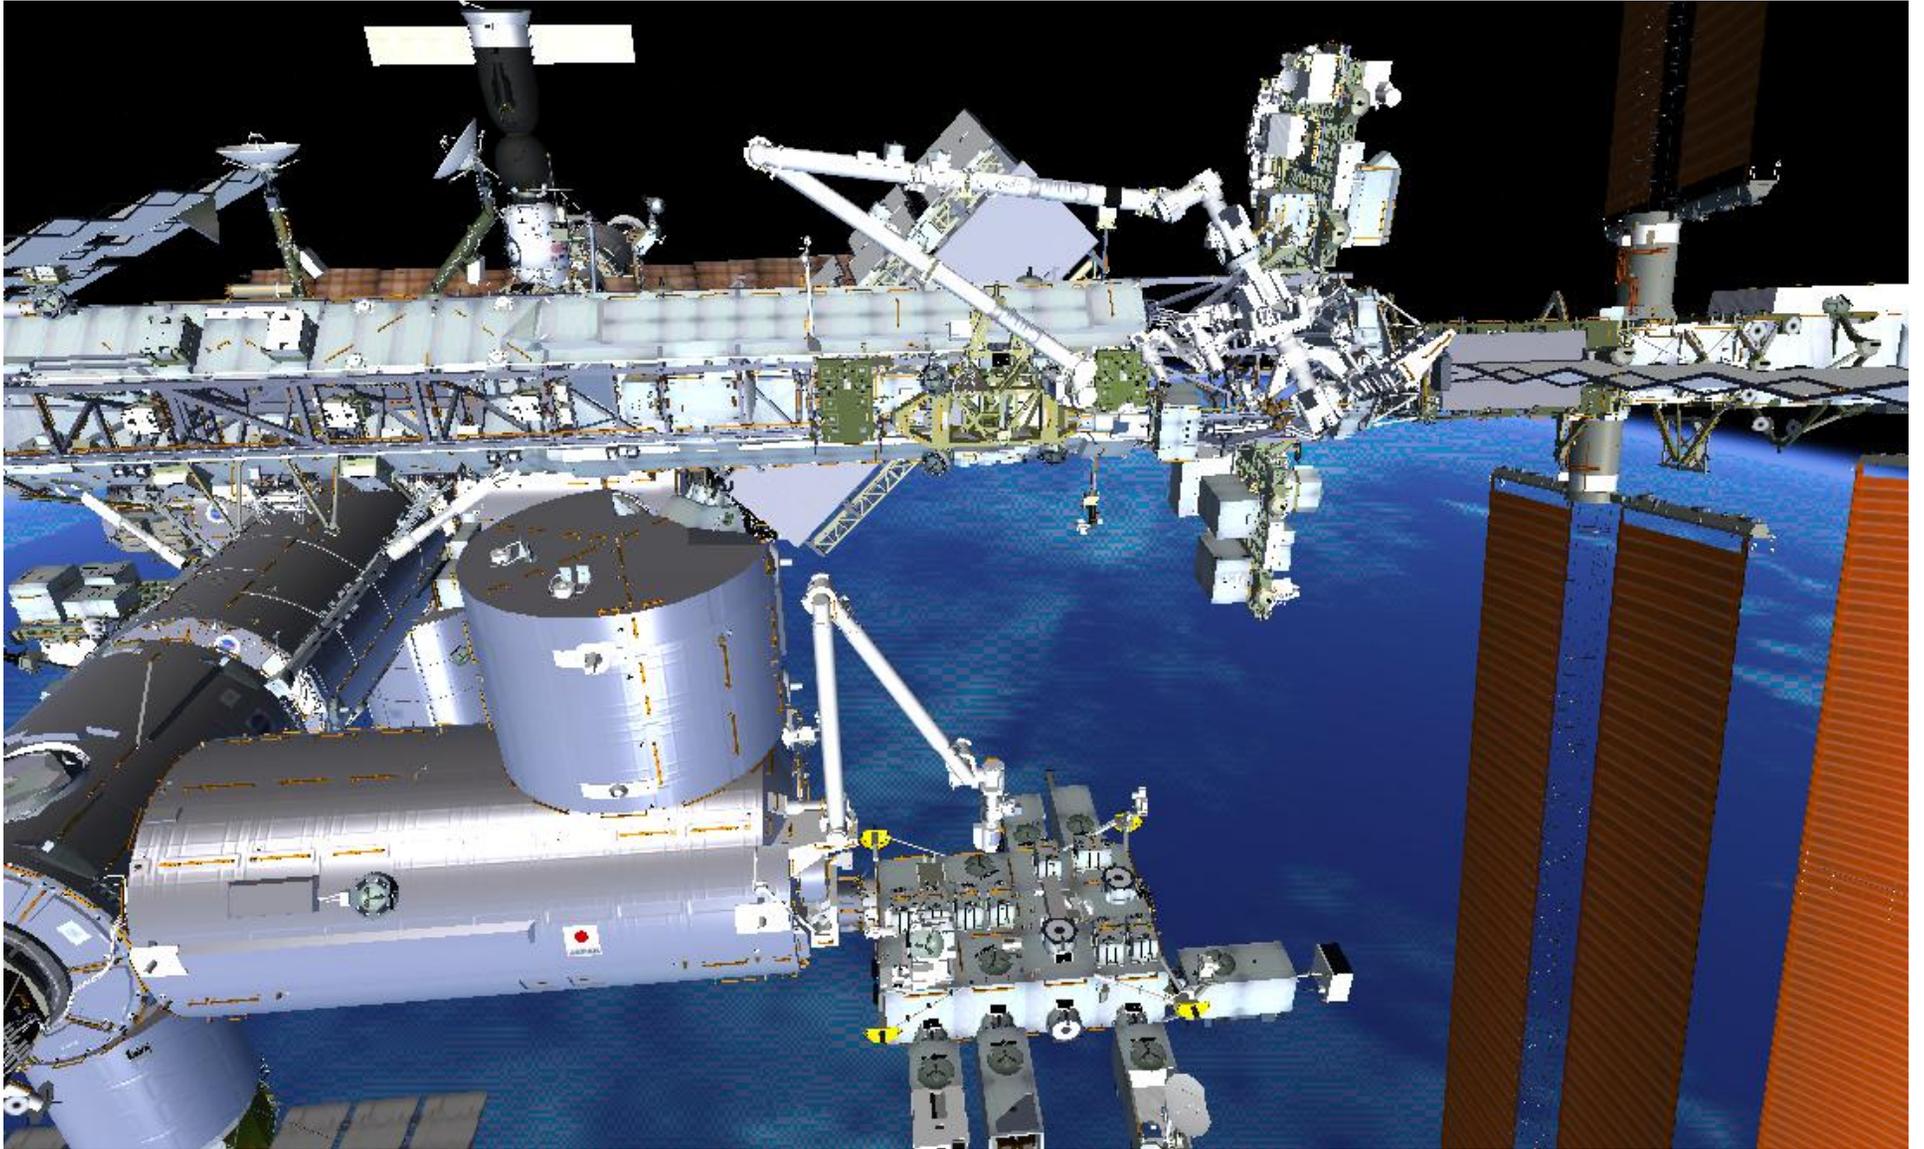

JEM RMS

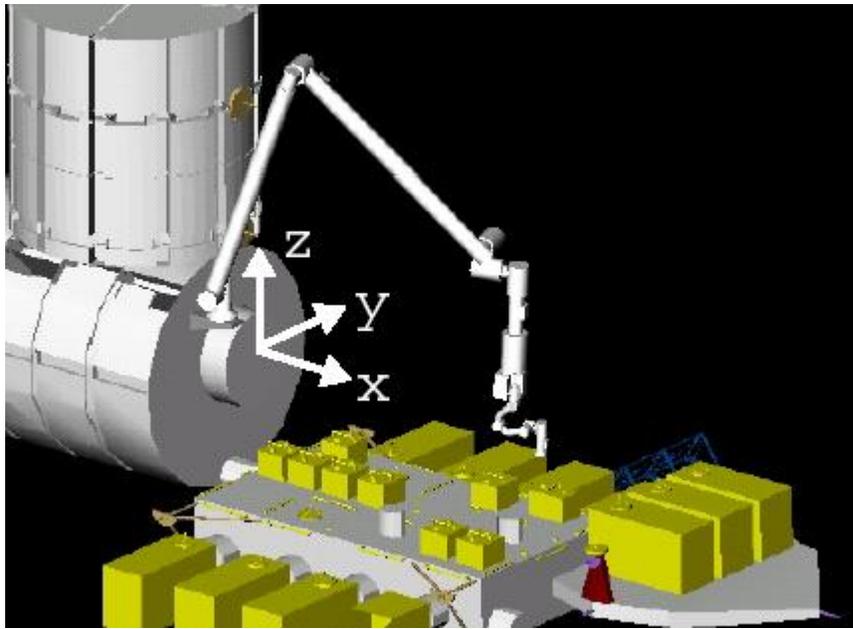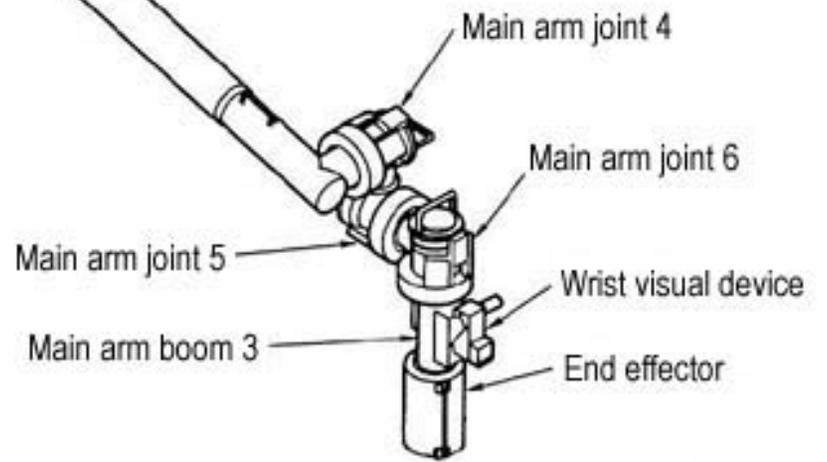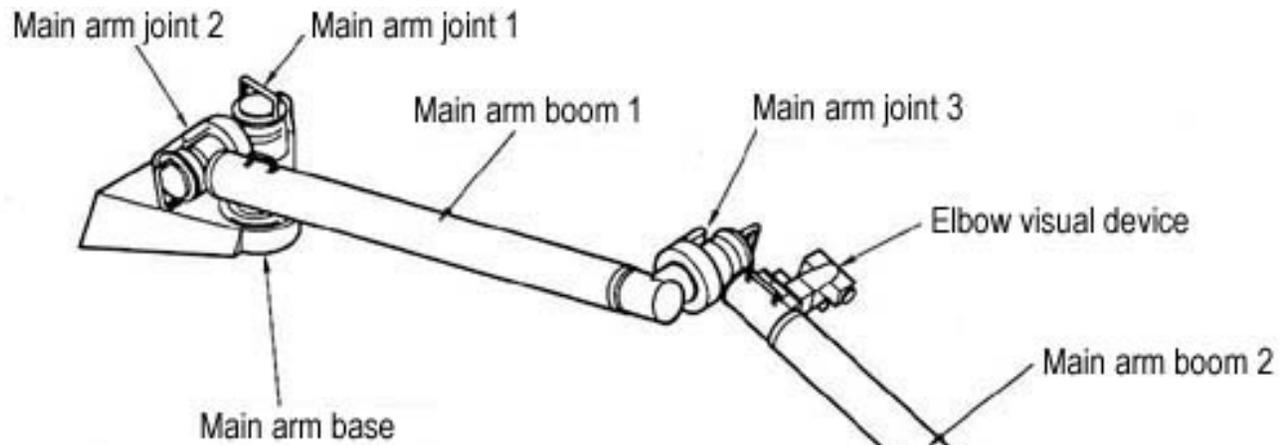

SSRMS

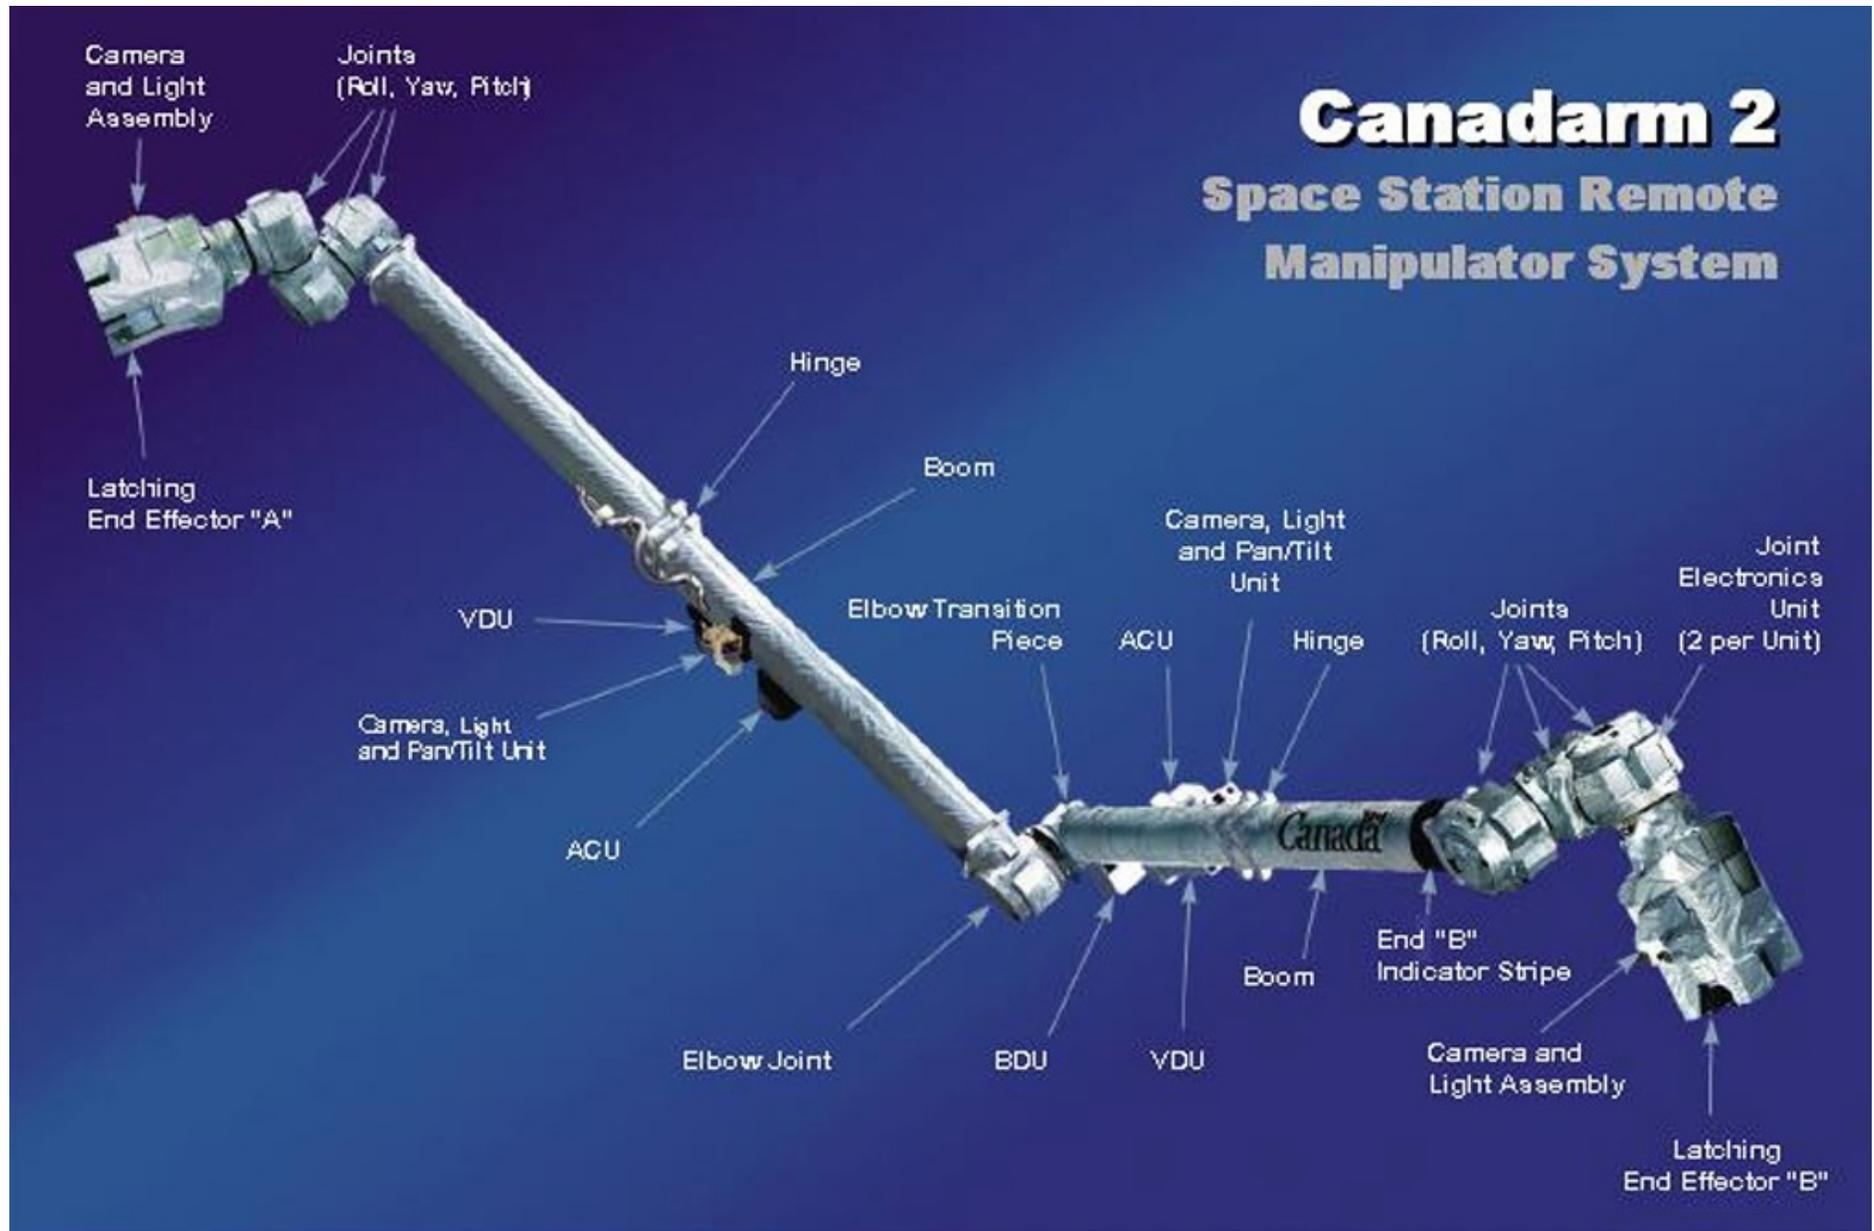

SPDM Component Overview


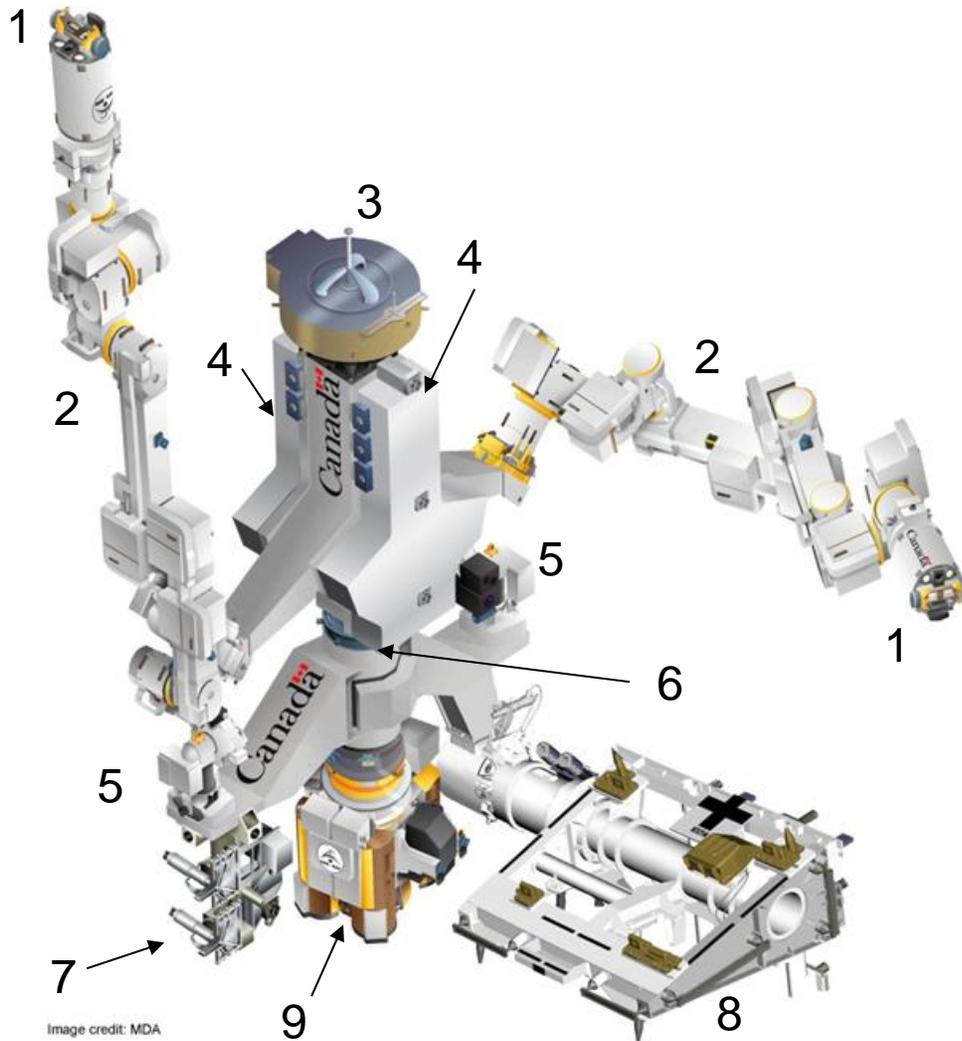



Image credit: MDA

1. Two ORU/Tool Changeout Mechanisms (OTCMs)
2. Two arms
3. Power & Data Grapple Fixture (PDGF)
4. Two Electronics Platforms
5. Two Camera/Light/Pan-Tilt Assemblies (CLPAs);
6. Body Roll Joint
7. Tool Holder Assembly (THA)
 - a) 2 Robot Micro Conical Tools (RMCTs)
 - b) Socket Extension Tool (SET)
 - c) Robotic Offset Tool (ROST)
8. Enhanced ORU Temporary Platform (EOTP) with 2 PFRAMs and 3 Stanchion sets
9. SPDM Latching End Effector (LEE) with Camera/Light Assembly (CLA)

ORU Tool Change-out Mechanism (OTCM)

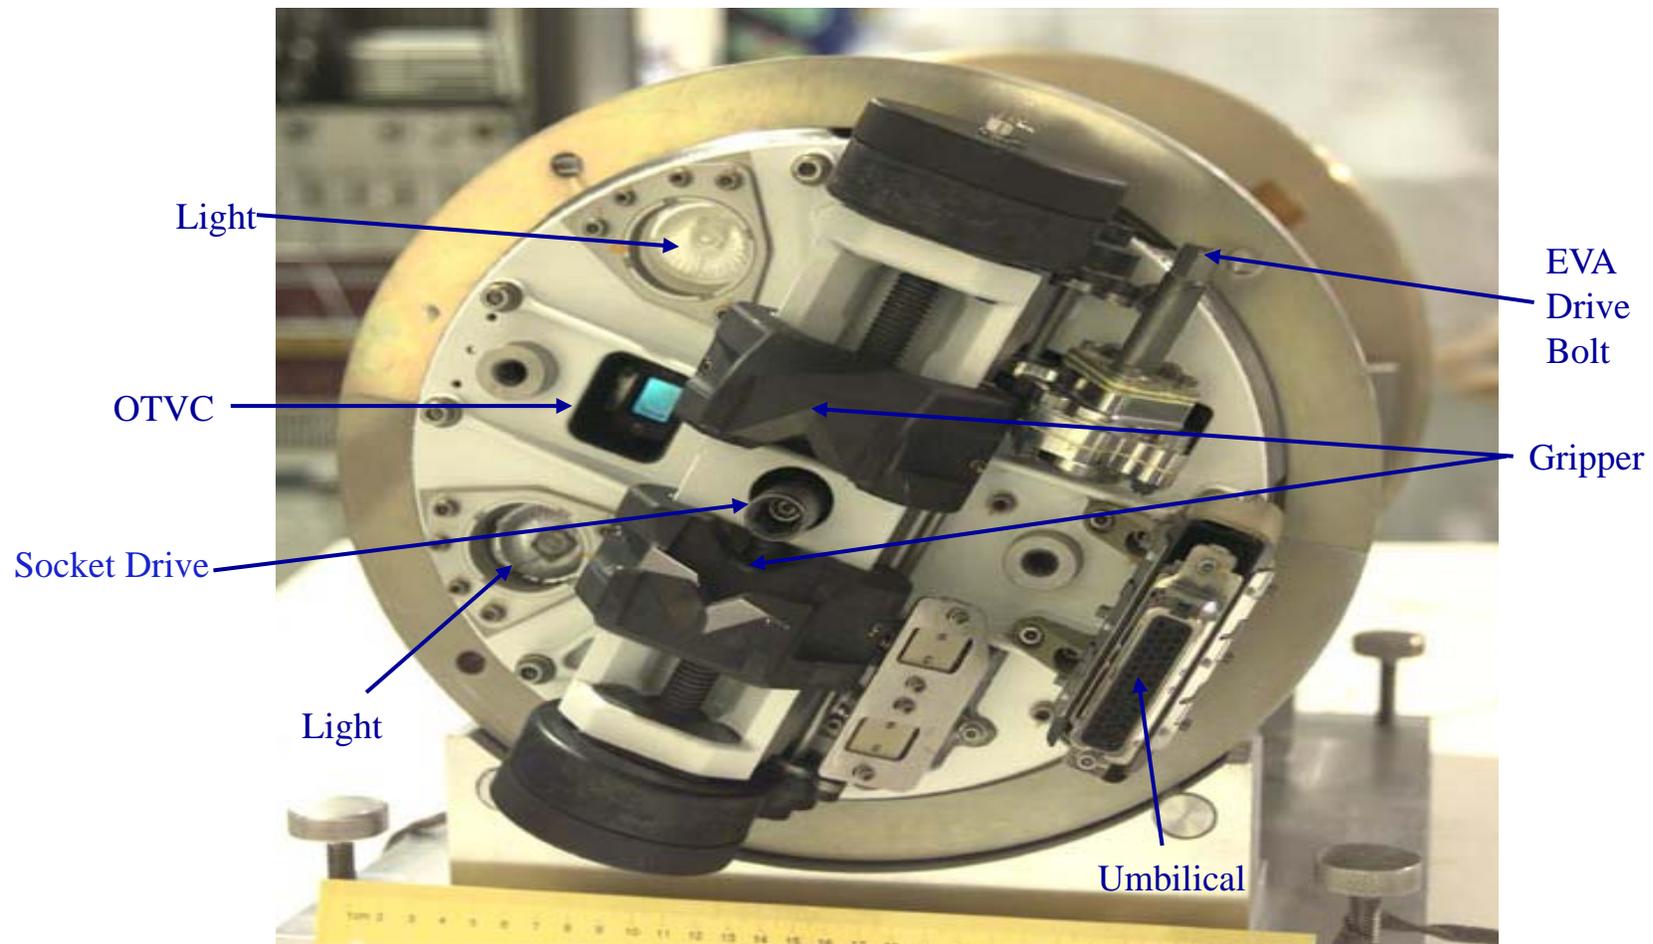

SSRMS with SPDM

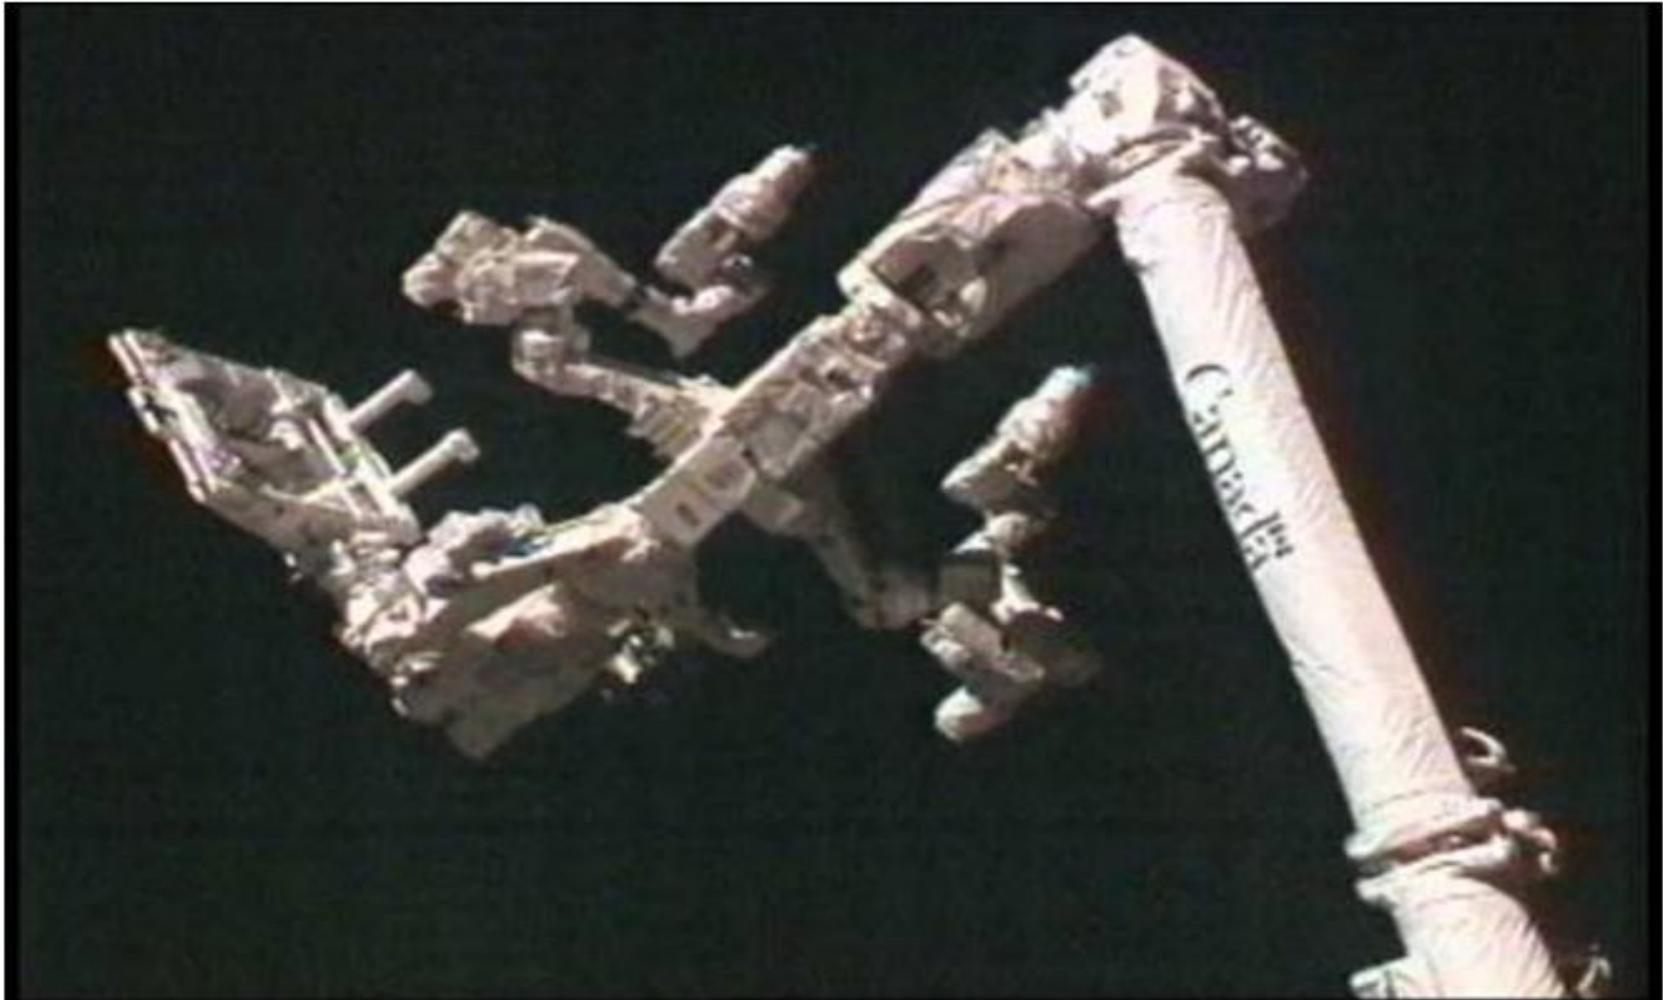

Transportation – How To Get To ISS And Why It Matters

Internally and Externally Launched
Payload Capable



SpaceX Dragon



JAXA HTV



Dragon "Trunk"



Exposed Pallet (EP)

Direct installation to ISS location via robotics


Internally Launched Payload
Capability Only



Orbital Cygnus




ESA ATV

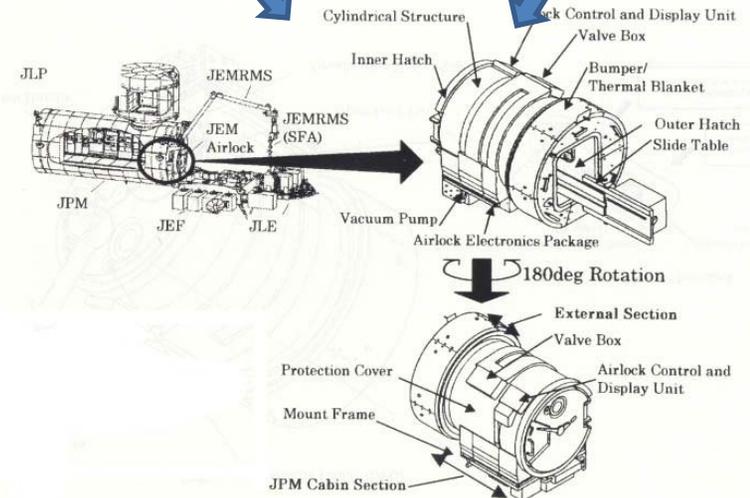

Payload must use JEM Airlock to get external and then installation via robotics

Externally Launched Payloads Removal From Launch Vehicle

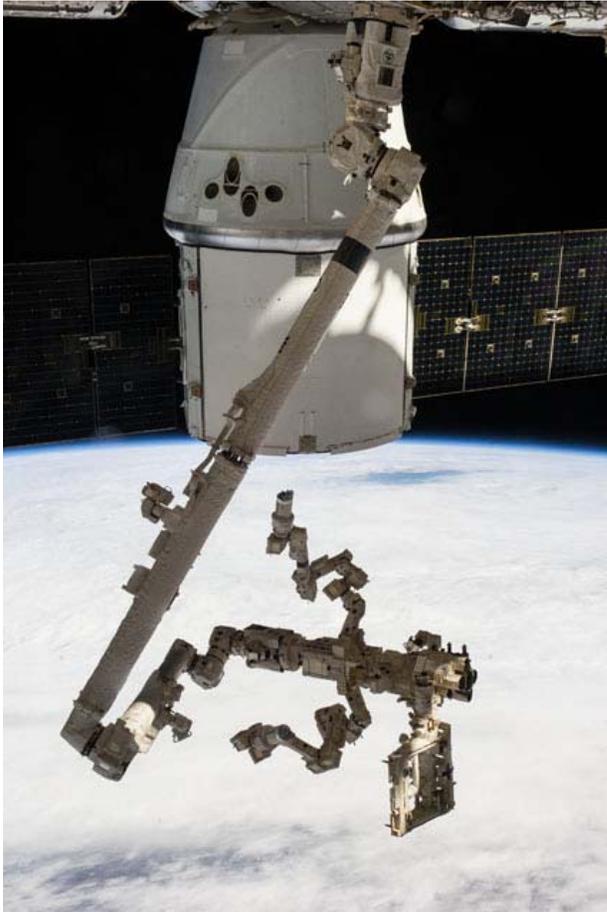


SSRMS/SPDM Preparing To Enter Dragon Trunk For Payload Extraction



SSRMS Extracting HTV Exposed Pallet (EP)

EP Installed on JEM EF

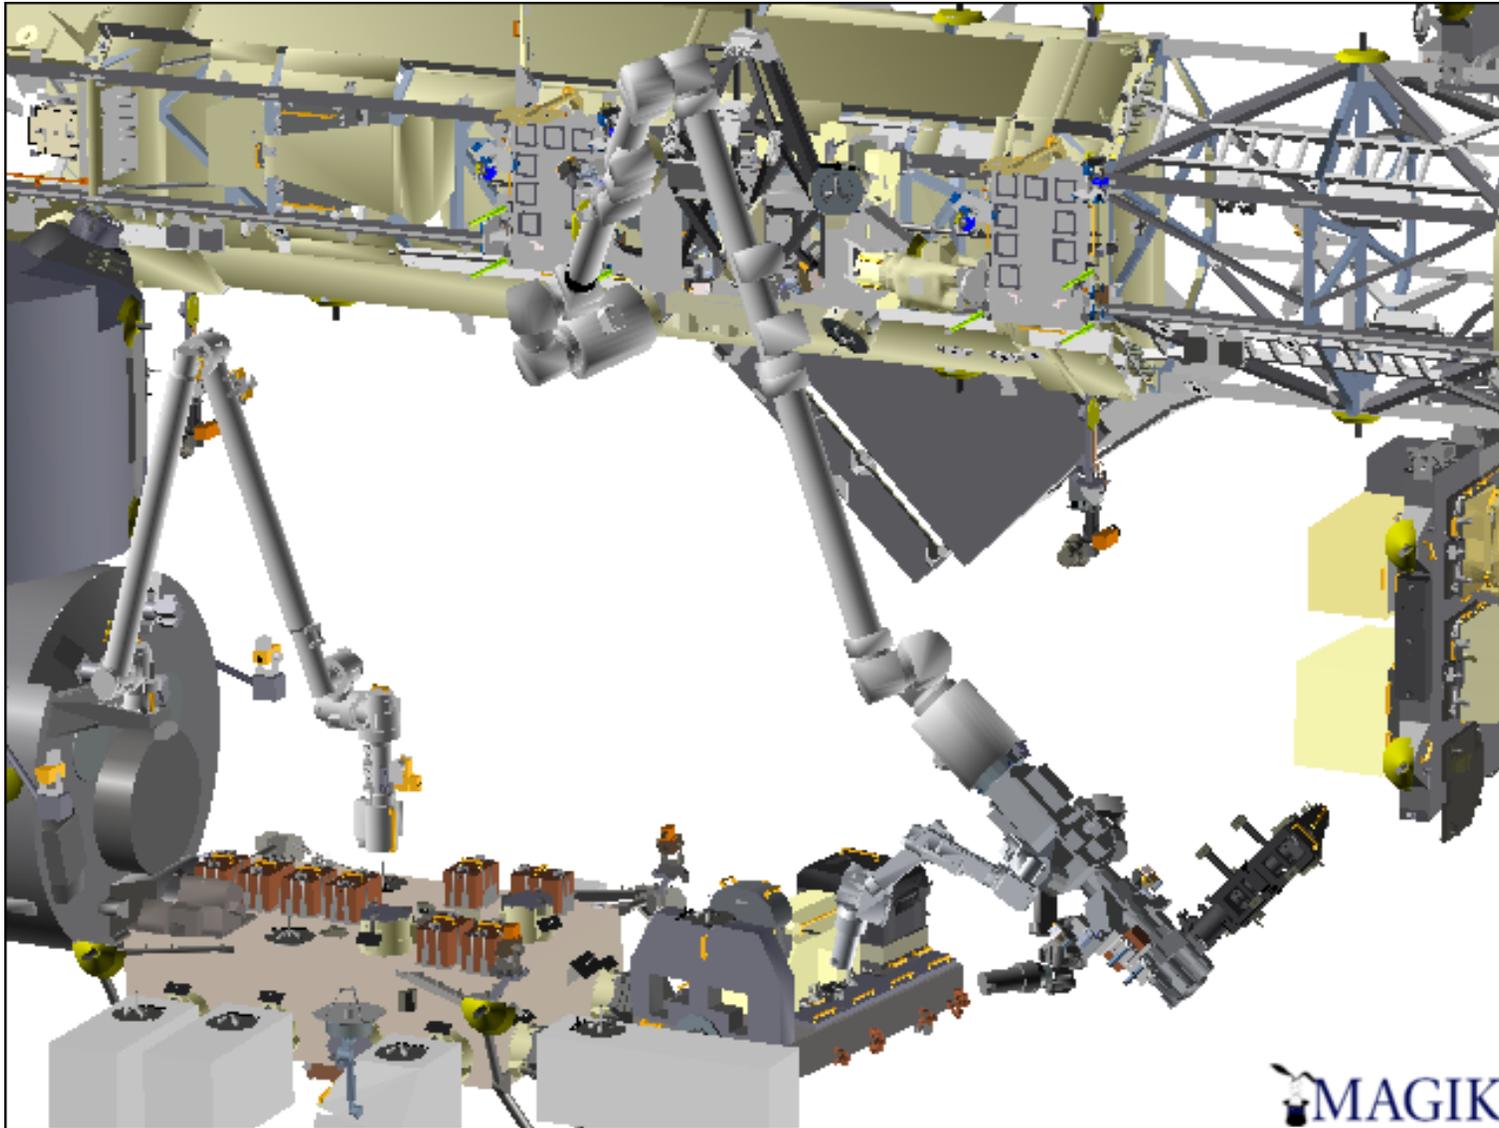

Payloads will be removed from EP and installed on ISS (either JEM EF or ELCs) ¹²

JEM Airlock Usage

- For payloads that plan to launch internally, but then go external, the only robotic option is to go through the JEM Airlock
- There are three primary JEM Airlock interfaces for SPDM ops
 - Capture type – requires a specific slide table interface on the payload
 - Bolt-fixed type (Direct Mount) – payload carrier bolts directly to the slide table which would necessitate a robotically-actuated payload release interface between the payload and the carrier
 - JEM ORU Transfer Interface (JOTI) – does not require any specific payload interfaces which allows it to accommodate hardware not specifically designed to utilize the native JEM Airlock interfaces







JEM Airlock and Slide Table





JEM Airlock Table with Payload Installed (capture type)

JEM Airlock Envelope (with JOTI installed for reference)

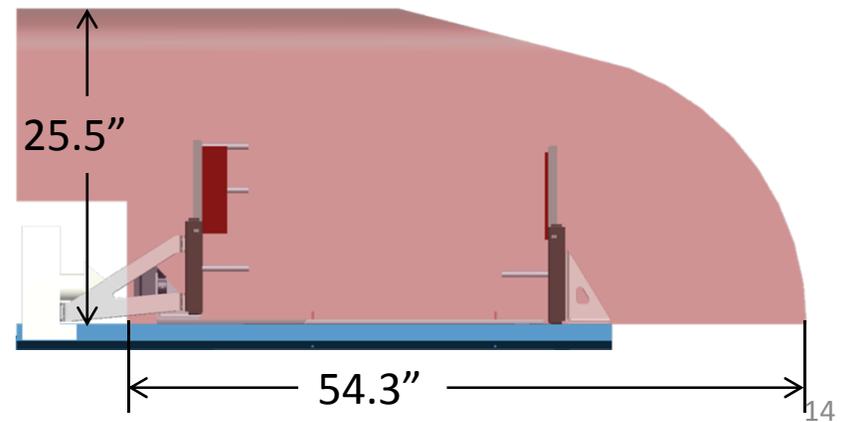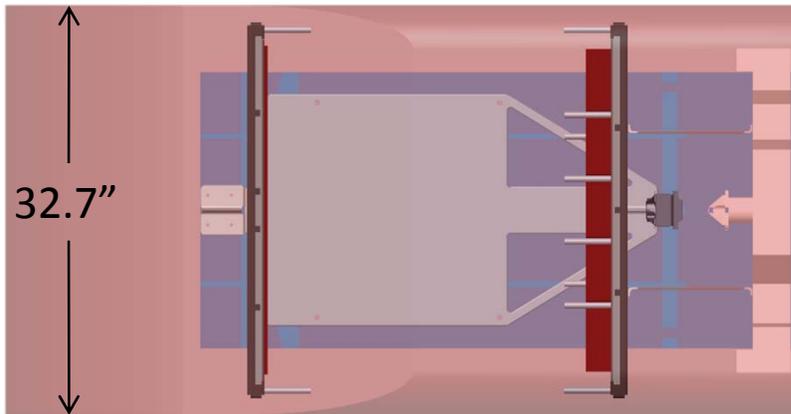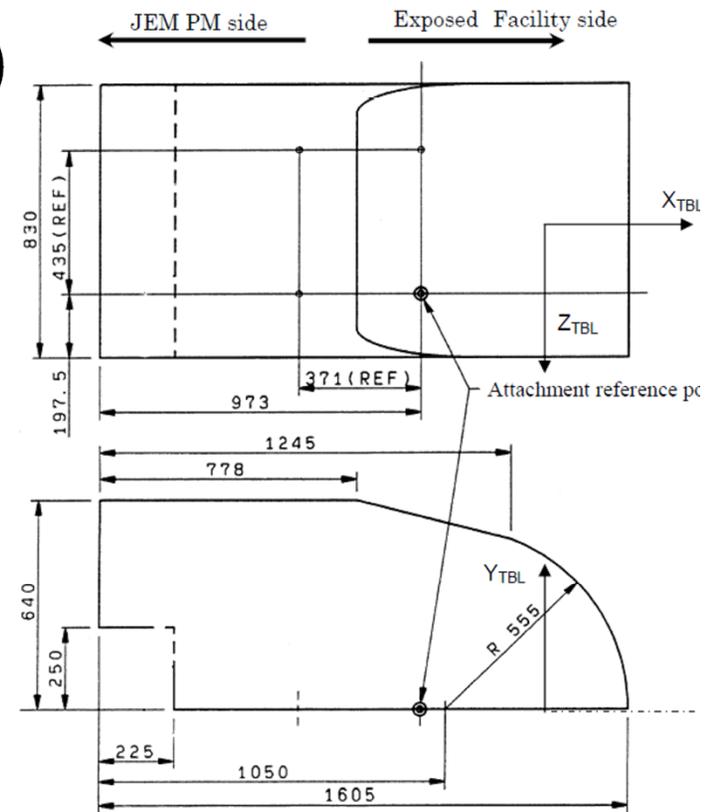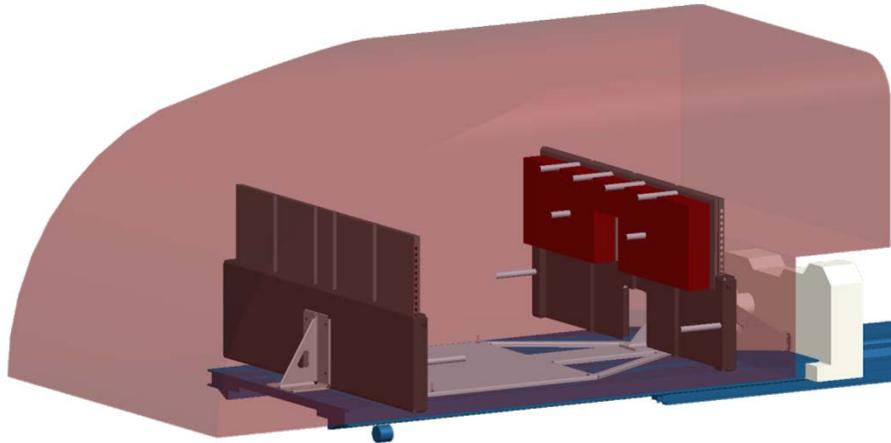

JEM ORU Transfer Interface (JOTI)

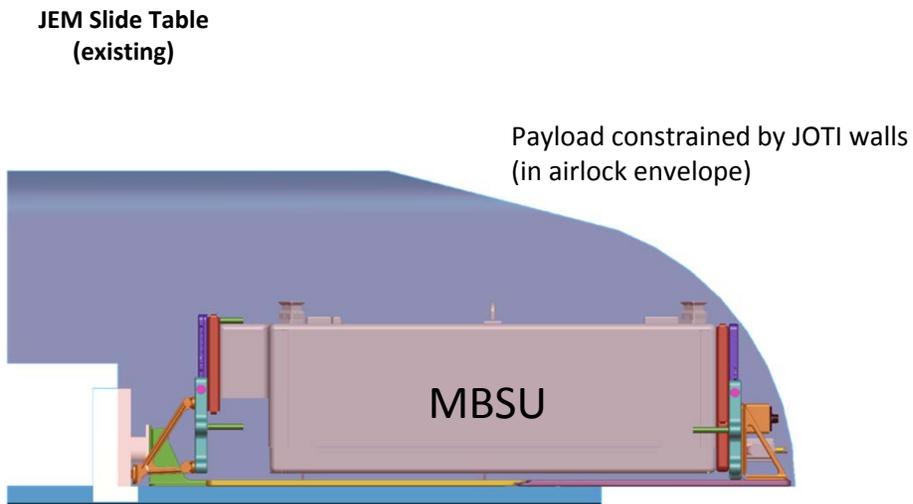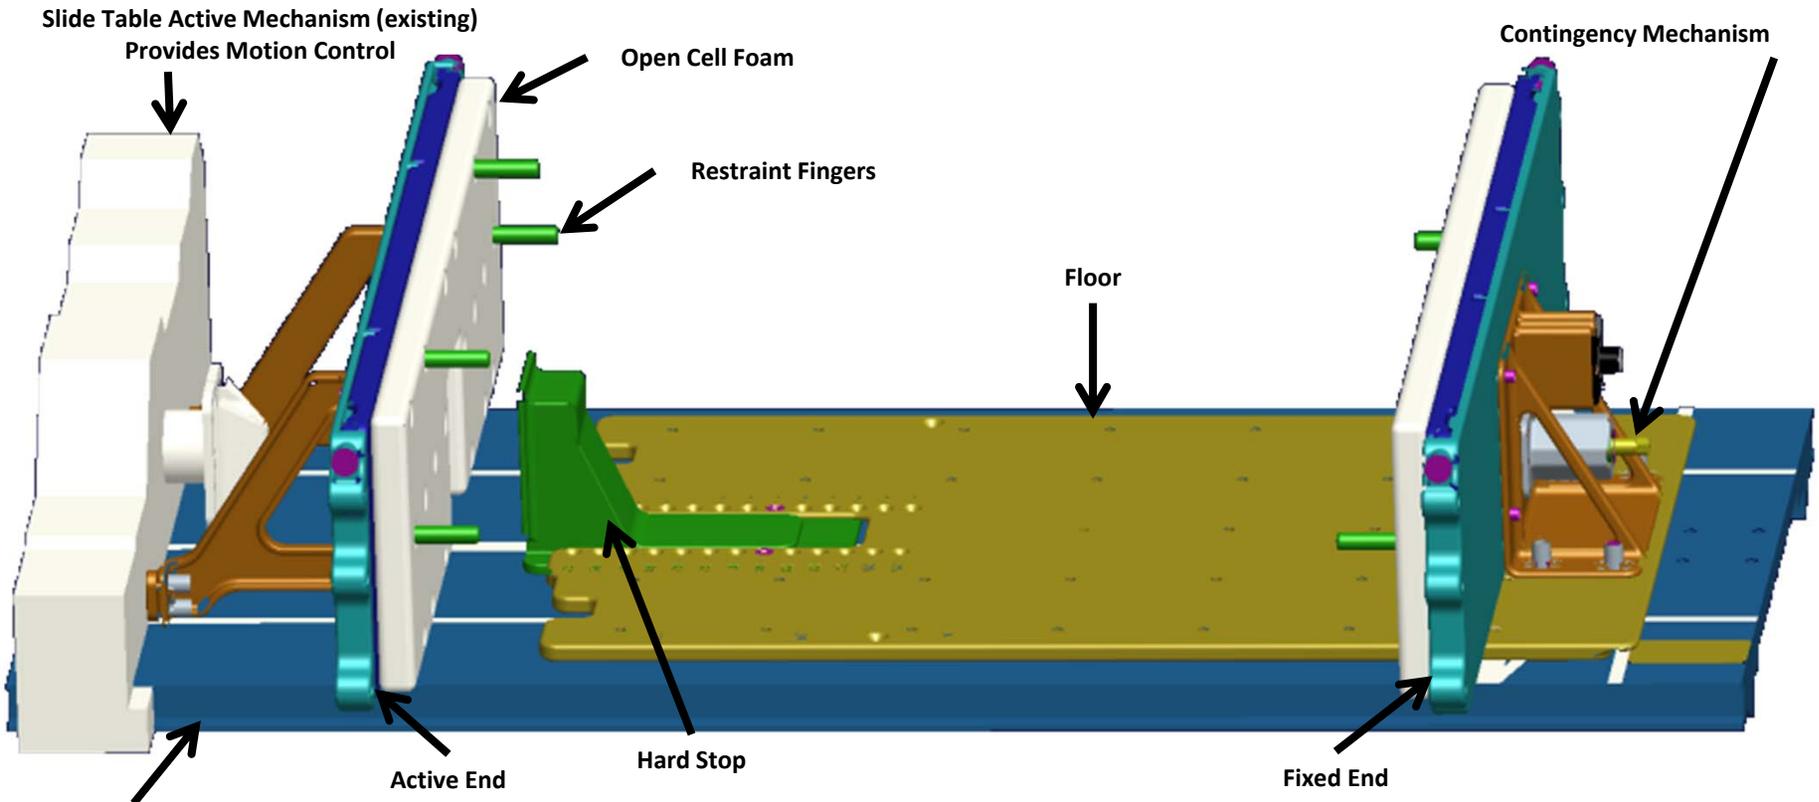

Payload Interfaces

Robotic Interfaces for Transport

JEM RMS Interfaces

Flight Releasable Grapple Fixture

SPDM Interfaces

H-fixture

Micro-square


Micro-Conical

SSRMS Interfaces

Flight Releasable Grapple Fixture

Latchable Grapple Fixture

Power and Video Grapple Fixture

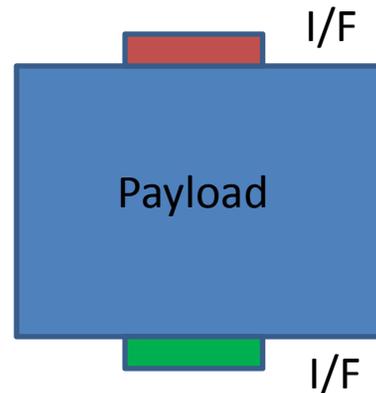


Interfaces for Launch or ISS Location

FRAM, JEM EFU, Payload Unique

External Payload Locations

Where You Go Determines Type Of ISS Interface

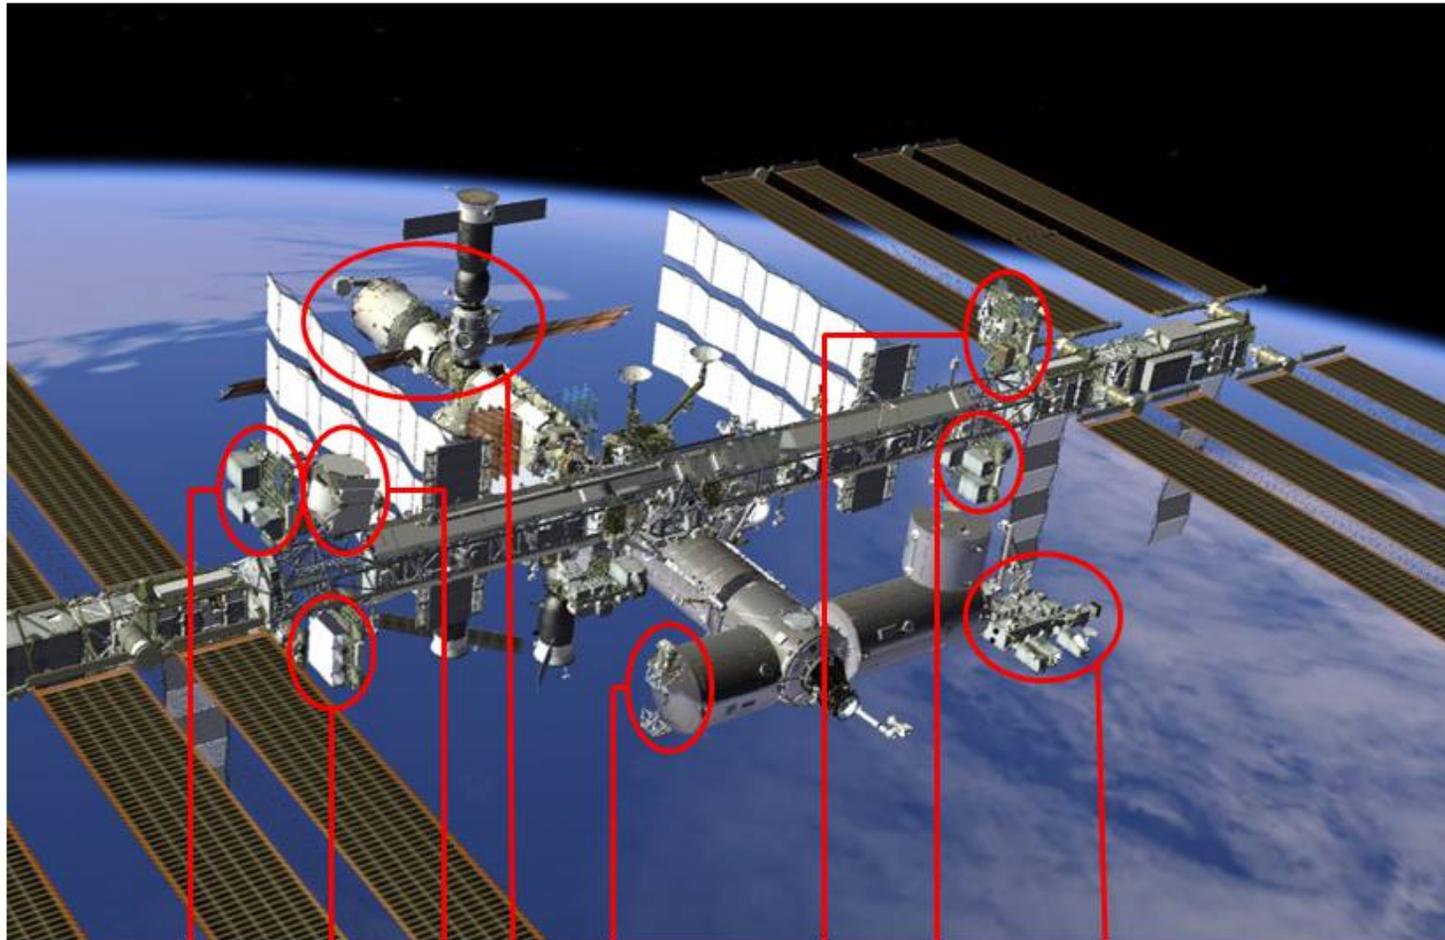

ELC-2

ELC-4

AMS

Columbus-EPF


ELC-3

ELC-1

JEM-EF



External Workstations (9) on the Russian Service Module

JEM Payload Sites

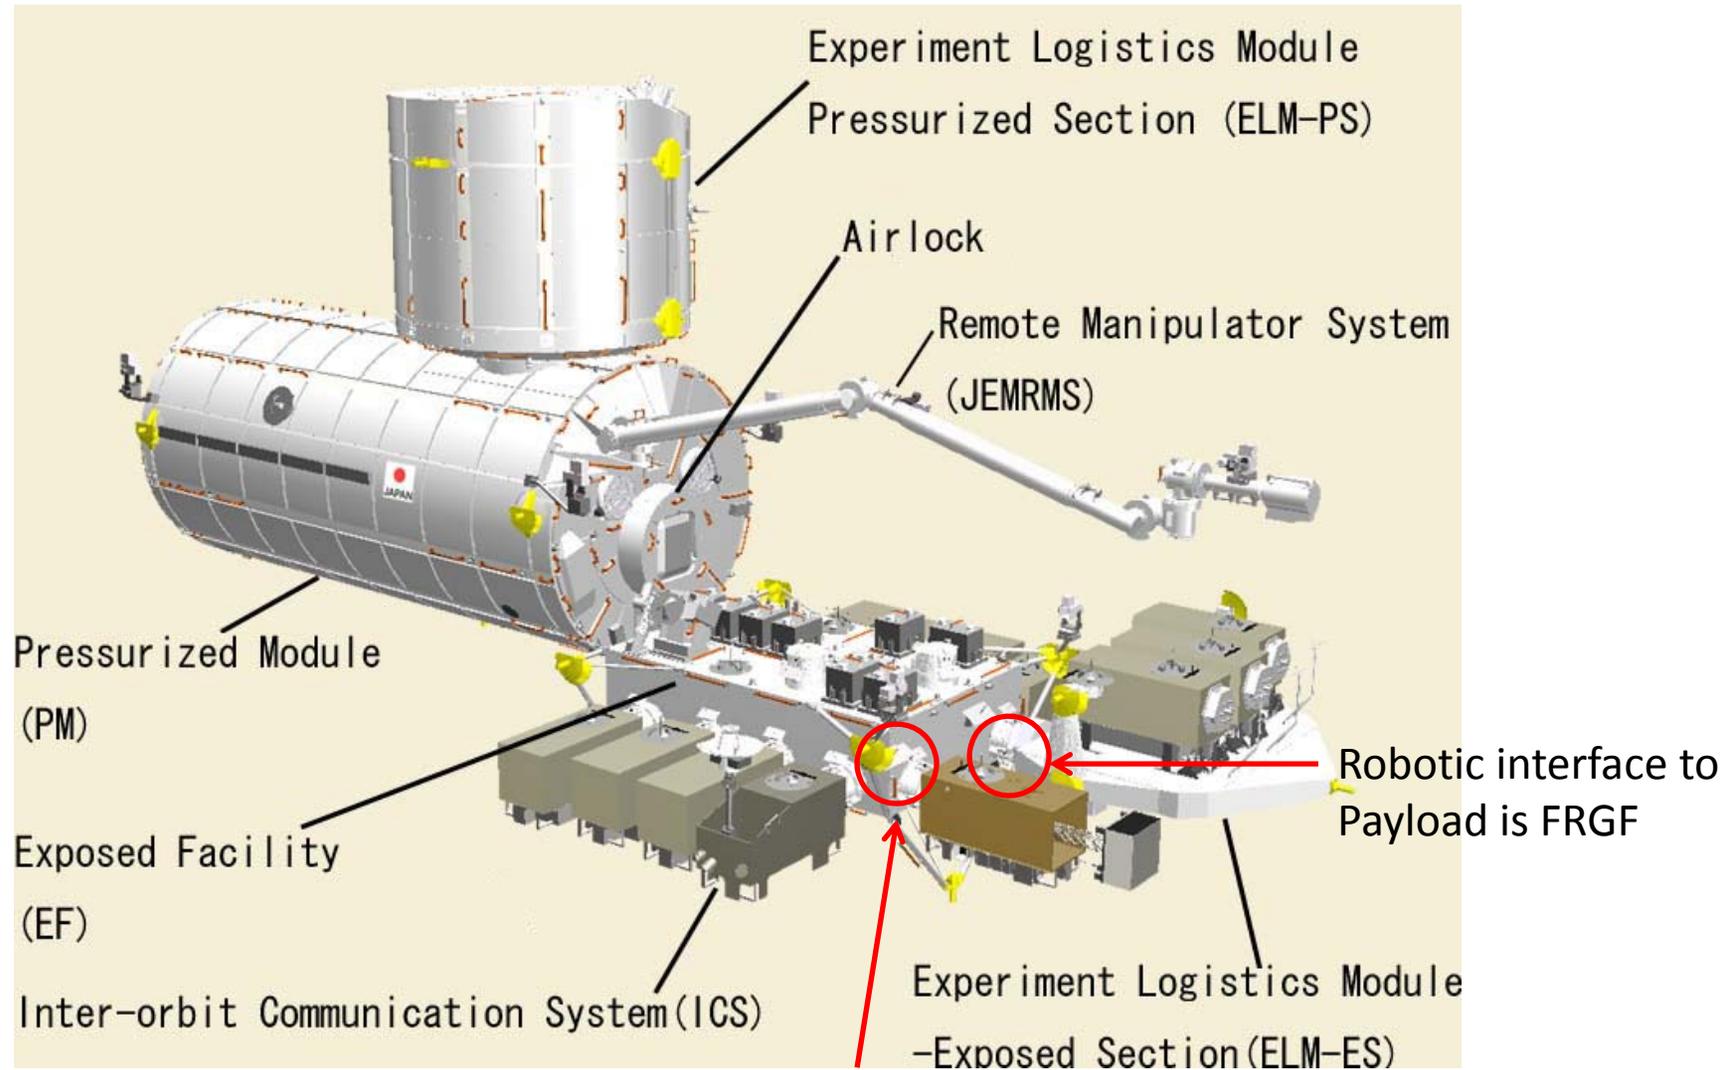

Payload interface to JEM EF is the EFU

Gripper Interface Concept (not existing capability)

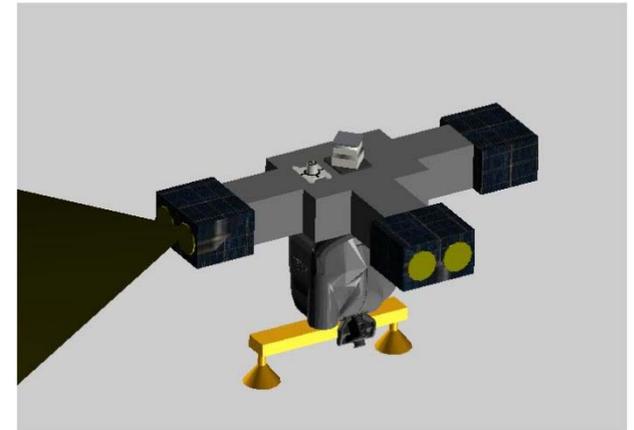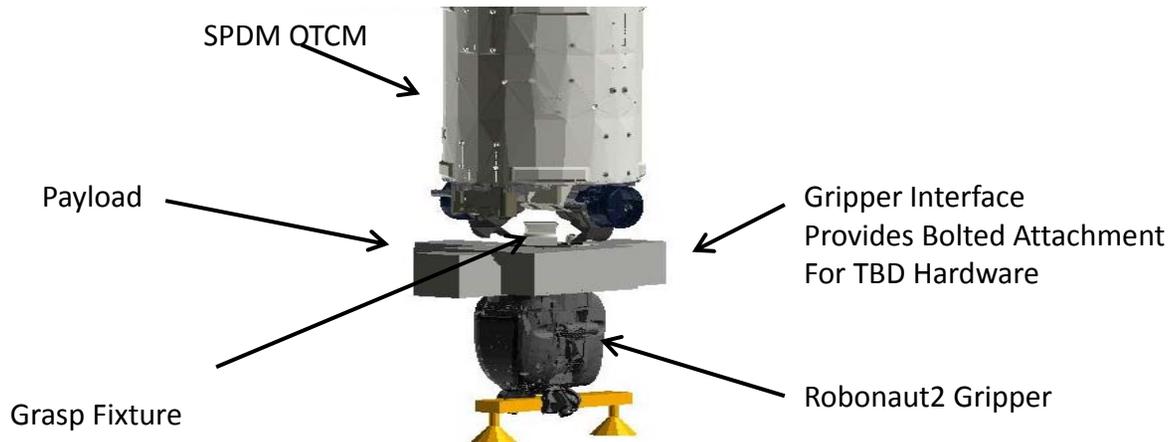


Payload Attached To Handrail

Gripper Attach Options Provides Extensive Location Options

- Handrails
- Micro Fixture
- WIF Socket



Payload would need to provide power and data (wi-fi)

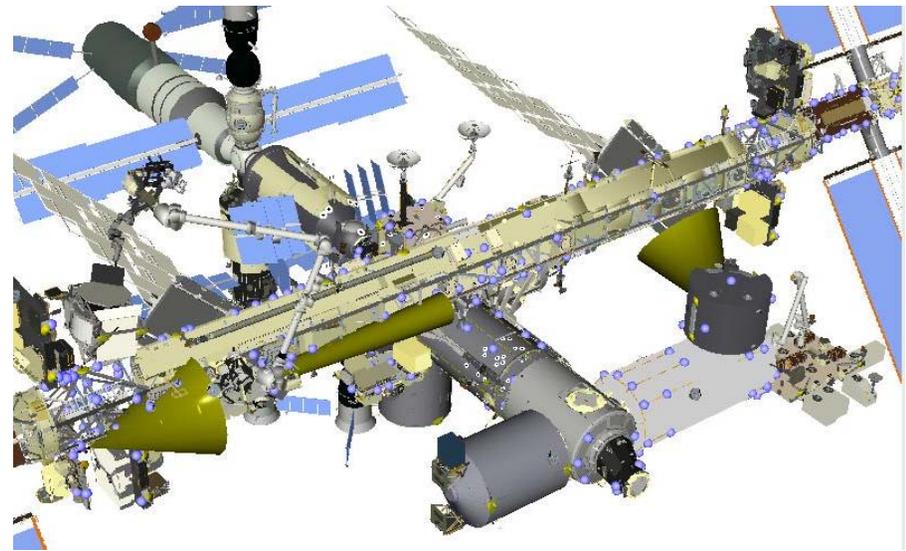

WIF Socket Locations

Interfaces for Launch or ISS Location

Flight Releasable Attachment Mechanism (FRAM).

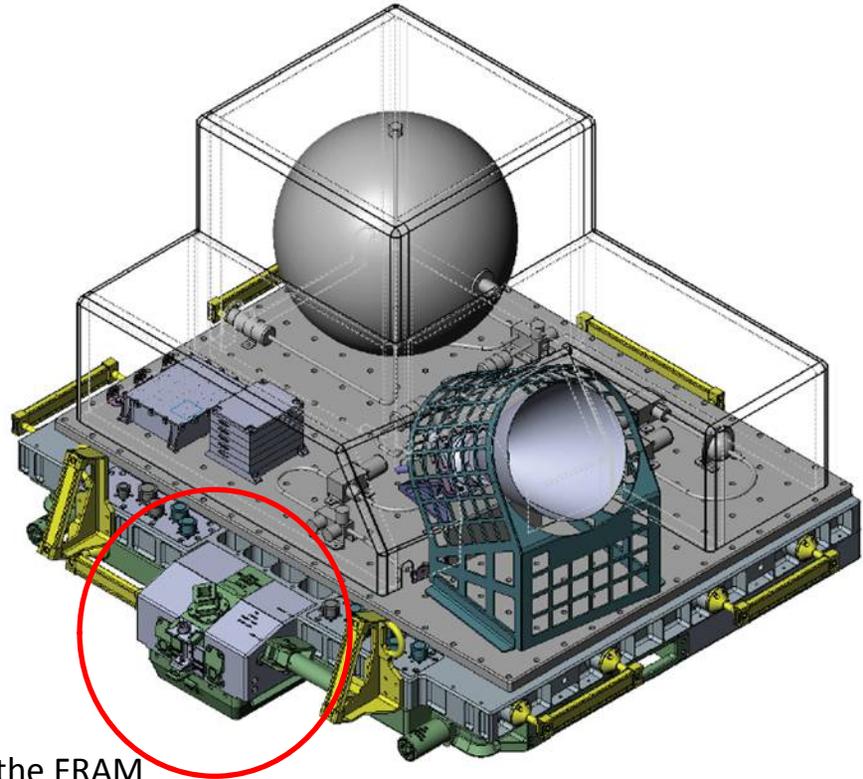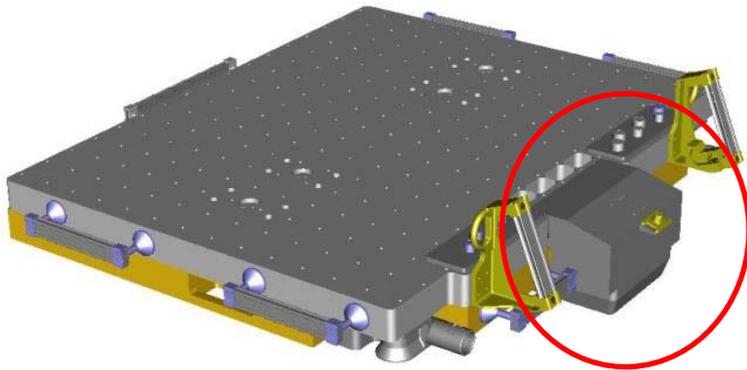

Robotic Interface is with the FRAM and not the payload

The payload and the Active FRAM interface are both attached to and separated by an adapter plate. There are different sizes of adapter plates that can be used:

- Large Adapter Plate Assembly (LAPA)
- Medium Adapter Plate Assembly (MAPA)
- Small Adapter Plate Assembly (SAPA)
- Light-Weight Adapter Plate Assembly (LWAPA)

Compatible with Dragon Trunk, HTV EP and ELCs

SSRMS Interface Hardware

- For payloads that require a direct interface with the SSRMS (or POA or SPDM LEE), there are a few different interfaces to be aware of:
 - Flight Releasable Grapple Fixture (FRGF)
 - **Simplest grapple fixture – only allows for grapple**
 - Latchable Grapple Fixture (LGF)
 - **Allows for grapple and latching**
 - **Intended to be used for longer-term stowage on the POA (greater than 3 weeks)**
 - Power and Video Grapple Fixture (PVGf)
 - **Allows for grapple, latching, and access to data, video, and power**
 - **Connectors for data/video/power integrated into the fixture**
 - Power and Data Grapple Fixture (PDGF)
 - **Allows for grapple, latching, and access to data, video, and power**
 - **Connectors for data/video/power integrated into the fixture**
 - **Only fixture that is an On-orbit Replaceable Unit (ORU)**


SSRMS Interface Hardware




FRGF




PDGF

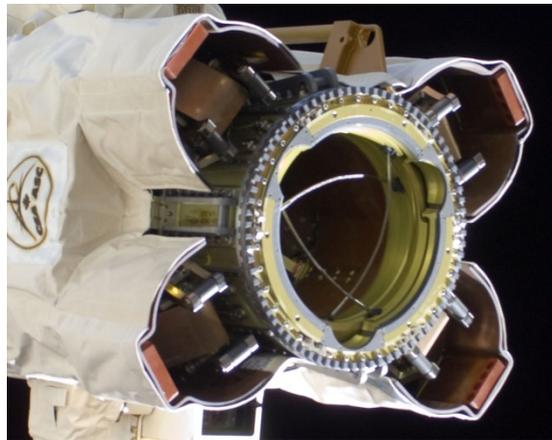

LEE

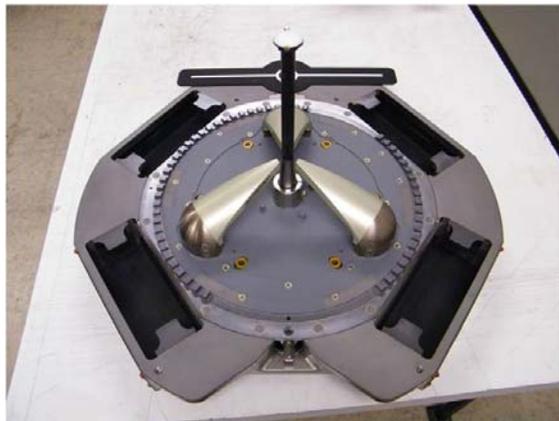

LGF

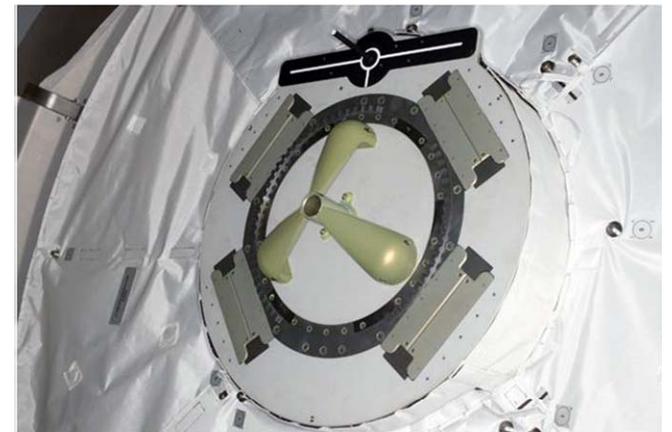

PVGf (grapple shaft not shown)


SPDM Interface Hardware

- For payloads that require a direct interface with the SPDM, there are a few different interfaces to be aware of:
 - H-fixture – allows for direct grasp by SPDM ORU Tool Changeout Mechanism (OTCM)
 - **Typically used on heavier payloads or where a “beefed up” interface is required (assumes attachment structure can withstand the higher loads)**
 - **Allows for use of an umbilical connector and/or a co-located bolt**
 - **Requires enough space to accommodate the SPDM OTCM**
 - Micro-fixture (also known as a Micro-square) – allows for direct grasp by SPDM OTCM
 - **This is the “standard” grasp fixture**
 - **MMF found on FRAMs is a version of this fixture**
 - **Allows for use of an umbilical connector and/or a co-located bolt**
 - **Requires enough space to accommodate the SPDM OTCM**
 - Micro-Conical Fitting (MCF) – allows for grasp by Robot Micro-Conical Tool (RMCT)
 - **Used when there is not enough space for the SPDM OTCM to access the fixture, but requires the SPDM to acquire a tool (RMCT) which has operational overhead associated with it**
 - **Allows for use of a co-located bolt, but not an umbilical connector**
 - Modified Truncated Cone (MTC) Target
 - **Co-located with the grasp fixture and used to line up SPDM OTCM/RMCT for grasping**
 - **Other target types are listed in documentation, but this is the standard target type**
 - **Requires enough space to allow unobstructed viewing during approach**
 - Umbilical Connector
 - **Provides access to power, data, and video connections through the SPDM OTCM**
 - **Cannot be used in conjunction with an MCF**


Interface Hardware (cont.)




H-Fixture

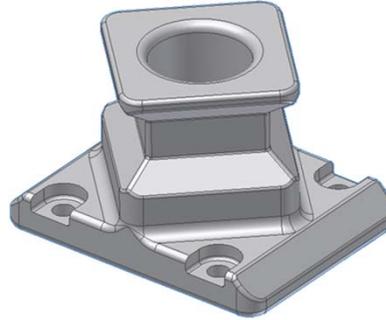

Micro-fixture

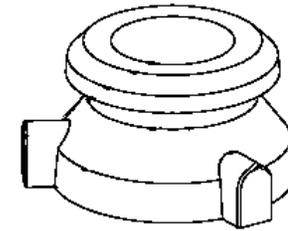

Micro-Conical Fitting (MCF)

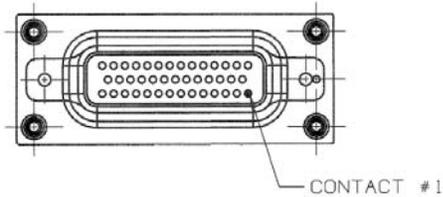


User Umbilical Connector



Modified Truncated Cone (MTC) Target

Robot
Micro-
Conical
Tool
(RMCT)

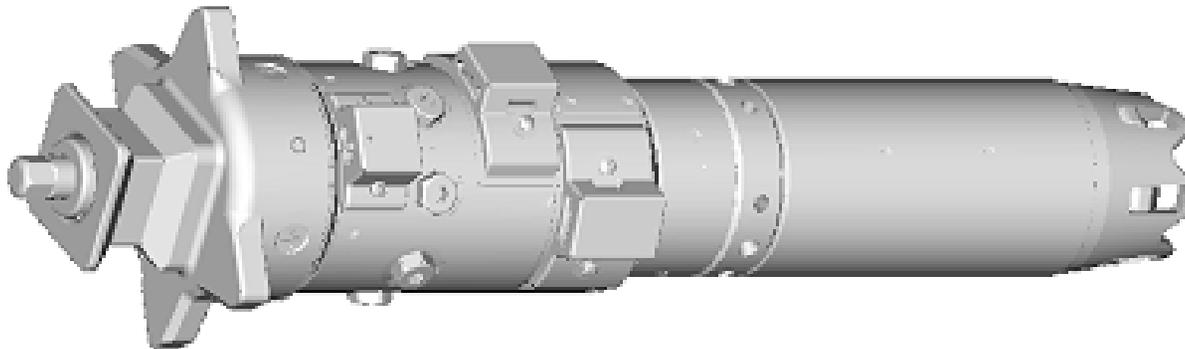

SPDM Interface Hardware

Grasp fixture selection criteria

Discriminators	H-fixture	MSF	MMSF	MCF	MMCF
<ul style="list-style-type: none"> Grasp Fixture has clearance to be grasped directly by OTCM (no tool needed) Payload needs access to power, data, &/or video resources 	X	X	X		
<ul style="list-style-type: none"> Maximum interfacing moments are expected to exceed 125 ft-lbs 	X				
<ul style="list-style-type: none"> Payload needs collocated bolted w/ locking mechanism 			X		X
<ul style="list-style-type: none"> Must use RMCT because OTCM cannot access grasp fixture due to restrictive location 				X	X
<ul style="list-style-type: none"> Must use ROST because OTCM cannot access grasp fixture bolt due to restrictive location 		X	X		

Question: Which robot (SSRMS or SPDM) do you use?

Answer: Primarily driven by mass handling requirements


- Envelope, CG, Inertia, Mass for SPDM operations
 - SSP 41167, MSS Segment Spec Tables IV and XXXVIII
 - SSP 57003, Attached Payload IRD, Table 3.7.4.2-1

SSP 57003, TABLE 3.7.4.2-1 PAYLOAD PARAMETERS FOR DEXTEROUS OPERATIONS


Maximum Mass ⁴ lbm (kg)	Maximum Inertia ¹ lbm-ft ² (kg-m ²)			Maximum CG Offset ² in (m)			Maximum Dimension ft (m)			Minimum Freq ³ (Hz)
	I _{xx}	I _{yy}	I _{zz}	CG ^x	CG ^y	CG ^z	X	Y	Z	
1320 (600)	1186 (50)	1186 (50)	1186 (50)	19.7 (0.5)	9.8 (0.25)	9.8 (0.25)	5.25 (1.6)	5.25 (1.6)	5.25 (1.6)	8

Notes:


- Moments of inertia are expressed about the attached payload integrated assembly CG in the payload principal axes.
- Center of gravity offset is defined as the vector from the attached payload integrated assembly center of gravity to the origin of the coordinate system associated with the SDGF.
- Minimum attached payload integrated assembly frequency, assuming that the grasp fixture is held rigid.
- Mass of the attached payload integrated assembly.

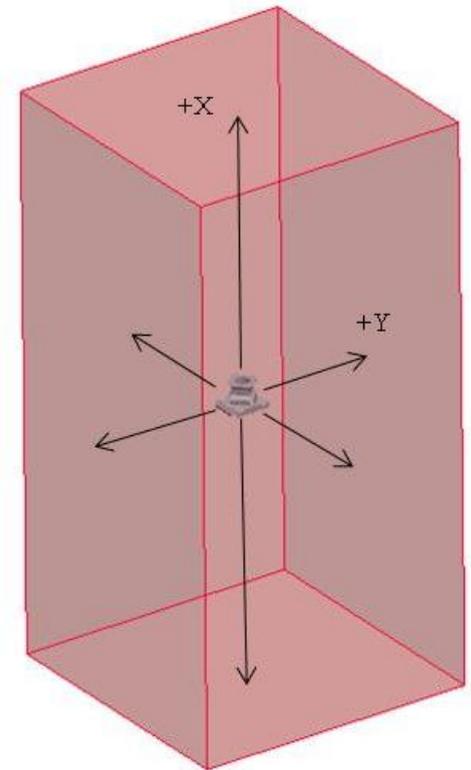

Payload Examples of Robotic Interfaces

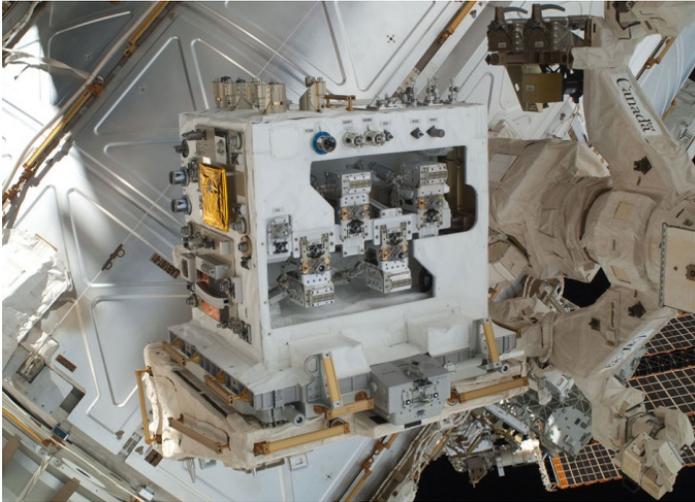


Robotic Refueling Mission (RRM) is a FRAM based payload (on SPDM EOTP for transport)

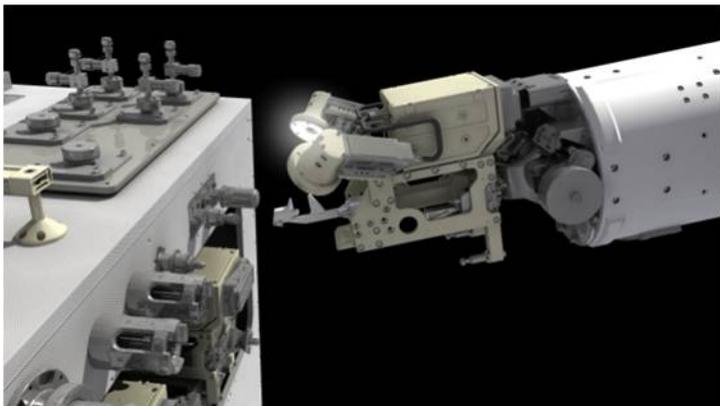

RRM uses SPDM as part of the payload to perform refueling tasks. RRM built unique tools for the SPDM

SPDM to payload I/F – Micro Fixture

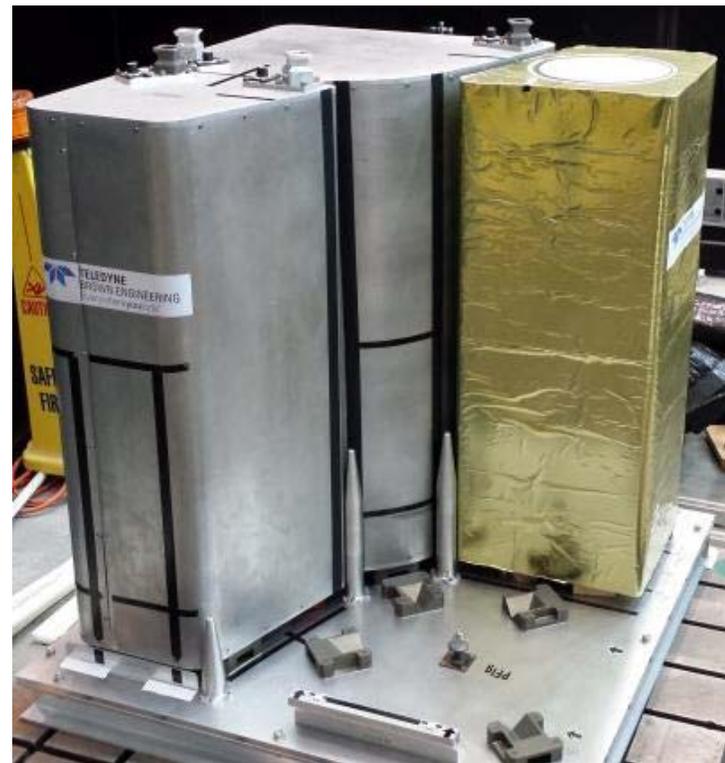

Since the individual components are intended to be changed out robotically, the payload to FRAM I/F must be robotically compatible

Robotics Forums (How To Get Started)

- DRIT – Dexterous Robotics Integration Team
 - Mondays, 2:00 PM Central
 - Co-chairs: OM7 and CSA
 - <https://iss-www.jsc.nasa.gov/nwo/seio/robotics/home/web/DRIT.shtml>
- EBIT – Extraction and Berthing Integration Team
 - Wednesdays, 1:00 PM Central
 - Co-chairs: OM7 and CSA
 - <https://iss-www.jsc.nasa.gov/nwo/seio/robotics/ebit/web/>
- MSS SEWG – MSS System Engineering Working Group
 - Every other Tuesday (generally alternating with the MIP), 8:30 AM Central
 - Co-chairs: ER3 and CSA
 - <https://iss-www.jsc.nasa.gov/nwo/seio/robotics/home/web/SEWG.shtml>
- MSWG – MSS Software Working Group
 - Every other Thursday, 1:00 PM Central
 - Co-chairs: OD and CSA
 - <http://iss-www.jsc.nasa.gov/nwo/avionics/ip/home/web/MeetingInformation.shtml>
- MIP – MSS Integration Panel
 - Every other Tuesday (generally alternating with the MSS SEWG), 8:30 AM Central
 - Co-chairs: OM7 and CSA
 - <https://iss-www.jsc.nasa.gov/nwo/ppco/cbp/web/mip.shtml>

Robotics Forums

- Why go to the DRIT?
 - Review of SPDM-related analysis (MAGIK, CSA, etc.)
 - **For example, fixture location and manifest location**
 - Requests for or exchange of SPDM-related information
 - Review SPDM-related requirements exceptions
 - Review of SPDM-related schedules
 - Track the need for other subsystem analyses prior to performing dexterous ops
 - Primary participants: OM7, CSA, ER3, MOD Robotics
- Why go to the EBIT?
 - Review of SSRMS-related analysis (MAGIK, CSA, etc.)
 - **For example, fixture location and manifest location**
 - Requests for or exchange of SSRMS-related information
 - **Grapple fixture substrate loads for example**
 - Review SSRMS-related requirements exceptions
 - Review of SSRMS-related schedules
 - Primary participants: OM7, CSA, ER3, MOD Robotics

Robotics Forums

- Why go to the MSS SEWG?
 - Technical discussions of system-wide topics
 - MSS requirements technical discussions
 - Primary participants: ER3, CSA, OM7, MOD Robotics, Safety, Crew Office
- Why go to MSWG?
 - Payload data or commanding through the MSS
 - Primary participants: ISS Software & Avionics (OD), CSA, OM7, ER3, MOD Robotics, Safety, Crew Office
- Why go to the MIP?
 - “Front door” to the ISS Program for robotics-related topics
 - Introduce new payloads to NASA and CSA robotics community
 - Requests for information that could not be provided through the DRIT or EBIT
 - Review of MSS schedules
 - Review of MSS changes
 - Primary participants: OM7, CSA, ER3, MOD Robotics, Safety, Crew Office, ISS Software & Avionics (OD)

Robotics POCs

- The robotics community (ER3, OM7, CSA, and MDA) is here to help. This slide has all the robotics POCs. CSA and MDA are the technical authority on the MSS and are engaged via the various robotics forums as shown on the previous slides
- ER3 – Robotics System Management and Engineering Support
 - MSS System Manager – Larry Grissom (281-483-9525, larry.w.grissom@nasa.gov)
 - Deputy MSS System Manager and SSRMS Subsystem Manager – Glenn Jorgensen (281-244-6565, glenn.jorgensen-1@nasa.gov)
 - SPDM Subsystem Manager and SPDM Requirements lead – Michael Wright (281-483-4798, michael.d.wright@nasa.gov)
 - SSRMS Requirements lead – Kendrick Cheatham (281-244-6744, kendrick.cheatham-1@nasa.gov)
- OM7 – Robotics System Engineering and Integration
 - Manager, Robotics Integration Office – Michael Berdich (281-244-7957, michael.a.berdich@nasa.gov)
 - Robotics System Integration Lead – David Read (281-244-2212, david.read-1@nasa.gov)
 - JEM Airlock Integration Lead – Chris Wade (281-244-2812, christopher.d.wade@nasa.gov)
 - Software Integration Lead – Deep Patel (281-244-8269, deep-patel-1@nasa.gov)


Conclusion

- Robotic systems are available to support payload installation, operations, and removal.
- Robotic systems provide a lot of flexibility and options for payload users in order to meet their objectives.
- However, that flexibility also means there is additional complexity in the trade space for what options and services to utilize so working early with the robotics community is strongly encouraged.


Backup

Micro/NanoSats Deployers


Deployable payloads utilize Cyclops, NRCSD, or JSSOD (all nominally use JEMRMS) to interface to the Airlock table

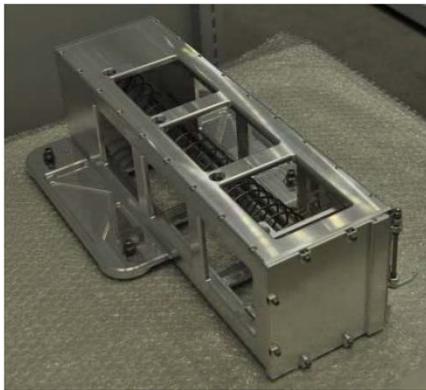

JSSOD

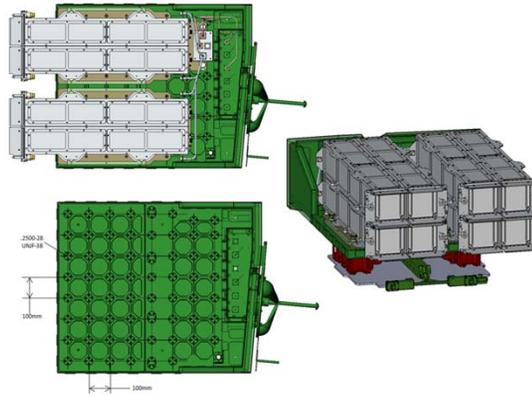

NRCSD

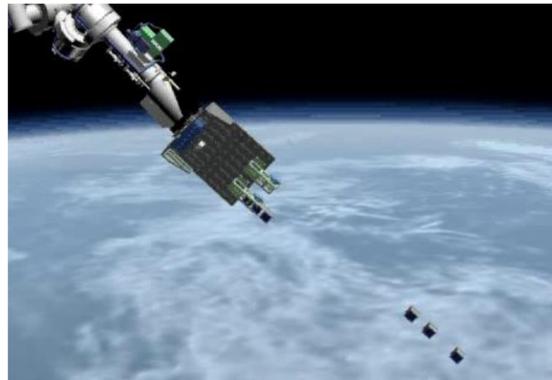

Nanosat Deployment
Using JEM RMS

