



JOHN F. KENNEDY SPACE CENTER



LAUNCH SERVICES PROGRAM

Computational Fluid Dynamics Uncertainty Analysis for Payload Fairing Spacecraft Environmental Control Systems

Curtis Groves

Ph.D. Candidate, University of Central Florida, Orlando, FL

Fluids Engineer, NASA Kennedy Space Center, FL

Marcel Ilie, Ph.D.

Former Assistant Professor, University of Central Florida, Orlando, FL

Paul Schallhorn, Ph.D.

Environments and Launch Approval Branch Chief, NASA Kennedy Space Center,
FL



UNIVERSITY OF CENTRAL FLORIDA
COLLEGE OF ENGINEERING AND COMPUTER SCIENCE



JOHN F. KENNEDY SPACE CENTER

Problem



- Spacecraft components may be damaged due to airflow produced by Environmental Control Systems (ECS).
- There are uncertainties and errors associated with using Computational Fluid Dynamics (CFD) to predict the flow field around a spacecraft from the ECS System.
- This paper/presentation describes an approach to estimate the uncertainty in using CFD to predict the airflow speeds around an encapsulated spacecraft without using test data.



UNIVERSITY OF CENTRAL FLORIDA
COLLEGE OF ENGINEERING AND COMPUTER SCIENCE



JOHN F. KENNEDY SPACE CENTER

ECS System Overview



- Environmental Control System AIAA 2002-3253
 - Prior to launch, cold air (air conditioning) flows downward around the spacecraft after it has been encapsulated in the Payload Fairing.
 - The cold air is delivered through an air-conditioning (AC) pipe, which intersects the fairing and flows past a diffuser located at the pipe/fairing interface
 - After passing over the spacecraft, it is finally discharged through vents
 - The Payload Fairing air conditioning is cut off at lift off.






ECS System Overview



- Example of Environmental Control System (ECS) CFD Model

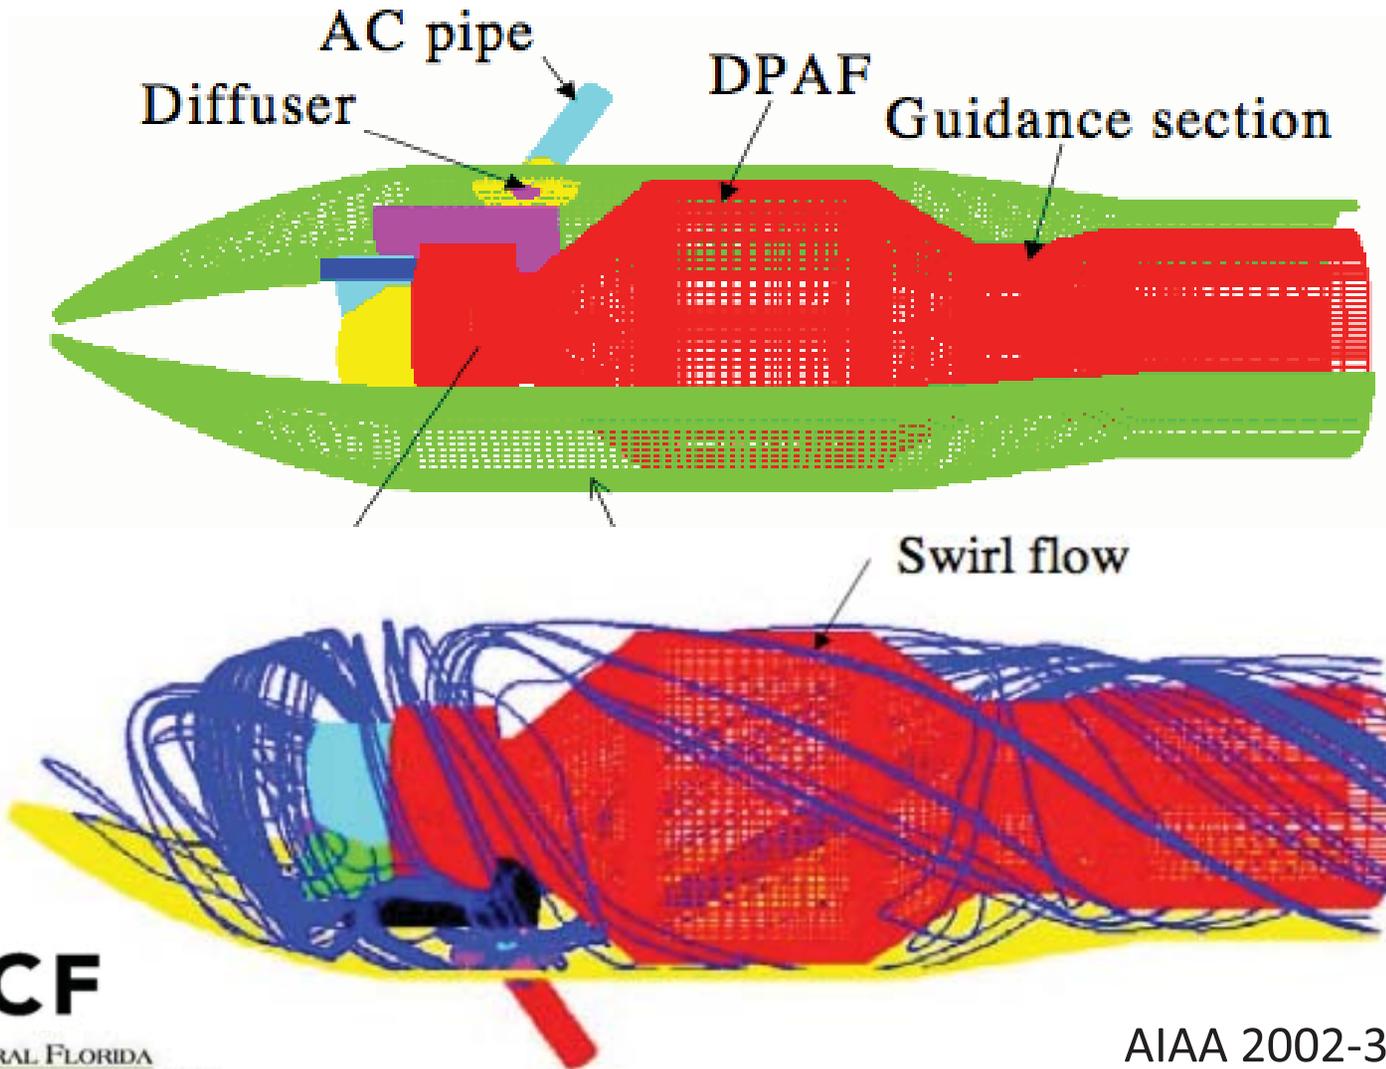




JOHN F. KENNEDY SPACE CENTER

ECS System Overview



- Example of an ECS system airflow test

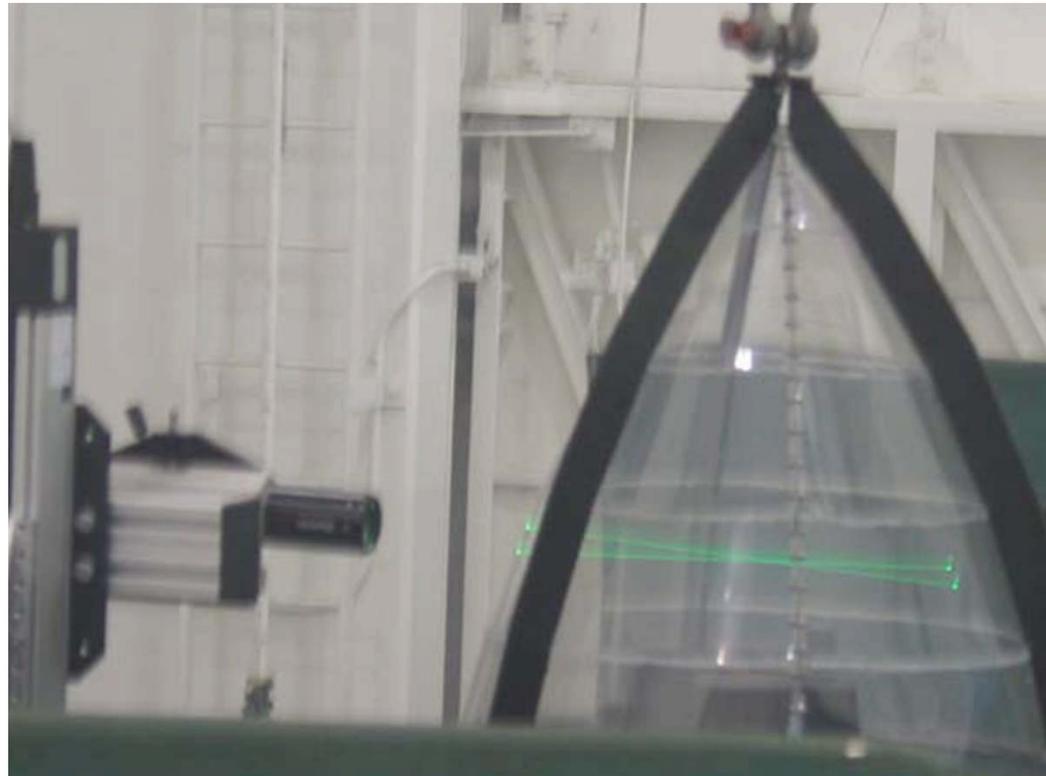


UNIVERSITY OF CENTRAL FLORIDA
COLLEGE OF ENGINEERING AND COMPUTER SCIENCE

Kandula, M., Hammad, K., and Schallhorn, P., "CFD Validation with LDV Test Data for Payload/Fairing Internal Flow," AIAA-2005-4910, 2005.



Overview of the Validation Process

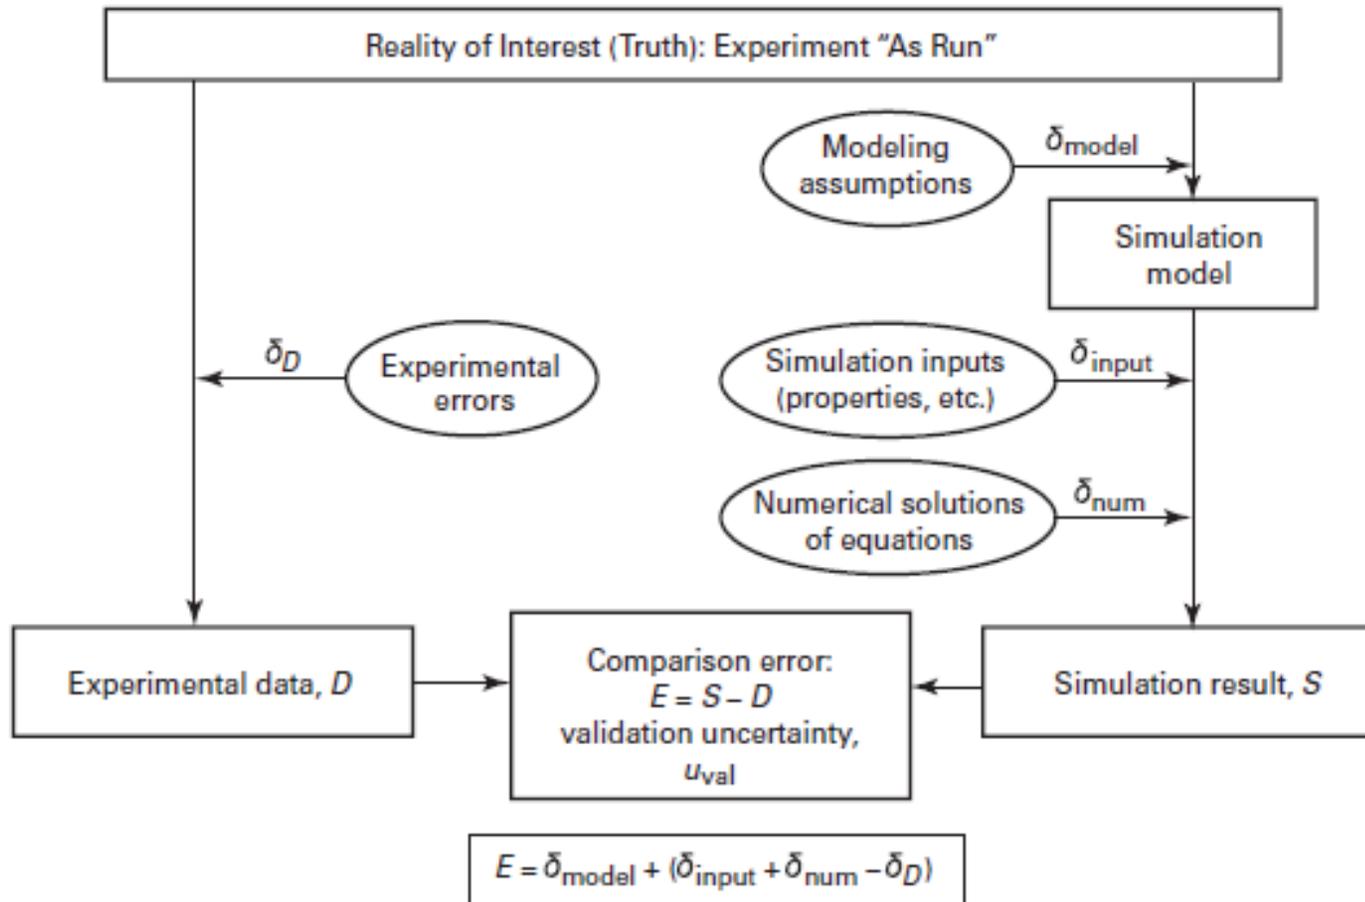



Overview of the Validation Process



- Estimate Interval within which δ_{model} falls with a given degree of confidence
 - Assume Gaussian normal distribution, 90 % confidence
 - $U_{90\%} = +/- 1.65 * (U_{\text{val}})$

- Error Sources ($U_{\text{num}}, U_{\text{input}}, U_D$)

$$U_{\text{Val}} = \sqrt{U_{\text{num}}^2 + U_{\text{input}}^2 - U_D^2}$$

- Uncertainty Equation

$$U_{90\%} = +/- 1.65 * \sqrt{U_{\text{num}}^2 + U_{\text{input}}^2 - U_D^2}$$





Proposed Methodology Without Experimental Data



Proposed Methodology **conservative estimate to envelop true value

If there is no experimental data, $D=0$, $\delta_D=0$, and $u_D=0$.

$$E = S - D = S$$

$$\delta_S = S - T$$

$$E = S - D = T + \delta_S - (T + \delta_D) = \delta_S - \delta_D = \delta_S$$

$$u_{val} = k \left(\sqrt{u_{num}^2 + u_{input}^2 + u_D^2} \right)$$

$$u_{val} = k \left(\sqrt{u_{num}^2 + u_{input}^2} \right)$$

Report the simulated result, S as

$$S \pm u_{val}$$





Proposed Methodology Without Experimental Data



- Report $S \pm u_s$
- k – value (Use Student- t Distribution)
- Treat all input variables as ‘random’ and run separate CFD case
- Treat as an oscillatory convergence parameter

$$U_{Oscillatory} = \frac{1}{2} (S_U - S_L)$$

Number of Cases	Degrees of Freedom	Confidence 90%
2	1	6.314
3	2	2.92
4	3	2.353
5	4	2.132
6	5	2.015
7	6	1.943
8	7	1.895
9	8	1.86
10	9	1.833
11	10	1.812
12	11	1.796
13	12	1.782
14	13	1.771
15	14	1.761
16	15	1.753
17	16	1.746
18	17	1.74
19	18	1.734
20	19	1.729
21	20	1.725
22	21	1.721
23	22	1.717
24	23	1.714
25	24	1.711
26	25	1.708
27	26	1.706
28	27	1.703
29	28	1.701
30	29	1.699
31	30	1.697
41	40	1.684
51	50	1.676
61	60	1.671
81	80	1.664
101	100	1.66
121	120	1.658
infy	infy	1.645





JOHN F. KENNEDY SPACE CENTER

EELV Public Available Information



- The Rockets Behind the Missions:
 - Delta II
 - Delta IV
 - Atlas V
 - Pegasus
 - Taurus
 - Falcon 9
- <http://www.nasa.gov/centers/kennedy/launching-rockets/>



UNIVERSITY OF CENTRAL FLORIDA
COLLEGE OF ENGINEERING AND COMPUTER SCIENCE



JOHN F. KENNEDY SPACE CENTER

EELV Public Available Information



- Each of these vehicles have a Payload Planners Guide or Users Guide
- http://www.ulalaunch.com/site/docs/product_cards/guides/DeltaAllPayloadPlannersGuide2007.pdf
- http://spacecraft.ssl.umd.edu/design_lib/Delta4.pl.guide.pdf
- http://spacecraft.ssl.umd.edu/design_lib/Atlas5.pl.guide.pdf
- http://www.orbital.com/NewsInfo/Publications/Pegasus_UG.pdf
- <http://www.orbital.com/NewsInfo/Publications/taurus-user-guide.pdf>
- http://www.spacex.com/Falcon9UsersGuide_2009.pdf



UNIVERSITY OF CENTRAL FLORIDA
COLLEGE OF ENGINEERING AND COMPUTER SCIENCE



Delta II



- Air-conditioning is supplied to the spacecraft via an umbilical after the payload fairing is mated to the launch vehicle.
- The payload air-distribution system provides air at the required temperature, relative humidity, and flow rate as measured
- The air-distribution system uses a diffuser on the inlet air-conditioning duct at the fairing interface.
- If required, a deflector can be installed on the inlet to direct the airflow away from sensitive spacecraft components
- The air can be supplied to the payload between a rate of
- 1300 to 1700 scfm.
- Diameter of Fairing is 3meters





Delta II - Continued

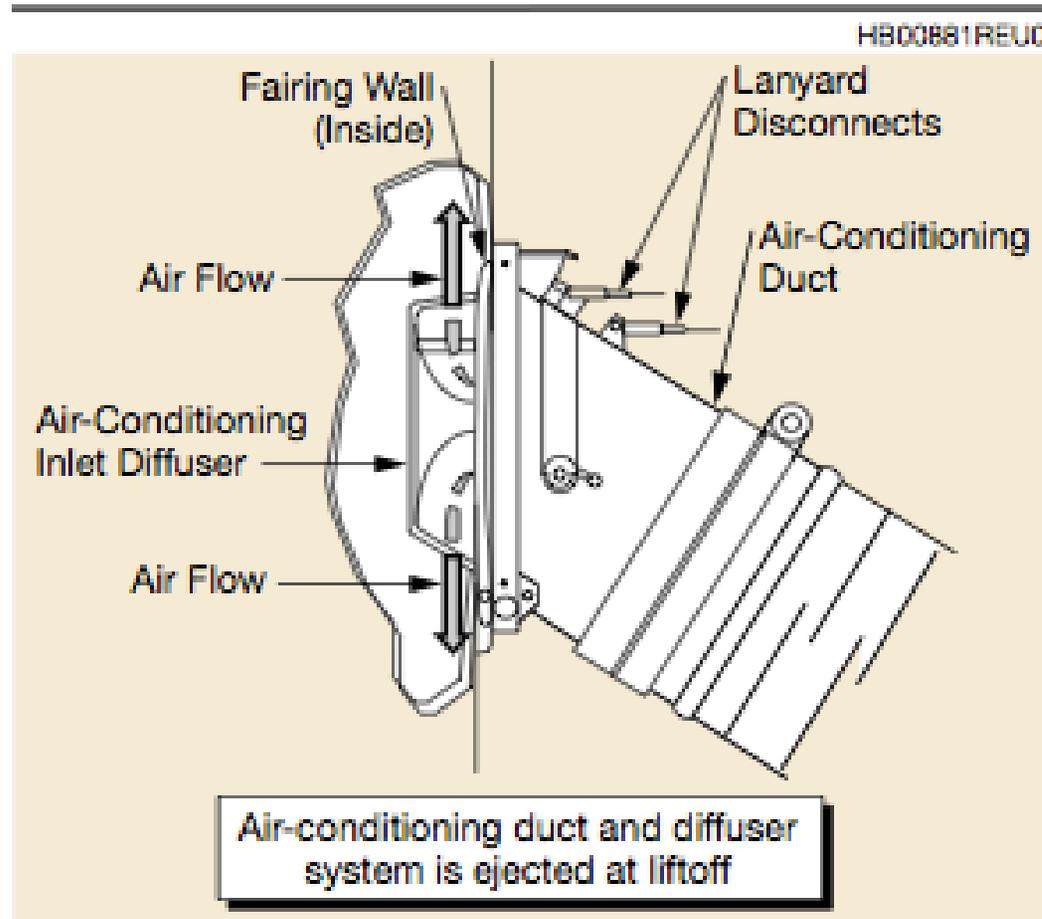


Figure 4-1. Payload Air Distribution System





Delta IV

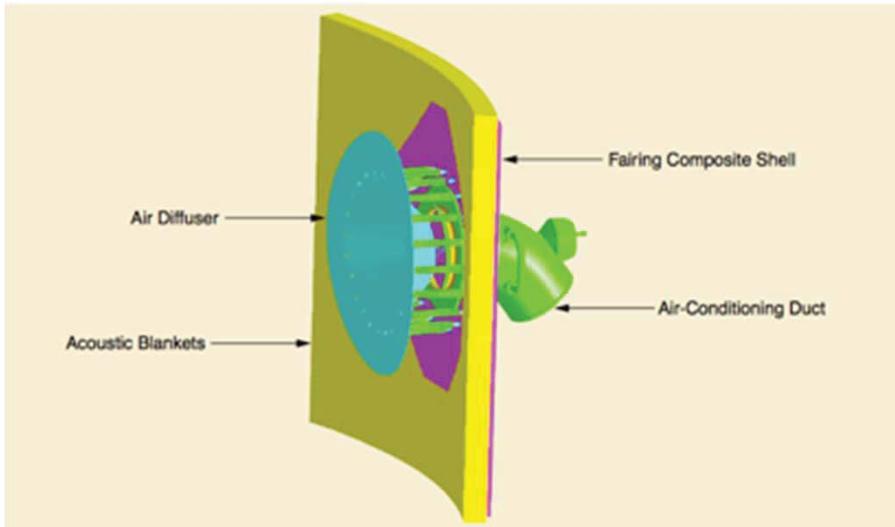


Figure 4-1. Standard 4-m Composite Fairing and 5-m Composite Fairing Air-Conditioning Duct Inlet Configuration

Air flows around the payload and is discharged through vents in the aft end of the fairing.

Fairing sizes 4meter and 5 meters in diameter

The air is supplied to the payload at a maximum flow rate of 36.3 kg/min to 72.6 kg/min (80 to 160 lb/min) for 4-m fairing launch vehicles and 90.7 kg/min to 136.0 kg/min (200 to 300 lb/min) for 5-m fairing launch vehicles.

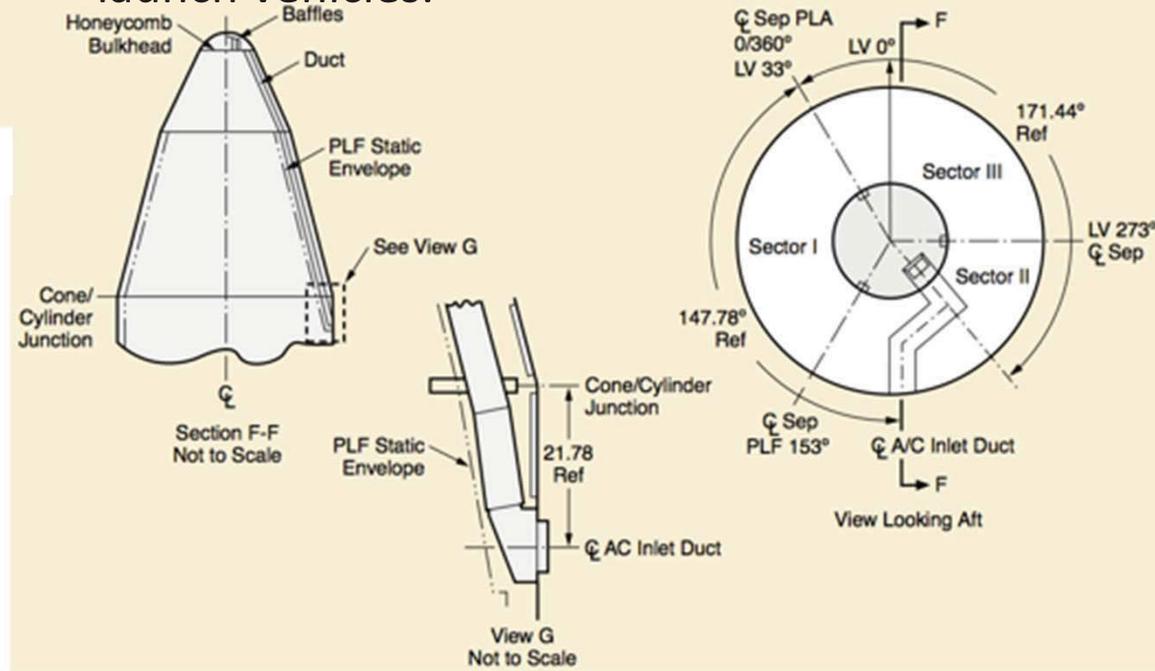


Figure 4-2. 5-m Metallic Fairing Payload Air-Distribution System





Atlas V



- Internal ducting defectors in the PLF direct the gas upward to prevent direct impingement on the spacecraft.
- The conditioning gas is vented to the atmosphere through one-way flapper doors below the spacecraft.
- The PLF air distribution system will provide a maximum air flow velocity in all directions of no more than 9.75 mps (32 fps) for the Atlas V 400 and 10.67 mps (35 fps) for the Atlas V 500.
- There will be localized areas of higher flow velocity at, near, or associated with the air conditioning outlet.
- Maximum air flow velocities correspond to maximum inlet mass flow rates.
- Reduced flow velocities are achievable using lower inlet mass flow rates.
- Flow Rates
 - A) Atlas V 400: 0.38–1.21 kg/s \pm 0.038 kg/s (50–160 lb/min \pm 5 lb/min),
 - B) Atlas V 500: 0.38–2.27 kg/s \pm 0.095 kg/s (50–300 lb/min \pm 12.5 lb/min)
- Fairing sizes are 4 meters and 5 meters in diameter





JOHN F. KENNEDY SPACE CENTER

Pegasus



- The fairing is continuously purged with filtered air.
- The flowrate of air through the fairing is maintained between 50 and 200 cfm.
- The air flow enters the fairing forward of the payload and exits aft of the payload. There are baffles on the inlet that minimize the impingement velocity of the air on the payload.
- Fairing diameter is 0.97 meters



UNIVERSITY OF CENTRAL FLORIDA
COLLEGE OF ENGINEERING AND COMPUTER SCIENCE

http://www.orbital.com/NewsInfo/Publications/Pegasus_UG.pdf



JOHN F. KENNEDY SPACE CENTER

Taurus



- Upon encapsulation within the fairing and for the remainder of ground operations, the payload environment will be maintained by the Taurus Environmental Control System (ECS).
- Fairing inlet conditions are selected by the Customer
- Fairing diameters are 63 inches and 92 inches



UNIVERSITY OF CENTRAL FLORIDA
COLLEGE OF ENGINEERING AND COMPUTER SCIENCE

<http://www.orbital.com/NewsInfo/Publications/taurus-user-guide.pdf>



JOHN F. KENNEDY SPACE CENTER

Falcon 9



- Once fully encapsulated and horizontal, the Environmental Control System (ECS) is connected
- Payload environments during various processing phases are:
 - In hanger, encapsulated – Flow Rate: 1,000 cfm
 - During rollout: 1,000 cfm
 - On pad: Variable from 1000 to 4500 cfm
- Fairing diameter is 5.2 meters



UNIVERSITY OF CENTRAL FLORIDA
COLLEGE OF ENGINEERING AND COMPUTER SCIENCE

http://www.spacex.com/Falcon9UsersGuide_2009.pdf




(3) Configurations



- Fairing Sizes are approximately 1m, 1.6m, 2.3m, 3m, 4m, 5m in diameter.
- (3) generic fairing diameters are selected to envelop the EELV fairing configurations
 - 0.75m
 - 3.5 m
 - 5.5 m
- Inlet Conditions range from 1000 cfm to 4500 cfm
- Spacecraft diameters range with fairing sizes, a generic spacecraft was drawn and scaled accordingly

(3) Configurations

- CAD model of the spacecraft was created in Pro/ENGINEER, 0.75m

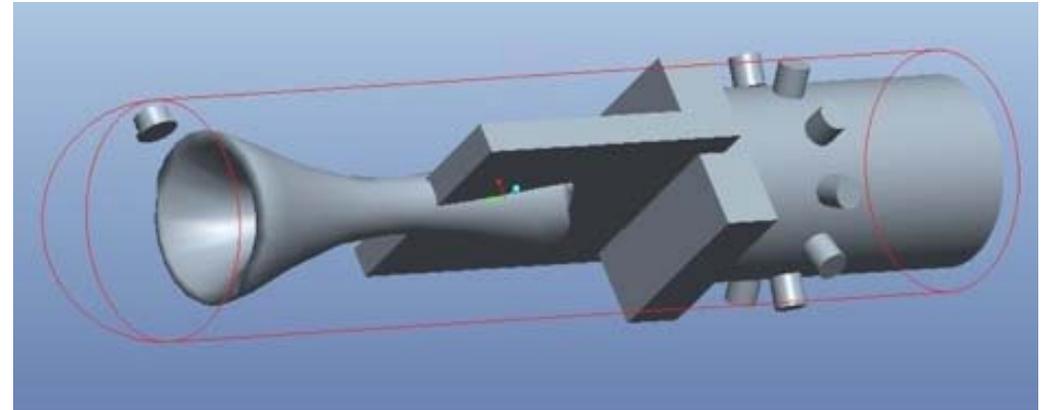




JOHN F. KENNEDY SPACE CENTER

(3) Configurations



- 3.5m

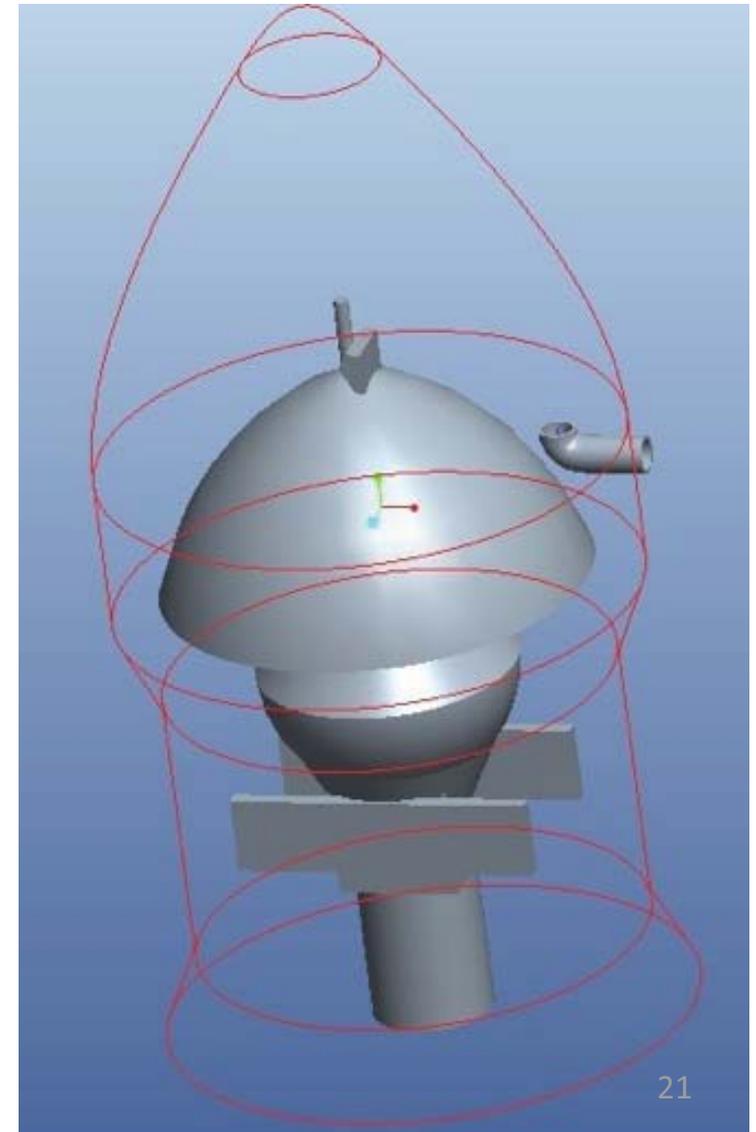

UNIVERSITY OF CENTRAL FLORIDA
COLLEGE OF ENGINEERING AND COMPUTER SCIENCE



JOHN F. KENNEDY SPACE CENTER

(3) Configurations



- 5.5m



UNIVERSITY OF CENTRAL FLORIDA
COLLEGE OF ENGINEERING AND COMPUTER SCIENCE




JOHN F. KENNEDY SPACE CENTER


CFD Modeling




- Snappy Hex – Mesher

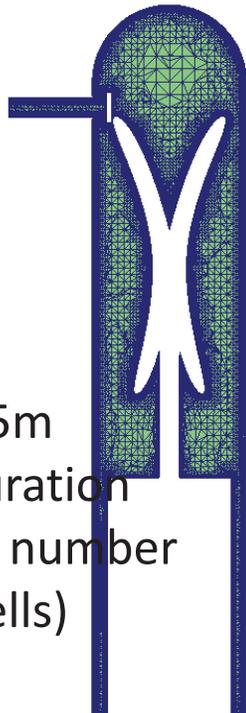

0.75m
Configuration
(6762865 number
of cells)

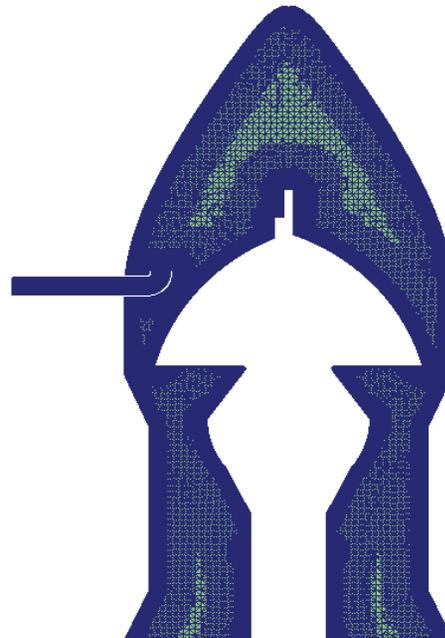

3.5m Configuration
(8594480 number of
cells)

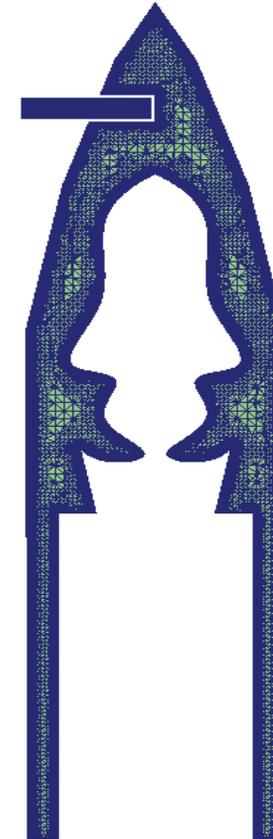

5.5m Configuration
(6980673 number of
cells)





UNIVERSITY OF CENTRAL FLORIDA
COLLEGE OF ENGINEERING AND COMPUTER SCIENCE




CFD Modeling



- OpenFoam - SimpleFoam

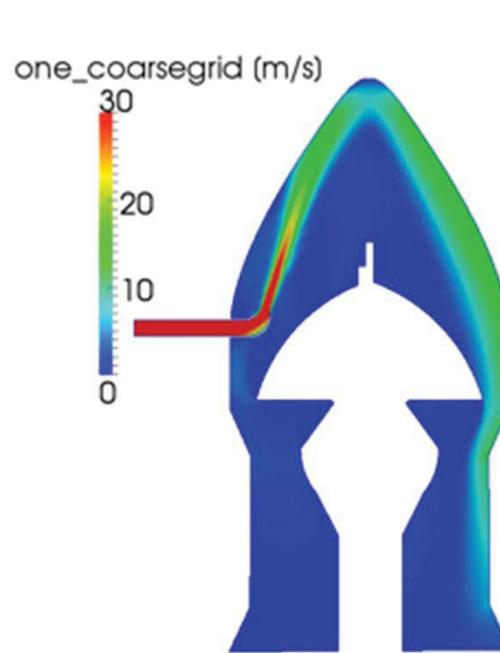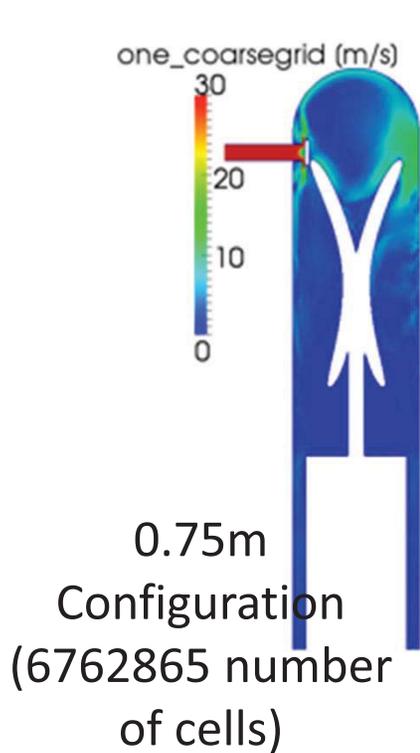

3.5m Configuration
(8594480 number of cells)

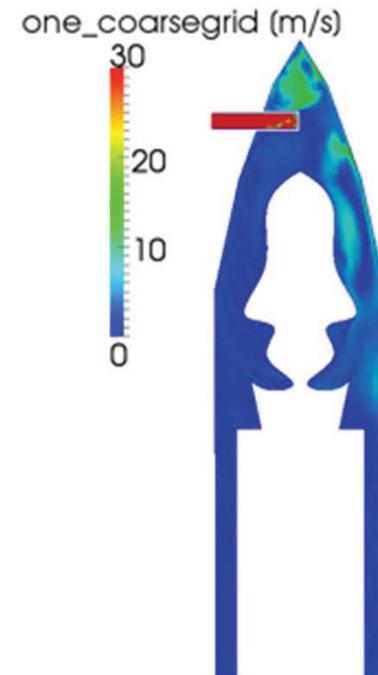

5.5m Configuration
(6980673 number of cells)





Uncertainty Calculation



- Proposed Methodology

$$S_{u_{val}}^+$$

$$u_{val} = k \left(\sqrt{u_{num}^2 + u_{input}^2} \right)$$

- Expanding

Input/Variable	Description	Bias
Grid	3 grids considered for each configuration	??
Inlet Velocity	Boundary Condition low and high	10%
Outlet Pressure	Boundary Condition low and high	2%
Turbulence Model	SA, ke-realizable, kwSST	??
Wall Functions	with and without	??
Rough Wall Function	smooth vs. rough	??
Compressibility	incompressible vs. compressible	??
Solver	OpenFoam, Fluent, STARCCM+	??
Fluid Properties	kinematic viscosity μ represents air [0-50-100] deg C	1.36, 1.5, 2.306e-05

$$\begin{aligned}
 u_{val} = k & \left(\left(\left(\frac{\partial V}{\partial grid} \right)^2 B_{grid}^2 \right) + \left(\left(\frac{\partial V}{\partial pressure} \right)^2 B_{pressure}^2 \right) + \left(\left(\frac{\partial V}{\partial velocity} \right)^2 B_{velocity}^2 \right) + \left(\left(\frac{\partial V}{\partial rho} \right)^2 B_{rho}^2 \right) \right. \\
 & + \left(\left(\frac{\partial V}{\partial wall\ functions} \right)^2 B_{wall\ functions}^2 \right) + \left(\left(\frac{\partial V}{\partial surface\ roughness} \right)^2 B_{surface\ roughness}^2 \right) \\
 & + \left(\left(\frac{\partial V}{\partial compressibility} \right)^2 B_{compressibility}^2 \right) + \left(\left(\frac{\partial V}{\partial solver} \right)^2 B_{solver}^2 \right) \\
 & \left. + \left(\left(\frac{\partial V}{\partial turbulence} \right)^2 B_{turbulence}^2 \right) \right)^{1/2}
 \end{aligned}$$





Uncertainty Calculation



Case #	Parameter	Grid	Configuration		
			0.75	3.5	5.5
1		coarse	1	1	1
2		med	2	2	2
3		fine	3	3	3
Boundary Conditions					
4		inlet velocity low	4	4	4
5		inlet velocity high	5	5	5
6		pressure outlet low	6	6	6
7		pressure outlet high	7	7	7
Turbulence Models					
8		SA	8	8	8
9		ke-realizable - same as 1	9	9	9
10		kwsst	10	10	10
11	Wall Functions	without wall functions	11	11	11
12	Surface Roughness	rough wall function	12	12	12
13	Compressibility	different openfoam solver	13	13	13
Solver					
14		fluent	14	14	14
15		starccm	15	15	15
Fluid Properties					
16		nut high	16	16	16
17		nut low	17	17	17

Number of Cases	Degrees of Freedom	Confidence 90%
2	1	6.314
3	2	2.92
4	3	2.353
5	4	2.132
6	5	2.015
7	6	1.943
8	7	1.895
9	8	1.86
10	9	1.833
11	10	1.812
12	11	1.796
13	12	1.782
14	13	1.771
15	14	1.761
16	15	1.753
17	16	1.746
18	17	1.74
19	18	1.734
20	19	1.729
21	20	1.725
22	21	1.721
23	22	1.717
24	23	1.714
25	24	1.711
26	25	1.708
27	26	1.706
28	27	1.703
29	28	1.701
30	29	1.699
31	30	1.697
41	40	1.684
51	50	1.676
61	60	1.671
81	80	1.664
101	100	1.66
121	120	1.658
infy	infy	1.645

$$u_{val} = 1.746 * \left| \frac{1}{2} (S_U - S_L) \right|$$






Results 0.75m Configuration



- Solution and Uncertainty Contour Plots

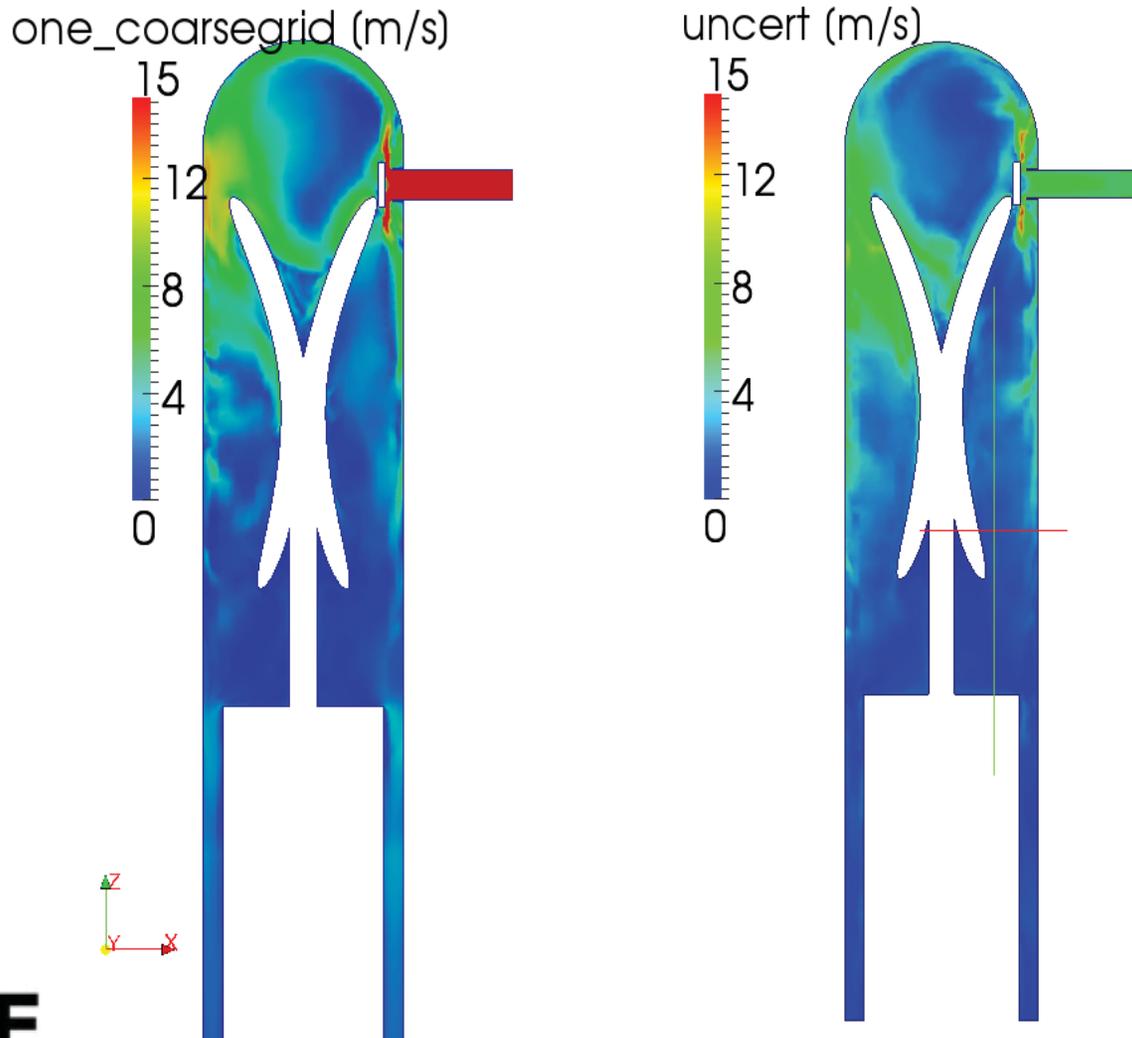




Results 0.75m Configuration



- Solution Line Plot

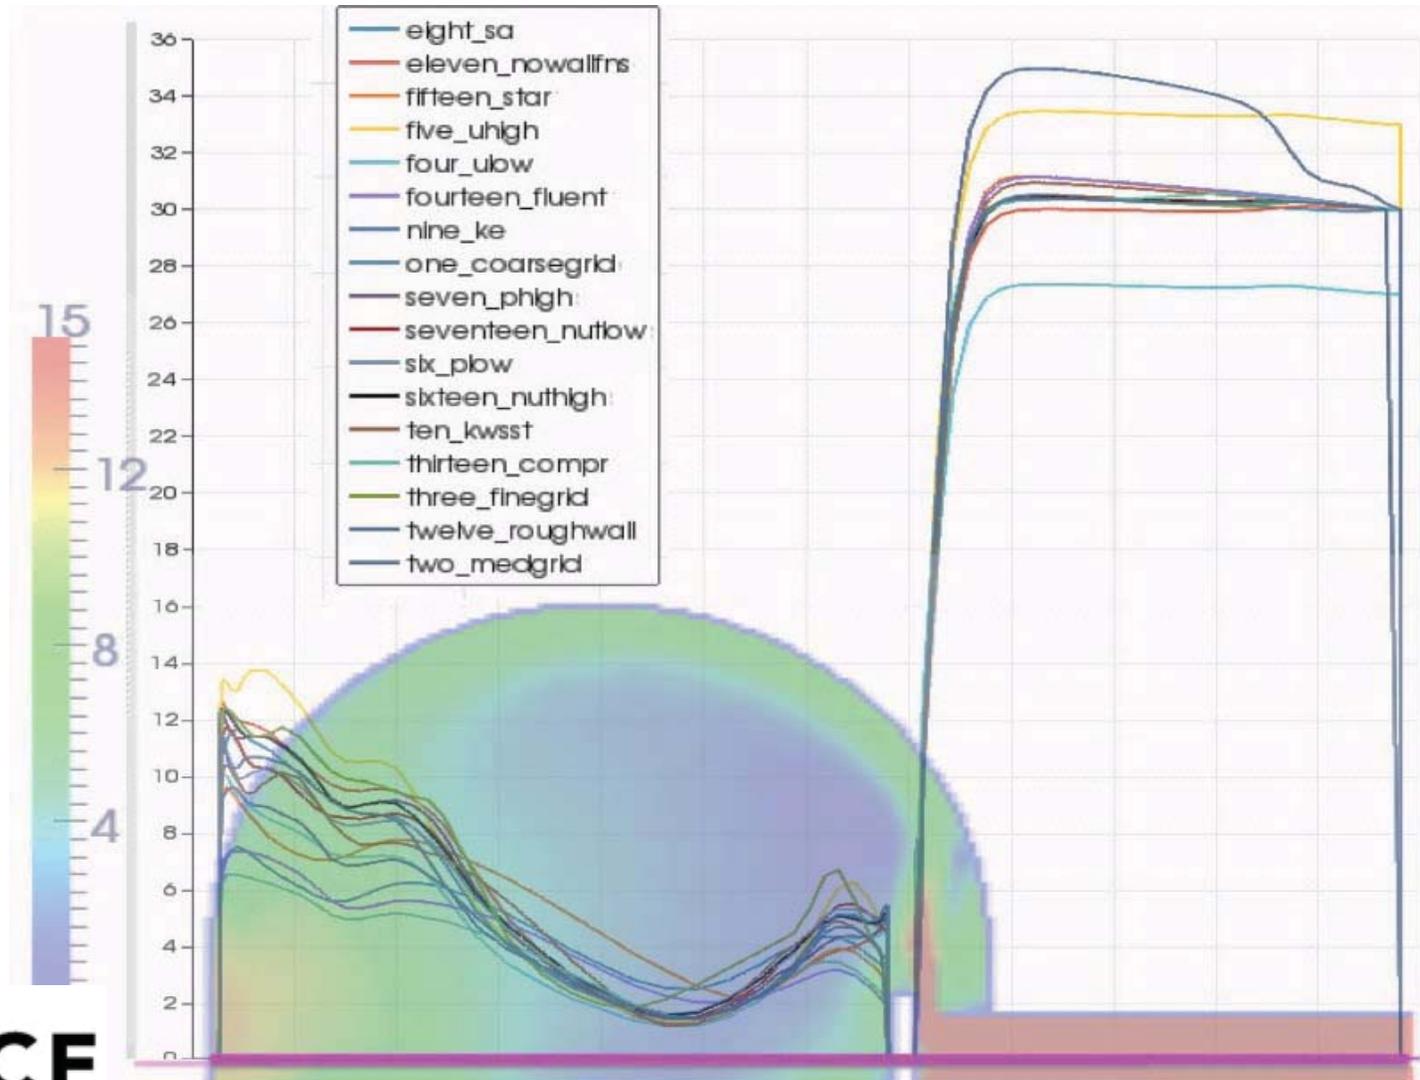




Results 0.75m Configuration



- Uncertainty Line Plot

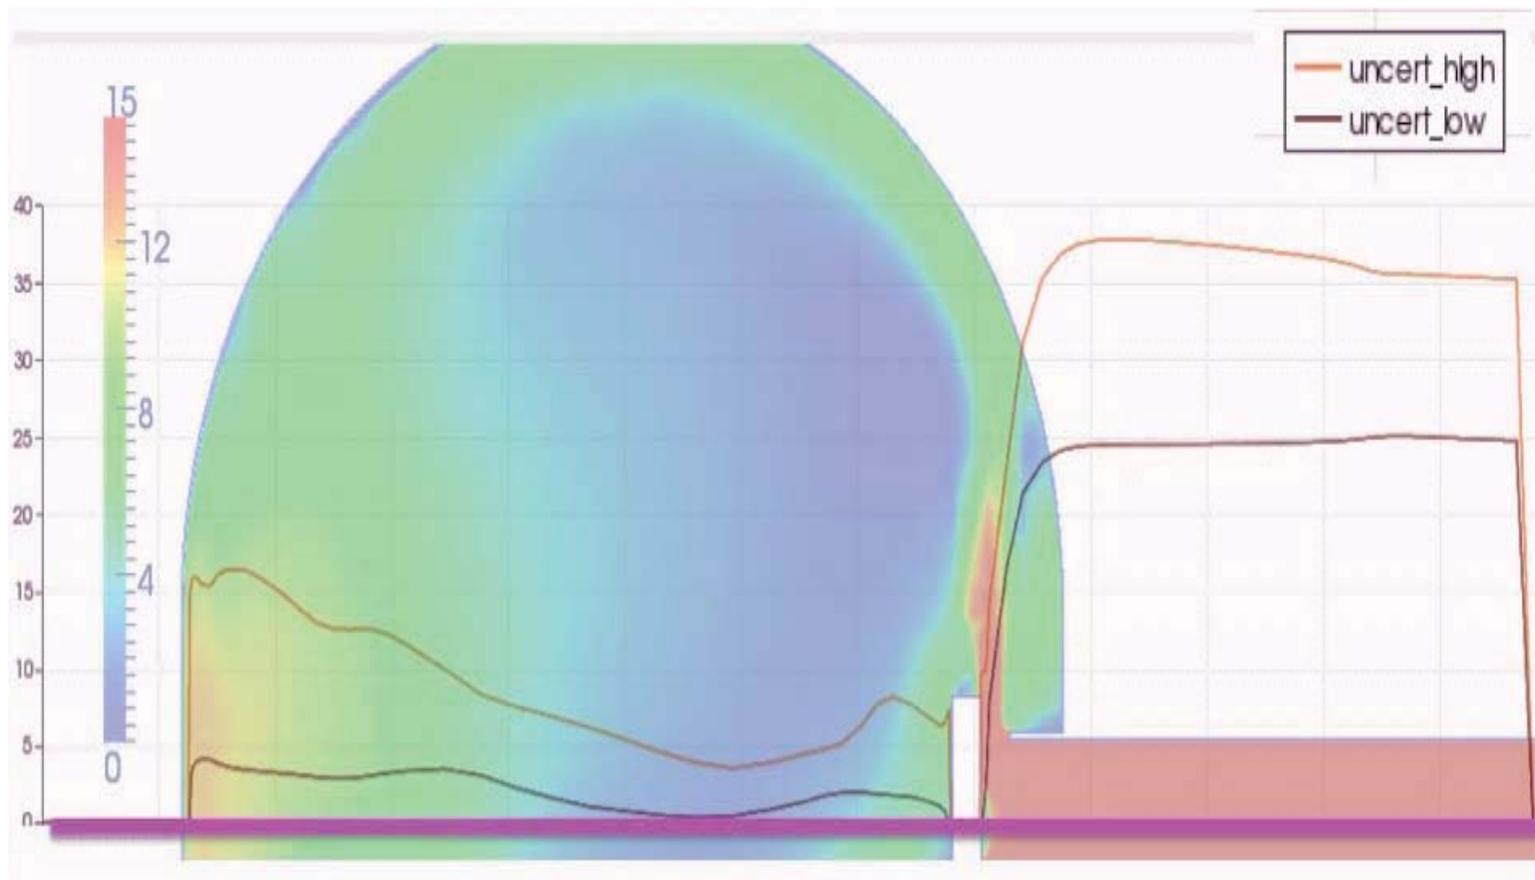



Results 0.75m Configuration



- **Uncertainty Ranking**
- The uncertainty for each of the input variables were ranked by the non-dimensionalizing the difference in the results by the freestream value and ranking from greatest uncertainty to least uncertainty.

Input Variable	Description	Bias	Mean Velocity Uncertainty (m/s)	Mean Non-Dimensionalized Uncertainty	Normalized Ranking %	Numbered Ranking
Grid	3 grids considered	??	1.6287	0.0543	13.40	2
Inlet Velocity	Boundary Condition	10%	1.3115	0.04737	11.69	5
Outlet Pressure	Boundary Condition	2%	1.1478	0.0383	9.45	8
Turbulence Model	SA, k-epsilon, k-omega, k-SST	??	1.4628	0.0488	12.04	4
Wall Functions	with and without	??	0.8286	0.0276	6.81	9
Rough Wall Function	smooth vs. rough	??	1.5237	0.0508	12.53	3
Compressibility	incompressible vs. compressible	??	1.3128	0.0438	10.81	6
Solver	OpenFoam, Fluent, STARCCM+	??	1.673	0.0558	13.77	1
Fluid Properties	kinematic viscosity, rho, represents air [0-50-100] deg C	1.36, 1.5, 2.306e-05	1.1536	0.0385	9.50	7






Results 3.5m Configuration




- Solution and Uncertainty Contour Plots

one_coarsegrid (m/s)

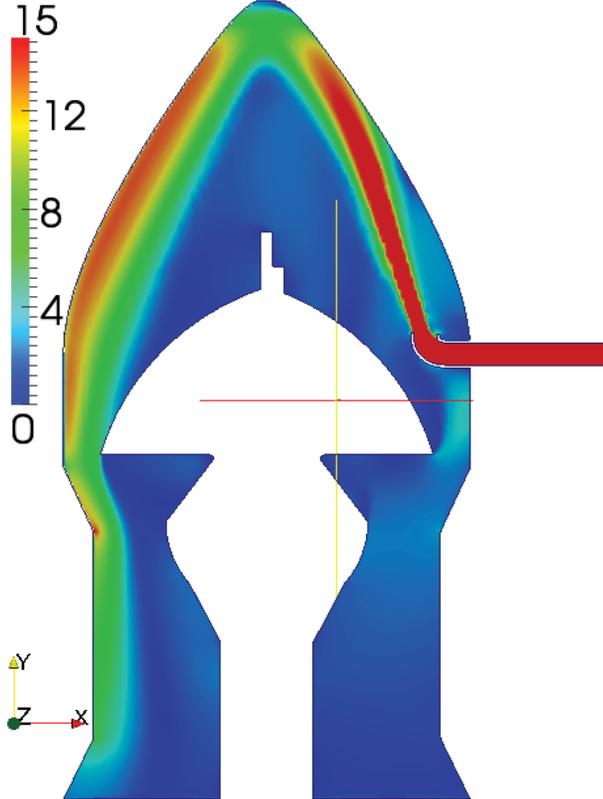

uncert (m/s)

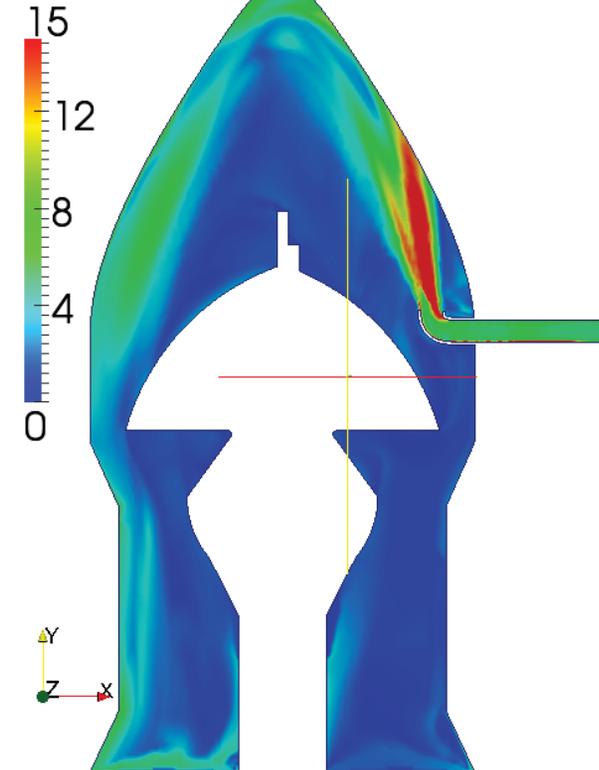




Results 3.5m Configuration



- Solution Line Plot

- eight_sa
- eleven_rowallins
- fifteen_star
- five_uhigh
- four_ulow
- fourteen_fluent
- nine_ke
- one_coarsegrid
- seven_phigh
- seventeen_nutlow
- six_plow
- sixteen_nuthigh
- ten_kwsst
- thirteen_compr
- three_finegrid
- twelve_roughwall
- two_medgrid

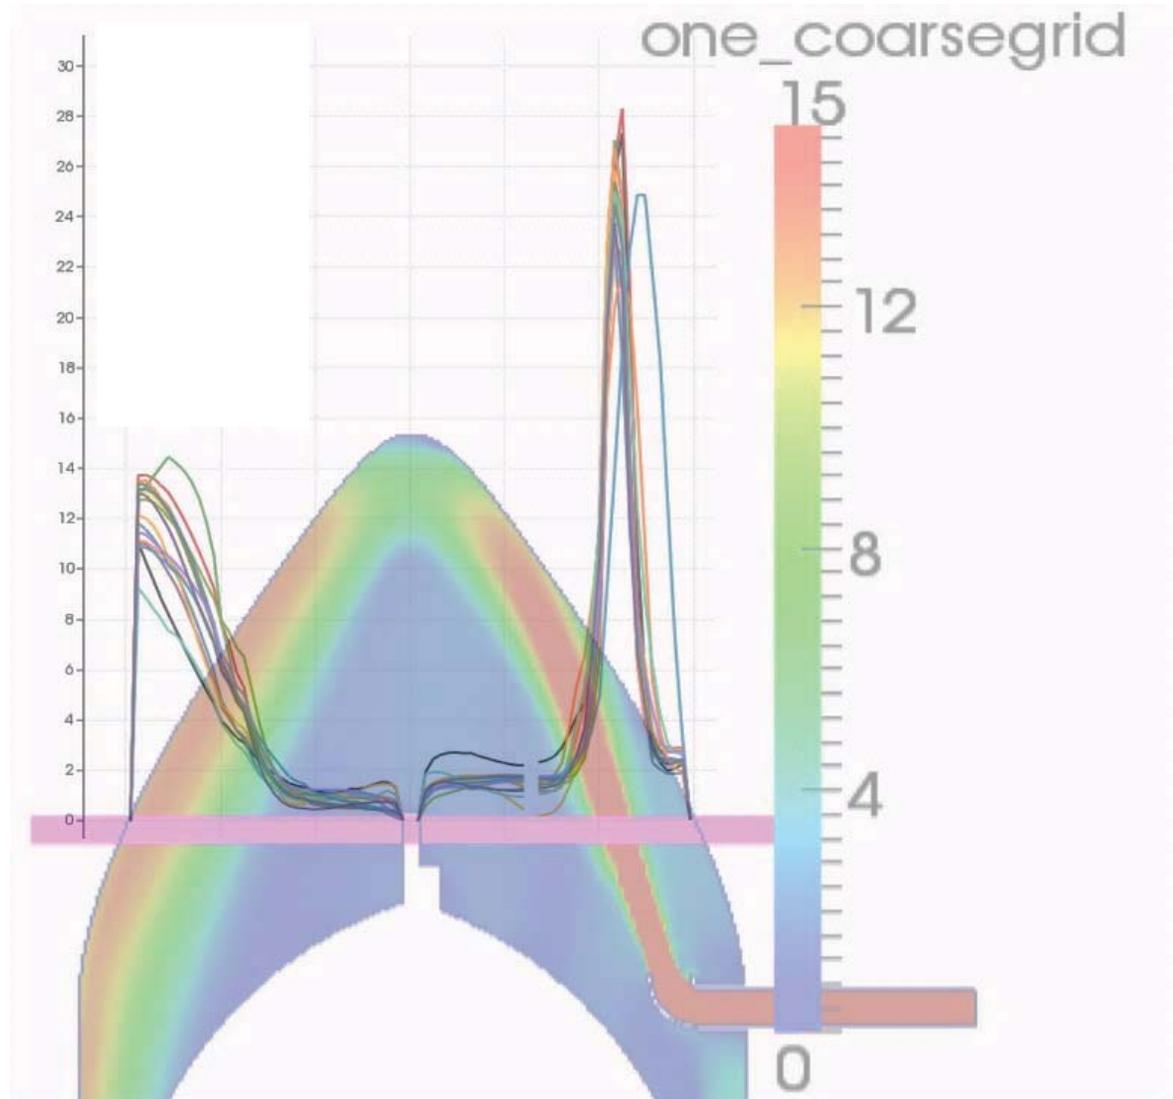




Results 3.5m Configuration



- Uncertainty Line Plot

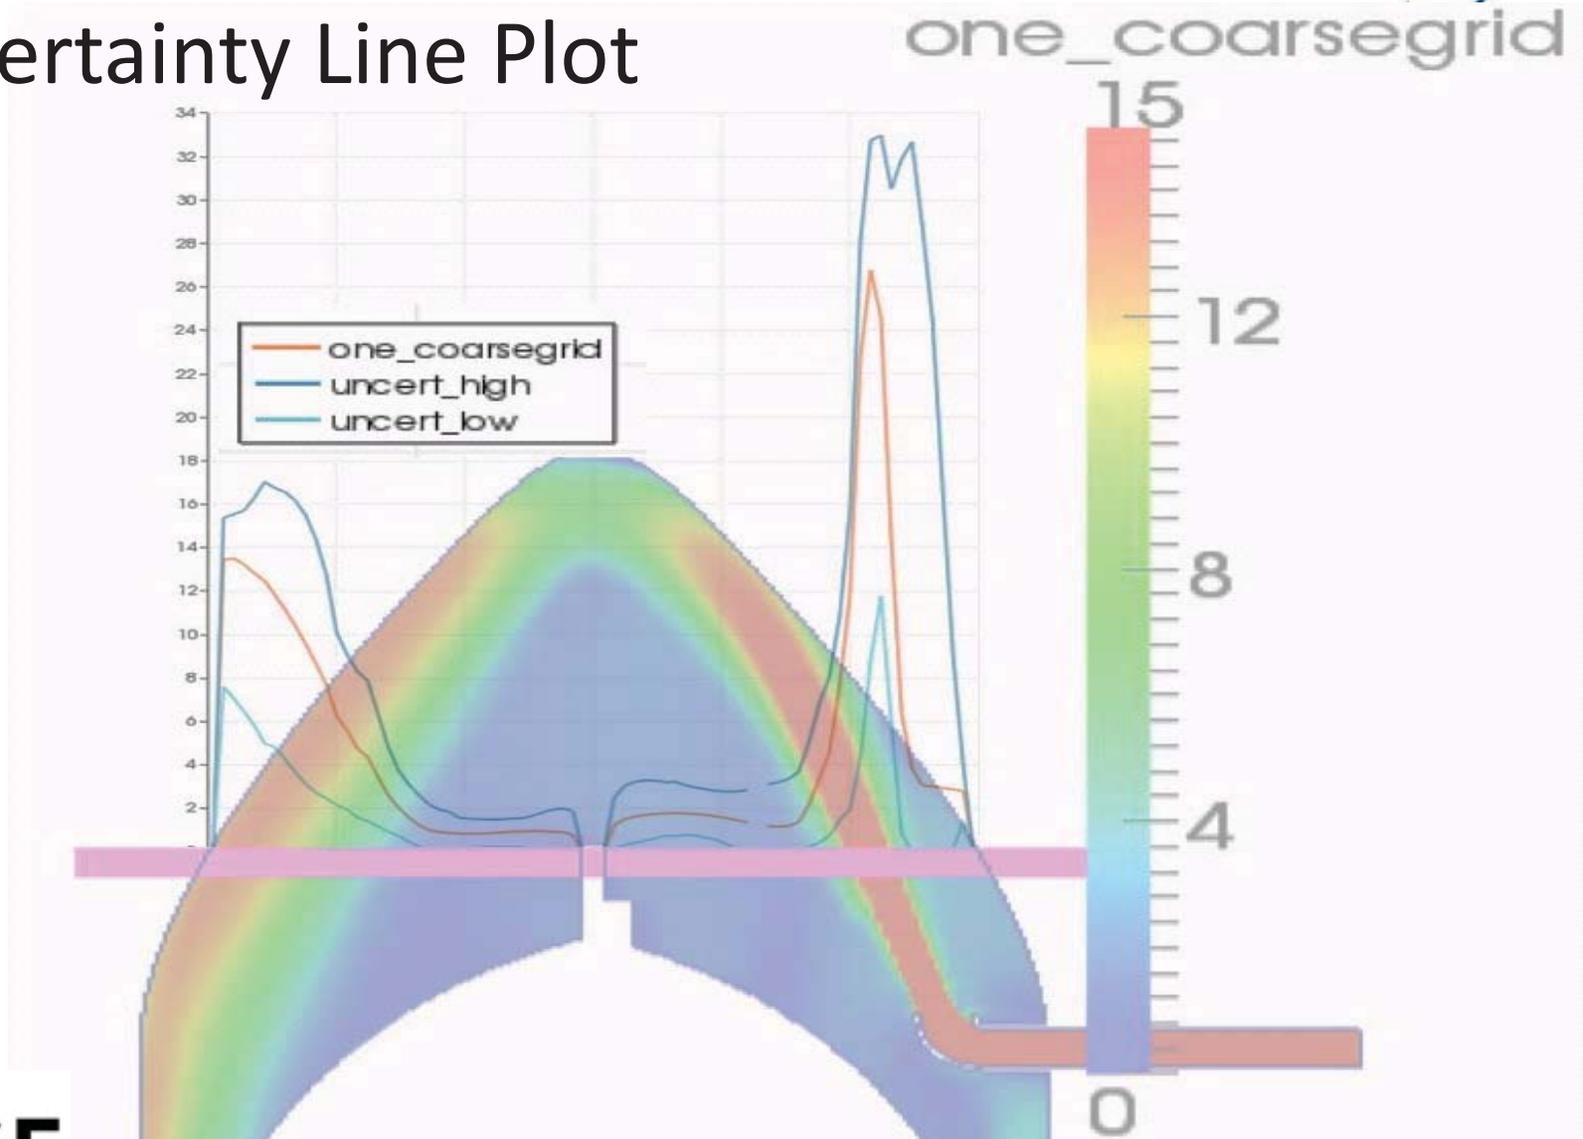



Results 3.5m Configuration



- Uncertainty Ranking

Input Variable	Description	Bias	Mean Velocity Uncertainty (m/s)	Mean Non-Dimensionalized Uncertainty	Normalized Ranking %	Numbered Ranking
Grid	3 grids considered		0.6829	0.0228	8.28	7
Inlet Velocity	Boundary Condition	10%	0.7919	0.0264	9.59	6
Outlet Pressure	Boundary Condition	2%	1.4606	0.0487	17.70	1
Turbulence Model	SA, ke-realizable, kwSST		1.3487	0.045	16.35	2
Wall Functions	with and without		0.6139	0.0205	7.45	9
Rough Wall Function	smooth vs. rough		1.0531	0.0351	12.75	3
Compressibility	incompressible vs. compressible		0.8252	0.0275	9.99	5
Solver	OpenFoam, Fluent, STARCCM+		0.841	0.028	10.17	4
Fluid Properties	kinematic viscosity nu represents air [0-50-100] deg C	1.36,1.5,2.306e-05	0.6345	0.0212	7.70	8






Results 5.5m Configuration




- Solution and Uncertainty Contour Plots

one_coarsegrid (m/s)

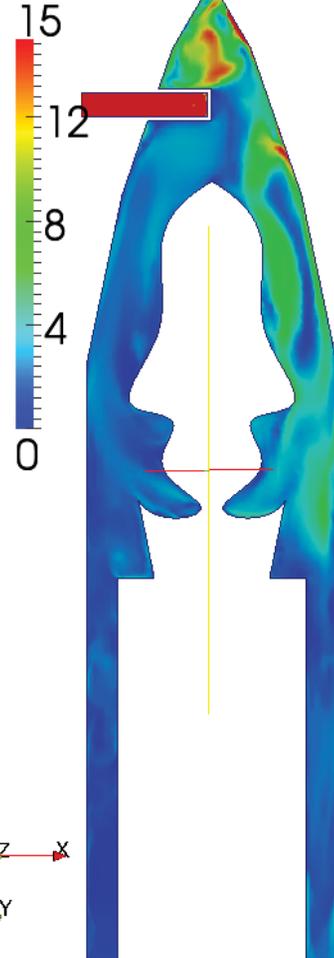

uncert (m/s)

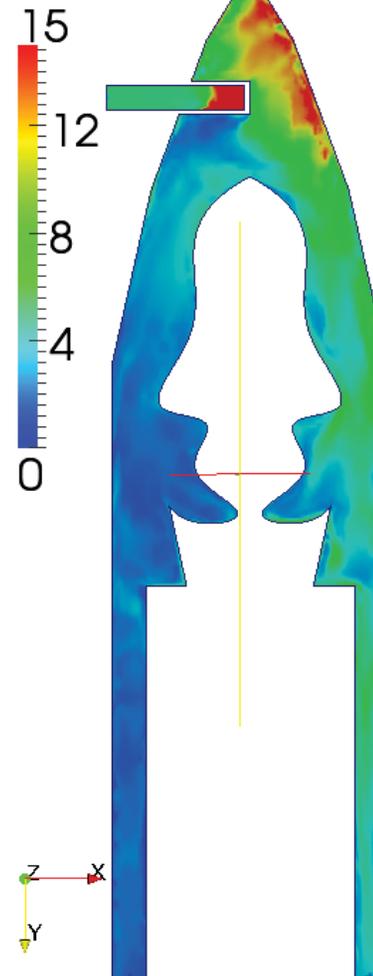




Results 5.5m Configuration



- Solution Line Plot

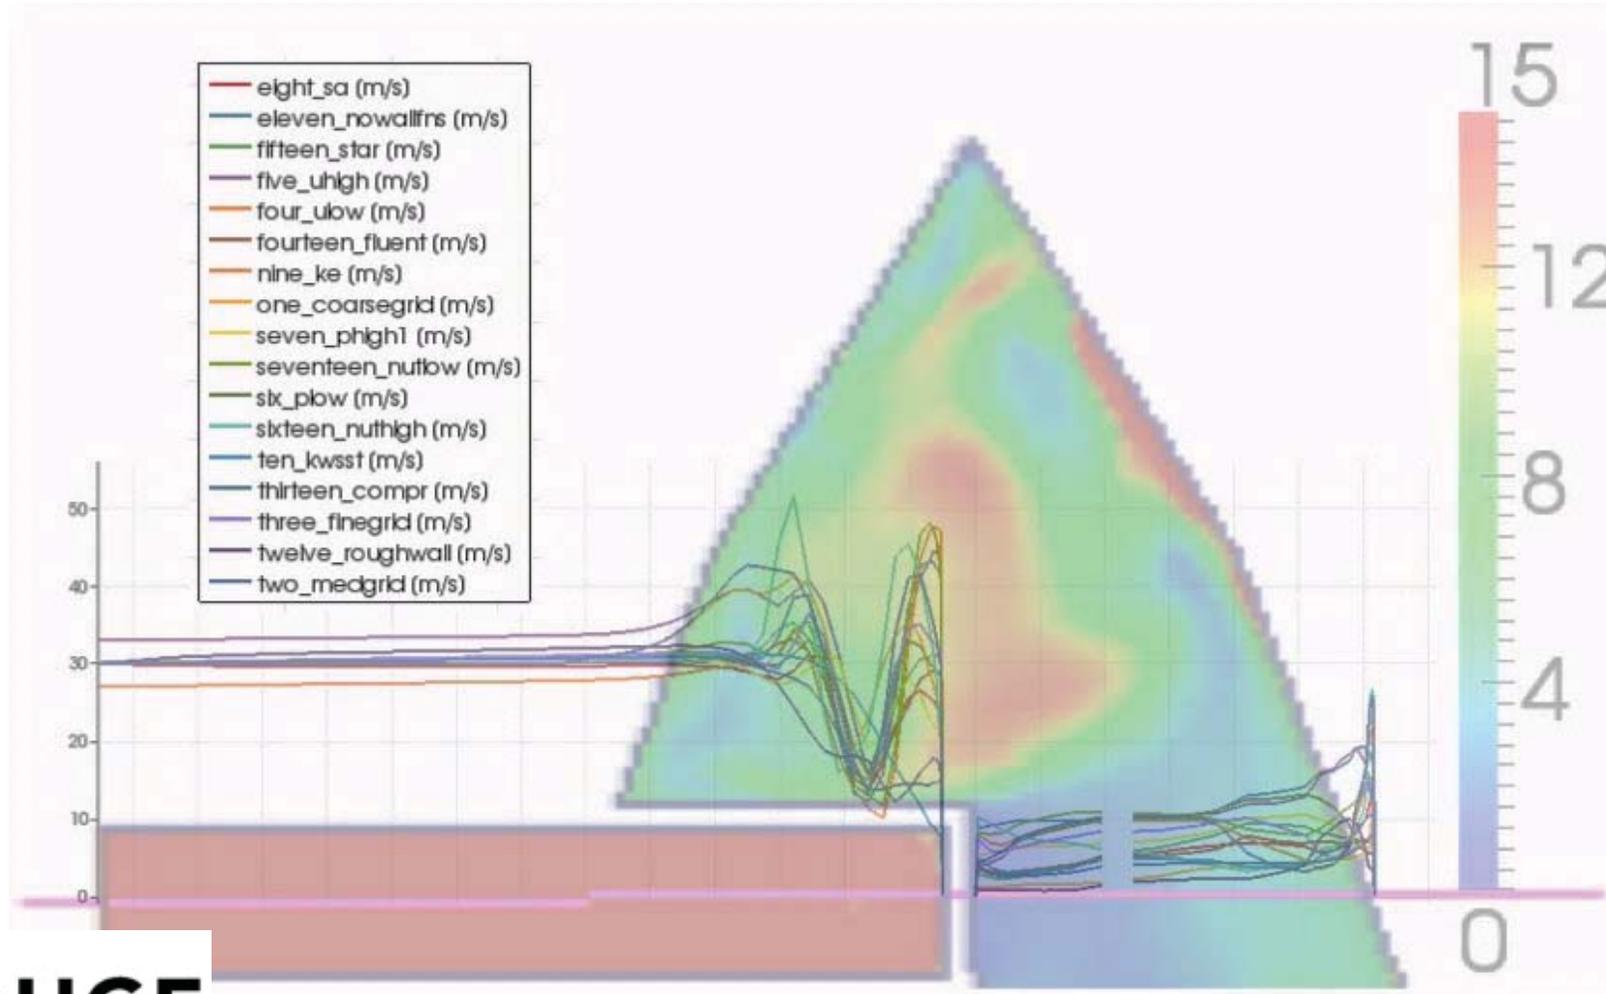




Results 5.5m Configuration



- Uncertainty Line Plot

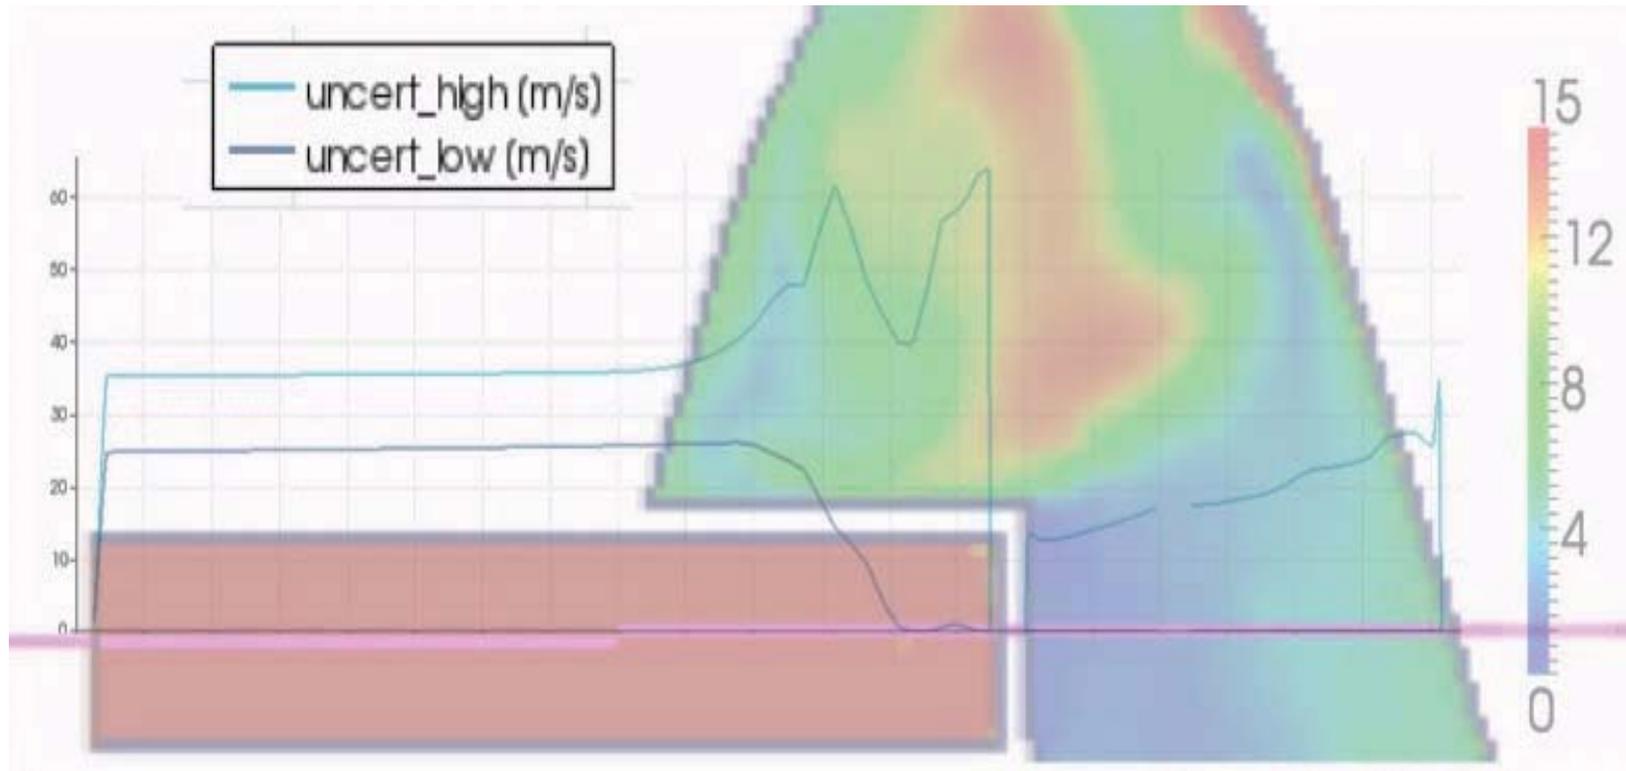



Results 3.5m Configuration



- Uncertainty Ranking


Input Variable	Description	Bias	Mean Velocity Uncertainty (m/s)	Mean Non-Dimensionalized Uncertainty	Normalized Ranking %	Numbered Ranking
Grid	3 grids considered		2.0203	0.0673	12.44	3
Inlet Velocity	Boundary Condition	10%	1.6198	0.054	9.98	6
Outlet Pressure	Boundary Condition	2%	2.0173	0.0672	12.42	4
Turbulence Model	SA, ke-realizable, kwSST		2.3049	0.0768	14.19	1
Wall Functions	with and without		1.4902	0.0497	9.18	7
Rough Wall Function	smooth vs. rough		1.4901	0.0497	9.18	8
Compressibility	incompressible vs. compressible		1.4256	0.0475	8.78	9
Solver	OpenFoam, Fluent, STARCCM+		1.8172	0.0606	11.20	5
Fluid Properties	kinematic viscosity nu represents air [0-50-100] deg C	1.36,1.5,2.306e-05	2.05	0.0683	12.62	2






JOHN F. KENNEDY SPACE CENTER


Comparison to Previous LDV Test

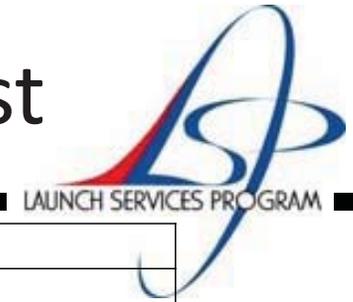

<u>Variable</u>	<u>Bias</u>
Velocity Inlet	3%
Kinematic Viscosity [0-100] Deg C	[1.36, 1.50, 2.306] e-5 m ² /s
Pressure Outlet	3%
Turbulence	ke-realizable, kwsst, SA

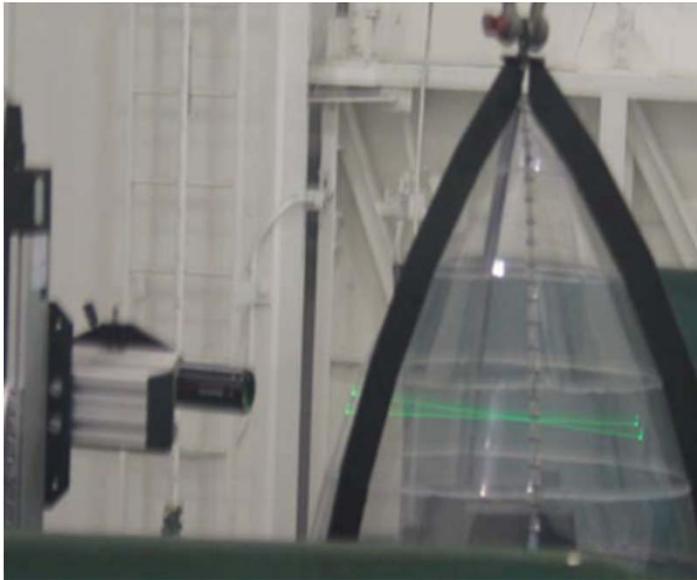





Kandula, M., Hammad, K., and Schallhorn, P., "CFD Validation with LDV Test Data for Payload/Fairing Internal Flow," AIAA-2005-4910, 2005.

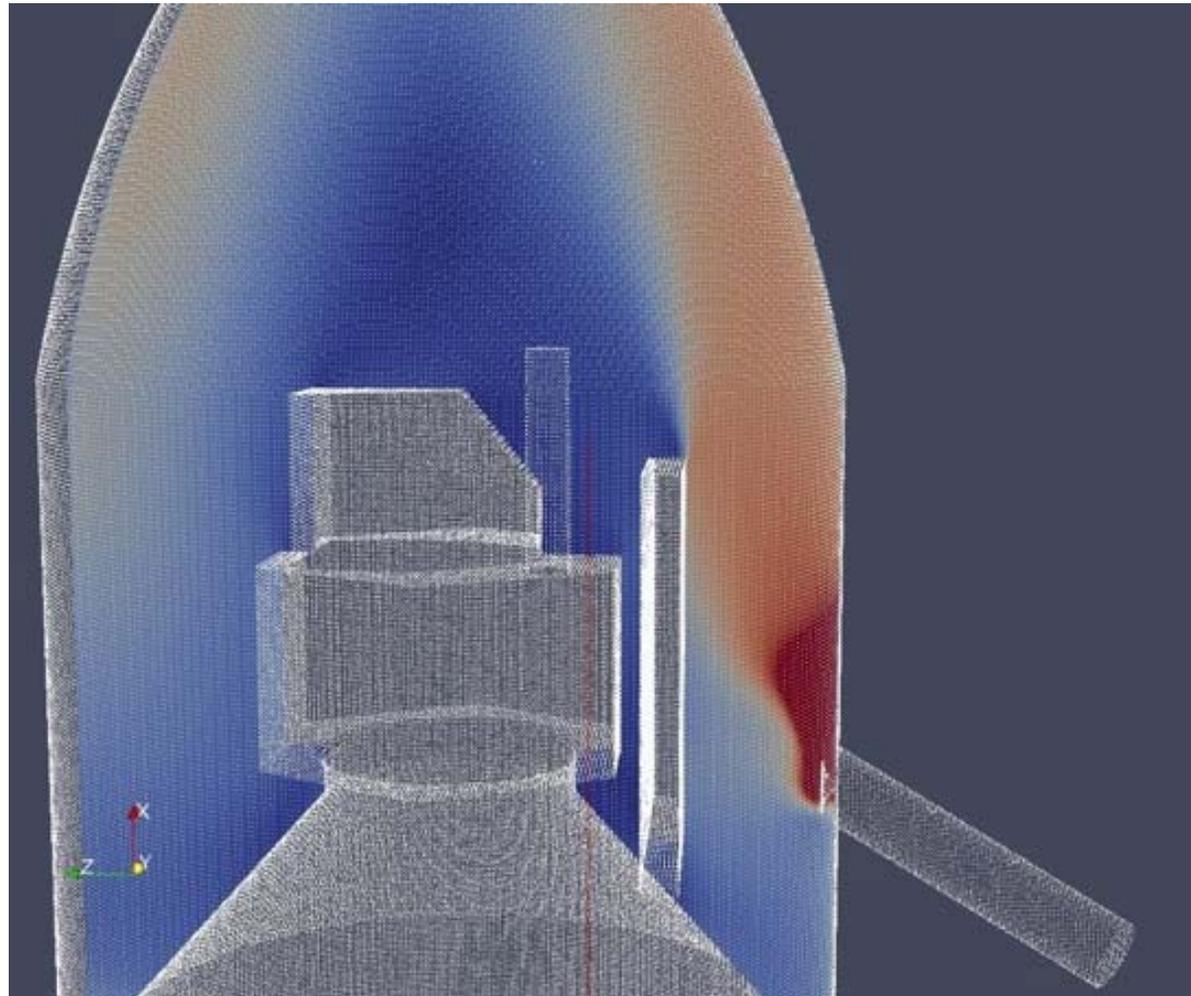



JOHN F. KENNEDY SPACE CENTER





Comparison to Previous LDV Test

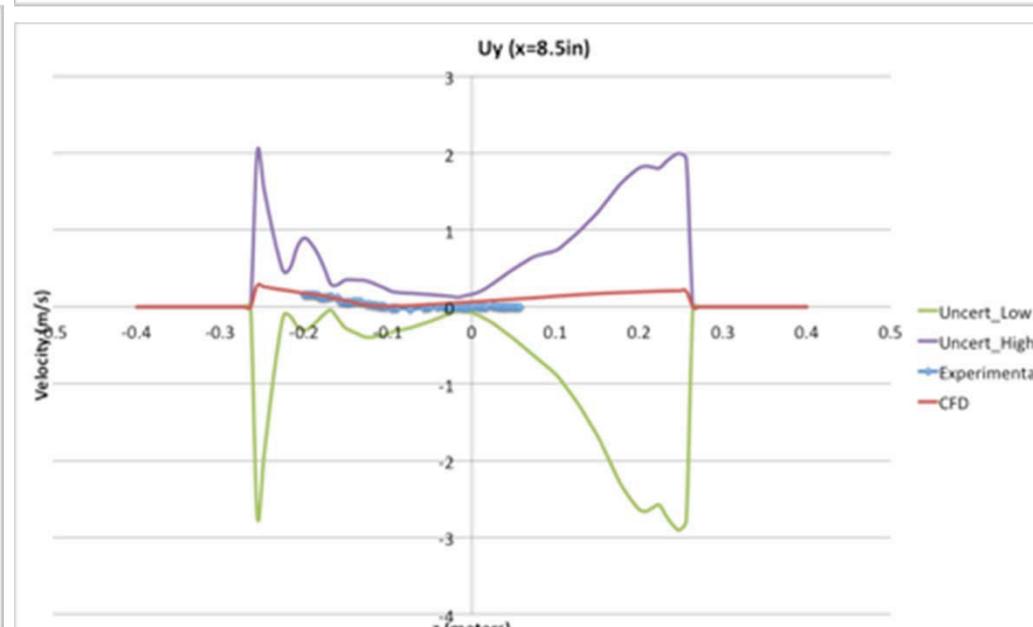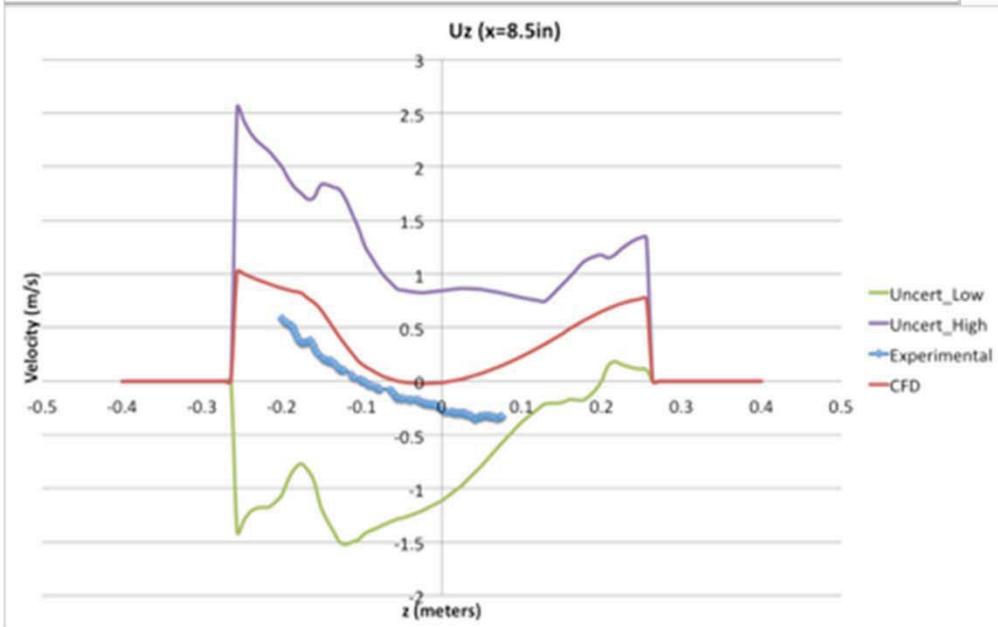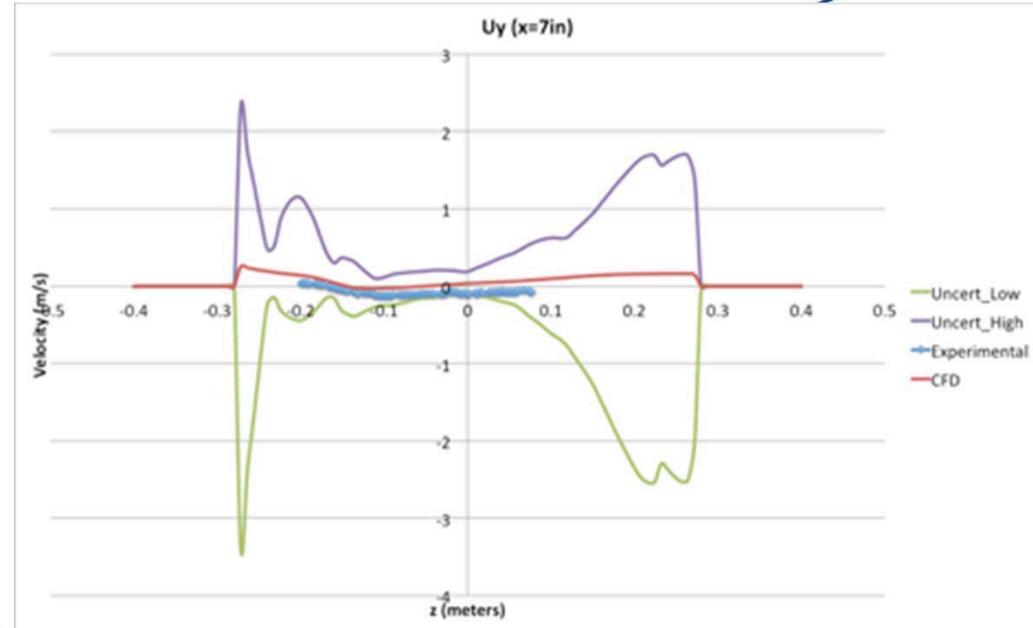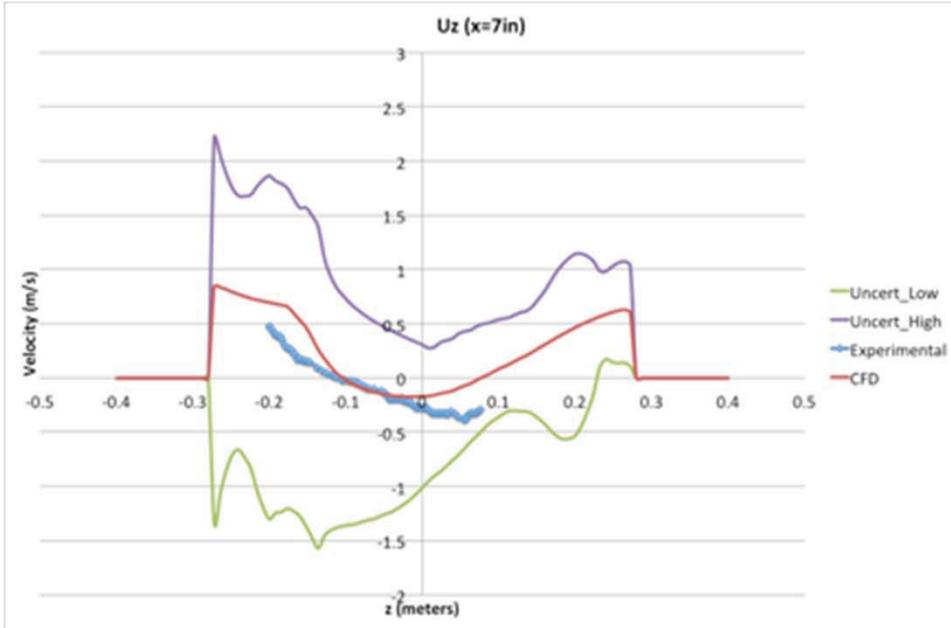

Assumes 99% Confidence



Comparison to Previous LDV Test

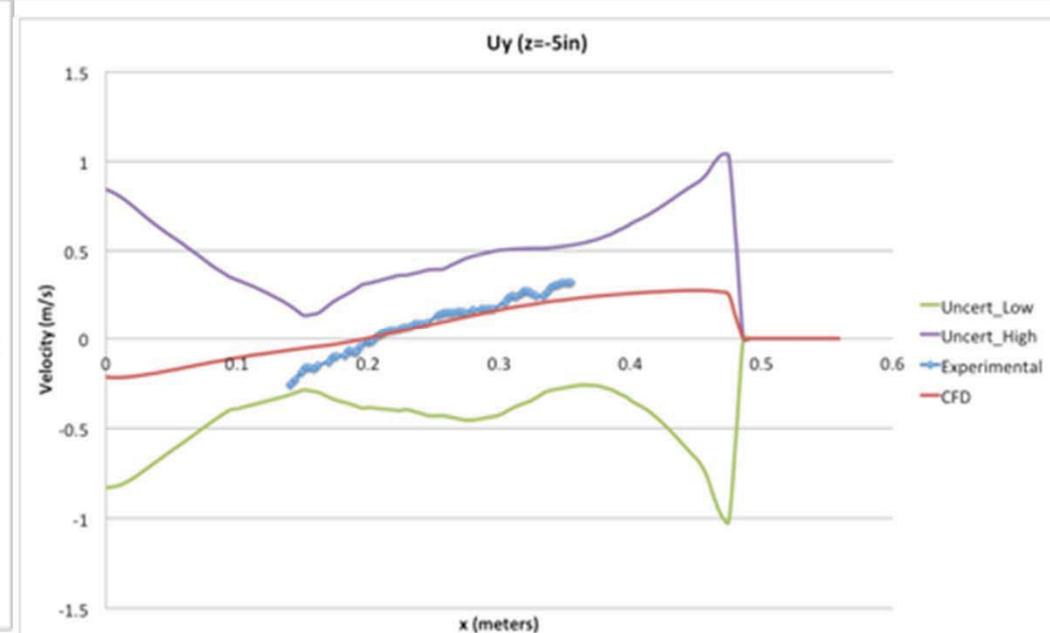
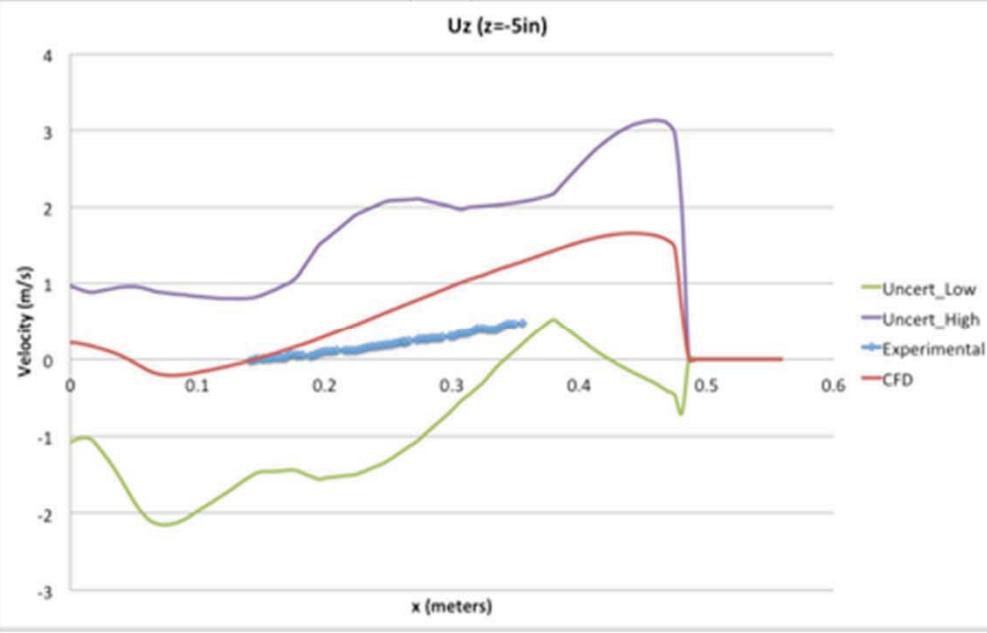
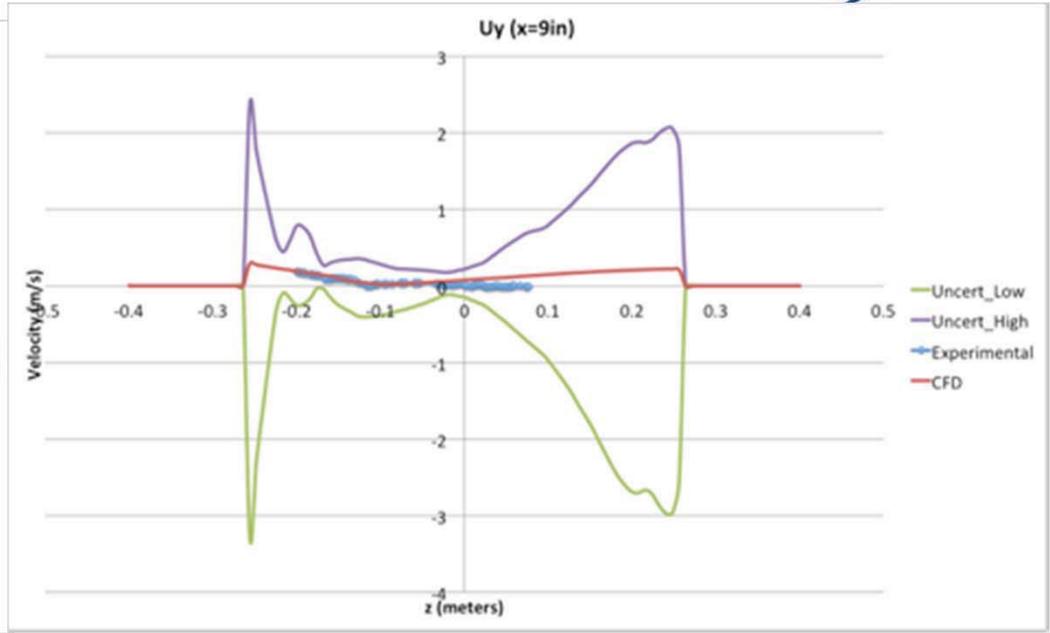
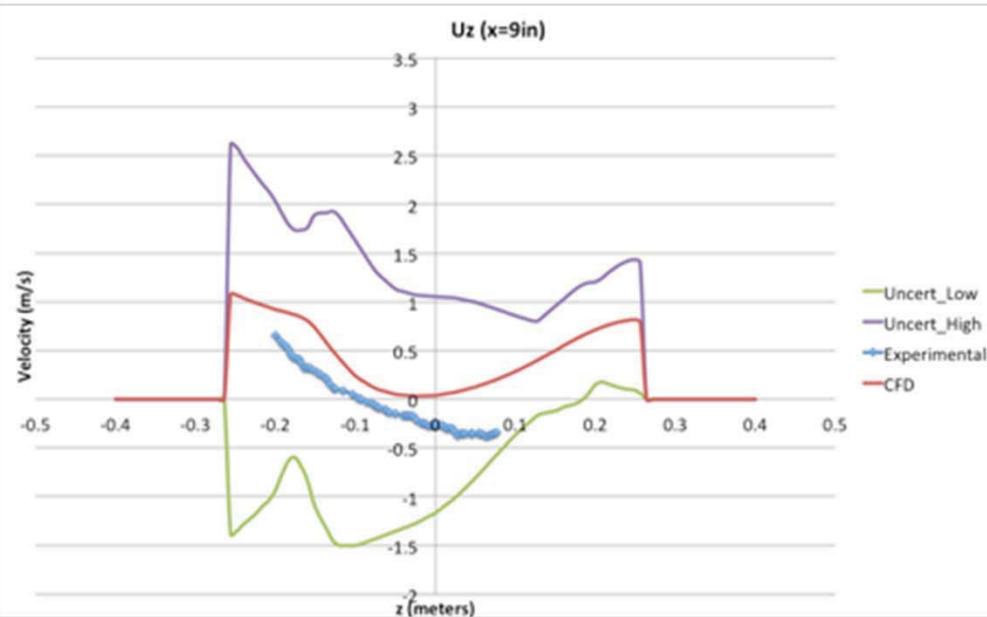


Assumes 99% Confidence



JOHN F. KENNEDY SPACE CENTER



Comparison to Previous LDV Test

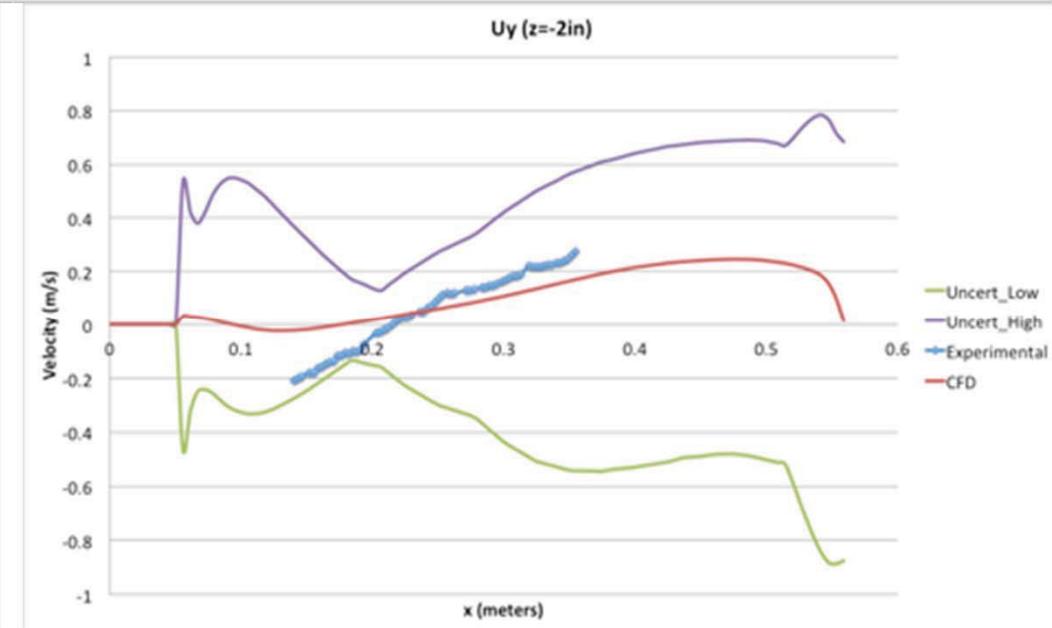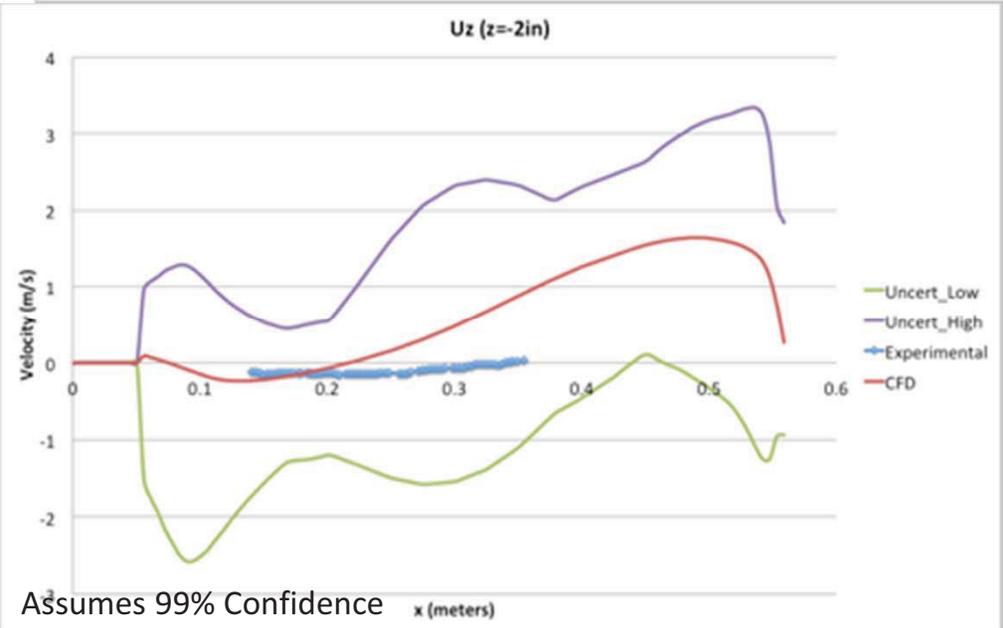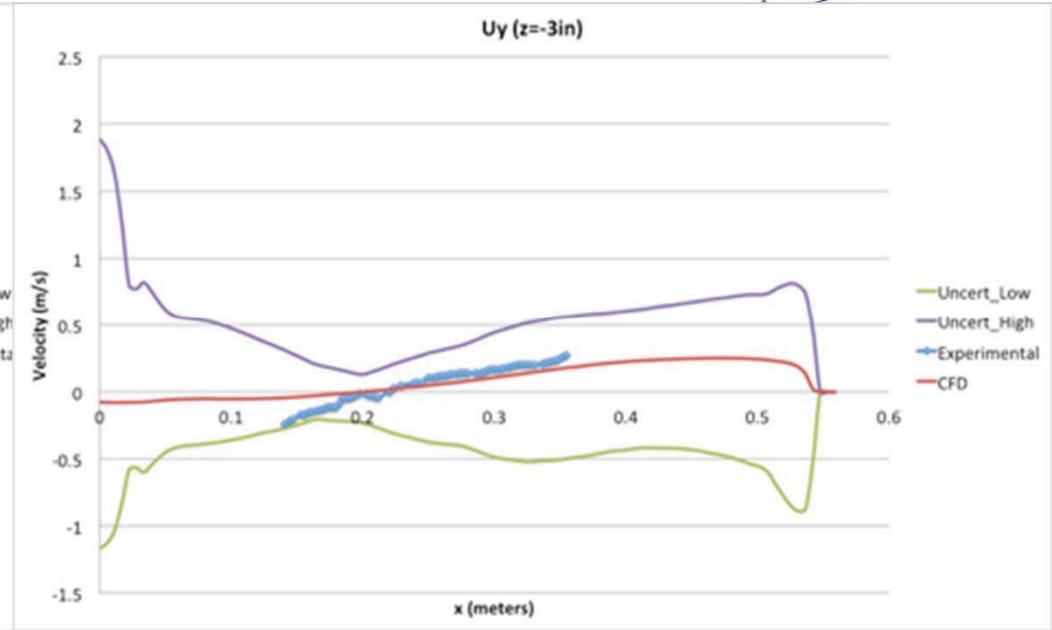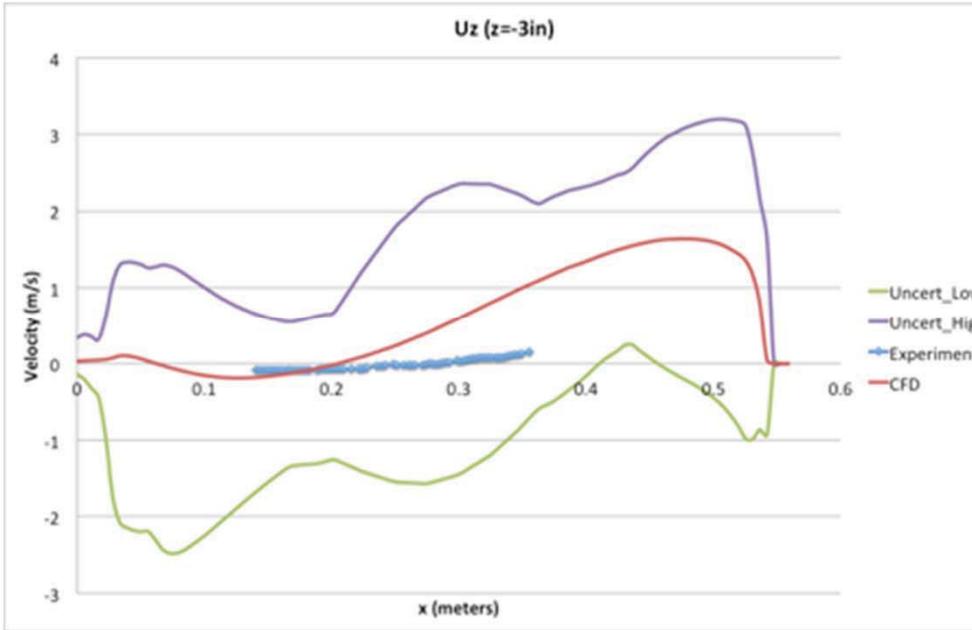

Assumes 99% Confidence



Comparison to Previous LDV Test

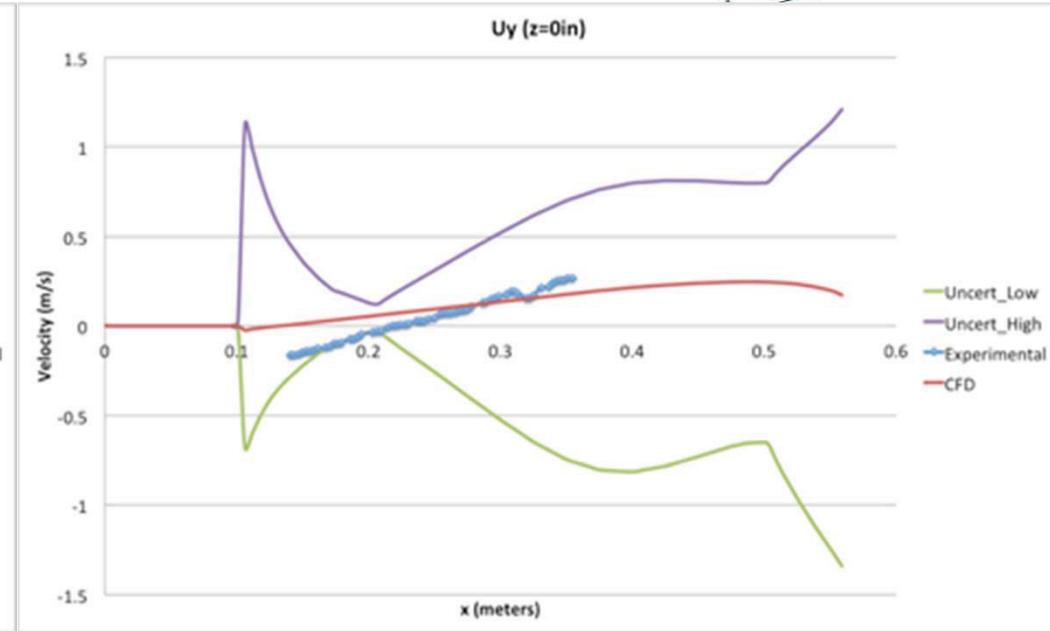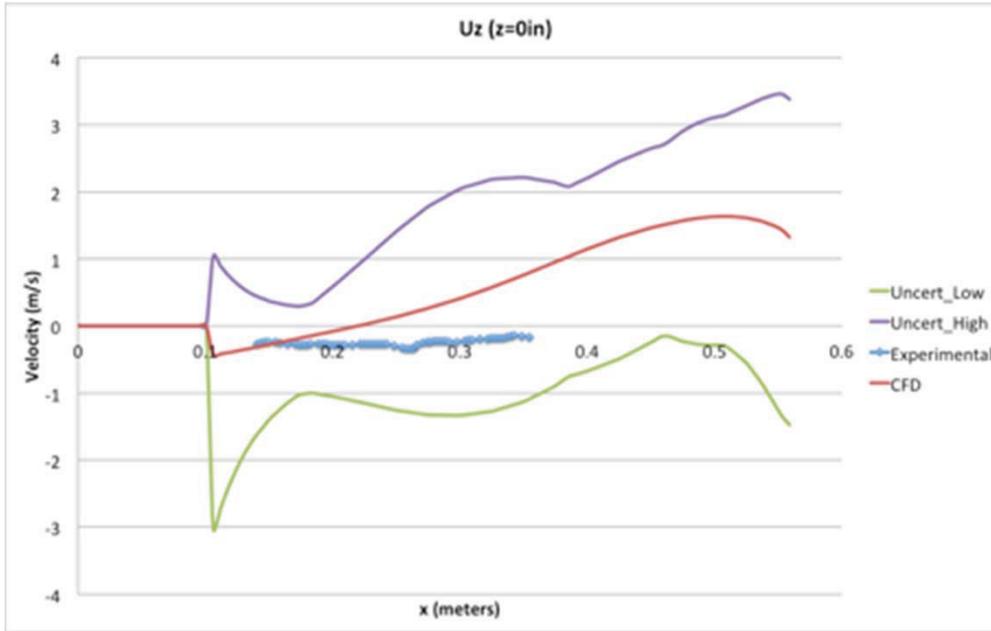



JOHN F. KENNEDY SPACE CENTER

Conclusion / Recommendation



- Proper validation with experimental data should be used to verify ECS impingement requirements
- This research proposes a CFD uncertainty methodology when experimental data is unavailable and unobtainable
 - Couples Student-T Distribution to the number of CFD models and input parameters
 - All input parameters considered had the same order of magnitude uncertainty



UNIVERSITY OF CENTRAL FLORIDA
COLLEGE OF ENGINEERING AND COMPUTER SCIENCE