https://ntrs.nasa.gov/search.jsp?R=20180004254 2020-02-10T23:53:02+00:00Z

Evolution of Fundamental Technologies for Future Electrified Aircraft

Dr. Ajay Misra
Deputy Director, Research and Engineering
NASA Glenn Research Center

Electric and Hybrid Aerospace Technology Symposium, Cologne, Germany, November 16 - 17

Electrical Component Technologies for Electrified Aircraft

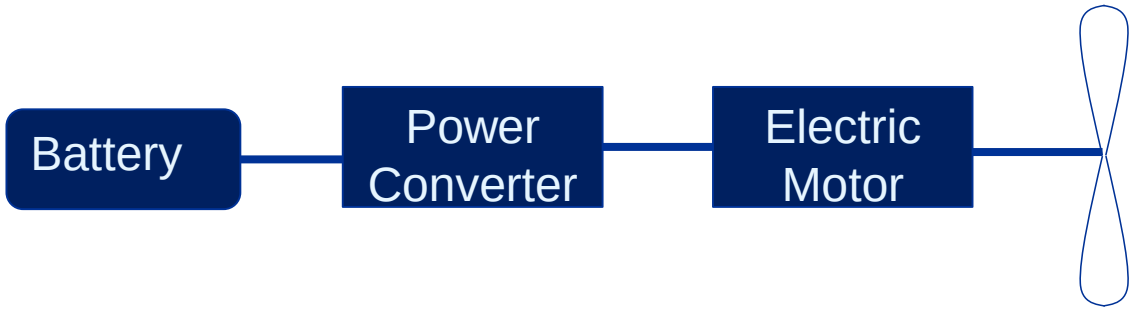

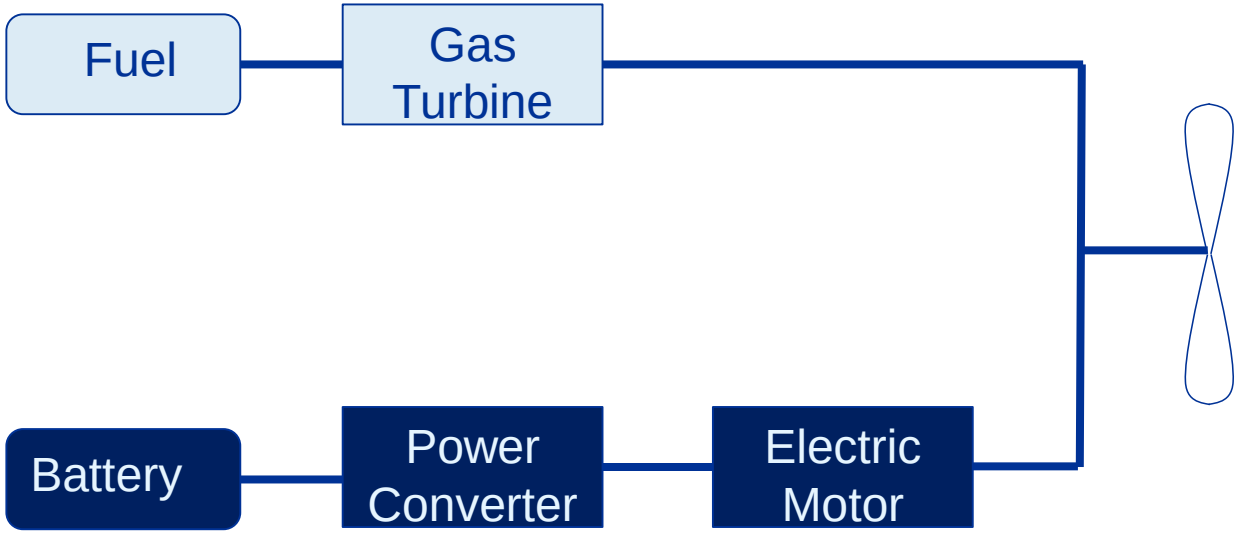

Key Technologies:

- Battery with 3-5X increase in specific energy
- Electric motor with 3-5X increase in power density
- Power converter with 3-5X increase in power density

Battery Requirement for Electrified Aircraft (Notional)

More system analysis required to identify requirements

All Electric

2-3 passenger , CTOL, 200 miles

2-3 passenger VTOL, 100 miles

4 passenger VTOL, 60 miles

30 passenger 300 miles, CTOL

4 passenger VTOL, 100-120 miles

Today

150-170 Wh/kg | **300 Wh/kg** | **400 Wh/kg** | **500 Wh/kg** | **600 Wh/kg** | **700 Wh/kg** | **800 Wh/kg** | **1000 Wh/kg**

Pack Level Wh/kg

10 - 20 passenger 300 miles

20 – 30 passenger > 400 miles (?)

50-70 passenger 800 miles

Light utility helicopter

50-70 passenger 1000 miles

Single aisle 737 class

Hybrid Electric

Battery Chemistry Possibilities

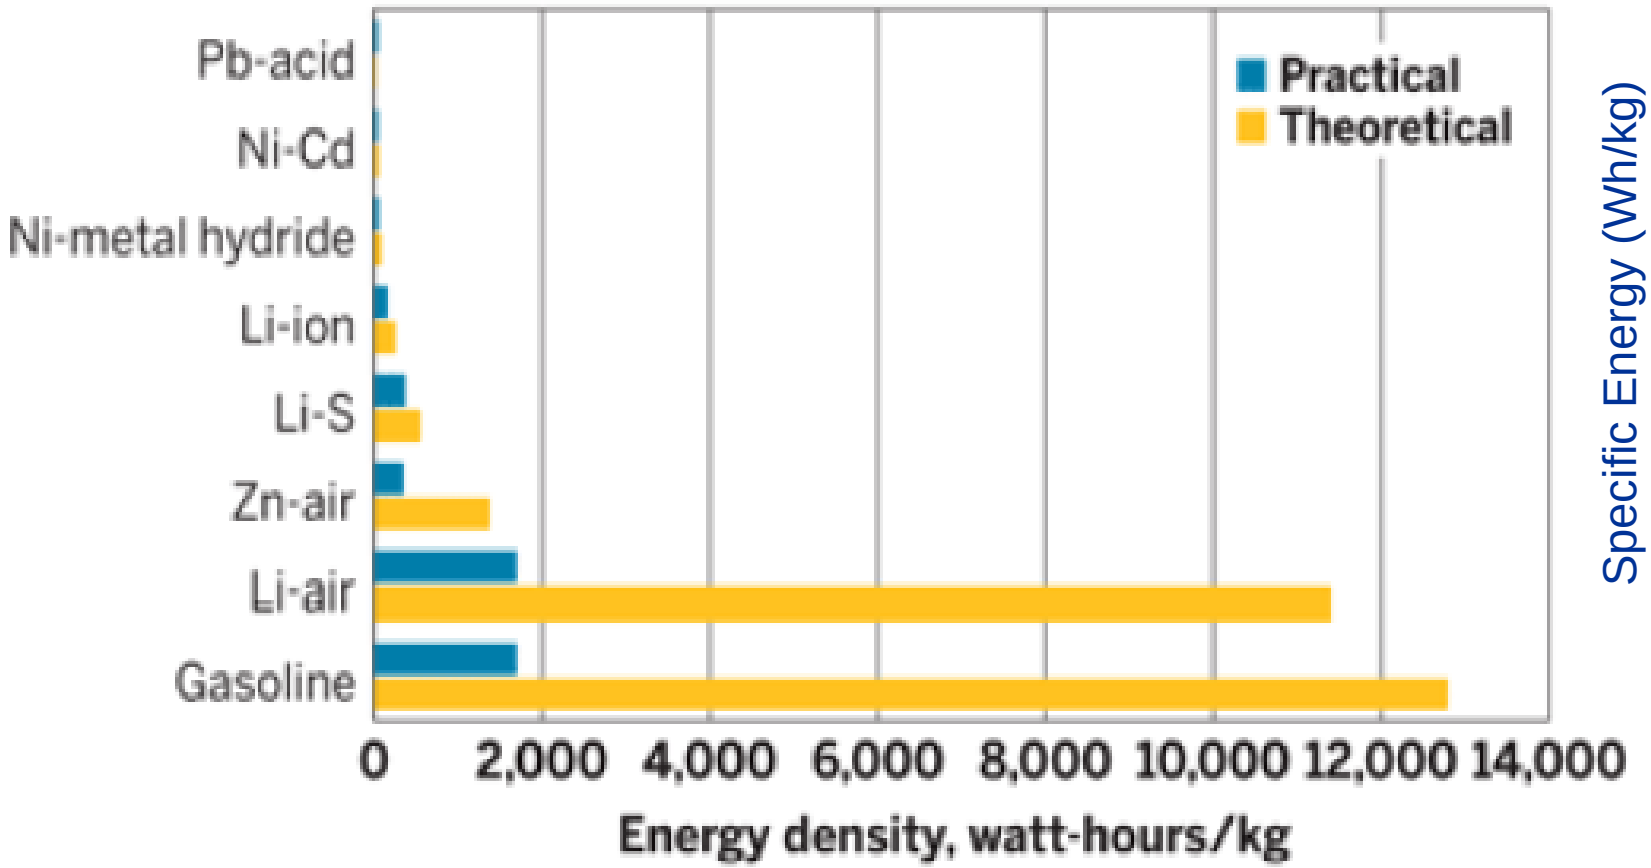

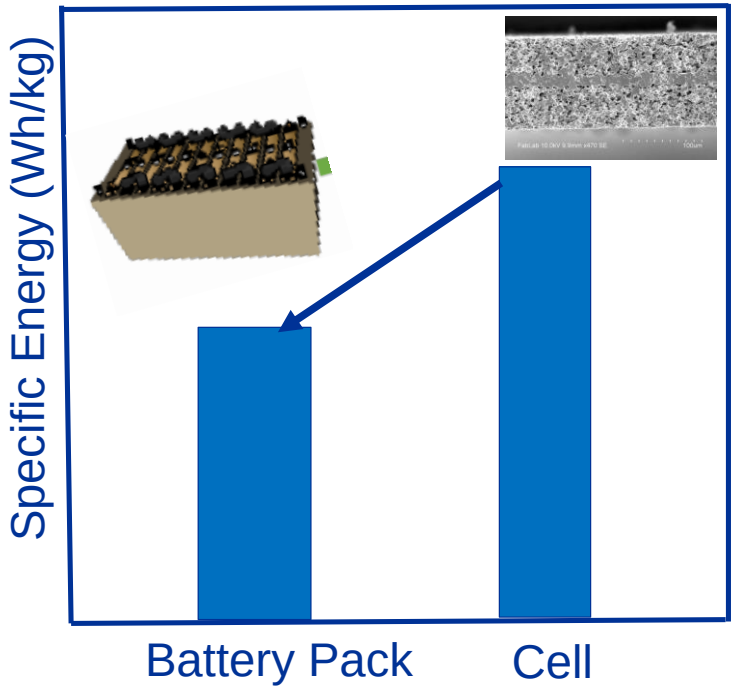

Limits on Useable Specific Energy

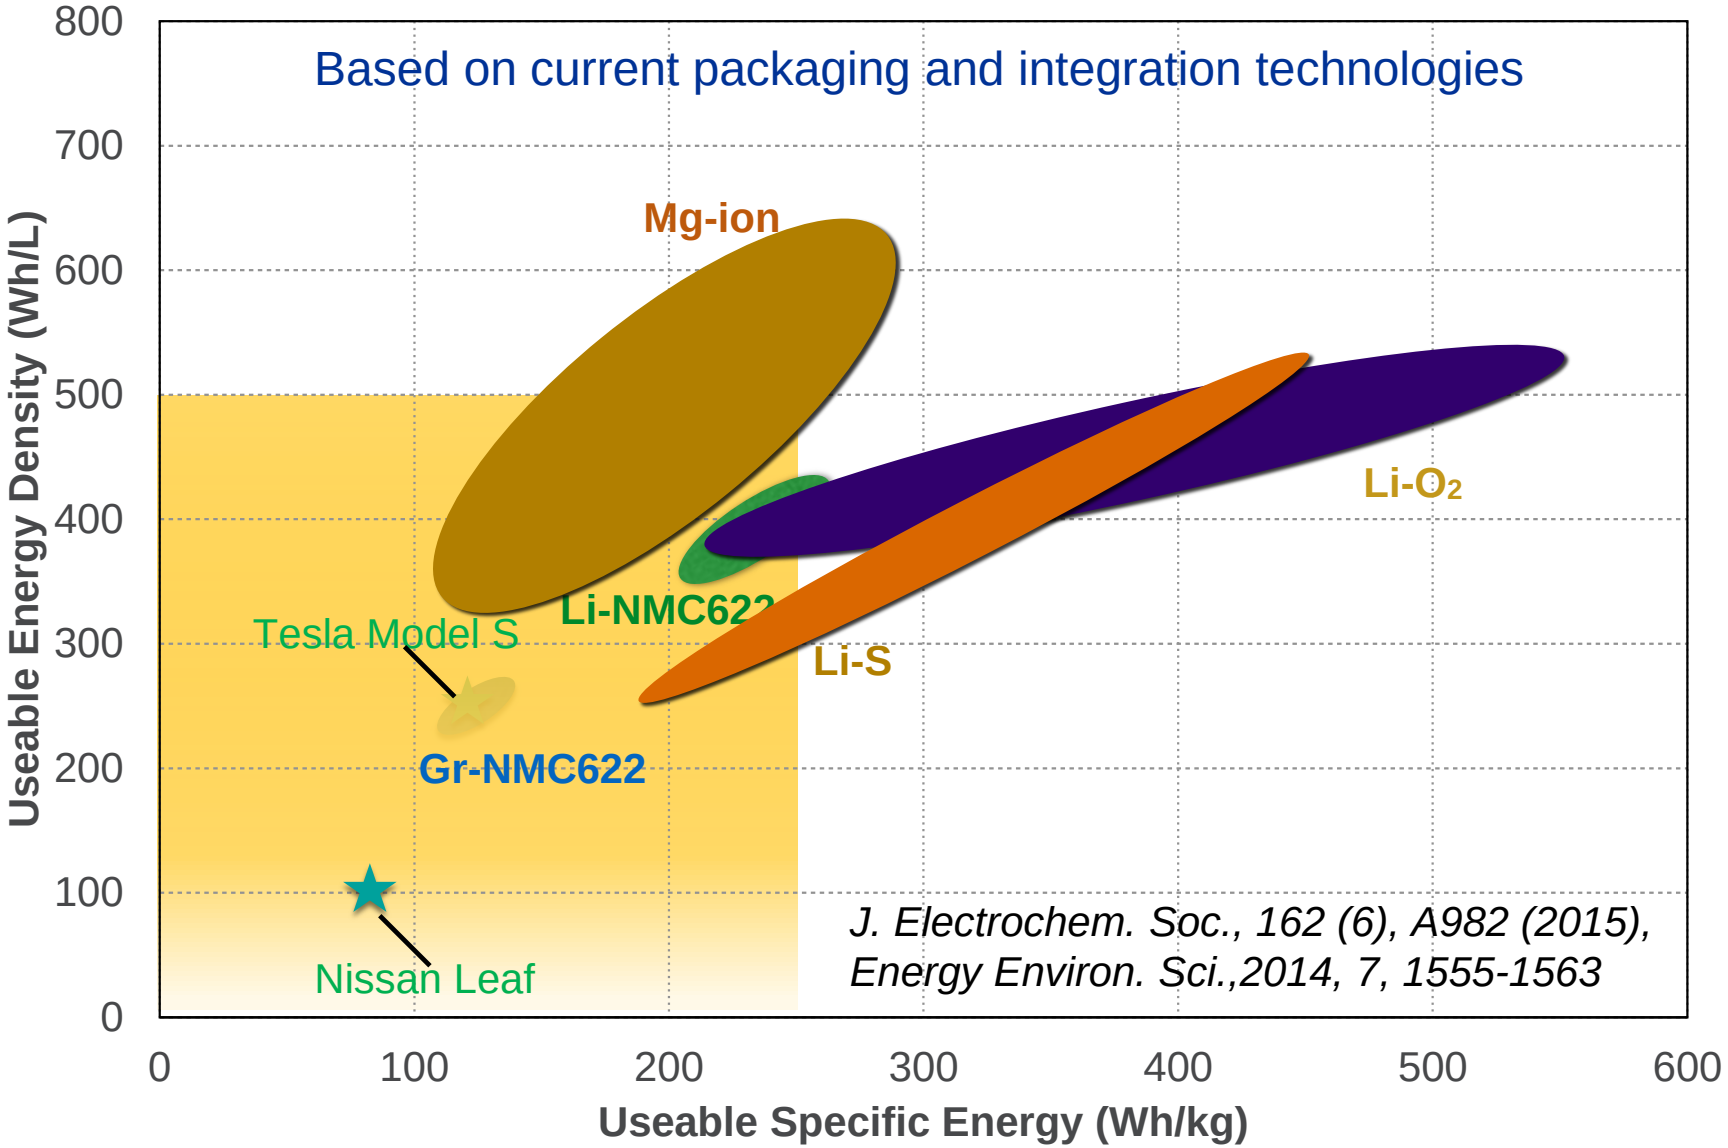

Notional Progression of Battery Capability at Cell Level

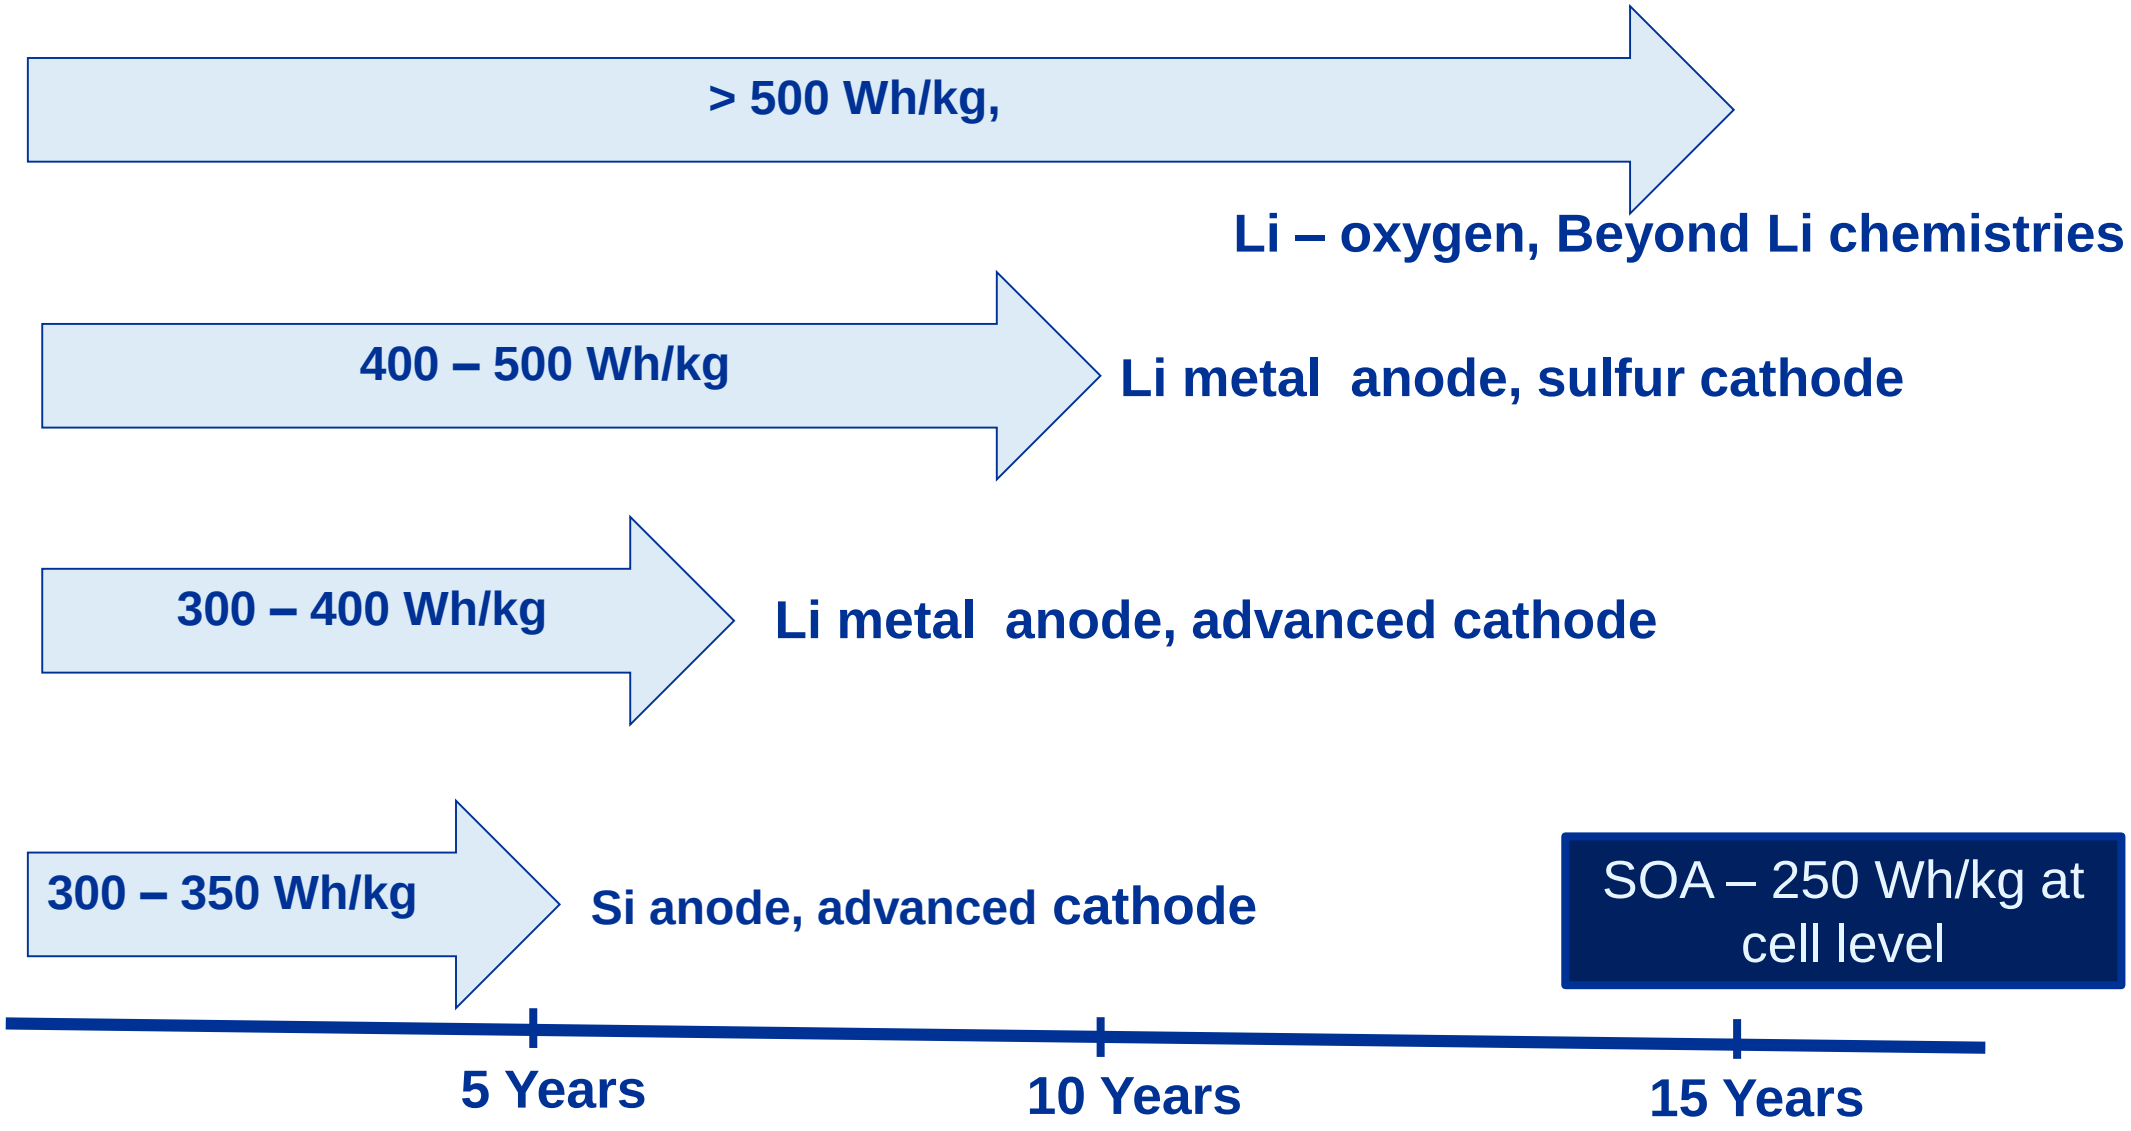

Projected Advances in Battery Technology

Rate of increase in specific energy is typically on the order of 5 – 8% per year
Specific energy loss from cell to pack is typically 50 to 60%

Assuming 8% increase per year at cell level

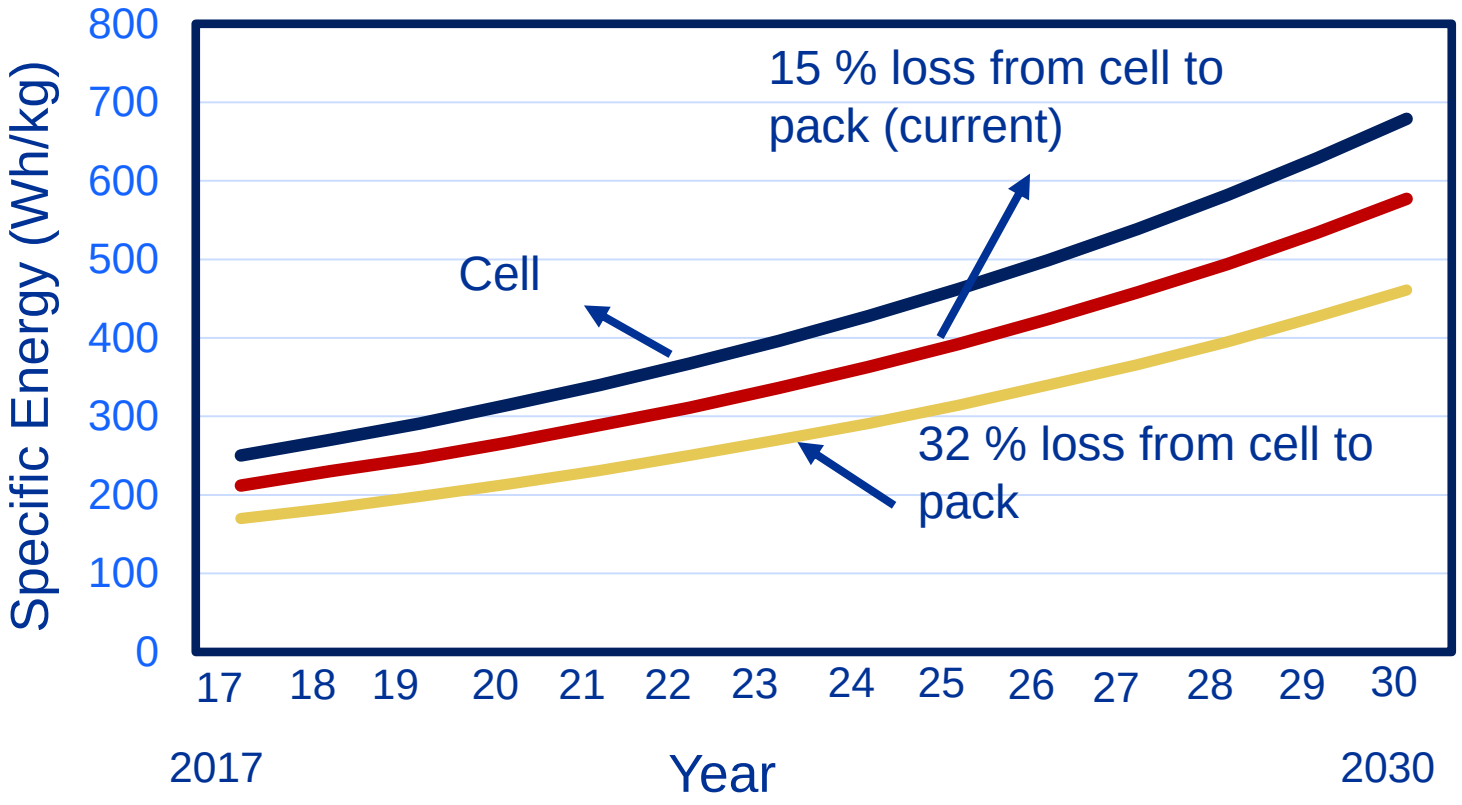

Innovation required in:

- New chemistries and materials for cells
- Pack design and integration

Interdisciplinary Approach for Li – Air Battery Development

NASA Team

ARC Team
Atomic Simulations, Computational Chemistry, Multiphysics Modeling



GRC Team
Development of materials for cathode and electrolyte, Experimental Characterization, Battery Pack Design



AFRC
Electric Aircraft Requirements, Electric UAV Demo

External Partners

CMU
Computational Screening



IBM Almaden
Fundamental Chemistry Synthetic Chemistry



UC Berkeley/LBNL
Characterization Methods



Stanford/SLAC
Adv. Characterization



ARL
Atomistic Simulations



Multifunctional Structures With Energy Storage Capability

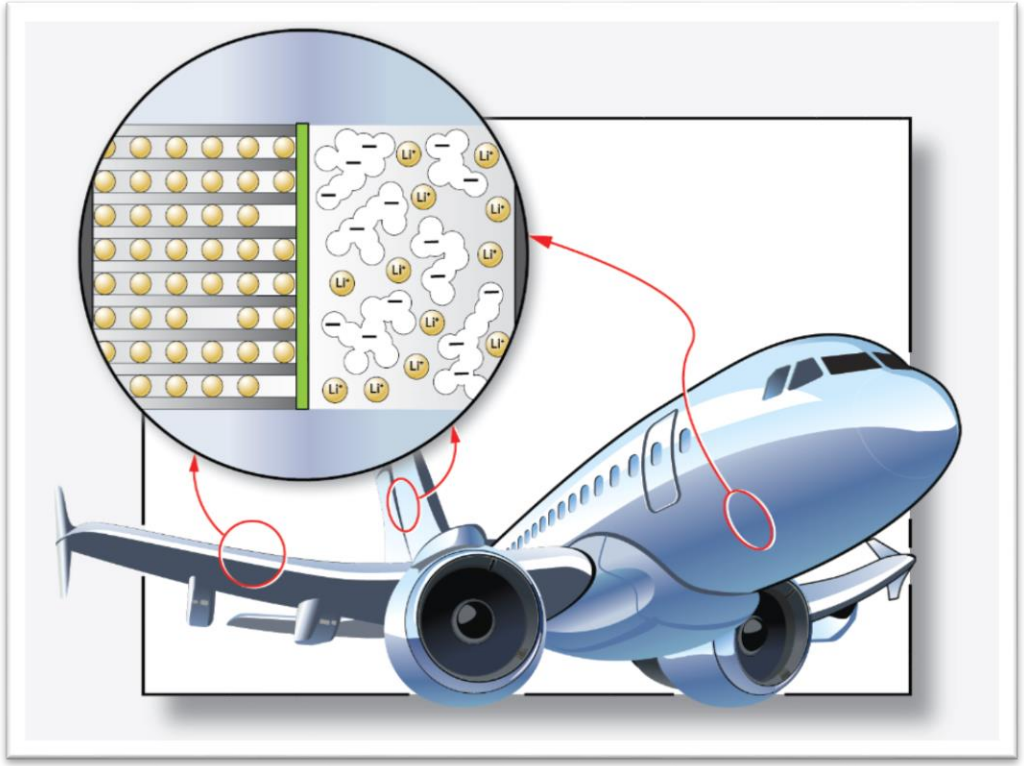

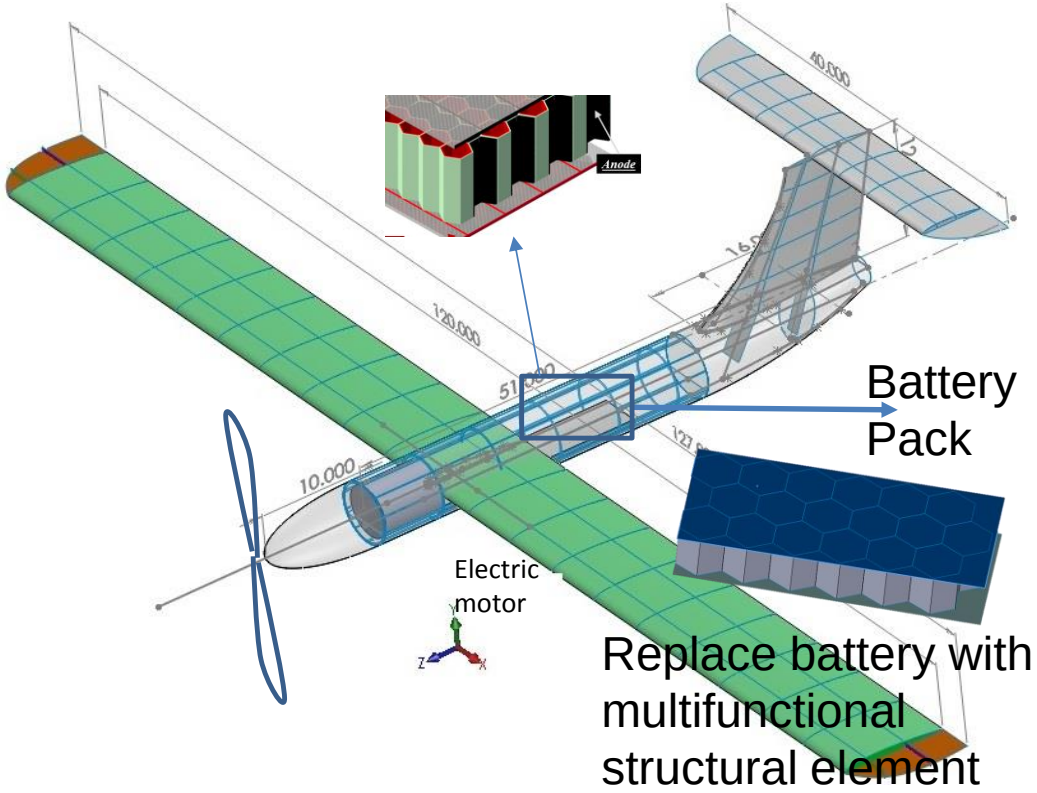

Batteries with some load bearing capability or structure with energy storage capability ????

Technology Options for Increasing Power Density of Non-Cryogenic Electric Motors

- **High conductivity materials (better than Cu)**
- **Insulation materials with higher thermal conductivity**
- **Better magnetic core materials (high permeability and high magnetic strength)**
- **Higher slot fill at windings**
- **Advanced thermal management**
- **Lightweight structures**
- **Higher speed**
- **New topologies based on advanced materials**

Amorphous and Nanocomposite Magnets

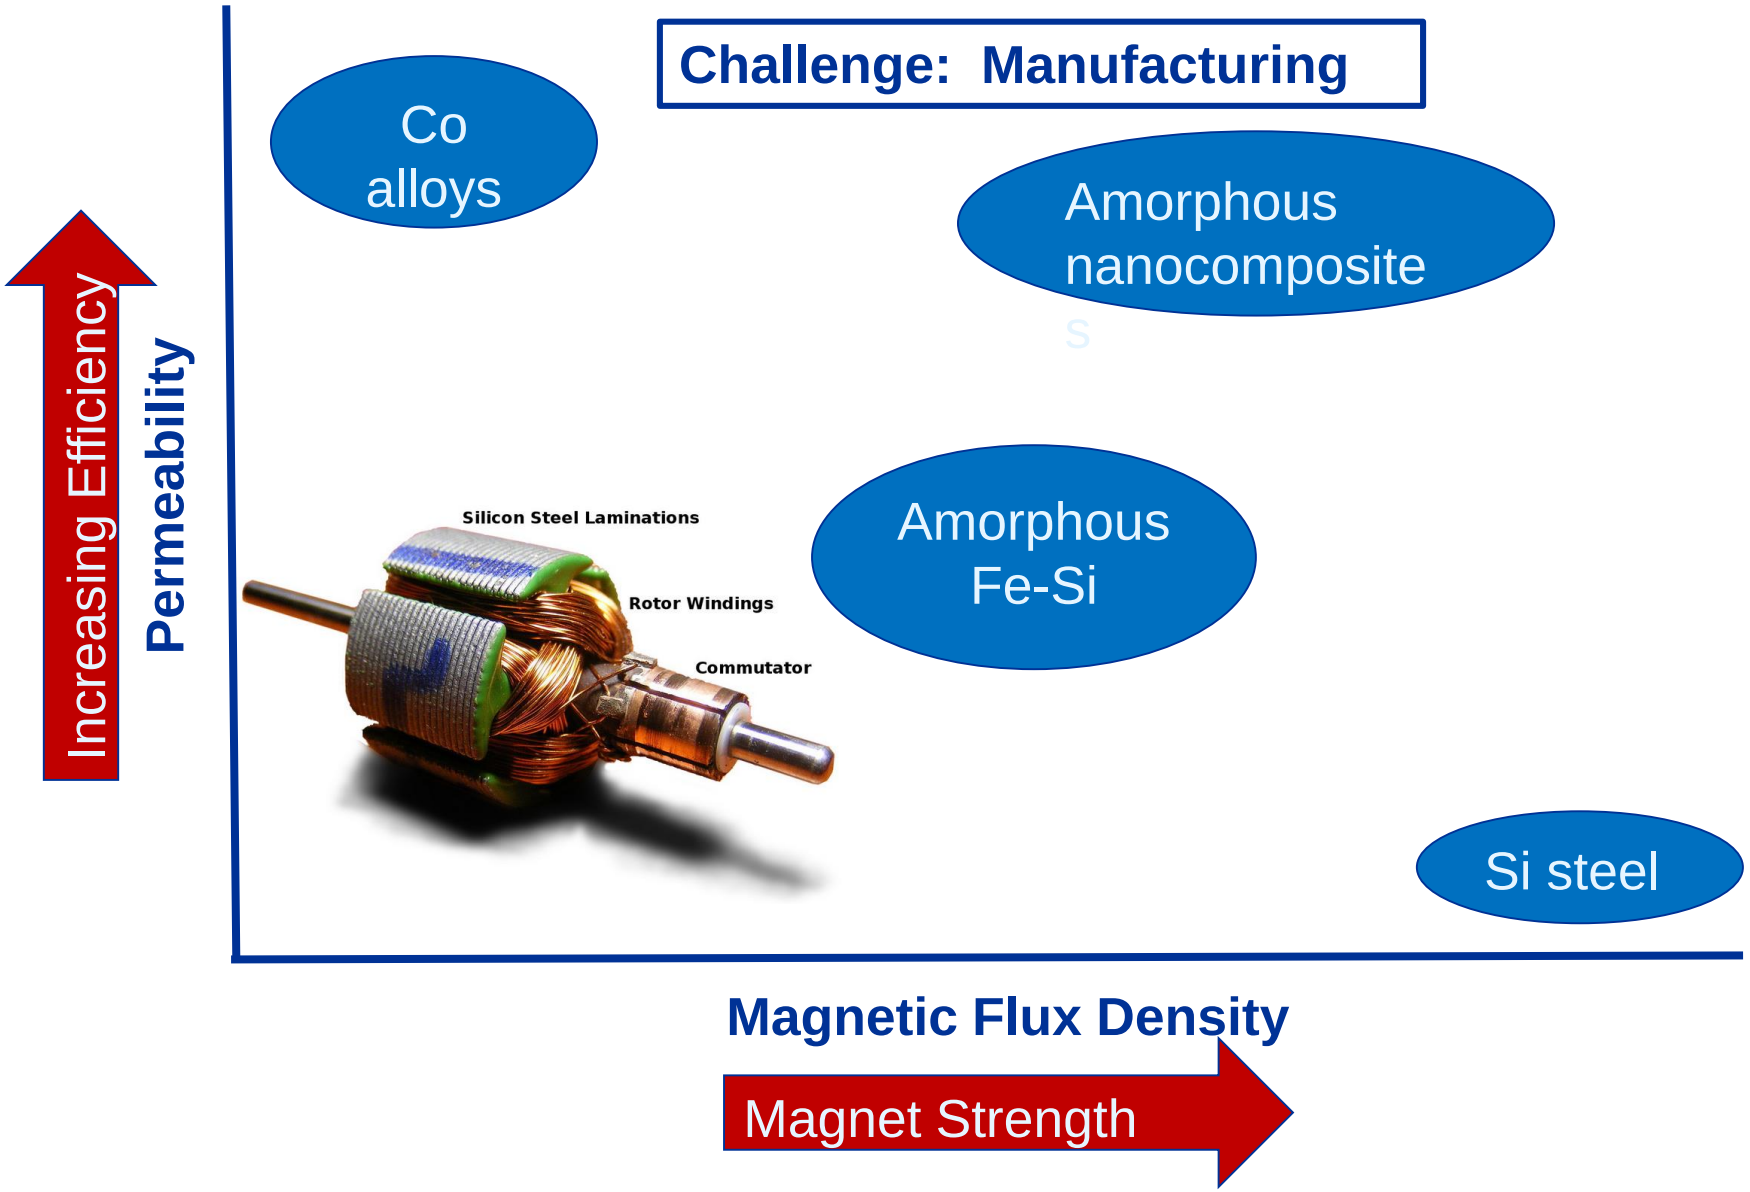

Amorphous and Nanocomposite Magnets:

- **Reduction in core losses – higher frequency operation**
- **Higher rotational speeds**
- **Smaller and lighter motors for the same amount of power**

Fabrication Process Development at NASA GRC for Amorphous Magnetic Materials

Spin Caster

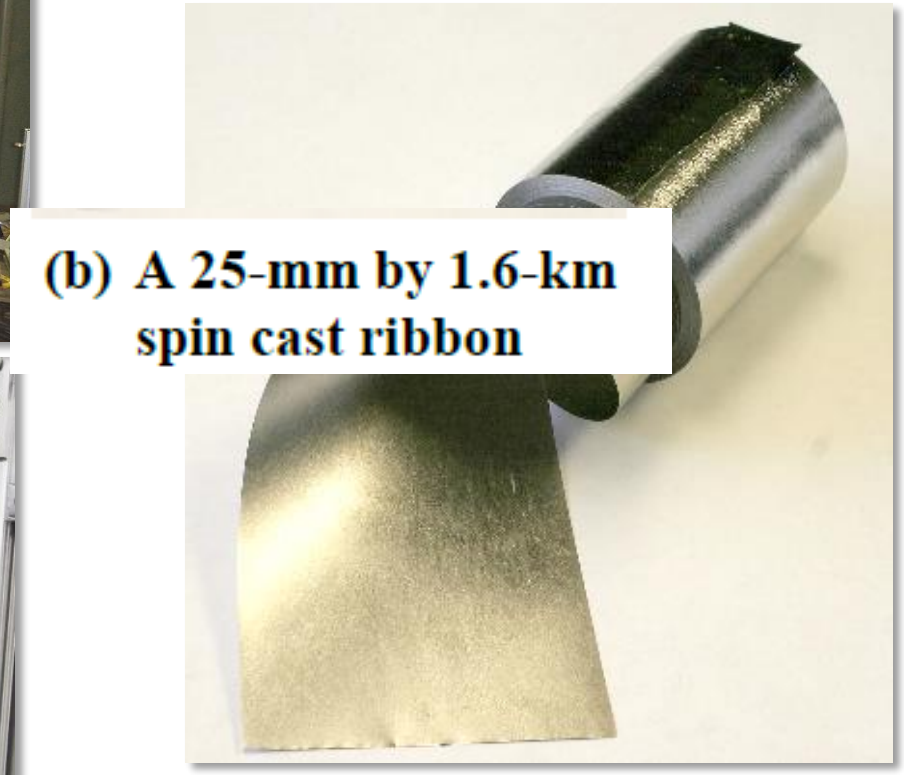

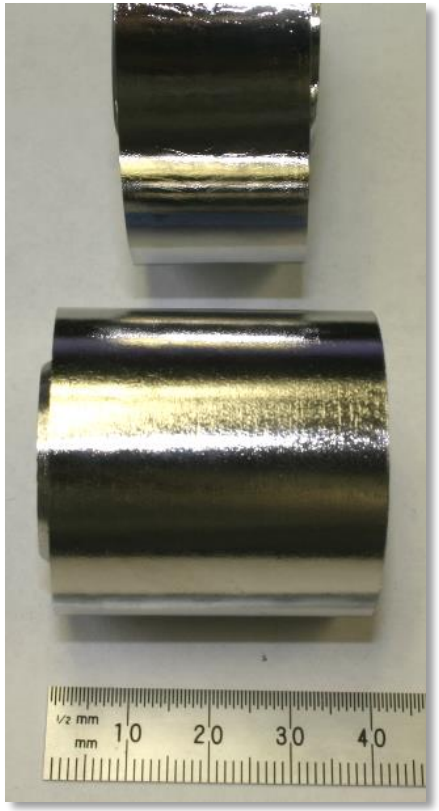

25 mm by 1.6 km Spin Cast Ribbon

Advanced Permanent Magnets

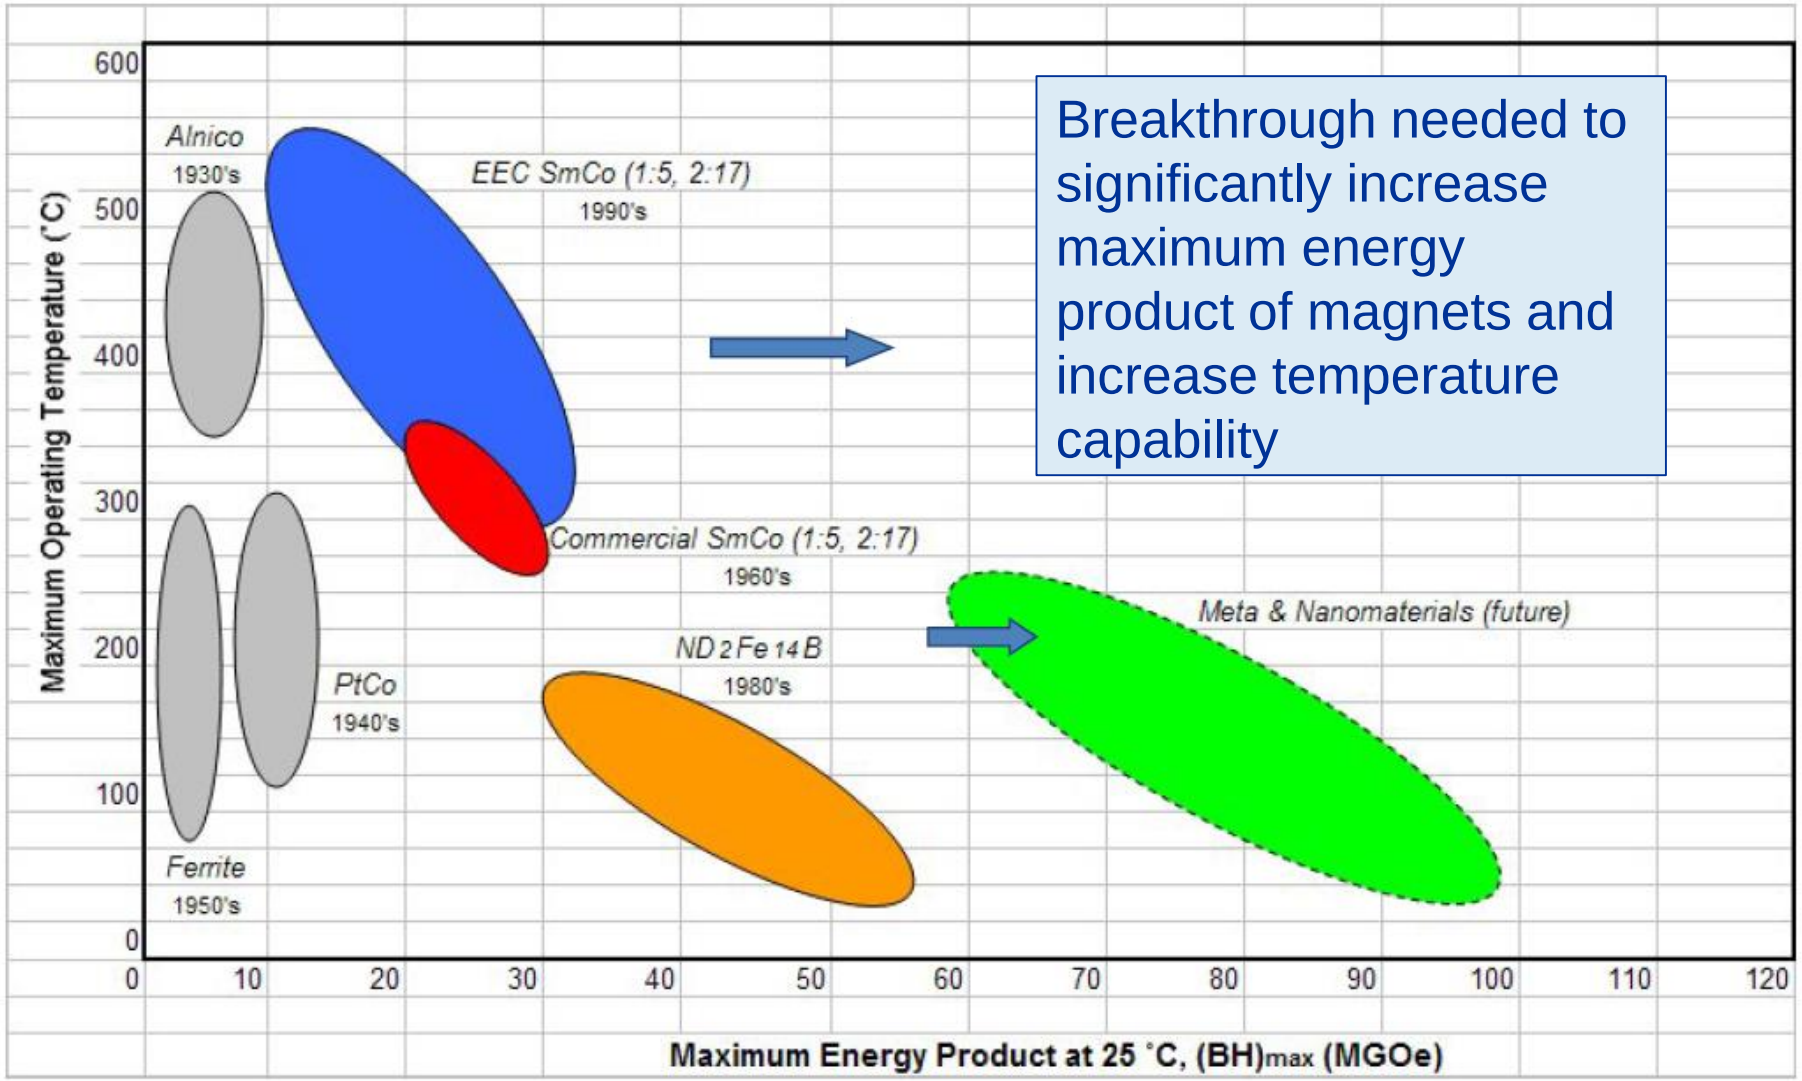

Breakthrough needed to significantly increase maximum energy product of magnets and increase temperature capability

Need computational design of new materials and development of advanced fabrication techniques for nanocomposites

Advanced Insulation System

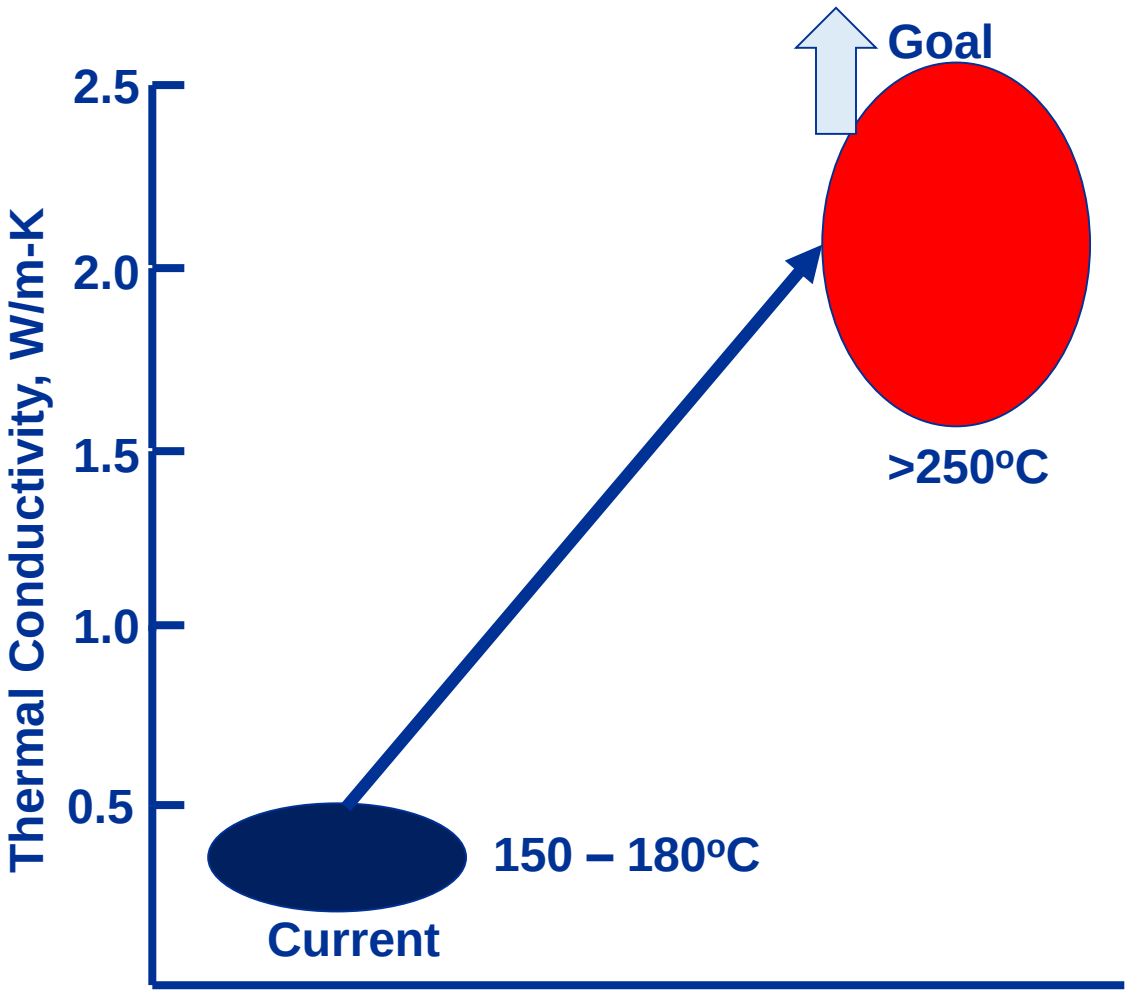

- Combination of low thermal conductivity of insulation and temperature constraints current that can be drawn through conductors
- Thin film insulation with higher thermal conductivity and temperature capability would increase fill factor in slot – more conductor in same space
- High voltage capability for insulation system

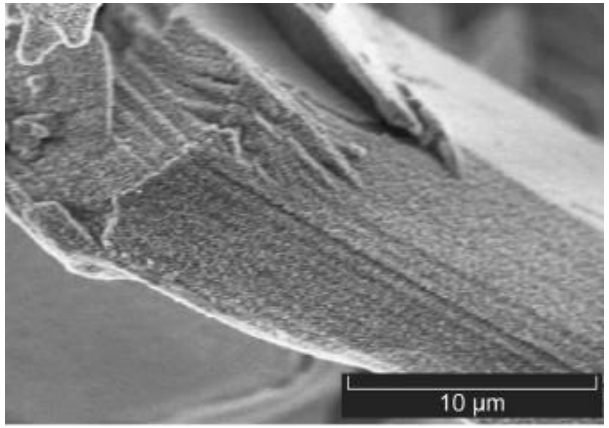

Polymer – boron nitride nanotube (BNNT) composite development

BNNT – Electrically insulating, high thermal conductivity

Potential for Carbon Nanotube Conductors

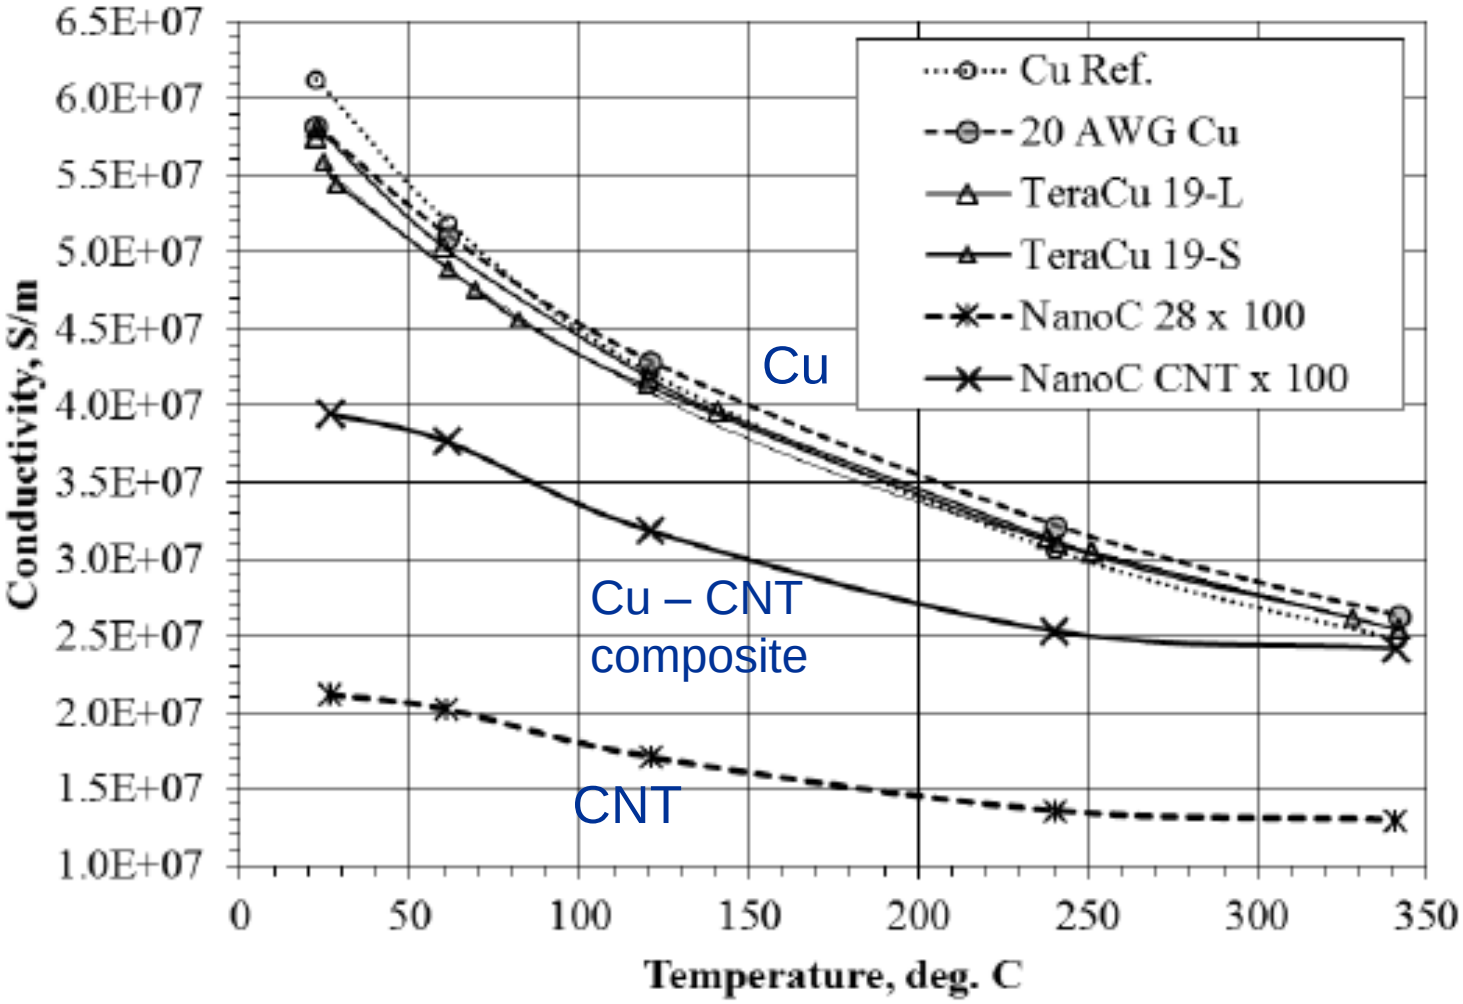

Theoretical electrical conductivity of Carbon nanotube (CNT) higher than Cu, but significant processing challenges remain to separate non-metallic from metallic

Superconducting Motor

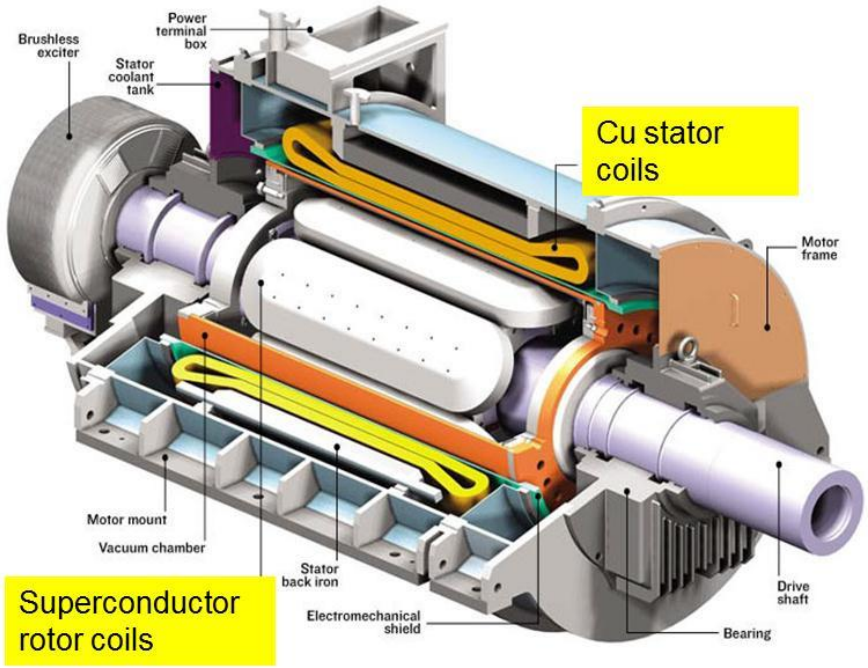

- The state-of-the-art superconducting motor is limited to application of superconducting materials in rotor coils only
- Application of superconducting material in stator coils is limited by high ac losses

Design of Fully Superconducting Motor

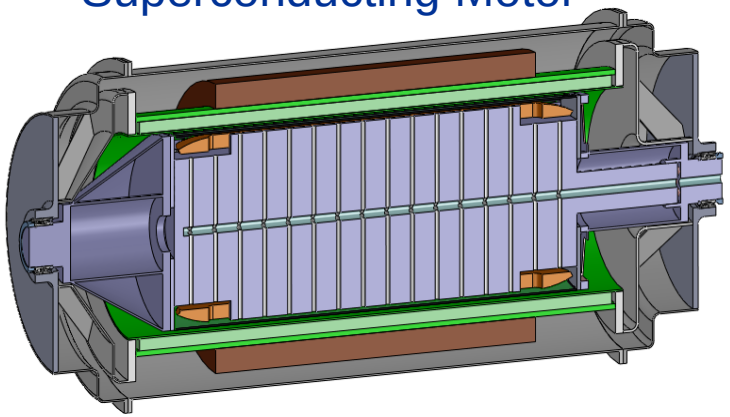

CROSS SECTION OF FULLY SUPERCONDUCTING MACHINE

MgB_2 superconducting composite wire: 216 20μm filaments

Small diameter superconducting filament development to reduce ac losses

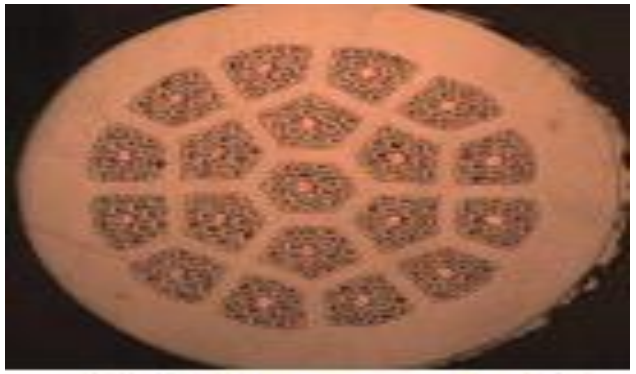

342 filaments @ 0.84 mm diam.

Notional Timeline for Increase in Motor Power Density

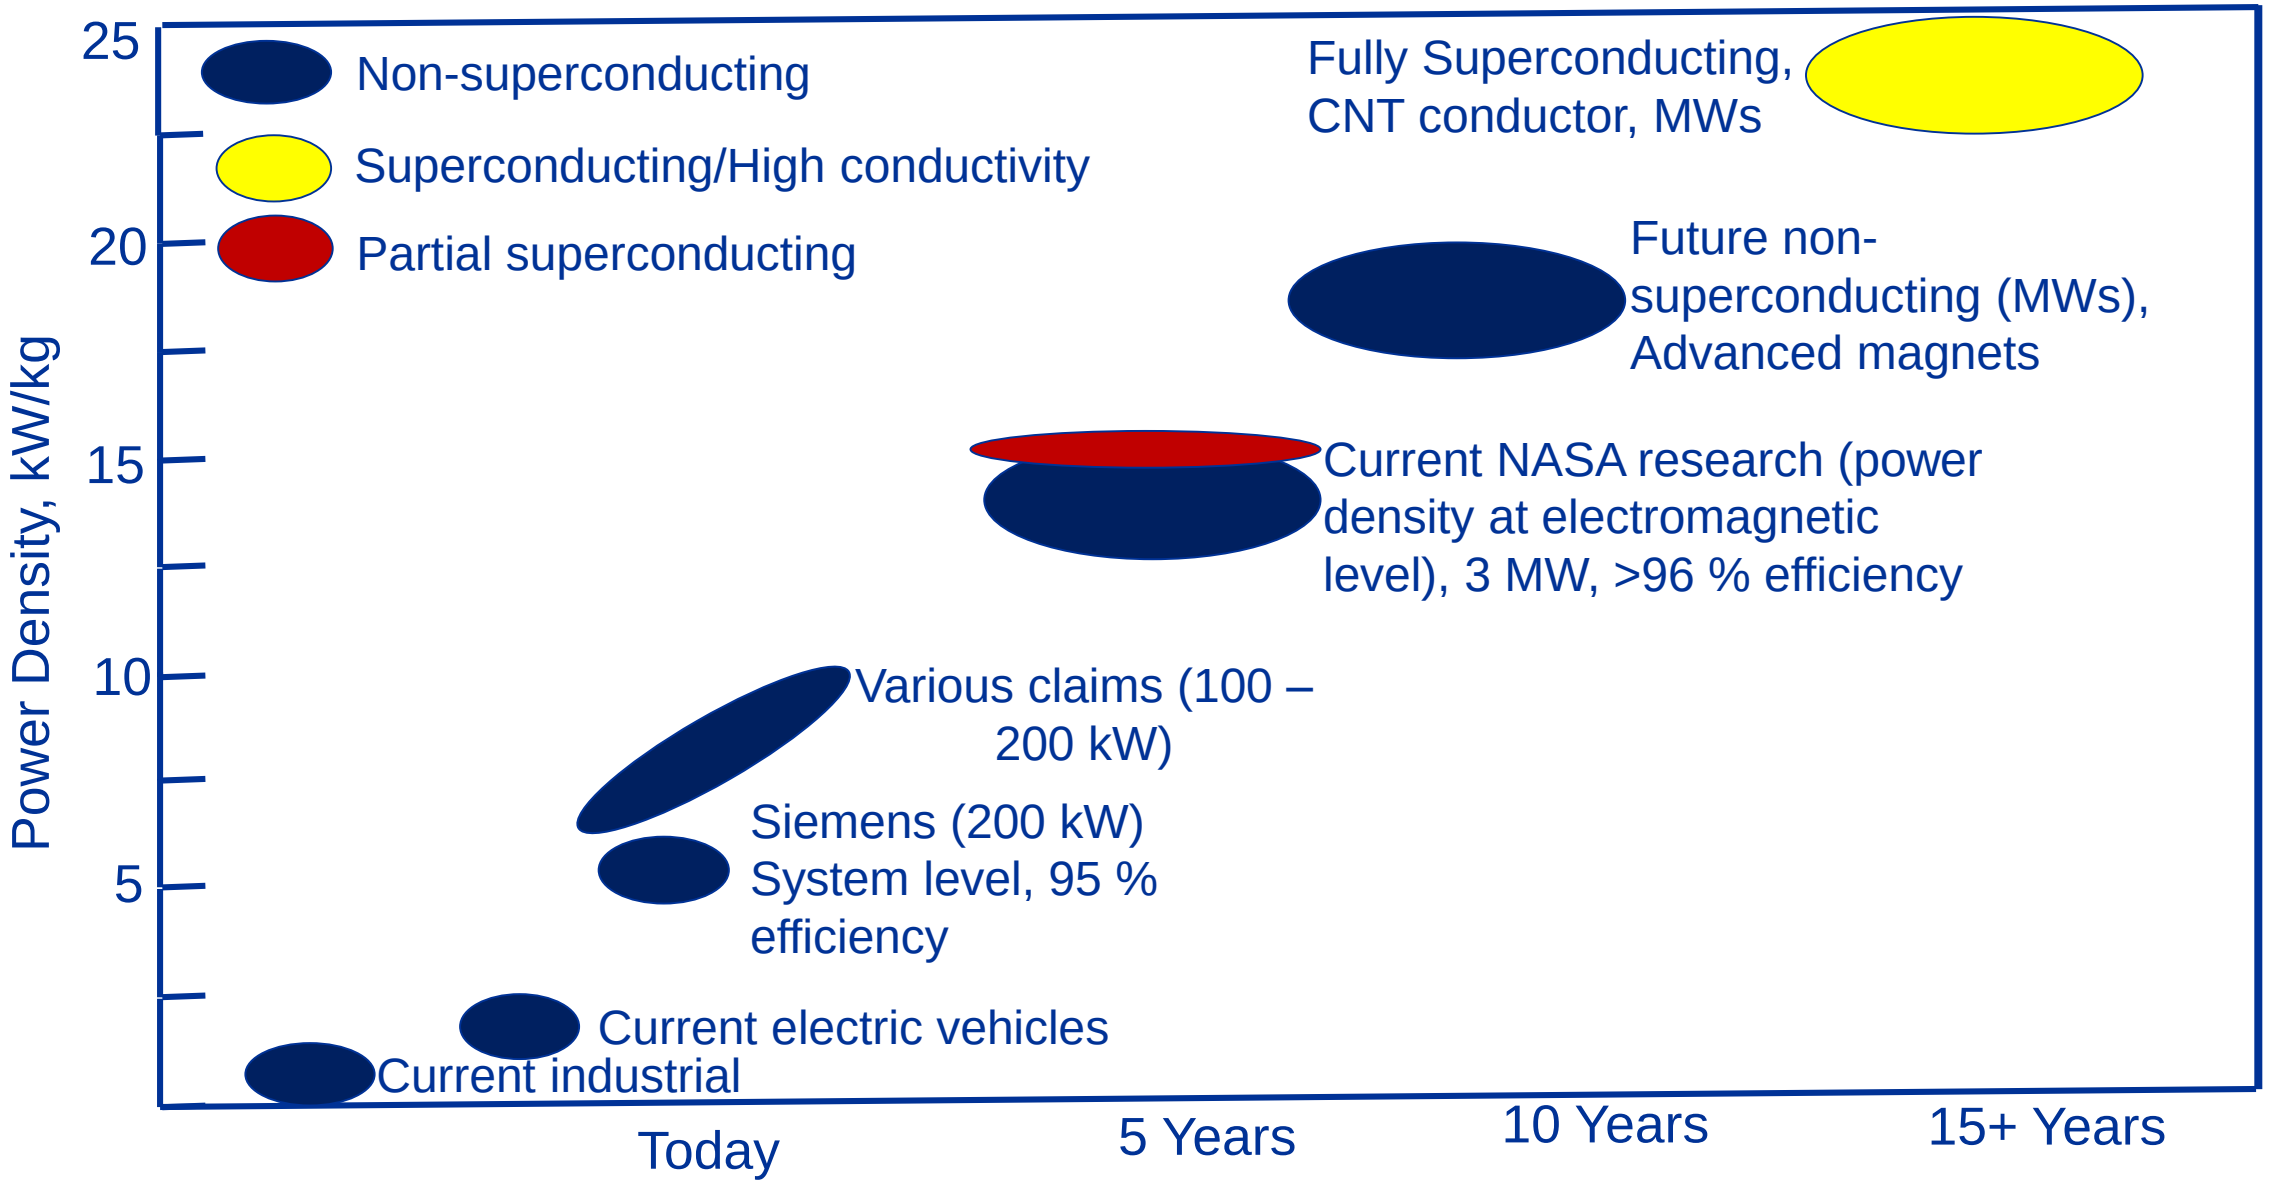

High Power Density Power Converters

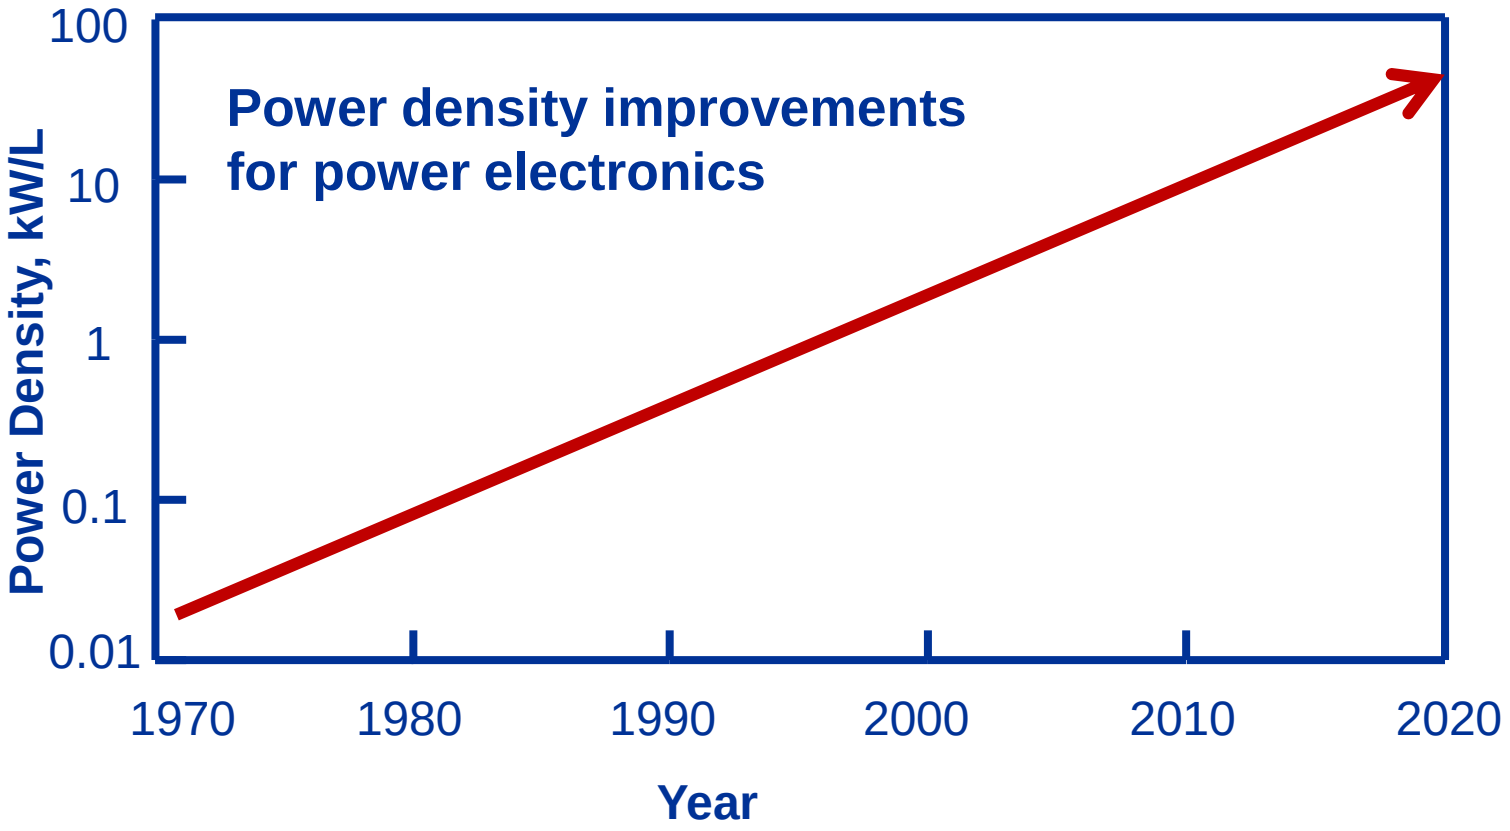

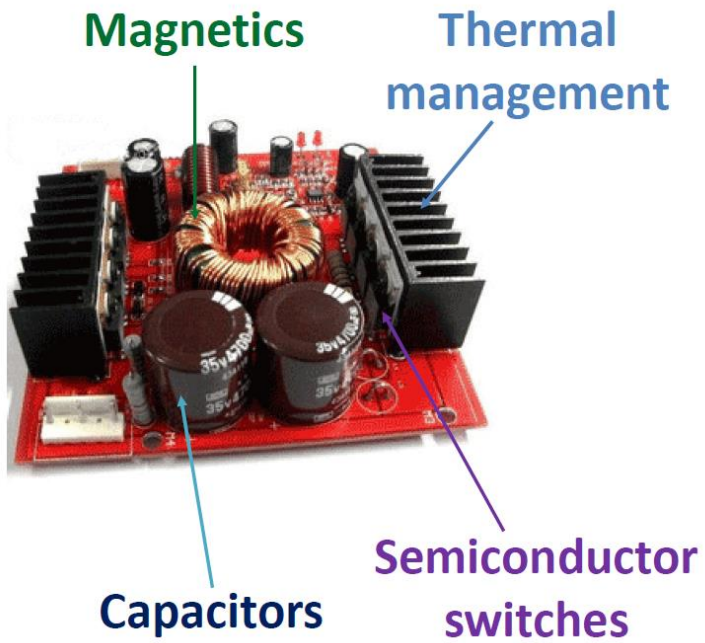

Wide bandgap semiconductor (SiC and GaN) devices enable:

- Higher frequency operation (on the order of MHz) that reduces energy storage requirements for passives (inductors and capacitors)
- Smaller passives – reduced volume and weight
- Higher temperature operation – better thermal management

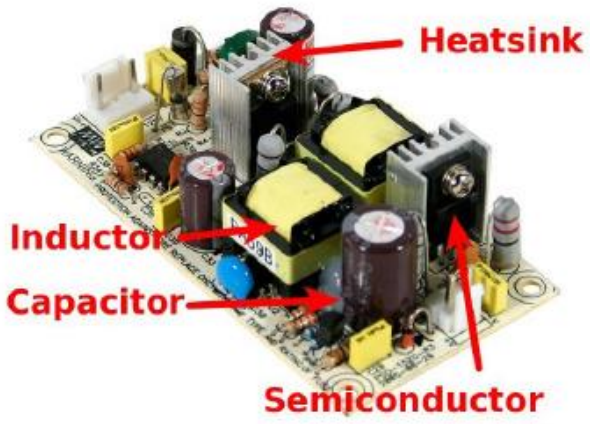

Current NASA-Funded Research on High Power Density Power Converters

	Continuous power rating, MW	Specific power goal, kW/kg	Efficiency goal, %	Topology	Switch material	Cooling
General Electric	1	19	99	3 level	SiC/Si	Liquid
University of Illinois	0.2	19	99	7 level	GaN	Liquid
Boeing	1	26	99.3		Si	Cryogenic

GE – 1 MW Inverter

University of Illinois – 200 kW Inverter

Development of Amorphous Magnetic Materials for High Frequency Inductors and Transformers

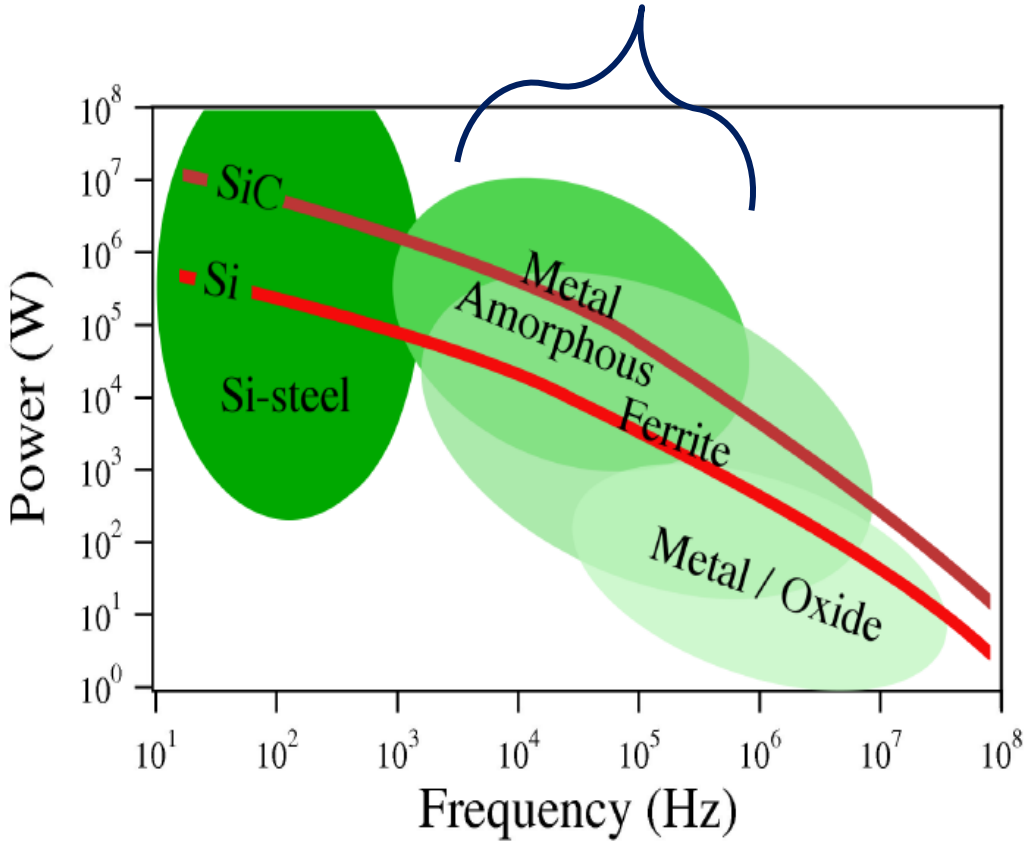

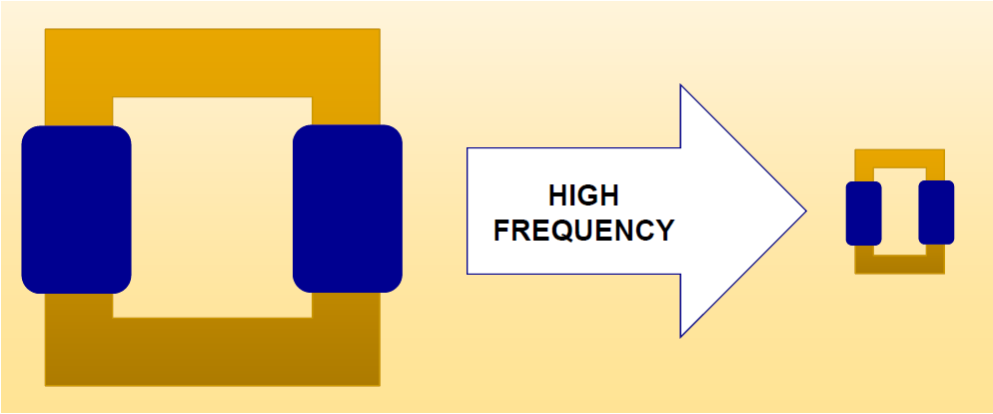

Cast ribbon

Strain annealing

Coated transformer core

Enablers for Increasing Power Density of Power Converters Based on Wide Bandgap Devices

- High temperature packaging technology for SiC-based devices – durability at high temperature is key
- Higher switching frequency enabled by wide bandgap semiconductor devices (SiC and GaN) - reducing the size of passives (inductors, transformers, and capacitors)
- Advanced magnetic materials with capability for high frequency operation
- Full use of high frequency feature of SiC devices require thin film capacitor with high current carrying capability at high temperature
- Passives and EMI will be enabler for increasing power density
- Innovative topology enabled by advances passives and high switching frequency

Progression of All Electric and Hybrid Electric Aircraft Limited by Advances in Battery Technology

Notional timeline based on optimistic projections

All Electric

2-3 passenger , 200 miles, CTOL

2-3 passenger VTOL, 100 miles

4 passenger VTOL, 60 miles

30 passenger 300 miles, CTOL

4 passenger VTOL, 100-120 miles

Today	2022	2025	2028	2031	???	???	???	Timeline
150-170 Wh/kg	300 Wh/kg	400 Wh/kg	500 Wh/kg	600 Wh/kg	700 Wh/kg	800 Wh/kg	1000 Wh/kg	Pack Level Wh/kg

2-3 passenger , 400 + miles

10 - 20 passenger 300 miles

20 – 30 passenger > 400 miles

50-70 passenger 800 miles

Light utility helicopter

50-70 passenger 1000 miles

Single aisle 737 class

Hybrid Electric CTOL

Enabling Technologies for All Electric and Hybrid Electric Aircraft

- High specific energy battery technologies for cell and battery pack
- Advanced magnets
- High-conductivity electrical conductors
- Advanced capacitors
- Advanced insulation system