

General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

5101-214
Flat-Plate
Solar Array Project

DOE/JPL-1012-75
Distribution Category UC-63b


(NASA-CR-169431) USER HANDBOOK FOR BLOCK IV
SILICON SOLAR CELL MODULES (Jet Propulsion
Lab.) 63 p HC A04/MF A01 CSCL 10A

N83-10552

G3/44 Unclas
35522

User Handbook for Block IV Silicon Solar Cell Modules

✓ M.I. Smokler



September 1, 1982

Prepared for:
U.S. Department of Energy
Through an Agreement with
National Aeronautics and Space Administration
by
Jet Propulsion Laboratory
California Institute of Technology
Pasadena, California

(JPL PUBLICATION 82-73)

5101-214
Flat-Plate
Solar Array Project

DOE/JPL-1012-75
Distribution Category UC-63b

User Handbook for Block IV Silicon Solar Cell Modules

M.I. Smokler

September 1, 1982

Prepared for
U.S. Department of Energy
Through an Agreement with
National Aeronautics and Space Administration
by
Jet Propulsion Laboratory
California Institute of Technology
Pasadena, California

(JPL PUBLICATION 82-73)

Prepared by the Jet Propulsion Laboratory, California Institute of Technology,
for the U.S. Department of Energy through an agreement with the National
Aeronautics and Space Administration.

The JPL Flat-Plate Solar Array Project is sponsored by the U.S. Department of
Energy and is part of the Photovoltaic Energy Systems Program to initiate a
major effort toward the development of cost-competitive solar arrays.

This report was prepared as an account of work sponsored by an agency of the
United States Government. Neither the United States Government nor any
agency thereof, nor any of their employees, makes any warranty, express or
implied, or assumes any legal liability or responsibility for the accuracy, com-
pleteness, or usefulness of any information, apparatus, product, or process
disclosed, or represents that its use would not infringe privately owned rights.

Reference herein to any specific commercial product, process, or service by trade
name, trademark, manufacturer, or otherwise, does not necessarily constitute or
imply its endorsement, recommendation, or favoring by the United States
Government or any agency thereof. The views and opinions of authors
expressed herein do not necessarily state or reflect those of the United States
Government or any agency thereof.

This publication reports on work done under NASA Task RD-152, Amendment
66, DOE/NASA IAA No. DE-AC01-76ET20356.

ABSTRACT

The essential electrical and mechanical characteristics of Block IV photovoltaic solar-cell modules that have been tested by JPL are described. Such module characteristics as power output, nominal operating voltage, current-voltage characteristics, nominal operating cell temperature, and dimensions are tabulated. The limits of the environmental and other stress tests to which the modules are subjected are briefly described. Potential users of modules will find this listing helpful in selecting modules for use in arrays or alone.

CONTENTS

| | | |
|-----|------------------------------|----|
| I. | INTRODUCTION | 1 |
| II. | MODULE DESCRIPTIONS. | 5 |
| | REFERENCES | 35 |

APPENDIXES

| | | |
|----|--------------------------------------|-----|
| A. | MISCELLANEOUS MODULES | A-1 |
| B. | QUALIFICATION TEST PROGRAM | B-1 |

Figures

| | | |
|-----|---|----|
| 1. | Block IV Modules at JPL Field Test Site | 3 |
| 2. | ARCO Solar Module: Photographic Views | 9 |
| 3. | ARCO Solar Module: Drawing | 10 |
| 4. | ARCO Solar Module: I-V Curves | 11 |
| 5. | ASEC Module: Photographic Views | 12 |
| 6. | ASEC Module: Drawing | 13 |
| 7. | ASEC Module: I-V Curves | 14 |
| 8. | GE Module (Residential): Photographic Views | 15 |
| 9. | GE Module (Residential): Drawing | 16 |
| 10. | GE Module (Residential): Installation | 17 |
| 11. | GE Module (Residential): I-V Curves | 18 |
| 12. | Motorola Module: Photographic Views | 19 |
| 13. | Motorola Module: Drawing | 20 |
| 14. | Motorola Module: I-V Curves | 21 |
| 15. | Photowatt Module: Photographic Views | 22 |
| 16. | Photowatt Module: Drawing | 23 |

PRECEDING PAGE BLANK NOT FILMED

| | | |
|-------|---|------|
| 17. | Photowatt Module: I-V Curves | 24 |
| 18. | Solarex Module: Photographic Views. | 25 |
| 19. | Solarex Module: Drawing | 26 |
| 20. | Solarex Module: I-V Curves | 27 |
| 21. | Solarex Module (Residential): Photographic Views | 28 |
| 22. | Solarex Module (Residential) Drawing | 29 |
| 23. | Solarex Module (Residential): Installation | 30 |
| 24. | Solarex Module (Residential): I-V Curves | 31 |
| 25. | Spire Module: Photographic Views | 32 |
| 26. | Spire Module: Drawing | 33 |
| 27. | Spire Module: I-V Curves | 34 |
| A-1. | ARCO Solar Module (Residential): Photographic Views | A-4 |
| A-2. | ARCO Solar Module (Residential): Drawing | A-5 |
| A-3. | ARCO Solar Module (Residential): Installation | A-6 |
| A-4. | ARCO Solar Module (Residential): I-V Curves | A-7 |
| A-5. | GE Module (Residential): Photographic Views | A-8 |
| A-6. | GE Module (Residential): Drawing | A-9 |
| A-7. | GE Module (Residential): Installation | A-10 |
| A-8. | GE Module (Residential): I-V Curves | A-11 |
| A-9. | Solar Power Module: Photographic Views | A-12 |
| A-10. | Solar Power Module: Drawing | A-13 |
| A-11. | Solar Power Module: I-V Curves | A-14 |
| A-12. | Solenergy Module: Photographic Views | A-15 |
| A-13. | Solenergy Module: Drawing | A-16 |
| A-14. | Solenergy Module: I-V Curves | A-17 |
| B-1. | Qualification Test Sequence | B-2 |
| B-2. | Humidity Cycle Regime | B-4 |

Tables

| | | |
|------|--|-----|
| 1. | Block IV Module Characteristics | 7 |
| A-1. | Miscellaneous Module Characteristics | A-2 |

SECTION I

INTRODUCTION

The program of the Jet Propulsion Laboratory (JPL) Flat-Plate Solar Array Project (FSA) has included a series of competitive procurements, designated Block I through Block IV, of various quantities of solar cell modules. The objectives of this procurement effort were to stimulate reduction in manufacturing cost by encouraging technology advances and to provide modules for field testing of solar-cell arrays.

Block I included the purchase from five contractors of a quantity of modules having a total power output of approximately 58 kW. These modules were procured to the contractors' specifications as a means of ascertaining the state of the art of terrestrial solar cell modules and of providing modules for early test and applications programs.

Block II, consisting of the purchase of 123 kW of total power capacity from four contractors, introduced a degree of standardization by defining the module design specifications (JPL Document No. 5-342-1, Rev. B) and by providing for a design qualification test program. The Block II modules are described in Reference 1.

Block III consisted of procurement of a 205 kW of total power capacity from five contractors. The design specifications (JPL Document No. 5-342-1, Rev. C) and the qualification test program were essentially the same as those for Block II. The Block III modules are described in Reference 2.

Block IV varied from the prior procurements in that: the design specifications and the qualification tests were more stringent; the procurement allowed proposals from each contractor for either or both of two categories of module, intermediate-load and residential; and the procurement was effected in the form of sequential development and production contracts. Intermediate-load modules, defined in Reference 3, are intended for use in installations providing 20 kW to 500 kW. Typical applications would be power-generating stations for office buildings, apartment complexes, water pumping installations, shopping centers, and small industrial complexes. Residential modules, defined in Reference 4, are intended for rooftop installation on a single-family residence to provide 2 to 10 kW.

Each successful Block IV proposer was awarded a contract for development of about one kW of modules. For each design that completed qualification tests successfully, a subsequent production contract for 1 to 4 kW was issued. The total nominal purchased power from the seven contractors whose modules passed the tests is 32 kW, including development and production modules. The contractors are ARCO Solar, Inc.; Applied Solar Energy Corp. (ASEC); General Electric Co. (GE); Motorola Inc.; Photowatt International, Inc.; Solarex Corp., and Spire Corp. Eight designs are included, of which six are intermediate-load and two are residential. The descriptions of these designs is the content of this handbook.

During the period of the Block IV procurement, modules of four other designs were purchased by JPL, either as part of the Block IV procurement or separately, in the latter case for the purpose of subjecting them to the complete set of Block IV qualification tests. These modules are described in Appendix A. At this time not all of them have completed the qualification tests. The four designs were submitted by ARCO Solar, GE, Solar Power Corp. and Solenergy Corp.

Figure 1, a view of part of the FSA field-test site at JPL, shows some of the Block IV modules assembled for obtaining field-test data in system configurations.

The purpose of this User Handbook is to supply engineering data for planning or investigating the application of Block IV modules. The user is advised of two cautionary statements: first, omission from this document of any solar-cell module does not imply that that module design does not meet the requirements of the Block IV specifications contained in References 3 and 4; second, in conformance with the Block IV specifications, module performance data at Nominal Operating Cell Temperature (NOCT) is based on NOCT values obtained at 100 mW/cm^2 insolation. However, as current practice is to obtain NOCT values at 80 mW/cm^2 , both values of NOCT are listed for each module. Anyone requiring additional technical information should direct his request to the author, Melvin I. Smokler, or to L. Daniel Runkle, FSA Module Performance and Failure Analysis Area Manager, at the Jet Propulsion Laboratory, 4800 Oak Grove Drive, Pasadena, California 91109.

ORIGINAL PAGE
BLACK AND WHITE PHOTOGRAPH

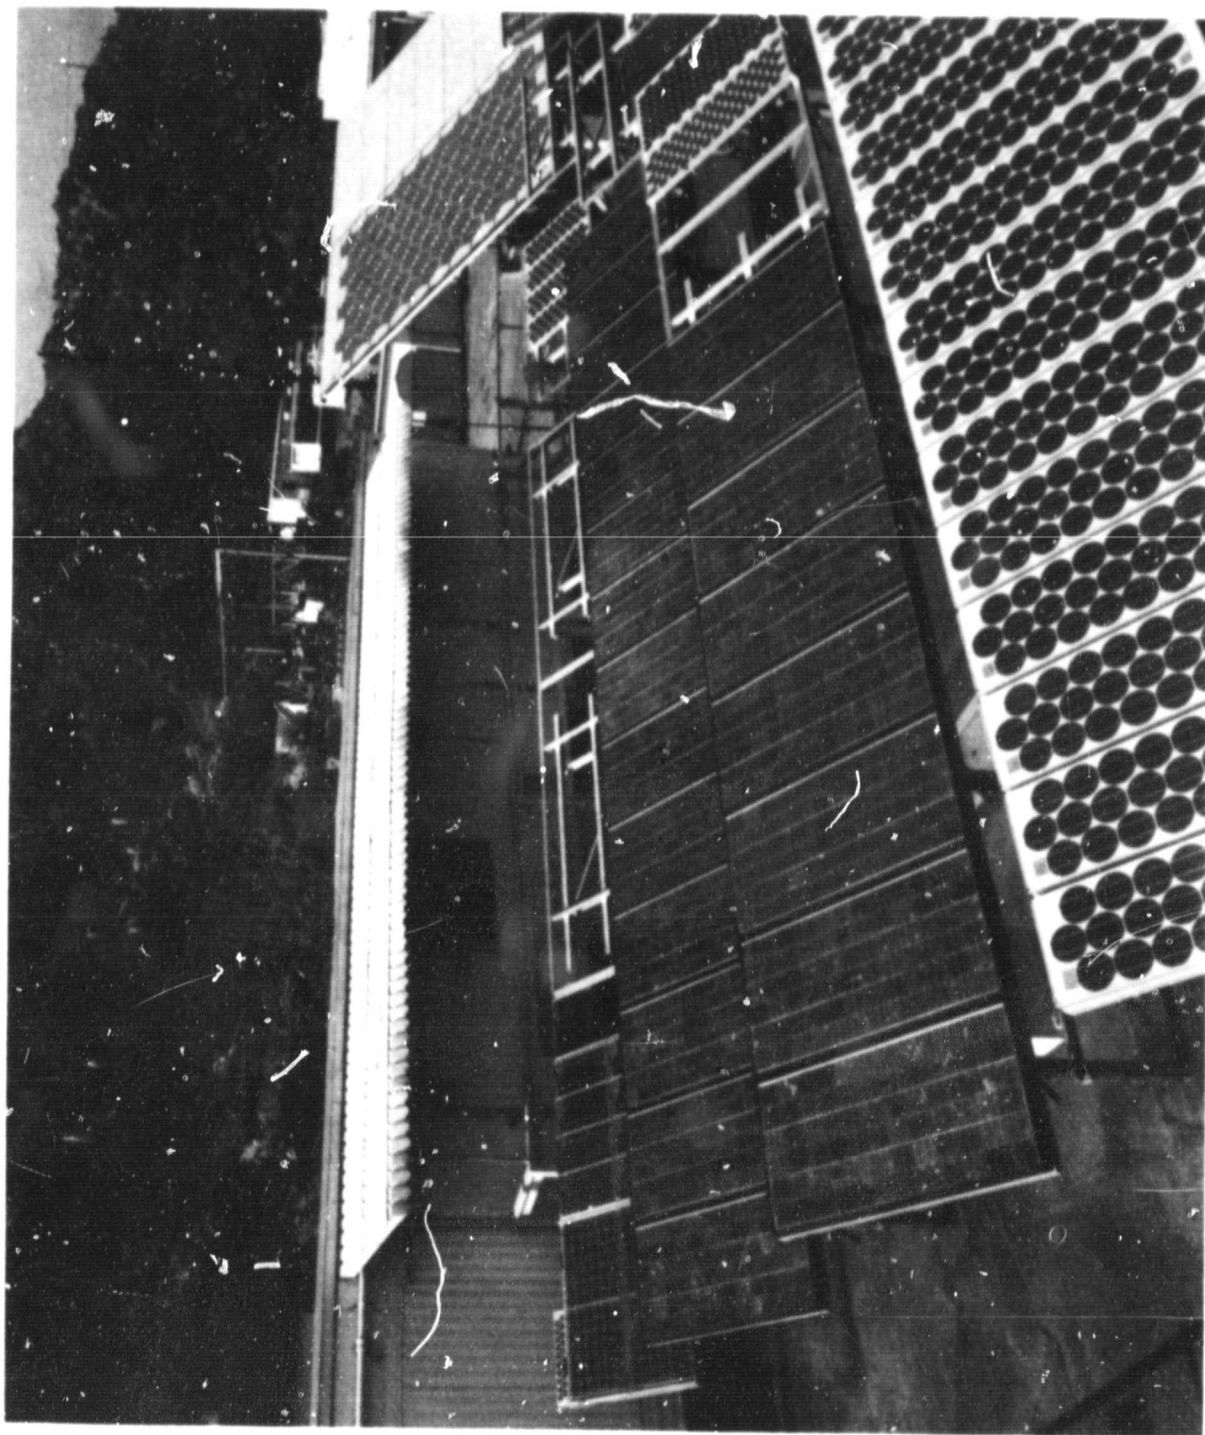


Figure 1. Block IV Modules at JPL Field-Test Site

SECTION II

MODULE DESCRIPTIONS

The Block IV intermediate-load modules were obliged to meet the requirements of Reference 3. The principal requirements are:

- (1) Module power must be defined as the power at Nominal Operating Voltage (V_{NO}) under Standard Operating Conditions (SOC). SOC is defined as an irradiance level of 100 mW/cm^2 , an optical air mass of AM1.5, and a cell temperature equal to Nominal Operating Cell Temperature (NOCT). NOCT is defined as the cell temperature under the following conditions:

| | | |
|-----------------------|---|--|
| Insolation | = | 100 mW/cm^2 |
| Air temperature | = | 20°C |
| Average wind velocity | = | 1 m/s |
| Electrical load | = | open circuit |
| Mounting | = | normal to solar noon on structure typical of application. |
- (2) Breakdown voltage from terminals to ground must exceed 2000 Vdc.
- (3) Circuit design must protect against module degradation due to cell heating in a short-circuited module with an open-circuit cell failure.
- (4) Maximum module dimensions must not exceed $1.2 \times 1.2 \text{ m}$ ($47.244 \times 47.244 \text{ in.}$).
- (5) The modules must withstand the following test environment (see Appendix B for details and criteria):
 - (a) 50 thermal cycles between -40°C and $+90^\circ\text{C}$.
 - (b) 5 cycles of 90% relative humidity between 23°C and 40°C .
 - (c) 10,000 cycles of mechanical cyclic pressure, simulating wind and other loads of $\pm 2.4 \text{ kPa}$ ($\pm 50 \text{ lb/ft}^2$).
 - (d) Twisted mounting surface of 20 mm/m ($1/4 \text{ in./ft}$).
 - (e) Impact of simulated hailstones of 20 mm ($3/4 \text{ in.}$) diameter, travelling at 20.1 m/s (45 mi/h).

The residential modules were obliged to meet the requirements of Reference 4. These requirements are identical with those for the intermediate-load modules except that the breakdown voltage limit is 1500 Vdc and that shingle-type modules must be subjected to a wind-resistance test uplift loading of 1.7 kPa (35 lb/ft^2) in lieu of the mechanical cyclic-loading test.

PRECEDING PAGE BLANK NOT FILMED

Samples of each module design were subjected to a qualification test program (see Appendix B) to prove compliance with the requirements. In addition, all deliverable modules were subjected to an acceptance test, consisting of measurement of electrical performance and testing of breakdown voltage.

A detailed description of each of the eight modules is given in Table 1. Some of these details are given in the table in the form of references to photographs, drawings, and I-V curves, all of which are included in this handbook to provide a comprehensive description of the Block IV modules.

Table 1. Block IV Module Characteristics

| Manufacturer | ARCO Solar | ASEC | GE | Motorola | Photowatt | Solarex | Solarex | Spire |
|--------------------------|---|-------------------|-----------------|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|
| MFR's Part No. | 012110-E | 60-3062-F | 47J10-7731-C | NSP43D40-G | ML-1961-D | 580-BT-1-f | 580-BT-R-C | 058-0007-A |
| Module Type ^a | INT | INT | RES | INT | INT | INT | RES | INT |
| PHYSICAL | Photographic Views | Figure 2 | Figure 5 | Figure 8 | Figure 12 | Figure 15 | Figure 18 | Figure 21 |
| | Overall Dimensions [mm (in.)] | Figure 2 | Figure 5 | Figure 8 | Figure 12 | Figure 15 | Figure 18 | Figure 21 |
| | Length | 1219 (48.0) | 1198 (47.2) | 818 (32.2) | 1198 (47.2) | 1199 (47.2) | 1200 (47.3) | 1193 (47.0) |
| | Width | 305 (12.0) | 696 (27.4) | 669 (26.4) | 356 (14.0) | 444 (17.5) | 635 (25.0) | 628 (24.7) |
| | Weight | 54 (2.1) | 39 (1.5) | 7.6 (0.3) | 38 (1.5) | 51 (2.0) | 51 (2.0) | 16 (0.63) |
| | Weight kg(lbs) | 5.2 (11.4) | 13.5 (29.7) | 4.0 (8.8) | 5.8 (12.8) | 7.4 (16.3) | 13.9 (30.6) | 11.2 (24.6) |
| | Support Structure Planarity | 20 (0.25) | 20 (0.25) | 20 (0.25) | 20 (0.25) | 20 (0.25) | 20 (0.25) | 20 (0.25) |
| | Rqpt [mm/m (in./ft)] ^b | Figure 3 | Figure 6 | Figure 9 | Figure 13 | Figure 16 | Figure 19 | Figure 22 |
| | Module Drawing and Materials | Figure 3 | Figure 6 | Figure 9 | Figure 13 | Figure 16 | Figure 19 | Figure 22 |
| | Module Installation | Figure 3 | Figure 6 | Figure 9 | Figure 13 | Figure 16 | Figure 19 | Figure 22 |
| ELECTRICAL | Electrical Connections | Figure 3 | Figure 6 | Figure 9 | Figure 13 | Figure 16 | Figure 19 | Figure 22 |
| | Cells | Figure 3 | Figure 6 | Figure 9 | Figure 13 | Figure 16 | Figure 19 | Figure 22 |
| | Quantity | 35 | 136 | 19 | 33 | 72 | 72 | 108 |
| | Size [mm (in.)] | Dia: 102.9 (4.05) | Dia: 76.2 (3.0) | Dia: 100 (3.94) | 100.3 x 100.3 (3.95 x 3.95) | Dia: 76.2 (3.0) | 95 x 95 (3.74 x 3.74) | 63.5 x 63.5 (2.5 x 2.5) |
| | Packing Factor | 0.76 | 0.74 | 0.76 | 0.76 | 0.62 | 0.85 | 0.84 |
| | Base Material | Cz | Cz | Cz | Cz | Cz | SEMI-XTL | Cz |
| | Junction | n/p | n/p | n/p | n/p | n/p | n/p | n/p |
| | Front Metallization | Printed Al, Ag | Ti-Pd-Ag | Printed Ag | Pd-Ni-Solder | Ni-Solder | Ti-Pd-Ag | Ti-Pd-Ag |
| | Back Metallization | Printed Al, Ag | Ti-Pd-Ag | Printed Al, Ag | Pd-Ni-Solder | Ni-Solder | Al-SnAg | Ti-Pd-Ag |
| | | | | | | | Al-SnAg | |
| ELECTRICAL | Nominal Performance ^c | | | | | | | |
| | Power, rated (watts) | 32.0 | 71.0 | 14.4 | 32.9 | 33.0 | 53.0 | 50.0 |
| | Voltage, rated (volts) | 15.0 | 14.0 | 6.6 | 15.0 | 5.0 | 13.5 | 4.2 |
| | Current (amps) | 2.13 | 5.07 | 2.18 | 2.19 | 6.6 | 3.9 | 11.9 |
| | SOC Performance ^{c,d,e} | | | | | | | |
| | Power, maximum (watts) | 31.5 | 74.7 | 14.2 | 33.1 | 33.4 | 54.8 | 50.9 |
| | Voltage at max power (volts) | 14.6 | 14.4 | 6.6 | 14.5 | 4.85 | 13.6 | 4.31 |
| | Current at max power (amps) | 2.16 | 5.18 | 2.15 | 2.28 | 6.88 | 11.8 | 11.8 |
| | Voltage, open circuit (volts) | 19.2 | 18.3 | 9.3 | 17.8 | 6.24 | 17.5 | 5.74 |
| | Current short circuit (amps) | 2.43 | 5.46 | 2.53 | 2.53 | 7.63 | 4.61 | 13.7 |
| ELECTRICAL | Fill factor | 0.70 | 0.75 | 0.60 | 0.74 | 0.70 | 0.70 | 0.65 |
| | Efficiency, Module (%) | 8.5 | 9.0 | 7.3 | 7.8 | 6.3 | 7.2 | 6.8 |
| | Eff., encapsulated cell (%) | 11.2 | 12.2 | 9.6 | 10.3 | 10.2 | 8.5 | 7.8 |
| | 28°C Performance ^e | | | | | | | |
| | Power, maximum (watts) | 35.7 | 84.6 | 18.8 | 37.3 | 38.6 | 62.6 | 61.2 |
| | Voltage at max power (volts) | 16.6 | 16.5 | 8.5 | 16.2 | 5.68 | 16.1 | 5.27 |
| | Current at max power (amps) | 2.15 | 5.11 | 2.21 | 2.30 | 6.79 | 3.90 | 11.6 |
| | Voltage, open circuit (volts) | 21.0 | 20.2 | 11.0 | 19.5 | 6.98 | 19.6 | 6.70 |
| | Current, short circuit (amps) | 2.42 | 5.40 | 2.53 | 2.50 | 7.58 | 4.50 | 13.2 |
| | Fill factor | 0.70 | 0.78 | 0.68 | 0.76 | 0.73 | 0.71 | 0.69 |
| ELECTRICAL | Efficiency, module (%) | 9.6 | 10.1 | 8.6 | 8.6 | 7.2 | 8.2 | 7.8 |
| | Eff., encapsulated cell (%) | 12.6 | 13.6 | 12.6 | 11.6 | 11.6 | 9.6 | 9.4 |
| | I-V curves ^e | Figure 4 | Figure 7 | Figure 11 | Figure 14 | Figure 17 | Figure 20 | Figure 24 |
| | Circuit Diagram | Figure 3 | Figure 6 | Figure 9 | Figure 13 | Figure 16 | Figure 19 | Figure 22 |
| | Breakdown Voltage, Min. (V _{DC}) ^{b,f} | 2000 | 2000 | note 8 | 2000 | 2000 | 2000 | note 8 |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

Table 1. Block IV Module Characteristics (Cont'd)

| | ARCO Solar | ASFC | CZ | Motorola | Photowatt | Solarex | Solarex | Spire |
|--|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Thermal | | | | | | | | |
| Nominal Operating Cell Temperature, NOCT (°C) ^d | | | | | | | | |
| At 100 mW/cm ² insolation | 52 | 54 | 58 | 56 | 54 | 55 | 65 | 55 |
| At 80 mW/cm ² insolation | 46 | 47 | 53 | 49 | 47 | 49 | 55 | 49 |
| Temperature Coefficients^h | | | | | | | | |
| $\Delta V/\Delta T$ (Volts/°C) | -0.086 | -0.083 | -0.089 | -0.078 | -0.030 | -0.086 | -0.029 | -0.097 |
| $\Delta I/\Delta T$ (Amps/°C) | +0.0011 | +0.0027 | +0.0007 | +0.0011 | +0.0027 | +0.0045 | +0.0136 | +0.0015 |
| ENVIRONMENTAL | | | | | | | | |
| Temperature range (°C) ^b | -40 to +93 | -40 to +93 | -45 to +93 | -40 to +90 | -40 to +90 | -40 to +90 | -40 to +90 | -40 to +90 |
| Humidity, max relative (%) ^b | 90 | 90 | 96 | 90 | 90 | 90 | 90 | 90 |
| Wind load, max kPa (lbf/ft ²) ^b | +2.4 (+50) | +2.4 (+50) | 1.7 (35) | +2.4 (+50) | +2.4 (+50) | +2.4 (+50) | +1.7 (+35) | +2.4 (+50) |
| Hail impact, max hailstone ^b (mm (in.)) | 20.0 (0.75) | 20.0 (0.75) | 20.0 (0.75) | 20.0 (0.75) | 20.0 (0.75) | 20.0 (0.75) | 20.0 (0.75) | 20.0 (0.75) |

NOTES

a)VT = Module intended for use in intermediate-load centers, defined here as installations providing 20 kW to 500 kW.

b)ZS = Module intended for use on single-family residence in installations providing 2 kW to 10 kW.

c)The data given are tested limits, not module limits. For details see Appendix B (Qualification Test Program).

d)Each module is expected to produce not less than 90% of rated power when loaded to provide rated voltage under Standard Operating Conditions (SOC), i.e.:

1. Module irradiated with 100 mW/cm² insolation at air mass 1.5 (AM1.5) spectrum.
2. Cell temperature equal to NOCT (per Block IV Specifications; see note d).

e)The Block IV Specifications define NOCT (Nominal Operating Cell Temperature) as the cell temperature with the module in the Standard Thermal Environment defined as follows:

Insolation = 100 mW/cm²
 Air temperature = 20°C
 Average wind velocity = 1 m/s
 Electrical load = open circuit
 Mounting = normal to solar noon on structure typical of application

f)Practice at the time of publication is to measure NOCT with the module in the Nominal Thermal Environment, which is the same as the Standard Thermal Environment except that the insolation level is 80 mW/cm².

g)The data presented here for each module design were obtained by measurement and extrapolation of the performance of one sample module of that design. The radiation source was a Large-Area Pulsed Solar Simulator calibrated by use of a calibrated reference cell of the same spectral response as the module to irradiate the module with the equivalent of 100 mW/cm² at AM1.5. Module temperature was approximately 20°C. Extrapolation was performed by computer, based upon a set of measured temperature coefficients (voltage, current, and series resistance) for each module design. The resultant families of I-V curves for the sample modules are given in Figures 4, 7, 11, 14, 17, 20, 24, and 27.


h)Modules should not be series-connected to obtain system voltages under worst-case conditions (100 mW/cm² insolation, 0°C cell temperature, open circuit) exceeding:

500 volts for intermediate load modules
 250 volts for residential modules


i)Not applicable. This module has no exposed conductive surface and is intended for installation in a non-conductive assembly.

j)These coefficients are for use in the neighborhood of the maximum power points on the module I-V curves. They are useful for determining power output at a selected voltage and temperature when the available I-V curve was made at a different temperature. For details see Reference 3, Appendix B.

ORIGINAL PAGE
BLACK AND WHITE PHOTOGRAPH

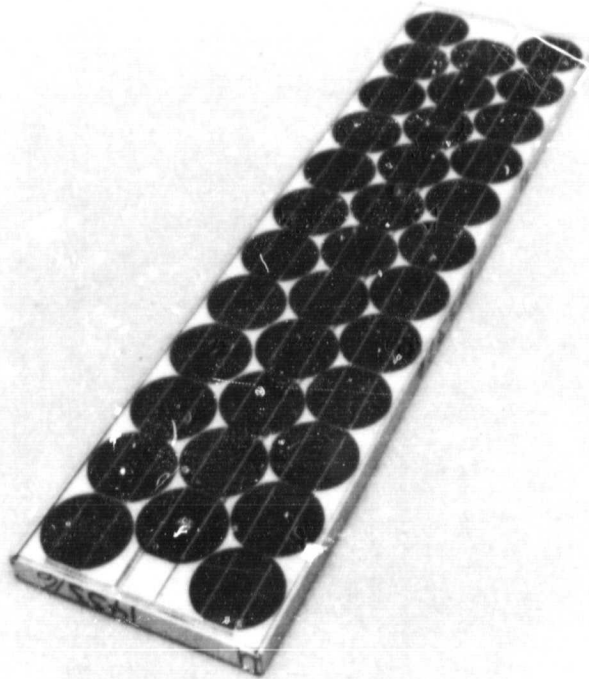

TOP

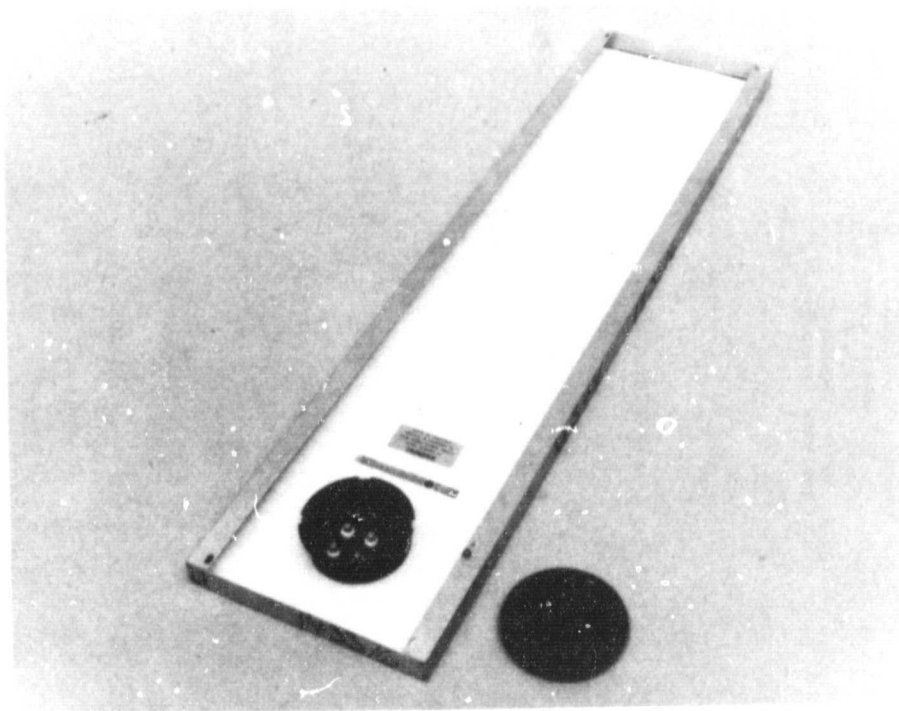

BOTTOM

Figure 2. ARCO Solar Module: Photographic Views

ORIGINAL PAGE IS
OF POOR QUALITY

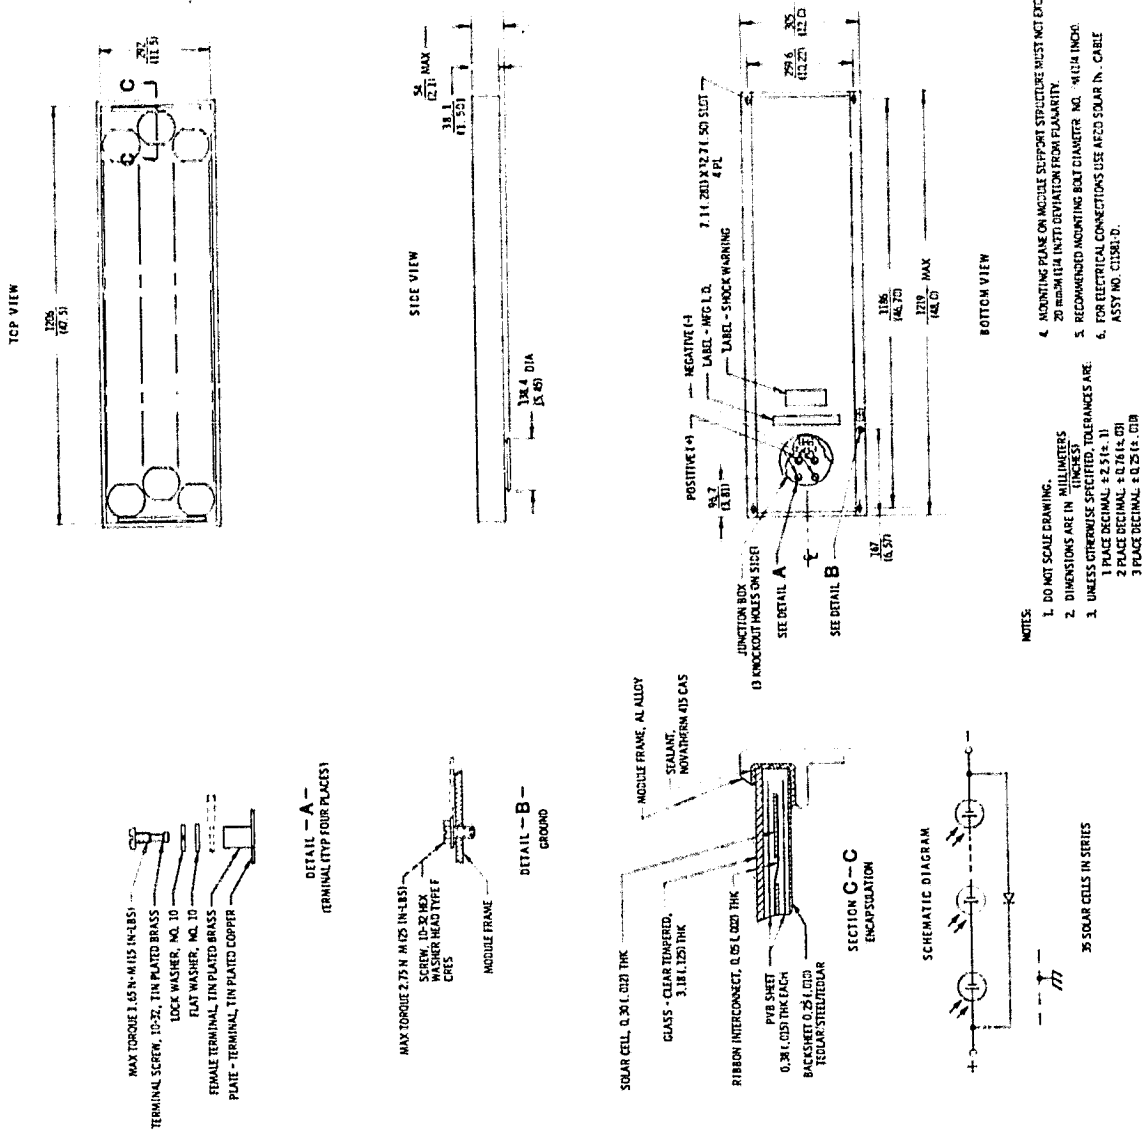


Figure 3. ARCO Solar Module: Drawing

ORIGINAL PAGE IS
OF POOR QUALITY



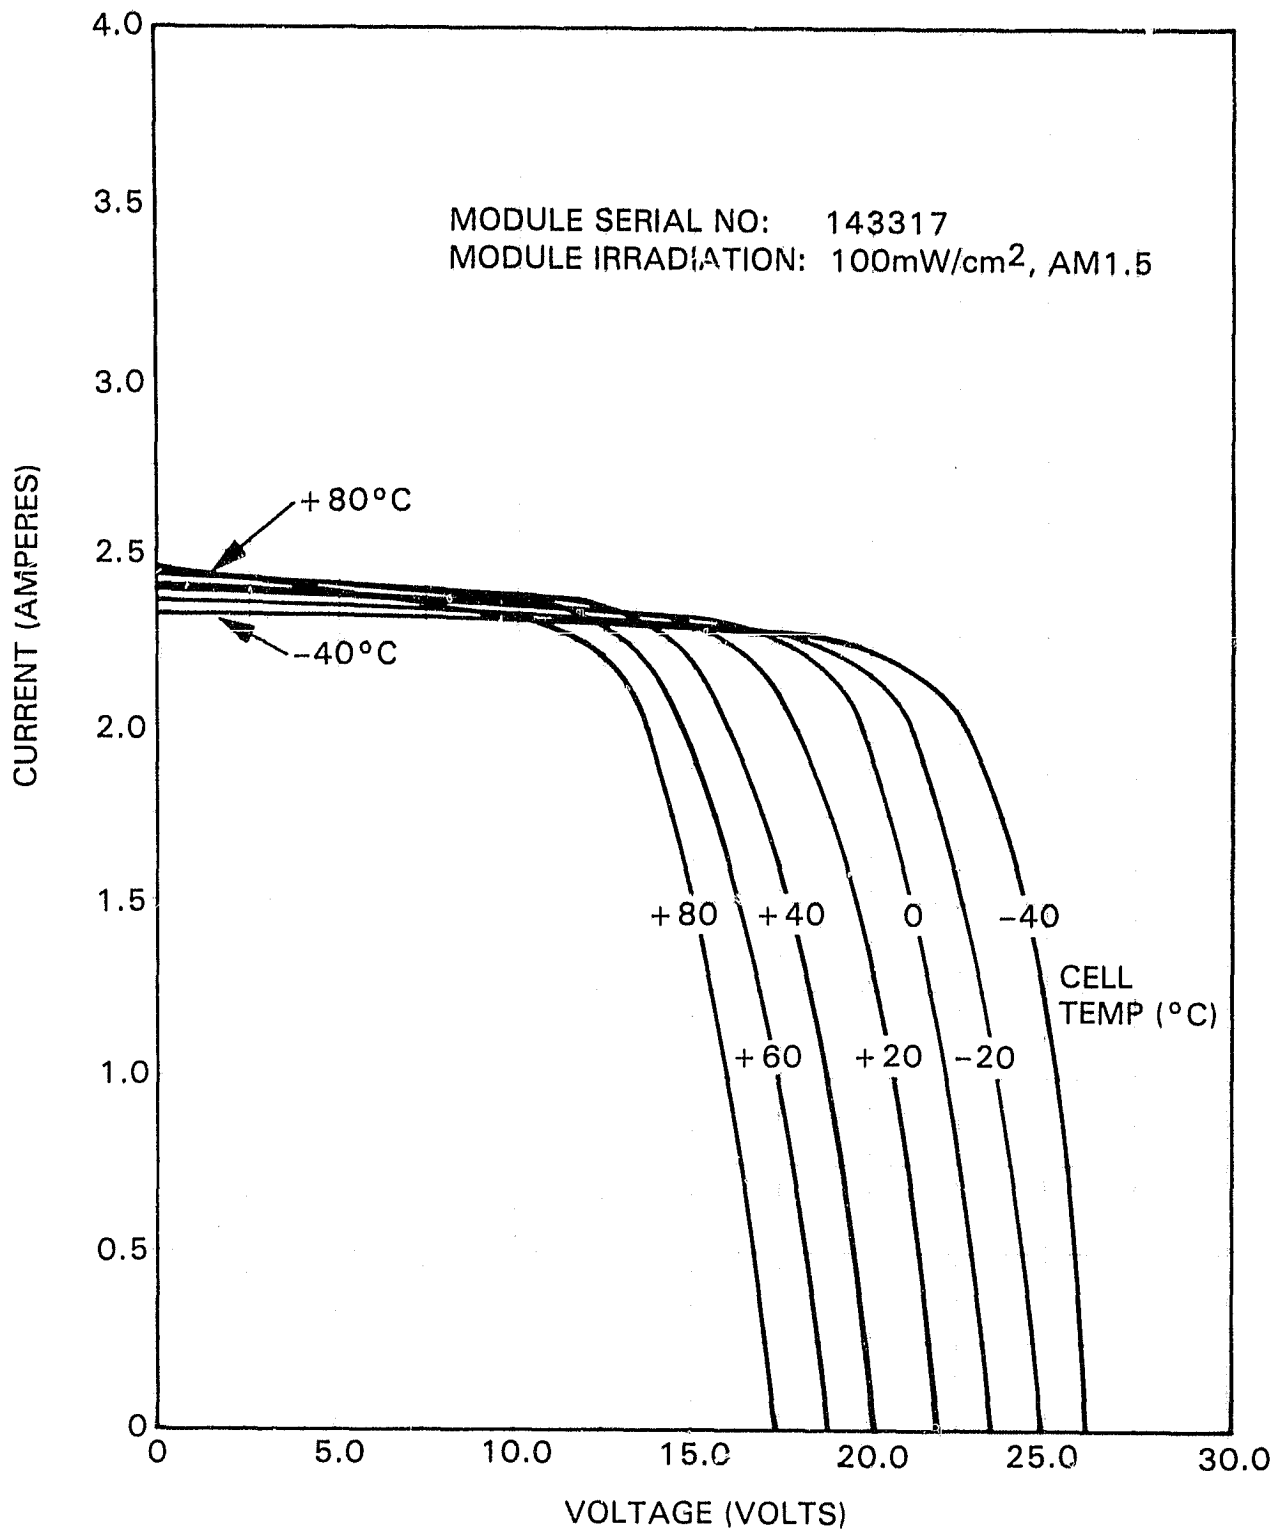


Figure 4. ARCO Solar Module: I-V Curves

ORIGINAL PAGE
BLACK AND WHITE PHOTOGRAPH

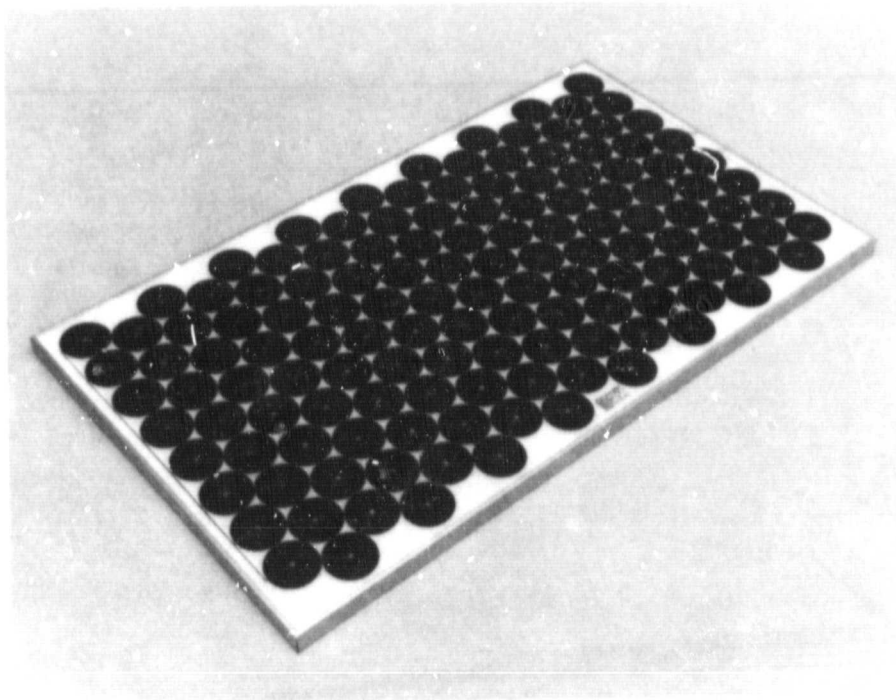

TOP

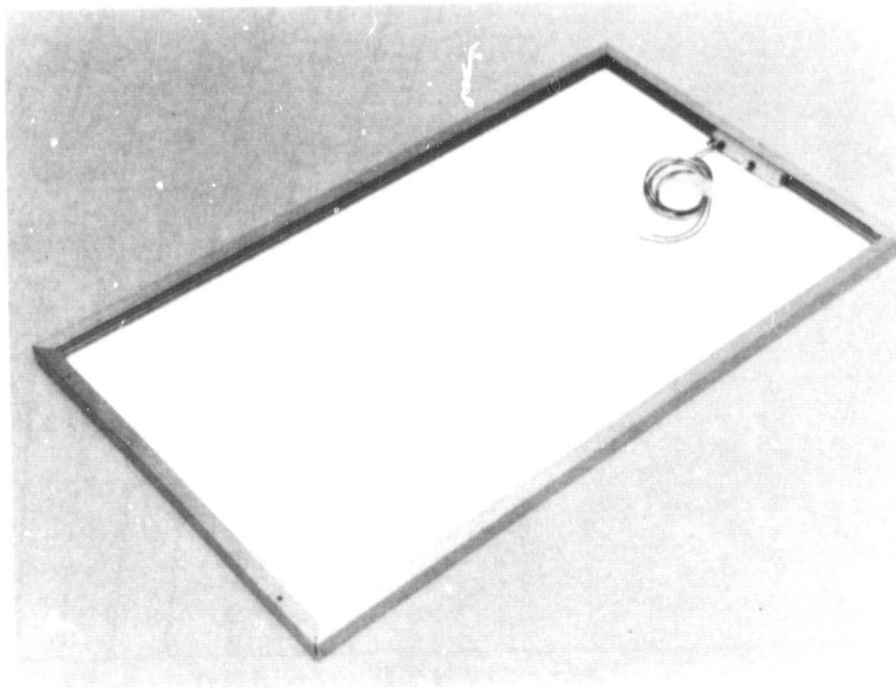

BOTTOM

Figure 5. ASEC Module: Photographic Views

ORIGINAL PAGE IS
OF POOR QUALITY



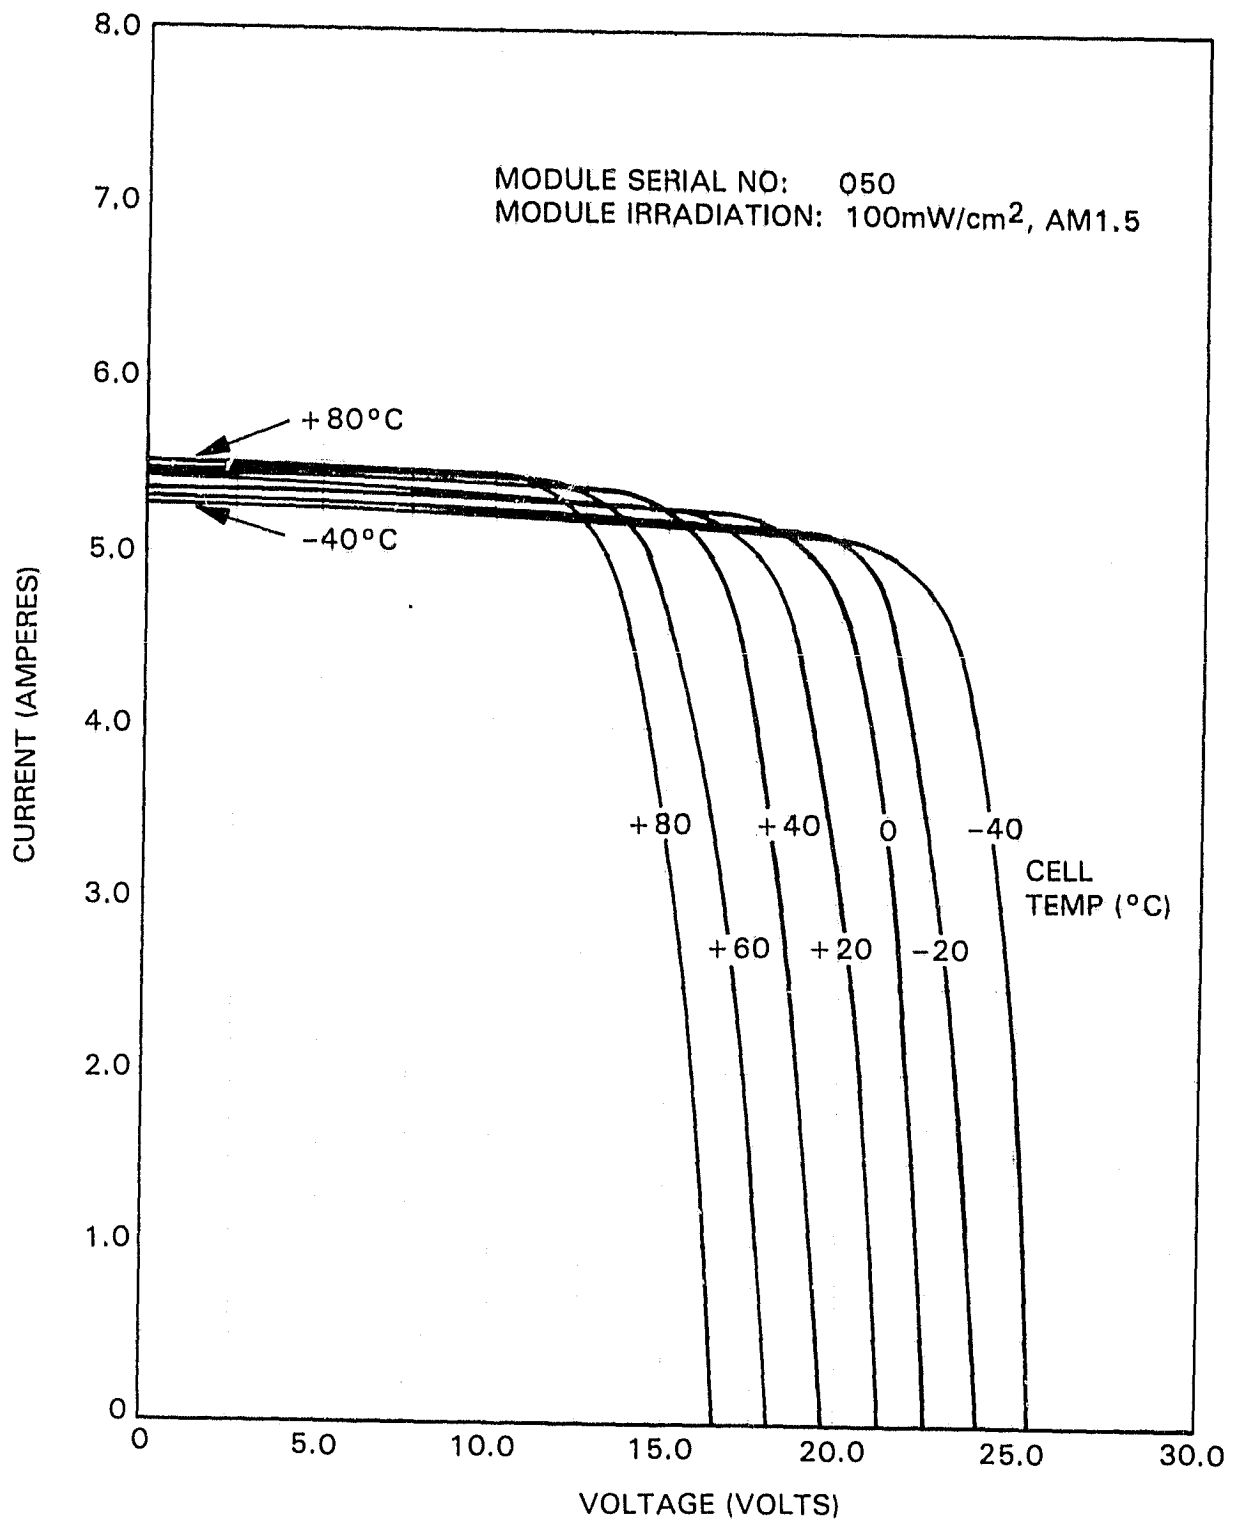


Figure 7. ASEC Module: I-V Curves

ORIGINAL PAGE IS
OF POOR QUALITY

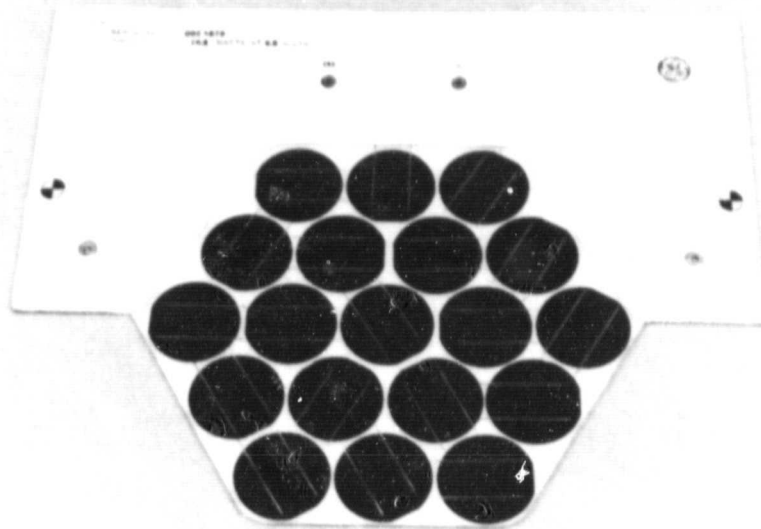

TOP

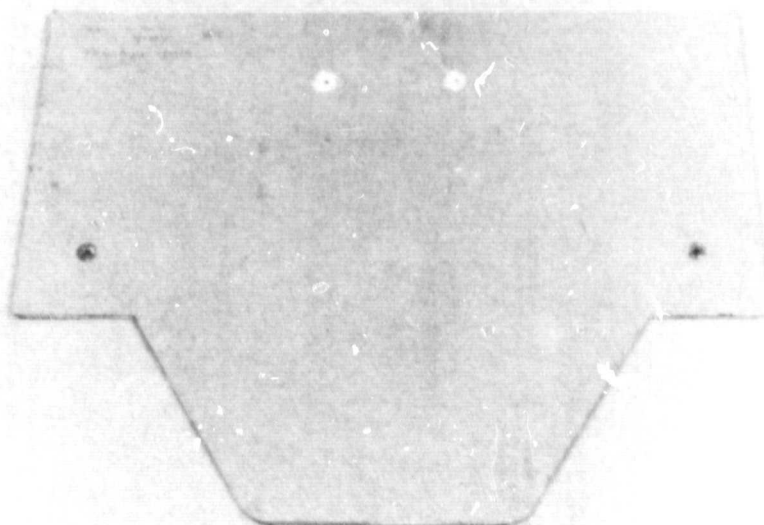

BOTTOM

Figure 8. GE Module (Residential): Photographic Views

[illegible]

ORIGINAL PAGE IS
OF POOR QUALITY

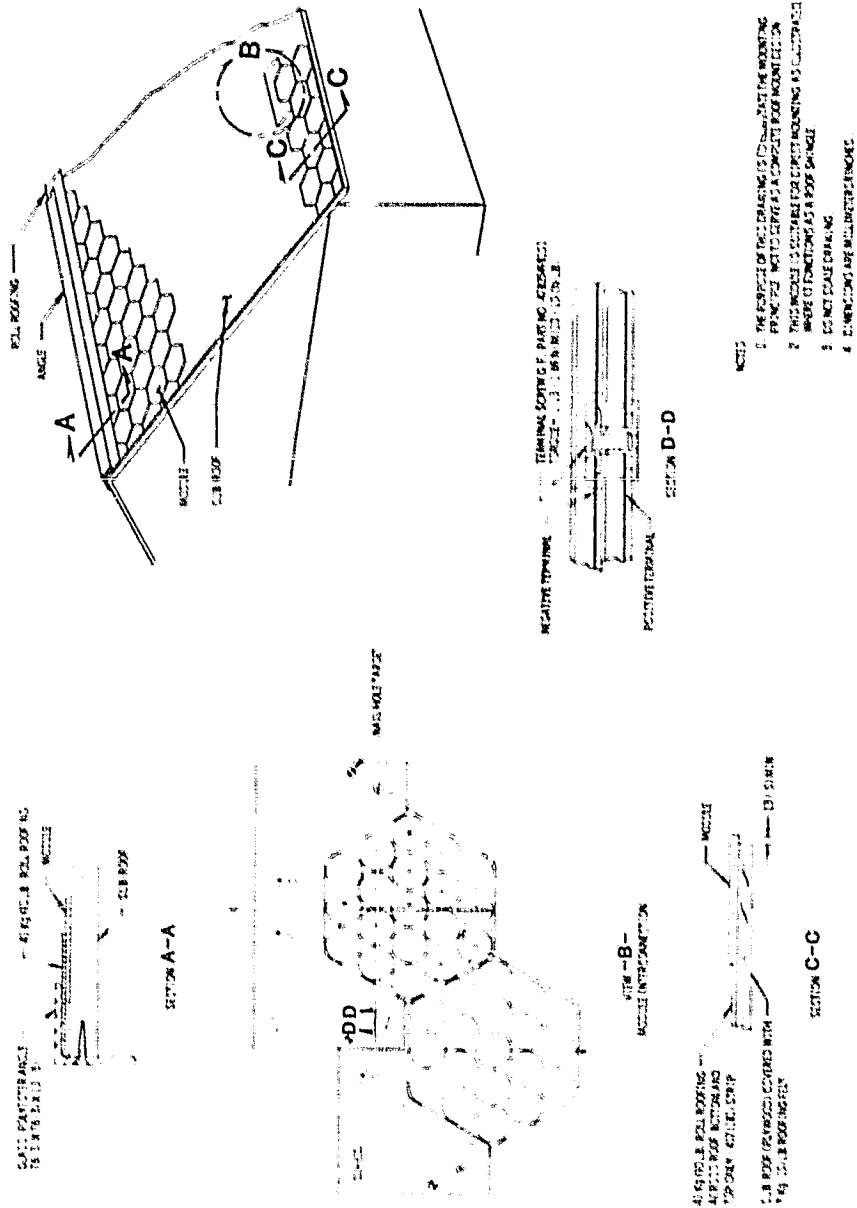


Figure 10. GE Module (Residential): Installation

ORIGINAL PAGE IS
OF POOR QUALITY


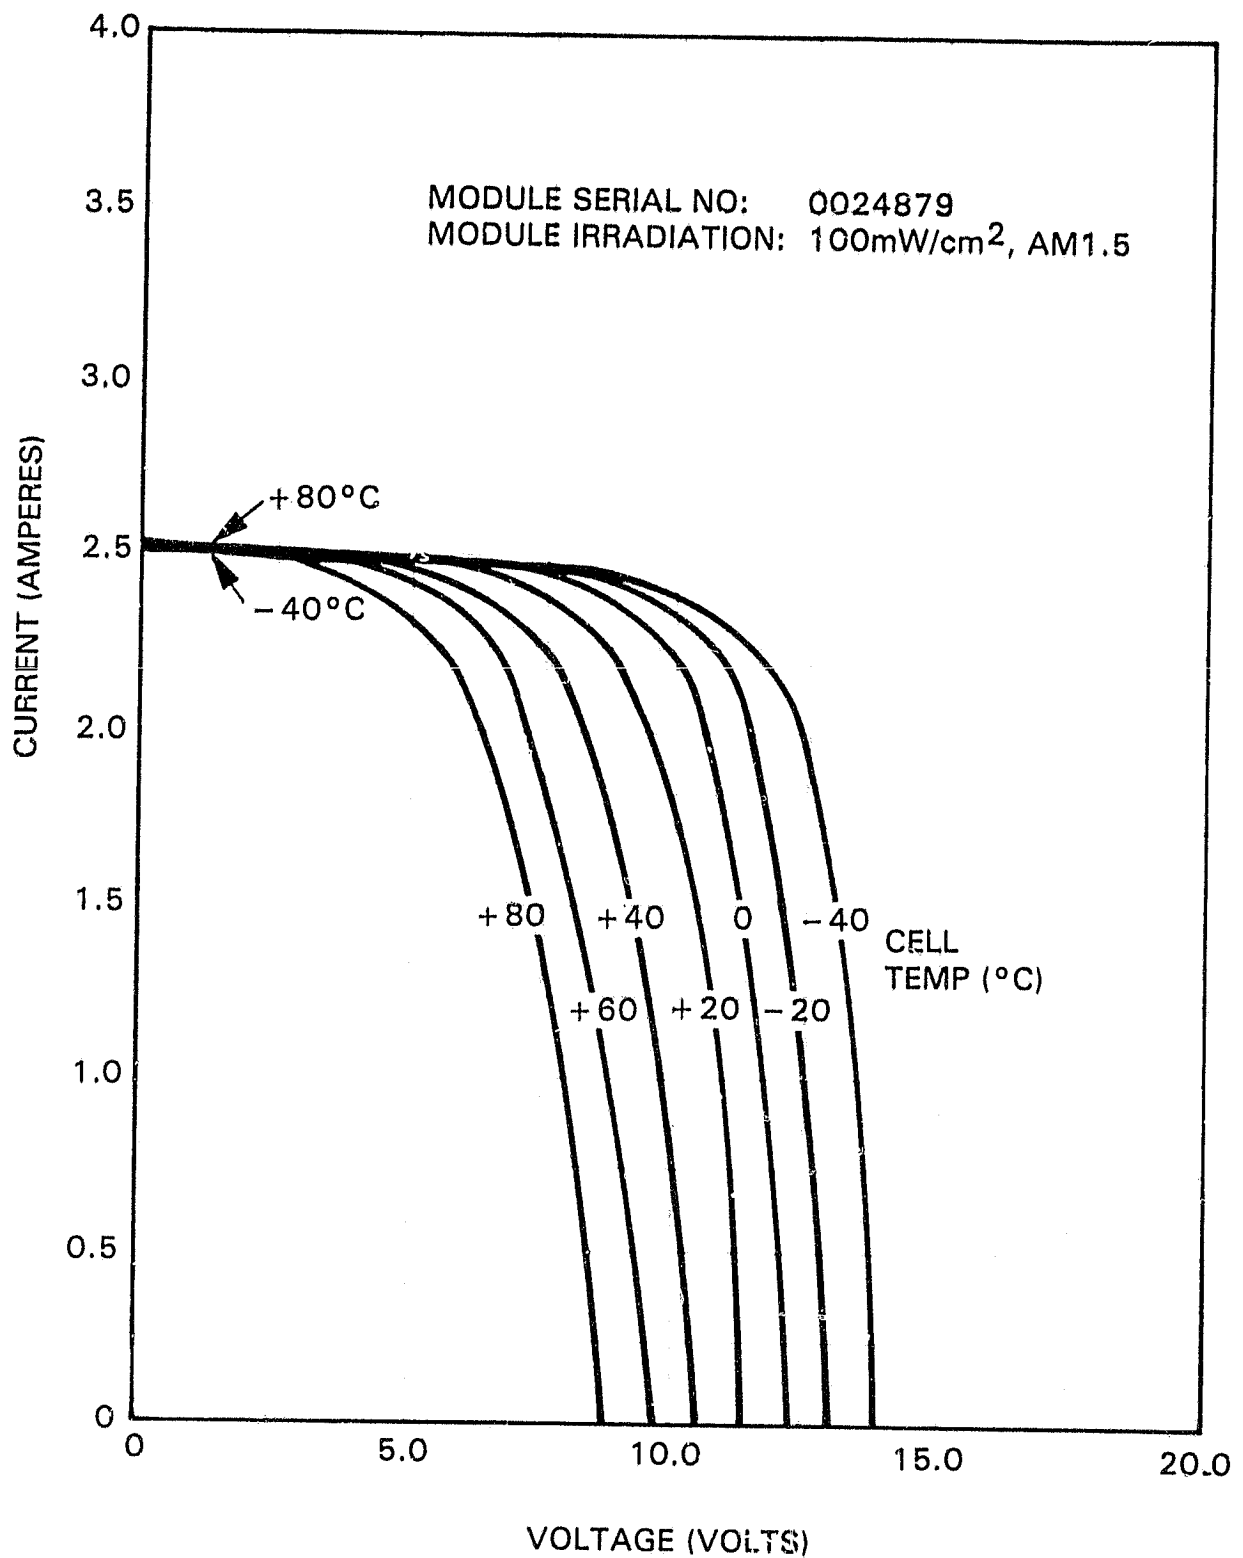


Figure 11. GE Module (Residential): I-V Curves

ORIGINAL PAGE IS
OF POOR QUALITY



TOP

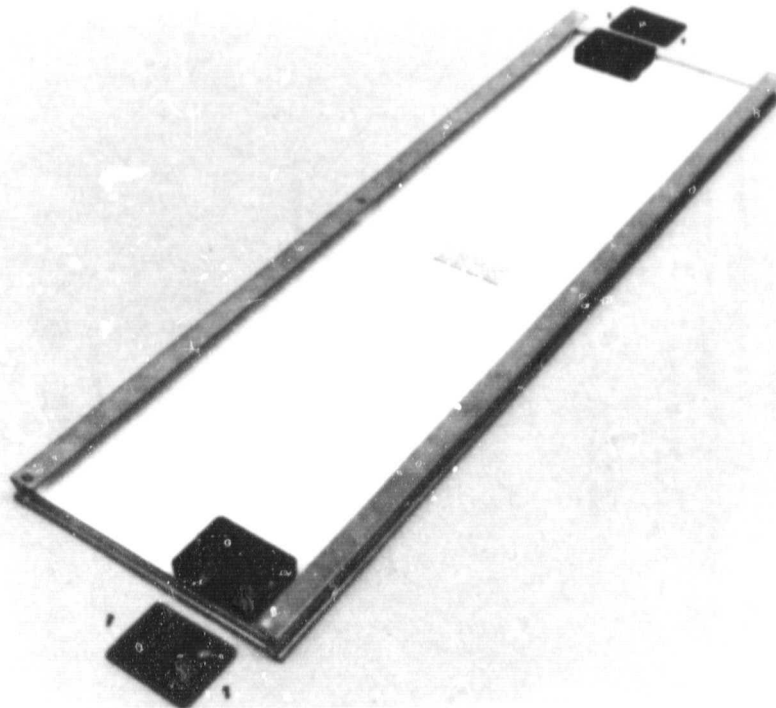

BOTTOM

Figure 12. Motorola Module: Photographic Views

[illegible]

ORIGINAL PAGE IS
OF POOR QUALITY



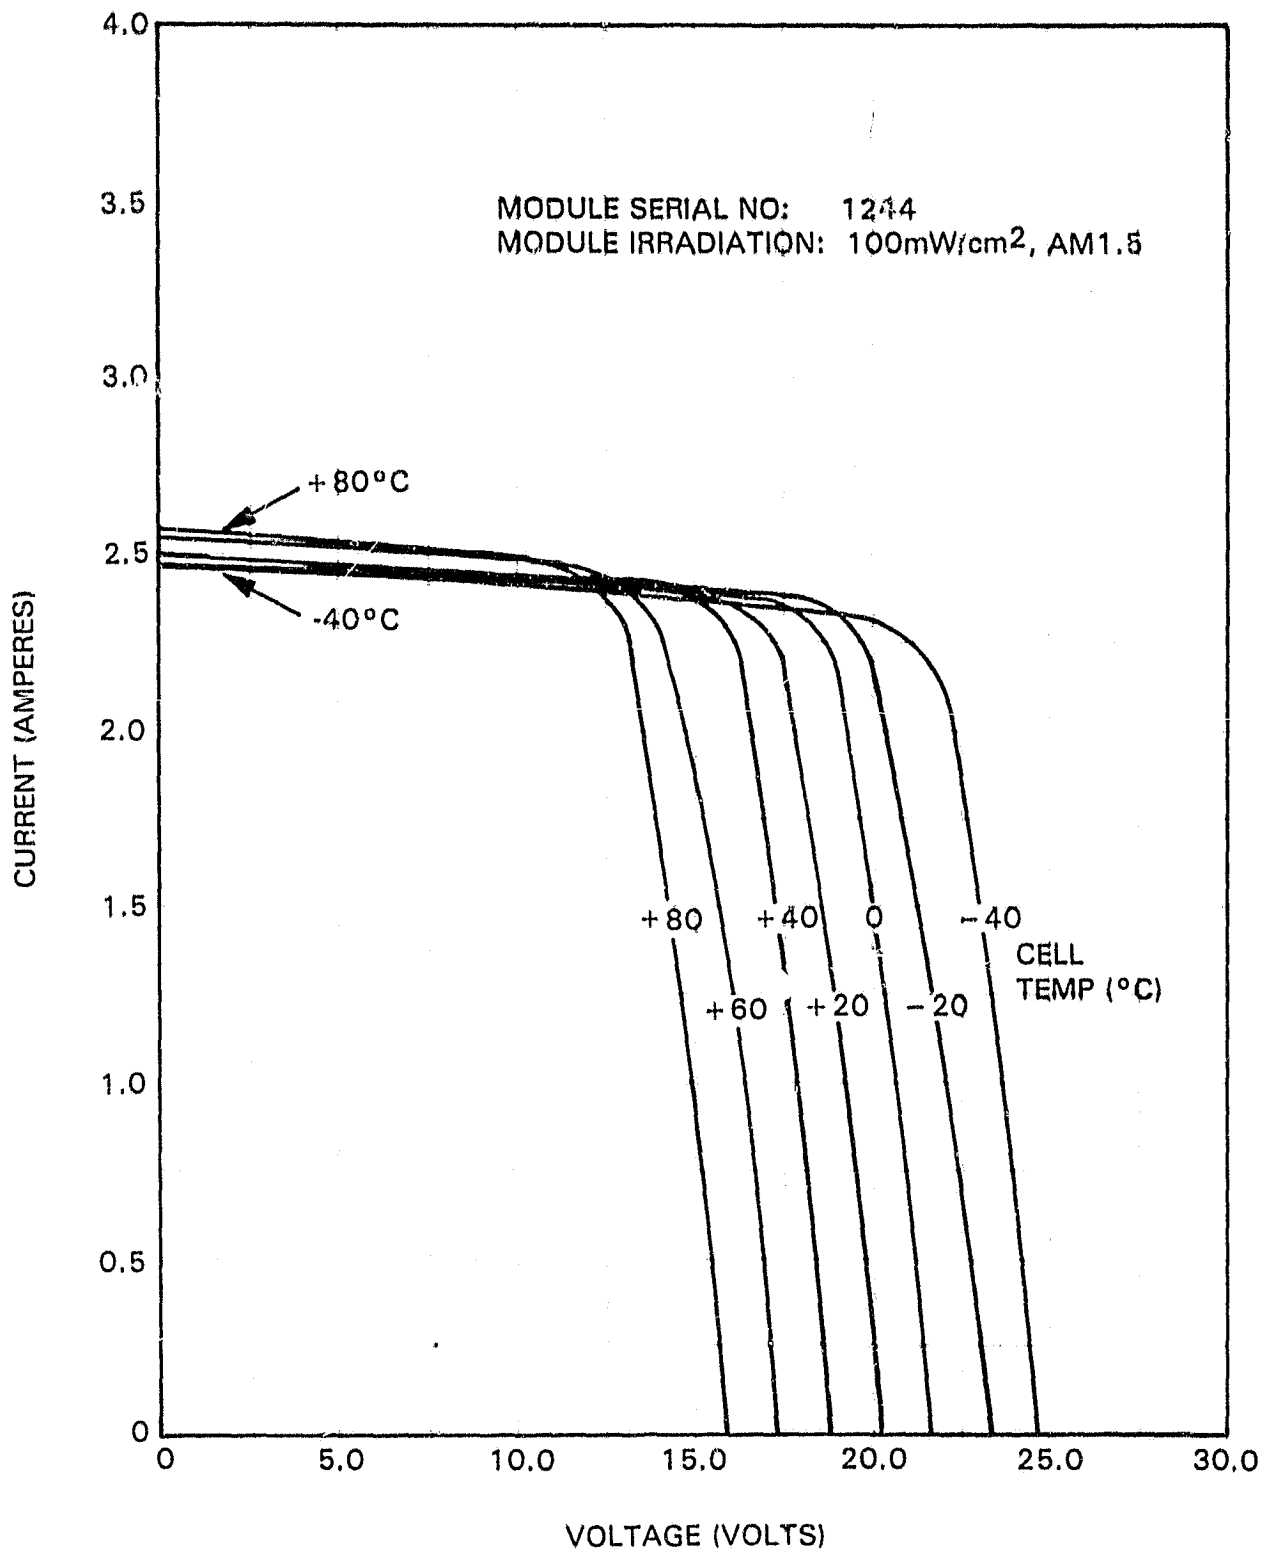


Figure 14. Motorola Module: I-V Curves

ORIGINAL PAGE
BLACK AND WHITE PHOTOGRAPH

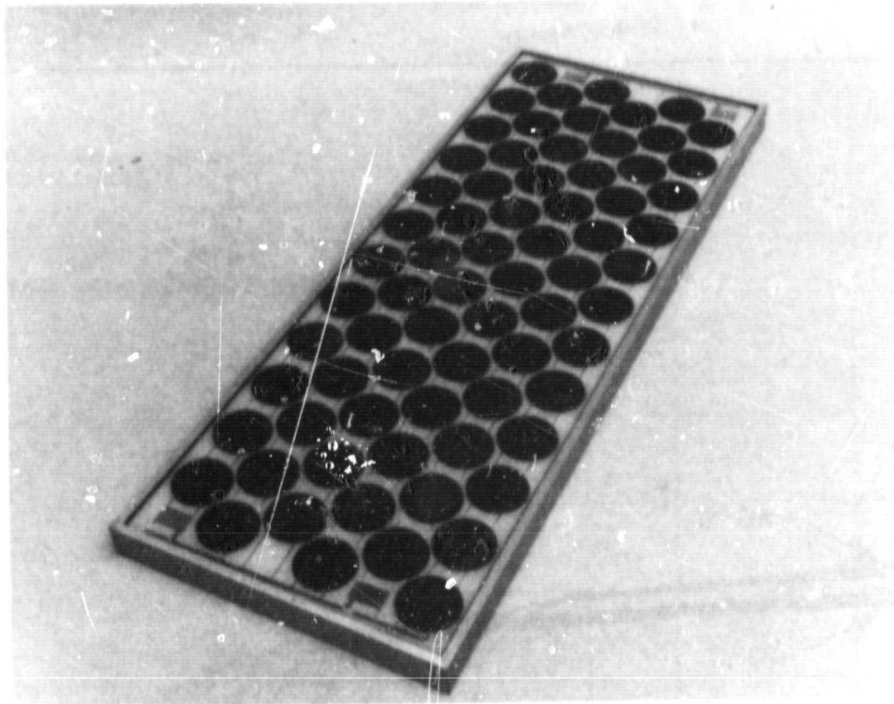

TOP

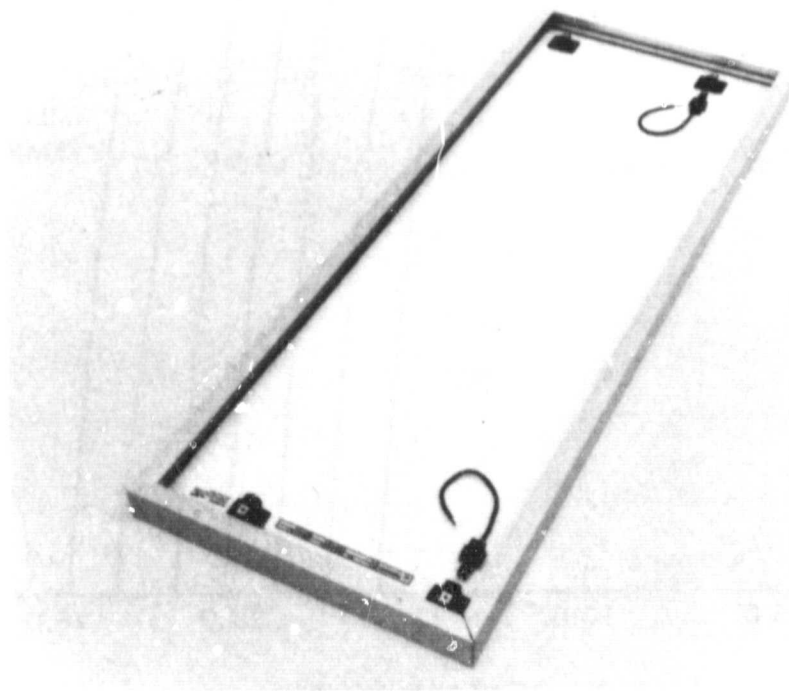

BOTTOM

Figure 15. Photowatt Module: Photographic Views

[illegible][illegible]

SECTION A - A

SYNTHETIC DIAMINE

‡ PARALLEL BY 22 SERIES SOLAR CELL NETWORK
(NUMBER IN CIRCLE INDICATES QUANTITY OF SERIES CELLS)

MAIL ROOM

1. DO NOT SCALE DRAWING.
2. DIMENSIONS ARE IN MILLIMETERS.
3. UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:
1. PLACE DECIMALS ± 0.15 - 10
2. PLACE DECIMALS ± 0.25 - 15
3. PLACE DECIMALS ± 0.35 - 25.4 mm
4. MOUNTING PLANE ON MODULE SUPPORT STRUCTURE MUST NOT EXCEED ± 25 mm (1 in) IN DEVIATION FROM PLANNED.
5. RECOMMENDED MOUNTING BOLT DIMETER, 10 mm (3/8 in).
6. FOR ELECTRICAL CONNECTIONS TO POWER TERMINALS USE RECOMMENDED ASSEMBLY NO. 15-401-002 FOR PARALLEL CONNECTIONS
ASSEMBLY NO. 15-401-002 FOR SERIES CONNECTIONS

Figure 16. Photowatt Module: Drawing

ORIGINAL PAGE IS
OF POOR QUALITY



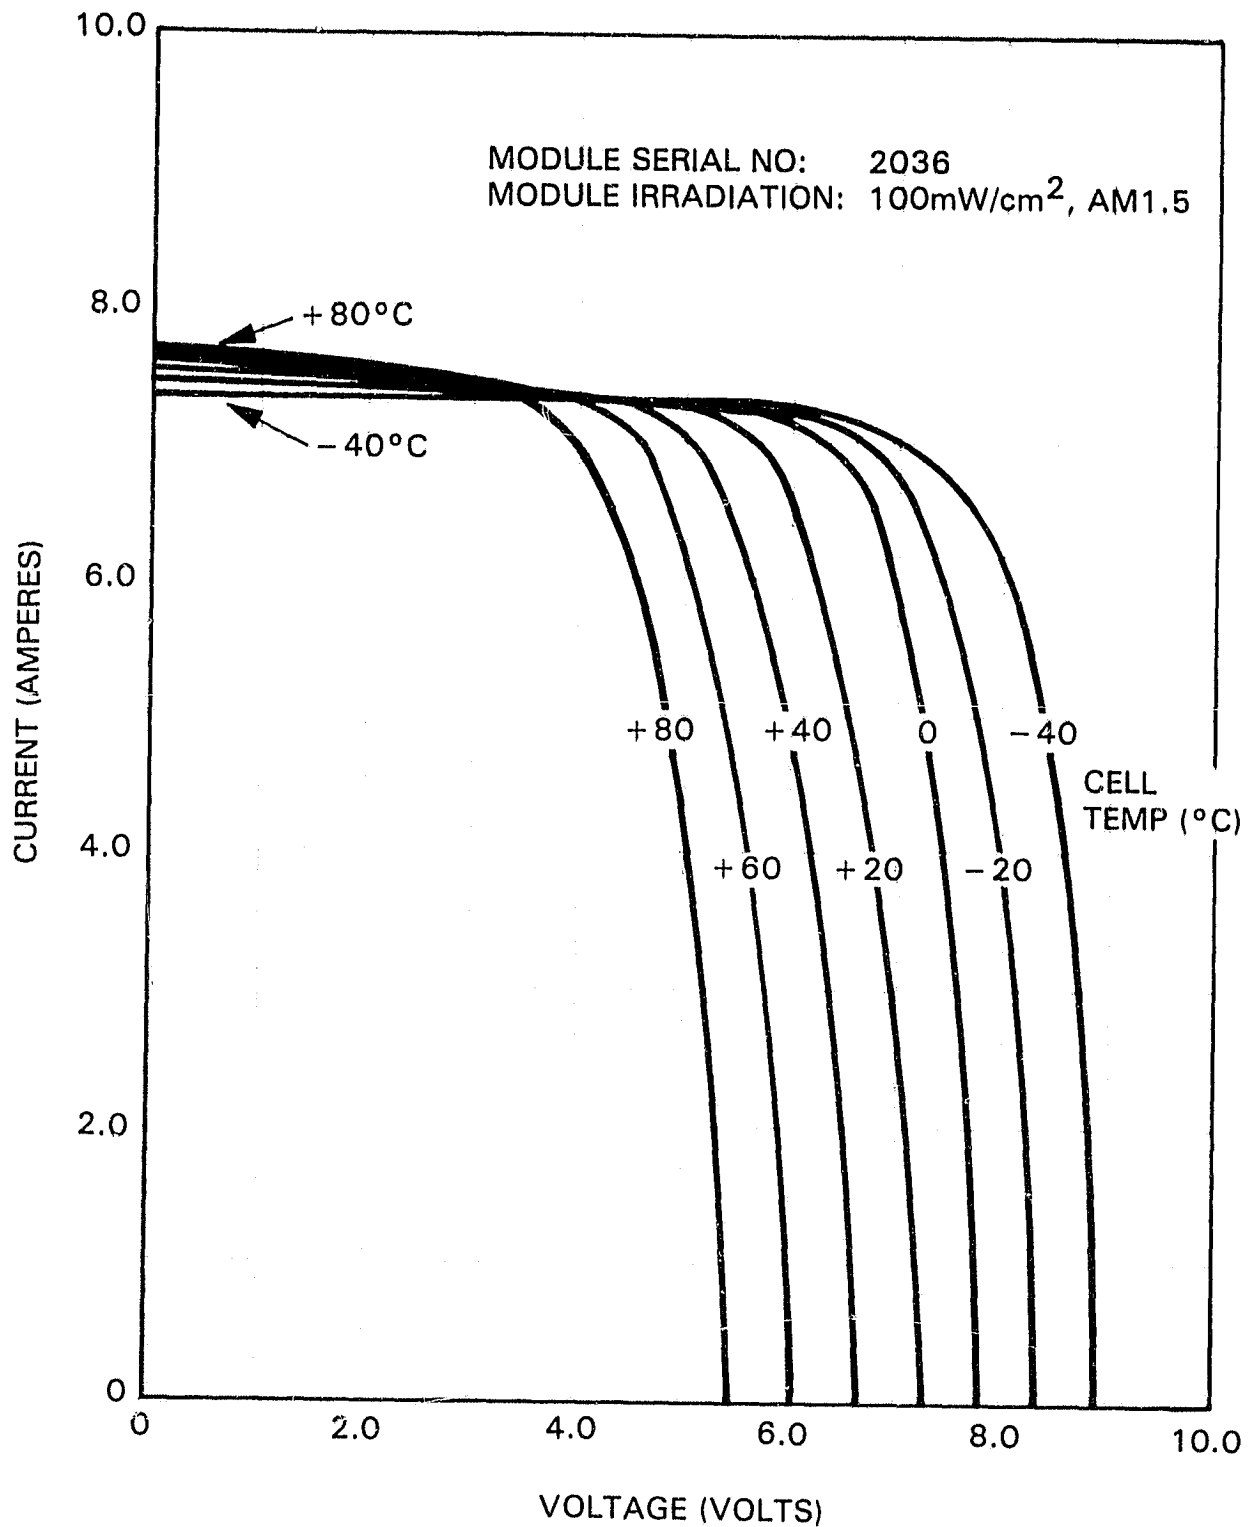


Figure 17. Photowatt Module: I-V Curves

ORIGINAL PAGE
BLACK AND WHITE PHOTOGRAPH

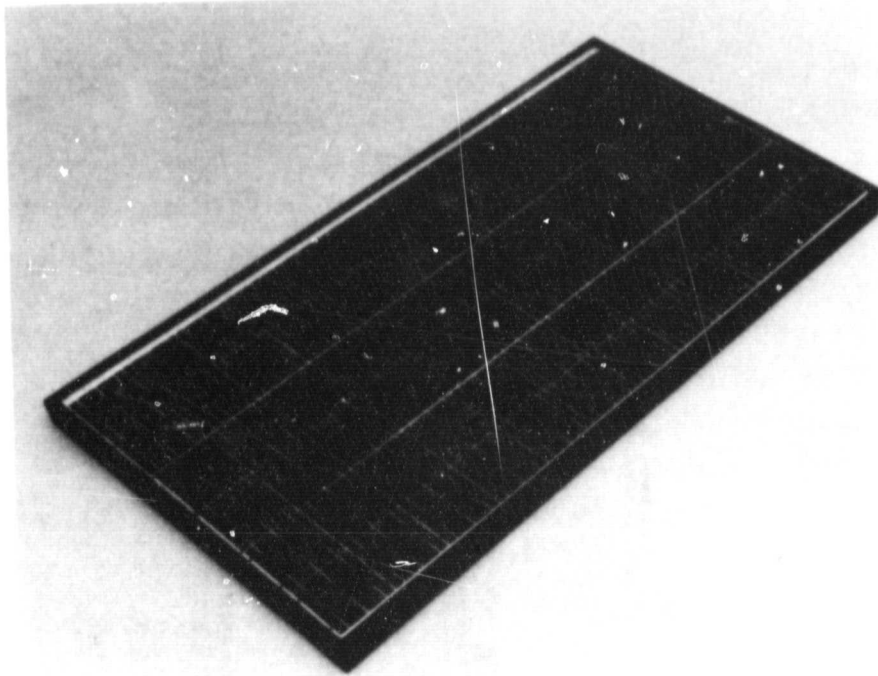

TOP

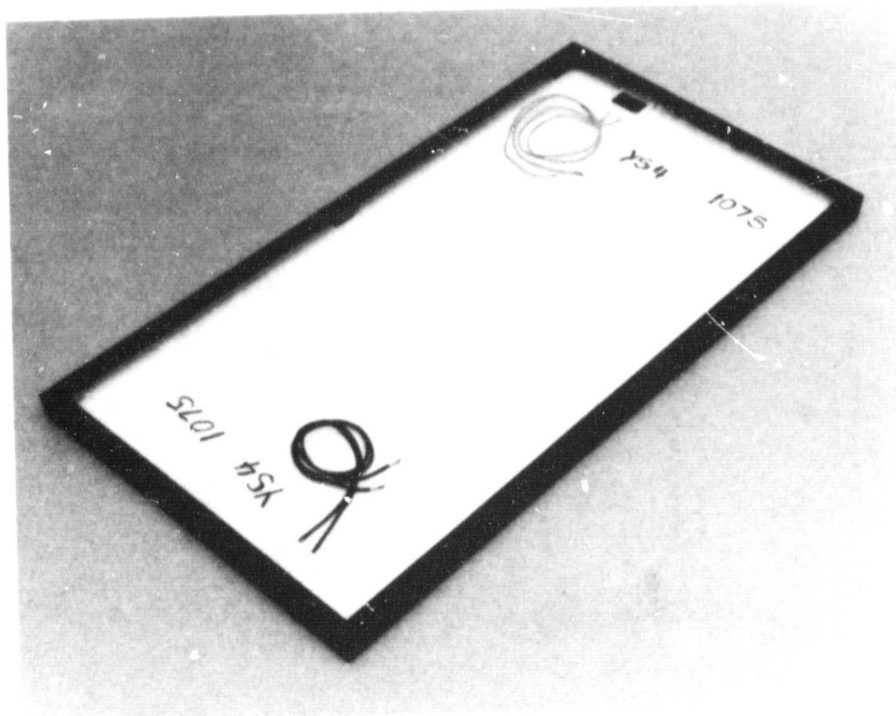

BOTTOM

Figure 18. Solarex Module: Photographic Views

ORIGINAL PAGE IS
OF POOR QUALITY

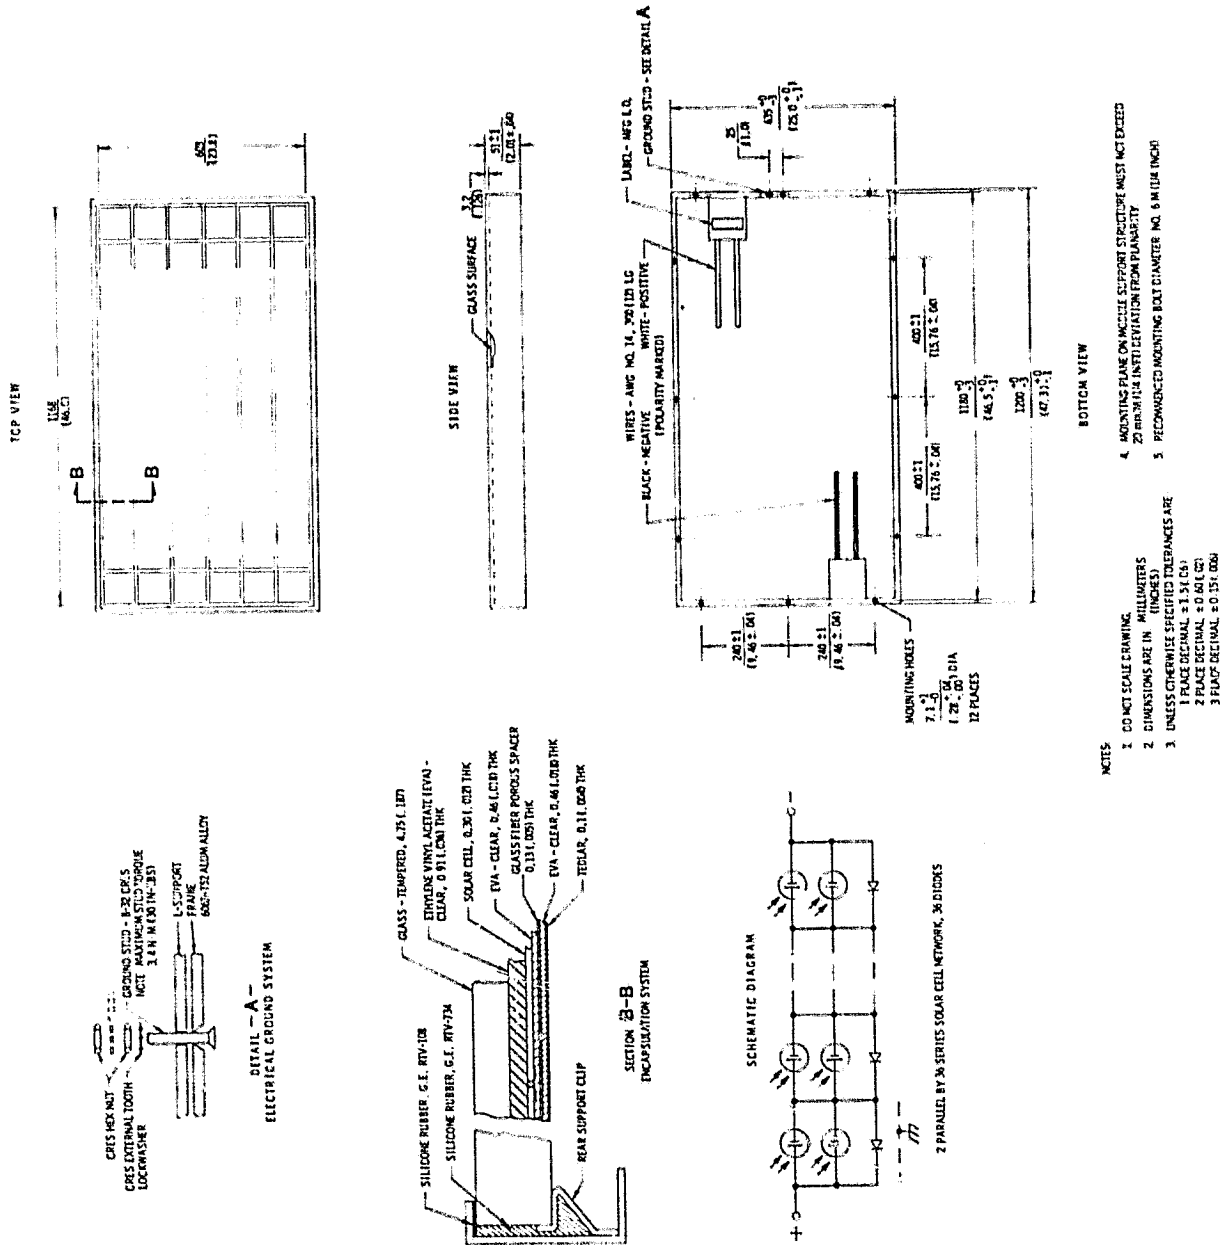


Figure 19. Solarex Module: Drawing

ORIGINAL PAGE IS
OF POOR QUALITY



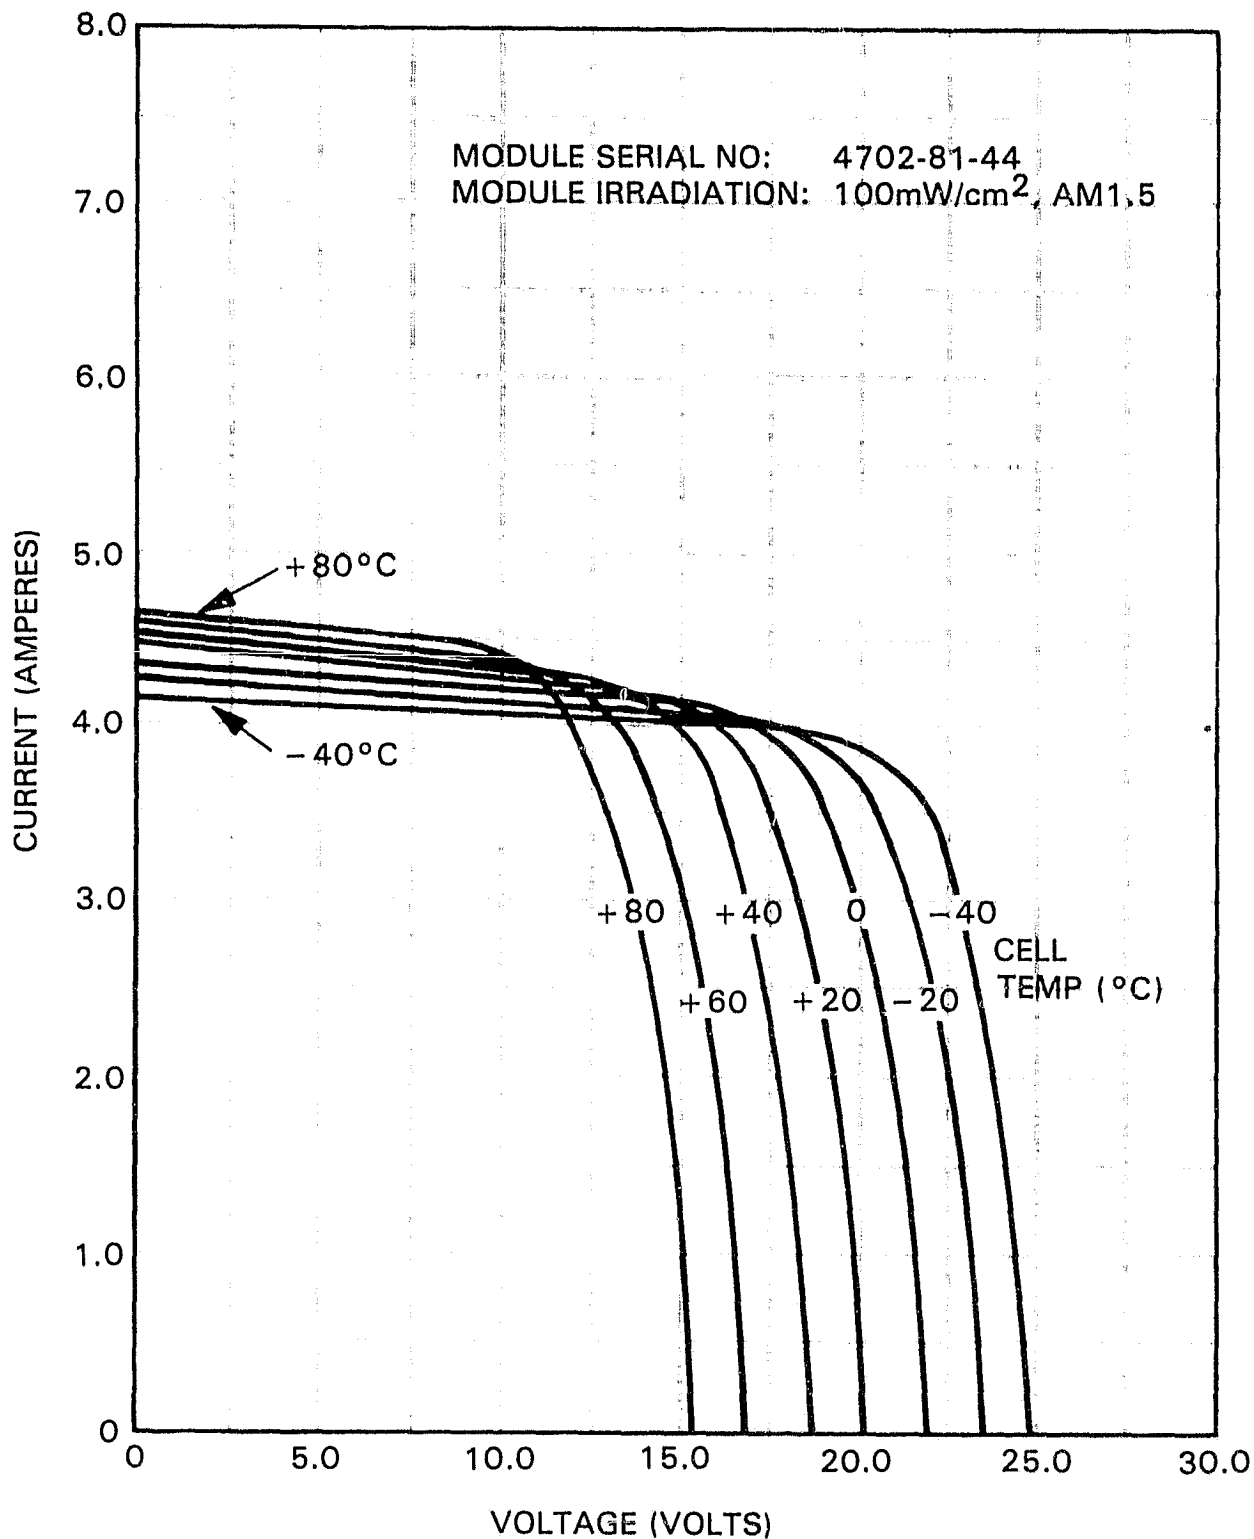


Figure 20. Solarex Module: I-V Curves

ORIGINAL PAGE
BLACK AND WHITE PHOTOGRAPH

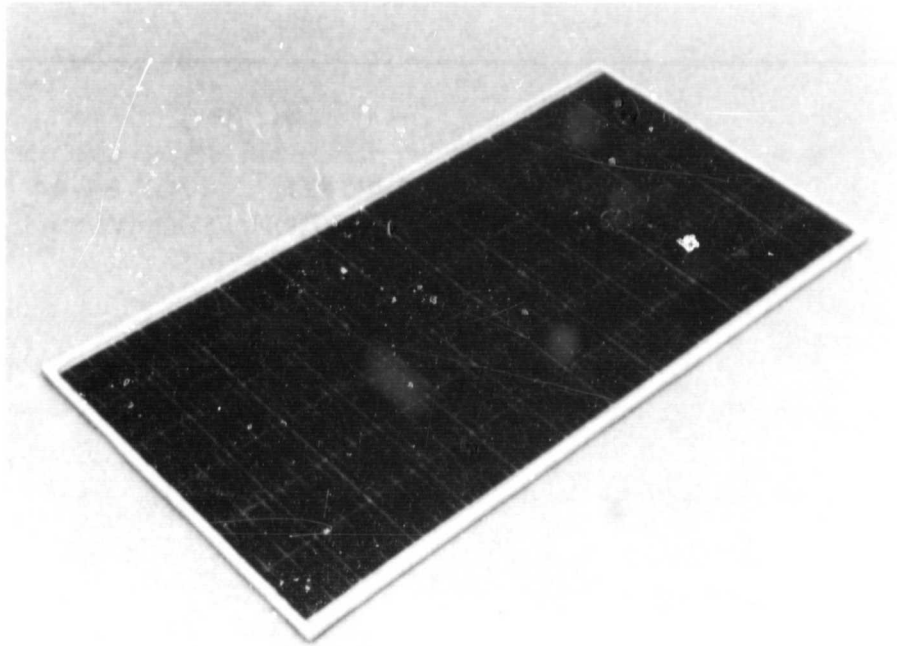

TOP

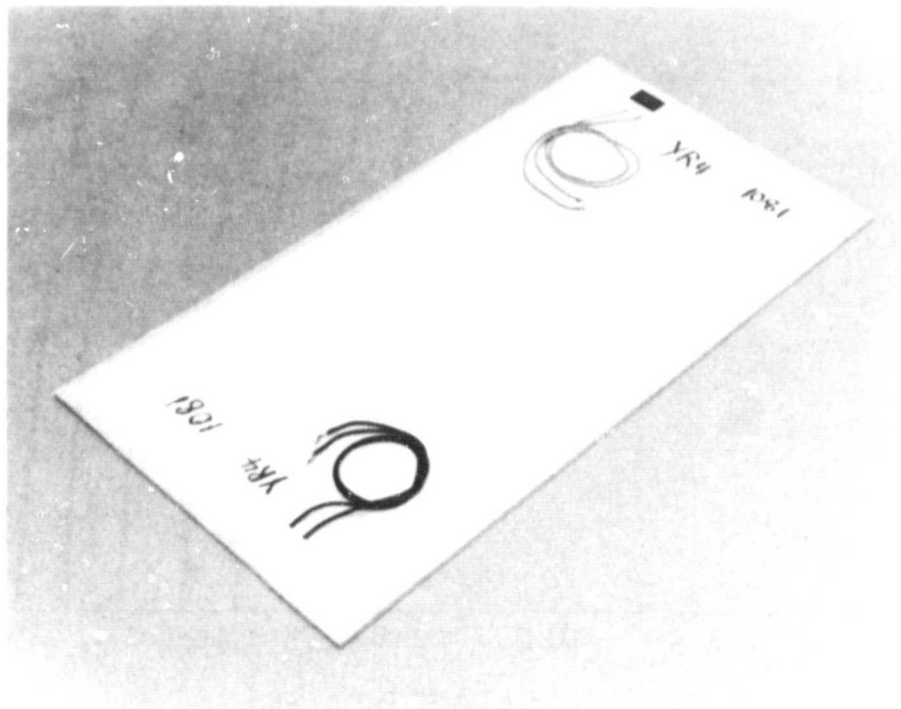


BOTTOM

Figure 21. Solarex Module (Residential): Photographic Views

[illegible]

NOTES

1. THE PURPOSE OF THIS DRAWING IS TO ILLUSTRATE THE MOUNTING PRINCIPLE. ACT TO SERVE AS A COMPLETE ROOF MOUNT DESIGN.
2. THIS MODEL IS SUITABLE FOR STANDOFF MOUNTING. AS ILLUSTRATED HERE.
3. DO NOT SCALE DRAWING.
4. DIMENSIONS ARE IN MILLIMETER (INCHES)

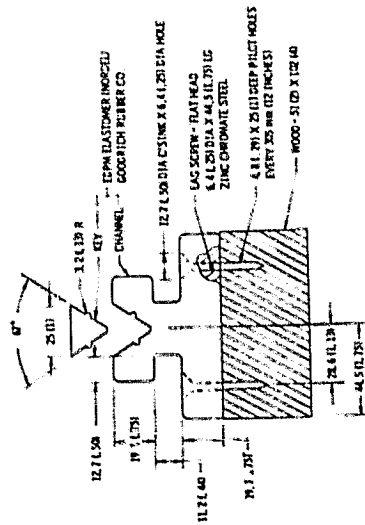

SECTION A-A
KEY-LOCK AND SUPPORT MEMBER

ORIGINAL PAGE IS
OF POOR QUALITY



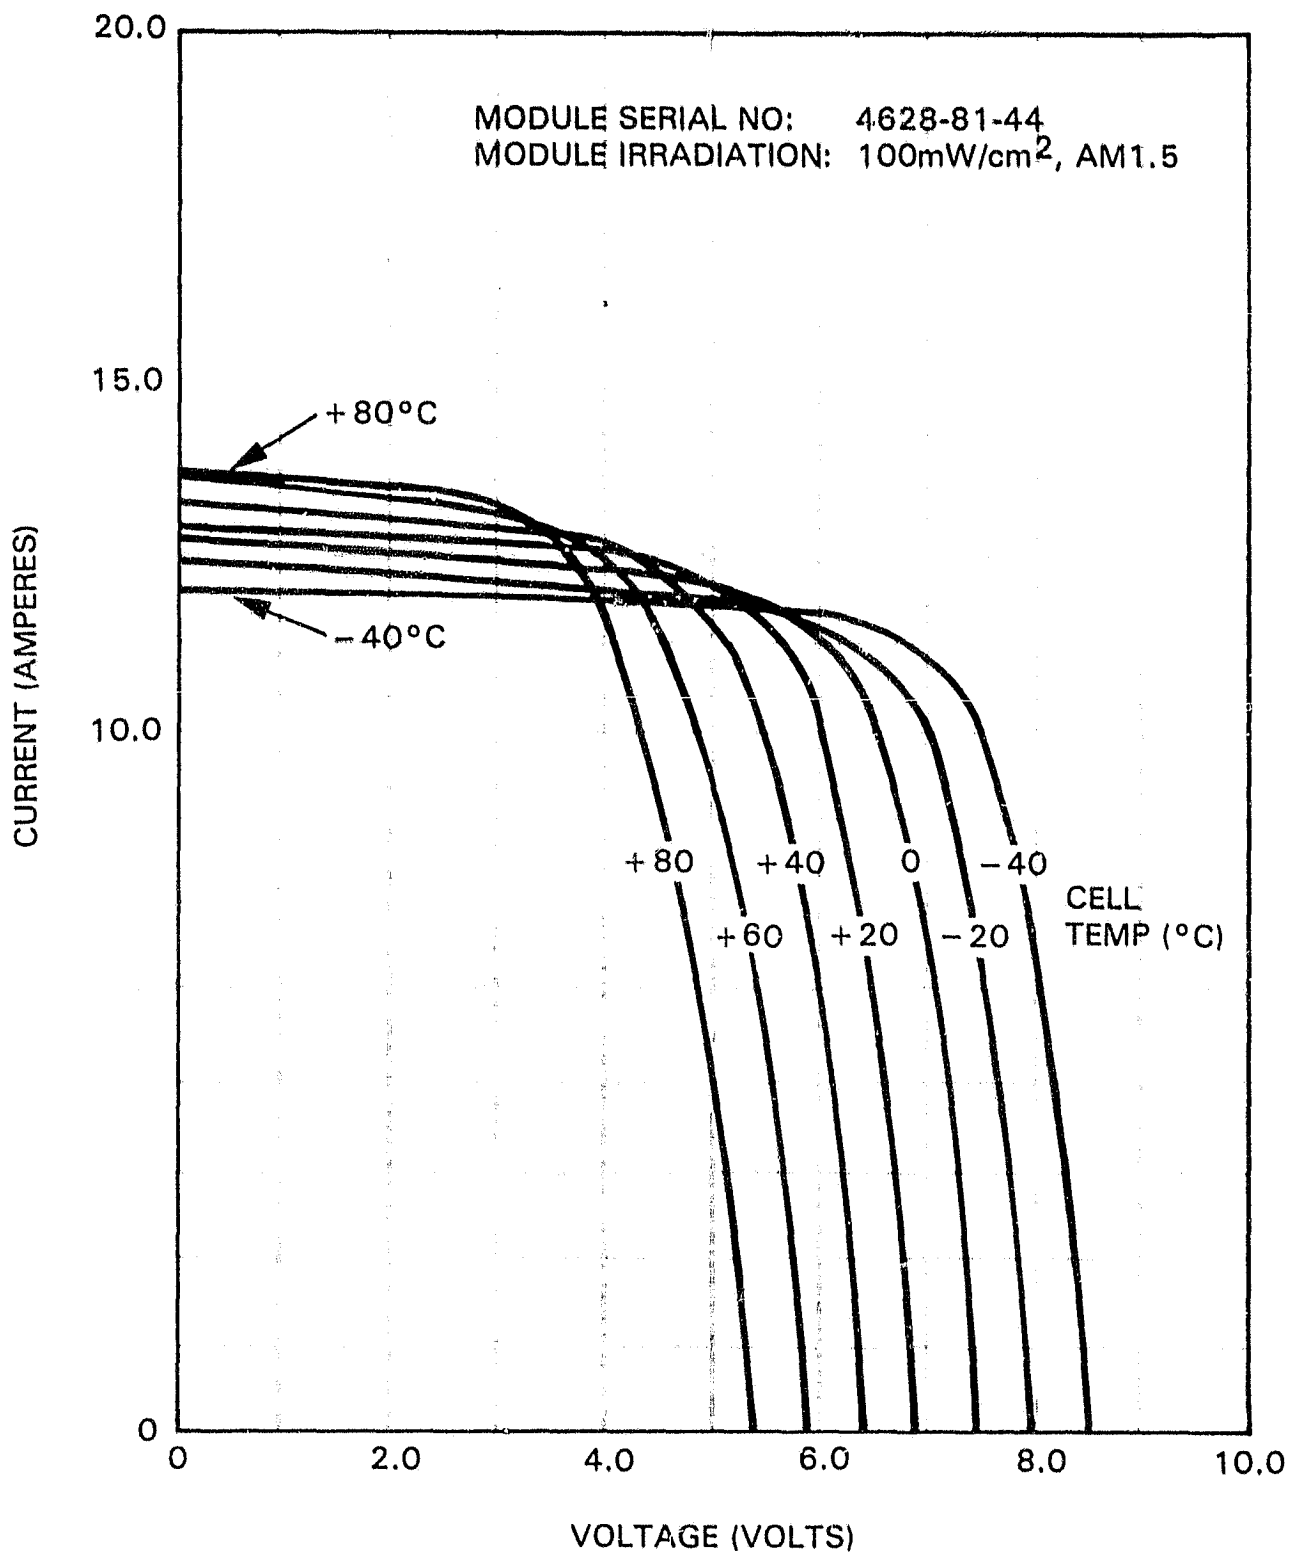


Figure 24. Solarex Module (Residential): I-V Curves

ORIGINAL PAGE IS
OF POOR QUALITY

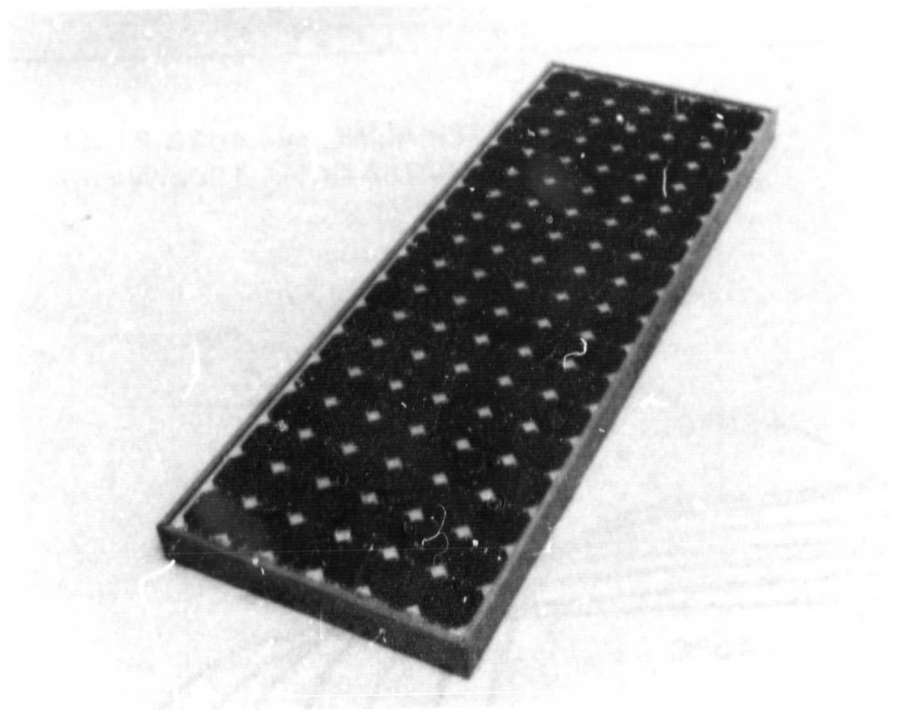

TOP

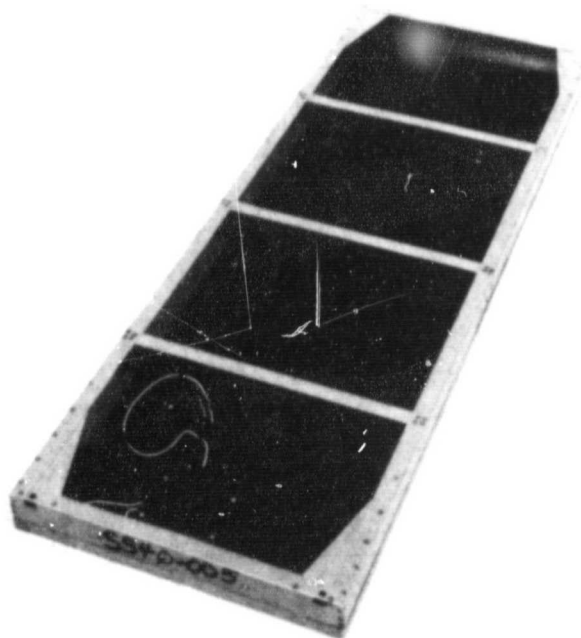

BOTTOM

Figure 25. Spire Module: Photographic Views

[illegible]

ORIGINAL OF POOR QUALITY

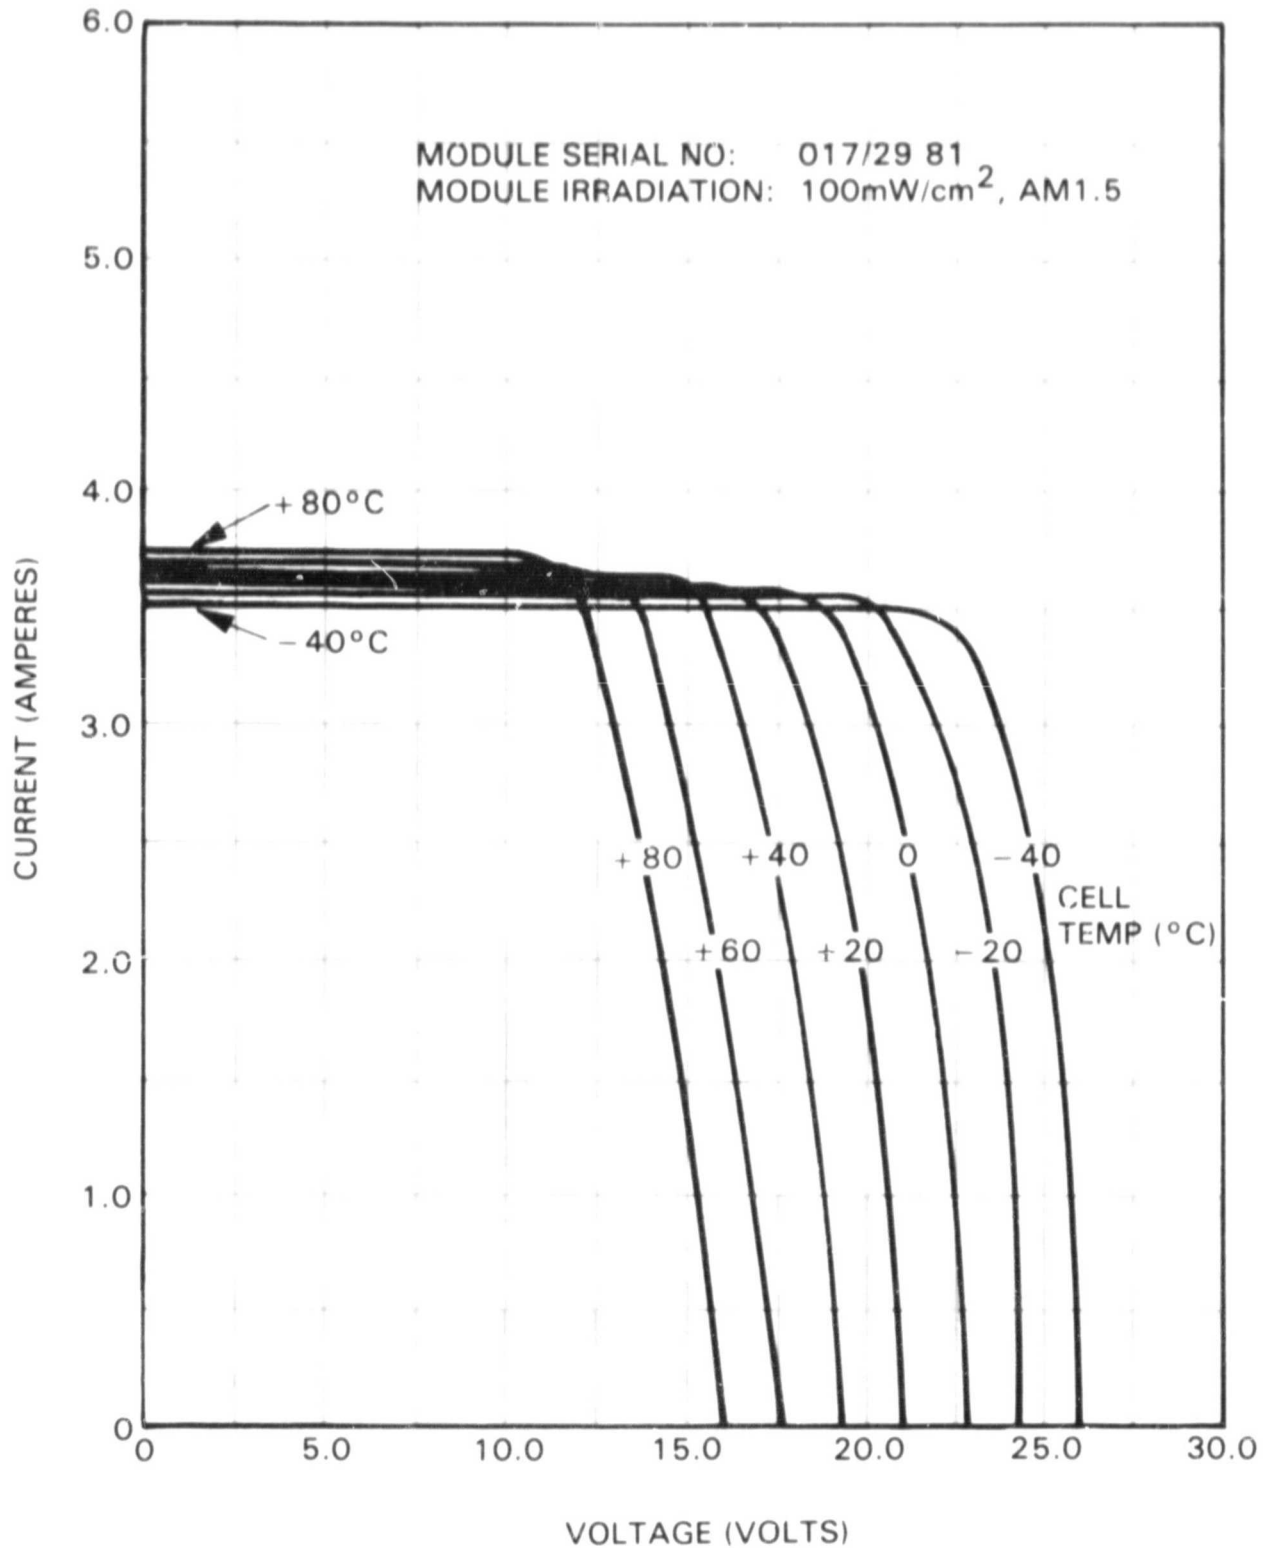


Figure 27. Spire Module: I-V Curves

REFERENCES

1. Smokler, M., User Handbook for Block II Silicon Solar Cell Modules, JPL Document No. 5101-36, Jet Propulsion Laboratory, Pasadena, California, October 15, 1977.
2. Smokler, M., User Handbook for Block III Silicon Solar Cell Modules, JPL Document No. 5101-82, Jet Propulsion Laboratory, Pasadena, California, February 1, 1979.
3. Block IV Solar Cell Module Design and Test Specification for Intermediate Load Center Applications, JPL Document No. 5101-16, Revision A, Jet Propulsion Laboratory, Pasadena, California, November 1, 1978.
4. Block IV Solar Cell Module Design and Test Specification for Residential Applications, JPL Document No. 5101-83, Jet Propulsion Laboratory, Pasadena, California, November 1, 1978.

APPENDIX A

MISCELLANEOUS MODULES

The main body of the User Handbook for Block IV Silicon Solar Cell Modules describes all modules meeting two conditions: they were purchased under the Block IV procurement, and they have successfully completed the Block IV qualification tests. This Appendix describes four additional modules that were purchased by JPL but which do not meet, at this time, one or both of the above conditions. The designs are of interest, however, in the context of Block IV technology, so it was considered useful to publish the available data as an Appendix to this User Handbook.

Two of the designs, by ARCO Solar and GE, are of modules that were part of the Block IV procurement. The ARCO Solar module was purchased under a Block IV development contract. The GE module was purchased under a Block IV production contract, but was enough different from the design that had been supplied under the preceding development contract that the design could not be considered qualified until the production modules could be submitted to qualification tests. The other two modules, by Solar Power and Solenergy, were purchased as commercial units specifically for the purpose of submitting them to the complete set of Block IV qualification tests, in contrast with other commercial modules purchased by JPL only for exploratory testing.

Of the four designs, the Solar Power module has successfully completed the qualification tests and the other three have not, at this time, progressed to completion. The qualification test program is typically an iterative process involving detection of problems, consequent redesign of the module or of the manufacturing process, and subsequent submission of modules for a repeat of the qualification tests. Since an essential part of this sequence of events is an option of the manufacturer, it cannot be predicted whether the sequence will, for any of the latter three designs, be pursued to the point of successful completion of the qualification tests. Should the manufacturer of any of these three designs elect to pursue the sequence fully, his final module design may differ from that shown here.

A detailed description of each of the four modules is given in Table A-1, Module Characteristics. Some of these details are given in the form of references to photographs, drawings, and I-V curves, all of which are included in this Appendix.

Table A-1. Miscellaneous Module Characteristics

| Manufacturer | ARCO Solar | GE | Solar Power | Solenergy |
|---|-------------------|-----------------|-----------------|-----------------------|
| MFR's Part No. | 012431-F | 47E258296G1-NC | LG12-361-G | 0444-Q HEM |
| Module Type ^a | RES | RES | INT | INT |
| IDENT | | | | |
| PHYSICAL | | | | |
| Photographic Views | Figure A-1 | Figure A-5 | Figure A-9 | Figure A-12 |
| Overall Dimensions [mm (in.)] | | | | |
| Length | 1200 (47.2) | 818 (32.2) | 1199 (47.2) | 1198 (47.2) |
| Width | 583 (23.0) | 628 (24.7) | 302 (11.9) | 454 (17.9) |
| Height | 19 (0.8) | 7.6 (0.3) | 60 (2.4) | 44 (1.7) |
| Weight kg(lbs) | 5.2 (11.4) | 4.0 (8.8) | 6.0 (13.2) | 13.0 (28.6) |
| Support Structure Planarity | note c | note c | 20 (0.25) | note c |
| Rqnt [mm/m (in./ft)] ^b | Figure A-2 | Figure A-6 | Figure A-10 | Figure A-13 |
| Module Drawing and Materials | Figure A-3 | Figure A-7 | Figure A-10 | Figure A-13 |
| Module Installation | Figure A-2 | Figure A-6 | Figure A-10 | Figure A-13 |
| Electrical Connections | | | | |
| Cells | | | | |
| Quantity | 60 | 19 | 36 | 44 |
| Size [mm (in.)] | Dia: 102.9 (4.05) | Dia: 100 (3.94) | Dia: 100 (3.94) | 100 x 100 (3.9 x 3.9) |
| Packing factor | 0.79 | 0.76 | 0.76 | 0.81 |
| Base material | Cz | Cz | Cz | HEM |
| Junction | n/p | n/p | p/n | p/n |
| Front metallization | Printed Ag | Printed Ag | Ni-Solder | Au-Ni-Solder |
| Back metallization | Printed Al, Ag | Printed Ag | Ni-Solder | Au-Ni-Solder |
| ELECTRICAL | | | | |
| Nominal Performance ^d | | | | |
| Power, rated (watts) | 49.0 | 15.0 | 27.3 | 33.8 |
| Voltage, rated (volts) | 7.7 | 7.0 | 15.0 | 4.0 |
| Current Amps | 6.4 | 2.14 | 1.82 | 8.4 |
| SOC Performance ^{e, f} | | | | |
| Power, maximum (watts) | 48.8 | 15.5 | 27.3 | 32.2 |
| Voltage at max power (volts) | 7.8 | 6.81 | 15.0 | 3.81 |
| Current at max power (amps) | 6.26 | 2.27 | 1.82 | 8.46 |
| Voltage, open circuit (volts) | 10.2 | 9.40 | 19.9 | 5.30 |
| Current short circuit (amps) | 7.0 | 2.59 | 2.04 | 9.68 |
| Fill factor | 0.68 | 0.64 | 0.67 | 0.63 |
| Efficiency, Module (%) | 8.0 | 7.9 | 7.5 | 5.9 |
| Eff., encapsulated cell (%) | 10.1 | 10.4 | 9.9 | 7.3 |
| 28°C Performance ^f | | | | |
| Power, maximum (watts) | 59.5 | 20.0 | 30.9 | 38.4 |
| Voltage at max power (volts) | 9.4 | 8.9 | 13.3 | 4.52 |
| Current at max power (amps) | 6.36 | 2.25 | 1.78 | 8.50 |
| Voltage, open circuit (volts) | 11.6 | 11.1 | 21.8 | 6.04 |
| Current, short circuit (amps) | 6.94 | 2.60 | 2.03 | 9.55 |
| Fill factor | 0.73 | 0.69 | 0.70 | 0.66 |
| Efficiency, module (%) | 9.7 | 10.2 | 8.5 | 7.0 |
| Eff., encapsulated cell (%) | 12.3 | 13.4 | 11.2 | 8.6 |
| I-V Curves ^f | Figure A-4 | Figure A-8 | Figure A-11 | Figure A-14 |
| Circuit Diagram | Figure A-2 | Figure A-6 | Figure A-10 | Figure A-13 |
| Breakdown Voltage. Min. (Vdc) ^{b, g} | note c | note h | 2000 | note c |

Table A-1. Miscellaneous Module Characteristics (Cont'd)

| | ARCO Solar | | GE | Solar Power | | Solenergy |
|--|-------------------|----|-------------------|-------------------|----|-------------------|
| | 65 | 55 | 68 | 54 | 47 | 58j |
| Thermal | | | | | | |
| Nominal Operating Cell Temperature, NOCT (°C) ^e At 100 mW/cm ² insolation | | | | | | |
| At 80 mW/cm ² insolation | | | | | | |
| Temperature Coefficients ⁱ $\Delta V/\Delta T$ (Volts/°C) $\Delta I/\Delta T$ (amps/°C) | -0.047 +0.0009 | | -0.047 +0.0009 | -0.078 +0.0011 | | -0.027 +0.0059 |
| ENVIRONMENT | | | | | | |
| Temperature range (°C) ^b | note c | | note c | -40 to +90 | | note c |
| Humidity, max relative (%) ^b | note c | | note c | 90 | | note c |
| Wind load, max [kPa (lbs/ft ²)] ^b | note c | | note c | +2.4 (+50) | | note c |
| Hail impact, max hailstone [mm (in.)] ^b | note c | | note c | 20.0 (0.75) | | note c |

NOTES

^aNTI = Module intended for use in intermediate-load centers, defined here as installations providing 20 kW to 500 kW.

^bES = Module intended for use on single-family residence in installations providing 2 kW to 10 kW.

^cThe data given are tested limits, not module limits. For details see Appendix B (Qualification Test Program).

^dQualification (see Appendix B) not completed at this time.

^eEach module is expected to produce not less than 90% of rated power when loaded to provide rated voltage under Standard Operating Conditions (SOC), i.e.:

1. Module irradiated with 100 mW/cm² insolation at air mass 1.5 (AM1.5) spectrum.
2. Cell temperature equal to NOCT (per Block IV Specifications; see note e).

^fThe Block IV Specifications define NOCT (Nominal Operating Cell Temperature) as the cell temperature with the module in the Standard Thermal Environment defined as follows:

Insolation = 100 mW/cm²
Air temperature = 20°C
Average wind velocity = 1 m/s
Electrical load = open circuit
Mounting = normal to solar noon on structure typical of application

Practice at the time of publication is to measure NOCT with the module in the Nominal Thermal Environment, which is the same as the Standard Thermal Environment except that the insolation level is 80 mW/cm².

The data presented here for each module design were obtained by measurement and extrapolation of the performance of one sample module of that design. The radiation source was a Large-Area Pulsed Solar Simulator calibrated by use of a calibrated reference cell of the same spectral response as the module to irradiate the module with the equivalent of 100 mW/cm² at AM1.5. Module temperature was approximately 20°C. Extrapolation was performed by computer, based upon a set of measured temperature coefficients (voltage, current, and series resistance) for each module design. The resultant families of I-V curves for the sample modules are given in Figures A-4, A-8, A-11, and A-14.

^gModules should not be series-connected to obtain system voltages under worst-case conditions (100 mW/cm² insolation, 0°C cell temperature, open circuit) exceeding:


500 volts for intermediate load modules
250 volts for residential modules

^hNot applicable. This module has no exposed conductive surface and is intended for installation in a non-conductive assembly.


ⁱThese coefficients are for use in the neighborhood of the maximum power points on the module I-V curves. They are useful for determining power output at a selected voltage and temperature when the available I-V curve was made at a different temperature. For details see Reference 3, Appendix B.

^jEstimate; based on small data sample

ORIGINAL PAGE IS
OF POOR QUALITY

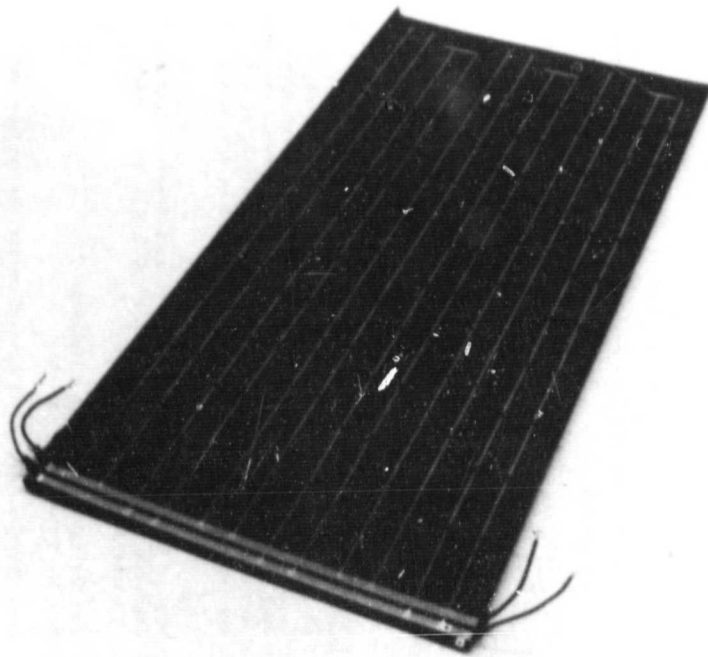

TOP

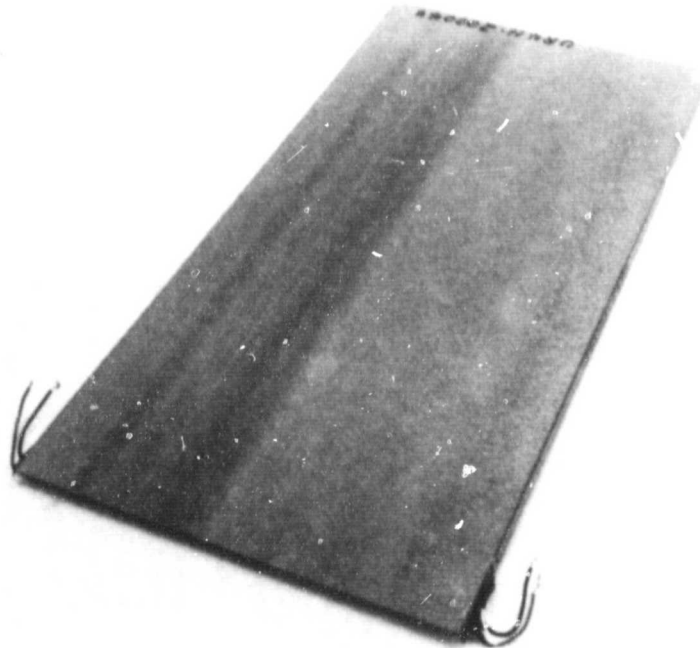

BOTTOM

Figure A-1. ARCO Solar Module (Residential): Photographic Views

[illegible]

[illegible]

Figure A-3. ARCO Solar Module (Residential): Installation

ORIGINAL PAGE IS
OF POOR QUALITY



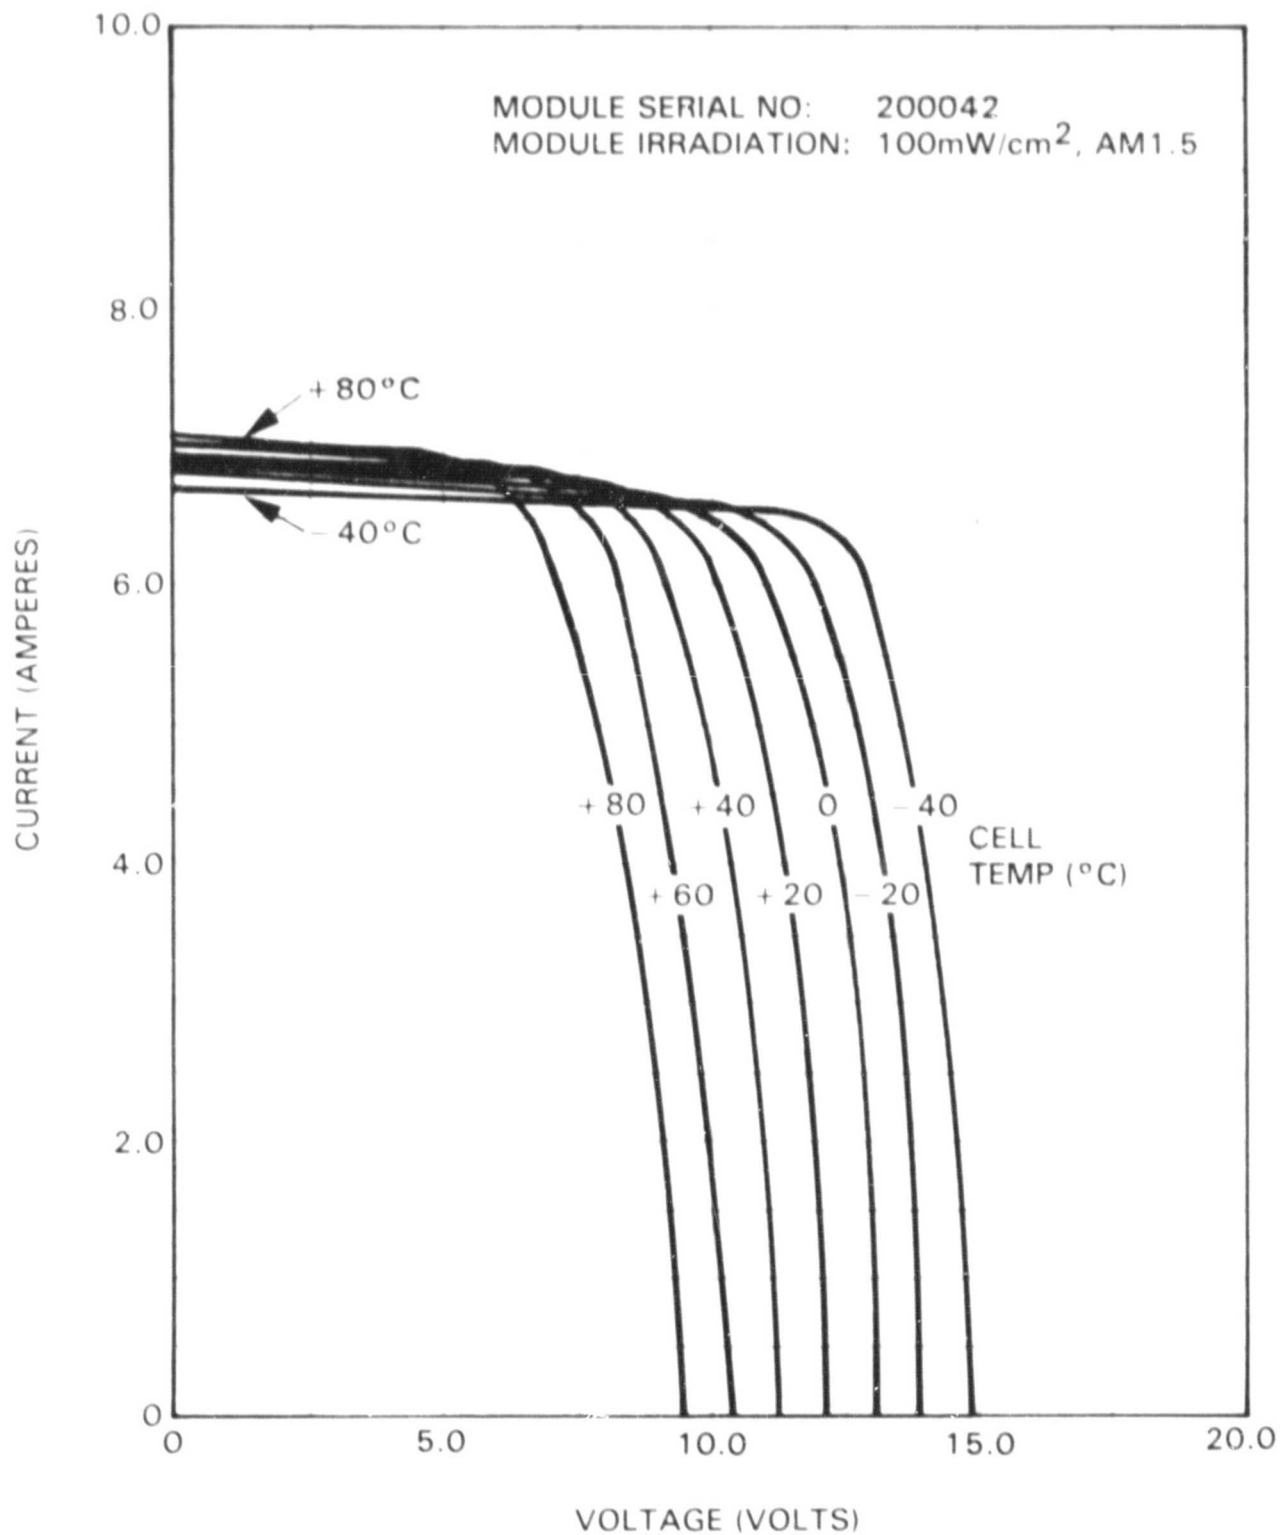


Figure A-4. ARCO Solar Module (Residential): I-V Curves

ORIGINAL PAGE IS
OF POOR QUALITY

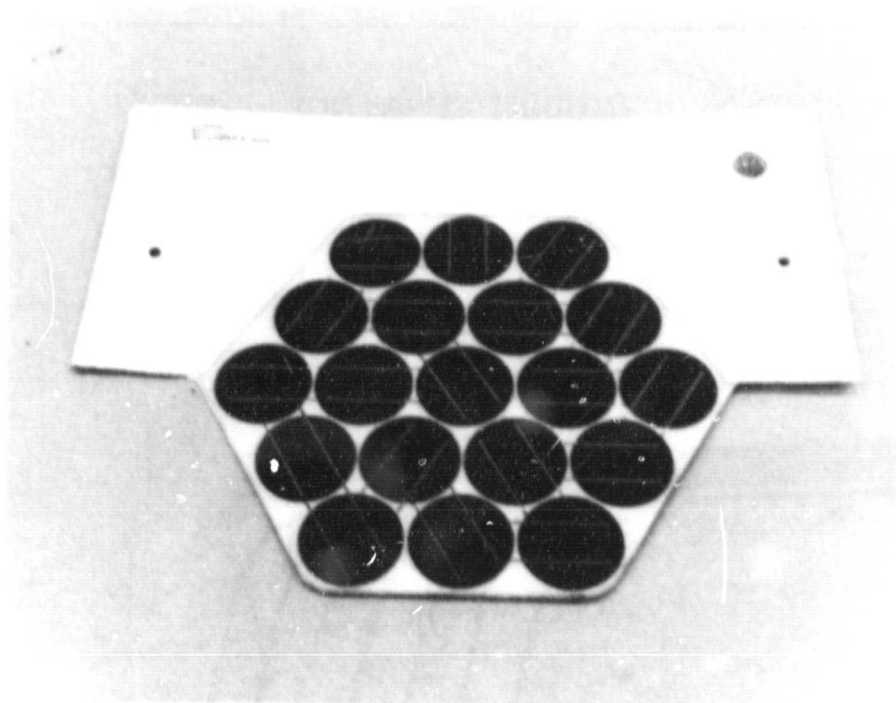

TOP

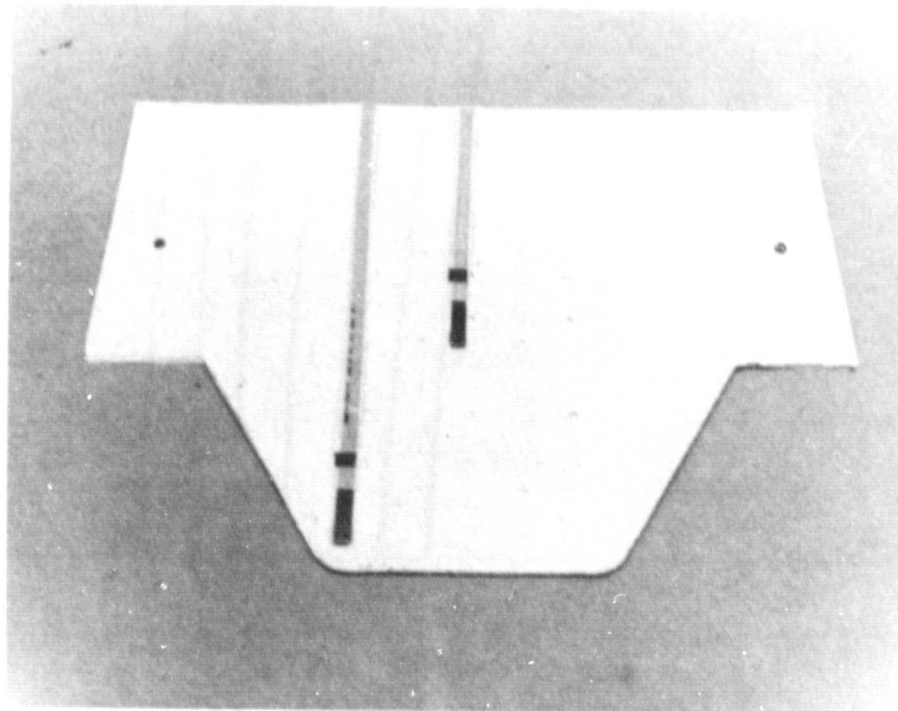

BOTTOM

Figure A-5. GE Module (Residential): Photographic Views

ORIGINAL PAGE IS
OF POOR QUALITY

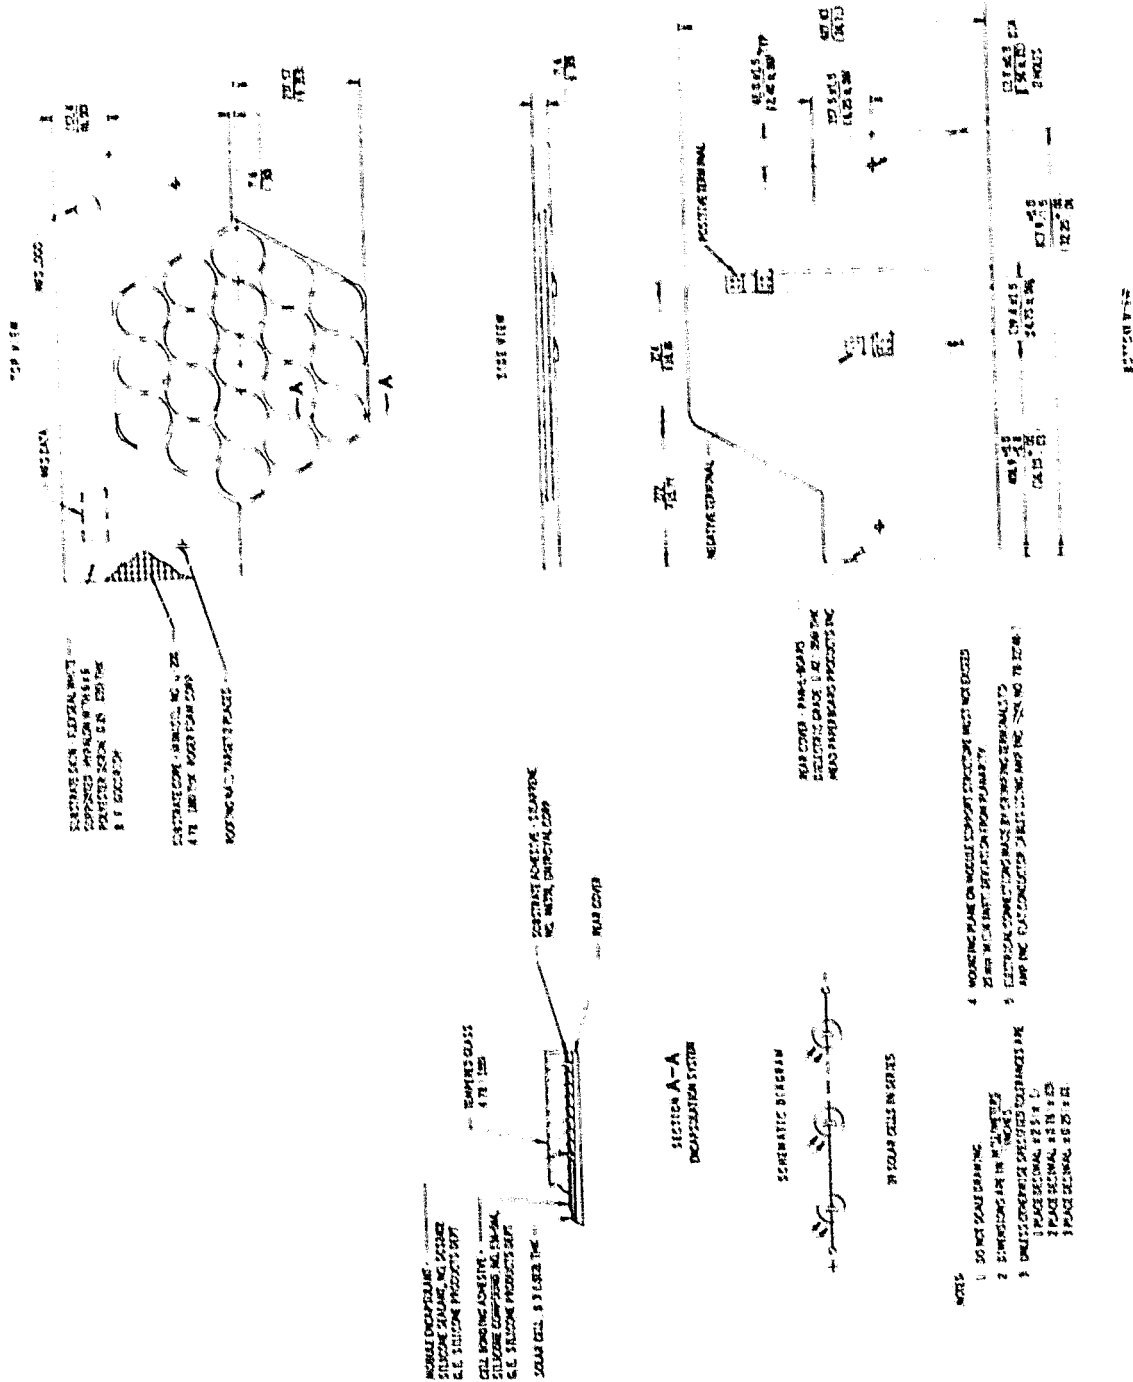


Figure A-6. GE Module (Residential): Drawing

ORIGINAL PAGE IS
OF POOR QUALITY

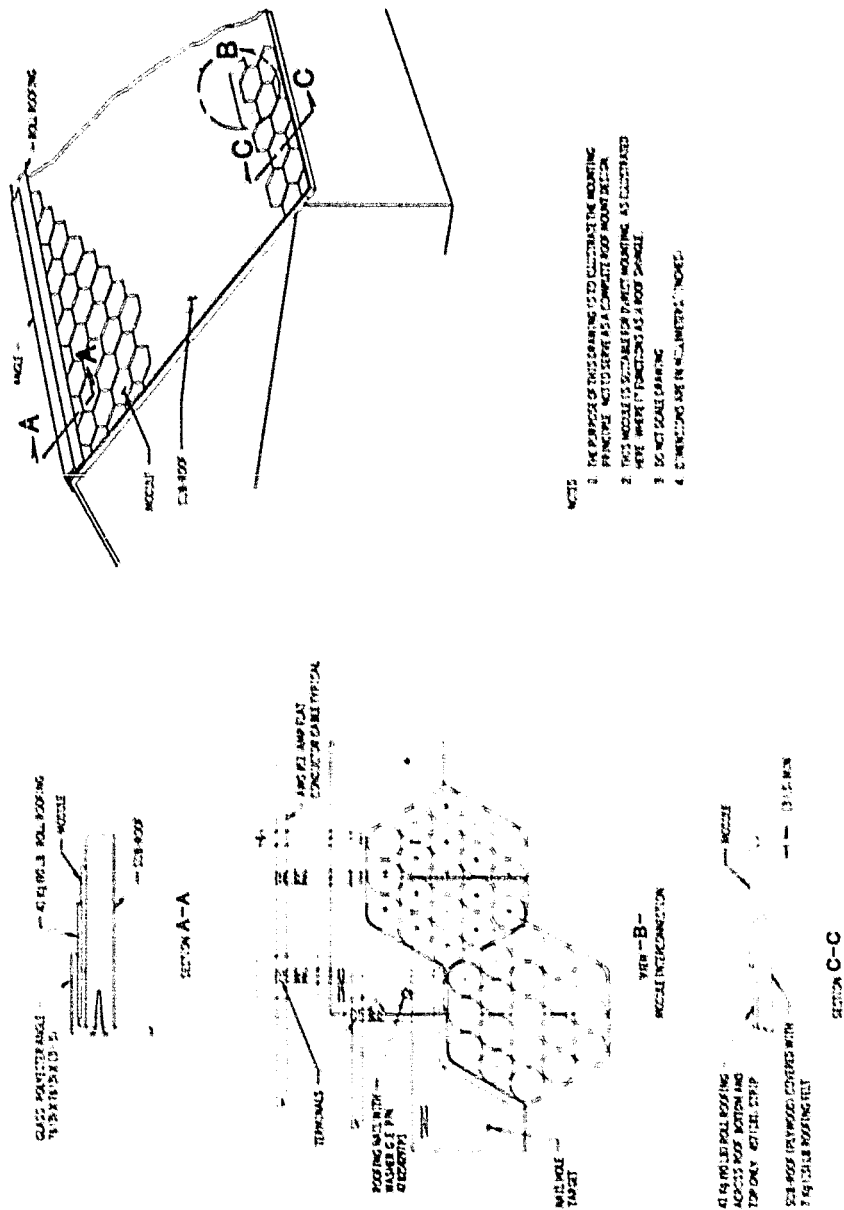


Figure A-7. GE Module (Residential): Installation

ORIGINAL PAGE IS
OF POOR QUALITY


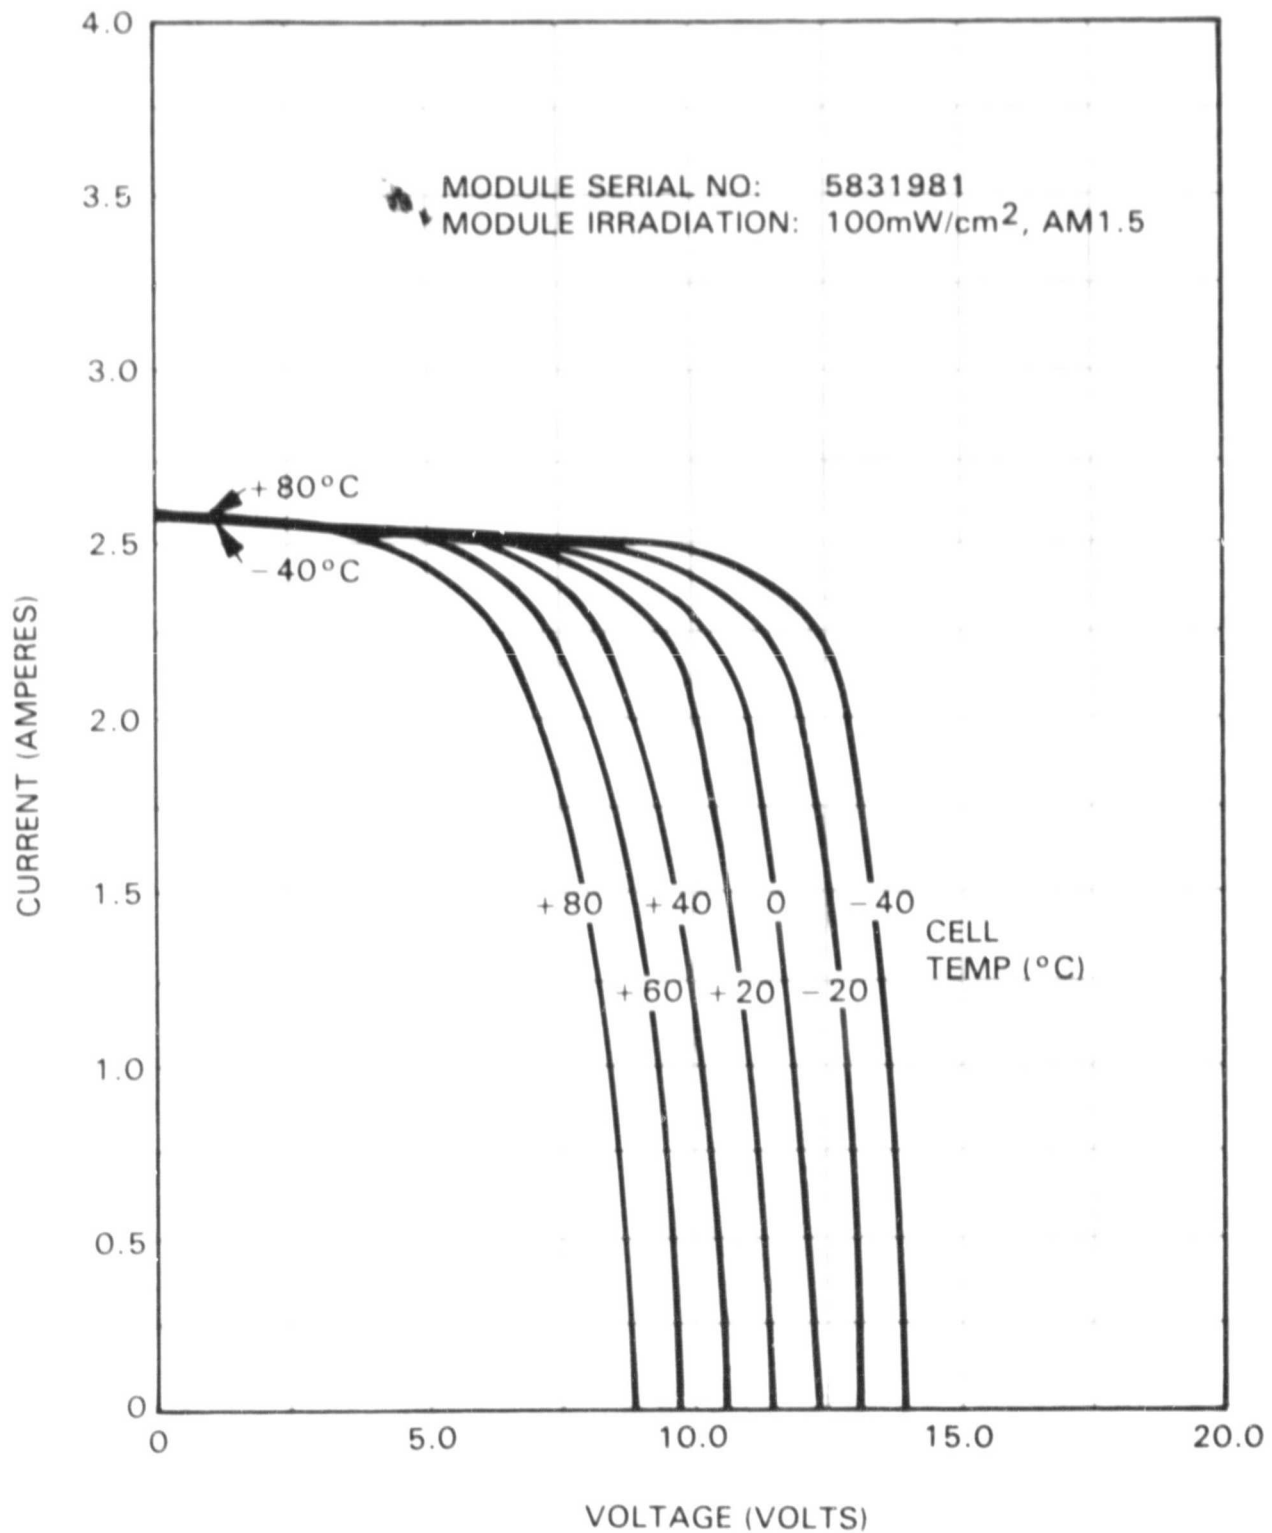


Figure A-8. GE Module (Residential): I-V Curves

ORIGINAL PAGE
BLACK AND WHITE PHOTOGRAPH



TOP

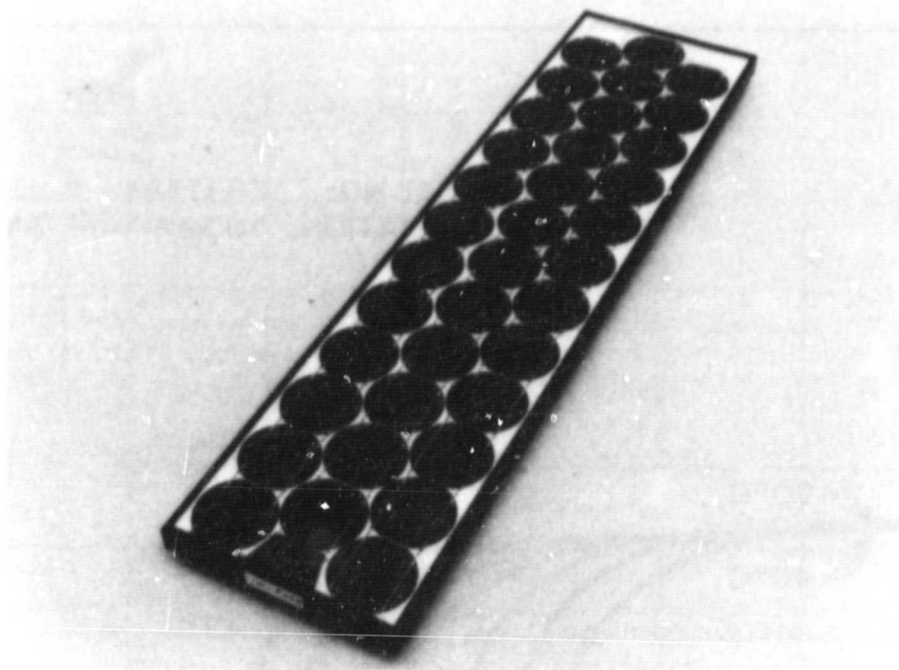

BOTTOM

Figure A-9. Solar Power Module: Photographic Views

A-13

ORIGINAL I-V CURVES
OF POOR QUALITY



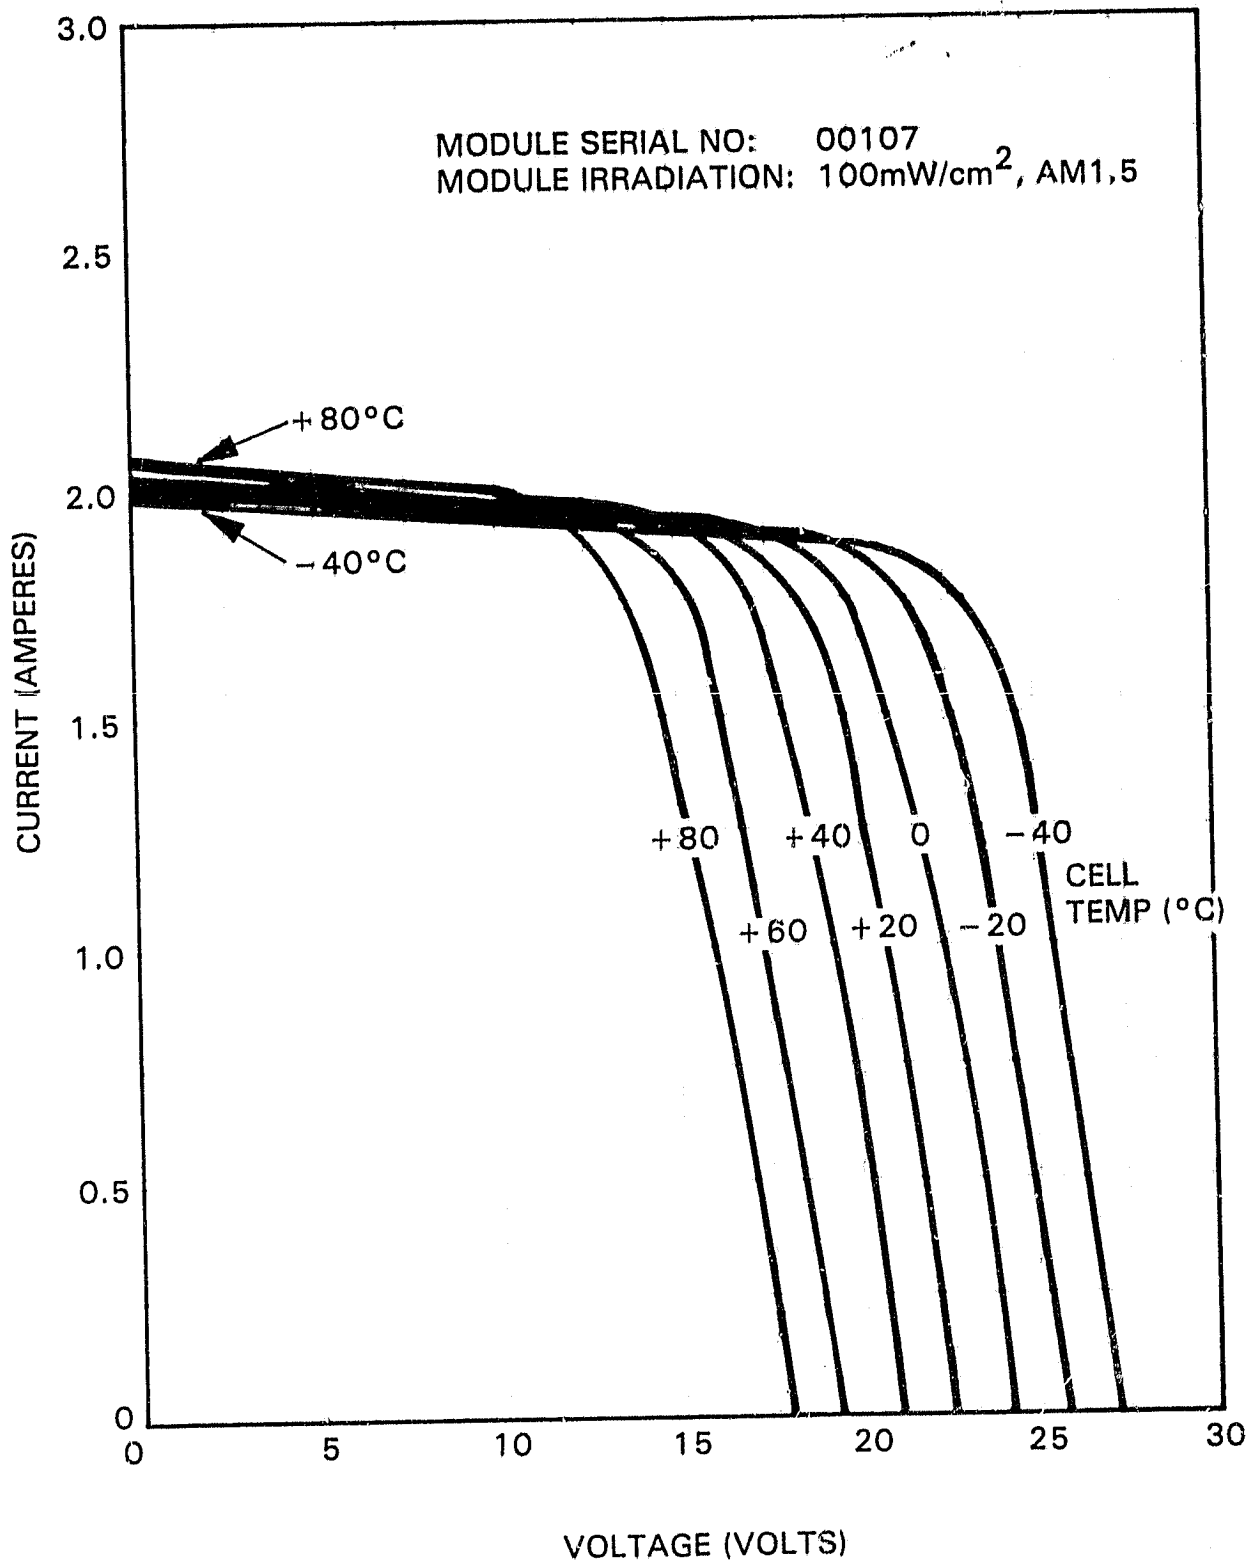


Figure A-11. Solar Power Module: I-V Curves

ORIGINAL PAGE
BLACK AND WHITE PHOTOGRAPH

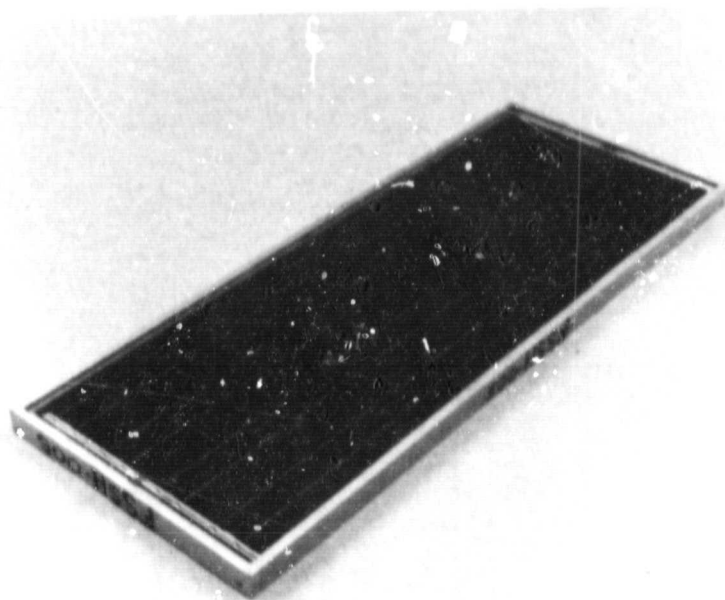

TOP

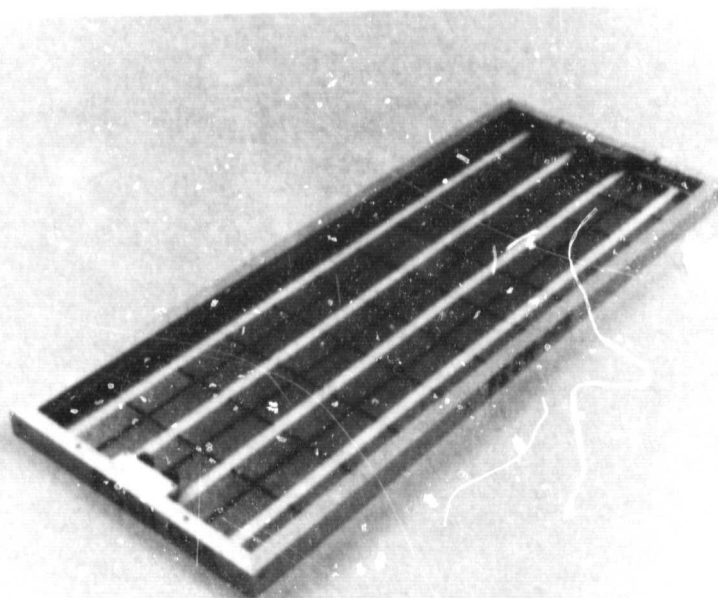

BOTTOM

Figure A-12. Solenergy Module: Photographic Views

ORIGINAL PAGE IS
OF POOR QUALITY.

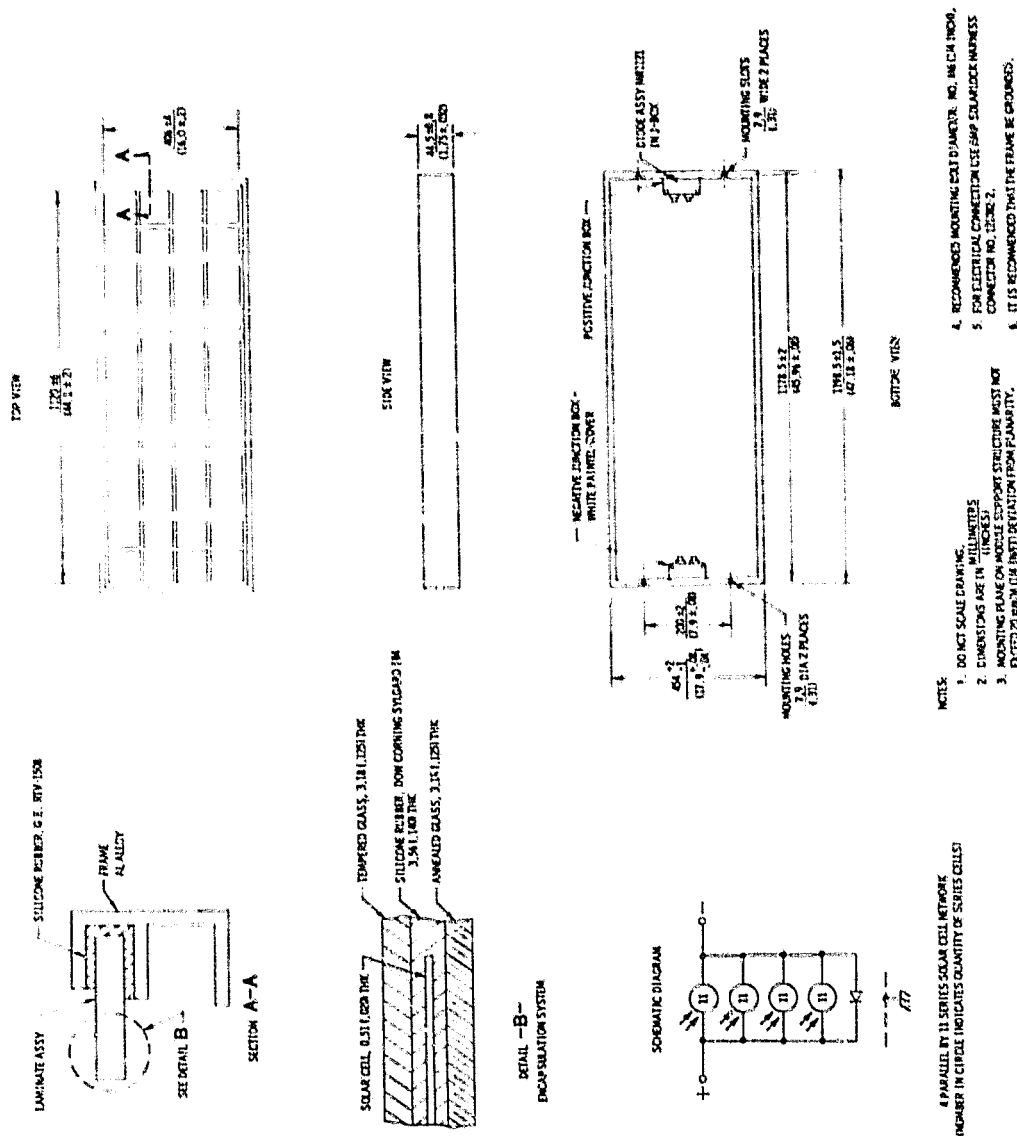


Figure A-13. Solenergy Module: Drawing

ORIGINAL FILE IS
OF POOR QUALITY

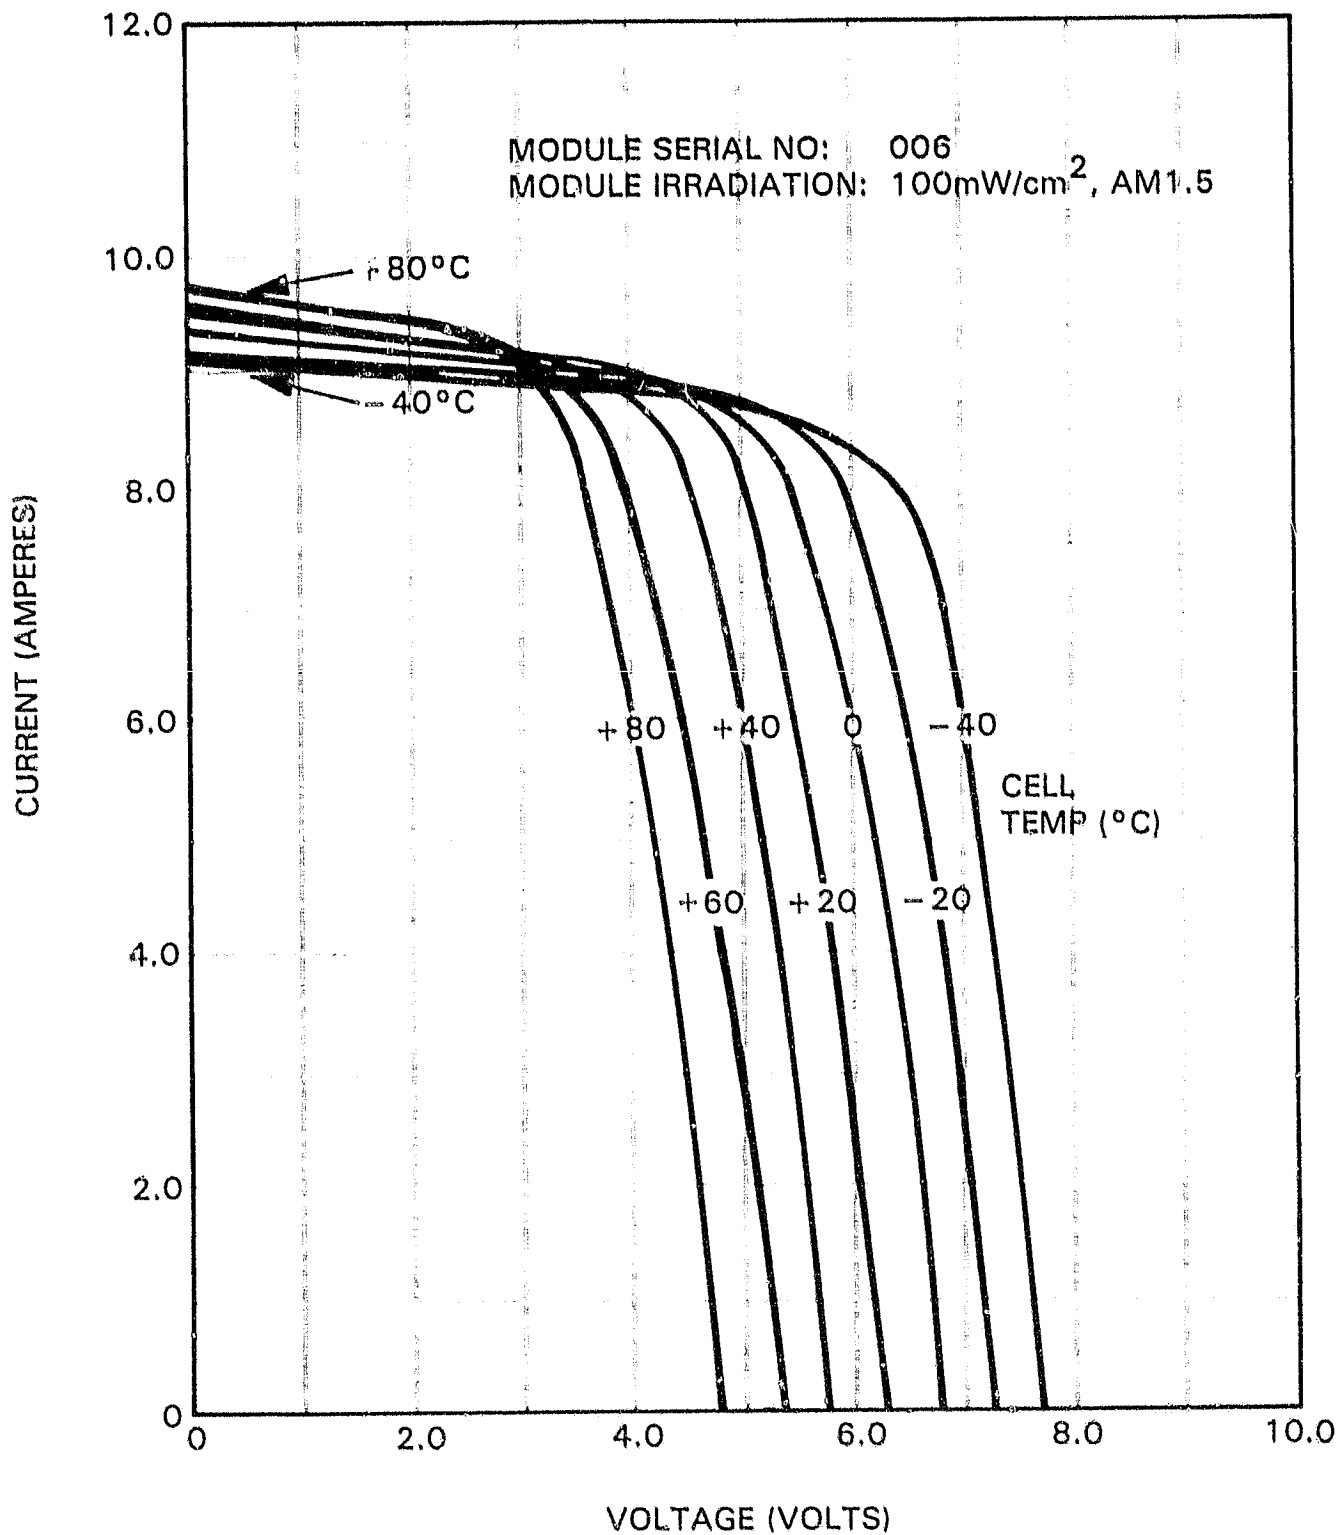


Figure A-14. Solenergy Module: I-V Curves

APPENDIX B

QUALIFICATION TEST PROGRAM

Each Block IV design was subjected to a series of qualification tests to prove compliance with the required ranges of environmental exposure. Typically, four modules were used for most tests. Qualification of a design means that modules of that specific detailed design and processing have been shown capable of withstanding the stresses of the test program without more than 5% power degradation, without visible degradation exceeding preselected criteria, and without failure of a dielectric breakdown test.

The Block IV qualification tests are defined in References 3 and 4. A simplified description of the tests is presented here for convenience in understanding the data in this User Handbook.

The block diagram in Figure B-1 shows the qualification test sequence with the names of individual tests given in blocks that are alphabetically coded to key them to the descriptions below. Note that some tests occur more than once in the sequence. The description of each test is as follows:

A. Visual Inspection

This consists of detailed visual examination of the module for mechanical degradation exceeding preselected criteria for that module design. The criteria reflect a judgment of degradation that threatens continued successful performance of the module. Such degradation may appear as breaks, cracks, delamination, spalling, etc.

B. Ground Continuity

This test verifies that, in a module with exposed external conducting surfaces (such as a metal frame), electrical continuity exists between all such surfaces and the module grounding point, with resistance to the grounding point not greater than 50 milliohms.

C. Dielectric Breakdown

This test verifies that the insulation between the (shorted-together) output terminals of the module and module metal frame or ground will not suffer dielectric breakdown when subjected to 2000 Vdc for an intermediate-load module or 1500 Vdc for a residential module. The voltage is applied at a rate not exceeding 500 V/s up to the test value and then held constant for 1 min. Failure is defined as arcing, flashover, or leakage current exceeding 50 A. For modules not required to have a grounding point, the test is done with the module installed in a mounting structure, with the test voltage negative connection contacting the mounting structure. For residential modules, the test does not apply if the module is intended to be mounted in a non-conductive assembly.

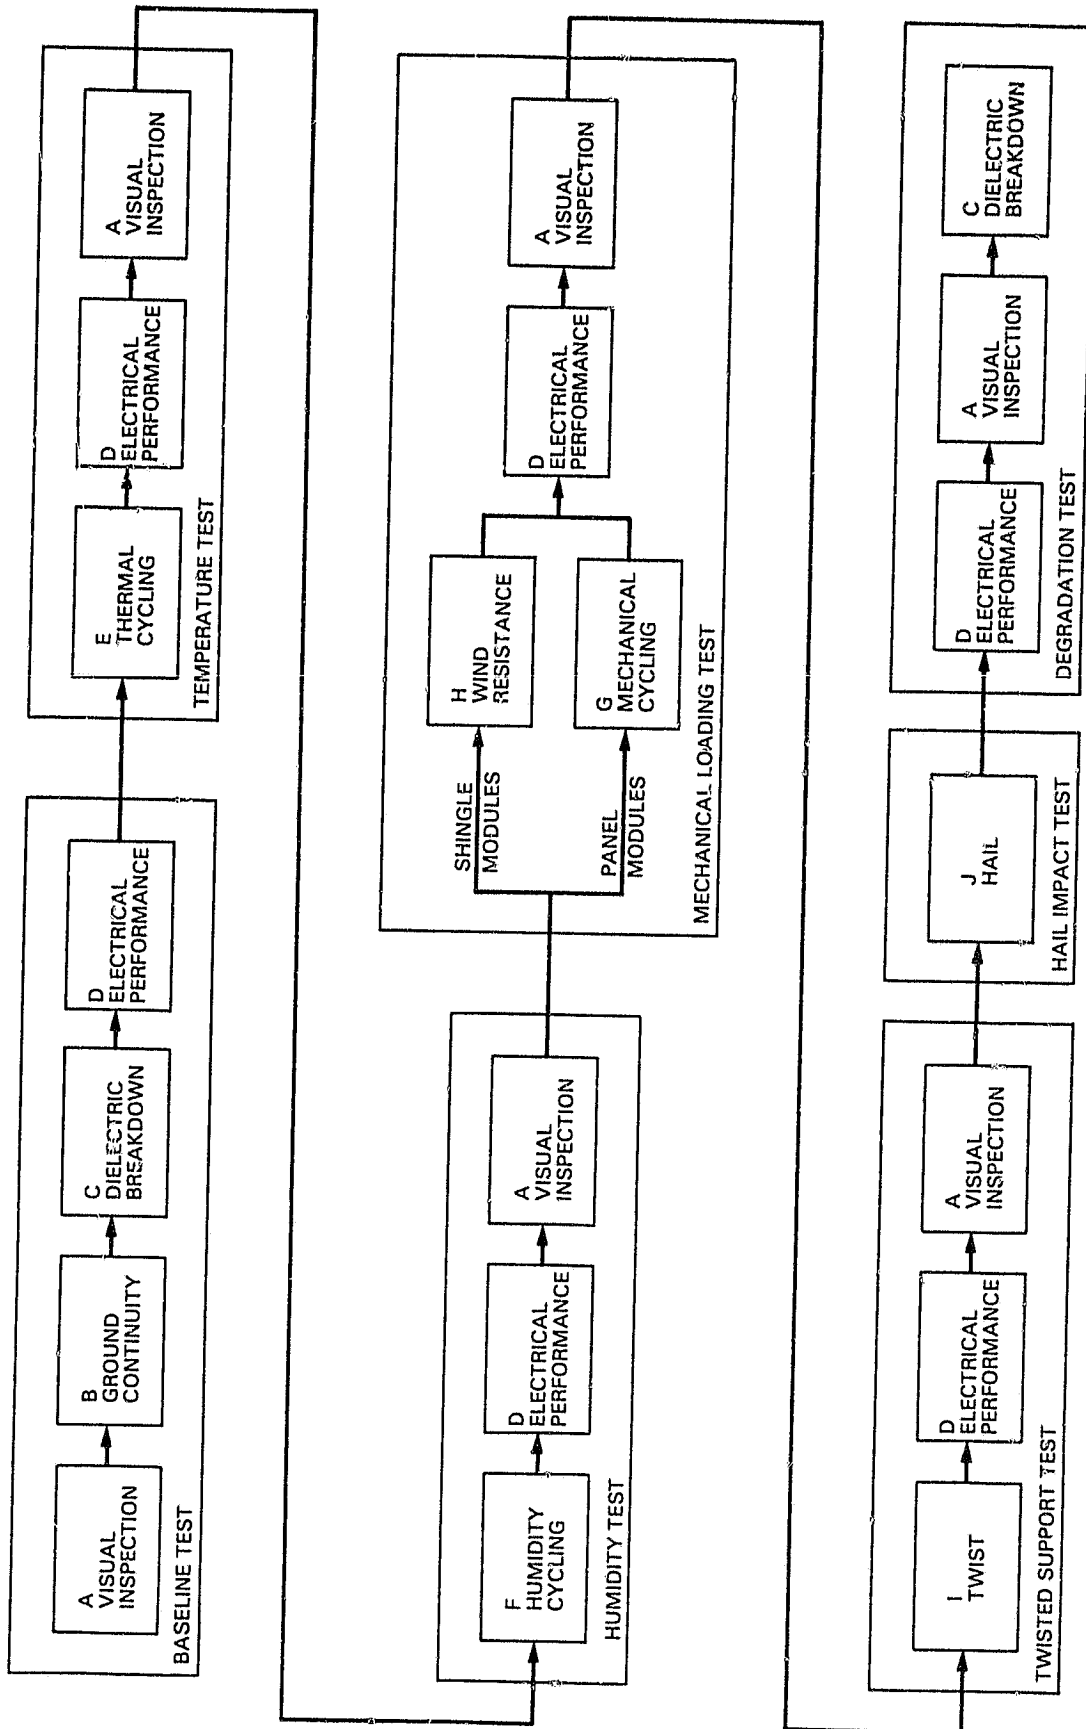


Figure B-1. Qualification Test Sequence

Although not part of the qualification test specification, by agreement with the Block IV manufacturers an additional dielectric breakdown test was done with the polarity reversed, i.e., with negative voltage on the module output terminals and positive voltage on the grounding point or mounting structure as applicable.

D. Electrical Performance

The purpose of this test is to obtain current-voltage (I-V) characteristic curves, first to establish a performance baseline, and subsequently to examine for performance degradation resulting from the stresses of the qualification tests. The criteria for excess degradation is a reduction in maximum power (measured at 100 mW/cm², AM1.5 input and 28°C cell temperature) exceeding 5%.

An additional purpose of the baseline electrical performance test is to verify that the module power output is acceptable, defined as not less than 90% of the nominal power expected from the module at its stipulated nominal output voltage and at 100 mW/cm², AM1.5 input, with cell temperature equal to Nominal Operating Cell Temperature (NOCT). For this purpose the module I-V curve is measured at the same irradiance but with the cells at room temperature. The room-temperature data are then extrapolated, using module temperature coefficients, to calculate module power at NOCT at the nominal output voltage.

E. Thermal Cycling

This test requires that the module be subjected to 50 cycles of cell-temperature variation between -40°C and +90°C. The variation is approximately linear, at a rate not exceeding 100°C per hour, with a period not exceeding six hours per cycle.

F. Humidity Cycling

This test requires that the module be subjected to the humidity regime depicted in Figure B-2. The subsequent electrical performance test must follow within one hour of removal of the module from the humidity chamber.

G. Mechanical Load Cycling

This test verifies, by simulation, that a wind that produces peak mechanical loading amplitudes of +2.4 kPa (+50 lbs/ft²) on intermediate-load modules or +1.7 kPa (+35 lb/ft²) on panel-type residential modules will not result in mechanical or electrical degradation. The test is performed by applying 10,000 cycles of mechanical load, normal to the module surface. This test is not applicable to shingle-type modules.

ORIGINAL PAGE IS
OF POOR QUALITY

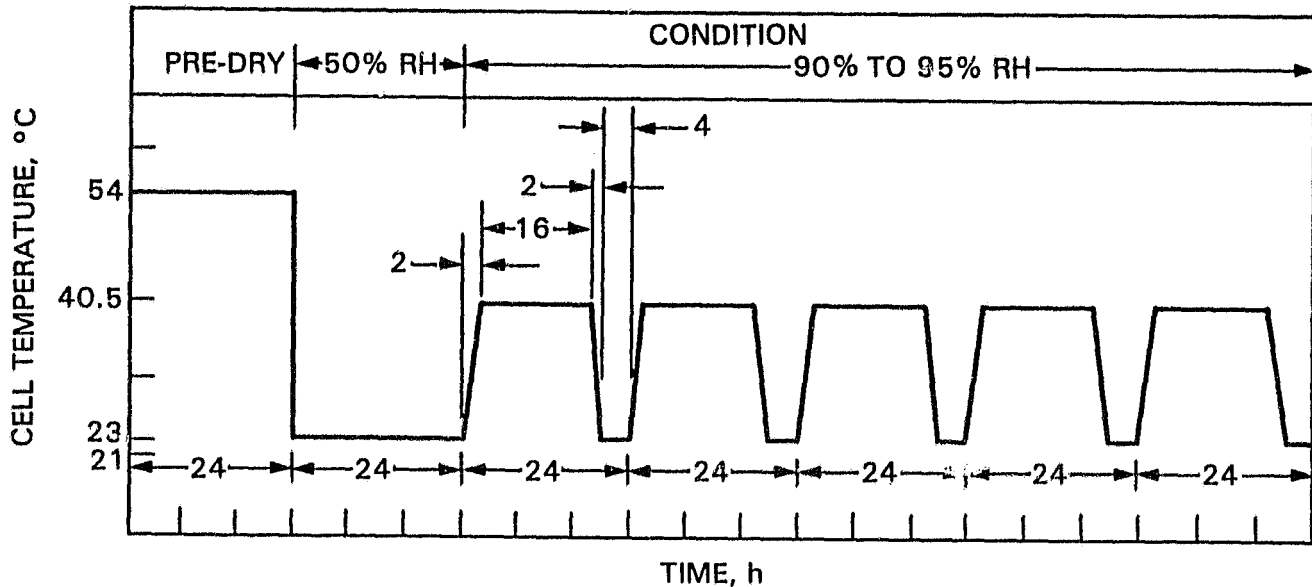


Figure B-2. Humidity Cycle Regime

H. Wind Resistance

This test verifies, by use of a wind machine providing uplift force, that shingle-type residential modules will withstand an uplift pressure of 1.7 kPa (35 lb/ft²).

I. Twist

This test verifies that mounting the module on a twisted mounting surface with planarity deviation of ± 20 mm/m ($\pm 1/4$ in./ft) will not cause module damage.

J. Hail

This test verifies that the module will not be damaged by impact of simulated hailstones (ice balls) 20 mm (3/4 in.) in diameter, travelling at 20.1 m/s (45 mi/h). The test includes at least three impacts at each of at least the three points on the module most sensitive to impact, as determined experimentally.