NASA Technical Paper 2768

December 1987

User's Manual for LINEAR, a FORTRAN Program to Derive Linear Aircraft Models

Eugene L. Duke, Brian P. Patterson, and Robert F. Antoniewicz



NASA Technical Paper 2768

1987

User's Manual for LINEAR, a FORTRAN Program to Derive Linear Aircraft Models

Eugene L. Duke, Brian P. Patterson, and Robert F. Antoniewicz

Ames Research Center Dryden Flight Research Facility Edwards, California



Scientific and Technical Information Division

CONTENTS

Pag	ίe
SUMMARY	į
INTRODUCTION	i
NOMENCLATURE	2
Variables	2
Superscripts	7
Subscripts	7
FORTRAN Variables	3
PROGRAM OVERVIEW	2
EQUATIONS OF MOTION	5
DBSERVATION EQUATIONS	3
SELECTION OF STATE, CONTROL, AND OBSERVATION VARIABLES	3
LINEAR MODELS	4
ANALYSIS POINT DEFINITION	5
Untrimmed	3
Straight-and-Level Trim	3
Pushover-Pullup	3
Level Turn	Э
Thrust-Stabilized Turn)
Beta Trim)
Specific Power	1
NONDIMENSIONAL STABILITY AND CONTROL DERIVATIVES	2
INPUT FILES	4
Case Title, File Selection Information, and Project Title	7
Geometry and Mass Data	7
State, Control, and Observation Variable Definitions	8
Trim Parameter Specification	1
Additional Surface Specification 4	1
Test Case Specification	2
OUTPUT FILES	2
USER-SUPPLIED SUBROUTINES	5
Aerodynamic Model	6
Control Model	
Engine Model	
Mass and Geometry Model	0

CONCLUDING REMARKS	3
APPENDIX A: CORRECTION TO AERODYNAMIC COEFFICIENTS FOR A CENTER OF GRAVITY NOT AT THE AERODYNAMIC REFERENCE POINT	55
APPENDIX B: ENGINE TORQUE AND GYROSCOPIC EFFECTS MODEL	57
APPENDIX C: STATE VARIABLE NAMES RECOGNIZED BY LINEAR 6	55
APPENDIX D: OBSERVATION VARIABLE NAMES RECOGNIZED BY LINEAR 6	6
APPENDIX E: ANALYSIS POINT DEFINITION IDENTIFIERS	13
APPENDIX F: EXAMPLE INPUT FILE	75
APPENDIX G: EXAMPLE OUTPUT ANALYSIS FILE	79
APPENDIX H: EXAMPLE PRINTER OUTPUT FILES	32
APPENDIX I: EXAMPLE USER-SUPPLIED SUBROUTINES	1
Engine Model Interface Subroutine)1)4)5)6
APPENDIX J: REVISIONS TO MICROFICHE SUPPLEMENT	8
REFERENCES)4

SUMMARY

This report documents a FORTRAN program that provides a powerful and flexible tool for the linearization of aircraft models. The program LINEAR numerically determines a linear system model using nonlinear equations of motion and a user-supplied nonlinear aerodynamic model. The system model determined by LINEAR consists of matrices for both state and observation equations. The program has been designed to allow easy selection and definition of the state, control, and observation variables to be used in a particular model.

INTRODUCTION

The program LINEAR was developed at the Dryden Flight Research Facility of NASA's Ames Research Center to provide a standard, documented, and verified tool to be used in deriving linear models for aircraft stability analysis and control law design. This development was undertaken to eliminate the need for aircraft-specific linearization programs common in the aerospace industry. Also, the lack of available documented linearization programs provided a strong motivation for the development of LINEAR; in fact, the only available documented linearization program that was found in an extensive literature search of the field is that of Kalviste (1980).

Linear system models of aircraft dynamics and sensors are an essential part of both vehicle stability analysis and control law design. These models define the aircraft system in the neighborhood of an analysis point and are determined by the linearization of the nonlinear equations defining vehicle dynamics and sensors. This report describes LINEAR, a FORTRAN program that provides the user with a powerful and flexible tool for the linearization of aircraft models. LINEAR is a program with well-defined and generalized interfaces to aerodynamic and engine models and is designed to address a wide range of problems without requiring program modification.

The system model determined by LINEAR consists of matrices for both state and observation equations. The program has been designed to provide easy selection and definition of the state, control, and observation variables to be used in a particular model. Thus, the order of the system model is completely under user control. Further, the program provides the flexibility of allowing alternative formulations of both state and observation equations.

LINEAR has several features that make it unique among the linearization programs common in the aerospace industry. The most significant of these features is flexibility. By generalizing the surface definitions and making no assumptions of symmetric mass distributions, the program can be applied to any aircraft in any phase of flight except hover. The unique trimming capabilities, provided by means of a user-supplied subroutine, allow unlimited possibilities for trimming strategies and surface scheduling, which are particularly important for oblique-wing vehicles and aircraft having multiple surfaces affecting a single axis. The formulation of the equations of motion permit the inclusion of thrust-vectoring effects. The ability to select, without program modification, the state, control, and observation variables for the linear models, combined with the large number of observation quantities available, allows any analysis problem to be solved with ease.

This report documents the use of the program LINEAR, defining the equations used and the methods employed to implement the program. The trimming capabilities of LINEAR are discussed from both a theoretical and an implementation perspective. The input and output files are described in detail. The user-supplied subroutines required for LINEAR are discussed, and sample subroutines are presented.

NOMENCLATURE

The units associated with the listed variables are expressed in a generalized system (given in parentheses). LINEAR will work equally well with any consistent set of units with two notable exceptions: the printed output and the atmospheric model. Both the printed output and the atmospheric model assume English units. Where applicable, quantities are defined with respect to the body axis system.

Variables

A	state matrix of the state equation, $\dot{x} = Ax + Bu$; or, axial force (force)
A'	state matrix of the state equation, $Cx = A'x + B'u$
a	speed of sound in air (length/sec)
an	normal acceleration (g)
a _{n,i}	normal acceleration, accelerometer not at center of gravity (g)
anx	x body axis accelerometer output, accelerometer at center of gravity (g)
a _{nx,i}	<pre>x body axis accelerometer output, accelerometer not at center of gravity (g)</pre>
any	y body axis accelerometer output, accelerometer at center of gravity (g)
a _{ny,i}	y body axis accelerometer output, accelerometer not at center of gravity (g)
a _{nz}	z body axis accelerometer output, accelerometer at center of gravity (g)
^a nz,i	<pre>z body axis accelerometer output, accelerometer not at center of gravity (g)</pre>
a _x	acceleration along the x body axis (g)
^a y	acceleration along the y body axis (g)
a _z	acceleration along the z body axis (g)

```
control matrix of the state equation, \dot{x} = Ax + Bu
В
В'
            control matrix of the state equation, Cx = A'x + B'u
b
            wingspan (length)
            C matrix of the state equation, Cx = A'x + B'u; or, force or moment
С
              coefficient
C_{D}
            coefficient of drag
C<sub>T.</sub>
            coefficient of lift
C_{\ell}
            coefficient of rolling moment
C_{\mathbf{m}}
            coefficient of pitching moment
c_n
            coefficient of yawing moment
C_{\mathbf{Y}}
            coefficient of sideforce
CM_{i}
            center of mass of ith engine
            mean aerodynamic chord (length)
D
            dynamic interaction matrix for state equation, x = Ax + Bu + Dv; or,
              drag force (force)
D'
            dynamic interaction matrix for the state equation, Cx = A'x + B'u + D'v
E
            dynamic interaction matrix for the observation equation, y = Hx + Fu + Ev
E'
            dynamic interaction matrix for the observation equation,
              y = H'x + Gx + F'u + E'v
\mathbf{E}_{\mathbf{S}}
            specific energy (length)
            feedforward matrix of the observation equation, y = Hx + Fu
F
            total aerodynamic force acting at the aerodynamic center
\mathbf{F}_{\mathbf{p}}
            engine thrust vector
            feedforward matrix of the observation equation, y = H'x + Gx + F'u
```

```
flightpath acceleration (g)
fpa
            G matrix of the observation equation, y = H'x + Gx + F'u
G
            acceleration due to gravity (length/sec2)
q
            observation matrix of the observation equation, y = Hx + Fu
H
H '
            observation matrix of the observation equation, y = H'x + Gx + F'u
h
            altitude (length)
he
            angular momentum of engine rotor (mass-length<sup>2</sup>/sec)
Ι
            aircraft inertia tensor (mass-length<sup>2</sup>)
            rotational inertia of the engine (mass-length<sup>2</sup>)
Ιe
            x body axis moment of inertia (mass-length<sup>2</sup>)
I_{\mathbf{x}}
            x-y body axis product of inertia (mass-length<sup>2</sup>)
Ixy
            x-z body axis product of inertia (mass-length<sup>2</sup>)
I_{XZ}
            y body axis moment of inertia (mass-length<sup>2</sup>)
I_{\mathbf{v}}
            y-z body axis product of inertia (mass-length<sup>2</sup>)
I_{VZ}
            z body axis moment of inertia (mass-length<sup>2</sup>)
I_{Z}
            total body axis aerodynamic rolling moment (length-force); or,
               total aerodynamic lift (force)
L
            generalized length (length)
M
            Mach number; or, total body axis aerodynamic pitching moment
               (length-force)
            aircraft total mass (mass)
            mass of engine
me
            normal force (force); or, total body axis aerodynamic yawing moment
N
               (length-force)
            load factor
n
P_{S}
            specific power (length/sec)
```

4

```
roll rate (rad/sec); or, pressure (force/length<sup>2</sup>)
р
            ambient pressure (force/length2)
p_a
            total pressure (force/length2)
Pt
            pitch rate (rad/sec)
q
ā
            dynamic pressure (force/length2)
            impact pressure (force/length<sup>2</sup>)
q_c
            axis transformation matrices
RE, RE
            Reynolds number
Re
            Reynolds number per unit length (length-1)
Re'
            yaw rate (rad/sec)
            wing planform area (length<sup>2</sup>)
S
            ambient temperature (K); or, total angular momentum (mass-length<sup>2</sup>/sec<sup>2</sup>);
т
               or thrust (force)
            total temperature (K)
\mathbf{T_t}
            velocity in x-axis direction (length/sec)
            control vector
u
             total velocity (length/sec)
            calibrated airspeed (knots)
v_c
             equivalent airspeed (knots)
٧e
             velocity in y-axis direction (length/sec)
             dynamic interaction vector
             vehicle weight (force)
             velocity in z-axis direction (length/sec)
             total force along the x body axis (force)
             thrust along the x body axis (force)
X_{\mathbf{T}}
             state vector
x
```

```
Y
            sideforce (force)
            thrust along the y body axis (force)
Υ<sub>T</sub>
            observation vector
У
            total force along the z body axis (force)
\mathbf{z}
            thrust along the z body axis (force)
z_{\mathbf{r}}
            angle of attack (rad)
α
            angle of sideslip (rad)
В
            flightpath angle (rad)
Υ
            displacement of aerodynamic reference point from center of gravity
\Delta \mathbf{r}
            displacement from center of gravity along x body axis (length)
Δх
Δу
            displacement from center of gravity along y body axis (length)
            displacement from center of gravity along z body axis (length)
Δz
            lateral trim parameter
\delta_{\mathbf{a}}
δdt
            differential stabilator trim parameter
δe
            longitudinal trim parameter
            Kronecker delta
δjk
δr
            directional trim parameter
\delta_{\rm sb}
            speed brake trim parameter
\delta_{th}
            thrust trim parameter
\deltaL
            incremental rolling moment (length-force)
            incremental pitching moment (length-force); or, incremental Mach
δм
δN
            incremental yawing moment (length-force)
            incremental x body axis force (force)
δх
δY
            incremental y body axis force (force)
δz
            incremental z body axis force (force)
            angle from the thrust axis of engine to the x-y body axis plane (rad)
```

```
ζ
           angle from the projection of F_{D} onto the engine x-y plane to the local
             x axis (rad)
           angle from F_D to the engine x-y plane (rad)
           pitch angle (rad)
           coefficient of viscosity
           angle from the projection of F_{D} onto the x-y body axis plane to the
              x body axis (rad)
           density of air (mass/length3)
ΣL
           total body axis rolling moment (length-force)
ΣΜ
           total body axis pitching moment (length-force)
ΣΝ
            total body axis yawing moment (length-force)
           torque from engines (length-force)
           gyroscopic torque from engine (length-force)
\tau_{\alpha}
           roll angle (rad)
            tilt angle of acceleration normal to the flightpath from the vertical
ΦL
              plane (rad)
           heading angle (rad)
            total rotational velocity of the vehicle
\omega_{\mathbf{e}}
            engine angular velocity (rad/sec)
Superscripts
            nondimensional version of variable
           derivative with respect to time
            transpose of a vector or matrix
Subscripts
            aerodynamic reference point
ar
            total drag
E
            engine
```

h altitude

L total lift

l rolling moment

M Mach number

m pitching moment

max maximum

min minimum

n yawing moment

o offset from center of gravity

p roll rate

q pitch rate

r yaw rate

s stability axis

TP thrust point

x along the x body axis

Y sideforce

y along the y body axis

z along the z body axis

0 standard day, sea level conditions; or, along the reference trajectory

FORTRAN Variables

AIX inertia about the x body axis

AIXE engine inertia

AIXY inertial coupling between the x and y body axes

AIXZ inertial coupling between the x and z body axes

AIY inertia about the y body axis

AIYZ inertial coupling between the y and z body axes

AIZ inertia about the z body axis

ALP angle of attack

ALPDOT time rate of change of angle of attack

AMCH Mach number

AMSENG total rotor mass of the engine

AMSS aircraft mass

B wingspan

BTA angle of sideslip

BTADOT time rate of change of angle of sideslip

CBAR mean aerodynamic chord

CD total coefficient of drag

CDA coefficient of drag due to angle of attack

CDDE coefficient of drag due to symmetric elevator deflection

CDO drag coefficient at zero angle of attack

CDSB coefficient of drag due to speed brake deflection

CL total coefficient of rolling moment

CLB coefficient of rolling moment due to angle of sideslip

CLDA coefficient of rolling moment due to aileron deflection

CLDR coefficient of rolling moment due to rudder deflection

CLDT coefficient of rolling moment due to differential elevator deflection

CLFT total coefficient of lift

CLFTA coefficient of lift due to angle of attack

CLFTAD coefficient of lift due to angle-of-attack rate

CLFTDE coefficient of lift due to symmetric elevator deflection

CLFTO lift coefficient at zero angle of attack

CLFTQ coefficient of lift due to pitch rate

CLFTSB coefficient of lift due to speed brake deflection

CLP coefficient of rolling moment due to roll rate

coefficient of rolling moment due to yaw rate CLR

total coefficient of pitching moment CM

coefficient of pitching moment due to angle of attack CMA

coefficient of pitching moment due to angle-of-attack rate CMAD

coefficient of pitching moment due to symmetric elevator deflection CMDE

CMO pitching moment coefficient at zero angle of attack

coefficient of pitching moment due to pitch rate CMO

CMSB coefficient of pitching moment due to speed brake deflection

total coefficient of yawing moment CN

coefficient of yawing moment due to sideslip CNB

coefficient of yawing moment due to aileron deflection CNDA

coefficient of yawing moment due to rudder deflection CNDR

CNDT coefficient of yawing moment due to differential elevator deflection

coefficient of yawing moment due to roll rate CNP

coefficient of yawing moment due to yaw rate CNR

total coefficient of sideforce CY

coefficient of sideforce due to sideslip CYB

CYDA coefficient of sideforce due to aileron deflection

coefficient of sideforce due to rudder deflection CYDR

CYDT coefficient of sideforce due to differential elevator deflection

longitudinal trim parameter DAS

surface deflection and thrust control array DC

displacement of the aerodynamic reference along the x body axis from DELX

the center of gravity

displacement of the aerodynamic reference along the y body axis from DELY

the center of gravity

displacement of the aerodynamic reference along the z body axis from DELZ

the center of gravity

DES lateral trim parameter DRS directional trim parameter

DXTHRS distance between the center of gravity of the engine and the

thrust point

EIX rotational inertia of the engine

ENGOMG rotational velocity of the engine

GMA flightpath angle

H altitude

HDOT time rate of change of altitude

P roll rate

PDOT time rate of change of roll rate

PHI roll angle

PHIDOT time rate of change of roll angle

PSI heading angle

PSIDOT time rate of change of heading angle

Q pitch rate

QBAR dynamic pressure

QDOT time rate of change of pitch rate

R yaw rate

RDOT time rate of change of yaw rate

S wing area

T time

TDOT time rate of change of time

THA pitch angle

THADOT time rate of change of pitch angle

THRSTX thrust trim parameter

THRUST thrust generated by each engine

TLOCAT location of the engine in the x, y, and z axes from the center of gravity

TVANXY orientation of the thrust vector in the x-y engine axis plane

TVANXZ orientation of the thrust vector in the x-z engine axis plane

UB velocity along the x body axis

V velocity

VB velocity along the y body axis

VCAS calibrated airspeed

VDOT time rate of change of total vehicle velocity

VEAS equivalent airspeed

WB velocity along the z body axis

X position north from an arbitrary reference point

XDOT time rate of change of north-south position

XYANGL orientation of engine axis in x-y body axis plane

XZANGL orientation of engine axis in x-z body axis plane

Y position east from an arbitrary reference point

YDOT time rate of change of east-west position

PROGRAM OVERVIEW

The program LINEAR numerically determines a linear system model using nonlinear equations of motion and a user-supplied nonlinear aerodynamic model. LINEAR is also capable of extracting linearized gross engine effects (such as net thrust, torque, and gyroscopic effects) and including these effects in the linear system model. The point at which this linear system model is defined is determined either by specifying the state and control variables or by selecting an analysis point on a trajectory, selecting a trim option, and allowing the program to determine the control variable and remaining state variables to satisify the trim option selected.

Because the program is designed to satisfy the needs of a broad class of users, a wide variety of options has been provided. Perhaps the most important of these options are those that allow user specification of the state, control, and observation variables to be included in the linear model derived by LINEAR.

Within the program, the nonlinear equations of motion include 12 states representing a rigid aircraft flying in a stationary atmosphere over a flat nonrotating earth. Thus, the state vector \mathbf{x} is computed internally as

 $\mathbf{x} = [\mathbf{p} \ \mathbf{q} \ \mathbf{r} \ \mathbf{V} \ \mathbf{\alpha} \ \mathbf{\beta} \ \mathbf{\phi} \ \mathbf{\theta} \ \mathbf{\psi} \ \mathbf{h} \ \mathbf{x} \ \mathbf{y}]^{\mathrm{T}}$

The nonlinear equations used to determine the derivatives of the quantities are presented in the following section (Equations of Motion). The internal control vector u can contain up to 30 controls. The internal observation vector y contains 120 variables, including the state variables, the time derivatives of the state variables, the control variables, and a variety of other parameters of interest. Thus, within the program,

$$\mathbf{y} = \begin{bmatrix} \mathbf{x}^{\mathbf{T}} & \mathbf{\mathring{x}^{\mathbf{T}}} & \mathbf{u}^{\mathbf{T}} & \mathbf{y}_{1}^{\mathbf{T}} & \mathbf{y}_{2}^{\mathbf{T}} & \mathbf{y}_{3}^{\mathbf{T}} & \mathbf{y}_{4}^{\mathbf{T}} & \mathbf{y}_{6}^{\mathbf{T}} & \mathbf{y}_{7}^{\mathbf{T}} & \mathbf{y}_{8}^{\mathbf{T}} \end{bmatrix}^{\mathbf{T}}$$

where

$$Y_{1} = \begin{bmatrix} a_{x} & a_{y} & a_{z} & a_{nx} & a_{ny} & a_{nz} & a_{n} & a_{nx,i} & a_{ny,i} & a_{nz,i} & a_{n,i} & n \end{bmatrix}^{T}$$

$$Y_{2} = \begin{bmatrix} a & Re & Re' & M & \overline{q} & q_{c} & p_{a} & q_{c}/p_{a} & p_{t} & T & T_{t} & V_{e} & V_{c} \end{bmatrix}^{T}$$

$$Y_{3} = \begin{bmatrix} Y & fpa & \mathring{Y} & \mathring{h} & \mathring{h}/57.3 \end{bmatrix}^{T}$$

$$Y_{4} = \begin{bmatrix} E_{s} & P_{s} \end{bmatrix}^{T}$$

$$Y_{5} = \begin{bmatrix} L & D & N & A \end{bmatrix}^{T}$$

$$Y_{6} = \begin{bmatrix} u & v & w & \mathring{u} & \mathring{v} & \mathring{w} \end{bmatrix}^{T}$$

$$Y_{7} = \begin{bmatrix} \alpha_{,i} & \beta_{,i} & h_{,i} & \mathring{h}_{,i} \end{bmatrix}^{T}$$

$$Y_{8} = \begin{bmatrix} T & p_{s} & q_{s} & r_{s} \end{bmatrix}^{T}$$

The equations defining these quantities are presented in the Observation Equations section.

From the internal formulation of the state, control, and observation variables, the user must select the specific variables desired in the output linear model (described in the Selection of State, Control, and Observation Variables section). Figure 1 illustrates the selection of variables in the state vector for a requested linear model. From the internal formulation on the right of the figure, the requested model is constructed, and the linear system matrices are selected in accordance with the user specification of the state, control, and observation variables.




Figure 1. Selection of state variables for linear model.

The linear model derived by LINEAR is determined at a specific analysis point. LINEAR allows this analysis point to be defined as a true steady-state condition on a specified trajectory (a point at which the rotational and translational accelerations are zero) or as a totally arbitrary state on a trajectory. LINEAR provides the user with several options, described in detail in the Analysis Point Definition section. These analysis point definition options allow the user to trim the aircraft in wings-level flight, pushovers, pullups, level turns, or zero-sideslip maneuvers. Also included is a nontrimming option in which the user defines a totally arbitrary condition about which the linear model is to be derived.

The linear system matrices are determined by numerical perturbation and are the first-order terms of a Taylor series expansion about the analysis point, as described in the Linear Models section. The formulation of the output system model is under user control. The user can select state equation matrices corresponding to either the standard formulation of the state equation,

$$x = Ax + Bu$$

or the generalized equation,

$$Cx = A'x + B'u$$

The observation matrices can be selected from either of two formulations corresponding to the standard equation,

$$y = Hx + Fu$$

or the generalized equation,

$$y = H'x + Gx + F'u$$

In addition to the linear system matrices, LINEAR also computes the nondimensional stability and control derivatives at the analysis point. These derivatives are discussed in the Nondimensional Stability and Control Derivatives section.

The input file for LINEAR is an ASCII file that defines the geometry and mass properties of the aircraft and selects various program options. Within this input file, the state, control, and observation vectors desired in the output linear model are defined, and the analysis point options are selected. The details of the input file are discussed in the Input Files section.

The output of LINEAR is three files, one containing the linear system matrices and two documenting the options and analysis points selected by the user. The first is intended to be used with follow-on design and analysis programs. The other two contain all the information contained in the first file and also include the details of the analysis point and the nondimensional stability and control derivatives. These files are described in the Output Files section.

To execute LINEAR, five user-supplied subroutines are required. These routines, discussed in the User-Supplied Subroutines section, define the nonlinear aerodynamic

model, the gross engine model, the gearing between the LINEAR trim inputs and the surfaces modeled in the aerodynamic model, and a model of the mass and geometry properties of the aircraft. The gearing model (fig. 2) defines how the LINEAR trim inputs will be connected to the surface models and allows schedules and nonstandard trimming schemes to be employed. This last feature is particularly important for oblique-wing aircraft.




Figure 2. Inputs to and outputs of the user-supplied subroutine UCNTRL.

EQUATIONS OF MOTION

The nonlinear equations of motion used in the linearization program are general six-degree-of-freedom equations representing the flight dynamics of a rigid aircraft flying in a stationary atmosphere over a flat nonrotating earth. The assumption of nonzero forward motion also is included in these equations; because of this assumption, these equations are invalid for vertical takeoff and landing or hover. These equations contain no assumptions of either symmetric mass distribution or aerodynamic properties and are applicable to asymmetric aircraft (such as oblique-wing aircraft) as well as to conventional symmetric aircraft. These equations of motion were derived by Etkin (1972), and the derivation will be detailed in a proposed NASA Reference Publication, "Derivation and Definition of a Linear Aircraft Model," by Eugene L. Duke, Robert F. Antoniewicz, and Keith D. Krambeer (in preparation).

The following equations for rotational acceleration are used for analysis point definition:

$$\dot{p} = [(\Sigma L)I_1 + (\Sigma M)I_2 + (\Sigma N)I_3 - p^2(I_{xz}I_2 - I_{xy}I_3)]$$

$$+ pq(I_{xz}I_1 - I_{yz}I_2 - D_zI_3) - pr(I_{xy}I_1 + D_yI_2 - I_{yz}I_3)$$

$$+ q^2(I_{yz}I_1 - I_{xy}I_3) - qr(D_xI_1 - I_{xy}I_2 + I_{xz}I_3)$$

$$- r^2(I_{yz}I_1 - I_{xz}I_2)]/det I$$

$$\dot{q} = [(\Sigma L)I_2 + (\Sigma M)I_4 + (\Sigma N)I_5 - p^2(I_{xz}I_4 - I_{xy}I_5)]$$

$$+ pq(I_{xz}I_2 - I_{yz}I_4 - D_zI_5) - pr(I_{xy}I_2 + D_yI_4 - I_{yz}I_5)$$

$$+ q^2(I_{yz}I_2 - I_{xy}I_5) - qr(D_xI_2 - I_{xy}I_4 + I_{xz}I_5)$$

$$- r^2(I_{yz}I_2 - I_{xz}I_4)]/\det I$$

$$\dot{r} = [(\Sigma L)I_3 + (\Sigma M)I_5 + (\Sigma N)I_6 - p^2(I_{xz}I_5 - I_{xy}I_6)]$$

$$+ pq(I_{xz}I_3 - I_{yz}I_5 - D_zI_6) - pr(I_{xy}I_3 + D_yI_5 - I_{yz}I_6)$$

$$+ q^2(I_{yz}I_3 - I_{xy}I_6) - qr(D_xI_3 - I_{xy}I_5 + I_{xz}I_6)$$

$$- r^2(I_{yz}I_3 - I_{xz}I_5)]/\det I$$

where

$$\det I = I_{x}I_{y}I_{z} - 2I_{xy}I_{xz}I_{yz} - I_{x}I_{yz}^{2} - I_{y}I_{xz}^{2} - I_{z}I_{xy}^{2}$$

$$I_{1} = I_{y}I_{z} - I_{yz}^{2}$$

$$I_{2} = I_{xy}I_{z} + I_{yz}I_{xz}$$

$$I_{3} = I_{xy}I_{yz} + I_{y}I_{xz}$$

$$I_{4} = I_{x}I_{z} - I_{xz}^{2}$$

$$I_{5} = I_{x}I_{yz} + I_{xy}I_{xz}$$

$$I_{6} = I_{x}I_{y} - I_{xy}^{2}$$

$$D_{x} = I_{z} - I_{y}$$

$$D_{y} = I_{x} - I_{z}$$

$$D_{z} = I_{y} - I_{x}$$

Here, the body axis rates are designated p, q, and r, corresponding to roll rate, pitch rate, and yaw rate. The total moments about the x, y, and z body axes (rolling, pitching, and yawing moments) are designated Σ L, Σ M, and Σ N, respectively. These total moments are the sums of all aerodynamic moments and powerplant-induced moments due to thrust asymmetries and gyroscopic torques. (The equations used to determine the change in moment coefficients due to the noncoincidence of the vehicle center of gravity and the reference point of the nonlinear aerodynamic model

are derived in appendix A. The equations defining the engine torque and gyroscopic contributions to the total moments are derived in appendix B.) The body axis moments and products of inertia are designated I_x , I_y , I_z , I_{xy} , I_{xz} , and I_{yz} . These moments and products of inertia are elements of the inertia tensor I, defined as

$$I = \begin{bmatrix} I_{x} & -I_{xy} & -I_{xz} \\ -I_{xy} & I_{y} & -I_{yz} \\ -I_{xz} & -I_{yz} & I_{z} \end{bmatrix}$$

To derive the state equation matrices for the generalized formulation,

$$Cx = Ax + Bu$$

(where A and B are the state and control matrices of the state equation), the rotational accelerations are cast in a decoupled-axes formulation. The equations used to derive the linearized matrices are

$$\begin{bmatrix} 1 & \frac{-I_{XY}}{I_{X}} & \frac{-I_{XZ}}{I_{X}} \\ \\ \frac{-I_{XY}}{I_{Y}} & 1 & \frac{-I_{YZ}}{I_{Y}} \\ \\ \frac{-I_{XZ}}{I_{Z}} & \frac{-I_{YZ}}{I_{Z}} & 1 \end{bmatrix} \begin{bmatrix} \bullet \\ p \\ \vdots \\ r \end{bmatrix}$$

$$= \frac{\left[\frac{\Sigma L}{I_X} - rp \frac{I_{XY}}{I_X} + pq \frac{I_{XZ}}{I_X} + rq \frac{I_Y}{I_X} + (q^2 - r^2) \frac{I_{YZ}}{I_X} - qr \frac{I_Z}{I_X}\right]}{\left[\frac{\Sigma M}{I_Y} - rp \frac{I_X}{I_Y} + rq \frac{I_{XY}}{I_Y} - pq \frac{I_{YZ}}{I_Y} + (r^2 - p^2) \frac{I_{XZ}}{I_Y} + pr \frac{I_Z}{I_Y}\right]}$$

$$= \frac{\left[\frac{\Sigma M}{I_Y} - rp \frac{I_X}{I_Y} + rq \frac{I_{XY}}{I_Y} - pq \frac{I_{YZ}}{I_Y} + (r^2 - p^2) \frac{I_{XY}}{I_Y} + pr \frac{I_Z}{I_Y}\right]}{\left[\frac{\Sigma M}{I_Z} + qp \frac{I_X}{I_Z} - qr \frac{I_{XZ}}{I_Z} + pr \frac{I_{YZ}}{I_Z} + (p^2 - q^2) \frac{I_{XY}}{I_Z} - pq \frac{I_Y}{I_Z}\right]}$$

The translational acceleration equations used in the program LINEAR for both analysis point definition and perturbation are

- $\dot{V} = [-D \cos \beta + Y \sin \beta + X_T \cos \alpha \cos \beta + Y_T \sin \beta + Z_T \sin \alpha \cos \beta \\ mg(\sin \theta \cos \alpha \cos \beta \cos \theta \sin \phi \sin \beta \cos \theta \cos \phi \sin \alpha \cos \beta)]/m$ $\dot{\alpha} = [-L + Z_T \cos \alpha X_T \sin \alpha + mg(\cos \theta \cos \phi \cos \alpha + \sin \theta \sin \alpha)]/Vm \cos \beta$
- $\dot{\beta} = [D \sin \beta + Y \cos \beta X_T \cos \alpha \sin \beta + Y_T \cos \beta Z_T \sin \alpha \sin \beta \\ + mg(\sin \theta \cos \alpha \sin \beta + \cos \theta \sin \phi \cos \beta \cos \theta \cos \phi \sin \alpha \sin \beta)]/v_m \\ + p \sin \alpha r \cos \alpha$

where α , β , θ , and ϕ are angles of attack, sideslip, pitch, and roll, respectively; X_T , Y_T , and Z_T are thrust along the x, y, and z body axes; and D is drag force, g gravitational acceleration, L total aerodynamic lift, m total aircraft mass, V total velocity, and Y sideforce.

The equations defining the vehicle attitude rates are

 $+ q - \tan \beta (p \cos \alpha + r \sin \alpha)$

$$\phi$$
 = p + q sin ϕ tan θ + r cos ϕ tan θ

$$\dot{\theta} = q \cos \phi - r \sin \phi$$

$$\psi$$
 = q sin ϕ sec θ + r cos ϕ sec θ

where ψ is heading angle.

The equations defining the earth-relative velocities are

- $h = V(\cos \beta \cos \alpha \sin \theta \sin \beta \sin \phi \cos \theta \cos \beta \sin \alpha \cos \phi \cos \theta)$
- $y = V[\cos \beta \cos \alpha \cos \theta \sin \psi + \sin \beta (\sin \phi \sin \theta \sin \psi + \cos \phi \cos \psi)$ + $\cos \beta \sin \alpha (\cos \phi \sin \theta \sin \psi \sin \phi \cos \psi)]$

where h is altitude.

OBSERVATION EQUATIONS

The user-selectable observation variables computed in LINEAR represent a broad class of parameters useful for vehicle analysis and control design problems. These

variables include the state, time derivatives of state, and control variables. Also included are air data parameters, accelerations, flightpath terms, and other miscellaneous parameters. The equations used to calculate those parameters are derived from a number of sources (Clancy, 1975; Dommasch et al., 1967; Etkin, 1972; Gainer and Hoffman, 1972; Gracy, 1980). Implicit in many of these observation equations is an atmospheric model. The model included in LINEAR is derived from the U.S. Standard Atmosphere (1962).

The vehicle body axis accelerations constitute the set of observation variables that, except for state variables themselves, are most commonly used in the aircraft control analysis and design problem. These accelerations are measured in g units and are derived directly from the body axis forces defined in the previous section for translational acceleration. The equations used in LINEAR for the body axis accelerations a_x , a_y , and a_z are

$$a_{X} = (X_{T} - D \cos \alpha + L \sin \alpha - gm \sin \theta)/g_{0}m$$

$$a_{Y} = (Y_{T} + Y + gm \cos \theta \sin \phi)/g_{0}m$$

$$a_{Z} = (Z_{T} - D \sin \alpha - L \cos \alpha + gm \cos \theta \cos \phi)/g_{0}m$$

where subscript 0 denotes standard day, sea level conditions. The equations for the outputs of the body axis accelerometers (denoted by subscript n) that are at vehicle center of gravity are

$$a_{nx} = (X_T - D \cos \alpha + L \sin \alpha)/g_{0}^{m}$$

$$a_{ny} = (Y_T + Y)/g_{0}^{m}$$

$$a_{nz} = (Z_T - D \sin \alpha - L \cos \alpha)/g_{0}^{m}$$

$$a_{n} = (-Z_T + D \sin \alpha + L \cos \alpha)/g_{0}^{m}$$

For orthogonal accelerometers that are aligned with the vehicle body axes but are not at vehicle center of gravity (denoted by subscript ,i), the following equations apply:

$$a_{nx,i} = a_{nx} - [(q^2 + r^2)x_x - (pq - r)y_x - (pr + q)z_x]/g_0$$

$$a_{ny,i} = a_{ny} + [(pq + r)x_y - (p^2 + r^2)y_y + (qr - p)z_y]/g_0$$

$$a_{nz,i} = a_{nz} + [(pr - q)x_z + (qr + p)y_z - (q^2 + p^2)z_z]/g_0$$

$$a_{n,i} = a_n - [(pr - q)x_z + (qr + p)y_z - (q^2 + p^2)z_z]/g_0$$

where the subscripts x, y, and z refer to the x, y, and z body axes, respectively, and the symbols x, y, and z refer to the x, y, and z body axis locations of the

sensors relative to the vehicle center of gravity. Also included in the set of acceleration equations is load factor, n = L/W, where L is the total aerodynamic lift and W is the vehicle weight.

The air data parameters having the greatest application to aircraft dynamics and control problems are the sensed parameters and the reference and scaling parameters. The sensed parameters are impact pressure $q_{\rm C}$, ambient or free-stream pressure $p_{\rm a}$, total pressure $p_{\rm t}$, ambient or free-stream temperature T, and total temperature $T_{\rm t}$. The selected reference and scaling parameters are Mach number M, dynamic pressure \bar{q} , speed of sound a, Reynolds number Re, Reynolds number per unit length, Re', and the Mach meter calibration ratio $q_{\rm C}/p_{\rm a}$. These quantities are defined as

$$a = \left(1.4 \frac{P_0}{\rho_0 T_0} T\right)^{1/2}$$

$$M = \frac{V}{a}$$

$$Re = \frac{\rho V \ell}{\mu}$$

$$\vec{q} = \frac{\rho V^2}{2}$$

$$q_c = \begin{cases} \left[(1.0 + 0.2M^2)^{3.5} - 1.0 \right] p_a & (M \le 1.0) \\ 1.2M^2 \left(\frac{5.76M^2}{5.6M^2 - 0.8} \right)^{2.5} - 1.0 \right] p_a & (M > 1.0) \end{cases}$$

$$\frac{q_c}{P_a} = \begin{cases} (1.0 + 0.2M^2)^{3.5} - 1.0 & (M \le 1.0) \\ 1.2M^2 \left(\frac{5.76M^2}{5.6M^2 - 0.8} \right)^{2.5} - 1.0 & (M \le 1.0) \end{cases}$$

$$p_t = p_a + q_c$$

$$T_t = T(1.0 + 0.2M^2)$$

where ℓ is length, p pressure, ρ the density of the air, and μ the coefficient of viscosity. Free-stream pressure, free-stream temperature, and the coefficient of viscosity are derived from the U.S. Standard Atmosphere (1962).

Also included in the air data calculations are two velocities: equivalent airspeed $V_{\rm e}$ and calibrated airspeed $V_{\rm c}$, both computed in knots. The calculations assume that internal units are in the English system. The equation used for equivalent airspeed is

$$V_e = 17.17 \sqrt{\bar{q} (lb/ft^2)}$$

which is derived from the definition of equivalent airspeed,

$$v_e = \sqrt{\frac{2\bar{q}}{\rho_0}}$$

where ρ_0 = 0.002378 slug/ft³ and V_e is converted from feet per second to knots. Calibrated airspeed is derived from the following definition of impact pressure:

$$q_{c} = \begin{cases} p_{0} \left[\left(1.0 + \frac{\rho_{0}}{7.0p_{0}} v_{c}^{2} \right)^{3.5} - 1 \right] & (v_{c} \le a_{0}) \\ 1.2 \left(\frac{v_{c}}{a_{0}} \right)^{2} p_{0} \left[\frac{5.76}{5.6 - 0.8 (a_{0}/v_{c})^{2}} \right]^{2.5} - p_{0} & (v_{c} > a_{0}) \end{cases}$$

For the case where $V_C \le a_n$, the equation for V_C is

$$v_c = 1479.116 \sqrt{\left(\frac{q_c}{p_0} + 1.0\right)^{2/7}} - 1.0 \quad (v_c \le a_0)$$

Calibrated airspeed is found using an iterative process for the case where $v_c > a_0$:

$$v_{c} = 582.95174 \sqrt{\left(\frac{q_{c}}{p_{0}} + 1.0\right) \left[1.0 - \frac{1.0}{7.0(v_{c}/a_{0})^{2}}\right]^{2.5}}$$
 $(v_{c} > a_{0})$

is executed until the change in V_{C} from one iteration to the next is less than 0.001 knots.

Also included in the observation variables are the flightpath-related parameters (described in app. D), including flightpath angle γ , flightpath acceleration fpa, vertical acceleration \ddot{h} , flightpath angle rate $\dot{\dot{\gamma}}$, and (for lack of a better category in which to place it) scaled altitude rate $\dot{h}/57.3$. The equations used to determine these quantities are

$$\gamma = \sin^{-1}\left(\frac{h}{v}\right)$$

$$fpa = \frac{\dot{v}}{g_0}$$

 $\ddot{h} = a_X \sin \theta - a_Y \sin \phi \cos \theta - a_Z \cos \phi \cos \theta$

$$\dot{\hat{\gamma}} = \frac{v \, h - h \dot{v}}{v \, \sqrt{v^2 - h^2}}$$

Two energy-related terms are included in the observation variables: specific energy $E_{\rm S}$ and specific power $P_{\rm S}$, defined as

$$E_{S} = h + \frac{V^{2}}{2g}$$

$$P_S = h + \frac{vv}{q}$$

The set of observation variables available in LINEAR also includes four force parameters: total aerodynamic lift L, total aerodynamic drag D, total aerodynamic normal force N, and total aerodynamic axial force A. These quantities are defined as

$$L = \overline{q}SC_L$$

$$D = \overline{q}SC_D$$

$$N = L \cos \alpha + D \sin \alpha$$

$$A = -L \sin \alpha + D \cos \alpha$$

where C_{D} and C_{L} are coefficients of drag and lift, respectively.

Six body axis rates and accelerations are available as observation variables. These include the x body axis rate u, the y body axis rate v, and the z body axis rate w. Also included are the time derivatives of these quantities, $\dot{\mathbf{u}}$, $\dot{\mathbf{v}}$, and $\dot{\mathbf{w}}$. The equations defining these quantities are

$$u = V \cos \alpha \cos \beta$$

$$v = V \sin \beta$$

$$w = V \sin \alpha \cos \beta$$

$$u = \left(\frac{X_T - gm \sin \theta - D \cos \alpha + L \sin \alpha}{m}\right) + rv - qw$$

$$v = \left(\frac{Y_T + gm \cos \theta \sin \phi + Y}{m}\right) + pw - ru$$

The final set of observation variables available in LINEAR is a miscellaneous collection of other parameters of interest in analysis and design problems. The

first group consists of measurements from sensors not located at the vehicle center of gravity. These represent angle of attack $\alpha_{,i}$, angle of sideslip $\beta_{,i}$, altitude $h_{,i}$, and altitude rate $h_{,i}$ measurements displaced from the center of gravity by some x, y, and z body axis distances. The equations used to compute these quantities are

$$\alpha_{,i} = \alpha - \left(\frac{qx - py}{V}\right)$$

$$\beta_{,i} = \beta + \left(\frac{rx - pz}{V}\right)$$

$$h_{,i} = h + x \sin \theta - y \sin \phi \cos \theta - z \cos \phi \cos \theta$$

$$\dot{h}_{,i} = \dot{h} + \dot{\theta}(x \cos \theta + y \sin \phi \sin \theta + z \cos \phi \sin \theta)$$

$$- \dot{\phi}(y \cos \phi \cos \theta - z \sin \phi \cos \theta)$$

The remaining miscellaneous parameters are total angular momentum T, stability axis roll rate p_S , stability axis pitch rate q_S , and stability axis yaw rate r_S , defined as

$$T = \frac{1}{2} (I_x p^2 - 2I_{xy} pq - 2I_{xz} pr + I_y q^2 - 2I_{yz} qr + I_z r^2)$$

$$p_s = p \cos \alpha + r \sin \alpha$$

$$q_s = q$$

$$r_s = -p \sin \alpha + r \cos \alpha$$

SELECTION OF STATE, CONTROL, AND OBSERVATION VARIABLES

The equations in the two preceding sections define the state and observation variables available in LINEAR. The control variables are defined by the user in the input file. Internally, the program uses a 12-state model, a 120-variable observation vector, and a 30-parameter control vector. These variables can be selected to specify the formulation most suited for the specific application. The order and number of parameters in the output model is completely under user control. Figure 1 illustrates the selection of variables for the state vector of the output model. However, it should be noted that no model order reduction is attempted. Elements of the matrices in the internal formulation are simply selected and reordered in the formulation specified by the user.

The selection of specific state, control, and observation variables for the formulation of the output matrices is accomplished by alphanumeric descriptors in the input file. The use of these alphanumeric descriptors is described in the Input Files section. Appendix C lists the state variables and their alphanumeric descriptors. Appendix D lists the observation variables and their alphanumeric descriptors. The alphanumeric descriptors for the selection of control parameters to be included

in the observation vector are the control variable names defined by the user in the input file, as described in the Input Files section.

LINEAR MODELS

The linearized system matrices computed by LINEAR are the first-order terms of a Taylor series expansion about the analysis point (Dieudonne, 1978; Kwakernaak and Sivan, 1972; proposed NASA RP by Duke, Antoniewicz, and Krambeer, in preparation) and are assumed to result in a time-invariant linear system. The validity of this assumption is discussed in the Analysis Point Definition section. The technique employed to obtain these matrices numerically is a simple approximation to the partial derivative, that is,

$$\frac{\partial f}{\partial x} \approx \frac{f(x_0 + \Delta x) - f(x_0 - \Delta x)}{2 \Delta x}$$

where f is a general function of x, an arbitrary independent variable. The Δx may be set by the user but it defaults to 0.001 for all state and control parameters with the single exception of velocity V, where Δx is multiplied by a, the speed of sound, to obtain a reasonable perturbation size.

From the generalized nonlinear state,

$$Tx = f(x, x, u)$$

and observation equations,

$$y = g(x, \dot{x}, u)$$

the program determines the linearized matrices for the generalized formulation of the system:

$$C \delta \mathbf{x} = A' \delta \mathbf{x} + B' \delta \mathbf{u}$$

$$\delta \mathbf{y} = H' \delta \mathbf{x} + G \delta \mathbf{x} + F' \delta \mathbf{u}$$

where

$$C = T - \frac{\partial f}{\partial x}$$

$$A' = \frac{\partial f}{\partial x}$$

$$B' = \frac{\partial f}{\partial u}$$

$$H' = \frac{\partial g}{\partial x}$$

$$G = \frac{9x}{9a}$$

$$\mathbf{F'} = \frac{\partial \mathbf{g}}{\partial \mathbf{u}}$$

with all derivatives evaluated along the nominal trajectory defined by the analysis point $(\mathbf{x}_0, \mathbf{x}_0, \mathbf{u}_0)$; the state, time derivative of state, and control vectors can be expressed as small perturbations $(\delta \mathbf{x}, \delta \mathbf{x}, \delta \mathbf{u})$ about the nominal trajectory, so that

$$\mathbf{x} = \mathbf{x}_0 + \delta \mathbf{x}$$

$$\mathbf{x} = \mathbf{x}_0 + \delta \mathbf{x}$$

$$\mathbf{u} = \mathbf{u}_0 + \delta \mathbf{u}$$

In addition to the matrices for this generalized system, the user has the option of requesting linearized matrices for a standard formulation of the system:

$$\delta \mathbf{x} = A \delta \mathbf{x} + B \delta \mathbf{u}$$

$$\delta y = H \delta x + F \delta u$$

where

$$A = \left[T - \frac{\partial f}{\partial x}\right]^{-1} \frac{\partial f}{\partial x}$$

$$B = \left[\mathbf{T} - \frac{\partial \mathbf{f}}{\partial \mathbf{x}} \right]^{-1} \frac{\partial \mathbf{f}}{\partial \mathbf{u}}$$

$$H = \frac{\partial \mathbf{g}}{\partial \mathbf{x}} + \frac{\partial \mathbf{g}}{\partial \mathbf{x}} \left[\mathbf{T} - \frac{\partial \mathbf{f}}{\partial \mathbf{x}} \right]^{-1} \frac{\partial \mathbf{f}}{\partial \mathbf{x}}$$

$$\mathbf{F} = \frac{\partial \mathbf{g}}{\partial \mathbf{u}} + \frac{\partial \mathbf{g}}{\partial \mathbf{x}} \left[\mathbf{T} - \frac{\partial \mathbf{f}}{\partial \mathbf{x}} \right]^{-1} \frac{\partial \mathbf{f}}{\partial \mathbf{u}}$$

with all derivatives evaluated along the nominal trajectory defined by the analysis point $(\mathbf{x}_0$, $\dot{\mathbf{x}}_0$, \mathbf{u}_0).

LINEAR also provides two nonstandard matrices, D and E, in the equations

$$x = Ax + Bu + Dv$$

$$y = Hx + Fu + Ev$$

or D' and E' in the equations

$$Cx = A'x + B'u + D'v$$

 $y = H'x + Gx + F'u + E'v$

These dynamic interaction matrices include the effect of external forces and moments acting on the vehicle. The components of the dynamic interaction vector \mathbf{v} are incremental body axis forces ($\delta \mathbf{X}$, $\delta \mathbf{Y}$, $\delta \mathbf{Z}$) and moments ($\delta \mathbf{L}$, $\delta \mathbf{M}$, $\delta \mathbf{N}$):

$$\mathbf{v} = \begin{bmatrix} \delta \mathbf{x} \\ \delta \mathbf{y} \\ \delta \mathbf{z} \\ \delta \mathbf{L} \\ \delta \mathbf{M} \\ \delta \mathbf{N} \end{bmatrix}$$

Thus,

$$D' = \frac{\partial \mathbf{v}}{\partial \mathbf{f}}$$

$$E' = \frac{\partial g}{\partial v}$$

and

$$D = \left[T - \frac{\partial f}{\partial \mathbf{x}}\right]^{-1} \frac{\partial f}{\partial \mathbf{v}}$$

$$\mathbf{E} = \frac{\partial \mathbf{g}}{\partial \mathbf{v}} + \frac{\partial \mathbf{g}}{\partial \mathbf{x}} \left[\mathbf{T} - \frac{\partial \mathbf{f}}{\partial \mathbf{x}} \right]^{-1} \frac{\partial \mathbf{f}}{\partial \mathbf{v}}$$

These matrices allow the effects of unusual subsystems or control effectors to be easily included in the vehicle dynamics.

The default output matrices for LINEAR are those for the standard system for-mulation. However, the user can select matrices for either generalized or standard state and observation equations in any combination. Internally, the matrices are computed for the generalized system formulation and then combined appropriately to accommodate the system formulation requested by the user.

ANALYSIS POINT DEFINITION

The point at which the nonlinear system equations are linearized is referred to as the analysis point. This can represent a true steady-state condition on the specified trajectory (a point at which the rotational and translational accelerations

are zero; Perkins and Hage, 1949; Thelander, 1965) or a totally arbitrary state on a trajectory. LINEAR allows the user to select from a variety of analysis points. Within the program, these analysis points are referred to as trim conditions, and several options are available to the user. The arbitrary state and control option is designated NOTRIM, and in selecting this option the user must specify all nonzero state and control variables. For the equilibrium conditions, the user specifies a minimum number of parameters, and the program numerically determines required state and control variables to force the rotational and translational accelerations to zero. The analysis point options are described in detail in the following sections.

For all the analysis point definition options, any state or control parameter may be input by the user. Those state variables not required to define the analysis point are used as initial estimates for the calculation of the state and control conditions that result in zero rotational and translational accelerations. As each state variable is read into LINEAR, the name is compared to the list of alternative state variables names listed in appendix C. All state variables except velocity must be specified according to this list. Velocity can also be defined by specifying Mach number (see alternative observation variable names in app. D). Appendix E lists analysis point definition identifiers that are recognized by LINEAR.

It should be noted that the option of allowing the user to linearize the system equations about a nonequilibrium condition raises theoretical issues (beyond the scope of this report) of which the potential user should be aware. Although all the analysis point definition options provided in LINEAR have been found to be useful in the analysis of vehicle dynamics, not all the linear models derived about these analysis points result in the time-invariant systems assumed in this report. However, the results of the linearization provided by LINEAR do give the appearance of being time invariant.

The linearization process as defined in this report is always valid for some time interval beyond the point in the trajectory about which the linearization is done. However, for the resultant system to be truly time invariant, the vehicle must be in a sustainable, steady-state flight condition. This requirement is something more than merely a trim requirement, which is typically represented as $\dot{\mathbf{x}}(t) = 0$, indicating that for trim, all the time derivatives of the state variables must be zero. (This is not the case, however: Trim is achieved when the acceleration-like terms are identically zero; no constraints need to be placed on the velocity-like terms in $\dot{\mathbf{x}}$. Thus, for the model used in LINEAR, only $\dot{\mathbf{p}}$, $\dot{\mathbf{q}}$, $\dot{\mathbf{r}}$, $\dot{\mathbf{v}}$, $\dot{\dot{\mathbf{q}}}$, and $\dot{\beta}$ must be zero to satisfy the trim condition.) The trim condition is achieved for the straight-and-level, pushover-pullup, level turn, thrust-stabilized turn, and beta trim options described in the following sections. In general, the no-trim and specific power analysis point definition options do not result in a trim condition.

Of these analysis point options resulting in a trim condition, only the straightand-level and level turn options force the model to represent sustainable flight conditions. In fact, only in the special case where the flightpath angle is zero does this occur for these options.

As previously stated, the linearization of a nonlinear model and its representation as a time-invariant system are always valid for some time interval beyond the analysis point on the trajectory. This time interval is determined by several fac-

tors (such as trim and sustainable flight conditions) and ultimately by accuracy requirements placed on the representation. Thus, in using the linear models provided by this program, the user should exercise some caution.

Untrimmed

For the untrimmed option, the user specifies all state and control variables that are to be set at some value other than zero. The number of state variables specified is entirely at the user's discretion. If any of the control variables are to be nonzero, the user must specify the control parameter and its value. The untrimmed option allows the user to analyze the vehicle dynamics at any flight condition, including transitory conditions.

Straight-and-Level Trim

The straight-and-level trims available in LINEAR are in fact wings-level, constant-flightpath-angle trims. Both options available for straight-and-level trim allow the user to specify either a flightpath angle or an altitude rate. However, since the default value for these terms is zero, the default for both types of straight-and-level trim is wings-level, horizontal flight.

The two options available for straight-and-level trim require the user to specify altitude and either an angle of attack or a Mach number. If a specific angle of attack and altitude combination is desired, the user selects the "Machtrim" option, which determines the velocity required for the requested trajectory. Likewise, the "alpha-trim" option allows the user to specify Mach number and altitude, and the trim routines in LINEAR determine the angle of attack needed for the requested trajectory.

The trim condition for both straight-and-level options are determined within the following constraints:

$$p = q = r = 0$$

$$\phi = 0$$

The trim surface positions, thrust, angle of sideslip, and either velocity or angle of attack are determined by numerically solving the nonlinear equations for the translational and rotational acceleration. Pitch attitude θ is determined by iterative solution of the altitude rate equation.

Pushover-Pullup

The pushover-pullup analysis point definition options result in wings-level flight at $n \neq 1$. For n > 1, the analysis point is the minimum altitude point of a pullup when h = 0. For n < 1, this trim results in a pushover at the maximum altitude with h = 0. There are two options available for the pushover-pullup analysis point definition: (1) the "alpha-trim" option in which angle of attack is determined from the specified altitude, Mach number, and load factor and (2) the "load-

factor-trim" option in which angle of attack, altitude, and Mach number are specified and load factor is determined according to the constraint equations.

The analysis point is determined at the specified conditions, subject to the following contraints:

$$p = r = 0$$

$$q = \frac{1}{Vm \cos \beta} \left[mg(n - \cos(\theta - \alpha)) - Z_T \cos \alpha + X_T \sin \alpha \right]$$

$$\phi = 0$$

The expression for q is derived from the $\dot{\alpha}$ equation by setting $\dot{\alpha}$ = 0 and ϕ = 0; θ is derived from the \dot{h} equation. The trim surface positions, thrust, angle of sideslip, and either angle of attack or load factor are determined by numerically solving the nonlinear equations for the translational and rotational accelerations.

Level Turn

The level turn analysis point definition options result in non-wings-level, constant-turn-rate flight at n > 1. The vehicle model is assumed to have sufficient excess thrust to trim at the condition specified. If thrust is not sufficient, trim will not result, and the analysis point thus defined will have a nonzero (in fact, negative) velocity rate.

The level trim options available in LINEAR require the specification of an altitude and a Mach number. The user can then use either angle of attack or load factor to define the desired flight condition. These two options are referred to as "alphatrim" and "load-factor-trim," respectively. For either option, the user may also request a specific flightpath angle or altitude rate. Thus, these analysis point definitions may result in ascending or descending spirals, although the default is for the constant-altitude turn.

The constraint equations for the coordinated level turn analysis point definitions are derived by Chen (1981) and Chen and Jeske (1981). Using the requested load factor, the tilt angle of the acceleration normal to the flightpath from the vertical plane, ϕ_L , is calculated using the equation

$$\phi_{\rm L} = \pm \tan^{-1} \left[\frac{(n^2 - \cos^2 \gamma)^{1/2}}{\cos \gamma} \right]$$

where the positive sign is used for a right turn and the negative sign is used for a left turn. From ϕ_L , turn rate can be calculated as

$$\dot{\Psi} = \frac{g}{V} \tan \phi_L$$

Using these two definitions, the state variables can be determined:

$$q = \stackrel{\bullet}{\psi} \sin^2 \phi_L \left[-\sin \gamma \sin \beta \pm \left(\sin^2 \gamma \sin^2 \beta - \frac{\sin^2 \gamma - \cos^2 \beta}{\sin^2 \phi_L} \right)^{1/2} \right]$$

$$r_S = \frac{q}{\tan \phi_L \cos \beta}$$

$$p_S = -\frac{\stackrel{\bullet}{\psi} \sin \gamma}{\cos \beta} - q \tan \beta$$

$$p = p_S \cos \alpha - r_S \sin \alpha$$

$$r = p_S \sin \alpha + r_S \cos \alpha$$

$$\theta = \sin^{-1}(-p/\stackrel{\bullet}{\psi})$$

$$\phi = \tan^{-1}(q/r)$$

The trim surface positions, thrust, angle of sideslip, and either angle of attack or load factor are determined by numerically solving the nonlinear equations for the translational and rotational accelerations.

Thrust-Stabilized Turn

The thrust-stabilized turn analysis point definition results in a constant-throttle, non-wings-level turn with a nonzero altitude rate. The two options available in LINEAR are "alpha-trim" and "load-factor-trim." These options allow the user to specify either the angle of attack or the load factor for the analysis point. The altitude and Mach number at the analysis point must be specified for both options. The user also must specify the value of the thrust trim parameter by assigning a value to the variable THRSTX in the input file after the trim has been selected.

The constraint equations for the thrust-stabilized turn are the same as those for the level turn. However, for this analysis point definition, flightpath angle is determined by LINEAR.

Beta Trim

The beta trim analysis point definition results in non-wings-level, horizontal flight with heading rate $\hat{\psi}=0$ at a user-specified Mach number, altitude, and angle of sideslip. This trim option is nominally at 1 g, but as β varies from zero, normal acceleration decreases and lateral acceleration increases. For an aero-dynamically symmetric aircraft, a trim to $\beta=0$ using the beta trim option results in the same trimmed condition as the straight-and-level trim. However, for an aero-dynamically asymmetric aircraft, such as an oblique-wing vehicle, the two trim options are not equivalent.

The constraint equations used with the beta trim option are

$$p = q = r = 0$$

The trim surface positions, thrust, angle of attack, and bank angle are determined by numerically solving the nonlinear equations for translational and rotational acceleration. Pitch attitude θ is derived from the equation for flightpath angle γ with γ = 0:

$$\theta = \tan^{-1} \left(\frac{\sin \beta \sin \phi + \cos \beta \sin \alpha}{\cos \beta \cos \alpha} \right)$$

Specific Power

The specific power analysis point definition results in a level turn at a user-specified Mach number, altitude, thrust trim parameter, and specific power. Unlike the other trim options provided in LINEAR, the specific power option does not, in general, attempt to achieve velocity rate $\mathring{\mathbf{v}}=0$. In fact, because the altitude rate $\mathring{\mathbf{h}}=0$ and specific power is defined by

$$P_S = h + \frac{vv}{g}$$

the resultant velocity rate will be

$$\dot{V} = \frac{P_S g}{V}$$

However, the other acceleration-like terms $(p, q, r, \alpha, and \beta)$ will be zero if the requested analysis point is achieved.

The constraint equations used with the specific power analysis point definition option can be derived from the load factor tilt angle equation used in the level turn analysis point definition with γ = 0:

$$\phi_{L} = \pm \tan^{-1}(n^2 - 1)^{1/2}$$

(where the positive sign is used for a right turn and the negative sign is used for a left turn),

$$\psi = \frac{g}{V} \tan \phi_L$$

 $q = \psi \sin \phi_L \cos \beta$

$$r_{S} = \frac{q}{\tan \phi_{L} \cos \beta}$$

$$p_S = -q \tan \beta$$

$$p = p_s \cos \alpha - r_s \sin \alpha$$

$$r = p_{S} \sin \alpha + r_{S} \cos \alpha$$

$$\theta = \sin^{-1} \left(-\frac{p}{\psi} \right)$$

$$\phi = \tan^{-1} \frac{q}{r}$$

The analysis point surface positions, load factor, angle of attack, and angle of sideslip are determined by numerically solving the nonlinear equations for translational and rotational accelerations.

NONDIMENSIONAL STABILITY AND CONTROL DERIVATIVES

The nondimensional stability and control derivatives computed by LINEAR from the nonlinear aerodynamic model assume broadly formulated linear aerodynamic equations. These equations include effects of what are normally considered exclusively lateral-directional parameters in the longitudinal force and moment coefficient equations and, conversely, effects of longitudinal parameters in the lateral-directional equations. The reason for this is two-fold: application to a larger class of vehicle types, such as oblique-wing aircraft, and computational ease.

The nondimensional stability and control derivatives assume the following equations for the aerodynamic force and moment coefficients:

$$\begin{split} C_{\ell} &= C_{\ell_{0}} + C_{\ell_{\alpha}} \alpha + C_{\ell_{\beta}} \beta + C_{\ell_{h}} \delta h + C_{\ell_{M}} \delta M + \sum_{i=1}^{n} C_{\ell_{\delta_{i}}} \delta_{i} \\ &+ C_{\ell_{p}} \hat{p} + C_{\ell_{q}} \hat{q} + C_{\ell_{r}} \hat{r} + C_{\ell_{\alpha}} \hat{\alpha} + C_{\ell_{\beta}} \hat{\beta} \\ C_{m} &= C_{m_{0}} + C_{m_{\alpha}} \alpha + C_{m_{\beta}} \beta + C_{m_{h}} \delta h + C_{m_{M}} \delta M + \sum_{i=1}^{n} C_{m_{\delta_{i}}} \delta_{i} \\ &+ C_{m_{p}} \hat{p} + C_{m_{q}} \hat{q} + C_{m_{r}} \hat{r} + C_{m_{\alpha}} \hat{\alpha} + C_{m_{\beta}} \hat{\beta} \\ C_{n} &= C_{n_{0}} + C_{n_{\alpha}} \alpha + C_{n_{\beta}} \beta + C_{n_{h}} \delta h + C_{n_{M}} \delta M + \sum_{i=1}^{n} C_{n_{\delta_{i}}} \delta_{i} \\ &+ C_{n_{p}} \hat{p} + C_{n_{q}} \hat{q} + C_{n_{r}} \hat{r} + C_{n_{\alpha}} \hat{\alpha} + C_{n_{\beta}} \hat{\beta} \\ C_{L} &= C_{L_{0}} + C_{L_{\alpha}} \alpha + C_{L_{\beta}} \beta + C_{L_{h}} \delta h + C_{L_{M}} \delta M + \sum_{i=1}^{n} C_{L_{\delta_{i}}} \delta_{i} \\ &+ C_{L_{p}} \hat{p} + C_{L_{\alpha}} \hat{q} + C_{L_{r}} \hat{r} + C_{L_{\alpha}} \hat{\alpha} + C_{L_{\beta}} \hat{\beta} \end{split}$$

$$\begin{split} C_{D} &= C_{D_{0}} + C_{D_{\alpha}} \alpha + C_{D_{\beta}} \beta + C_{D_{h}} \delta h + C_{D_{M}} \delta M + \sum_{i=1}^{n} C_{D_{\delta_{i}}} \delta_{i} \\ &+ C_{D_{p}} \hat{p} + C_{D_{q}} \hat{q} + C_{D_{r}} \hat{r} + C_{D_{\alpha}} \hat{\alpha} + C_{D_{\beta}} \hat{\beta} \\ C_{Y} &= C_{Y_{0}} + C_{Y_{\alpha}} \alpha + C_{Y_{\beta}} \beta + C_{Y_{h}} \delta h + C_{Y_{M}} \delta M + \sum_{i=1}^{n} C_{Y_{\delta_{i}}} \delta_{i} \\ &+ C_{Y_{p}} \hat{p} + C_{Y_{q}} \hat{q} + C_{Y_{r}} \hat{r} + C_{Y_{\alpha}} \hat{\alpha} + C_{Y_{\beta}} \hat{\beta} \end{split}$$

where the stability and control derivatives have the usual meaning,

$$C^{\varepsilon^{X}} \equiv \frac{9^{X}}{9^{C^{\varepsilon}}}$$

with C_{ϵ} being an arbitrary force or moment coefficient (subscript ℓ denoting rolling moment, m pitching moment, L total lift, D total drag, n yawing moment, and Y force along the y body axis) and x an arbitrary nondimensional variable (α denoting angle of attack, β angle of sideslip, h altitude, M Mach number, p roll rate, q pitch rate, and r yaw rate). The rotational terms in the equations are nondimensional versions of the corresponding state variable with

$$\hat{p} = \frac{bp}{2V}$$

$$\hat{q} = \frac{\bar{c}q}{2V}$$

$$\hat{r} = \frac{br}{2v}$$

$$\hat{\alpha} = \frac{\bar{c}\alpha}{2V}$$

$$\hat{\beta} = \frac{b\hat{\beta}}{2V}$$

where b is wingspan and \bar{c} is mean aerodynamic chord. The δ_i in the summations are the n control variables defined by the user. The effects of altitude and velocity (Mach) are included in the derivatives with respect to those parameters and in the incremental multipliers

$$\delta h = h - h_0$$

$$\delta M = M - M_0$$

where the subscript zero represents the current analysis point (x_0, \dot{x}_0, u_0) , described in the Analysis Point Definition section.

All stability derivatives are computed as nondimensional terms except the altitude and velocity parameters. The control derivatives are in whatever units are used in the nonlinear aerodynamic model. The derivatives with respect to velocity are multiplied by the speed of sound (at the analysis point altitude) to convert them to derivatives with respect to Mach number. Derivatives with respect to angle of attack and angle of sideslip can be obtained in units of reciprocal degrees. These derivatives are simply the corresponding nondimensional derivatives multiplied by $180.0/\pi$.

INPUT FILES

The LINEAR input file (defined in table 1) is separated into seven major sections: case title and file selection information; project title; geometry and mass data for the aircraft; state, control, and observation variable definitions for the state-space model; trim parameter specification; additional control surfaces that may be specified for each case; and various test case specifications. All the input data can be written on one file or various files according to the divisions specified above and according to the input format defined in table 1. An example input file is listed in appendix F. All the input records to LINEAR are written in ASCII form.

TABLE 1. - INPUT FORMAT FOR LINEAR Input record Format Title and file selection information (20A4) Case title Input file names (6A10) Project title (20A4) Project title Geometry and mass data c Weight (4F13.0)(6F13.0) $I_{\mathbf{x}}$ $I_{\mathbf{Z}}$ I_{XZ} Iyz DELY DELZ LOGCG (3F10.0,12A4) DELX (2F13.0) α_{\min} α_{max}

TABLE 1. - Continued.

Input record	Format
State, control, and observation variable d	efinitions
NUMSAT EQUAT STAB	(I10,A4,11X,A4)
STATE 1 DRVINC 1	(5A4,F10.0)
STATE 2 DRVINC 2	(5A4,F10.0)
STATE 3 DRVINC 3	(5A4,F10.0)
• • •	•
•	•
NUMSUR	(110)
CONTROL 1 LOCCNT 1 CONVR 1 CNTINC 1	(5A4, I10, A4, 6X, F10.0
CONTROL 2 LOCCNT 2 CONVR 2 CNTINC 2	(5A4, I10, A4, 6X, F10.0
CONTROL 3 LOCCNT 3 CONVR 3 CNTINC 3	(5A4, I10, A4, 6X, F10.0)
	•
• • •	•
NUMYVC EQUAT	(I10,A4)
MEASUREMENT 1 PARAM 1 (1 to 3)	(5A4,3F10.0)
MEASUREMENT 2 PARAM 2 (1 to 3)	(5A4,3F10.0)
MEASUREMENT 3 PARAM 3 (1 to 3)	(5A4,3F10.0)
• • • • • • • • • • • • • • • • • • •	•
•	•
Trim parameter specification	
δe _{min} δe _{max} δa _{min} δa _{max} δr _{min} δr _{max} δth _{min} δth _{max}	(8F10.0)
Additional surface specification	
NUMXSR	(1X,I2)
ADDITIONAL SURFACE 1 LOCCNT 1 CONVR1	(5A4,I10,A4)
ADDITIONAL SURFACE 2 LOCCNT 2 CONVR2	(5A4,I10,A4)

TABLE 1. - Concluded.

Input records	Format
Additional surface spec	cification (continued)
ADDITIONAL SURFACE 3 LOCCNT 3 CONVR3	(5A4,I10,A4)
· · · · · · · · · · · · · · · · · · ·	• •
Test case sp	pecification
ANALYSIS POINT DEFINITION OPTION	(20A4)
ANALYSIS POINT DEFINITION SUBOPTION	(A4)
VARIABLE 1 VALUE 1	(5A4,F15.5)
VARIABLE 2 VALUE 2	(5A4,F15.5)
VARIABLE 3 VALUE 3	(5A4,F15.5)
· · ·	•
· · ·	• (A4)
ANALYSIS POINT DEFINITION OPTION	(20A4)
ANALYSIS POINT DEFINITION SUBOPTION	(A4)
VARIABLE 1 VALUE 1	(5A4,F15.5)
VARIABLE 2 VALUE 2	(5A4,F15.5)
VARIABLE 3 VALUE 3	(5A4,F15.5)
	•
•	•
END	(A4)

There are seven input files for the batch linearizer. The first is a file containing the vehicle title and the names of the six data input files. The six data input files are

- 1. project title,
- 2. mass and geometry properties,
- 3. state, control, and observation vectors,

- trim parameter limits,
- 5. trim definition cases, and
- 6. additional surfaces to be set.

This is the order in which they must be defined. However, the sixth file will be read before the fifth file.

Case Title, File Selection Information, and Project Title

There are two title records that need to be specified for LINEAR: a title for the individual test cases (case title) being analyzed and the name of the specific vehicle (project title). These records are read with a 20A4 format and are separated by a file selection record. Both titles appear on each page of the line printer output file. The file selection record contains the names of the files from which the data are read. The data contained on the files specified by the six fields of the file selection record are shown in table 2. The input file names are written in character strings 10 columns long, and if not specified, the data are assumed to be on the same file as the first title record and the file selection record. The local name of the file containing these first two records must be attached to FORTRAN device unit 1.

TABLE 2. — DEFINITION OF FILES SPECIFIED IN FILE SELECTION RECORD

Data contained on selected file
Project title
Geometry and mass data
State, control, and observation variable definitions
Trim parameter specifications
Test case specification
Additional surface definitions

Geometry and Mass Data

The geometry and mass data file consists of four records that can either follow the title and file selection records on unit 1 or be stored on a separate file

defined by the first of the input file name definitions on the file selection record. The geometry and mass data records define the geometry, mass properties, location of the aerodynamic reference with respect to the center of gravity, and angle-of-attack range for the vehicle model being analyzed. The first record of this set of five records is a vehicle title record in which the vehicle name and specific configuration can be defined to describe the information presented in the remaining records.

The second and third records define the vehicle geometry, mass, and mass distribution. The second record defines the wing planform area S, in units of length squared, the wingspan b, in units of length, the mean aerodynamic chord of the wing, c, in units of length, and the sea level weight of the vehicle, Weight, in units of mass-length per second squared. The third record defines the vehicle moments and products of inertia in units of mass-length squared. The fourth record defines the location of the vehicle center of gravity with respect to the aerodynamic reference point. This fourth record defines the offset of the aerodynamic reference point with respect to the center of gravity of the vehicle in the normal right-handed body axis reference system with the positive x axis forward and DELX, DELY, and DELZ in table 1 representing the x, y, and z body axis displacements of the aerodynamic reference in units of length (see app. A). The fourth variable of the fourth record is an alphanumeric variable, read using a 12A4 format, to specify if corrections due to an offset of the aerodynamic reference with respect to the center of gravity are to be computed in LINEAR or in the user-supplied aerodynamic subroutine CCALC, described in the User-Supplied Subroutines section. The variable LOGCG defaults to a state that causes the aerodynamic reference offset calculations to be performed by subroutines within LINEAR. Any of the following statements in the LOGCG field will cause LINEAR not to make these corrections:

NO CG CORRECTIONS BY LINEAR

CCALC WILL CALCULATE CG CORRECTIONS

FORCE AND MOMENT CORRECTIONS CALCULATED IN CCALC

The final record of this geometry and mass data set defines the angle-of-attack range for which the user-supplied nonlinear aerodynamic model (CCALC) is valid. These parameters, α_{min} and α_{max} , specify the minimum and maximum values of angle of attack to be used for trimming the aircraft model. These parameters are in units of degrees.

State, Control, and Observation Variable Definitions

The state, control, and observation variables to be used in the output formulation of the linearized system are defined in records that either follow the last of the previously described sets of records on FORTRAN unit 1 or are stored on a separate file defined by the second of the input file selection definitions on the file selection record. The number of records in the state, control, and observation variable definition set is determined by the number of such variables defined by the user.

The states to be used in the output formulation of the linearized system are defined in the first set of records in the state, control, and observation variable definitions. The first record of this set defines the number of states to be used

(NUMSAT), the formulation of the output equation (EQUAT), and whether the nondimensional stability derivatives with respect to angle of attack and angle of sideslip are to be output in units of reciprocal radians or degrees. The variable EQUAT is read using an A4 format and is tested against the following list:

NONSTANDARD NON-STANDARD GENERALIZED EXTENDED

If EQUAT matches the first four characters of any of the listed words, the output formulation of the state equation is

$$Cx = A'x + B'u$$

If EQUAT is read in as STANDARD or does not match the preceding list, then the default standard bilinear formulation of the state equation is assumed, and the output matrices are consistent with the equation

$$\dot{x} = Ax + Bu$$

The variable STAB is also read using an A4 format and is compared with the following list:

DEGREES DGR

If STAB matches the first four characters of either of these words, the nondimensional stability derivatives with respect to angle of attack and angle of sideslip are printed in units of reciprocal degress on the printer file. Otherwise, these derivatives are printed in units of reciprocal radians.

The remaining records of the state variable definition set are used to specify the state variables to be used in the output formulation of the linearized system and the increments to be used for the numerical perturbation described in the Linear Models section. The state variable names are checked for validity against the state variable alphanumeric descriptors listed in appendix C. If a name is not recognized, the variable is ignored and a warning message is written to the printer file. The increment to be used with any state variable (in calculating the A' and H' matrices) and the time derivative of that state variable (in calculating the C and G matrices) can be specified using the DRVINC variable. The units are the units of the state variable or its time derivative except for derivatives with respect to velocity. When DRVINC is specified for velocity, DRVINC specifies a Mach number increment. If DRVINC is not specified by the user, the default value of 0.001 is used.

The next set of records in the state, control, and observation variable definitions are those defining the variables to be used in the control vector of the output model. The first record of this set defines the number of control parameters to be used (NUMSUR). The remaining records define the names of these variables (CONTROL), their location (LOCCNT) in the common block /CONTRL/ (see the User-Supplied Subroutines section), the units associated with these control variables (CONVR), and the increments (CNTINC) to be used with these variables in determining the B' and F' matrices.

Because LINEAR has no default control variable names, the control variable names input by the user are used for subsequent identification of the control variables. Therefore, consistency in the use of control variable names is extremely important, particularly when the user attempts to establish control variable initial conditions when using the untrimmed analysis point definition option.

The CONVR field in the control variable records is used to specify if the control variables are given in degrees or radians. CONVR is read using an A4 format and is compared to the following list:

DEGREES DGR RADIANS RAD

If CONVR agrees with the first four characters of either of the first two names, it is assumed that the control variable is specified in units of degrees. If CONVR agrees with the first four characters of either of the last two listed names, it is assumed that the control variable is specified in units of radians. No units are assumed if CONVR does not agree with any of the listed names. When it is assumed that the control variable is specified in units of radians, the initial value of the control variable is converted to degrees before being written to the printer file.

The variable CNTINC can be used to specify the increments used for a particular control surface when the B' and F' matrices are being calculated. It is assumed that the units of CNTINC agree with those used for the surface, and no unit conversion is attempted on these increments. If CNTINC is not specified for a particular surface, a default value of 0.001 is used.

The final set of records in the state, control, and observation variable definitions pertain to the specification of parameters associated with the observation vector, observation equation, and observation parameters. The first record of this set defines the number of observation variables (NUMYVC) to be used in the output linear model and the formulation of the output equation (EQUAT). The remaining records in this set specify the variables to be included in the observation vector (MEASUREMENT) and any position information (PARAM) that may be required to compute the output model for a sensor not located at the vehicle center of gravity.

The variable used to specify the formulation of the observation equation (EQUAT) is compared with the same list of names used to determine the formulation of the state equation. If it is determined that the generalized formulation is desired, the observation equation

$$y = H'x + Gx + F'u$$

is used. Otherwise, the standard formulation is assumed, and the form of the observation equation used is

$$y = Hx + Fu$$

The records defining the observation variables to be used in the output formulation of the linear model contain a variable that includes the parameter name (MEASUREMENT) and three fields (PARAM) defining, when appropriate, the location of the sensor relative to the vehicle center of gravity. The parameter name is compared with the list of observation variables given in appendix D. If the parameter name is recognized as a valid observation variable name, that observation variable is included in the formulation of the output observation vector. If the parameter name is not recognized, an error message is printed and the parameter named is ignored. The three variables represented by PARAM(1), PARAM(2), and PARAM(3) provide the x-axis, y-axis, and z-axis locations, respectively, of the measurement with respect to the vehicle center of gravity if the selected observation is one of the following:

a_{x,i}

a_{y,i}

 $a_{z,i}$

a_{n,i}

h,i

h i

 $\alpha_{,i}$

β.i

The unit associated with these variables is length. If the selected observation variable is not in the preceding list, the PARAM variables are not used. The sole exception to this occurs when Reynolds number is requested as an observation variable. In that case, PARAM(1) is used to specify the characteristic length. When no value is input for PARAM(1), the mean aerodynamic chord \bar{c} is used as the characteristic length.

Trim Parameter Specification

There is one record in the trim parameter specification set that is associated with the subroutine UCNTRL (described in the User-Supplied Subroutines section). This record specifies the limits to be used for the trim parameters δ_{e} , δ_{a} , δ_{r} , and δ_{th} , representing the longitudinal, lateral, directional, and thrust trim parameters, respectively. The units associated with these parameters are defined by the implementation of UCNTRL.

Additional Surface Specification

The first record of this set of additional surface specifications defines the number of additional controls to be included in the list of recognized control names (NUMXSR). The purpose of defining these additional controls is to allow the user to set such variables as landing gear position, wing sweep, or flap position. Only the controls are defined in the additional surface specification records; actual control

positions are defined in the analysis point definition records. Because there may be no additional controls, these secondary trim parameter specification records may not be present. If such controls are defined, the records defining them will have the format specified in table 1. The control variable name (ADDITIONAL SURFACE), location (LOCCNT) in the common block /CONTRL/, and the units associated with this control variable (CONVR) are specified for each additional control.

Test Case Specification

The test case specification records allow the user to define the flight condition, or analysis point, at which a linear model is to be derived. Multiple cases can be included in the test case specification records. The final record in each set directs the program to proceed (NEXT) or to stop (END) execution.

The first record of a test case specification set determines the analysis point, or trim, option to be used for the current case. The ANALYSIS POINT DEFINITION OPTION parameter is read in and checked against the list of analysis point definition identifiers described in appendix E. The second record of a test case specification set, defining an analysis point definition suboption (ANALYSIS POINT DEFINITION SUBOPTION), will be read only if the requested analysis point definition option has a suboption associated with it. These suboptions are defined in the Analysis Point Definition section. The valid alphanumeric descriptors for these suboptions are described in appendix E.

The remaining records in a test case specification set define test conditions or initial conditions for the trimming subroutines. These records consist of a field defining a parameter name (VARIABLE) and its initial condition (VALUE). These records may be in any order; however, if initial Mach number is to be defined, the initial altitude must be specified before Mach number if the correct initial velocity is to be determined. The parameter names are checked against all name lists used within LINEAR. Any recognized state, time derivative of state, control, or observation variable will be accepted. Trim parameters also can be set in these records.

In general, setting observation variables and time derivatives of the state variables has little effect. However, for some of the trim options defined in the Analysis Point Definition section, Mach number and load factor are used. The thrust trim parameter only affects the specific power trim. For the untrimmed option, the initial values of the state and control variables determine the analysis point completely. For all other trim options, only certain states are not varied; all controls connected to the aerodynamic and engine model are varied.

OUTPUT FILES

There are three output files from LINEAR: a general-purpose analysis file, a printer file containing the calculated case conditions and the state-space matrices for each case, and a printer file containing the calculated case conditions only.

The general-purpose analysis file contains the title for the cases being analyzed; the state, control, and observation variables used to define the state-space model; and the state and observation matrices calculated in LINEAR. The C and G

matrices are printed only if the user has selected an appropriate formulation of the state and observation equations. The output for this file is assigned to FORTRAN device unit 15. An example of a general-purpose analysis file is presented in appendix G, corresponding to the format of table 3.

TABLE 3. - ANALYSIS FILE FORMAT

Variable	Format
Title of the case	(4A20)
Title of the aircraft	(4A2O)
Case number	(//,64x,I3)
Number of states, controls, and outputs	(17X,I2,22X,I2,22X,I3)
State equation formulation	(36X,2A4)
Observation equation formulation	(36X,2A4) (////)
State variable names, values, and units	(1X,5A4,3X,E12.6,2X,A20) (////)
Control variable names, values, and units	(1x,5A4,3x,E12.6,2x,A20) (////)
Dynamic interaction variable names and units	(1x,5A4,17x,A20) (////)
Output variable names, values, and units	(1X,5A4,3X,E12.6,2X,A20)
Matrix name	(//,A8,/)
A matrix	(5(E13.6))
Matrix name	(//,A8,/)
B matrix	(5(E13.6))
Matrix name	(//,A8,/)
D matrix	(5(E13.6))
Matrix name	(//,A8,/)
C matrix (if general form chosen)	(5(E13.6))
Matrix name	(//,A8,/)
H matrix	(5(E13.6))

TABLE 3. - Concluded.

Variable	Format
Matrix name	(//,A8,/)
F matrix	(5(E13.6))
Matrix name	(//,A8,/)
E matrix	(5(E13.6))
Matrix name	(//,A8,/)
G matrix (if general form chosen)	(5(E13.6))

The titles are written on the first two records of the file in 80-character strings and are specified in LINEAR as the title of the vehicle and the title for the cases. The next record contains the number of the case as defined in LINEAR (999 cases maximum).

The number of states, controls, and outputs used to define each case are written on the following record. The formulation of the state and observation equations are listed next, followed by the names and values of the states, controls, dynamic interaction variables, and outputs. These values are followed by the matrices that describe each case.

The titles records appear only at the beginning of the file; all other records are duplicated for each subsequent case calculated in LINEAR. The matrices are written row-wise, five columns at a time, as illustrated in the following tabulation, which shows a system containing 7 states, 3 controls, and 11 outputs using the general state equation and standard observation equation.

Size	of matrix	Output	formulation
A =	[7 x 7]	A =	[7 x 5]
В =	[7 x 3]	в =	[7 x 2] [7 x 3]
D =	[7 x 6]	D =	[7 x 5]
C =	[7 x 7]	C =	[7 x 1] [7 x 5]
Н =	[11 x 7]	Н =	[7 x 2] [11 x 5]
F =	[11 x 3]	F =	[11 x 2] [11 x 3]
	[11 x 6]		[11 x 5]
			[11 x 1]

The second output file, which is assigned to FORTRAN device unit 3, contains the values calculated in LINEAR describing each case. The first section of this file contains a listing of the input data defining the aircraft's geometry and mass properties, variable names defining the state-space model, and various control surface limits characteristic of the given aircraft. Appendix H presents an example of this output file.

The second section of this file contains the trim conditions of the aircraft at the point of interest. These conditions include the type of trim being attempted, whether trim was achieved, and parameters defining the trim condition.

The values for the variables of the state-space model at the trim condition are also printed. If trim was not achieved, p, q, r, V, β , and α (calculated from the equations of motion) and the force and moment coefficients are printed. Changes in the geometry and mass properties are also printed.

The third section of this output file contains the nondimensional stability and control derivatives for the trim condition calculated. The static margin of the aircraft at the given flight condition is also printed.

The final section of this output file contains the state and observation matrices for the given flight condition. The formulation of the state equations and only the terms of the matrices chosen by the user to define the model are printed. A subset of this output file containing only the trim conditions is assigned to FORTRAN device unit 2.

The third output file, which is assigned to FORTRAN device unit 2, contains the trim conditions of the aircraft at the point of interest. These conditions include the type of trim being attempted, whether trim was achieved, parameters defining the trim condition, and the static margin of the aircraft at the given flight condition. Appendix H presents an example of this file.

USER-SUPPLIED SUBROUTINES

There are five subroutines that must be supplied by the user to interface LINEAR with a specific aircraft's subsystem models: ADATIN, CCALC, IFENGN, UCNTRL, and MASGEO. The first two subroutines constitute the aerodynamic model. The subroutine IFENGN is used to provide an interface between LINEAR and any engine modeling routines the user may wish to incorporate. UCNTRL converts the trim parameters used by LINEAR into control surface deflections for the aerodynamic modeling routines. The subroutine MASGEO allows the user to define the mass and geometry properties of the vehicle as a function of flight condition or control setting. The use of these subroutines is illustrated in figure 3, which shows the program flow and the interaction of LINEAR with the user-supplied subroutines. These subroutines are described in detail in the following sections. Examples of these subroutines are given in appendix I.

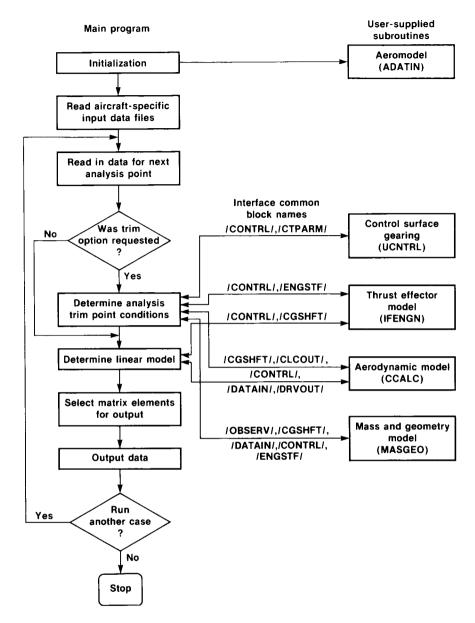


Figure 3. Program flow diagram showing communication with user-supplied subroutines.

Aerodynamic Model

It is assumed that the aerodynamic models consist of two main subroutines, ADATIN and CCALC. ADATIN is used to input the basic aerodynamic data from remote storage and can also be used to define aerodynamic data. CCALC is the subroutine that uses these aerodynamic data, the state variables, and the surface positions to determine the aerodynamic coefficients. Either routine may call other subroutines to perform related or required functions; however, from the point of view of the interface to LINEAR, only these two subroutines are required for an aerodynamic model.

Externally, ADATIN has no interface to the program LINEAR. The subroutine is called only once when the aerodynamic data are input or defined. The calling program must provide ADATIN with the input devices it requires, but no other accommodation is necessary. The aerodynamic data are communicated from ADATIN to CCALC through named common blocks that occur in only these two routines.

The interface between CCALC and the calling program is somewhat more complicated. However, the interface is standard, and this feature provides a framework about which a general-purpose tool can be built. This interface consists of several named common blocks that are used to pass state variables, air data parameters, surface positions, and force and moment coefficients between CCALC and the calling program. CCALC is executed whenever new aerodynamic coefficients are required (for example, once per frame for a real-time simulation).

The main transfer of data into the subroutine CCALC is through six named common blocks. These common blocks contain the state variables, air data parameters, and surface positions. The transfer of data from CCALC is through a named common block containing the aerodynamic force and moment coefficients. The details of these common blocks follow.

The common block /DRVOUT/ contains the state variables and their derivatives with respect to time. The structure of this common block is as follows:

COMMON /DRVOUT/ T , R , Q , ALP , BTA THA , PSI , PHI Н , X , Y TDOT PDOT , QDOT , RDOT , ALPDOT, BTADOT, TOGV THADOT, PSIDOT, PHIDOT, HDOT , XDOT , YDOT

The body axis rates p, q, and r appear as P, Q, and R, respectively. Total velocity is represented by the variable V, altitude by H; angle of attack (ALP), angle of sideslip (BTA), and their derivatives with respect to time (ALPDOT and BTADOT, respectively) are also contained within this common block.

The common block /SIMOUT/ contains the main air data parameters required for the function generation subroutine. The variables in this common block are

COMMON /SIMOUT/ AMCH, QBAR, GMA, DEL,

UB , VB , WB ,

VEAS, VCAS

Mach number and dynamic pressure are the first entries in the common block, symbolized by AMCH and QBAR, respectively. The body axis velocities u, v, and w are included as UB, VB, and WB, respectively.

The /CONTRL/ common block contains the surface position information. The exact definition of each of the elements used for a particular aerodynamic model is determined by the implementer of that model. The structure of the common block /CONTRL/ is as follows:

COMMON /CONTRL/ DC (30)

The common block /DATAIN/ contains geometry and mass information.

COMMON /DATAIN/ S , B , CBAR, AMSS,

AIX , AIY , AIZ , AIXZ,

AIXY, AIYZ, AIXE

The first three variables in the common block, S, B, and CBAR, represent wing area, wingspan, and mean aerodynamic chord, respectively. The vehicle mass is represented by AMSS.

The information on the displacement of the aerodynamic reference point of the aerodynamic data with respect to the aircraft center of gravity is contained in the /CGSHFT/ common block:

COMMON /CGSHFT/ DELX, DELY, DELZ

The displacements are defined along the vehicle body axis with DELX, DELY, and DELZ representing the displacements in the x, y, and z axes, respectively.

The common block /SIMACC/ contains the accelerations, accelerometer outputs, and normal accelerometer output at the center of gravity of the aircraft.

COMMON /SIMACC/ AX , AY , AZ ,

ANX, ANY, ANZ,

AN

The output common block /CLCOUT/ contains the variables representing the aerodynamic moment and force coefficients:

COMMON /CLCOUT/ CL, CM, CN, CD, CLFT, CY

The variables CL, CM, and CN are the symbols for the coefficients of rolling moment C_{ℓ} , pitching moment C_{m} , and yawing moment C_{n} , respectively; these terms are body axis coefficients. The stability axis forces are represented by CD (coefficient of drag C_{D}), CLFT (coefficient of lift C_{L}), and CY (sideforce coefficient C_{Y}).

Control Model

The program LINEAR attempts to trim the given condition using control inputs similar to those of a pilot: longitudinal stick, lateral stick, rudder, and throttle. The UCNTRL subroutine utilizes these trim output control values to calculate actual surface deflections and power level angles for the given aircraft (fig. 2). The location of each surface and power level angle in the /CONTRL/ common block is specified by the user in the input file (maximum of 30 surfaces). The limits for the control parameters in pitch, roll, yaw, and thrust are user specified (see Trim Parameter Specification in the Input Files section) and must agree in units with the calculations in CCALC.

The common block /CTPARM/ contains the four trim parameters that must be related to surface deflections in the subroutine UCNTRL:

COMMON /CTPARM/ DES, DAS, DRS, THRSTX

The output from UCNTRL is through the common block /CONTRL/ described previously in the Aerodynamic Model section. The variables DES, DAS, DRS, and THRSTX are used to trim the longitudinal, lateral, directional, and thrust axes, respectively.

For an aircraft using feedback (such as a statically unstable vehicle), state variables and their derivatives are available in the common block /DRVOUT/. If parameters other than state variables and their time derivatives are required for feedback, the user may access them using the common block /OBSERV/ described in the Mass and Geometry Model section of this report.

Engine Model

The subroutine IFENGN computes individual engine parameters used by LINEAR to calculate force, torque, and gyroscopic effects due to engine offset from the centerline. The parameters for each engine (maximum of four engines) are passed through common /ENGSTF/ as follows:

```
COMMON /ENGSTF/ THRUST(4), TLOCAT(4,3), XYANGL(4), XZANGL(4), TVANXY(4), TVANXZ (4), DXTHRS(4), EIX (4), AMSENG (4), ENGOMG(4)
```

The variables in this common block correspond to thrust (THRUST); the x, y, and z body axis coordinates of the point at which thrust acts (TLOCAT); the orientation of the thrust vector in the x-y body axis plane (XYANGL), in degrees; the orientation of the thrust vector in the x-z body axis plane (XZANGL), in degrees; the orientation of the thrust vector in the x-y engine axis plane (TVANXY), in degrees; the orientation of the thrust vector in the x-z engine axis plane (TVANXZ), in degrees; the distance between the center-of-gravity of the engine and the thrust point (DXTHRS), measured positive in the negative x engine axis; the rotational inertia of

the engine (EIX); mass (AMSENG); and the rotational velocity of the engine (ENGOMG). The variables are all dimensioned to accommodate up to four engines.

While the common block structure within LINEAR is designed for engines that do not interact with the vehicle aerodynamics, propeller-driven aircraft can be easily modeled by communicating the appropriate parameters from the engine model (IFENGN) to the aerodynamic model (CCALC).

Mass and Geometry Model

The subroutine MASGEO allows the user to vary the center-of-gravity position and vehicle inertias automatically. Nominally, this subroutine must exist as one of the user subroutines, but it may be nothing more than RETURN and END statements. MASGEO is primarily for variable-geometry aircraft (such as an oblique-wing or variable-sweep configurations) or for modeling aircraft that undergo significant mass or inertia changes over their operating range. The center-of-gravity position and inertias may be functions of flight condition or any surface defined in the /CONTRL/ common block. Changes in center-of-gravity position are passed in the /CGSHFT/ common block, and inertia changes are passed in the /DATAIN/ common block.

Care must be taken when using the subroutine MASGEO in combination with selecting an observation vector that contains measurements away from the center of gravity. If measurements are desired at a fixed location on the vehicle, such as a sensor platform or nose boom, the moment arm to the new center-of-gravity location must be recomputed as a result of the center-of-gravity shift for accurate results. This can be accomplished by implementing the moment arm calculations in one of the user subroutines and passing the new moment arm values through the /OBSERV/ common block:

COMMON /OBSERV/ OBVEC(120), PARAM(120,6)

The common block /OBSERV/ allows the user to access all the observation variables during trim as well as to pass parameters associated with the observations back to LINEAR. The common block /OBSERV/ contains two single-precision vectors: OBVEC(120), and PARAM(120,6). A list of the available observations and parameters is given in table 4. Access to the observation variables allows the user to implement trim strategies that are functions of observations, such as gain schedules and surface management schemes. The parameters associated with the observations are used primarily to define the moment arm from the center of gravity to the point at which the observation is to be made. If the user subroutine MASGEO is used to change the center-of-gravity location and observations are desired at fixed locations on the vehicle, then the moment arm from the new center-of-gravity location to the fixed sensor location ((x, y, z), in feet) must be computed in one of the user subroutines and passed back in the first three elements of the PARAM vector associated with the desired observation (PARAM(n = 1 to 3), where n is the number of the desired observation). Additional information on observations and parameters can be found in the State, Control, and Observation Variable Definitions section.

TABLE 4. — OBSERVATION VARIABLES AVAILABLE IN THE USER-SUPPLIED SUBROUTINES USING THE OBVEC ARRAY

Location (index) in OBVEC	Variable				
State Variables					
1	Roll rate				
2	Pitch rate				
3	Yaw rate				
4	Velocity				
5	Angle of attack				
6	Angle of sideslip				
7	Pitch attitude				
8	Heading				
9	Roll attitude				
10	Altitude				
11 12	Displacement north Displacement east				
12					
	Derivatives of state variables				
13	Roll acceleration				
14	Pitch acceleration				
15	Yaw acceleration				
16	Velocity rate				
17	Angle-of-attack rate				
18	Angle-of-sideslip rate				
19	Pitch attitude rate				
20	Heading rate				
21	Roll attitude rate				
22	Altitude rate				
23 24	Velocity north Velocity east				
	Accelerations				
25	x body axis acceleration				
26	y body axis acceleration				
27	z body axis acceleration				
28	x body axis accelerometer at vehicle				
29	center of gravity				
29	y body axis accelerometer at vehicle center of gravity				
30	z body axis accelerometer at vehicle				
50	center of gravity				
31	Normal acceleration				
32	x body axis accelerometer not at vehicle				
	center of gravity				
33	y body axis accelerometer not at vehicl				
·	center of gravity				

TABLE 4. - Continued.

Location (index) in OBVEC	Variable		
	Accelerations (continued)		
34	z body axis accelerometer not at veh center of gravity		
99	Normal accelerometer not at vehicle center of gravity		
98	Load factor		
	Air data parameters		
91	Speed of sound		
37	Reynolds number		
103	Reynolds number per unit length		
35	Mach number		
36	Dynamic pressure		
56	Impact pressure		
55	Ambient pressure		
57	<pre>Impact/ambient pressure ratio</pre>		
58	Total pressure		
59	Temperature		
60	Total temperature		
92	Equivalent airspeed		
93	Calibrated airspeed		
F	lightpath-related parameters		
39	Flightpath angle		
38	Flightpath acceleration		
40	Flightpath angle rate		
43	Scaled altitude rate		
	Energy-related terms		
46	Specific power		
47	Specific energy		
	Force parameters		
94	Lift force		
95	Drag force		
96	Normal force		
97	Axial force		
	Body axis parameters		
52	x body axis velocity		
53	y body axis velocity		
54	z body axis velocity		

TABLE 4. - Concluded.

Location (index) in OBVEC	Variable			
Body axis parameters (continued)				
100	Rate of change of velocity in x body axis			
101	Rate of change of velocity in y body axis			
102	Rate of change of velocity in z body axis			
Miscellaneous measurements not at vehicle center of gravity				
44	Angle of attack not at vehicle center of gravity			
45	Angle of sideslip not at vehicle center of gravity			
41	Altitude instrument not at vehicle center of gravity			
42	Altitude rate instrument not at vehicle center of gravity			
Oth	er miscellaneous parameters			
48	Vehicle total angular momentum			
49 50	Stability axis roll rate Stability axis pitch rate			
51	Stability axis yaw rate			
C	ontrol surface parameters			
61 to 90	Control surfaces DC(1) to DC(30)			
	Trim parameters			
104	Longitudinal trim parameter			
105	Lateral trim parameter			
106 107	Directional trim parameter Thrust trim parameter			

CONCLUDING REMARKS

The FORTRAN program LINEAR was developed to provide a flexible, powerful, and documented tool to derive linear models for aircraft stability analysis and control law design. This report discusses LINEAR from the perspective of a potential user, defining the nonlinear equations from which the linear model is derived and describ-

ing the interfaces to user-supplied subroutines and input files. The output from LINEAR is also described. Examples of the user-supplied subroutines are presented in the appendixes. A microfiche listing of the program for a VAX 11/750 with the VMS operating system is included with this report. (Revisions to the microfiche supplement are given in app. J.)

The program LINEAR numerically determines a linear system model using nonlinear equations of motion and a user-supplied nonlinear aerodynamic model. LINEAR is also capable of extracting linearized engine effects (such as net thrust, torque, and gyroscopic effects) and including these effects in the linear system model. The point as which this linear system model is defined is determined either by completely specifying the state and control variables or by specifying an analysis point on a trajectory, selecting a trim option, and directing the program to determine the control variables and remaining state variables.

The system model determined by LINEAR consists of matrices for both state and observation equations. The program has been designed to provide an easy selection and definition of the state, control, and observation variables to be used in a particular model. Thus, the order of the system model is completely under user control. Further, the program provides the flexibility of allowing alternative formulations of both state and observation equations.

LINEAR has several features that make it unique among the linearization programs common in the aerospace industry. The most significant of these features is flexibility. By generalizing the surface definitions and making no assumptions of symmetric mass distributions, the program can be applied to any aircraft in any phase of flight except hover. The unique trimming capability, implemented through a usersupplied subroutine, allows unlimited possibilities of trimming strategies and surface scheduling, which are particularly important for oblique-wing vehicles and aircraft having multiple surfaces affecting a single axis. The formulation of the equations of motion permit the inclusion of thrust-vectoring effects. The ability to select, without program modification, the state, control, and observation variables for the linear models, combined with the large number of observation quantities available, allows any analysis problem to be solved with ease.

This report documents the use of the program LINEAR, defining the equations used and the methods employed to implement the program. The trimming capabilities of LINEAR are discussed from both theoretical and implementation perspectives. The input and output files are described in detail. The user-supplied subroutines required for LINEAR are discussed, and sample subroutines are presented.

National Aeronautics and Space Administration Ames Research Center Dryden Flight Research Facility Edwards, California, March 6, 1985

APPENDIX A: CORRECTION TO AERODYNAMIC COEFFICIENTS FOR A CENTER OF GRAVITY NOT AT THE AERODYNAMIC REFERENCE POINT

The point on the vehicle at which the nonlinear force and moment coefficients are defined is referred to as the aerodynamic reference point. All aerodynamic effects are modeled at this aerodynamic reference point. Thus, when this point and the vehicle center of gravity are not coincident, the forces acting at the aerodynamic reference point effectively induce moments that act incrementally on the moments defined at the aerodynamic reference point by the nonlinear aerodynamic model.

The total aerodynamic moment ${\bf M}$ acting at the vehicle center of gravity is defined as

$$M = M_{ar} + \Delta r \times F$$

where

$$M_{ar} = [L_{ar} \quad M_{ar} \quad N_{ar}]^T$$

is the total aerodynamic moment acting at the aerodynamic reference point (denoted by subscript ar) of the vehicle,

$$\Delta \mathbf{r} = [\Delta \mathbf{x} \quad \Delta \mathbf{y} \quad \Delta \mathbf{z}]^{\mathrm{T}}$$

is the displacement of the aerodynamic reference point from the vehicle center of gravity, and

$$\mathbf{F} = [X \ Y \ Z]^{\mathrm{T}}$$

is the total aerodynamic force acting at the aerodynamic center, where X, Y, and Z are total forces along the x, Y (sideforce), and Z body axes. Thus,

$$\mathbf{M} = \begin{bmatrix} \mathbf{L}_{ar} + \Delta \mathbf{y} & \mathbf{Z} - \Delta \mathbf{z} & \mathbf{Y} \\ \mathbf{M}_{ar} + \Delta \mathbf{z} & \mathbf{X} - \Delta \mathbf{x} & \mathbf{Z} \\ \mathbf{N}_{ar} + \Delta \mathbf{x} & \mathbf{Y} - \Delta \mathbf{y} & \mathbf{X} \end{bmatrix}$$

The total aerodynamic moment acting at the vehicle center can be expressed in terms of the force and moment coefficients derived from the user-supplied nonlinear aerodynamic modeling subroutine CCALC by defining the body axis forces in terms of stability axis force coefficients:

$$x = \overline{q}s(-C_D \cos \alpha + C_L \sin \alpha)$$

 $Y = \overline{q}sC_Y$
 $Z = \overline{q}s(-C_D \sin \alpha - C_L \cos \alpha)$

Substituting these equations into the definition of the total aerodynamic moment equation and applying the definitions of the total aerodynamic moments,

$$L_{ar} = \overline{q}SbC_{\ell}_{ar}$$

$$M_{ar} = \overline{q}S\overline{c}C_{m_{ar}}$$

$$N_{ar} = \overline{q}SbC_{n_{ar}}$$

expressions for total aerodynamic moment coefficients corrected to the vehicle center of gravity can be derived as follows:

$$C_{\ell} = C_{\ell_{ar}} + \frac{\Delta y}{b} (-C_{D} \sin \alpha - C_{L} \cos \alpha) - \frac{\Delta z}{b} C_{Y}$$

$$C_{m} = C_{m_{ar}} + \frac{\Delta z}{\bar{c}} (-C_{D} \cos \alpha + C_{L} \sin \alpha) - \frac{\Delta x}{\bar{c}} (-C_{D} \sin \alpha - C_{L} \cos \alpha)$$

$$C_{n} = C_{n_{ar}} + \frac{\Delta x}{b} C_{Y} - \frac{\Delta y}{b} (-C_{D} \cos \alpha + C_{L} \sin \alpha)$$

These calculations are normally performed within LINEAR in the subroutine CGCALC. However, if the user selects, the calculation can be performed within the user-supplied aerodynamic model, CCALC.

APPENDIX B: ENGINE TORQUE AND GYROSCOPIC EFFECTS MODEL

Torque and gyroscopic effects represent (after thrust) the main contributions of the engines to the aircraft dynamics. The torque effects arise due to thrust vectors not acting at the vehicle center of gravity. The gyroscopic effects are a consequence of the interaction of the rotating mass of the engine and the vehicle dynamics. These effects can be either major or virtually negligible, depending on the vehicle.

The torque effects can be modeled by considering the thrust of an engine, \mathbf{F}_p , where the thrust vector is aligned with the local x axis of the engine acting at some point $\Delta \mathbf{r}$ from the center of gravity of the vehicle, as shown in figure 4.

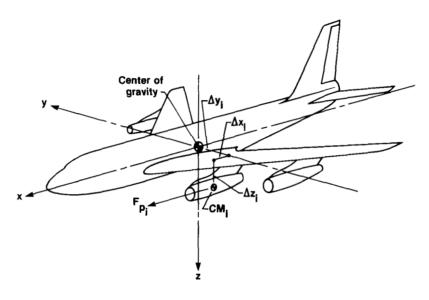


Figure 4. Definition of location of engine center of mass (CM_1) relative to vehicle center of gravity.

The thrust vector for the ith engine, \mathbf{F}_{p_i} , can be defined as

$$\mathbf{F}_{p_i} = \begin{bmatrix} \mathbf{F}_{p_{\mathbf{X}_i}} & \mathbf{F}_{p_{\mathbf{Y}_i}} & \mathbf{F}_{p_{\mathbf{Z}_i}} \end{bmatrix}^{\mathrm{T}}$$

where $F_{p_{x_i}}$, $F_{p_{y_i}}$, and $F_{p_{z_i}}$ are the components of thrust in the x, y, and z body axes, respectively. From figures 5 and 6 it can be seen that the following relationships hold:

$$\begin{aligned} \mathbf{F}_{\mathbf{p}_{\mathbf{x}_{i}}} &= \left| \mathbf{F}_{\mathbf{p}_{i}} \right| \cos \varepsilon_{i} \cos \xi_{i} \\ \mathbf{F}_{\mathbf{p}_{\mathbf{y}_{i}}} &= \left| \mathbf{F}_{\mathbf{p}_{i}} \right| \cos \varepsilon_{i} \sin \xi_{i} \\ \mathbf{F}_{\mathbf{p}_{\mathbf{z}_{i}}} &= -\left| \mathbf{F}_{\mathbf{p}_{i}} \right| \sin \varepsilon_{i} \end{aligned}$$

where $|\mathbf{F}_{p_i}|$ represents the magnitude of the thrust due to the ith engine, ϵ_i the angle from the thrust axis of the engine to the x-y body axis plane, and ξ_i the angle from the projection of \mathbf{F}_{p_i} onto the x-y body axis plane to the x body axis.

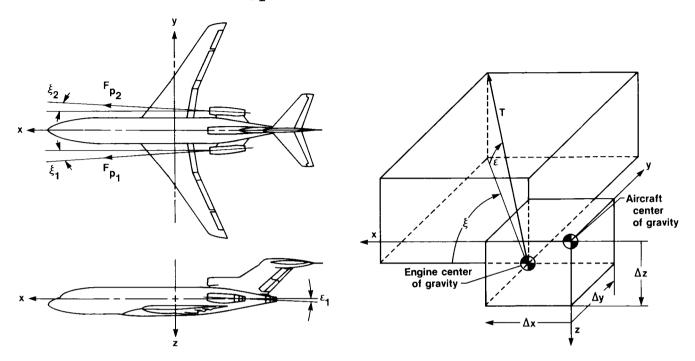


Figure 5. Orientation of the engines in the x-y and x-z body axis planes.

Figure 6. Detailed definition of engine location and orientation parameters.

Denoting the point at which the thrust from the ith engine acts as Δr_i , this offset vector can be defined as

$$\Delta r_i = [\Delta x_i \quad \Delta y_i \quad \Delta z_i]^T$$

where Δx_i , Δy_i , and Δz_i are the x, y, and z body axis coordinates, respectively, of the origin of the ith thrust vector.

The torque due to offset from the center of gravity of the ith engine, $\Delta \tau_{0_{\dot{1}}}$, is then given by

$$\Delta \tau_{o_i} = \Delta r_i \times r_{o_i}$$

Thus,

$$\Delta \tau_{o_i} = \begin{bmatrix} \Delta y & F_{p_{z_i}} - \Delta z & F_{p_{y_i}} \\ \Delta z & F_{p_{x_i}} - \Delta x & F_{p_{z_i}} \\ \Delta x & F_{p_{y_i}} - \Delta y & F_{p_{x_i}} \end{bmatrix}$$

The total torque due to engines offset from the center of gravity of the vehicle, τ_0 , is given by

$$\tau_{o} = \sum_{i=1}^{n} \Delta \tau_{o_{i}} = \sum_{i=1}^{n} (\Delta r_{i} \times \Delta F_{p_{i}})$$

where n is the number of engines.

For the case of vectored thrust, the equations for torque produced at the vehicle center of gravity from the ith engine, $\Delta \tau_{0_{\hat{1}}}$, are somewhat more complicated. Figure 7 schematically represents an engine with thrust vectoring whose center of gravity is located at $\Delta r_{\hat{1}}$ relative to the vehicle's center of gravity.




Figure 7. Detailed definition of thrust-vectoring parameters.

The thrust is assummed to act at $-\Delta x_T$ in the local (engine) x axis, with the engine center of gravity being the origin of this local coordinate system. The thrust is also assumed to be vectored at angles η_i and ζ_i relative to the local coordinate axes, with η_i being the angle from the thrust vector to the engine x-y plane and ζ_i the angle from the projection of the thrust vector onto the engine x-y plane to the local x axis. Thus, letting $F_{\mathbf{y}_i}^{'}$, $F_{\mathbf{y}_i}^{'}$, and $F_{\mathbf{y}_i}^{'}$ represent the x, y, and z thrust components in the local engine coordinate system, respectively, these terms can be defined in terms of the total thrust for the ith engine, $F_{\mathbf{p}_i}$, and the angles η_i and ζ_i as

$$\begin{aligned} \mathbf{F}_{\mathbf{p}_{\mathbf{x}_{i}}}^{\prime} &= \left| \mathbf{F}_{\mathbf{p}_{i}} \right| \cos \eta_{i} \cos \zeta_{i} \\ \\ \mathbf{F}_{\mathbf{p}_{\mathbf{y}_{i}}}^{\prime} &= \left| \mathbf{F}_{\mathbf{p}_{i}} \right| \cos \eta_{i} \sin \zeta_{i} \\ \\ \mathbf{F}_{\mathbf{p}_{\mathbf{z}_{i}}}^{\prime} &= -\left| \mathbf{F}_{\mathbf{p}_{i}} \right| \sin \eta_{i} \end{aligned}$$

where

$$\mathbf{F}_{\mathbf{p_i}} = \begin{bmatrix} \mathbf{F}_{\mathbf{p_{x_i}}}^{\prime} & \mathbf{F}_{\mathbf{p_{y_i}}}^{\prime} & \mathbf{F}_{\mathbf{p_{z_i}}}^{\prime} \end{bmatrix}^{\mathrm{T}}$$

To transform this equation from the ith engine axis system to the body axis system, the transformation matrix

$$\begin{bmatrix}\cos \, \epsilon_i \, \cos \, \xi_i & -\sin \, \xi_i & \sin \, \epsilon_i \, \cos \, \xi_i \\ \cos \, \epsilon_i \, \cos \, \xi_i & \cos \, \xi_i & \sin \, \epsilon_i \, \cos \, \xi_i \\ -\sin \, \epsilon_i & 0 & \cos \, \epsilon_i \end{bmatrix}$$

is used.

The resultant force in body axis coordinates is

$$\mathbf{F}_{p_{\mathbf{i}}} = \begin{bmatrix} \mathbf{F}_{p_{\mathbf{x}_{\mathbf{i}}}} \\ \mathbf{F}_{p_{\mathbf{y}_{\mathbf{i}}}} \\ \mathbf{F}_{p_{\mathbf{z}_{\mathbf{i}}}} \end{bmatrix} = \begin{bmatrix} \cos \varepsilon_{\mathbf{i}} \cos \xi_{\mathbf{i}} & -\sin \xi_{\mathbf{i}} & \sin \varepsilon_{\mathbf{i}} \cos \xi_{\mathbf{i}} \\ \cos \varepsilon_{\mathbf{i}} \sin \xi_{\mathbf{i}} & \cos \xi_{\mathbf{i}} & \sin \varepsilon_{\mathbf{i}} \cos \xi_{\mathbf{i}} \\ -\sin \varepsilon_{\mathbf{i}} & 0 & \cos \varepsilon_{\mathbf{i}} \end{bmatrix} \begin{bmatrix} \mathbf{F}_{p_{\mathbf{x}_{\mathbf{i}}}}' \\ \mathbf{F}_{p_{\mathbf{y}_{\mathbf{i}}}}' \\ \mathbf{F}_{p_{\mathbf{z}_{\mathbf{i}}}}' \end{bmatrix}$$

so that

$$F_{p_{X_{\dot{i}}}} = |F_{p_{\dot{i}}}| (\cos \eta_{\dot{i}} \cos \zeta_{\dot{i}} \cos \varepsilon_{\dot{i}} \cos \xi_{\dot{i}} - \cos \eta_{\dot{i}} \sin \zeta_{\dot{i}} \sin \xi_{\dot{i}}$$

$$- \sin \eta_{\dot{i}} \sin \varepsilon_{\dot{i}} \cos \xi_{\dot{i}})$$

$$\begin{aligned} \mathbf{F}_{\mathbf{p}_{\mathbf{y}_{i}}} &= \left| \mathbf{F}_{\mathbf{p}_{i}} \right| (\cos \eta_{i} \cos \zeta_{i} \cos \varepsilon_{i} \sin \xi_{i} + \cos \eta_{i} \sin \zeta_{i} \cos \xi_{i} \\ &- \sin \eta_{i} \sin \varepsilon_{i} \cos \xi_{i}) \end{aligned}$$

$$\mathbf{F}_{\mathbf{p}_{\mathbf{Z}_{i}}} = |\mathbf{F}_{\mathbf{p}_{i}}| (-\cos \eta_{i} \cos \zeta_{i} \sin \varepsilon_{i} - \sin \eta_{i} \cos \varepsilon_{i})$$

The moment arm through which the vectored thrust acts is

$$\Delta \mathbf{r_i'} = \begin{bmatrix} \Delta \mathbf{x_i} - \Delta \mathbf{x_{T_i}} & \cos \varepsilon_i & \cos \xi_i \\ \Delta \mathbf{y_i} - \Delta \mathbf{x_{T_i}} & \cos \varepsilon_i & \sin \xi_i \\ \Delta \mathbf{z_i} + \Delta \mathbf{x_{T_i}} & \sin \varepsilon_i \end{bmatrix}$$

and the total torque due to thrust vectoring is

$$\tau_{o} = \sum_{i=1}^{n} \Delta \tau_{o_{i}} = \sum_{i=1}^{n} (\Delta r_{i}' \times \Delta F_{p_{i}})$$

The gyroscopic effects due to the interaction of the rotating mass of the engines and the vehicle dynamics can be derived from the equation for the rate of change of angular momentum,

$$\tau_{g_i} = \dot{h}_{e_i} + \omega \times I_{e_i} \omega_{e_i}$$

where $\tau_{g_{\hat{i}}}$ is the gyroscopic moment produced by the ith engine, $h_{e_{\hat{i}}}$ the rate of change of the angular momentum of the ith engine, $I_{e_{\hat{i}}}$ the inertia tensor for the ith engine, $\omega_{e_{\hat{i}}}$ the rotational velocity of the ith engine, and ω the total rotational velocity of the vehicle given by

$$\omega = [p q r]^{T}$$

If it is assumed that the angular momentum of the engine is constant, then

$$\dot{\mathbf{h}}_{\mathbf{e_i}} = 0$$

and the equation simplifies to

$$\tau_{g_i} = \omega \times I_{e_i} \omega_{e_i}$$

Two terms, I_{e_i} and w_{e_i} , remain to be defined in the equation for the gyroscopic moment produced by the ith engine. Once again, simplifying assumptions are made. It is assumed that the inertia tensor of the engine contains a single nonzero entry,

$$\mathbf{I_{e_i}'} = \begin{bmatrix} \mathbf{I_{x_{e_i}}} & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}$$

where $I_{x_{e_i}}$ is the inertia tensor of the ith engine at the location of the ith engine, oriented with the local x axis coincident with the rotational velocity of the engine. The rotational velocity of the engine has components in the x, y, and z body axes $(p_{e_i}, q_{e_i}, and r_{e_i}, respectively)$ so that

$$w_{e_i} = \begin{bmatrix} p_{e_i} & q_{e_i} & r_{e_i} \end{bmatrix}^T$$

where

$$p_{e_{i}} = | w_{e_{i}} | \cos \varepsilon_{i} \cos \xi_{i}$$

$$q_{e_{i}} = | w_{e_{i}} | \cos \varepsilon_{i} \sin \xi_{i}$$

$$r_{e_{i}} = -| w_{e_{i}} | \sin \varepsilon_{i}$$

with $|\omega_{e_i}|$ being the total angular velocity of the ith engine.

The engine inertia tensor must be defined in an axis system oriented consistent with the vehicle body axis system. This is done in two steps. These steps involve rotating the engine inertia tensor into a coordinate system orthogonal to the aircraft body axis system. First, the ith engine inertia tensor is rotated through an angle ε_i about the local y axis so that the new inertia tensor is oriented with its local x-y body axis plane parallel to the x-y body axis plane of the vehicle. The second step requires a rotation through an angle ξ_i about the local z axis so that the local x, y, and z axes are orthogonal to the x, y, and z body axes of the vehicle. As determined by Gainer and Sherwood (1972) and Thelander (1965), this rotation is a similarity transformation that yields a new inertia tensor I_{e_i} , such that

$$I_{e_i} = R_{\xi_i} R_{\epsilon_i} I_{x_{e_i}}^{\cdot} R_{\epsilon_i}^{-1} R_{\xi_i}^{-1}$$

where R_ξ and R_ϵ are axis transformation matrices that perform the previously described rotations through ξ and ϵ , respectively. These matrices are given as

$$R_{\epsilon_{i}} = \begin{bmatrix} \cos \epsilon_{i} & 0 & \sin \epsilon_{i} \\ 0 & 1 & 0 \\ -\sin \epsilon_{i} & 0 & \cos \epsilon_{i} \end{bmatrix}$$

$$R\xi_{i} = \begin{bmatrix} \cos \xi_{i} & -\sin \xi_{i} & 0 \\ \sin \xi_{i} & \cos \xi_{i} & 0 \\ 0 & 0 & 0 \end{bmatrix}$$

so that

$$R_{\xi_{\mathbf{i}}}R_{\varepsilon_{\mathbf{i}}} = \begin{bmatrix} \cos \xi_{\mathbf{i}} \cos \varepsilon_{\mathbf{i}} & -\sin \xi_{\mathbf{i}} & \cos \xi_{\mathbf{i}} \sin \varepsilon_{\mathbf{i}} \\ \sin \xi_{\mathbf{i}} \cos \varepsilon_{\mathbf{i}} & \cos \xi_{\mathbf{i}} & \sin \xi_{\mathbf{i}} \sin \varepsilon_{\mathbf{i}} \\ -\sin \varepsilon_{\mathbf{i}} & 0 & \cos \varepsilon_{\mathbf{i}} \end{bmatrix}$$

Because

$$R_{\varepsilon_{\dot{1}}}^{-1} = R_{\varepsilon_{\dot{1}}}^{T}$$

$$R_{\xi_i}^{-1} = R_{\xi}^{T}$$

and the matrices are unitary,

$$R_{\varepsilon_{i}}^{-1}R_{\xi_{i}}^{-1} = R_{\varepsilon_{i}}^{T}R_{\xi_{i}}^{T} = (R_{\xi_{i}}R_{\varepsilon_{i}})^{T}$$

Therefore,

$$\mathbf{I_{e_i}} = \mathbf{I_{x_{e_i}}} \begin{bmatrix} \cos^2 \varepsilon_i \cos^2 \xi_i & \cos^2 \varepsilon_i \cos \xi_i \sin \xi_i & -\cos \varepsilon_i \sin \varepsilon_i \cos \xi_i \\ \cos^2 \varepsilon_i \cos \xi_i \sin \xi_i & \sin^2 \xi_i \cos^2 \varepsilon_i & -\sin \varepsilon_i \cos \varepsilon_i \sin \xi_i \\ -\cos \varepsilon_i \sin \varepsilon_i \cos \xi_i & -\sin \varepsilon_i \cos \varepsilon_i \sin \xi_i & \sin^2 \varepsilon_i \end{bmatrix}$$

The angular momentum of the ith engine, $\mathbf{h}_{\mathrm{e}_{\mathrm{i}}}$, can now be expressed as

$$h_{e_i} = I_{e_i} \omega_{e_i} = \begin{bmatrix} h_{e_{i_1}} & h_{e_{i_2}} & h_{e_{i_3}} \end{bmatrix}^T$$

with

$$\begin{aligned} \mathbf{h_{e_{i_1}}} &= \mathbf{p_{e_i}} \Big[\mathbf{I_{x_{e_i}}} &\cos^2 \varepsilon_i \cos^2 \xi_i \Big] \\ &+ \mathbf{q_{e_i}} \Big[\mathbf{I_{x_{e_i}}} &\cos^2 \varepsilon_i \cos \xi_i \sin \xi_i \Big] \\ &+ \mathbf{r_{e_i}} \Big[-\mathbf{I_{x_{e_i}}} &\cos \varepsilon_i \sin \varepsilon_i \cos^2 \xi_i \Big] \\ \mathbf{h_{e_{i_2}}} &= \mathbf{p_{e_i}} \Big[\mathbf{I_{x_{e_i}}} &\cos \varepsilon_i \cos \xi_i \sin \xi_i \Big] \\ &+ \mathbf{q_{e_i}} \Big[\mathbf{I_{x_{e_i}}} &\sin^2 \xi_i \cos^2 \varepsilon_i \Big] \\ &+ \mathbf{r_{e_i}} \Big[-\mathbf{I_{x_{e_i}}} &\sin \varepsilon_i \cos \xi_i \sin \xi_i \Big] \\ \mathbf{h_{e_{i_3}}} &= \mathbf{p_{e_i}} \Big[-\mathbf{I_{x_{e_i}}} &\cos \varepsilon_i \sin \varepsilon_i \cos^2 \xi_i \Big] \\ &+ \mathbf{q_{e_i}} \Big[-\mathbf{I_{x_{e_i}}} &\sin \varepsilon_i \cos \xi_i \sin \xi_i \Big] \\ &+ \mathbf{q_{e_i}} \Big[-\mathbf{I_{x_{e_i}}} &\sin \varepsilon_i \cos \xi_i \sin \xi_i \Big] \\ &+ \mathbf{q_{e_i}} \Big[\mathbf{I_{x_{e_i}}} &\sin^2 \varepsilon_i \Big] \end{aligned}$$

Thus, the gyroscopic moment induced by the ith engine, τ_{g_i} , can be expanded to

$$\tau_{g_{i}} = \begin{bmatrix} qh_{e_{i_{3}}} - rh_{e_{i_{2}}} \\ rh_{e_{i_{1}}} - ph_{e_{i_{3}}} \\ ph_{e_{i_{1}}} - qh_{e_{i_{2}}} \end{bmatrix}$$

and the total moment induced by gyroscopic interaction of the vehicle dynamics and the rotating engine components is

$$\tau_g = \sum_{i=1}^n \tau_{g_i}$$

Engine torque and gyroscopic effects are modeled within the subroutine ENGINE using information provided by the user from the engine modeling subroutine IFENGN. These effects are calculated as incremental moments and are included directly in the equations of motion for both analysis point definition and derivation of the linearized system matrices.

APPENDIX C: STATE VARIABLE NAMES RECOGNIZED BY LINEAR

This appendix lists the alphanumeric descriptors specifying state variables that are recognized by LINEAR. In the input file, the field containing these descriptors uses a 54A format, and all characters are left-justified. The input alphanumeric descriptor specified by the user serves both to identify the state variable selected by the user within the program itself and to identify state variables on the printed output of LINEAR, as described in the Output Files section.

State variable	Units	Symbol	Alphanumeric descriptor
Roll rate	rad/sec	р	P ROLL RATE
Pitch rate	rad/sec	q	Q PITCH RATE
Yaw rate	rad/sec	r	R YAW RATE
Velocity	ft/sec	V	V VELOCITY VEOT
Angle of attack	rad	α	ALP ALPHA ANGLE OF ATTACK
Sideslip angle	rad	β	BTA BETA SIDESLIP ANGLE ANGLE OF SIDESLIP
Pitch angle	rad	θ	THA THETA PITCH ATTITUDE
Heading	rad	ψ	PSI HEADING HEADING ANGLE
Roll angle	rad	ф	PHI ROLL ATTITUDE BANK ANGLE
Altitude	length	h	H ALTITUDE
Displacement north	length	x	х
Displacement east	length	у	Y

APPENDIX D: OBSERVATION VARIABLE NAMES RECOGNIZED BY LINEAR

This appendix lists all observation variable names recognized by LINEAR except for state and control variable names. If state variables are specified as elements in the observation vector, the alphanumeric descriptor must correspond to the names defined in appendix C. When control variables are to be included in the observation vector these variables must be identified exactly as they were specified by the user.

The input file is formatted 5A4 with the alphanumeric data left-justified. The floating-point fields are used to define sensor locations not at the center of gravity. The input name specified by the user for an observation variable serves both to identify the observation variable selected within the program itself and to identify observation variables on the printed output of LINEAR.

An asterisk preceding the variable name indicates measurements at some point other than the vehicle center of gravity. The program LINEAR uses the quantities defined in the first three floating-point fields as definitions of the location of the sensor with respect to the vehicle center of gravity. The three parameters define the x body, y body, and z body location, in that order, of the sensor. These offsets from the vehicle center of gravity are defined in units of length.

Observation variable	Units	Symbol	Alphanumeric descriptor		
Derivatives of state variables					
Roll acceleration	rad/sec ² p		PDOT ROLL ACCELERATION		
Pitch acceleration	rad/sec ²	q	QDOT PITCH ACCELERATION		
Yaw acceleration	rad/sec ²	ř	RDOT YAW ACCELERATION		
Velocity rate	length/sec ²	v	VDOT VELOCITY RATE		
Angle-of-attack rate	rad/sec α		ALPDOT ALPHA DOT ALPHADOT		
Angle-of-sideslip rate	rad/sec β		BTADOT BETA DOT BETADOT		
Pitch attitude rate	θ rad/sec		THADOT THETA DOT		
Heading rate	rad/sec ψ		PSIDOT PSI DOT		

Observation variable	Uni	ts	Symbol	Alphanumeric descriptor
Derivati	ves of	state	variables	(continued)
Roll attitude rate	rad/	sec	•	PHIDOT PHI DOT
Altitude rate	leng	th/sec	ĥ	HDOT ALTITUDE RATE
Velocity north	leng	th/sec	*	XDOT
Velocity east	leng	th/sec	ý y	YDOT
		Accele	rations	
x body axis acceleration	g		a _X	AX LONGITUDINAL ACCEL X-AXIS ACCELERATION X AXIS ACCELERATION X-BODY AXIS ACCEL X BODY AXIS ACCEL
y body axis acceleration	g		a _y	AY Y-AXIS ACCELERATION Y AXIS ACCELERATION Y-BODY AXIS ACCEL Y BODY AXIS ACCEL LATERAL ACCELERATION LAT ACCEL LATERAL ACCEL
z body axis acceleration	g		a _Z	AZ Z-BODY AXIS ACCEL Z BODY AXIS ACCEL
x body axis acceler- ometer at vehicle center of gravity	g		a _{nx}	ANX X-AXIS ACCELEROMETER X AXIS ACCELEROMETER
y body axis acceler- ometer at vehicle center of gravity	g		a _{ny}	ANY Y-AXIS ACCELEROMETER Y AXIS ACCELEROMETER

Observation variable	Units	Symbol	Alphanumeric descriptor
	Accelerations	(continued))
z body axis acceler- ometer at vehicle center of gravity	g	a _{nz}	ANZ Z-AXIS ACCELEROMETER Z AXIS ACCELEROMETER
Normal acceleration	g	^a n	AN NORMAL ACCELERATION NORMAL ACCEL GS G'S
*x body axis accel- erometer not at vehicle center of gravity	g	^a nx,i	AX,I ANX,I
*y body axis accel- erometer not at vehicle center of gravity	g	^a ny,i	AY,I ANY,I
*z body axis accel- erometer not at vehicle center of gravity	g	^a nz,i	AZ,I ANZ,I
*Normal accelerometer not at vehicle center of gravity	g	^a n,i	AN,I
Load factor	(Dimension- less)	n	N LOAD FACTOR
	Air data pa	rameters	
Speed of sound	length/sec	a	A SPEED OF SOUND
aReynolds number	(Dimension- less	Re	RE REYNOLDS NUMBER
Reynolds number per unit length	length-1	Re'	RE PRIME R/LENGTH R/FEET R/UNIT LENGTH

^aReynolds number is defined in terms of an arbitrary unit of length that is input by the user. This length is input using the first floating-point field; however, if no value is input, \bar{c} is used as the default value.

Observation variable	Units	Symbol	Alphanumeric descriptor
Ai	r data paramete	ers (conti	nued)
Mach number	(Dimension- less)	М	M MACH AMCH
Dynamic pressure	force/ length ²	đ -	QBAR DYNAMIC PRESSURE
Impact pressure	force/ length ²	q _e	QC IMPACT PRESSURE DIFFERENTIAL PRESSURE
Ambient pressure	force/ length ²	Pa	PA STATIC PRESSURE FREESTREAM PRESSURE
Impact/ambient pressure ratio	(Dimension- less)	q _c /p _a	QC/PA QC/P
Total pressure	force/ length ²	Pt	PT TOTAL PRESSURE
Temperature	K	Т	TEMP TEMPERATURE FREESTREAM TEMPERATURE
Total temperature	К	Tt	TOTAL TEMPERATURE
Equivalent airspeed	knots	V _e	VEAS EQUIVALENT AIRSPEED KEAS
Calibrated airspeed	knots	v _c	VCAS CALIBRATED AIRSPEED KCAS
F	lightpath-rela	ted parame	ters
Flightpath angle	rad	Υ	GAM GAMMA FLIGHT PATH ANGLE GLIDE PATH ANGLE GLIDE SLOPE
Flightpath acceleration	g	fpa	FPA FLIGHT PATH ACCEL

Observation variable	Units	Symbol	Alphanumeric descriptor
Flight	path-related par	ameters (continued)
Flightpath angle rate	rad/sec	Ŷ	GAMMA DOT GAMMADOT
Vertical acceler- ation	length/sec ²	h	VERTICAL ACCELERATION HDOTDOT H-DOT-DOT HDOT-DOT
Scaled altitude rate	length/sec	h/57.3	H-DOT/57.3 HDOT / 57.3
	Energy-rela	ted terms	
Specific energy	length	E _S	ES E-SUB-S SPECIFIC ENERGY
Specific power	length/sec	P _S	PS P-SUB-S SPECIFIC POWER SPECIFIC THRUST
	Force par	ameters	
Lift force	force	L	LIFT
Drag force	force	D	DRAG
Normal force	force	N	NORMAL FORCE
Axial force	force	A	AXIAL FORCE
	Body axis p	parameters	
x body axis velocity	length/sec	u	UB X-BODY AXIS VELOCITY X BODY AXIS VELOCITY X-BODY AXIS VEL X BODY AXIS VEL U-BODY U BODY

Observation variable	Units	Symbol	Alphanumeric descriptor
Bod	y axis parametem	s (conti	nued)
y body axis velocity	length/sec	V	VB Y-BODY AXIS VELOCITY Y BODY AXIS VELOCITY Y-BODY AXIS VEL Y BODY AXIS VEL V-BODY V BODY
z body axis velocity	length/sec	W	WB Z-BODY AXIS VELOCITY Z BODY AXIS VELOCITY Z-BODY AXIS VEL Z BODY AXIS VEL W-BODY W-BODY
Rate of change of velocity in x body axis	length/sec ²	ů	UBDOT UB DOT
Rate of change of velocity in y body axis	length/sec ²	v V	VBDOT VB DOT
Rate of change of velocity in z body axis	length/sec ²	w W	WBDOT WB DOT
Miscellaneous mea	surements not at	vehicle	center of gravity
*Angle of attack not at vehicle center of gravity	rad	α, _i	ALPHA,I ALPHA INSTRUMENT AOA INSTRUMENT
*Angle of sideslip not at vehicle center of gravity	rad	β , i	BETA,I BETA INSTRUMENT SIDESLIP INSTRUMENT
*Altitude instrument not at vehicle center of gravity	length	h,i	H,I ALTITUDE INSTRUMENT
*Altitude rate instru- ment not at vehicle center of gravity	length/sec	h,i	HDOT, I

Observation variable	Units	Symbol	Alphanumeric descriptor
01	ther miscellaneo	us parame	ters
Vehicle total angular momentum	mass-length ² /	Т	ANGULAR MOMENTUM ANG MOMENTUM
Stability axis roll rate	rad/sec	p_s	STAB AXIS ROLL RATE
Stability axis pitch rate	rad/sec	$\mathtt{q}_{\mathtt{S}}$	STAB AXIS PITCH RATE
Stability axis yaw rate	rad/sec	r_{s}	STAB AXIS YAW RATE

APPENDIX E: ANALYSIS POINT DEFINITION IDENTIFIERS

Analysis point definition options are selected using alphanumeric descriptors. The first record read for each analysis case contains these descriptors. All these descriptors are read using a 5A4 format. The following table associates the analysis point definition options with their alphanumeric descriptors.

Analysis point definition option	Alphanumeric descriptor
Untrimmed	UNTRIMMED NO TRIM NONE NOTRIM
Straight-and-level	STRAIGHT AND LEVEL WINGS LEVEL LEVEL FLIGHT
Pushover-pullup	PUSHOVER/PULLUP PULLUP PUSHOVER PUSHOVER AND PULLUP PUSHOVER / PULLUP PUSHOVER / PULL-UP PUSHOVER PULLUP PUSH OVER PULL UP
Level turn	LEVEL TURN WINDUP TURN
Thrust-stabilized turn	THRUST STABILIZED TURN THRUST LIMITED TURN FIXED THROTTLE TURN FIXED THRUST TURN
Beta	BETA SIDESLIP
Specific power	SPECIFIC POWER PS P-SUB-S

Each of these analysis point definitions except the untrimmed, beta, and specific power options has two suboptions associated with it. The suboptions are requested using alphanumeric descriptors read using an A4 format. These suboptions

are defined in the Analysis Point Definition section. The following table defines these suboptions and the alphanumeric descriptors associated with each.

Analysis point definition suboption	Alphanumeric descriptor
Straight-and-level	
Alpha-trim	ALP ALPH ALPHA
Mach-trim	MACH AMCH
Pushover-pullup	Arion
Alpha-trim	ALP ALPH ALPHA
Load-factor-trim	LOAD GS G'S AN
Level turn	
Alpha-trim	ALP ALPH ALPHA
Load-factor-trim	LOAD GS G'S AN
Thrust-stabilized turn	
Alpha-trim	ALP ALPH ALPHA
Load-factor-trim	LOAD GS G'S AN

APPENDIX F: EXAMPLE INPUT FILE

The following listing is an example of an input file to LINEAR. This file was used with the example subroutines listed in appendix I to generate the analysis and printer output files listed in appendixes G and H, respectively.

```
LINEARIZER TEST AND DEMONSTRATION CASES
USER'S GUIDE
 6.080000E+02 4.280000E+01 1.595000E+-1 4.500000E+04
 2.870000E+04 1.651000E+-5 1.879000E+05-5.200000E+02 0.
                                CCALC WILL CALCULATE CG CORRECTIONS
           0.
                      0.
-1.000000E+01 4.000000E+01
         4STAN
                          RADI
ALPHA
THETA
VEL
ELEVATOR
                             5
THROTTLE
                            12
SPEED BRAKE
                            10
         2STAN
AN
ΑY
-2.900E+00 5.430E+00-4.000E+00 4.000E+00-3.250E+00 3.250E+00-1.000E+00 1.000E+00
  O ADDITIONAL SURFACES
WINDUP TURN
ALPHA
                          20000.0
н
MACH
                          0.90
                          3.00
AN
BETA
                          0.0
NEXT
LEVEL FLIGHT
ALPHA
                          20000.0
MACH
                          0.9
GAMMA
                          10.0
END
```

This input file is for a case called (record 1) LINEARIZER TEST AND DEMONSTRATION CASES, and all input data are on logical device unit 1, signified by the second record being blank. The project title is USER'S GUIDE (record 3). Record 4 specifies the mass and geometric properties of the vehicle as

 $S = 608 \text{ ft}^2$ b = 42.8 ft $\bar{c} = 15.95 \text{ ft}$ w = 45,000 lb

Record 5 defines the moments and products of intertia of the vehicle (all in units of $sluq-ft^2$) as

$$I_{x} = 28,700$$

$$I_{y} = 165,100$$

$$I_z = 187,900$$

$$I_{XZ} = 520$$

$$I_{xy} = 0$$

$$I_{yz} = 0$$

Record 6 defines the location of the vehicle center of gravity to be coincident with the aerodynamic reference point of the nonlinear aerodynamic model by setting

$$\Delta x = 0$$

$$\Delta y = 0$$

$$\Delta z = 0$$

Record 6 also specifies that LINEAR should not use its internal model to make corrections for the offset in the vehicle center of gravity from the aerodynamic reference point, either because the aerodynamic model includes such corrections or because none are to be made.

Record 7 defines the angle-of-attack range of the aerodynamic model.

Record 8 specifies that there will be four state variables in the output, that the output formulation of the state equation will be in the standard form $(\dot{x} = Ax + Bu)$, and that the output for the nondimensional stability and control derivatives with respect to angle of attack and angle of sideslip should be scaled as reciprocal radians.

The next four records (9 to 12) define the output formulation of the state vector to be

$$\mathbf{x} = \begin{bmatrix} \alpha \\ q \\ \theta \\ V \end{bmatrix}$$

Record 13 specifies that the output model will have three parameters in the control vector. The following three records (14 to 16) specify that

and that elevator, throttle, and speed brake are located in DC(5), DC(12), and DC(10) of the /CONTROL/ common block.

Record 17 specifies that two observation variables will be output and that the observation equation will be in the standard form,

$$y = Hx + Fu$$

The next two records (18 and 19) define the elements of the output vector to be

$$y = \begin{bmatrix} a_n \\ a_y \end{bmatrix}$$

Record 20 specifies the ranges for the trim parameters, DES, DAS, DRS, and THRSTX, used to trim the longitudinal, lateral, and directional axes and thrust, respectively. The ranges for these parameters are defined by record 20 to be

The first three parameters essentially represent stick and rudder limits and are so specified because of the implementation of the subroutine UCNTRL (discussed in app. I). The thrust trim parameter is used, again because of the implementation of UCNTRL, to schedule speed brake when THRSTX < 0 and to command thrust when THRSTX > 0.

Record 21 specifies that no additional control surfaces are to be set.

The next seven records (22 to 28) define an analysis point option. These records request a level turn trim option at

$$h = 20,000 \text{ ft}$$
 $M = 0.9$
 $a_n = 3.0 \text{ g}$
 $\beta = 0$

The second record of this set (record 23) indicates which level turn suboption is requested. The alphanumeric descriptor ALPHA indicates that angle of attack is to be varied until the specified 3.0-g turn is achieved. The final record of this analysis point option definition set contains the key word NEXT to indicate both an end to the current analysis point option definition and that another analysis point option definition follows.

The final six records (records 29 to 34) define a straight-and-level analysis point option at

$$h = 20,000 ft$$

M = 0.9

$$\gamma = 10.0^{\circ}$$

The second record of this set (record 30) identifies the "Alpha-trim" suboption in which angle of attack is varied until trim is achieved at the specified condition. The final record of this set contains the key word END to indicate the termination of the current analysis point definition as well as the termination of input cases.

APPENDIX G: EXAMPLE OUTPUT ANALYSIS FILE

The following listing is an example analysis file output on unit 15. This file was produced using the example input file listed in appendix F and the example user-supplied subroutines listed in appendix I.

```
LINEARIZER TEST AND DEMONSTRATION CASES
USER'S GUIDE
TEST CASE #
             ***************
X - DIMENSION = 4
                   U - DIMENSION = 3
                                              Y - DIMENSION = 2
STATE EQUATION FORMULATION:
                                  STANDARD
OBSERVATION EQUATION FORMULATION: STANDARD
STATE VARIABLES
ALPHA
                 = 0.465695D-01 RADIANS
                 = 0.921683D -01 RADIANS/SECOND
THETA
                 = 0.159885D - 01 RADIANS
VEL
                 = 0.933232D+03 FEET/SECOND
CONTROL VARIABLES
ELEVATOR
                 = 0.538044D - 01
THROTTLE
                 = 0.214105D+00
SPEED BRAKE
                 = 0.0000000+00
DYNAMIC INTERACTION VARIABLES
X-BODY AXIS FORCE = 0.000000D+00
                                 POUNDS
Y-BODY AXIS FORCE = 0.000000D+00
                                 POUNDS
Z-BODY AXIS FORCE = 0.000000D+00
                                 POUNDS
PITCHING MOMENT
                = 0.000000D+00
                                 FOOT -POUNDS
                 = 0.0000000+00
                                FOOT -POUNDS
ROLLING MOMENT
YALLING MOMENT
                  = 0.000000D+00
                                FOOT -POUNDS
OBSERVATION VARIABLES
                  = 0.300163D+01
ΑY
                 = 0.941435D+00
                                   GS
A-MATRIX FOR: DX / DT = A * X + B * U + D * V
-0.121436D+01 0.100000D+01 0.136756D-02-0.121605D-03
-0.147423D+01-0.221451D+01-0.450462D-02 0.294019D-03
 0.000000D+00 0.331812D+00 0.000000D+00 0.000000D+00
-0.790853D+02 0.000000D+00-0.320822D+02-0.157297D-01
B-MATRIX FOR: DX / DT = A * X + B • U + D • V
-0.141961D+00-0.164948D-02-0.928933D-02
-0.220778D+02 0.543324D-02-0.135074D+02
 0.00000D+00 0.00000D+00 0.00000D+00
-0.105186D+02 0.342817D+02-0.155832D+02
D-MATRIX FOR: DX / DT = A * X + B * U + D * V
-0.343642D-07 0.000000D+00 0.737378D-06 0.000000D+00 0.000000D+00
 0.113192D-06 0.000000D+00-0.242885D-05 0.605694D-05 0.000000D+00
 0.000000D+00 0.000000D+00 0.000000D+00 0.000000D+00 0.000000D+00
```

0.714203D-03 0.398492D-06 0.332842D-04 0.000000D+00 0.000000D+00

0.000000D+00 0.0000000+00 0.00000D+00 0.00000D+00

H-MATRIX FOR: Y = H * X + F * U + E • V

0.351752D+02-0.191245D-05 0.150046D-02 0.640771D-02 0.000000D+00 0.000000D+00-0.150534D-01 0.274248D-09

F-MATRIX FOR: $Y = H \cdot X + F \cdot U + E \cdot V$

0.412845D+01-0.180978D-02 0.291699D+00 0.000000D+00 0.000000D+00 0.000000D+00

E-MATRIX FOR: Y = H * X + F * U + E * V

-0.377037D-07 0.000000D+00-0.214132D-04 0.000000D+00 0.000000D+00 0.000000D+00 0.222222D-04 0.000000D+00 0.000000D+00 0.000000D+00 0.000000D+00

0.00000D+00

************ TEST CASE X - DIMENSION = 4 U - DIMENSION = 3 Y - DIMENSION = STATE EQUATION FORMULATION: STANDARD OBSERVATION EQUATION FORMULATION: STANDARD

STATE VARIABLES

= -.126650D-01 RADIANS **ALPHA**

= 0.000000D+00 RADIANS/SECOND = 0.161868D+00 RADIANS THETA **VEL** = 0.933232D+03 FEET/SECOND

CONTROL VARIABLES

ELEVATOR = 0.637734D-01= 0.2250920+00 THROTTLE SPEED BRAKE = 0.00000000+00

DYNAMIC INTERACTION VARIABLES

X-BODY AXIS FORCE = 0.000000D+00 **POUNDS** Y-BODY AXIS FORCE = 0.000000D+00 **POUNDS** Z-BODY AXIS FORCE = 0.000000D+00 **POUNDS** FOOT -POUNDS PITCHING MOMENT = 0.0000000+00= 0.0000000+00ROLLING MOMENT FOOT -POUNDS = 0.000000D+00 F00T-P0UNDS YAWING MOMENT

OBSERVATION VARIABLES

AN = 0.985228D+00 GS = 0.000000D+00 GS ΑY

A-MATRIX FOR: DX / DT = A * X + B * U + D * V

-0.120900D+01 0.100000D+01-0.575730D-02-0.701975D-04 -0.149189D+01-0.221451D+01 0.189640D-01 0.231368D-03 0.000000D+00 0.100000D+01 0.000000D+00 0.000000D+00 -0.576868D+02 0.000000D+00-0.316251D+02-0.460435D-02

```
B-MATRIX FOR: DX / DT = A * X + B * U + D * V
-0.141961D+00 0.448742D-03-0.928932D-02
-0.220778D+02-0.147812D-02-0.135074D+02
0.00000D+00 0.000000D+00 0.000000D+00
-0.105186D+02 0.343162D+02-0.155832D+02
D-MATRIX FOR: DX / DT + A * X + B * U + D * V
 0.934880D-08 0.000000D+00 0.738119D-06 0.000000D+00 0.000000D+00
-0.307941D-07 0.000000D+00-0.243129D-05 0.605694D-05 0.00000D+00 0.00000D+00 0.00000D+00 0.00000D+00 0.00000D+00 0.00000D+00
 0.714920D-03 0.495829D-13-0.905497D-05 0.000000D+00 0.000000D+00
 0.0000000+00
 0.000000D+00
 0.00000D+00
 0.000000D+00
H-MATRIX FOR: Y = H * X + F * U
 0.350424D+02-0.128333D-06-0.632314D-02 0.203434D-02
 0.000000D+00 0.000000D+00 0.000000D+00 0.000000D+00
F-MATRIX FOR: Y = H * X + F * U
 0.411323D+01 0.492845D-03 0.263288D+00
 0.000000D+00 0.000000D+00 0.000000D+00
E-MATRIX FOR: Y + H * X + F * U + E • V
 0.102676D-07 0.000000D+00-0.214116D-04 0.000000D+00 0.000000D+00
 0.000000D+00 0.222222D-04 0.000000D+00 0.000000D+00 0.000000D+00
 0.000000D+00
 0.00000D+00
```

APPENDIX H: EXAMPLE PRINTER OUTPUT FILES

The following listings are the printer output files generated by LINEAR using the example input file in appendix F and the example user supplied subroutines listed in appendix I.

Example printer output file 1 (unit 3)

```
GEOMETRY AND MASS DATA FOR:
LINEARIZER TEST AND DEMONSTRATION CASES
```

FOR THE PROJECT: USER'S GUIDE

WING AREA 608.000 (FT**2) WING SPAN 42.800 (FT) MEAN CHORD 15.950 (FT) 45000.000 (LB) VEHICLE WEIGHT ΙX 28700.000 (SLUG-FT**2) ΙY 165100.000 (SLUG-FT**2) 187900.000 (SLUG-FT**2) ΙZ I XZ -520.000 (SLUG-FT**2) 0.000 (SLUG-FT**2) IXY I YZ 0.000 (SLUG-FT**2)

VECTOR DEFINING REFERENCE POINT OF AERODYNAMIC MODEL WITH RESPECT TO VEHICLE CENTER OF GRAVITY:

DELTA X 0.000 (FT)
DELTA Y 0.000 (FT)
DELTA Z 0.000 (FT)

FORCE AND MOMENT COEFFICIENT CORRECTIONS DUE TO THE OFFSET OF THE REFERENCE POINT TO THE AERODYNAMIC MODEL FROM THE VEHICLE CG ARE CALCULATED IN CCALC.

MINIMUM ANGLE OF ATTACK -10.000 (DEG)
MAXIMUM ANGLE OF ATTACK 40.000 (DEG)

PARAMETERS USED IN THE STATE VECTOR FOR: LINEARIZER TEST AND DEMONSTRATION CASES

FOR THE PROJECT: USER'S GUIDE

ALPHA Q THETA VEL

THE STANDARD FORMULATION OF THE STATE EQUATION HAS BEEN SELECTED. THE FORM OF THE EQUATION IS:

DX/DT = A * X + B * U + D * V

SURFACES TO BE USED FOR THE CONTROL VECTOR FOR: LINEARIZER TEST AND DEMONSTRATION CASES

FOR THE PROJECT: USER'S GUIDE

LOCATION IN /CONTROL/

ELE VATOR 5
THROTTLE 12
SPEED BRAKE 10

PARAMETERS USED IN THE OBSERVATION VECTOR FOR: LINEARIZER TEST AND DEMONSTRATION CASES

FOR THE PROJECT: USER'S GUIDE

AN AY

THE STANDARD FORMULATION OF THE OBSERVATION EQUATION HAS BEEN SELECTED. THE FORM OF THE EQUATION IS:

Y = H * X + F * U + E * V

LIMITS FOR TRIM OUTPUT PARAMETERS:

	MINIMUM	MAXIMUM
PITCH AXIS PARAMETER	-2.900	5.430
ROLL AXIS PARAMETER	-4.000	4.000
YAW AXIS PARAMETER	-3.250	3.250
THRUST PARAMETER	-1.000	1.000
NO ADDITIONAL SURFACES TO BE SET	WERE DEFINED	

TRIM CONDITIONS FOR CASE # 1
LINEARIZER TEST AND DEMONSTRATION CASES

FOR THE PROJECT: USER'S GUIDE

LEVEL TURN WHILE VARYING ALPHA

TRIM ACHIEVED

COEFFICIENT OF LIFT		=	0.40144
COEFFICIENT OF DRAG		=	0.03058
LIFT	(LBS)	=	134741.68807
DRAG	(LBS)	=	10265.70661
ALTITUDE	(FT)	=	20000.
MACH	` '	=	0.90000
VELOCITY	(FT/SEC)	=	933.23196
EQUIVALENT AIRSPEED	(KTS)	±	403.42303
SPEED OF SOUND	(FT/SEC)	=	1036.92440
GRAVITATIONAL ACCEL	(FT/SEC**2)	=	32.11294
NORMAL ACCELERATION	(G-S)	=	3.00163
LOAD FACTOR		=	2.99995
DYNAMIC PRESSURE	(LBS/FT**2)	=	552.05302
DENSITY	(SLUG/FT**3)	=	0.00126774
WEIGHT (@ALTITUDE)	(LBS)	=	44914.60434
BETA	(DEG)	=	0.03193
ALPHA	(DEG)	=	2.66824
PHI	(DEG)	=	70.62122
THETA	(DEG)	=	0.91607
ALTITUDE RATE	(FT/SEC)	=	0.00000
GAMMA	(DEG)	=	0.00000
ROLL RATE	(DEG/SEC)	=	-0.08951
PITCH RATE	(DEG/SEC)	=	5,28086
YAW RATE	(DEG/SEC)	=	1.85749
THRUST	(LBS)	#	10277.03515
SUM OF THE SQUARES		=	0.00000

TRIM PARAMETERS

TRIM	PITCH AXIS PARAMETER	=	-0.66958
TRIM	ROLL AXIS PARAMETER	=	-0.01526
TR IM	YAW AXIS PARAMETER	=	-0.02125
TRIM	THRUST PARAMETER	=	0.21410

CONTROL VARIABLES

ELE VATOR = 0.05380 THROTTLE = 0.21410 SPEED BRAKE = 0.00000

OBSERVATION VARIABLES

AN = 3.00163339 GS AY = 0.94136286 GS

NON-DIMENSIONAL STABILITY AND CONTROL DERIVATIVES FOR CASE # 1 LINEARIZER TEST AND DEMONSTRATION CASES

FOR THE PROJECT: USER'S GUIDE

OSEN S GOIDE	ROLLING MOMENT	PITCHING MOMENT	YAWING MOMENT	DRAG	LIFT	S I DE F ORCE
ZERO COEFFICIENTS	-4.02966D-05	4,22040D -02	2.25747D-04	1.42882D-04	1.57360D -01	5,42882D-04
ROLL RATE (RAD/SEC)	-2,00000D -01	0.00000D+00	-3.37210D -02	0.000000+00	0.00000D+00	0.00000D+00
PITCH RATE (RAD/SEC)	0.00000D+00	3.89530D+00	0.00000D+00	0.00000D+00	-1.72320D+01	0.00000D+00
YAW RATE (RAD/SEC)	1.50990D-01	0.00000D+00	-4.04710D-01	0.00000D+00	0.00000D+00	0.00000D+00
VELOCITY (FT/SEC)	-1.27955D <i>-</i> 07	-3.28739D-06	3.21096D -07	0.00000D+00	1.45433D-05	0.00000D+00
MACH NUMBER	-1.32680D-04	-3.40878D-03	3.32952D-04	0.00000D+00	1.50803D-02	0.00000D+00
ALPHA (RAD)	0.00000D+00	-1.68820D -01	0.00000D+00	3.72570D-01	4.87060D+00	0.00000D+00
BETA (RAD)	-1.33450D -01	0.00000D+00	1.29960D-01	0.00000D+00	0.00000D+00	-9.74030D -01
ALTITUDE (FT)	0.00000D+00	0.00000D+00	0.00000D+00	0.00000D+00	0.00000D+00	0.00000D+00
ALPHA DOT (RAD/SEC)	0.00000D+00	-1.18870D+01	0.00000D+00	0.00000D+00	1.72320D+01	0.00000D+00
BETA DOT (RAD/SEC)	0.0000D+00	0.00000D+00	0.0000D+00	0.00000D+00	0.00000D+00	0.00000D+00
ELEVATOR	0.0000D+00	-6.95280D-01	0.00000D+00	4.38310D -02	5.72960D-01	0.00000D+00
THROTTLE	0.00000D+00	0.00000D+00	0.00000D+00	0.00000D+00	0.00000D+00	0.00000D+00
SPEED BRAKE	0.00000D+00	-4.17500D -01	0.00000D+00	6.49350D -02	3.74920D-02	0.00000D+00

VEHICLE STATIC MARGIN IS AT THIS FLIGHT CONDITION.

3.5% MEAN AERODYNAMIC CHORD STABLE

MATRIX A USING THE FORMULATION OF THE STATE EQUATION:

DX / DT = A * X + B * U + D * V

FOR CASE # 1 LINEARIZER TEST AND DEMONSTRATION CASES

FOR THE PROJECT: USER'S GUIDE

DERIVATIVES WRT TIME OF:	ALPHA	Q	THETA	VEL
ALPHA	-0.121436D+01	0.1000000+01	0.136756D-02	-0.121605D-03
Q	-0.147423D+01	-0.221451D+01	-0.450462D-02	0.294019D-03
THETA	0.000000D+00	0.331812D+00	0.000000D+00	0.000000D+00
VEL	-0.790853D+02	0.000000D+00	-0.320822D+02	-0.157297D-01

MATRIX B USING THE FORMULATION OF THE STATE EQUATION:

DX / DT = A * X + B * U + D * A

FOR CASE # 1 LINEARIZER TEST AND DEMONSTRATION CASES

FOR THE PROJECT: USER'S GUIDE

THROTTLE SPEED BRAKE **ELEVATOR** DERIVATIVES WRT TIME OF: **ALPHA** -0.141961D+00 -0.164948D-02 -0.928933D-02 -0.220778D+02 0.543324D -02 -0.135074D+02 THETA 0.00000D+00 0.00000D+00 0.00000D+00 0.342817D+02 -0.155832D+02 VEL -0.105186D+02 MATRIX D USING THE FORMULATION OF THE STATE EQUATION DX / DT = A * X + B * U + D * VFOR CASE # 1 LINEARIZER DEMONSTRATION AND TEST CASES FOR THE PROJECT: USER'S GUIDE X-BODY AXIS FORCE Y-BODY AXIS FORCE Z-BODY AXIS FORCE PITCHING MOMENT ROLLING MOMENT DERIVATIVES WRT TIME OF: 0.000000D+00 0.737378D -06 -0.343642D-07 0.00000D+00 0.000000D+00 ALPHA 0.113192D-06 0.00000D+00 -0.242885D -05 0.605694D-05 0.00000D+00 0 0.000000D+00 0.000000D+00 0.0000000+00 0.000000D+00 0.00000D+00 THETA 0.714203D -03 0.398492D-06 0.332842D-04 0.000000D+00 0.000000D+00 **VEL** DERIVATIVES YAWING MOMENT WRT TIME OF: **ALPHA** 0.000000D+00 0.000000D+00 THETA 0.00000D+00 0.000000D+00 **VEL** MATRIX H USING THE FORMULATION OF THE OBSERVATION EQUATION: Y = H * X + F * U + E * V FOR CASE # 1 LINEARIZER TEST AND DEMONSTRATION CASES FOR THE PROJECT: USER'S GUIDE **VEL ALPHA** Q **THETA** 0.351752D+02 -0.191245D-05 0.150046D-02 0.640771D-02 AN 0.2742480-09 -0.150534D-01 0.000000D+00 0.000000D+00 MATRIX F USING THE FORMULATION OF THE OBSERVATION EQUATION: Y = H * X + F * U + E * VFOR CASE # 1 LINEARIZER TEST AND DEMONSTRATION CASES FOR THE PROJECT: USER'S GUIDE **ELEVATOR** THROTTLE SPEED BRAKE -0.180978D-02 0.2916990+00 0.412845D+01 AN

0.000000D+00

AY

0.000000D+00

0.00000D+00

MATRIX E USING THE FORMULATION OF THE OBSERVATION EQUATION:

Y = H * X + F * U + E * V

FOR CASE # 1 LINEARIZER DEMONSTRATION AND TEST CASES

FOR THE PROJECT: USER'S GUIDE

X-BODY AXIS FORCE Y-BODY AXIS FORCE Z-BODY AXIS FORCE PITCHING MOMENT ROLLING MOMENT

AN -0.377037D-07 AY 0.000000D+00 0.000000D+00 0.222222D-04 -0.214132D-04 0.000000D+00

-0.79364

0.00000

0.22509

0.000000D+00 0.00000D+00 0.000000D+00 0.00000D+00

YAWING MOMENT

A N A Y 0.000000D+00 0.000000D+00

TRIM CONDITIONS FOR CASE # 2
LINEARIZER TEST AND DEMONSTRATION CASES

FOR THE PROJECT: USER'S GUIDE

STRAIGHT AND LEVEL TRIM WHILE VARYING ALPHA

TRIM ACHIEVED

COEFFICIENT OF LIFT		=	0.13221
COEFFICIENT OF DRAG		=	0.00895
LIFT	(LBS)	=	44376.86258
DRAG	(LBS)	=	3004.93778
ALTITUDE	(FT)	=	20000.
MACH	` '	=	0.90000
VELOCITY	(FT/SEC)	=	933.23196
EQUIVALENT AIRSPEED	(KTS)	=	403.42303
SPEED OF SOUND	(FT/SEC)	=	1036.92440
GRAVITATIONAL ACCEL	(FT/SEC**2)	=	32.11294
NORMAL ACCELERATION	(G-S)	=	0.98523
LOAD FACTOR	, -,	=	0.98803
DYNAMIC PRESSURE	(LB/FT**2)	=	552.05302
DENSITY	(SLUG/FT**3)	=	0.00126774
WEIGHT (@ALTITUDE)	(LBS)	=	44914.60434
BETA ,	(DEG)	=	0.00000
ALPHA	(DEG)	=	-0.72565
PHI	(DEG)	=	0.00000
THETA	(DEG)	=	9.27435
ALTITUDE RATE	(FT/SEC)	=	162.05403
GAMMA	(DEG)	=	10.00000
ROLL RATE	(DEG/SEC)	#	0.00000
PITCH RATE	(DEG/SEC)	=	0.00000
YAW RATE	(DEG/SEC)	=	0.00000
THRUST	(LBS)	=	10804.39673
SUM OF THE SQUARES	(/	=	0.00000
			- · · · · · · · · · · · · · · · · · · ·

TRIM PARAMETERS

TRIM PITCH AXIS PARAMETER

TRIM ROLL AXIS PARAMETER TRIM YAW AXIS PARAMETER

TRIM THRUST PARAMETER

CONTROL VARIABLES

ELEVATOR 0.06377 0.22509 THROTTLE SPEED BRAKE 0.00000

OBSERVATION VARIABLES

0.98522771 GS 0.00000000 ΑY

NON-DIMENSIONAL STABILITY AND CONTROL DERIVATIVES FOR CASE #2 LINEARIZER TEST AND DEMONSTRATION CASES

FOR THE PROJECT: HISER'S GHIDE

USER'S GUIDE		ROLLING MOMENT	PITCHING MOMENT	YAWING MOMENT	DRAG	LIFT	SIDE FORCE
ZERO COEFFICI	ENTS	-9.37149D-20	4.22040D-02	-6.11595D-19	1.08760D-02	1.57360D -01	4.31432D-19
ROLL RATE	(RAD/SEC)	-2.00000D-01	0.00000D+00	-3.37210D -02	0.00000D+00	0.00000D+00	0.00000D+00
PITCH RATE	RAD/SEC)	0.00000D+00	3.89530D+00	0.00000D+00	0.00000D+00	-1.72320D+01	0.00000D+00
YAW RATE	RAD/SEC)	1.50990D-01	0.00000D+00	-4.04710D -01	0.00000D+00	0.00000D+00	0.00000D+00
VELOCITY	(FT/SEC)	8.28111D-17	-1.01777D-09	7.42372D-16	0.00000D+00	7.18527D-09	0.00000D+00
MACH NUMBER	, , , , ,	8.58688D-14	-1.05535D-06	7.69784D-13	0.00000D+00	7.45058D-06	0.00000D+00
ALPHA	(RAD)	0.00000D+00	-1.68820D-01	0.00000D+00	3.72570D-01	4.87060D+00	0.00000D+00
BETA	(RAD)	-1.33450D-01	0.00000D+00	1.29960D-01	0.00000D+00	0.00000D+00	-9.74030D -01
ALTITUDE	`(FT)	0.00000D+00	0.00000D+00	0.00000D+00	0.00000D+00	0.00000D+00	0.00000D+00
ALPHA DOT	(RAD/ŠEC)	0.00000D+00	-1.18870D+01	0.00000D+00	0.00000D+00	1.72320D+01	0.00000D+00
BETADOT	(RAD/SEC)	0.00000D+00	0.00000D+00	0.00000D+00	0.00000D+00	0.00000D+00	0.00000D+00
E LE VA TOR		0.00000D+00	-6.95280D-01	0.00000D+00	4.38310D-02	5.72960D-01	0.00000D+00
THROTTLE		0.00000D+00	0.00000D+00	0.00000D+00	0.00000D+00	0.00000D+00	0.00000D+00
SPEED BRAKE		0.00000D+00	-4.17500D-01	0.00000D+00	6.49350D-02	3.74920D-02	0.00000D+00

VEHICLE STATIC MARGIN IS AT THIS FLIGHT CONDITION. 3.5% MEAN AERODYNAMIC CHORD STABLE

THETA

VEL

MATRIX A USING THE FORMULATION OF THE STATE EQUATION:

DX / DT = A * X + B * U + D * V

FOR CASE # 2 LINEARIZER TEST AND DEMONSTRATION CASES

FOR THE PROJECT: USER'S GUIDE

ALPHA

Q TIME DERIVATIVES WRT: -0.575730D-02 ALPHA -0.120900D+01 0.100000D+01 -0.701975D-04 0.189640D-01 0.231368D-03 Q THE.TA -0.149189D+01 -0.221451D+01 0.000000D+00 0.100000D+01 0.000000D+00 0.00000D+00 -0.316251D+02 -0.460435D-02 0.000000D+00 **VEL** -0.576868D+02

MATRIX B USING THE FORMULATION OF THE STATE EQUATION:

DX / DT = A * X + B * U + D * V

FOR CASE # 2 LINEARIZER TEST AND DEMONSTRATION CASES

FOR THE PROJECT: USER'S GUIDE

TIME DERIVATIVES	E LE VA TOR	THROTTLE	SPEED BRAKE					
WRT: ALPHA Q THETA VEL	-0.141961D+00 -0.220778D+02 0.00000D+00 -0.105186D+02	0.448742D-03 -0.147812D-02 0.000000D+00 0.343162D+02	-0.928932D-02 -0.135074D+02 0.0000000+00 -0.155832D+02					
MATRIX D US:	ING THE FORMULATION	OF THE STATE EQUA	TION:					
		= A * X + B * U +						
	FOR CASE #2 LINEARIZER DEMONSTRATION AND TEST CASES							
	FOR THE PROJECT USER'S GUIDE	:						
	X-BODY AXIS FORCE	Y-BODY AXIS FORC	E Z-BODY AXIS FOR	CE PITCHING MOMENT	ROLLING MOMENT			
DERIVATIVES WRT TIME OF:								
ALPHA Q THETA VEL	0.934880D -08 -0.307941D -07 0.000000D+00 0.714920D -03	0.000000D+00 0.000000D+00 0.000000D+00 0.495829D-13	0.738119D-06 -0.243129D-05 0.00000D+00 -0.905497D-05	0.0000000+00 0.605694D-05 0.000000D+00 0.000000D+00	0.000000D+00 0.000000D+00 0.000000D+00 0.000000D+00			
DERIVATIVES WRT TIME OF:	YAWING MOMENT							
ALPHA Q THETA VEL	0.000000D+00 0.000000D+00 0.00000D+00 0.00000D+00							
	MATRIX H USING THE	FORMULATION OF T	HE OBSERVATION EQ	JATION:				
		= H * X + F * 9						
	FOR CASE # 2 LINEARIZER TEST AN	D DEMONSTRATION C	ASES					
	FOR THE PROJECT: USER'S GUIDE							
	ALPHA	Q	THETA	VEL				
AN AY	0.350424D+02 0.000000D+00	-0.128333D -06 0.000000D+00		0.203434D-02 0.000000D+00				
	MATRIX F USING THE	FORMULATION OF T	HE OBSERVATION EQ	UATION:				
	Y = H * X + F * U + E * V							
	FOR CASE # 2 LINEARIZER TEST AND DEMONSTRATION CASES							
	FOR THE PROJECT: USER'S GUIDE							
	ELEVATOR	THROTTLE	SPEED BRAKE					

AN AY 0.411323D+01 0.000000D+00 0.492845D-03 0.000000D+00 0.263288D+00 0.000000D+00

MATRIX E USING THE FORMULATION OF THE OBSERVATION EQUATION:

Y = H * X + F * U + E * V

FOR CASE # 2 LINEARIZER DEMONSTRATION AND TEST CASES

FOR THE PROJECT: USER'S GUIDE

X-BODY AXIS FORCE Y-BODY AXIS FORCE Z-BODY AXIS FORCE PITCHING MOMENT ROLLING MOMENT 0.102676D-07 0.000000D+00 -0.214116D-04 0.000000D+00 0.000000D+00 0.000000D+00 0.000000D+00 0.000000D+00

YAWING MOMENT

AN 0.000000D+00 AY 0.000000D+00

ΑN

Example printer output file 2 (unit 2)

TRIM CONDITIONS FOR CASE # 1 LINEARIZER TEST AND DEMONSTRATION CASES

FOR THE PROJECT: USER'S GUIDE

LEVEL TURN WHILE VARYING ALPHA

TRIM ACHIEVED

COEFFICIENT OF LIFT COEFFICIENT OF DRAG LIFT DRAG ALTITUDE MACH VELOCITY EQUIVALENT AIRSPEED SPEED OF SOUND GRAVITATIONAL ACCEL NORMAL ACCELERATION LOAD FACTOR DYNAMIC PRESSURE DENSITY WEIGHT (@ALTITUDE) BETA ALPHA PHI THETA ALTITUDE RATE GAMMA ROLL RATE PITCH RATE YAW RATE THRUST SUM OF THE SQUARES TRIM PARAMETERS	(LBS) (LBS) (FT) (FT/SEC) (KTS) (FT/SEC**2) (G-S) (LBS/FT**2) (SLUG/FT**3) (LBS) (DEG) (DEG) (DEG) (DEG) (DEG) (DEG) (DEG/SEC) (DEG/SEC) (LBS)		0.40144 0.03058 134741.68807 10265.70661 20000. 0.90000 933.23196 403.42303 1036.92440 32.11294 3.00163 2.99995 552.05302 0.00126774 44914.60434 0.03193 2.66824 70.62122 0.91607 0.00000 0.00000 -0.08951 5.28086 1.85749 10277.03515 0.00000
TRIM PITCH AXIS PARAMETRIM ROLL AXIS PARAMETRIM YAW AXIS PARAMETRIM THRUST PARAMETER CONTROL VARIABLES ELEVATOR	# = = =	-0.66958 -0.01526 -0.02125 0.21410	
THROTTLE SPEED BRAKE	(DEG)	=	0.21410 0.00000

OBSERVATION VARIABLES

AN = 3.00163339 GS AY = 0.94136286 GS

VEHICLE STATIC MARGIN IS 3.5% MEAN AERODYNAMIC CHORD STABLE AT THIS FLIGHT CONDITION

TRIM CONDITIONS FOR CASE # 2
LINEARIZER TEST AND DEMONSTRATION CASES

FOR THE PROJECT: USER'S GUIDE

STRAIGHT AND LEVEL TRIM WHILE VARYING ALPHA

TRIM ACHIEVED

COEFFICIENT OF LIFT		_	0.13221
COEFFICIENT OF DRAG		_	
LIFT	(1 D C)	=	0.00895
	1 <i>i</i>	=	44376.86258
DRAG	(-00)	=	3004.93778
ALTITUDE	(FT)	=	20000.
MACH		=	0.90000
VELOCITY	(FT/SEC)	=	933.23196
EQUIVALENT AIRSPEED	(KTS)	=	403.42303
SPEED OF SOUND	(FT/SEC)	=	1036.92440
GRAVITATIONAL ACCEL	(FT/SEC**2)	=	32.11294
NORMAL ACCELERATION	(G-S)	=	0.98523
LOAD FACTOR		=	0.98803
DYNAMIC PRESSURE	(LB/FT**2)	=	552.05302
DENSITY	(SLUG/FT**3)	=	0.00126774
WEIGHT (@ALTITUDE)	(LBS)	=	44914.60434
BETA	(DEG)	=	0.00000
ALPHA	(DEG)	=	-0.72565
PHI	(DEG)	=	0.00000
THETA	1 1	=	9.27435
ALTITUDE RATE	i	=	162.05403
GAMMA	(DEG)	=	10.00000
ROLL RATE	(DEG/SEC)	=	0.00000
PITCH RATE	(DEG/SEC)	=	0.00000
YAW RATE	(DEG/SEC)	=	0.00000
THRUST			-
	(LBS)	=	10804.39673
SUM OF THE SQUARES		=	0.00000

TRIM PARAMETERS

TR IM	PITCH AXIS PARAMETER	=	-0.79364
TRIM	ROLL AXIS PARAMETER	=	0.00000
TR IM	YAW AXIS PARAMETER	=	0.00000
TRIM	THRUST PARAMETER	=	0.22509

CONTROL VARIABLES

ELEVATOR	=	0.06377
THROTTLE	=	0.22509
SPEED BRAKE	=	0.00000

OBSERVATION VARIABLES

AN	=	0.98522771	GS
AY	=	0.00000000	GS

VEHICLE STATIC MARGIN IS 3.5% MEAN AERODYNAMIC CHORD STABLE AT THIS FLIGHT CONDITION

APPENDIX I: EXAMPLE USER-SUPPLIED SUBROUTINES

The following subroutines are examples of user-supplied routines that provide the aerodynamic, control, and engine models to LINEAR. These subroutines are based on an F-15 aircraft simulation and are typical of the routines needed to interface LINEAR to a set of nonlinear simulation models. These subroutines are meant to illustrate the use of the named common blocks to communicate between LINEAR and the user's routines. These subroutines are used with all examples in this report. Included with this report are microfiche listings of these subroutines.

Aerodynamic Model Subroutines

The following two subroutines define a linear aerodynamic model. Even though this model is greatly simplified from the typical nonlinear aerodynamic model, the example illustrates the functions of the subroutines ADATIN and CCALC.

```
SUBROUTINE ADATIN
C
C....EXAMPLE AERODYNAMIC DATA DEFINITION (OR INPUT) SUBROUTINE
C....ROUTINE TO DEFINE STABILITY AND CONTROL DERIVATIVES FOR THE
     AERODYNAMIC MODEL
C
           COMMON BLOCK TO COMMUNICATE AERODYNAMIC DATA BETWEEN THE
           SUBROUTINES ADATIN AND CCALC
                             ,CLP
     COMMON /ARODAT/ CLB
                      CLDA
                            ,CLDR
                                    ,CLDT
                             ,CMA
                                    ,CMO
                                            ,CMAD
                      CMO
                      CMDE
                             ,CMSB
                             ,CNP
                                    , CNR
                      CNB
                            ,CNDR
                                    ,CNDT
                      CNDA
                                           CDSB
                      CDO ,CDA ,CDDE ,CDSB ,CLFTO ,CLFTA ,CLFTQ ,CLFTAD,
                      CLFTDE, CLFTSB,
                      CYB
                             ,CYDA ,CYDR ,CYDT
C....ROLLING MOMENT DERIVATIVES.
C
              STABILITY DERIVATIVES WITH RESPECT TO
C
              SIDESLIP, ROLL RATE, YAW RATE . . .
           = -1.3345 E-01
     CLB
           = -2.0000 E-01
     CLP
           = 1.5099 E-01
     CLR
C
C
              CONTROL DERIVATIVES WITH RESPECT TO
C
              AILERON, RUDDER, DIFFERENTIAL TAIL . . .
     CLDA = 2.6356 E-02
     CLDR = -2.3859 E-03
CLDT = 4.0107 E-02
C....PITCHING MOMENT DERIVATIVES.
C
C
              STABILITY DERIVATIVES WITH RESPECT TO ANGLE OF
              ATTACK, PITCH RATE, ANGLE OF ATTACK RATE . . .
C
     CMO
           = 4.2204 E-02
C
     CMA
           = -1.6882 E-01
     CMO
           = 3.8953
     CMAD = -1.1887 E+01
C
```

```
CONTROL DERIVATIVES WITH RESPECT TO
C
С
              ELEVATOR, SPEED BRAKE . . .
Č
     CMDE = -6.9528 E-01
     CMSB = -4.1750 E-01
C....YAWING MOMENT DERIVATIVES.
С
С
              STABILITY DERIVATIVES WITH RESPECT TO
С
              SIDESLIP, ROLL RATE, YAW RATE . . .
C
     CNB
           = 1.2996 E-01
     CNP
           = -3.3721 E-02
     CNR
            = -4.0471 E-01
C
              CONTROL DERIVATIVES WITH RESPECT TO
C
              AILERON, RUDDER, DIFFERENTIAL TAIL . . .
     CNDA = 2.1917 E-03
     C NDR = -6.9763 E-02

C NDT = 3.0531 E-02
Ċ.
   .. COEFFICIENT OF DRAG DERIVATIVES.
C
Ċ
              STABILITY DERIVATIVES WITH RESPECT TO
              ANGLE OF ATTACK . . .
C
     CD0
           = 1.0876 E-02
С
     CDA
            = 3.7257 E-01
С
C
              CONTROL DERIVATIVES WITH RESPECT TO
C
              ELEVATOR, SPEED BRAKE . . .
С
     CDDE = 4.3831 E-02
     CDSB = 6.4935 E-02
C
    .. COEFFICIENT OF LIFT DERIVATIVES.
С.
C
Č
              STABILITY DERIVATIVES WITH RESPECT TO ANGLE OF
C
              ATTACK, PITCH RATE, ANGLE OF ATTACK RATE . . .
Č
     CLFTO = 1.5736 E-01
С
     CLFTA = 4.8706
     CLFTQ = -1.7232 E+01
     CLFTAD= 1.7232 E+01
C
C
              CONTROL DERIVATIVES WITH RESPECT TO
C
              ELEVATOR, SPEED BRAKE . . .
     CLFTDE = 5.7296 E-01
CLFTSB = 3.7492 E-02
С
C....SIDEFORCE COEFFICIENT DERIVATIVES.
С
              STABILITY DERIVATIVES WITH RESPECT TO
              SIDESLIP . . .
C
     CYB
            = -9.7403 E-01
C
              CONTROL DERIVATIVES WITH RESPECT TO
С
              AILERON, RUDDER, DIFFENTIAL TAIL
     CYDA = -1.1516 E-03
     C YDR = -1.5041 E-01

C YDT = -7.9315 E-02
С
      RETURN
      END
```

```
SUBROUTINE CCALC
C
C...EXAMPLE AERODYNAMIC MODEL.
C
C.... ROUTINE TO CALCULATE THE AERODYNAMIC FORCE AND MOMENT COEFFICIENTS.
C
                COMMON BLOCKS CONTAINING STATE, CONTROL, AND AIR
C
Č
                DATA PARAMETERS
С
      COMMON /DRVOUT/ F(13), DF(13)
      COMMON /CONTRL/ DC(30)
C
      COMMON /DATAIN/ S,B,CBAR,AMSS,AIX,AIY,AIZ,AIXZ,AIXY,AIYZ,AIXE
      COMMON /TRIGEN/ SINALP, COSALP, SINBTA, COSBTA, SINPHI, COSPHI,
                         SINPSI, COSPSI, SINTHA, COSTHA
      COMMON /SIMOUT/ AMCH, QBAR, GMA, DEL, UB, VB, WB, VEAS, VCAS COMMON /CGSHFT/ DELX, DELY, DELZ
C
                 COMMON BLOCK TO OUTPUT AERODYNAMIC FORCE AND MOMENT
C
                COEFFICIENTS
Č
      COMMON /CLCOUT/ CL
                                   ,CM
                                           ,CN
                                                    ,CD
                                                             ,CLFT ,CY
С
C
                 COMMON BLOCK TO COMMUNICATE AERODYNAMIC DATA BETWEEN
CCC
                 THE SUBROUTINES ADATIN AND CCALC
                                  ,CLP
                                           ,CLR
      COMMON /ARODAT/ CLB
                                           ,CLDT
                                  ,CLDR
                           CLDA
                                  ,CMA
                                           ,CMQ
                           CMO
                                                    ,CMAD
                                  ,CMSB
                           CMDE
                                   ,CNP
                           CNB
                                            ,CNR
                                  ,CNDR
                           CNDA
                                           ,CNDT
                           CDO ,CDA ,CDDE ,CDSB ,CLFTO ,CLFTA ,CLFTQ ,CLFTAD,
                           CLFTDE, CLFTSB,
                           CYB
                                   ,CYDA ,CYDR
                                                    ,CYDT
C
                 EQUIVALENCE VARIABLE NAMES
       EQUIVALENCE
                                  , F( 1)),
                     (T
                                 , F( 2)),(Q
, F( 5)),(ALP
, F( 8)),(PSI
                                                     , F( 3)),(R
, F( 6)),(BTA
, F( 9)),(PHI
                                                                         , F( 4)),
, F( 7)),
                      (P
                       Ì٧
                                                                         , F(10)),
                      (THA
                                  , F(11)),(X
                                                     f(12)),(Y
                                                                          , F(13)),
                      (H
                                 DF(11),

DF(2)),(QDOT ,DF(3)),(RDOT ,DF(4)),

DF(5)),(ALPDOT,DF(6)),(BTADOT,DF(7)),

DF(8)),(PSIDOT,DF(9)),(PHIDOT,DF(10)),

DF(11)),(XDOT ,DF(12)),(YDOT ,DF(13))
                       (TDOT
                       (PDOT
                       (VDOT
                       (THADOT
                      (HDOT
C
                                  ,DC( 1)),(DE,DC( 9)),(DSB
                                                     ,DC( 5)),(DT
                                                                        ,DC(8)),
       EQUIVALENCE (DA
                      (DR
C
      .COMPUTE TERMS NEEDED WITH ROTATIONAL DERIVATIVES.
С.
       ٧2
             = 2.0
                         *V
       B2V
             =₿
                         / \ 2
             =CBAR
                         /1/2
       C 2V
      .ROLLING MOMENT COEFFICIENT.
 С.
                                                                                      *DT
                                                       +C LDR
                                                                           +CLDT
                                              *DA
                                                                  *DR
       C.L.
              =CLB
                         * BTA
                                    +CLDA
                                              +CLR
                                                       *R
                                                                  )
                                    *P
              +B 2V
                         *(CLP
 C
     .. PITCHING MOMENT COEFFICIENT.
                                                                  +CMSB
                                                                           *DSB
                                              +CMDE
                                                       *DE
       CM
              =CMO
                         + CMA
                                    *AI P
                                                       *ALPDOT)
                         *(CMQ
                                              +CMAD
              +C 2V
 C....YAWING MOMENT COEFFICIENT.
```

```
C
                                +C NDA
     CN
           =C NB
                      * BTA
                                          *DA
                                                  +C NDR
                                                            *DR
                                                                    +C NDT
                                                                               *DT
                      *(CNP
                                *P
           +B 2V
                                          +C NR
                                                  *R
                                                           )
     .COEFFICIENT OF DRAG.
С
                                *ALP
     CD
           =C D0
                      + CDA
                                          +C DDE
                                                 *DE
                                                            +CDSB *DSB
C
C
     .COEFFICIENT OF LIFT.
                                *ALP
                                          +CLFTDE*DE
     CLFT =CLFT0
                      + CLFTA
                                                            +CLFTSB*DSB
           +C 2V
                      *(CLFTQ
                                *Q
                                          +CLFTAD*ALPDOT )
   .. SIDEFORCE COEFFICIENT.
C
                                +C YDA
     CY
           =C YB
                      *BTA
                                          *DA
                                                  +C YDR
                                                            *DR
                                                                     +C YDT *DT
C
     RETURN
     END
```

Engine Model Interface Subroutine

The following subroutine, IFENGN, both defines an engine model and provides the interface to LINEAR. In normal usage this subroutine would call subroutines that provide the detailed thrust, engine rotation, and fuel consumption modeling; the information from these subroutines would be transferred into the /ENGSTF/ common block.

```
SUBROUTINE IFENGN
C....EXAMPLE SUBROUTINE TO PROVIDE PROPULSION SYSTEM MODEL.
C
C....ROUTINE TO COMPUTE PROPULSION SYSTEM INFORMATION FOR LINEAR
C
C
    THIS SUBROUTINE IS THE INTERFACE BETWEEN THE DETAILED ENGINE
C
    MODELING SUBROUTINES AND LINEAR.
             INPUT COMMON BLOCK CONTAINING INFORMATION ON THRUST
C
С
             REQUEST TO ENGINE
C
    COMMON /CONTRL/ DC(30)
C
C
             OUTPUT COMMON BLOCK CONTAINING DETAILED INFORMATION
C
             ON EACH OF UP TO FOUR SEPARATE ENGINES
   .. ROUTINE TO COMPUTE ENGINE PARAMETERS:
C.
C
C
                THRUST(I) = THRUST CREATED BY EACH ENGINE
С
             TLOCAT(I,J) = LOCATION OF EACH ENGINE IN THE X-Y-Z PLANE
С
               XYANGL(I) = ANGLE IN X-Y BODY AXIS PLANE AT WHICH EACH
C
                            ENGINE IS MOUNTED
C
               XZANGL(I) = ANGLE IN X-Z BODY AXIS PLANE AT WHICH EACH
С
                            ENGINE IS MOUNTED
С
               TVANXY(I) = ANGLE IN THE X-Y ENGINE AXIS PLANE OF THE
C
                            THRUST VECTOR
               TVANXZ(I) = ANGLE IN THE X-Z ENGINE AXIS PLANE OF THE THRUST VECTOR
С
C
C
               DXTHRS(I) = DISTANCE BETWEEN THE ENGINE C.G. AND THE
C
                            THRUST POINT
                   EIX(I) = ROTATIONAL INERTIA OF EACH ENGINE
```

```
С
                  AMSENG(I) = MASS OF EACH ENGINE
                  ENGOMG(I) = ROTATIONAL VELOCITY (RAD/SEC)
C
     COMMON /ENGSTF/ THRUST(4),TLOCAT(4,3),XYANGL(4),XZANGL(4),
TVANXY(4),TVANXZ(4),DXTHRS(4),
                         EIX(4), AMSENG(4), ENGOMG(4)
C
               EQUIVALENCE VARIABLE NAMES
C
     EQUIVALENCE (THR
                             ,DC(12))
С
     .ASSUME THRUST PER ENGINE IS HALF VEHICLE WEIGHT.
     THRUST(1)= 24000.0 *THR
THRUST(2)= 24000.0 *THR
С
    ..LET ALL OTHER PARAMETERS DEFAULT TO ZERO
     RETURN
     END
```

Control Model Subroutine

The subroutine UCNTRL provides an interface between the trim parameters and the surface deflections. Figure 8 illustrates the gearing model implemented in the example UCNTRL subroutine. The thrust demand parameter is also set and passed to the subroutine IFENGN.

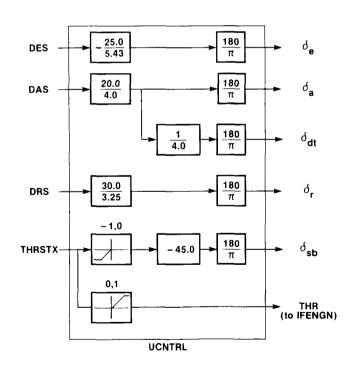


Figure 8. Gearing model in example UCNTRL subroutine.

```
SUBROUTINE UCNTRL
C....EXAMPLE TRIM/CONTROL SURFACE INTERFACE ROUTINE.
C....ROUTINE TO CONVERT TRIM INPUTS INTO CONTROL SURFACE DEFLECTIONS.
              INPUT COMMON BLOCK CONTAINING TRIM PARAMETERS
C
    COMMON /CTPARM/ DES
                           .DAS
                                   ,DRS
                                          .THRSTX
C
             OUTPUT COMMON BLOCK CONTAINING CONTROL SURFACE DEFLECTIONS
C
C
    COMMON /CONTRL/ DC(30)
С
             EQUIVALENCE VARIABLE NAMES.
C
     EQUIVALENCE (DA
                         ,DC( 1)),(DE
                                          ,DC( 5)),(DT
                  (DR
                         ,DC( 9)),(DCB
                                          ,DC(10)),(THR
                                                           ,DC(12))
C
     DATA DGR
                /57.29578/
С
    .CONVERT FROM INCHES OF STICK AND PEDAL TO DEGREES OF SURFACE
     DEFLECTION
C
                   *( 20.0 / 4.0 )
*(-25.0 / 5.43)
            =DAS
     DA
     DE
            =DES
                   *( 30.0 / 3.25)
     DR
            =DRS
    .SET DIFFERENTIAL TAIL BASED ON AILERON COMMAND.
                   / 4.0
C
    .CONVERT THRUST TRIM PARAMETER TO PERCENT THROTTLE COMMAND.
C
            = 0.0
     IF(THRSTX.GE. 0.0 ) THR
                                 =THRSTX
C
C....USE SPEED BRAKE IF NEEDED.
     IF(THRSTX.LT. 0.0 ) DSB
                                =THRSTX*(~45.0 )
C....CONVERT SURFACE COMMANDS TO RADIANS.
     DA
            =DA
                   /DGR
     DΕ
            =DE
                   /DGR
                   /DGR
     DR
            =DR
     DT
            =DT
                   /DGR
            =DSB
                   /DGR
     DSB
    RETURN
    END
```

Mass and Geometry Model Subroutine

The following subroutine, MASGEO, is an example of the mass and geometry subroutine that the user must provide to LINEAR. If the mass and geometry characteristics of the aircraft do not change or can be easily specified as a function of flight condition and surface setting (vehicle configuration), then the mass and geometry characteristics of the vehicle can be defined using the input file, and MASGEO would be a dummy subroutine, as is the following example. However, for an aircraft in which these mass and geometry properties are complicated or already defined using FORTRAN subroutines, MASGEO provides an interface between LINEAR and those subroutines.

APPENDIX J: REVISIONS TO MICORFICHE SUPPLEMENT

The following listing of subroutine ENGINE incorporates revisions not contained in the microfiche supplement included with this report (Program LINEAR and Subroutines Utilized by LINEAR). This listing should be used in place of the subroutine ENGINE listing on the microfiche supplement.

SYSDA1: [ANTON] ENGINE. FOR; 1 26-oct-1987 15:09:35 THE DISPLACEMENT OF THE 1-TH ENGINE FROM THE AIRCRAFT REFERENCE C.G. (FEET), PROJECTED ON THE X-Z' BODY/ENGINE AXIS X-ENGINE AXIS OF THE I-TH ENGINE THE ANGLE BETWEEN THE X-Y BODY AXIS CORRESPONDS TO THE CORRESPONDS TO THE CORRESPONDS TO THE THE MOMENT OF INERTIA ABOUT THE COORDINATE OF THE COORDINATE OF THE COORDINATE OF THE THE Y-BODY AXIS PLANE FROM THE X-BODY AXIS TO THE PROJECTION OF THE I-TH ENGINE THE X-BODY AXIS THE Z-BODY AXIS THE COMMON BLOCKS /LLL016/ AND /LLL015/ ARE THE MAIN I/O COMMON BLOCKS FOR THIS ROUTINE. THE VARIABLES IN /LLL016/ARE DEFINED IN THE USER SUPPLIED ROUTINE IFENGN. THIS PLANE AND THE I-TH ENGINE AXIS ROUTINE COMPUTES THE VALUES OF THE VARIABLES IN /LLL015/ AXIS ONTO THE X-Y PLANE. (DEG) I-TH ENGINE I-TH ENGINE I-TH ENGINE XYANGL(I) THE ANGLE IN THE X-Y BODY AXIS MODIFIED FOR DIFFERENT ANGLE DEFINITION JUNE, 1985 DIMENSION CSANXY(4), SNANXY(4), CSANXZ(4), SNANXZ(4) THRUST(I) THE TOTAL THRUST OF THE I-TH J#3 3=2 3=1 ENGINE (LBS) DIMENSION HENGIN(4,3), GYRO(3), AINRTA(3,3) THE VARIABLES IN THESE COMMON BLOCKS ARE: ROUTINE TO COMPUTE EFFECTS OF ENGINE(S). AND SUPPLIES THEM TO THE REST OF LINEAR. DIMENSION XTHRST(4), YTHRST(4), ZTHRST(4) IMPLICIT DOUBLE PRECISION (A-H) IMPLICIT DOUBLE PRECISION (0-Z) WRITTEN FEBRUARY 1,1983 LEE DUKE NASA/DFRF TLOCAT(I, J) DIMENSION TVECLC(4,3) JOE PAHLE NASA/DFRF CHARACTER . 4 NAMYVC XZANGL(I) DIMENSION TORQUE(3) EIX(I) SUBROUTINE ENGINE /LLL016/ υ υυ υU 0026 0000 0055

0021 0023

0022

0024 0025 0028 0029 0031

0030

0027

0020

0019

0016

0005 0007 6000 0010 0011 0012 0013 0014 0015 0017 0018

0004

9000 0008

0002

Page

0032

0035 0037 0039 0040 0041

0034 0036 0038 0044 0045 0046 0048 0049

0047

0042 0043 0053 0054

0051 0052

```
THE PROJECTION OF THE I-TH THRUST VECTOR
                                                                                                                                                                                                               PROJECTED ON THE X-Z' ENGINE/THRUST AXIS
                                                                                                                                                                                                                                                              POSITIVE IN THE NEGATIVE ENGINE X-AXIS
                                                                                                                                                                              THE ANGLE BETWEEN THE X-Y ENGINE AXIS
                                                                                                                                                                                                                             THE DISTANCE BETWEEN THE C.G. OF THE
                                                                                                                                                                                                                                           ENGINE AND THE THRUST POINT MEASURED
                                                                              MEASURED USING THE R.H.R. ABOUT THE X-ENGINE AXIS. (RAD/SEC)
                                                                                                                               PLANE FROM THE X-ENGINE AXIS TO
                                                                                                                                                                                                                                                                                                                                              TOTAL THRUST IN THE X-BODY AXIS
                                                                                                                                                                                                                                                                                                                                                            TOTAL THRUST IN THE Y-BODY AXIS
                                                                                                                                                                                                                                                                                                                                                                            TOTAL THRUST IN THE Z-BODY AXIS
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            S, B, CBAR, AMSS, AIX, AIY, AIZ, AIXZ, AIXY, AIYZ, AIXE
TLFT, DRAG, SIDFOR, ALM, AMM, ANM
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            , F(4)),
                                               THE ROTATIONAL VELOCITY OF THE
                                                                I-TH ENGINE. POSITIVE ROTATION IS
                                                                                                              THE ANGLE IN THE X-Y ENGINE AXIS
                                                                                                                                                          ONTO THE X-Y ENGINE PLANE. (DEG)
                                                                                                                                                                                              PLANE AND THE I-TH THRUST VECTOR
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          COMMON /LLL016/ THRUST(4),TLOCAT(4,3),XYANGL(4),XZANGL(4),
TVANXY(4),TVANXZ(4),DXTHRS(4),
EIX(4),AMSENG(4),ENGOMG(4)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           SINALP, COSALP, SINBTA, COSBTA, SINPHI, COSPHI
                                                                                                                                                                                                                                                                                                                                                                                             TOTAL PITCHING MOMENT INCREMENT
                                                                                                                                                                                                                                                                                                                                                                                                                              TOTAL ROLLING MOMENT INCREMENT
                                                                                                                                                                                                                                                                                                                                                                                                                                                              TOTAL YAWING MOMENT INCREMENT
            AMSENG(I) THE MASS OF THE ROTATING MACHINERY
                               IN THE I-TH ENGINE (SLUGS)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         /LLL008/ CL,CM,CN,CD,CLFT,CY
/LLL049/ AMCH,QBAR,GMA,DEL,UB,VB,WB,VEAS,VCAS
/LLL007/ DELX,DELY,DELZ
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             , F(3)), (R
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          , OBSVEC(120)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            SINPSI, COSPSI, SINTHA, COSTHA
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            NUMYVC, LOCYVC(120), STDOBS,
                                                                                                                                                                                                                                                                                                                                                                                                             DUE TO ENGINES
                                                                                                                                                                                                                                                                                                                                                                                                                                              DUE TO ENGINES
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              , DCM
                                                                                                                                                                                                                                                                                                                                                                                                                                                                             DUE TO ENGINES
(SLUG-FT**2).
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              COMMON /LLL048/ AX, AY, AZ, ANX, ANY, ANZ, AN
                                                                                                                                                                                                                                                                              DIRECTION
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              COMMON /LLL001/ A,RHO,G,PA,TMPR
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            , F( 1)),
, F( 2)),(Q
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          VARPOS(120, 6)
NAMYVC(120, 5)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             F(13), DF(13)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           GS, ALOADF
                                               ENGOMG(I)
                                                                                                              TVANXY (I)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              FPX
                                                                                                                                                                              TVANXZ (I
                                                                                                                                                                                                                               DXTHRS (I)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           COMMON /LLL012/
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             COMMON /LLL054/
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          COMMON /LLL019/
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            COMMON /LLL015/
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             COMMON /LLL013/
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           COMMON /LLL028/
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             COMMON /LLL007/
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              COMMON /LLL041/
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             COMMON /LLL040/
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             COMMON /LLL032/
                                                                                                                                                                                                                                                                                                                                                                           FPZ
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            E 0
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             LOGICAL STDOBS
                                                                                                                                                                                                                                                                                                                                                            PPY
                                                                                                                                                                                                                                                                                                                                                                                             DCM
                                                                                                                                                                                                                                                                                                                                                                                                                                                              DON
                                                                                                                                                                                                                                                                                                                                                                                                                              DCL
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              EQUIVALENCE
                                                                                                                                                                                                                                                                                                               /LLL015/
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             COMMON
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               COMMON
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               U
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               U
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              υ
                                                                                                                             9900
                                                                                                                                                           0068
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             0089
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             0600
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            0093
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          0094
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            7600
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          6600
                                                                                                                                             0067
                                                                                                                                                                                                                                          0073
                                                                                                                                                                                                                                                                            0075
                                                                                                                                                                                                                                                                                            9 2 0 0
                                                                                                                                                                                                                                                                                                             0077
                                                                                                                                                                                                                                                                                                                            0078
                                                                                                                                                                                                                                                                                                                                             0079
                                                                                                                                                                                                                                                                                                                                                              0080
                                                                                                                                                                                                                                                                                                                                                                                                             0083
                                                                                                                                                                                                                                                                                                                                                                                                                             0084
                                                                                                                                                                                                                                                                                                                                                                                                                                                              9800
                                                                                                                                                                                                                                                                                                                                                                                                                                                                             0087
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             0088
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              0092
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            9600
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             8600
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             0100
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              0101
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          0104
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             0105
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             0106
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             0109
                               0900
                                                             0062
                                                                                0063
                                                                                               0064
                                                                                                              0065
                                                                                                                                                                                              0000
                                                                                                                                                                                                            0071
                                                                                                                                                                                                                             0072
                                                                                                                                                                                                                                                                                                                                                                              0081
                                                                                                                                                                                                                                                                                                                                                                                             0082
                                                                                                                                                                                                                                                                                                                                                                                                                                              0085
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              0091
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              0102
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             0103
                                               0061
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              0107
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              0108
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              0110
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              0111
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              0112
```

```
F(7)),
F(10)),
                                    PDOT ,DF(2), (QDOT ,DF(3)), (RDOT ,DF(4)), VDOT ,DF(5), (ALPDOT,DF(6)), (BTADOT,DF(7)), THADOT ,DF(8)), (PSIDOT,DF(9)), (PHIDOT,DF(10)), HDOT ,DF(11)), (XDOT ,DF(12)), (YDOT ,DF(13))
                  , F(13)),
 , F( 6)), (BTA
, F( 9)), (PHI
, F(12)), (Y
                                                                                                                                                                                                                                                                                                                                                                     * CSANXY(I)
                                                                                                                                                                                                                                                                                                                                                                                                SNANXY(I)
                                                                                                                                                                                                                                                                                                                                                                                       CSANXY(I)
                                                                                                                                                                                                                                                                                                                                                                                                                  CSANXY(I)
                                                                                                       CALL USER ENGINE MODEL INTERFACE ROUTINE
                                                                                                                                                                                                                                                                                                                                                                                                                                                                         COMPUTE TOTAL X-AXIS AND Z-AXIS THRUST.
                                                                                                                                                                                                                                                                                                                                 CSTAXY
 , F( 5)), (ALP
, F( 8)), (PSI
, F(11)), (X
, DF( 1)),
, DF( 2)), (QDOT
                                                                                                                                                                                                                                                                                                                                THRUST(I) * CSTAXZ * THRUST(I) * CSTAXZ *
                                                                                                                                                                                                                                                                                                                                                                                                                  SNANXZ(I)
                                                                                                                                                                                                                                                                                                                                                                     CSANXZ(I)
                                                                                                                                                                                                                                                                                                                                                                                       SNANXZ(I)
                                                                                                                                                                                                                                                                                                                                                                                                 CSANXZ(I)
                                                                                                                                                                                                                                                                                                                                                                              SNANXY (I)
                                                                                                                                                                                                                                                                                                                                                                                                                           * SNANXZ(I)
* CSANXZ(I)
                                                                                                                                                                                                                                                                                                                                                                                                          CSANXY (I)
                                                                                                                                                                                                                                                                                                                                                 * SNTAXZ
                                                                                                                                            COMPUTE COMPONENTS OF THRUST
                                                                                                                                                                                                           CSANXZ(I) = DCOS(ANGLXZ)
SNANXZ(I) = DSIN(ANGLXZ)
CSANXY(I) = DCOS(ANGLXY)
                                                                                                                                                                                                                                     SNANXY(I) = DSIN(ANGLXY
                                                                                                                                                                                = XZANGL(I)/DGR
= XYANGL(I)/DGR
                                                                                                                                                                                                                                                        TANGXY = TVANXY(I)/DGR
TANGXZ = TVANXZ(I)/DGR
                                                                                     / 57.2958/
                                                                                                                                                                                                                                                                                   DCOS(TANGXY)
DSIN(TANGXY)
                                                                                                                                                                                                                                                                                                     DCOS (TANGXZ)
                                                                                                                                                                                                                                                                                                               DSIN (TANGXZ)
                                                                                                                                                                                                                                                                                                                                        YTHRSI = THRUST(I)
ZTHRSI = -THRUST(I)
                                                                                                                                                                                                                                                                                                                                                                              YTHRSI
                                                                                                                                                                                                                                                                                                                                                                     XTHRSI
                                                                                                                                                                                                                                                                                                                                                                                                 XTHRSI
                                                                                                                                                                                                                                                                                                                                                                                                          YTHRSI
                                                                                                                                                                                                                                                                                                                                                                                                                   ZTHRSI
                                                                                                                                                                                                                                                                                                                                                                                                                           XTHRSI
                                                                                                                                                                                                                                                                                                                                                                                                                                     ZTHRSI
                            TDOT)
  (V
(THA
                                                                                                                                                                                                                                                                                                                                                                                                                              H
                                                                                                                                                                                                                                                                                                                                                                      Ħ
                                                                                                                                                                                                                                                                                                                                                                                                  II
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           0.00
                                                                                                                          CALL INTRF2
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 I=1,4
                                                                                                                                                              DO 1 I=1,4
                                                                                                                                                                                                                                                                                                                                                                     XTHRST(I)
                                                                                                                                                                                                                                                                                                                                                                                                 YTHRST(I)
                                                                                                                                                                                                                                                                                                                                                                                                                            ZTHRST(I)
                                                                                                                                                                                                                                                                                                                                                                                                                                                        CONTINUE
                                                                                      DATA DGR
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              Ħ
                                                                                                                                                                                                                                                                                                                                 XTHRSI
                                                                                                                                                                                          ANGLXY
                                                                                                                                                                                                                                                                                    CSTAXY
                                                                                                                                                                                                                                                                                             SNTAXY
                                                                                                                                                                                                                                                                                                      CSTAXZ
                                                                                                                                                                                                                                                                                                               SNTAX2
                                                                                                                                                                                 ANGLXZ
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            FPX
                                                                                                                                                                                                                                                                                                                                                                                                                                                                 000
                                                                                                                                                                                                                                                                            υ
                                                                                                                                                                                                                                                                                                                        U
                                                                                                                                                                                                                                                                                                                                                             υ
                                                                                                                                                                                                                                                                                                                                                                                                                                               U
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         υ
                                                                                                                                                                                                   υ
                                                                                                                                                                                                                                                 υ
                                                                                               U
                                                                                                                 U
                                                                                                                                    U
                                                                                                                                                                                                                                                                  0143
0144
0145
                                                                                                                                                                                                                                                                                                                                01150
                                                                                                                                                                                                                                                                                                                                                            0153
                                                                                                                                                                                                                                                                                                                                                                              0155
                                                                                                                                                                                                                                                                                                                                                                                                                            0160
                                                                                                                                                                                                                                                                                                                                                                                                                                              0162
                                                                                                                                                                                                                                                                                                                                                                                                                                                                0164
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            0167
                                                                                                                          0128
0129
0130
                                                                                                                                                                       0133
0134
0135
                                                                                                                                                                                                  0136
                                                                                                                                                                                                                             0139
                                                                                                                                                                                                                                                         0142
                                                                                                                                                                                                                                                                                             0146
                                                                                                                                                                                                                                                                                                                        0149
                                                                                                                                                                                                                                                                                                                                                   0152
                                                                                                                                                                                                                                                                                                                                                                                                          0158
                                                                                                                                                                                                                                                                                                                                                                                                                   0159
                                                                                                                                                                                                                                                                                                                                                                                                                                                        0163
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   0166
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      0168
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              0169
                                                                                                                                                               0132
                                                                                                                                                                                                                     0138
                                                                                                                                                                                                                                       0140
                                                                                                                                                                                                                                                                                                                                          0151
                                                                                                                                                                                                                                                                                                                                                                     0154
                                                                                                                                                                                                                                                                                                                                                                                                 0157
                                                                                                                                                                                                                                                                                                                                                                                                                                      0161
  0115
0116
0117
0118
                                       0119
                                                                  0122
                                                                             0123
                                                                                    0124
0125
0126
0127
                                                                                                                                                     0131
                                                                                                                                                                                                                                                 0141
                                                                                                                                                                                                                                                                                                      0147
                                                                                                                                                                                                                                                                                                                0148
                                                          0121
```

```
26-0ct-1987 15:10:03
26-0ct-1987 15:09:35
                                                                                                               COMPUTE ROTATIONAL EFFECTS (TORQUE) DUE TO ENGINE OFFSET FROM
                                                                                                                                                                                                                   DXTHRS(I) * CSANXZ(I) * CSANXY(I)
DXTHRS(I) * CSANXZ(I) * SNANXY(I)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        EIXE*CSANXZ(I)*CSANXZ(I)*CSANXY(I)*CSANXY(I)
EIXE*CSANXZ(I)*CSANXZ(I)*SNANXY(I)*CSANXY(I)
EIXE*CSANXZ(I)*SNANXZ(I)*CSANXY(I)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      EIXE*SNANXY(I)*SNANXY(I)*CSANXZ(I)*CSANXZ(I)
EIXE*SNANXZ(I)*CSANXZ(I)*SNANXY(I)
                                                                                                                                                                                                                                                                          +ZTHRST(I) *TVECLC(I,2)-YTHRST(I) *TVECLC(I,3)
                                                                                                                                                                                                                                                                                                 +XTHRST(I) *TVECLC(I, 3)-ZTHRST(I) *TVECLC(I, 1) = TORQUE(3)
                                                                                                                                                                                                                                                                                                                        +YTHRST(I) *TVECLC(I,1)-XTHRST(I) *TVECLC(I,2)
                                                                                                                                                                                                                                        * SNANXZ(I)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       COMPUTE THE INERTIA TENSOR OF THE I-TH ENGINE
                                                                                                                                                                                                                                                                                                                                                                                                                 ENGOMG(I) * CSANXZ(I) * CSANXY(I)
ENGOMG(I) * CSANXZ(I) * SNANXY(I)
-ENGOMG(I) * SNANXZ(I)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   EIXE * SNANXZ (I) *SNANXZ (I)
                                                                                                                                                                                                                    = TLOCAT(I,1) - DXTHRS(I)
= TLOCAT(I,2) - DXTHRS(I)
= TLOCAT(I,3) + DXTHRS(I)
                                                                                                                                                                                                                                                                                                                                                                     COMPUTE ANGULAR MOMENTUM OF ENGINES
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  ABOUT THE AIRCRAFT REFERENCE C.G.
                                                                                                                         CENTERLINE, AND THRUST VECTORING
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           AINRTA(1,3)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           AINRTA(1,2)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        AINRTA(2,3)
                                                                                                                                                                                                                  TVECLC(I,1) = TLOCAT(I,1)
                                             XTHRST(I)
                                                       YTHRST (I)
                                                                ZTHRST(I)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                          TLOCAT(I,1)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    TLOCAT(I,2)
TLOCAT(I,3)
                                                                                                                                                                                                                                                                 TORQUE(1) = TORQUE(1)
                                                                                                                                                                                                                                                                                       = TORQUE(2)
                                                                                                                                                                                                                                                                                                                                                                                                                                                              = EIX(I)
                                                                                                                                                                                                                                                                                                                                                                                                                                      -ENGOMG(I)
                                                                                                                                                0.00
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  •
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           n
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    11
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 II
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            II
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       H
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   11
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              Ħ
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        H H
                                                                                                                                                  II
                                                                                                                                                                                                                             TVECLC(1,2)
TVECLC(1,3)
                                             FPX
                                                       FPY
                                                                  FPZ
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        AINRTA(1,1)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    AINRTA(1,2)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               AINRTA(1,3)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            AINRTA(2,1)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      AINRTA(2,2)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 AINRTA(2,3)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            AINRTA(3,1)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   AINRTA(3,3)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        AINRTA(3,2)
                                                                                                                                                                                             DO 3 I=1,4
                                                                                                                                                                                                                                                                                                                                                                                            5 I=1,4
                                                                                                                                                                    TORQUE (3)
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         4 3=1,3
                                                                                                                                                 TORQUE(1)
                                                                                                                                                           TORQUE (2)
                                                                                                                                                                                                                                                                                                            TORQUE(3)
                                                                                                                                                                                                                                                                                       TORQUE (2)
                                                                                         CONTINUE
                                                                                                                                                                                                                                                                                                                                               CONTINUE
                                                                                                                                                                                                                                                                                                                                                                                                                   Ħ
                                                                                                                                                                                                                                                                                                                                                                                                                  OMEGX
                                                                                                                                                                                                                                                                                                                                                                                                                                       OMEGZ
                                                                                                                                                                                                                                                                                                                                                                                                                            OMEGY
                                                                                                                                                                                                                                                                                                                                                                                                                                                              EIXE
                                                                  FPZ
                                                       FPY
                                                                                                                                                                                                                                                                                                                                                                                            2
                                                                                                                                                                                                                                                                                                                                                                                                                                                                          ×
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                Z 3
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          2
                                                                                                                                                                                                                                                                                                                                               m
                                                                                                   υÜ
                                                                                                                         υU
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       ü
                                 U
                                                                                                                                                                                  U
                                                                                                                                                                                                       U
                                                                                                                                                                                                                                                                                                                                    υ
                                                                                                                                                                                                                                                                                                                                                                     Ü
                                                                                                                                                                                                                                                                                                                                                                                 U
                                                                                                                                                                                                                                                                                                                                                                                                       U
                                                                                                                                                                                                                                                                                                                                                                                                                                                   U
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 υυ
                                                                          0176
                                                                                                                         0180
                                                                                                                                                           0183
                                                                                                                                                                                0185
                                                                                                                                                                                            0186
                                                                                                                                                                                                                                       0190
                                         0173
                                                                                                                                    0181
                                                                                                                                                0182
                                                                                                                                                                                                       0187
                                                                                                                                                                                                                              0189
                                                                                                                                                                                                                                                                           0193
                                                                                                                                                                                                                                                                                       0194
                                                                                                                                                                                                                                                                                                 0195
                                                                                                                                                                                                                                                                                                           0196
                                                                                                                                                                                                                                                                                                                                                          0200
                                                                                                                                                                                                                                                                                                                                                                   0201
0202
0203
                                                                                                                                                                                                                                                                                                                                                                                                               0205
                                                                                                                                                                                                                                                                                                                                                                                                                                      0207
0208
0209
                                                                                                                                                                                                                                                                                                                                                                                                                                                                        0210
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          0213
                                                                  0175
                                                                                                                                                                                                                   0188
                                                                                                                                                                                                                                                                0192
                                                                                                                                                                                                                                                                                                                                   0198
                                                                                                                                                                                                                                                                                                                                             0199
                                                                                                                                                                                                                                                                                                                                                                                                     0204
                                                                                                                                                                                                                                                                                                                                                                                                                            0206
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     0211
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                0212
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  0215
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             0216
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   0218
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               0219
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       0214
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        0217
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           0220
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      0221
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 0222
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            0223
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        0224
```

þ

```
OMEGX*AINRTA(J,1) + OMEGY*AINRTA(J,2)
OMEGZ*AINRTA(J,3)
                                                                                                                                                                  COMPUTE TOTAL MOMENT INCREMENT DUE TO ENGINES.
                                                                                                     *HENGIN(1,3)
*HENGIN(1,2)
*HENGIN(1,1)
*HENGIN(1,3)
*HENGIN(1,2)
*HENGIN(1,2)
                                                                                                                                                                               (1) + TORQUE(1)
(2) + TORQUE(2)
(3) + TORQUE(3)
                                               COMPUTE GYROSCOPIC EFFECTS.
                                                                                                      (1)=GYRO
                                                             (1) = 0.0

(2) = 0.0

(3) = 0.0
                                                                                                                    (2)=GYRO
                                                                                                                                (3)≈GYRO
HENGIN(I,J) =
                                                                                                                                                                               = GYRO
= GYRO
= GYRO
                                                                                        DO 6 I=1,4
                                 CONTINUE
                                                                                                                                                    CONTINUE
                     4 CONTINUE
                                                                                                                                                                                                          RETURN
                                                                                                      GYRO
                                                                                                                    GYRO
                                                                                                                                 GYRO
                                                             GYRO
GYRO
GYRO
                                                                                                                                                                                      DCM
                                        .....
                                                                                                                                                           .....
                                                                                                                                                      9
                                                                                                                                                                                                    U
                                                                                  υ
                                                                                               U
0229
0230
0231
0232
0234
0234
0235
0236
0237
0238
                                                                                        0242
0243
0244
0245
0246
                                                                                                                                              0250
0251
0253
0253
0254
0255
0255
0257
0258
                                                                                                                                 0248
                                                                                                                                        0249
```

REFERENCES

- Chen, Robert T.N.: Kinematic Properties of Rotary-Wing and Fixed-Wing Aircraft in Steady Coordinated High-g Turns. AIAA-81-1855, Aug. 1981.
- Chen, Robert T.N.; and Jeske, James A.: Kinematic Properties of the Helicopter in Coordinated Turns. NASA TP-1773, 1981.
- Clancy, L.J.: Aerodynamics. John Wiley & Sons, New York, 1975.
- Dieudonne, James E.: Description of a Computer Program and Numerical Techniques for Developing Linear Perturbation Models From Nonlinear Systems Simulations. NASA TM-78710, 1978.
- Dommasch, Daniel O.; Sherby, Sydney S.; and Connolly, Thomas F.: Airplane Aerodynamics, Fourth edition. Pitman, New York, 1967.
- Etkin, Bernard: Dynamics of Atmospheric Flight. John Wiley & Sons, New York, 1972.
- Gainer, Thomas G.; and Hoffman, Sherwood: Summary of Transformation Equations and Equations of Motion Used in Free-Flight and Wind-Tunnel Data Reduction and Analysis. NASA SP-3070, 1972.
- Gracey, William: Measurement of Aircraft Speed and Altitude. NASA RP-1046, 1980.
- Kalviste, Juri: Fixed Point Analysis Program. NOR 80-165, Northrop Corporation, Aircraft Division, Hawthorne, California, Nov. 1980.
- Kwakernaak, Huibert; and Sivan, Raphael: Linear Optimal Control Systems. Wiley-Interscience, New York, 1972.
- Perkins, Courtland D.; and Hage, Robert E.: Airplane Performance Stability and Control. John Wiley & Sons, New York, 1949.
- Thelander, J.A.: Aircraft Motion Analysis. FDL-TDR-64-70, Air Force Flight Dynamics Laboratory, Mar. 1965
- U.S. Standard Atmosphere, 1962. U.S. Government Printing Office, 1962.

1. Report No. NASA TP-2768	2. Government Acces	sion No.	3. Recipient's Catalog	No.	
			E. Dancet Dete		
4. Title and Subtitle User's Manual for LINEAR, a FO	RTRAN Program		5. Report Date December 1987		
to Derive Linear Aircraft Mode	-	}	6. Performing Organiz		
			o, renorming Organiz	auon code	
7. Author(s)			8. Performing Organiza	ation Report No.	
Eugene L. Duke, Brian P. Patte	rson, and Robert	F. Antoniewicz	н-1259	•	
		}	10. Work Unit No.		
9. Performing Organization Name and Address			RTOP 505-66-1	11	
NASA Ames Research Center		ļ-	44 0 0	N	
Dryden Flight Research Facility P.O. Box 273	У		11. Contract or Grant	NO.	
Edwards, CA 93523-5000		<u> </u>			
<u> </u>			13. Type of Report an		
12. Sponsoring Agency Name and Address		1	Technical Par	per	
National Aeronautics and Space Washington, DC 20546	Administration	Ī	14. Sponsoring Agency	Code	
nushing contract 20040		ŀ			
15. Supplementary Notes					
A listing of the program LINEA		the microfiche suppl	ement		
included with this report (3 s	heets total).				
16. Abstract	Av., 40	n			
		and the same of			
10					
ORIGINAL PAGE IS					
OF POOR QUALITY					
	₹	program that	~		
	d flexible tool fo e program LINEAR :				
	l using nonlinear		and a user-		
==	nlinear aerodynam	_			
	•	s of atrices for bo program has been des			
	-	inition of the state	-		
and observa	tion variables to	be used in a partic	ular model.		
		·			
17. Key Words (Suggested by Author(s))	18. Distribution Statement				
Aircraft model	Unclassified -	Unlimited			
Computer program Control law design					
Linearization					
			Subject category	y 66	
10 Consults Classif (afability and the	20. Security Classif. (c	of this page!	21. No. of Pages	22. Price*	
19. Security Classif. (of this report) Unclassified	Unclassifie	· =	108	A06	
				L	
*For sale by the National Technical Information Service, Springfield, Virginia 22161.					