



ICESat (GLAS) Science Processing Software Document Series

**The GLAS Science Algorithm Software (GSAS) User's Guide
Version 7**

Jeffrey E. Lee

National Aeronautics and
Space Administration

**Goddard Space Flight Center
Greenbelt, Maryland 20771**

NASA STI Program ... in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA scientific and technical information (STI) program plays a key part in helping NASA maintain this important role.

The NASA STI program operates under the auspices of the Agency Chief Information Officer. It collects, organizes, provides for archiving, and disseminates NASA's STI. The NASA STI program provides access to the NASA Aeronautics and Space Database and its public interface, the NASA Technical Report Server, thus providing one of the largest collections of aeronautical and space science STI in the world. Results are published in both non-NASA channels and by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA Programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.
- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or co-sponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services also include organizing and publishing research results, distributing specialized research announcements and feeds, providing help desk and personal search support, and enabling data exchange services. For more information about the NASA STI program, see the following:

- Access the NASA STI program home page at <http://www.sti.nasa.gov>
 - E-mail your question via the Internet to help@sti.nasa.gov
 - Fax your question to the NASA STI Help Desk at 443-757-5803
 - Phone the NASA STI Help Desk at 443-757-5802
 - Write to:
NASA STI Help Desk
NASA Center for AeroSpace Information
7115 Standard Drive
Hanover, MD 21076-1320
-



ICESat (GLAS) Science Processing Software Document Series

**The GLAS Science Algorithm Software (GSAS) User's Guide
Version 7**

Jeffrey E. Lee
Stinger Ghaffarian Technologies, Inc., Wallops Island, VA

National Aeronautics and
Space Administration

Goddard Space Flight Center
Greenbelt, Maryland 20771

Notice for Copyrighted Information

This manuscript has been authored by employees of *Stinger Ghaffarian Technologies* with the National Aeronautics and Space Administration. The United States Government has a non-exclusive, irrevocable, worldwide license to prepare derivative works, publish, or reproduce this manuscript, and allow others to do so, for United States Government purposes. Any publisher accepting this manuscript for publication acknowledges that the United States Government retains such a license in any published form of this manuscript. All other rights are retained by the copyright owner.

Trade names and trademarks are used in this report for identification only. Their usage does not constitute an official endorsement, either expressed or implied, by the National Aeronautics and Space Administration.

Level of Review: This material has been technically reviewed by technical management

Available from:
NASA Center for AeroSpace Information
7115 Standard Drive
Hanover, MD 21076-1320

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161 Price Code: A17

Foreword

The GEOSCIENCE LASER ALTIMETER SYSTEM (GLAS) is the primary instrument for the ICESat (Ice, Cloud and Land Elevation Satellite) laser altimetry mission. ICESat was the benchmark Earth Observing System (EOS) mission for measuring ice sheet mass balance, cloud and aerosol heights, as well as land topography and vegetation characteristics. From 2003 to 2009, the ICESat mission provided multi-year elevation data needed to determine ice sheet mass balance as well as cloud property information, especially for stratospheric clouds common over polar areas. It also provided topography and vegetation data around the globe, in addition to the polar-specific coverage over the Greenland and Antarctic ice sheets.

This is the final version of the GLAS Science Algorithm Software User's Guide (GSAS-UG) document. This document is developed under the structure of the NASA STD-2100-91, a NASA standard defining a four-volume set of documents to cover an entire software life cycle. Under this standard a section of any volume may, if necessary, be rolled out to its own separate document. This document is a roll-out of the user guide within the Product Specification Volume.

This document was prepared by the Cryospheric Sciences Branch at NASA GSFC/WFF, Wallops Island, VA, in support of B. E. Schutz, GLAS Science Team Leader for the GLAS Investigation. This work was performed under the direction of David W. Hancock, III, who may be contacted at (757) 824-1238, David.W.Hancock@nasa.gov (e-mail), or (757) 824-1036 (FAX).

This document was created through the efforts of the GLAS Science Algorithm Software (GSAS) Development Team. Current team members include:

SGT, Inc./Kristine Barbieri

SGT, Inc./Suneel Bhardwaj

SGT, Inc./John DiMarzio

Sigma/David W. Hancock, III

SGT, Inc./Peggy Jester

SGT, Inc./Jeffrey Lee

SGT, Inc./Lisa Lee

SSAI/Steve Palm

SGT, Inc./Carol Purdy

SGT, Inc./LeeAnne Roberts

SGT, Inc./Jack Saba

Table of Contents

Foreword	v
Table of Contents	vii
List of Figures	xvii
List of Tables	xix
Section 1 Introduction	
1.1 Identification of Document	1-1
1.2 Scope of Document	1-1
1.3 Purpose and Objectives of Document	1-2
1.4 Document Organization	1-2
1.5 Document Change History	1-2
Section 2 Related Documentation	
2.1 Parent Documents	2-1
2.2 Applicable Documents	2-1
2.3 Information Documents	2-1
Section 3 Overview	
3.1 Purpose	3-1
3.2 Environment	3-1
3.3 Functions	3-1
3.4 Time Specification	3-3
3.5 Restrictions and Limitations	3-3
Section 4 Installation and Initialization	
4.1 Unpack the Tarfile	4-1
4.2 Compilation	4-2
4.2.1 Debugging	4-2
4.2.2 Optimization	4-2
4.3 Verification	4-3
Section 5 Common Functionality	
5.1 Control Files	5-1
5.1.1 Use	5-1
5.1.2 Format	5-1
5.1.3 Content	5-1
5.1.4 PASSID Specification	5-2
5.1.5 Input/Output File Specification	5-3
5.1.6 Example Control File	5-5
5.2 Processing Controls	5-5
5.2.1 Input Data Time Selection	5-6
5.2.2 Output Data Time Selection	5-6
5.2.3 Execution Scenarios	5-6

5.3	ANC07 Constants Files	5-6
5.3.1	Use	5-7
5.3.2	Format	5-7
5.3.3	ANC07 Output Options	5-8
5.3.4	Global Constants File Content	5-8
5.4	Invalid Values and Error/Status Reporting	5-10
5.4.1	Invalid Values	5-10
5.4.2	Error and Status Codes	5-10
5.4.3	Result Codes	5-14
5.5	ANC06 Metadata/Log File	5-14
5.5.1	ANC06 Overview	5-14
5.5.2	Format	5-14
5.5.3	Use	5-14
5.5.4	ANC06 Example and Description	5-15
Section 6	GLAS_L0proc	
6.1	Function	6-1
6.2	Input Files	6-1
6.2.1	GLA00 APID Files	6-1
6.2.2	ANC33 Counter to UTC Conversion File	6-3
6.2.3	ANC47 Construction Record	6-4
6.2.4	Control File	6-4
6.3	Output Files	6-5
6.3.1	ANC29 Index File	6-5
6.3.2	ANC32 GPS File	6-5
6.4	Processing and Reprocessing Scenarios	6-6
6.5	Startup and Termination	6-6
6.5.1	Setup a Runtime Directory	6-6
6.5.2	Create a Control File	6-7
6.5.3	Run the PGE	6-7
6.5.4	Run-Time Statistics	6-7
6.5.5	Termination	6-7
6.6	Error and Warning Messages	6-7
6.7	Recovery Steps	6-7
6.8	Sample GLAS_L0proc Control File	6-8
Section 7	GLAS_L1A	
7.1	Function	7-1
7.2	Input Files	7-1
7.2.1	Control File	7-2
7.3	Output Files	7-3
7.4	Execution Scenarios	7-4
7.4.1	Standard Processing	7-5
7.5	Startup and Termination	7-5
7.5.1	Setup a Runtime Directory	7-5
7.5.2	Create a Control File	7-5

7.5.3	Run the PGE	7-6
7.5.4	Run-Time Statistics.	7-6
7.5.5	Termination.	7-6
7.6	Error and Warning Messages	7-6
7.7	Recovery Steps	7-6
7.8	Sample GLAS_L1A Control File	7-6
Section 8	GLAS_Alt	
8.1	Function	8-1
8.2	Input Files	8-1
8.2.1	Control File	8-4
8.3	Output Files.	8-6
8.4	Processing and Reprocessing Scenarios	8-7
8.4.1	Full Processing	8-8
8.4.2	Partial Processing: Waveform Only	8-8
8.4.3	Partial Processing/Re-Processing: Elevation Only	8-8
8.4.4	Predict Orbit Processing: Waveform Only	8-8
8.4.5	Predict Orbit Processing: Elevation Only	8-9
8.4.6	Re-Processing: Elevation Region-Specific Only	8-10
8.5	Startup and Termination	8-10
8.5.1	Setup a Runtime Directory	8-10
8.5.2	Create a Control File.	8-11
8.5.3	Run the PGE	8-11
8.5.4	Run-Time Statistics.	8-11
8.5.5	Termination.	8-11
8.6	Error and Warning Messages	8-11
8.7	Recovery Steps	8-11
8.8	Sample GLAS_Alt Waveform Control File	8-12
8.9	Sample GLAS_Alt Elevation Control File	8-13
Section 9	GLAS_Atm	
9.1	Function	9-1
9.2	Input Files	9-1
9.2.1	Control File	9-1
9.3	Output Files.	9-4
9.4	Processing and Reprocessing Scenarios	9-5
9.4.1	Standard Processing	9-6
9.4.2	Predict Orbit Processing	9-6
9.4.3	Partial Processing: Backscatter.	9-7
9.4.4	Partial Processing/Re-Processing: Cloud-to-End	9-7
9.5	Startup and Termination	9-7
9.5.1	Setup a Runtime Directory	9-7
9.5.2	Create a Control File.	9-8
9.5.3	Run the PGE	9-8
9.5.4	Run-Time Statistics.	9-8
9.5.5	Termination.	9-8

9.6	Error and Warning Messages	9-8
9.7	Recovery Steps	9-8
9.8	Sample GLAS_Atm Control File	9-9
Section 10	GLAS_Reader	
10.1	Function	10-1
10.2	Input Files	10-1
10.2.1	Control File	10-2
10.3	Output Files	10-3
10.4	Startup and Termination	10-3
10.4.1	Setup a Runtime Directory	10-3
10.4.2	Create a Control File	10-4
10.4.3	Run the PGE	10-4
10.4.4	Run-Time Statistics	10-4
10.4.5	Termination	10-4
10.5	Error and Warning Messages	10-4
10.6	Recovery Steps	10-4
10.7	Sample GLAS_Reader Control File	10-5
Section 11	met_util	
11.1	Function	11-1
11.2	Input Files	11-1
11.2.1	Control File	11-1
11.3	Output Files	11-2
11.4	Startup and Termination	11-2
11.4.1	Setup a Runtime Directory	11-2
11.4.2	Create a Control File	11-3
11.4.3	Run the PGE	11-3
11.4.4	Run-Time Statistics	11-3
11.4.5	Termination	11-3
11.5	Error and Warning Messages	11-3
11.6	Recovery Steps	11-4
11.7	Sample met_util Control File	11-4
Section 12	reorbit_util	
12.1	Function	12-1
12.2	Input Files	12-1
12.2.1	Control File	12-2
12.3	Output Files	12-2
12.4	Startup and Termination	12-3
12.4.1	Setup a Runtime Directory	12-3
12.4.2	Create a Control File	12-3
12.4.3	Run the PGE	12-4
12.4.4	Run-Time Statistics	12-4
12.4.5	Termination	12-4

12.5	Error and Warning Messages	12-4
12.6	Recovery Steps	12-5
12.7	Sample reorbit_util Control File	12-5
Section 13 createGranule_util		
13.1	Function	13-1
13.2	Input Files	13-1
13.2.1	Control File	13-2
13.3	Output Files	13-3
13.4	Startup and Termination	13-4
13.4.1	Setup a Runtime Directory	13-4
13.4.2	Create a Control File	13-4
13.4.3	Run the PGE	13-4
13.4.4	Run-Time Statistics	13-4
13.4.5	Termination	13-4
13.5	Error and Warning Messages	13-5
13.6	Recovery Steps	13-5
13.7	Sample createGran_util Control File (REFORB)	13-6
13.8	Sample createGran_util Control File (PREDORB)	13-6
Section 14 atm_anc		
14.1	Function	14-1
14.2	Input Files	14-2
14.2.1	Control File	14-2
14.3	Output Files	14-2
14.3.1	ANC36	14-2
14.3.2	ANC44	14-4
14.4	Startup and Termination	14-4
14.4.1	Setup a Runtime Directory	14-4
14.4.2	Create a Control File	14-5
14.4.3	Run the PGE	14-5
14.4.4	Run-Time Statistics	14-5
14.4.5	Termination	14-5
14.5	Error and Warning Messages	14-5
14.6	Recovery Steps	14-6
14.7	Sample atm_anc Control File	14-7
Section 15 GLAS_Meta		
15.1	Function	15-1
15.2	Input Files	15-1
15.2.1	ANC45 Product Metadata Input Files	15-2
15.2.2	ANC46 Ancillary Metadata Input Files	15-2
15.2.3	Control File	15-2
15.3	Output Files	15-3
15.3.1	GLA Metadata Files	15-3

15.4	Processing and Reprocessing Scenarios	15-4
15.5	Startup and Termination	15-4
15.5.1	Setup a Runtime Directory	15-4
15.5.2	Create a Control File	15-4
15.5.3	Run the PGE	15-4
15.5.4	Run-Time Statistics.	15-4
15.5.5	Termination.	15-4
15.6	Error and Warning Messages	15-5
15.7	Recovery Steps	15-5
15.8	Sample GLAS_Meta Control File	15-5

Section 16 GLAS_GPS

16.1	Function	16-1
16.2	Input Files	16-1
16.2.1	Control File	16-1
16.3	Output Files.	16-1
16.3.1	ANC39 RINEX Output Files	16-2
16.4	Processing and Reprocessing Scenarios	16-2
16.5	Startup and Termination	16-2
16.5.1	Setup a Runtime Directory	16-2
16.5.2	Create a Control File	16-2
16.5.3	Run the PGE	16-3
16.5.4	Run-Time Statistics.	16-3
16.5.5	Termination.	16-3
16.6	Error and Warning Messages	16-3
16.7	Recovery Steps	16-3
16.8	Sample GLAS_GPS Control File	16-3

Section 17 GLAS_APID

17.1	Function	17-1
17.2	Input Files	17-1
17.2.1	Control File	17-1
17.3	Output Files.	17-2
17.3.1	APID19 Text Output Files	17-3
17.4	Processing and Reprocessing Scenarios	17-3
17.5	Startup and Termination	17-3
17.5.1	Setup a Runtime Directory	17-3
17.5.2	Create a Control File	17-3
17.5.3	Run the PGE	17-3
17.5.4	Run-Time Statistics.	17-3
17.5.5	Termination.	17-4

17.6	Error and Warning Messages	17-4
17.7	Recovery Steps	17-4
17.8	Sample GLAS_APID Control File	17-4

Section 18 GLAS_Tick

18.1	Function	18-1
18.2	Input Files	18-1
18.2.1	Control File	18-1
18.3	Output Files	18-2
18.3.1	anc50_0000.txt File	18-2
18.3.2	anc50_0001.txt Files	18-2
18.4	Processing and Reprocessing Scenarios	18-3
18.5	Startup and Termination	18-3
18.5.1	Setup a Runtime Directory	18-3
18.5.2	Create a Control File	18-3
18.5.3	Run the PGE	18-4
18.5.4	Run-Time Statistics	18-4
18.5.5	Termination	18-4
18.6	Error and Warning Messages	18-4
18.7	Recovery Steps	18-4
18.8	Sample GLAS_Tick Control File	18-4

Section 19 QABrowse

19.1	Introduction	19-1
19.2	Overview of Purpose and Functions	19-1
19.3	Startup and Termination	19-1
19.4	Functions and Their Operation	19-2
19.5	Input Arguments	19-2
19.5.1	Control File	19-2
19.6	Input Files	19-2
19.6.1	Control File	19-2
19.6.2	QAP File	19-6
19.6.3	ANC File	19-6
19.7	Output	19-6
19.7.1	GLA01	19-6
19.7.2	GLA02	19-6
19.7.3	GLA03	19-7
19.7.4	GLA04	19-7
19.7.5	GLA05	19-7
19.7.6	GLA06	19-7
19.7.7	GLA07	19-8
19.7.8	GLA08	19-8
19.7.9	GLA09	19-8
19.7.10	GLA10	19-8
19.7.11	GLA011	19-8
19.7.12	GLA12	19-8

19.7.13	GLA13	19-8
19.7.14	GLA14	19-9
19.7.15	GLA015	19-9
19.8	Error and Warning Messages	19-9
19.9	Recovery Steps	19-9
Section 20	QAPG	
20.1	Introduction	20-1
20.2	Overview of Purpose and Functions	20-1
20.3	Startup and Termination	20-1
20.4	Functions and Their Operation	20-1
20.5	Input Arguments	20-1
20.5.1	Control File	20-1
20.6	Input Files	20-1
20.6.1	Control File	20-1
20.6.2	Product File(s)	20-2
20.6.3	ANC Files	20-2
20.7	Output	20-2
20.8	Error and Warning Messages	20-2
20.9	Recovery Steps	20-2
Section 21	QAPCompare	
21.1	Introduction	21-1
21.2	Overview of Purpose and Functions	21-1
21.3	Startup and Termination	21-1
21.4	Functions and Their Operation	21-2
21.5	Input Arguments	21-2
21.5.1	Control File	21-2
21.6	Input Files	21-3
21.6.1	Control File	21-3
21.7	Output	21-6
21.7.1	VAV file	21-6
21.7.2	QAPFlags file	21-6
21.8	Understanding the Output	21-6
21.8.1	QAPFlags File	21-6
21.8.2	VAV file	21-8
21.8.3	VAV file section 1	21-8
21.8.4	VAV file Section 2	21-8
21.8.5	VAV file Section 3	21-8
21.8.6	VAV file Section 4	21-9
21.9	Error and Warning Messages	21-12
21.10	Recovery Steps	21-12
Section 22	Creating a Global DEM and Replacing Greenland	

and Antarctica DEM with New Grids

22.1	Global DEM	22-1
------	------------------	------

Section 23 prod_util

23.1	Function	23-1
23.2	scantime	23-1
23.3	product_test.	23-2
23.4	gsas_prod_readers.	23-2
23.5	strip1984	23-2
23.6	stripper	23-3
23.7	proc_wf	23-3

Section 24 create_regionsMASK_util

24.1	Introduction.	24-1
24.2	Related Documentation.	24-1
24.3	Overview of Purpose and Functions.	24-1
24.4	Installation and Initialization	24-1
24.5	Startup and Termination	24-1
24.6	Functions and Their Operation	24-2
24.7	Input Arguments	24-2
24.7.1	Control File	24-2
24.8	Input Files	24-3
24.9	Output Files.	24-3
24.10	Understanding the Output.	24-3
24.11	Error and Warning Messages	24-4
24.12	Recovery Steps	24-4
24.13	Abbreviations and Acronyms	24-4
24.14	Glossary	24-4
24.15	Notes	24-4
24.16	Appendices	24-4

1

Appendix A GLAS File Summary

A.1	GLAS Production File Naming Convention.	A-1
A.2	EDOS L0 File Naming Convention	A-3
A.3	GLAS File Types	A-3
A.4	GLAS File Associations	A-7

1

Appendix B ANC07 Format, Files and Contents

B.1	ANC07 Format	B-1
B.2	ANC07 Files	B-2
B.3	ANC07 Contents	B-2
B.3.1	Global Constants.	B-2
B.3.2	L1A Constants	B-8
B.3.3	Waveform Constants.	B-25

B.3.4	Atmosphere Constants	B-33
B.3.5	Elevation Constants	B-42

1

Appendix C GSAS ANC06 File Content

C.1	ANC06 Overview	C-1
C.2	ANC06 Example and Description	C-1

1

Appendix D GSAS Error and Status Codes

D.1	General Errors	D-1
D.1.1	L1A Errors	D-6
D.2	Waveform Errors	D-9
D.3	Atmosphere Errors	D-10
D.4	Elevation Errors	D-13
D.5	HP Runtime Error Codes	D-16

Abbreviations & Acronyms	AB-1
--------------------------------	------

Glossary	GL-1
----------------	------

List of Figures

Figure 1-1	I-SIPS Software Top-Level Decomposition	1-1
Figure 5-1	Error Ancillary File Format	5-11

List of Tables

Table 1-1	Document Change History.....	1-2
Table 3-1	GSAS PGEs.....	3-2
Table 4-1	GSAS Directory Structure.....	4-1
Table 5-1	Required Single-Instance Keywords.....	5-2
Table 5-2	Optional Multiple-Instance Keywords.....	5-2
Table 5-3	PASSID Control Line Elements.....	5-3
Table 5-4	passid Field Description.....	5-3
Table 5-5	File Segment and Version Fields.....	5-4
Table 5-6	ANC07 Files.....	5-7
Table 5-7	WRITE_CONST Control Values.....	5-8
Table 5-8	Invalid Values.....	5-10
Table 5-9	Error String Format.....	5-11
Table 5-10	Error Sections.....	5-11
Table 5-11	Error Severity Codes.....	5-12
Table 5-12	Result Codes.....	5-14
Table 6-1	GLAS_L0proc Inputs.....	6-1
Table 6-2	APIDs Processed by GLAS_L0proc.....	6-2
Table 6-3	ANC33 Field Descriptions.....	6-3
Table 6-4	GLAS_L0proc Outputs.....	6-5
Table 6-5	ANC29 File Content.....	6-5
Table 6-6	ANC32 File Content.....	6-6
Table 7-1	GLAS_L1A Inputs.....	7-1
Table 7-2	GLAS_L1A Control Flags.....	7-2
Table 7-3	GLAS_L1A Outputs.....	7-3
Table 7-4	GLAS_L1A Execution Flags and Requisite Output Products.....	7-4
Table 7-5	GLAS_L1A Input APIDs.....	7-5
Table 8-1	GLAS_Alt Inputs.....	8-2
Table 8-2	GLAS_Alt Control Flags.....	8-4
Table 8-3	GLAS_Alt Outputs.....	8-6
Table 8-4	GLAS_Alt Execution Flags and Output Products.....	8-7

Table 8-5	GLAS_Alt Predict Waveform Inputs	8-8
Table 8-6	GLAS_Alt Predict Elevation Inputs	8-9
Table 9-1	GLAS_Atm Inputs	9-2
Table 9-2	GLAS_Atm Control Flags	9-3
Table 9-3	GLAS_Atm Outputs	9-4
Table 9-4	GLAS_Atm Execution Flags and Output Products	9-5
Table 9-5	GLAS_Atm Predict Inputs	9-6
Table 10-1	GLAS_Reader Inputs	10-1
Table 10-2	GLAS_Reader Control Flags	10-3
Table 11-1	met_util Inputs	11-1
Table 11-2	met_util Outputs	11-2
Table 11-3	Error Resolution	11-4
Table 12-1	reorbit_util Inputs	12-1
Table 12-2	reorbit_util Keywords	12-2
Table 12-3	reorbit_util Outputs	12-3
Table 12-4	Error Resolution	12-5
Table 13-1	Segment Description	13-1
Table 13-2	createGran_util Inputs	13-2
Table 13-3	createGran_util Keywords	13-2
Table 13-4	Error Resolution	13-5
Table 14-1	atm_anc Inputs	14-2
Table 14-2	atm_anc Outputs	14-3
Table 14-3	Error Resolution	14-6
Table 15-1	GLAS_Meta Inputs	15-1
Table 15-2	GLAS_Meta Outputs	15-3
Table 16-1	GLAS_GPS Inputs	16-1
Table 16-2	GLAS_GPS Outputs	16-2
Table 17-1	GLAS_APIID Inputs	17-1
Table 17-2	GLAS_APIID Control Flag	17-2
Table 17-3	GLAS_APIID Outputs	17-2
Table 18-1	GLAS_Tick Inputs	18-1
Table 18-2	GLAS_Tick Outputs	18-2

Table 19-1	Description of Control File Contents.....	19-3
Table 19-2	Sample Control File.....	19-6
Table 20-1	Description of Control File Contents.....	20-3
Table 20-2	Sample Control File.....	20-4
Table 21-1	KEY=Value Entries for QAPCompare	21-3
Table 21-2	Sample QAPFLAGS Files.....	21-6
Table 21-3	Sample VAV File	21-10
Table 23-1	scantime Inputs	23-1
Table 23-2	scantime Outputs	23-1
Table 23-3	glaxx_writer outputs	23-2
Table 23-4	glaxx_reader outputs	23-2
Table A-1	GLAS File Naming Keys.....	A-2
Table A-2	EDOS L0 File Naming Keys.....	A-3
Table A-3	GLAS File Types.....	A-4
Table A-4	GSAS File Associations.....	A-7
Table B-1	ANC07 Granule Names and Contents.....	B-2

Section 1 Introduction

1.1 Identification of Document

This document is identified as the GLAS Science Algorithm Software (GSAS) User's Guide. This is the final release of this document.

1.2 Scope of Document

The I-SIPS Data Processing System, shown in Figure 1-1, provides data processing and mission support for the Geoscience Laser Altimeter System (GLAS). I-SIPS is composed of two major software components - the GLAS Science Algorithm Software (GSAS) and the Scheduling and Data Management System (SDMS). GSAS processes raw satellite data and creates EOS Level 1A/B and 2 data products. SDMS provides for scheduling of processing and the ingest, staging, archiving and cataloging of associated data files. This document is the User's Guide for the GSAS component.

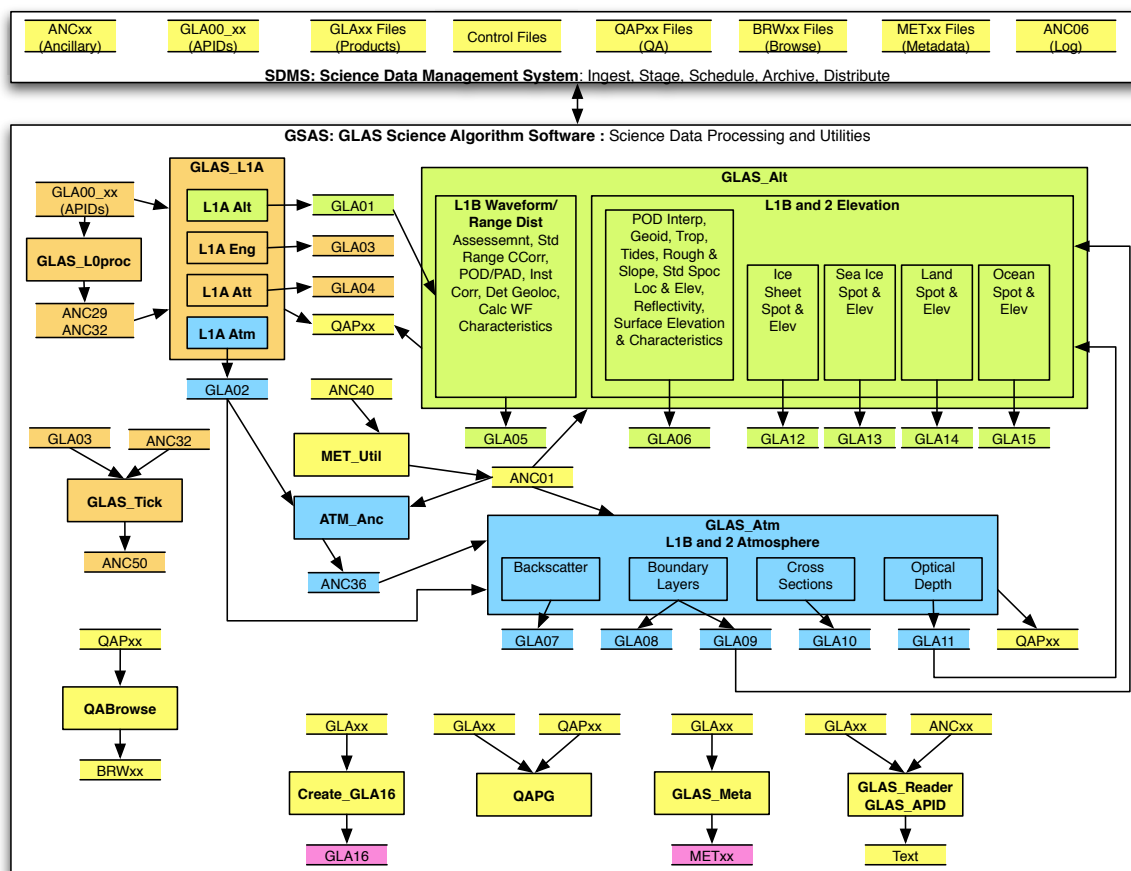


Figure 1-1 I-SIPS Software Top-Level Decomposition

1.3 Purpose and Objectives of Document

The purpose of this document is to provide the GSAS end users with instructions explaining how to operate the software effectively.

1.4 Document Organization

This document's outline is assembled in a form similar to those presented in the NASA Software Engineering Program [Information Document 2.3a].

1.5 Document Change History

Table 1-1 Document Change History

Document Name: GLAS Science Algorithm Software Users' Guide		
Version Number	Date	Nature of Change
Version 0	August 1999	Original Version.
Version 1	November 2000	Revised for V1 software.
Version 2	November 2001	Revised for V2 software.
Version 2.2	July 2002	Revised for V2.1 and 2.2 software.
Version 4.0	October 2002	Revised for V3.0 software.
Version 5.0	August 2004	Revised for V4.0 software.
Version 6.0	March 2006	Revised for V5.0 software.
Version 7.0	August 2012	Revised for V6.0.1 software Final edition.

Related Documentation

2.1 Parent Documents

Parent documents are those external, higher-level documents that contribute information to the scope and content of this document. The following GLAS documents are parent to this document.

- a) *GLAS Science Software Management Plan (GLAS SSMP)*, August 1998, NASA/GSFC Wallops Flight Facility, NASA/TM-1999-208641/Version 3/Volume 1.
- b) *Data Production Software and Science Computing Facility (SCF) Standards and Guidelines*, 423-16-01, January 14, 1994, Goddard Space Flight Center.

2.2 Applicable Documents

Applicable documents include reference documents that are not parent documents. This category includes reference documents that have direct applicability to, or contain policies binding upon, or information directing or dictating the content of this document. The following GLAS, EOS Project, NASA, or other Agency documents are cited as applicable to this document.

- a) *NASA Software Documentation Standard Software Engineering Program*, NASA-STD-2100-91, July 29, 1991, NASA.
- b) *GLAS Science Algorithm Software (GSAS) Detailed Design Document (GSAS DD)*, Version 6.0, August 2012, NASA Goddard Space Flight Center.
- c) *GLAS Science Algorithm Software (GSAS) Version Description Document (GSAS VDD)*, Version 6.0, February 2012, NASA Goddard Space Flight Center.

2.3 Information Documents

The following documents are provided as sources of information that provide background or supplemental information that may clarify or amplify material presented in this document.

- a) *The Algorithm Theoretical Basis Document for Level 1A Processing*, NASA/TM-2012-208641 / Volume 5, June 2012, NASA Goddard Space Flight Center, et al.
- b) *The Algorithm Theoretical Basis Document for the GLAS Atmospheric Data Products*, NASA/TM-2012-208641 / Volume 6, July 2012, NASA Goddard Space Flight Center, et al.
- c) *The Algorithm Theoretical Basis Document for the Derivation of Range and Range Distributions from Laser Pulse Waveform Analysis for Surface Elevations, Roughness, Slope, and Vegetation Heights*, NASA/TM-2012-208641/Volume 7, August 2012, NASA Goddard Space Flight Center, et al.

- d) *The Algorithm Theoretical Basis Document for the Atmospheric Delay Correction to GLAS Laser Altimeter Ranges*, NASA/TM-2012-208641/Volume 8, NASA Goddard Space Flight Center, et al.
- e) *The Algorithm Theoretical Basis Document for Tidal Corrections*, NASA/TM-2012-208641/Volume 9, Scripps Institution for Oceanography, et al.
- f) *The Algorithm Theoretical Basis Document for Precision Orbit Determination*, 2012, University of Texas Center for Space Research, et al.
- g) *The Algorithm Theoretical Basis Document for Precision Attitude Determination*, 2012, University of Texas Center for Space Research, et al.
- h) *The Algorithm Theoretical Basis Document for Laser Footprint Location (Geolocation) and Surface Profiles*, 2012, University of Texas Center for Space Research, et al.
- i) *GLAS Standard Data Products Specification - Level 1*, NASA/TM-2013-208641/Volume 13, NASA Goddard Space Flight Center, et al.
- j) *GLAS Standard Data Products Specification - Level 2*, NASA/TM-2013-208641/Volume 14, NASA Goddard Space Flight Center, et al.
- k) *GLAS Standard Data Products Specification - Data Dictionary*, NASA/TM-2013-208641/Volume 15, NASA Goddard Space Flight Center, et al.
- l) *GLAS Science Algorithm Software (GSAS) Detailed Design*, NASA/TM-2013-208641/Volume 16, NASA Goddard Space Flight Center, et al.

Section 3

Overview

3.1 Purpose

GSAS generates the GLAS Standard Data Products and associated metadata describing the products and their quality. The software uses GLAS telemetry and ancillary data to produce the products using algorithms defined by the GLAS Instrument and Science Teams.

GSAS is delivered as a set of libraries and PGEs (Product Generation Executables). A PGE is an executable program which performs a specific function. The ‘core’ PGEs perform specific portions of the GLAS data processing and generate deliverable GLAS Data Products (Products). The core PGEs are accompanied by a set of utility PGEs which perform such functions as creating ancillary data files, performing quality assurance and generating browse products.

Throughout this document, files are referenced as one of two types: GLA or ANC. GLA files are fixed-length, integer-binary format product files containing Level 0-2 GLAS science data. Level 3 science data is provided with the planned HDF-EOS formatted GLA16 (never produced/distributed). GLA files are both input and output to GSAS. ANC files are multi-format ancillary files which are required for processing. A list of the GLA and ANC files is supplied in Appendix A. The GLAS Standard Data Product files (GLA) are detailed in the *GLAS Science Data Management Plan*, the *GLAS Standard Data Products Specification - Level 1* and the *GLAS Standard Data Products Specification - Level 2*.

3.2 Environment

GSAS was originally developed in a HP/UX environment, but was ported to and now delivered on Linux. This document assumes that the reader is familiar Linux conventions. The software is currently developed, tested and supported on Ubuntu 10.04.4 LTS with g95 0.92 and IDL 8.0.

3.3 Functions

The functionality of the PGEs is grouped into four major categories: L1A processing, Altimetry processing, Atmosphere processing, and utility functions.

L1A processing uses Level-0 data and L1A science algorithms to create Level-1A products (GLA01-04).

Altimetry processing uses L1A data and waveform/elevation science algorithms to create Level-1B waveform (GLA05) and Level-1B/2 elevation (GLA06, GLA11-15) products.

Atmosphere processing uses L1A data and atmosphere science algorithms to create Level 1-B and 2 (GLA07-11) atmosphere products.

The utilities perform functions which are ancillary to the main data processing process. This includes such tasks as data reformatting, ancillary file creation, browse product creation, and data validation.

In order to perform these functions, PGEs are designed to reflect a natural division in GLAS data processing. Table 3-1 lists the name, category, and function of each of these executables.

Table 3-1 GSAS PGEs

PGE	Category	Functionality
GLAS_L0proc	Utility	Creates an ancillary file from Level-0 APIDs which contains timing and data alignment information.
GLAS_L1A	L1A	Reads the GLAS_L0proc ancillary file and associated APID files to create Level-1A GLAS data.
GLAS_Alt	Altimetry	Reads altimetry-related Level-1A data files and ancillary files to create Level-1B and 2 GLAS altimetry files.
GLAS_Atm	Atmosphere	Reads atmosphere-related Level-1A data files and ancillary files to create Level1b and 2 GLAS atmosphere files.
GLAS_Reader	Utility	Non-Production. Reads specified GSAS ancillary and/or product files and creates a text-based, human-readable representation of the data.
GLAS_Meta	Utility	Reads specified product files and creates EOS-compliant metadata inventory files.
GLAS_GPS	Utility	Non-Production. Uses the externally-supplied RINEX software to process GPS data. (this utility was developed before UTexas assumed the GPS processing role.)
GLAS_APID	Utility	Non-Production. Reads APID files and creates column-based text output suitable for importing into spreadsheets.
GLAS_Tick	Utility	Reads GLA03 and ANC32 files to create ANC50 files containing engineering statistics and GPS update event data
atm_anc	Utility	Reads atmosphere Level-1 products and creates atmosphere calibration files.
met_util	Utility	Reads and subsets standard Meteorological files, creating GSAS ancillary MET files.
reforbit_util	Utility	Reads Reference Orbit files to create ascending equatorial crossings.
createGran_util	Utility	Reads Predicted Orbit files, creating all ascending equatorial crossings, and +/- 50 degree latitude crossings.
create_regionsMA SK_util	Utility	Creates fine and coarse surface type grid files from the masks files.
QAbrowse	IDL Utility	Creates graphical browse products from product QA files.
qapg	Utility	Creates comparative QAP files for GLA product files.
NOSE_util	Utility	Creates a output file containing NOSE off-nadir track and segment coordinates for ESDIS and track and segment numbers for GLAS product headers and metadata.

Table 3-1 GSAS PGEs (Continued)

PGE	Category	Functionality
prod_util	Utility	Non-Production. A collection of utilities which provide such functions as writing sample product files for testing purposes (product_test), subsetting GLA00 APIDs (stripper), providing ESDIS-deliverable sample product readers (gsas_prod_readers), read and write the decompressed waveform in volts (process_wf), and stripping extraneous information from spacecraft-test 1984 APID data (strip1984).
QACompare	Utility	Generates product-specific QA parameters to allow data quality assessment, and QA flags for inclusion in the meta-data.

The GSAS design allows a significant amount of commonality among the executables. This is beneficial from both a software maintenance and ease-of-use point of view. Common functionalities include:

- Use of a control file for dynamic processing information.
- Ability to perform partial processing.
- Ability to perform selective processing based on input and output time specification.
- Use of change-controlled ancillary files which contain changeable Science Team-supplied parameters.
- Input data time synchronization
- Creation of metadata which contains a full processing history.
- Use of a standardized error/message reporting facility with user-defined options available.

3.4 Time Specification

All GSAS times are specified in J2000 UTC, with an epoch of January 1, 2000 12:00:00. In some cases, GPS times are used internally, but are converted to J2000 UTC before presentation to the user in order to preserve consistency. All user-interaction with GSAS requires time specifications in J2000 UTC.

3.5 Restrictions and Limitations

GSAS has the following limitations:

- GSAS is supported on Ubuntu 10.04.4 with g95 0.92 and IDL 8.0.

Refer to the latest version of the GSAS Version Description document for additional information.

Section 4

Installation and Initialization

This section will detail installation instructions for GSAS. This version of GSAS has only been tested under Ubuntu 10.04.4. (However, it should compile on our previous development platform (HP/UX 11.0/F90 2.5.10). These instructions are for a local source-only installation of GSAS. For the latest compilation and installation notes, refer to the GSAS Version Description document which describes installing the full DAP along with requisite data files and test cases.

Note: Throughout this document, the text refers to directory names preceded by a “\$” and typed in all capital letters. This means that the directory path is local to the specific installation and not hard-coded within the GSAS. (This document uses standard UNIX ‘sh’ variable conventions to indicate such.) Other pathnames are specified relative to the local directories and only the relative relationship is important.

4.1 Unpack the Tarfile

Create a production directory for GSAS. This directory is designated \$GLAS_HOME.

```
mkdir $GLAS_HOME
```

Copy the delivered tar file into GLAS_HOME and untar it. We will refer to the tar file as ‘gsas.tar’, but the actual delivery file may be named differently. Designate \$DIST_DIR as the source of the gsas.tar tarfile.

```
cd $GLAS_HOME
cp $DIST_DIR/gsas.tar.
tar xf gsas.tar
```

The untar process will create the directory structure described in Table 4-1.

Table 4-1 GSAS Directory Structure

Directory	Description
\$GLAS_HOME/bin	GSAS executables. Executables should always be linked from this directory.
\$GLAS_HOME/lib	GSAS shared libraries. (The user should always set the SHLIB_PATH environmental variable to this directory or link the libraries from this directory into the working directory.)
\$GLAS_HOME/cc_util	Contains makefile utilities.
\$GLAS_HOME/idl	Contains IDL code.
\$GLAS_HOME/docs	Contains PDF versions of released documents.
\$GLAS_HOME/data	Contains sample control and ancillary files.

Table 4-1 GSAS Directory Structure (Continued)

Directory	Description
\$GLAS_HOME/src	Contains Fortran90 and C source code.
\$GLAS_HOME/test	Contains test data and scripts to verify proper operation of the software.

4.2 Compilation

Change to the production directory and perform the following makes:

```
cd $GLAS_HOME
make clean
make runtime
make install
```

After this process is complete, all object files, libraries, and executables will have been re-created and installed in the appropriate directories. This is the recommended mode of compilation. It is the method used to create the distribution binaries and for final integration and acceptance testing.

4.2.1 Debugging

The debug option signals that the compiler should produce code which performs bounds checking, floating point exception checking, runtime error trapping and allows for use of a symbolic debugger.

If debug checking is desired, the software must be recompiled with the “debug” flag.

```
cd $GLAS_HOME
make clean
make debug
make install
```

After this process is complete, all object files, libraries, and executables will have been re-created with the debug option and installed in the appropriate directories.

4.2.2 Optimization

The optimization option signals that the compiler should produce optimized code. These optimizations include such things as full level-3 optimization, automatic parallelization, array reordering, and subroutine inlining. Note that compiling with optimization takes a significant amount of time. Given that optimization is a “risky” process, refer to the appropriate version of the GSAS Version Description Document for additional information.

If optimization is desired, the software must be recompiled with the “fast” flag.

```
cd $GLAS_HOME
make clean
make fast
make install
```

After this process is complete, all object files, libraries, and executables will have been re-created, optimized with the “fast” option and installed in the appropriate directories.

4.3 Verification

GSAS includes a suite of data and scripts to verify proper operation of the software. This suite is a subset of the GSAS Acceptance test. The test runs each of the GSAS PGEs with approximately 600 seconds of test data. The test should take less than 20 minutes to complete.

Assuming the software has been successfully compiled and installed, verify its operation as follows:

```
cd $GLAS_HOME/test
./verify.sh
```

The following shows a successful verification test. Contact the GSAS development team if your results differ

```
GSAS Verification Test
Cleaning up...
Testing GLAS_L0proc...
    Passed.
Testing GLAS_L1A...
    Passed.
Testing reforbit_util...
    Passed.
CreateGran_util...
    Passed
Testing met_util...
    Passed.
Testing atm_anc...
    Passed.
Testing GLAS_Atm...
    Passed.
Testing GLAS_Alt (Waveforms)...
    Passed.
Testing GLAS_Alt (Elevation)...
    Passed.
```

After successful completion, the newly created data may be removed by running the following command:

```
cd $GLAS_HOME/test  
./cleanup.sh
```

Section 5

Common Functionality

GSAS code was designed to maximize software reuse capabilities. As such, it provides for a great deal of common functionality among its PGEs. GSAS uses standardized control files, constants files, and error/status reporting facilities. This makes GSAS easier to use since, for example, a control file for one PGE is basically the same style as a control file for other PGEs.

5.1 Control Files

Control files are the interface between GSAS and the user (or controlling process). Control files provide dynamic control information to PGEs. Static information is provided by ancillary constants files (ANC07). A single control file can provide instructions for more than one PGE. Section breaks are used to delimit those instructions of significance to the specific PGE.

5.1.1 Use

The name of the control file is passed as a command-line argument during each invocation of the PGE. Most PGEs will terminate with a fatal error if the command-line argument is missing, the specified file does not exist, or the file is unreadable. The exceptions to this rule are GLAS_Reader and GLAS_APID, which provide a rudimentary user-interface when invoked without a control file name.

5.1.2 Format

GSAS control files are designed to be part of a larger control file used by one or more PGE. As such, it specifies sections that identify the PGE that will perform the task requiring the inputs contained in the section. Each section is bounded by an "=" sign in column 1, followed by the PGE name that requires the control inputs. Exact section names will be shown in the PGE-specific control file section of this document.

All GSAS control files are created in standard GSAS "keyword=value" format. This format is text-based and consists of a line containing a keyword/value pair delimited by an equal sign (=). The ordering of the keywords is not relevant but should follow a convention for consistency. Multiple instances of certain keywords are allowed. The keyword is not case sensitive. Spaces are allowed, but not required. Comment lines must be prepended by a "#" character. The keyword and value are limited to 255 characters each.

5.1.3 Content

PGE sections within a control file contain both common and process-specific information. The process-specific portions of control files will be provided within the documentation for each specific executable. This section will document common elements of the PGE control files

Within a control file section, some information is required, other is optional. As shown in Table 5-1, required single-instance keywords include:

Optional multiple-instance keywords, as shown in Table 5-2, include.:

Table 5-1 Required Single-Instance Keywords

Keyword	Value
TEMPLATE_NAME=	Name of the control file template.
EXEC_KEY=	Unique (per day) execution key
DATE_GENERATED=	Date the control file was generated.
OPERATOR=	Operator who generated the control file.
PGE_VERSION=	External Version number of the target PGE.

Table 5-2 Optional Multiple-Instance Keywords

Keyword	Value
PASSID=	Pass-related information
INPUT_FILE=	Input filename and associated information
OUTPUT_FILE=	Output filename and associated information
WRITE_CONST=	Signals that the specified constants should be written to ANC06. (described in Section 5.3.3.)

5.1.4 PASSID Specification

A PASSID section is required in the control file when creating GLA products. There should be one instance of the following keyword/values for all tracks which fall within the minimum/maximum time of the data being processed. This information is required for GLAS_L1A, GLAS_Alt, and GLAS_Atm. This information is NOT required for GLAS_L0proc or other utilities.

In the final version of GSAS (6.0.1) the nose_path_number is not used

```
PASSID=revolution_num<sp>pas-
sid<sp>start_time<sp>stop_time<sp>equator_crossing_lon<sp>no
se_path_number.
```

Descriptions of the PASSID elements are provided in Table 5-3.

Table 5-3 PASSID Control Line Elements

Element	Description
revolution_num	integer, containing the auto-incrementing rev number.
passid	11-byte character, further described below.
start_time	double-precision float, containing J2000 UTC time in seconds.
stop_time	double-precision float, containing J2000 UTC time in seconds.
equator_crossing_lon	float, containing the equator crossing longitude.
nose_path_number	integer, containing the NOSE path number.

The eleven-byte passid field will be treated as follows: prkkccctttt. Descriptions of each element are provided in Table 5-4.

Table 5-4 passid Field Description

Field	Description
p	repeat ground track phase (integer, length=1)
r	reference orbit number (integer, length=1)
kk	instance (integer, length=2)
ccc	cycle (integer, length=3)
tttt	track (integer, length=4)

Example (with nonsense values):

```
#
#-----Pass ID Information
#
PASSID=107 11010010001 85300.0 85350.0 35.0 37
PASSID=108 11010010001 85351.0 85400.0 45.0 38
PASSID=109 11010010002 85401.0 85500.0 55.0 39
PASSID=110 12010010003 85501.0 85600.0 65.0 40
PASSID=111 12010010004 85601.0 85700.0 75.0 41
PASSID=112 22010010005 85701.0 85800.0 85.0 42
PASSID=113 22010020006 85851.0 85900.0 95.0 43
PASSID=114 22020020007 85901.0 86000.0 105.0 44
PASSID=115 22020020007 86001.0 86500.0 115.0 45
```

5.1.5 Input/Output File Specification

Input and Output files are required to be designated using the GSAS-standard naming convention defined in Appendix A. The type of each file specified is determined by parsing specific components of the filename which are required by all of the naming methods defined in the specification. These common components of all filenames are:

HHHxx_mmm...ffff.eee

(where: HHH is the type identification, xx is the type id number, mmm is the release number, ff is the file sub-type, and eee is the file extension.)

GSAS software uses the type identification, the type id number and the file sub-type to determine what type of file is specified in the control file. The filetype-parsing routines are not case-sensitive when determining the type of file specified. However, the filenames are case-sensitive during file opening and creation.

All files are required to be delimited by start and stop times. These times are floating point values specified on the control line as J2000 time in seconds. On both input and output, records are skipped until the time in the current record is greater than or equal to the specified start-time and less than or equal to the specified stop-time. Static ancillary files are required to have start-times and stop-times present for consistency, but these are currently ignored.

The minimum required formats for input and output file specifications are:

```
INPUT_FILE=file_name<sp>start_time<sp>stop_time
OUTPUT_FILE=file_name<sp>start_time<sp>stop_time
```

Additionally, GLA product file entries should contain segment and version information. This information is specified in the format:

```
INPUT_FILE=file_name<sp>start_time<sp>stop_time<sp>gran_rel_
num<sp>gran_ver_num<sp>gran_segment
OUTPUT_FILE=file_name<sp>start_time<sp>stop_time<sp>gran_rel_
_num<sp>gran_ver_num<sp>gran_segment
```

Segment and version information fields are described in Table 5-5.

Table 5-5 File Segment and Version Fields

Field	Description
gran_rel_num	granule release number (CCB controlled, mmm in filenames convention). Character max length of 20.
gran_ver_num	granule version number (Auto-incrementing, nn in filenames convention). Character max length of 20.
gran_segment	orbit segment of the granule (if more than 1 segment, use 0). Character max length of 1.

Files with INPUT_FILE and OUTPUT_FILE keywords must be listed in chronological order based on start and stop times. The start time of one file may overlap the stop time of another. In this case, data within the overlapping range will be written to the first file and not the second.

Example of a GLA file specification control line:

```
OUTPUT_FILE=gla01_002_11_0001_0043_4_00_0000.dat 85398 86000 1 1 0
OUTPUT_FILE=gla02_002_11_0001_0043_0_00_0000.dat 85398 86000 1 1 0
```

Example of an ANC file specification control line:

```
INPUT_FILE=anc07_001_01_0000.dat 85398 86000
INPUT_FILE=anc07_001_01_0001.dat 85398 86000
```

5.1.6 Example Control File

Following is a partial control file which highlights elements common to all GSAS control files. Examples of specific control files will be provided within the documentation for each specific PGE.

```
#-----Start of Control File
#
# <description of control file>
#
#-----Execution Information
#
=GLAS_L1A
TEMPLATE=<template name>
EXEC_KEY=<unique execution key>
DATE_GENERATED=<date/time control file was generated>
OPERATOR=<operator name/uid>
PGE_VERSION=<PGE version number>
#
#-----Static ANC Files
#
# Common Input ANC07 Files: 00=error, 01=global
#
INPUT_FILE=<anc0700_error_filename starttime stoptime>
INPUT_FILE=<anc0701_global_filename starttime stoptime>
#
#-----Output ANC06 File
#
# Output ANC06
#
OUTPUT_FILE=<anc06_filename starttime stoptime>

{processing scenario-specific elements}
#
#-----End of Control File
#
=End of Control File
```

5.2 Processing Controls

The core PGEs (GLAS_L1A, GLAS_Atm, GLAS_Alt) provide for flexible methods of processing GLAS data. All controls are specified via the control file. Methods of controlling data processing include:

- Input data time selection
- Output data time selection
- Execution control

The detailed documentation for each PGE will identify what respective types of processing controls are available.

5.2.1 Input Data Time Selection

As seen in the Control File section, all input files are required to be delimited by start and stop times on their control file entry. PGEs which support time selection will skip that data which are outside the limits defined by start and stop times. This data will be read, but not processed. Additionally, given the case of multiple input files of the same type, the PGE will seamlessly move from one file to the next when all data from the current file have been read (or skipped via time selection).

Certain input ancillary files do not support input time selection but require start and stop times in their control file entry. The recommended method of delimiting time in the case is to use the minimum-to-maximum range of input dynamic data time for these entries.

5.2.2 Output Data Time Selection

As with input files, all output files are required to be delimited by start and stop times on their control file entry. PGEs which support time selection will not write that data which are outside the limits defined by start and stop times. Additionally, given the case of multiple output files of the same type, the PGE will seamlessly move from one file to the next when the current data time falls outside the range of the current output file. It is important to note that input data time selection and output data time selection are completely independent of one another.

There is, however, a practical relationship between the two, since output data for a particular time cannot be written if no input data for that time is read (or specified).

5.2.3 Execution Scenarios

Most core PGEs permit multiple execution scenarios. Certain sets of computations have been grouped together by the software designers. Execution of these sets can be specified via specific execution flags with the PGE control file. The detailed documentation for each PGE specifies what execution flags are available and the processes they control. Additionally, there are dependencies between input file type, output file type, and the execution flags. These dependencies define execution scenarios, which will be described in the respective PGE -specific section of this document.

5.3 ANC07 Constants Files

ANC07 files are used to provide GSAS with change-controlled parameters provided by the Science Team and used during processing of GLAS data. These are parameters that may be modified by science team request but are not likely to require a corresponding software change. By putting the parameters in the ANC07 input files, the team avoids recompiling the GSAS software for the parameter change. It is critical that these files are tightly change-controlled since unapproved modification could result in erroneous data being generated during the creation of the GLAS Products.

There are several types of ANC07 files. These types include a global constants file, an error file, and constants files specific to each of the science algorithm categories. The error file is detailed in the error section of this document. The science-algorithm specific constants files

will be detailed in the respective documentation for those particular executables. This section will document the global constants file and the commonalities of all these files.

5.3.1 Use

The constants files are specified as input files within a particular executable's control file. The global constants file and the error constants file are required for all executables. Table 5-6 shows the naming convention of each ANC07 file and a description of its content. (*mmm* is the release number for process that created the file and is the version number of the file itself within the *mmm* release).

Table 5-6 ANC07 Files

Naming Convention	Content
anc07_mmm_nn_0000.dat	Error/Status constants
anc07_mmm_nn_0001.dat	Global constants
anc07_mmm_nn_0002.dat	Atmosphere constants
anc07_mmm_nn_0003.dat	Elevation constants
anc07_mmm_nn_0004.dat	Waveform constants
anc07_mmm_nn_0005.dat	L1A constants
anc07_mmm_nn_0006.dat	Utility constants

5.3.2 Format

GSAS ANC07 files are delimited by section identifiers which differ (by design) from control files section identifiers. Each section is bounded by the section name and an "=". The section delimiters are defined as follows:

```

BEG_OF_STATUS=
...Status section contents...
END_OF_STATUS=

BEG_OF_ERROR=
...Error section contents...
END_OF_ERROR

BEG_OF_GLOBALS=
...Global constants section contents...
END_OF_GLOBALS

BEG_OF_ATM=
...Atmosphere constants section contents...
END_OF_ATM

BEG_OF_ELEV=
...Elevation constants section contents...
END_OF_ELEV

```

```

BEG_OF_L1A=
...L1A constants section contents...
END_OF_L1A

```

All GSAS ANC07 files are created in standard GSAS “keyword=value” format. This format is text-based and consists of a line containing a keyword/value pair delimited by an equal sign (=). The ordering of the keywords is not relevant but should follow a convention for consistency. Multiple instances of keywords are not allowed. The keyword is not case sensitive. Spaces are allowed, but not required. Comment lines must be prepended by a “#” character. The keyword and value are limited to 255 characters each.

5.3.3 ANC07 Output Options

GSAS provides the ability to write the values of selected sets of constants into the ANC06 file at runtime. This is activated by a control file entry with a keyword of WRITE_CONST. The associated value determines what set of constants should be written. Multiple WRITE_CONST control file entries, each specifying a different set of constants, are permitted.

Table 5-7 WRITE_CONST Control Values

Value	Constants to Write
ERR	Error/Status constants.
L1A	L1A constants.
WF	Waveform constants.
ATM	Atmosphere constants.
ELEV	Elevation constants.
GLOB	Global constants.

Example control file entries:

```

#Dump constants to ANC06
WRITE_CONST=GLOB
WRITE_CONST=L1A

```

5.3.4 Global Constants File Content

The ANC07 global constants file contains very-high level constants that are used by more than one PGE. A sample global constants file follows (Please use to actual ANC07 file to determine values) :

```

##
# GLAS ANC07 Constants File
#
# 06/07/99 PLJ Corrected the elevation status messages
# 1999 September 22 JLee, Updated GLAS_Error where error < 0
# 09/27/99 GMM Updated the error list to include entries from ATM, WF, ELEV
#             subsystems and made error codes negative.
# 1999 October   18 JLee, Fixed error code.
# 1999 November  01 JLee, Integrated ATM constants

```

```

# 2000 March      13 JLee, Updated
# 2001 April      13 JLee, Added DEM constants from Elevation
# 2001 May        16 PJester, Added GPS to UTC offset
# 2001 June       08 JLee, Modified GPS to UTC offset to match Donghui's data
# 2001 August     22 JLee, Moved calibration coefs from L1A to here so that
#                  both WF and L1A can use them
#
# Constants Mod Entries
#
BEG_OF_GLOBALS = -----
GLOB_VERS = ANC07 Globals v2.0 October 2001
#
# Mean Ellipsoid Radius
#
ELLIPAE = 6378136.49d0
#
# Inverse of Ellipsoid Flattening
#
ELLIPF = 298.25645d0
#
# delta lat for DEM grid
#
DEMdLat  = 0.00833333333333d0
#
# delta lon for DEM grid
#
DEMdLon = 0.00833333333333d0
#
# Start latitude on the DEM grid
#
DEMLAT_BEG = 90.00416666666667d0
#
# Start longitude on the DEM grid
#
DEMLON_BEG = -0.004166666666667d0
#
# The offset from the GPS reference time (00:00 Jan 1, 1980)
# to the UTC reference time (12:00 Jan 1, 2000)
#
GPStoUTCOffset = -2001.10980499199991
#
# Max PAD offset allowed (max off-nadir pointing angle)
#
MAXPADOFF = 0.5d0
#
# 1064 energy Calibration coefficient for Received WFs
#
gd_calibcoefrec = 0.002351d0
#
# 1064 energy Calibration coefficient for transmitted WFs
#
gd_calibcoeftr = 0.00018d0
#
END_OF_GLOBALS = -----
#
END_OF_ANC07_FILE = -----

```

5.4 Invalid Values and Error/Status Reporting

This section documents the use of standardized methods of dealing with invalid data and error/status conditions.

5.4.1 Invalid Values

Not all data received from GLAS will be suitable for science processing. In addition, given the nature of the raw telemetry packets, some data may be missing. The concept of an “invalid value” is used to signify that data is invalid or missing and should not be used for processing. Invalid values are datatype-specific values which are defined in the GLAS global constants module. These variables are assigned to Product variables in order to indicate invalid or missing data. These values are defined in Table 5-8.

Table 5-8 Invalid Values

Datatype	Invalid Value
1 byte integer	127
2 byte integer	32767
4 byte integer	2147483647
4 byte real	3.40282E+38 x7F7FFFFFFF
8 byte real	1.797693094862316E+308 x7FEFFFFFFFFFFFFFFF

5.4.2 Error and Status Codes

GSAS uses a common error/status reporting facility. This ensures that error/status reporting is handled in a consistent manner throughout the software. This facility is based on the ANC07 error file and is configurable by the user.

5.4.2.1 ANC07 Error File Format

The ANC07 error file is in standard GSAS “keyword=value” format. See Section 5.3.2 for details of the format. As with other ANC07 files, the sections for error and status must be delimited by section identifiers. Identifiers for each section are listed below.

```
BEG_OF_STATUS=  
...Status section contents...  
END_OF_STATUS=  
  
BEG_OF_ERROR=  
...Error section contents...  
END_OF_ERROR
```

The format of the error/status content is defined in Figure 5-1. The keyword can have the value of “ERROR” or “STATUS”. This identifies if the line contains an error or status entry. The value is a text string with the specific format defined in Table 5-9.

Figure 5-1 Error Ancillary File Format

KEY-

WORD=nnnnnxxtttsxsfrrrrr

Table 5-9 Error String Format

Character	Positions	Description
n	1-6	Error code (must be sequential within a section)
x	7,58,60	Space character (delimiter)
t	8-57	Message
s	59	Error severity (see Table 5-11)
f	61-66	Frequency of reporting (message is reported on 1st occurrence, then every f'th time)

Table 5-10 Error Sections

Starting Numbers	Description
-10001/10001	General error/status.
-20001/20001	L1A error/status.
-30001/30001	Waveform error/status
-40001/40001	Atmosphere error/status
-50001/50001	Elevation error/status.

There is a specific error number for each error/status value. Within the ANC07 file, these error numbers are numerically split into multiple sub-sections. Errors have negative numeric designations; status messages have positive designations.

Each major portion of the GSAS software supported by the specific error file begins at a different subsection number. Within a subsection, error numbers must be consecutive. The use of sub-sectioning is optional for a simple error file. The GSAS ANC07 error file has 5 subsections. Table 5-10 lists each of the subsections and their starting error/status number.

5.4.2.2 Use

GLAS error messages are designed to inform a user when the software has encountered a problem. GLAS status messages are designed to assist the user in observing the flow of the processing. Status messages usually alert the user when the software begins execution of a subroutine. A great deal of flexibility was designed into this software in order to allow the user to customize the error/status display.

The user may modify error and status entries in order to configure the severity of the error and frequency of printout. The user is cautioned to seek GLAS change-control board approval

before modifying the severity of an error. GSAS software will terminate processing upon receipt of a fatal severity code. Thus, modifying the severity may enable the software to execute in a non-tested mode.

The severity column controls how the GLAS software reacts when an error occurs. The 4 levels of severity are described in Table 5-11. GLAS software will terminate on a Fatal error. The frequency column controls how often an error message is printed out. The first instance of a specific error is always printed. Subsequent instances are printed out at the frequency specified. All instances are counted and the number of occurrences printed in an output summary.

Table 5-11 Error Severity Codes

Severity	Description
0	No error
1	Information/status
2	Warning
3	Fatal

5.4.2.3 Error/Status File Content

GLAS Error/Status messages and explanatory text are found in Appendix D of this document. HP Runtime error listings are found in Appendix D, as well.

5.4.2.4 Sample ANC07 Error/Status File

Following is a sample ANC07 error/status file. It has been trimmed down significantly for brevity.

```
#
# GLAS ANC07 Error File
#
# STATUS Section
#
BEG_OF_STATUS= -----
STAT_VERS = ANC07 Status VERSION #
#
# Exec
#
#TATUS=nnnnnnttttttttttttttttttttttttttttttttttttttttttttttttttttttttnxnntnnnnn
STATUS=10001   Number of Records Processed:                        0      10
STATUS=10002   Number of Records Read:                             0      10
#
# L1A
#
#TATUS=nnnnnnttttttttttttttttttttttttttttttttttttttttttttttttttttttttnxnntnnnnn
STATUS=20001   L_Alt subroutine status                            0      10
STATUS=20002   L_Attn subroutine status                           0      10
#
# Waveform
#
#TATUS=nnnnnnttttttttttttttttttttttttttttttttttttttttttttttttttttttttnxnntnnnnn
STATUS=30001   W_Assess subroutine status                         0     9000
STATUS=30002   W_FunctionalFt subroutine status                  0     9000
```

```
#
# Atmosphere
#
#TATUS=nnnnnnxxttttttttttttttttttttttttttttttttttttttttttttttttttttttttttttttnxnxxxxnnnnn
STATUS=40001 A_aer_lays subroutine status 0 7000
STATUS=40002 A_aer_opt_prop subroutine status 0 7000
#
# Elevation
#
#TATUS=nnnnnnxxttttttttttttttttttttttttttttttttttttttttttttttttttttttttttttttnxnxxxxnnnnn
STATUS=50001 In E_CalcLoadTd subroutine status 0 1000
STATUS=50002 IN E_CalcOceanTd subroutine status 0 1000
#
END_OF_STATUS = -----
#
#=====
#
# ERROR Section
#
BEG_OF_ERROR = -----
ERR_VERS = ANC07 Error V2_exec_split 12 February 2001
#
# Exec
#
#RROR=nnnnnnxxttttttttttttttttttttttttttttttttttttttttttttttttttttttttttttttnxnxxxxnnnnn
ERROR=-10001 Error Opening File for Input: 3 1
ERROR=-10002 No control file specified. 3 1
#
# L1A
#
#RROR=nnnnnnxxttttttttttttttttttttttttttttttttttttttttttttttttttttttttttttttnxnxxxxnnnnn
ERROR=-20001 Error reading PAD data Eng data 3 2
ERROR=-20002 Error reading PAD data Eng data 3 1
#
# Waveform
#
#RROR=nnnnnnxxttttttttttttttttttttttttttttttttttttttttttttttttttttttttttttttnxnxxxxnnnnn
ERROR=-30001 Singular Matrix 1 1
ERROR=-30002 Number of peaks found greater than max 1 9000
#
# Atmosphere
#
#RROR=nnnnnnxxttttttttttttttttttttttttttttttttttttttttttttttttttttttttttttttnxnxxxxnnnnn
ERROR=-40001 DEM out-of-bounds 1 50
ERROR=-40002 532 integrated return flag poor or bad 1 50
#
# Elevation
#
#RROR=nnnnnnxxttttttttttttttttttttttttttttttttttttttttttttttttttttttttttttttnxnxxxxnnnnn
ERROR=-50001 Error reading met height file 3 1
ERROR=-50002 Error reading met temperature file 3 1
#
END_OF_ERROR = -----
#
#
END OF ANC07 FILE = -----
```

5.4.3 Result Codes

All GSAS PGEs return a result code indicating success or failure. The result code may be checked by referencing \$? (bourne sh). The result code values are a subset of the error/status codes and are defined in Table 5-12.

Table 5-12 Result Codes

Severity	Description
0	No error
3	Fatal error

5.5 ANC06 Metadata/Log File

5.5.1 ANC06 Overview

GSAS software creates ANC06 output files as required by GSDP-31100 (refer to the GLAS Science Software Requirements Document). The ANC06 file contains processing information, error messages, and status messages.

5.5.2 Format

The file is in a modified version of the GSAS keyword=value format. The format of an ANC06 entry is:

```
[rec_ndx] [keyword] = [value]
```

The first field [rec_ndx] is the current record index. This correlates to the time of the data being processed when the entry was written (if no data have been processed, the value may be 0 or an invalid value). The second field [keyword] is a keyword describing the type of information presented. The third field [value] is a formatted text message describing the event. Comments are allowed in order to group messages logically. Comment lines are pre-pended by the pound (#) sign.

The value field has several subfields. The first field is the numeric error code. The second field is the error severity. The third field is the name of the routine which reported the error. The fourth field is the standard error text with optional detailed text. The format of the subfields within the value field is shown below:

```
error_num, severity, calling_routine, std_message opt_text
```

5.5.3 Use

ANC06 files are designed to be human-readable. However, there are techniques which can make retrieval of information from these files easier. The UNIX grep command is a valuable tool which can be used to extract information from the ANC06 files.

For example, to find all errors within an ANC06 file:

```
grep -i ERROR anc06_filename
```

To find all version information,

```
grep -i VERS anc06_filename
```

To display control file information:

```
grep -i CONTROL anc06_filename
```

5.5.4 ANC06 Example and Description

An example ANC06 file is provided in Appendix C.

Section 6

GLAS_L0proc

6.1 Function

GLAS_L0proc (sometimes referred to as GLOP) reads GLAS Level-0 APID files, ANC47 construction records, ANC07 constants, and the ANC33 time conversion file to create ANC29 and ANC32 ancillary files which will be used in L1A processing. The ANC29 file is used by GLAS_L1A to read the APID files in a time-aligned manner. The ANC32 file is used by GLAS_L1A to allow the computation of precise timing information via a GPS reference. GLAS_L0proc should be run once all GLAS APID files for a particular 6-hour period have been received by the data processing facility. GLAS_L0proc does not permit multi-granule input or output files.

6.2 Input Files

Table 6-1 lists the required inputs to GLAS_L0proc. Files which are specific to GLAS_L0proc are documented in this section. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details regarding the those files not specific to GLAS_L0proc.

Table 6-1 GLAS_L0proc Inputs

File Spec	Type	Source	Short Description
gla00*_?????.dat	Level-0 APID	EDOS	GLAS Level-0 APID files (one file per each APID type).
anc07*_0000.dat	Static Ancillary	Science Team	GLAS error file.
anc07*_0001.dat	Static Ancillary	Science Team	GLAS global constants file.
anc47*_?????.dat	Dynamic Ancillary	EDOS	APID construction records.
anc33*.dat	Dynamic Ancillary	ISIPS Operations	Counter-to-UTC conversion file.
Control File	Control	ISIPS Operations	Control file.

6.2.1 GLA00 APID Files

The GLA00 APIDs are Level-0 multi-rate spacecraft data files provided to the GLAS data processing facility by EDOS. There is a separate file for each specific APID type received from the spacecraft. These files are documented by the GLAS Instrument Team.

After delivery from EDOS, these files are renamed to comply with GLAS standard naming conventions by SDMS. The start time in the control file entry for the APIDs is used to determine the approximate UTC time for the data. This is important for finding the correct MET-to-UTC conversion entry in the ANC32 file.

GLAS_L0proc processes the APIDs listed in Table 6-2.

Table 6-2 APIDs Processed by GLAS_L0proc

APID	Filename	Description
12	gla00*_0012.dat	Altimeter Digitizer Large Sci Pkt
13	gla00*_0013.da	Altimeter Digitizer Small Sci Pkt
14	gla00*_0014.dat	Altimeter Digitizer Eng Pkt
15	gla00*_0015.dat	Photon Counter Sci Pkt
16	gla00*_0016.dat	Photon Counter Eng Pkt
17	gla00*_0017.dat	Cloud Digitizer Sci Pkt
18	gla00*_0018.dat	Cloud Digitizer Eng Pkt
19	gla00*_0019.dat	Ancillary Science Pkt
20	gla00*_0020.dat	CT HW telemetry #1 Data Pkt
21	gla00*_0021.dat	CT HW Telemetry #2 Data Pkt
22	gla00*_0022dat	CT HW Telemetry #3 Data Pkt
23	gla00*_0023.dat	CT HW telemetry #4 Data Pkt
24	gla00*_0024.dat	Small Software #1 Tlm
25	gla00*_0025.dat	Large Software Telemetry #1 Packet
26	gla00*_0026.dat	LPA Data Pkt
27	gla00*_0027.dat	Memory Dwell Packets 1
28	gla00*_0028.dat	Memory Dwell Packets 2
31	gla00*_0031.dat	DSP Code Memory Dump
32	gla00*_0032.dat	DSP Data Memory Dump
33	gla00*_0033.dat	C & T Dwell Packet
34	gla00*_0034.dat	Event Message Packet
35	gla00*_0035.dat	Memory Dump Packet
36	gla00*_0036.dat	Table Dump Packet
38	gla00*_0038.dat	Boresite Calibration Packet
48	gla00*_0048.dat	GLAS Data Types Packet
49	gla00*_0049.dat	Command History Packet
50	gla00*_0050.dat	CT HW telemetry #5 Data Pkt
55	gla00*_0055.dat	Large Software Telemetry #2 Packet
126	gla00*_0126.dat	LPA Test Packet.

Table 6-2 APIDs Processed by GLAS_L0proc (Continued)

APID	Filename	Description
1984	gla00*_1984.dat	GLAS PRAP Packet
1088	gla00*_1088.dat	GPS Receiver Data Packet

6.2.2 ANC33 Counter to UTC Conversion File

The ANC33 file is used to convert mission-elapsed time (MET), which is provided in the APIDs, to GLAS-standard UTC time. Since the MET can be re-set by a roll-over or a space-craft upset it is important that this file be maintained and provided to the GLAS processing facility in a timely manner. The file is delivered to ISIPS from the ISF as described in the ISF/ISIPS Interface Control Document.

ANC33 file is a ANSI text file. Each line contains data for a single entry in the file (data should not be hard wrapped). Comment lines are allowed and prepended by a # character. Each line contains the following information:

```
d_shdr_count <sp> d_shdr_count_prap <sp> d_utc <sp>
d_glas_osc_rate <sp> d_sc_osc_rate <sp> d_tdelay_digtzr <sp>
d_rdelay_digtzr <sp> d_plTbias <sp> d_plRbias <sp>
i_trkr_subject1 <sp> i_trkr_subject2 <sp> i_trkr_subject2
<sp>implement_time
```

Each field is defined in Table 6-3.

Table 6-3 ANC33 Field Descriptions

Field	Description
d_shdr_count	double precision : the counter value in the secondary header on MOST APIDS
d_shdr_count_prap	double precision: the counter value in the secondary header of PRAP
d_utc	double precision: the J2000 UTC time in seconds to which the counter values are converted
d_glas_osc_rate	double precision: the GLAS oscillator rate
d_sc_osc_rate	double precision: the Spacecraft oscillator rate
d_tdelay_digtzr	double precision: time delay for digitizer in seconds
d_rdelay_digtzr	double precision: internal range delay for digitizer in m
d_plTbias	double precision: post launch time bias in seconds
d_plRbias	double precision: post launch range bias in m
i_trkr_subject(1)	integer: the subject indicator for LRS tracker 0
i_trkr_subject(2)	integer: the subject indicator for LRS tracker 1

Table 6-3 ANC33 Field Descriptions (Continued)

Field	Description
i_trkr_subject(3)	integer: the subject indicator for LRS tracker 2
d_implement_time	double precision: the J2000 UTC time in seconds where the data for this entry are first valid

Note that the Implement_time is the UTC time at which this conversion was valid. GLAS_L0proc uses the designated start time of the first APID specified in the control file to find the correct position within the ANC33 file based on the Implement_time field.

Example:

```
#
# GLAS ISF/GLAS ISIPS Interface file
#
# This file is delivered to ISIPS from the ISF as described in the
# ISF/ISIPS Interface Control Document.
#
0000000000000000 0000000000000000 -00043200.0 1.0 1.0 0.00001511 9.5 0.0 0.0 0
1
2 0000000000000000
0000000100000000 0000000200000000 -00043200.0 1.0 0.99999 0.00001501 9.6 0.0
0.1 0
2 1 00000000086400
```

Note that the data are read free-format and are not restricted to a certain precision or number of columns. Although the example lines are wrapped to fit on a page, each entry should be contained on a single line (soft wrapping is OK).

6.2.3 ANC47 Construction Record

EDOS provides construction records for each APID they provide to GSAS. Construction records have information which indicates if APID packets were “filled” by EDOS. A filled packet is one which was corrupt or incomplete when received from a ground station.

GLAS_L0proc parses the construction record, determines the position of filled packets, and then skips those packets during processing.

6.2.4 Control File

The control file format and common elements are documented in Section 5 of this document. Elements specific to GLAS_L0proc are described in this section.

The control file section delimiter for GLAS_L0proc is:

```
=GLAS_L0P
```

Since GLAS_L0proc has no requirement for execution scenarios, there are no unique keywords for the GLAS_L0proc control file. GLAS_L0proc will perform all functions based on the presence of input and output files within the control file.

6.3 Output Files

Table 6-4 lists the outputs created by GLAS_L0proc. Files which are specific to GLAS_L0proc are documented in this section. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details regarding the files which are not specific to GLAS_L0proc.

Table 6-4 GLAS_L0proc Outputs

File Spec	Type	Destination	Short Description
anc29*.dat	Dynamic Ancillary	GLAS_L1A	Index file correlating APID times.
anc32*.dat	Dynamic Ancillary	GLAS_L1A	Frequency board to GPS time correlation file.
anc06*.dat	Dynamic Ancillary	ISIPS Operations	Standard metadata/processing log file.

6.3.1 ANC29 Index File

The ANC29 index file provides GLAS_L1A with a method of time-correlating the GLAS APID files. It contains an index record for every record in the set of input APID files. ANC29 is a binary, fixed-length record file. Its content is described in Table 6-5.

Table 6-5 ANC29 File Content

Type	Name	Description
double	utctime	J2000 UTC time in seconds of the APID.
long int	rec_ndx	Unique record index of the APID group. (Nominally, (utctime-offset) * 10)
long int	shot_ctr	Shot counter (if available).
long int	rec_num	Physical record number in the APID file.
long int	apid	APID identification number.
long int	dqflag	Data quality flag (0=good data).
short int	sort_order	Sort order (for internal use).
short int	spare	Spare (for internal use).

6.3.2 ANC32 GPS File

The ANC32 GPS file provides GLAS_L1A with a method of computing precise timing calculations based on the last update of the onboard GPS. It contains records identifying each time the GPS clock is updated within the APID packets. ANC32 is a binary, fixed-length record file and nominally occurs at a rate of one record every 10 seconds. Its content is described in Table 6-6.

Table 6-6 ANC32 File Content

Type	Name	Description
long int	rec_ndx	Unique record index of the APID group. (Nominally, (utctime-offset) * 10)
short int	i_ScPosPktShot	APID 19/1182 Shot count for 1553 Spacecraft Time & Pos packet.
short int	i_useflag	Flag indicating if the data are valid (0=valid, other=not valid)
double	d_utctime	J2000 UTC time in seconds from secondary header of packet where GPS changed.
double	d_FTLatch	APID 19/1195 GPS 10 Sec Pulse 40 bit count value
double	d_ScPosPktGMET	APID 19/1184 GLAS MET for 1553 Spacecraft Time & Pos packet.
double	d_VTCW	APID 19/1142 Spacecraft VTCW (start of SC Time & Pos pkt)
double	d_VTCWp	APID 19/1182 VTCW and at time of 0.1Hz pulse (end of SC Time & Pos pkt)
double	d_GPSTime	APID 19/1172 GPS time in Seconds
double	d_GPSppsGMET	PID 19/1201 GLAS MET for GPS 0.1 Hz Pulse

6.4 Processing and Reprocessing Scenarios

GLAS_L0proc supports only a full-processing scenario. Additionally, all available APIDs files and ANC47 construction records for a specific time period must be processed during the same run. Only one valid ANC29/32 file is permitted for a time period. If additional corresponding APIDs are received at a later date, all of the APIDs for that particular period must be re-processed to create replacement ANC29/32 files.

Time-selected processing is not supported. The start and stop times on the INPUT_FILE and OUTPUT_FILE control file entries are ignored for processing, but are critical for finding the correct time of data during ANC33 file searches.

6.5 Startup and Termination

This is an overview of the steps necessary to run GLAS_L0proc.

6.5.1 Setup a Runtime Directory

The suggested method of running GLAS_L0proc is to create a temporary directory and link all necessary files into it. For example, to setup a GLAS_L0proc run, one would perform the following steps (Designate TEMP_DIR as the temporary directory and DATA_DIR as the location in which input data for this job has been staged):

```
mkdir $TEMP_DIR
cd $TEMP_DIR
ln -s $GLAS_HOME/bin/GLAS_L0proc .
```

```
ln -s $GLAS_HOME/lib/* .
ln -s $GLAS_HOME/data/anc07*.dat .
ln -s $GLAS_HOME/data/anc33*.dat .
ln -s $DATA_DIR/*.dat .
```

6.5.2 Create a Control File

GLAS_L0proc is designed to take the name of a control file as a command-line argument. The suggested method of creating a control file is by copying a template from the \$GLAS_HOME/data directory and modifying it with desired input/output filenames and data processing options.

```
cp $GLAS_HOME/data/cf_glas_l0proc.ct1 ./control_file_name
vi ./control_file_name
```

6.5.3 Run the PGE

Error and status messages will be displayed on screen (stdout) and recorded in the ANC06 file.

```
./GLAS_L0proc control_file_name
```

6.5.4 Run-Time Statistics

GLAS_L0proc processes 6 hours of GLAS data in less than 2 minutes. This may vary due to hardware load and data dependencies.

6.5.5 Termination

The process will terminate automatically upon reaching the end of all input data. The log/metadata file (ANC06*) must be examined to determine runtime success. Additionally, the process will return a result code to the operating system which may be used to programmatically determine success or failure (0=success, 3=fatal error).

6.6 Error and Warning Messages

All GSAS error and warning messages are listed numerically in Appendix D.

6.7 Recovery Steps

If GLAS_L0proc terminates with an error:

- 1) Review error and status messages in the ANC06 file or on stdout to determine source or location of problem. Refer to errors listed in Appendix D for assistance in determining the problem.
- 2) Correct the problem
- 3) Remove previous output files
- 4) Re-run the software

In case of a problematic error, which cannot be easily diagnosed, debug versions of GLAS_L0proc will be available for test use. This is, however, more of a developer procedure

than a user procedure. Software users should contact the GSAS Development Team for more instructions.

6.8 Sample GLAS_L0proc Control File

```
=GLAS_L0P
# granule_id = 6181582
INPUT_FILE=GLA00_003_20040219_180000_01_0012.DAT 130485600 130507061 3 1 0
# granule_id = 6181614
INPUT_FILE=GLA00_003_20040219_180000_01_0050.DAT 130485600 130507168 3 1 0
# granule_id = 6181598
INPUT_FILE=GLA00_003_20040219_180000_01_0022.DAT 130485600 130507184 3 1 0
INPUT_FILE=GLA00_003_20040219_180000_01_0023.DAT 130485600 130507184 3 1 0
# granule_id = 6181594
INPUT_FILE=GLA00_003_20040219_180000_01_0020.DAT 130485600 130507196 3 1 0
INPUT_FILE=GLA00_003_20040219_180000_01_0021.DAT 130485600 130507196 3 1 0
# granule_id = 6181590
INPUT_FILE=GLA00_003_20040219_180000_01_0015.DAT 130485600 130507199 3 1 0
INPUT_FILE=GLA00_003_20040219_180000_01_0017.DAT 130485600 130507199 3 1 0
INPUT_FILE=GLA00_003_20040219_180000_01_0019.DAT 130485600 130507199 3 1 0
INPUT_FILE=GLA00_003_20040219_180000_01_0026.DAT 130485600 130507199 3 1 0
INPUT_FILE=GLA00_003_20040219_180000_01_1984.DAT 130485600 130507199 3 1 0
# granule_id = 6181602
INPUT_FILE=GLA00_003_20040219_180001_01_0024.DAT 130485601 130507197 3 1 0
INPUT_FILE=GLA00_003_20040219_180001_01_0025.DAT 130485601 130507197 3 1 0
INPUT_FILE=GLA00_003_20040219_180001_01_0055.DAT 130485601 130507197 3 1 0
# granule_id = 6181618
# granule_id = 6181586
INPUT_FILE=GLA00_003_20040219_180433_01_0013.DAT 130485873 130507199 3 1 0
# granule_id = 6181606
# granule_id = 7509819
INPUT_FILE=anc07_026_01_0000.dat 0 0
INPUT_FILE=anc07_026_01_0001.dat 0 0
INPUT_FILE=anc07_026_01_0002.dat 0 0
INPUT_FILE=anc07_026_01_0003.dat 0 0
INPUT_FILE=anc07_026_01_0004.dat 0 0
INPUT_FILE=anc07_026_01_0005.dat 0 0
INPUT_FILE=anc07_026_01_0006.dat 0 0
# granule_id = 7328803
INPUT_FILE=ANC33_001_20051020_000000_01_0000.DAT 0 0
# granule_id = 6181334
INPUT_FILE=ANC47_003_20040219_224338_01_0013.DAT 130502618 130507199
# granule_id = 6181338
INPUT_FILE=ANC47_003_20040219_224339_01_0015.DAT 130502619 130507199
INPUT_FILE=ANC47_003_20040219_224339_01_0017.DAT 130502619 130507199
INPUT_FILE=ANC47_003_20040219_224339_01_0019.DAT 130502619 130507199
INPUT_FILE=ANC47_003_20040219_224339_01_0026.DAT 130502619 130507199
# granule_id = 6181340
INPUT_FILE=ANC47_003_20040219_224340_01_0020.DAT 130502620 130507196
INPUT_FILE=ANC47_003_20040219_224340_01_0021.DAT 130502620 130507196
# granule_id = 6181366
INPUT_FILE=ANC47_003_20040219_224340_01_1984.DAT 130502620 130507199
# granule_id = 6181348
INPUT_FILE=ANC47_003_20040219_224341_01_0024.DAT 130502621 130507197
INPUT_FILE=ANC47_003_20040219_224341_01_0025.DAT 130502621 130507197
INPUT_FILE=ANC47_003_20040219_224341_01_0055.DAT 130502621 130507197
# granule_id = 6181356
```

```
INPUT_FILE=ANC47_003_20040219_224344_01_0050.DAT 130502624 130507168
# granule_id = 6181344
INPUT_FILE=ANC47_003_20040219_224344_01_0022.DAT 130502624 130507184
INPUT_FILE=ANC47_003_20040219_224344_01_0023.DAT 130502624 130507184
# granule_id = 6181360
# granule_id = 6181330
INPUT_FILE=ANC47_003_20040219_224424_01_0012.DAT 130502664 130507061
# granule_id = 6181352
OUTPUT_FILE=ANC29_026_20040219_180000_01_0001.DAT 130485600 130507199
OUTPUT_FILE=ANC29_026_20040219_224340_01_0001.DAT 130502620 130507199
OUTPUT_FILE=ANC32_026_20040219_180000_01_0001.DAT 130485600 130507199
OUTPUT_FILE=ANC32_026_20040219_224340_01_0001.DAT 130502620 130507199
OUTPUT_FILE=ANC06_026_20060215_531686_01_GLAS_L0P.txt 130485600 130507199
```


Section 7

GLAS_L1A

7.1 Function

GLAS_L1A uses calibration and conversion equations determined during GLAS system testing to convert the measured counts within the GLA00 data into engineering units. This conversion process is detailed in the L1A ATBD. Some data do not require conversion and will be copied directly from the input to the appropriate output product. GLAS_L1A computes precise time-tagging information for each laser shot and produces quality assurance measurements used to determine the quality of the data processed.

GLAS_L1A reads GLAS Level-0 APID files, ANC20, ANC25, ANC29, ANC32, ANC33, ANC45 and ANC07 ancillary files to create GLAS L1A product files. The ANC29 file is used by GLAS_L1A to read the APID files in a time-aligned manner. The ANC32 file is used by GLAS_L1A to allow the computation of precise timing information via a GPS reference. The ANC20 file is used to compute location from the predicted orbit. The ANC07 files are read to initialize constants and error/status messages. The ANC45 files are used to initialize metadata/header information.

ANC29, ANC32, and the corresponding GLA00 APIDs should be considered a single, inseparable data set. It is critical that the appropriate ANC29/32 files be provided for each distinctive set of GLA00 APIDs provided as input. ANC29 is the index by which the APIDs are read in a time-aligned fashion. Without ANC29 files which correlate to the input GLA00 APIDs, processing will fail. Likewise, without ANC32 files, precision time computations will fail.

GLAS_L1A should be run after successful execution of GLAS_L0proc. GLAS_L1A permits multi-granule input or output files, input/output time selection and selected execution.

7.2 Input Files

Table 7-1 lists the inputs files to GLAS_L1A. Files which are specific to GLAS_L1A are documented in this section. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details.

Table 7-1 GLAS_L1A Inputs

File Spec	Type	Source	Short Description
gla00*_?????.dat	Level-0 APID	EDOS	Level-0 APID files (one file per each APID type).
anc07*_0000.dat	Static Ancillary	Science Team	Error file.
anc07*_0001.dat	Static Ancillary	Science Team	Global constants file.
anc07*_0005.dat	Static Ancillary	Science Team	L1A constants file.
anc25*.dat	Dynamic Ancillary	Science Team	GPS/UTC conversion file.

Table 7-1 GLAS_L1A Inputs (Continued)

File Spec	Type	Source	Short Description
anc29*.dat	Dynamic Ancillary	GLAS_L0proc	Index file correlating APID times.
anc32*.dat	Dynamic Ancillary	GLAS_L0proc	Frequency board to GPS time correlation file.
anc33*.dat	Dynamic Ancillary	Science Team	UTC time conversion file.
anc20*.dat	Dynamic Ancillary	UTexas	Predicted orbit file.
anc45*_0001.dat	Static Ancillary	Science Team	GLA01 metadata input file.
anc45*_0002.dat	Static Ancillary	Science Team	GLA02 metadata input file.
anc45*_0003.dat	Static Ancillary	Science Team	GLA03 metadata input file.
anc45*_0004.dat	Static Ancillary	Science Team	GLA04 metadata input file.
Control File	Control	ISIPS Operations	Control file.

7.2.1 Control File

The control file format and common elements are documented in Section 5 of this document. Elements specific to GLAS_L1A are described in this section.

The control file section delimiter for GLAS_L1A is:

=GLAS_L1A

In order to satisfy the partial execution requirement, GLAS_L1A can perform limited processing based on execution flags within the control file. The flags and the processes they control are defined in Table 7-2.

Table 7-2 GLAS_L1A Control Flags

Flag	Significance
L1A_PROCESS=None	Indicates that GLAS_L1A should perform no processing.
L1A_PROCESS=L_ALT	Indicates that GLAS_L1A should perform altimetry-related processing.
L1A_PROCESS=L_ATM	Indicates that GLAS_L1A should perform atmosphere-related processing.
L1A_PROCESS=L_ENG	Indicates that GLAS_L1A should perform engineering processing.
L1A_PROCESS=L_ATT	Indicates that GLAS_L1A should perform SRS/GPS/laser pointing processing.
L1A_PROCESS=ALL	Indicates that GLAS_L1A should perform all processing.

Combinations of the execution flags are allowed. For example, to perform both altimetry and engineering processing, the control file would have the following entries:

```
L1A_PROCESS=L_ALT
```

```
L1A_PROCESS=L_ENG
```

A control file option is available to designate that location information be taken from the APID data rather than the ANC20 predicted orbit file. This is useful for quick-look processing when the ANC20 is not yet available but should not be used for normal, production processing. To indicate that pass-thru processing should be used, add the following line to the control file:

```
POSITION=PASS_THRU
```

If this line is not included in the control file, ANC20 processing will occur by default.

7.3 Output Files

Table 7-3 lists the output files created by GLAS_L1A. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details regarding the output files

Granule boundaries are designated by specifying start and stop times on the OUTPUT_FILE control file entries.

Table 7-3 GLAS_L1A Outputs

File Spec	Type	Destination	Short Description
gla01*.dat	L1A Product	GLAS_L1A	GLAS L1A Altimetry product file. Contains the waveforms and the altimeter and timing data required to produce higher level range and elevation products.
gla02*.dat	L1A Product	GLAS_Atm	GLAS L1A Atmosphere product file. Contains the normalized backscatter, photon counter, cloud digitizer, timing, and location data required to produce the higher level atmosphere data products.
gla03*.dat	L1A Product	Archive	L1A Engineering product file. Contains the GLAS instrument's engineering and housekeeping data.
gla04*_0001.dat	L1A Products	UTEXAS	L1A LPA product file.
gla04*_0002.dat	L1A Products	UTEXAS	L1A LRS product file.
gla04*_0003.dat	L1A Products	UTEXAS	L1A GYRO product file.
gla04*_0004.dat	L1A Products	UTEXAS	L1A IST product file.
gla04*_0005.dat	L1A Products	UTEXAS	L1A BST product file.

Table 7-3 GLAS_L1A Outputs (Continued)

File Spec	Type	Destination	Short Description
gla04*_0006.dat	L1A Products	UTEXAS	L1A SCPA product file.
gla01*.qap	L1A Quality	QA	L1A Altimetry quality file.
gla02*.qap	L1A Quality	QA	L1A Atmosphere quality file.
gla03*.qap	L1A Quality	QA	L1A Engineering quality file.
anc06*.txt	Dynamic Ancillary	ISIPS Operations	Standard metadata/processing log file.

Of importance is the relationship between the execution flags and the output products. If a particular execution flag is present in the control file, then the corresponding output file type must be present as well. Table 7-4 shows the relationship between output products and execution flags.

Table 7-4 GLAS_L1A Execution Flags and Requisite Output Products

Execution Flag	Required Output Product
L1A_PROCESS=L_ALT	gla01*.dat, qap01*.dat
L1A_PROCESS=L_ATM	gla02*.dat, qap02*.dat
L1A_PROCESS=L_ENG	gla03*.dat, qap03*.dat
L1A_PROCESS=L_ATT	gla04*.dat

7.4 Execution Scenarios

GLAS_L1A supports multiple execution scenarios. Control files defining the requisite execution flags as well as input and output files are shown for each supported scenario. For brevity, only those control file entries unique to the particular scenario are shown. Additionally, even though multiple files of the same time may be needed, a single instance is shown.

Since the ANC29 and ANC32 files directly correspond to specific sets of APIDs, great care must be taken to ensure that the relative order of input files within the control file is correct. For example, the APID files which correspond to the first ANC29 file must be listed first in the control file relative to other APID files. Following the rule that input files are listed in time order guarantees the timing relationship between the APID files and the ANC29 files.

All execution scenarios require the L_ENG processes to provide values for the L_ALT and L_ATM processes. It is possible to run these scenarios without creating a GLA03 file by not specifying GLA03 as an output in the control file. This is not recommended since data used will not be checked by post-processing QA processes.

Time-selected processing may be performed by specifying specific start and stop times on the INPUT_FILE and OUTPUT_FILE control file entries.

During selective processing, only specific GLA00 APID input files are required. Processing will still occur if some of the APIDs are missing, but for full and complete processing those listed are required. Table 7-5 lists the execution flags and requisite GLA00 APID inputs.

Table 7-5 GLAS_L1A Input APIDs

Execution Flag	Input APIDs
L1A_PROCESS=L_ALT	12/13, 19, 21
L1A_PROCESS=L_ATM	12/13, 15, 17, 19
L1A_PROCESS=L_ENG	12/13, 15, 17, 19, 20, 21, 22, 23, 24, 25, 50, 55
L1A_PROCESS=L_ATT	12/13, 19, 26, 1984

7.4.1 Standard Processing

This scenario is used for normal L1A processing, creating GLA01, GLA02, GLA03 and GLA04 data from GLA00 APIDs and the requisite ANC files. In this scenario, all GLA00 APIDs are read. All input ANC files are required.

7.5 Startup and Termination

This is an overview of the steps necessary to run GLAS_L1A.

7.5.1 Setup a Runtime Directory

The suggested method of running GLAS_L1A is to create a temporary directory and link all necessary files into it. The SDMS will create a temporary directory and link all necessary files into it. For example, to setup a GLAS_L1A run, one would perform the following steps (Designate TEMP_DIR as the temporary directory and DATA_DIR as the location in which input data for this job has been staged):

```
mkdir $TEMP_DIR
cd $TEMP_DIR
ln -s $GLAS_HOME/bin/GLAS_L1A .
ln -s $GLAS_HOME/lib/* .
ln -s $GLAS_HOME/data/anc*.dat .
ln -s $DATA_DIR/*.dat .
```

7.5.2 Create a Control File

GLAS_L1A is designed to take the name of a control file as a command-line argument. The suggested method of creating a control file is by copying a template from the \$GLAS_HOME/data directory and modifying it with desired input/output filenames and data processing options.

```
cp $GLAS_HOME/data/cf_glas_l1a.ctl ./control_file_name
vi ./control_file_name
```

7.5.3 Run the PGE

Error and status messages will be displayed on screen (stdout) and recorded in the ANC06 file.

```
./GLAS_L1A control_file_name
```

7.5.4 Run-Time Statistics

GLAS_L1A processes 25 hours of GLAS data in approximately 3 hours. This may vary due to hardware load and data dependencies.

7.5.5 Termination

The process will terminate automatically upon reaching the end of all input data. The log/metadata file (ANC06*) must be examined to determine runtime success. Additionally, the process will return a result code to the operating system which may be used to programatically determine success or failure (0=success, 3=fatal error).

7.6 Error and Warning Messages

All GSAS error and warning messages are numerically listed in Appendix D.

7.7 Recovery Steps

If GLAS_L1A terminates with an error:

- 1) Review error and status messages in the ANC06 file or on stdout to determine source or location of problem. Refer to errors listed in Appendix D for assistance in determining the problem.
- 2) Correct the problem
- 3) Remove previous output files
- 4) Re-run the software

In case of a problematic error, which cannot be easily diagnosed, debug versions of GLAS_L1A will be available for test use. This is, however, more of a developer procedure than a user procedure. Software users should contact the GSAS Development Team for more instructions.

7.8 Sample GLAS_L1A Control File

```
=GLAS_L1A
PGE_VERSION=5.0
PASSID=4302 21030020105 120640160 120645960 3.6570864 3127
PASSID=4303 21030020106 120645960 120651760 -20.537048 3128
PASSID=4304 21030020107 120651760 120657561 -44.732086 3129
# granule_id = 6015263
INPUT_FILE=GLA00_003_20031028_120000_01_0012.DAT 120614400 120635476 3 1 0
# granule_id = 6015271
INPUT_FILE=GLA00_003_20031028_120000_01_0022.DAT 120614400 120635984 3 1 0
INPUT_FILE=GLA00_003_20031028_120000_01_0023.DAT 120614400 120635984 3 1 0
```

```
# granule_id = 6015273
INPUT_FILE=GLA00_003_20031028_120000_01_0024.DAT 120614400 120635997 3 1 0
INPUT_FILE=GLA00_003_20031028_120000_01_0025.DAT 120614400 120635997 3 1 0
INPUT_FILE=GLA00_003_20031028_120000_01_0055.DAT 120614400 120635997 3 1 0
# granule_id = 6015267
INPUT_FILE=GLA00_003_20031028_120000_01_0015.DAT 120614400 120635999 3 1 0
INPUT_FILE=GLA00_003_20031028_120000_01_0017.DAT 120614400 120635999 3 1 0
INPUT_FILE=GLA00_003_20031028_120000_01_0019.DAT 120614400 120635999 3 1 0
INPUT_FILE=GLA00_003_20031028_120000_01_0026.DAT 120614400 120635999 3 1 0
INPUT_FILE=GLA00_003_20031028_120000_01_1984.DAT 120614400 120635999 3 1 0
# granule_id = 6015269
INPUT_FILE=GLA00_003_20031028_120003_01_0020.DAT 120614403 120635999 3 1 0
INPUT_FILE=GLA00_003_20031028_120003_01_0021.DAT 120614403 120635999 3 1 0
# granule_id = 6015277
INPUT_FILE=GLA00_003_20031028_120016_01_0050.DAT 120614416 120635984 3 1 0
# granule_id = 6015280
# granule_id = 6015265
INPUT_FILE=GLA00_003_20031028_120104_01_0013.DAT 120614464 120635999 3 1 0
# granule_id = 6015292
INPUT_FILE=GLA00_003_20031028_180000_01_0013.DAT 120636000 120656882 3 1 0
# granule_id = 6015298
INPUT_FILE=GLA00_003_20031028_180000_01_0022.DAT 120636000 120657584 3 1 0
INPUT_FILE=GLA00_003_20031028_180000_01_0023.DAT 120636000 120657584 3 1 0
# granule_id = 6015294
INPUT_FILE=GLA00_003_20031028_180000_01_0015.DAT 120636000 120657599 3 1 0
INPUT_FILE=GLA00_003_20031028_180000_01_0017.DAT 120636000 120657599 3 1 0
INPUT_FILE=GLA00_003_20031028_180000_01_0019.DAT 120636000 120657599 3 1 0
INPUT_FILE=GLA00_003_20031028_180000_01_0026.DAT 120636000 120657599 3 1 0
INPUT_FILE=GLA00_003_20031028_180000_01_1984.DAT 120636000 120657599 3 1 0
# granule_id = 6015300
INPUT_FILE=GLA00_003_20031028_180001_01_0024.DAT 120636001 120657597 3 1 0
INPUT_FILE=GLA00_003_20031028_180001_01_0025.DAT 120636001 120657597 3 1 0
INPUT_FILE=GLA00_003_20031028_180001_01_0055.DAT 120636001 120657597 3 1 0
# granule_id = 6015296
INPUT_FILE=GLA00_003_20031028_180003_01_0020.DAT 120636003 120657599 3 1 0
INPUT_FILE=GLA00_003_20031028_180003_01_0021.DAT 120636003 120657599 3 1 0
# granule_id = 6015306
# granule_id = 6015304
INPUT_FILE=GLA00_003_20031028_180016_01_0050.DAT 120636016 120657584 3 1 0
# granule_id = 6015302
# granule_id = 6015290
INPUT_FILE=GLA00_003_20031028_180150_01_0012.DAT 120636110 120657599 3 1 0
# granule_id = 6015380
# granule_id = 7295559
INPUT_FILE=anc07_024_01_0000.dat 0 0
INPUT_FILE=anc07_024_01_0001.dat 0 0
INPUT_FILE=anc07_024_01_0002.dat 0 0
INPUT_FILE=anc07_024_01_0003.dat 0 0
INPUT_FILE=anc07_024_01_0004.dat 0 0
INPUT_FILE=anc07_024_01_0005.dat 0 0
INPUT_FILE=anc07_024_01_0006.dat 0 0
# granule_id = 6013024
INPUT_FILE=ANC20_004_20031027_235947_01_0001.DAT 120571187 120657587
# granule_id = 40170
INPUT_FILE=anc25_001_20021213_000000_01_0000.dat 0 0
# granule_id = 7348450
INPUT_FILE=ANC29_024_20031028_120000_01_0001.DAT 120614400 120635999
# granule_id = 7348452
INPUT_FILE=ANC29_024_20031028_180000_01_0001.DAT 120636000 120657599
```

```
# granule_id = 7348451
INPUT_FILE=ANC32_024_20031028_120000_01_0001.DAT 120614400 120635999
# granule_id = 7348453
INPUT_FILE=ANC32_024_20031028_180000_01_0001.DAT 120636000 120657599
# granule_id = 7328803
INPUT_FILE=ANC33_001_20051020_000000_01_0000.DAT 0 0
# granule_id = 7291335
INPUT_FILE=anc45_024_01_0001.dat 0 0
INPUT_FILE=anc45_024_01_0002.dat 0 0
INPUT_FILE=anc45_024_01_0003.dat 0 0
INPUT_FILE=anc45_024_01_0004.dat 0 0
# granule_id = 7344524
OUTPUT_FILE=GLA01_024_2103_002_0105_1_01_0001.DAT 120640968 120642248 24 1 1
# granule_id = 7344528
OUTPUT_FILE=GLA01_024_2103_002_0105_2_01_0001.DAT 120642248 120643864 24 1 2
# granule_id = 7344532
OUTPUT_FILE=GLA01_024_2103_002_0105_3_01_0001.DAT 120643864 120645152 24 1 3
# granule_id = 7344536
OUTPUT_FILE=GLA01_024_2103_002_0105_4_01_0001.DAT 120645152 120646768 24 1 4
# granule_id = 7344540
OUTPUT_FILE=GLA01_024_2103_002_0106_1_01_0001.DAT 120646768 120648048 24 1 1
# granule_id = 7344546
OUTPUT_FILE=GLA01_024_2103_002_0106_2_01_0001.DAT 120648048 120649664 24 1 2
# granule_id = 7344555
OUTPUT_FILE=GLA01_024_2103_002_0106_3_01_0001.DAT 120649664 120650952 24 1 3
# granule_id = 7344563
OUTPUT_FILE=GLA01_024_2103_002_0106_4_01_0001.DAT 120650952 120652568 24 1 4
# granule_id = 7344512
OUTPUT_FILE=GLA02_024_2103_002_0105_0_01_0001.DAT 120640968 120652568 24 1 0
# granule_id = 7344513
OUTPUT_FILE=GLA03_024_2103_002_0105_0_01_0001.DAT 120640968 120652568 24 1 0
# granule_id = 7344514
OUTPUT_FILE=GLA04_024_2103_002_0105_0_01_0001.DAT 120640968 120652568 24 1 0
OUTPUT_FILE=GLA04_024_2103_002_0105_0_01_0002.DAT 120640968 120652568 24 1 0
OUTPUT_FILE=GLA04_024_2103_002_0105_0_01_0003.DAT 120640968 120652568 24 1 0
OUTPUT_FILE=GLA04_024_2103_002_0105_0_01_0004.DAT 120640968 120652568 24 1 0
OUTPUT_FILE=GLA04_024_2103_002_0105_0_01_0005.DAT 120640968 120652568 24 1 0
OUTPUT_FILE=GLA04_024_2103_002_0105_0_01_0006.DAT 120640968 120652568 24 1 0
# granule_id = 7344525
OUTPUT_FILE=GLA01_024_2103_002_0105_1_01_0001.QAP 120640968 120642248 24 1 1
# granule_id = 7344529
OUTPUT_FILE=GLA01_024_2103_002_0105_2_01_0001.QAP 120642248 120643864 24 1 2
# granule_id = 7344533
OUTPUT_FILE=GLA01_024_2103_002_0105_3_01_0001.QAP 120643864 120645152 24 1 3
# granule_id = 7344537
OUTPUT_FILE=GLA01_024_2103_002_0105_4_01_0001.QAP 120645152 120646768 24 1 4
# granule_id = 7344541
OUTPUT_FILE=GLA01_024_2103_002_0106_1_01_0001.QAP 120646768 120648048 24 1 1
# granule_id = 7344549
OUTPUT_FILE=GLA01_024_2103_002_0106_2_01_0001.QAP 120648048 120649664 24 1 2
# granule_id = 7344557
OUTPUT_FILE=GLA01_024_2103_002_0106_3_01_0001.QAP 120649664 120650952 24 1 3
# granule_id = 7344565
OUTPUT_FILE=GLA01_024_2103_002_0106_4_01_0001.QAP 120650952 120652568 24 1 4
# granule_id = 7344515
OUTPUT_FILE=GLA02_024_2103_002_0105_0_01_0001.QAP 120640968 120652568 24 1 0
# granule_id = 7344516
OUTPUT_FILE=GLA03_024_2103_002_0105_0_01_0001.QAP 120640968 120652568 24 1 0
OUTPUT_FILE=ANC06_024_20051027_477035_01_GLAS_L1A.txt 0 0
```

L1A_PROCESS=ALL

Section 8

GLAS_Alt

8.1 Function

GLAS_Alt uses algorithms defined in the GSAS Detailed Design Document and related ATBDs to process the GLAS waveforms and compute elevation parameters. GLAS_Alt functionality is divided into waveform and elevation processes. The waveform processes compute waveform parameters which are stored in the GLA05 file. The elevation processes use the waveform parameters, and (optionally) L2 atmosphere parameters, to compute elevation measurements which are stored in the GLA06 file and on the region-specific GLA12-15 files.

GLAS_Alt reads GLAS Level-1A product files and requisite ancillary files to create GLAS Altimetry product files. In its most basic execution, GLAS_Alt reads the GLA01 products created by GLAS_L1A to create GLA05, GLA06, and GLA12-15 products. However, in some execution scenarios, GLAS_Alt can read the GLA05 or GLA06 files created in a previous execution to produce GLA06 and/or GLA12-15 products. GLAS_Alt uses the ANC07 files for constants and error/status messages. It uses the global Digital Elevation Model from ANC12 DEM files. It uses the ANC13 file to determine the geoid, ANC16/17 to calculate tides and ANC01 for meteorological information. It uses ANC09 for precision attitude, and ANC04/ANC08 for precision orbit information. It uses ANC27 for regional mask information to define what data are placed on the regional products (GLA12-15). It uses ANC45 files to initialize metadata/header information. ANC25 and ANC33 files are used for time delay and oscillator-based corrections. ANC51 files contain the SRTM digital elevation information. ANC52 files are used for saturation corrections for range, energy, and pulse width in GLA06 and GLA12-15.

GLAS_Alt should be run after successful execution of GLAS_L1A, met_util, and (optionally) GLAS_Atm. GLAS_Alt may be run all at once or in two separate executions: the first for waveform processing, the second for elevation processing. GLAS_Alt permits multi-granule input/output files, input/output time selection, selected execution, and reprocessing.

8.2 Input Files

Table 8-1 lists the inputs files to GLAS_Alt. Files which are specific to GLAS_Alt are documented in this section. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details.

Table 8-1 GLAS_Alt Inputs

File Spec	Type	Source	Short Description
anc01*.dat	Dynamic Ancillary	met_util	Meteorological subset files. Data sets at times before and after the time of the profile are interpolated to the time of the profile.
anc04*.dat	Dynamic Ancillary	UTexas	IERS Polar Motion and Earth Rotation Data File.
anc07*_0000.dat	Static Ancillary	Science Team	Error file.
anc07*_0001.dat	Static Ancillary	Science Team	Global constants file.
anc07*_0003.dat	Static Ancillary	Science Team	Waveform constants file. *Waveform only
anc07*_0004.dat	Static Ancillary	Science Team	Elevations constant file. *Elevation only
anc08*.dat	Dynamic Ancillary	UTexas	Precision Orbit file.
anc09*.dat	Dynamic Ancillary	UTexas	Precision Attitude file.
anc12*_0000.dat	Static Ancillary	Science Team	Coarse DEM file
anc12*_0001.dat	Static Ancillary	Science Team	Fine DEM file
anc13*.dat	Static Ancillary	Science Team	Geoid file *Elevation only.
anc16*.dat	Static Ancillary	Science Team	Load tide coefficients file *Elevation only.
anc17*.dat	Static Ancillary	Science Team	Ocean tide coefficients file *Elevation only.
anc25*.dat	Dynamic Ancillary	Science Team	GPS/UTC conversion file.
anc27*_0000.dat	Static Ancillary	Science Team	Coarse regional mask file.
anc27*_0001.dat	Static Ancillary	Science Team	Fine regional mask file.
anc33*.dat	Dynamic Ancillary	Science Team	UTC time conversion file.
anc41*.dat	Dynamic Ancillary	Science Team	JPL Planetary Ephemeris
anc45*_0001.dat	Static Ancillary	Science Team	GLA01 metadata input file. *Waveform only
anc45*_0005.dat	Static Ancillary	Science Team	GLA05 metadata input file.
anc45*_0006.dat	Static Ancillary	Science Team	GLA06 metadata input file.
anc45*_0012.dat	Static Ancillary	Science Team	GLA12 metadata input file.
anc45*_0013.dat	Static Ancillary	Science Team	GLA13 metadata input file.

Table 8-1 GLAS_Alt Inputs (Continued)

File Spec	Type	Source	Short Description
anc45*_0014.dat	Static Ancillary	Science Team	GLA14 metadata input file.
anc45*_0015.dat	Static Ancillary	Science Team	GLA15 metadata input file.
anc51*.dat	Static Ancillary	GSAS Internal	SRTM DEM Data, *Elevation only
anc52*_0001.dat	Static Ancillary	Instrument Team	Range Saturation Correction Table, *Elevation only
anc52*_0002.dat	Static Ancillary	Instrument Team	Energy Saturation Correction Table, *Elevation only
anc52*_0003.dat	Static Ancillary	Instrument Team	Pulse Width Saturation Correction Table, *Elevation only
Control File	Control	ISIPS Operations	Control file.
gla01*__.dat	Level-1A Product	GLAS_L1A	L1A Altimetry product file. *Waveform only.
gla05*__.dat	Level-1B Product	GLAS_Alt	L1B Waveform product file. *Elevation only
gla09*__.dat	Level-2 Product	GLAS_Atm	L2 Atmosphere product file. *Optional-Elevation only
gla11*__.dat	Level-2 Product	GLAS_Atm	L2 Atmosphere product file. *Optional-Elevation only
gla06*__.dat	Level-1B Product	GLAS_Alt	L1A Elevation product file. *Elevation only

8.2.1 Control File

The control file format and common elements are documented in Section 5 of this document. Elements specific to GLAS_Alt are described here.

The control file section delimiter for GLAS_Alt is:

```
=GLAS_Alt
```

In order to satisfy the partial execution requirement, GLAS_Alt can perform limited processing based on execution flags within the control file. The flags and the processes they control are defined in Table 8-2.

Table 8-2 GLAS_Alt Control Flags

Flag	Significance
WAVEFORM_PROCESS=None	Indicates that GLAS_Alt should perform no waveform processing.
WAVEFORM_PROCESS=All	Indicates that GLAS_Alt should perform waveform processing.
WAVEFORM_OPTIONS=w_noLandCalc	Indicates that GLAS_Alt should not process data using alternate parameters
WAVEFORM_OPTIONS=w_noOtherCalc	Indicates that GLAS_Alt should not process data using standard parameters
WAVEFORM_OPTIONS=w_noGeo	Indicates that GLAS_Alt should not compute latitude, longitude, or elevation, but, instead, will use pass-thru data from an input GLA05. This flag should only be used in a reprocessing scenario where a GLA05 is input.
ELEVATION_PROCESS=None	Indicates that GLAS_Alt should perform no elevation processing.
ELEVATION_PROCESS=E_CalcLoadTD	Indicates the Load Tide computations should be performed.
ELEVATION_PROCESS=E_CalcOceanTD	Indicates the Ocean Tide computations should be performed.
ELEVATION_PROCESS=E_CalcEarthTD	Indicates the Earth Tide computations should be performed.
ELEVATION_PROCESS=E_GetGeoid	Indicates the Geoid computations should be performed.
ELEVATION_PROCESS=E_CalcTrop	Indicates the tropospheric computations should be performed.
ELEVATION_PROCESS=E_IntrpPOD	Indicates the POD computations should be performed.
ELEVATION_PROCESS=E_CalcStdIR	Indicates the standard range computations should be performed.

Table 8-2 GLAS_Alt Control Flags (Continued)

Flag	Significance
ELEVATION_PROCESS=E_CalcLdIR	Indicates the land-specific range computations should be performed.
ELEVATION_PROCESS=E_CalcOclRc	Indicates the ocean-specific range computations should be performed.
ELEVATION_PROCESS=E_CalcSiIR	Indicates the sea ice-specific range computations should be performed.
ELEVATION_PROCESS=E_CalcIsIR	Indicates the ice sheet-specific range computations should be performed.
ELEVATION_PROCESS=E_CalcSpLoc	Indicates the spot location computations should be performed.
ELEVATION_PROCESS=E_AtmQF	Indicates the ATM Quality Flag should be used to generate the Elevations.
ELEVATION_PROCESS=E_CalcSlope	Indicates the slope computations should be performed.
ELEVATION_PROCESS=E_CalcRefl	Indicates the reflectance computations should be performed.
ELEVATION_PROCESS=E_ChckReg	Indicates the region-specific checks should be performed.
ELEVATION_PROCESS=E_CalcRegRng	Indicates the regional range computations should be performed.
ELEVATION_PROCESS=E_CalcRegParm	Indicates the region parameter computations should be performed.
ELEVATION_PROCESS=E_CalcDEM	Indicates the DEM computations should be performed.
ELEVATION_PROCESS=E_Supress_STRM	Indicates that GLAS_Alt should suppress STRM-related processing (and avoids required input of STRMs).
ELEVATION_PROCESS=ALL	Indicates that GLAS_Alt should perform all elevation processing.

Combinations of the execution flags are allowed. For example, to perform both waveform and elevation processing, the control file would have the following entries:

```
WAVEFORM_PROCESS=ALL
ELEVATION_PROCESS=ALL
```

A control file option is available to designate that location information be taken from the input data rather than the ANC04/08/09 geolocation file. This is useful for quick-look processing when the geolocation files are not yet available but should not be used for normal, production processing. In addition, this option is not very useful for elevation processing since elevation is highly location and range dependent.

To indicate that pass-thru processing should be used, add the following line to the control file:

```
POSITION=PASS_THRU
```

If this line is not included in the control file, geolocation processing will occur by default.

8.3 Output Files

Table 8-3 lists the outputs created by GLAS_Alt. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details regarding the output files

Granule boundaries are designated by specifying start and stop times on the OUTPUT_FILE control file entries.

Table 8-3 GLAS_Alt Outputs

File Spec	Type	Destination	Short Description
gla05*.dat	L1B Alt Product	Archive/GLAS_Alt	The level 1B waveform parameterization product file. Contains the output from the waveform characterization procedure and other parameters required to calculate surface slope and relief characteristics.
gla06*.dat	L2 Alt Product	Archive/GLAS_Alt	L1B elevation data product file. Contains the surface elevation, surface roughness assuming no slope, surface slope assuming no roughness and geodetic and atmospheric corrections for the range.
gla12*.dat	L2 Alt Product	Archive	L2 ice sheet altimetry product file. Contains the ice sheet elevation and elevation distribution calculated from algorithms fine-tuned for ice sheet returns.
gla13*.dat	L2 Alt Product	Archive	L2 sea ice altimetry product file. Contains the sea ice freeboard and sea ice roughness calculated from algorithms fine-tuned for sea ice returns.
gla14*.dat	L2 Alt Product	Archive	L2 land altimetry product file. Contains the land elevation and land elevation distribution calculated from algorithms fine-tuned for land returns.

Table 8-3 GLAS_Alt Outputs (Continued)

File Spec	Type	Destination	Short Description
gla15*.dat	L2 Alt Product	Archive	L2 ocean altimetry product file. Contains ocean elevation and small-scale roughness calculated from algorithms fine-tuned for ocean returns.
gla05*.qap	L1B Alt Quality	QA	L1B waveform parameterization quality file.
gla06*.qap	L2 Alt Quality	QA	L2 elevation data quality file.
gla12*.qap	L2 Alt Quality	QA	L2 ice sheet altimetry quality file.
gla13*.qap	L2 Alt Quality	QA	L2 sea ice altimetry quality file.
gla14*.qap	L2 Alt Quality	QA	L2 land altimetry quality file.
gla15*.qap	L2 Alt Quality	QA	L2 ocean altimeter quality file.
anc06*.txt	Dynamic Ancillary	ISIPS Operations	Standard metadata/processing log file.

Of importance is the relationship between the execution flags and the output products. If a particular execution flag is present in the control file, then the corresponding output file type must be present as well. Table 8-4 shows the relationship between output products and execution flags. These relationships will be more fully defined in the next section.

Table 8-4 GLAS_Alt Execution Flags and Output Products

Execution Flag	Required Output Product
WAVEFORM_PROCESS=ALL	gla05*.dat, gla05*.qap
ELEVATION_PROCESS=ALL	gla06*.dat, gla06*.qap, gla12*.dat, gla12*.qap, gla13*.dat, gla13*.qap, gla14*.dat, gla14*.qap, gla15*.dat, gla15*.qap

8.4 Processing and Reprocessing Scenarios

GLAS_Alt supports full and partial processing and reprocessing scenarios. Control file entries are shown for each supported scenario defining the requisite execution flags as well as input and output files. Only those control file entries unique to the particular processing scenario are shown for brevity. Additionally, even though multiple files of the same time may be needed, a single instance is shown.

Time-selected processing may also be performed by specifying specific start and stop times on the INPUT_FILE and OUTPUT_FILE control file entries.

8.4.1 Full Processing

This scenario is used to create both waveform and elevation products from GLA01 and the requisite ANC files. All files listed in Table 8-1 and Table 8-3 are required.

8.4.2 Partial Processing: Waveform Only

This scenario is used to process only Waveform data, creating GLA05 data from selected GLA01 products and the requisite ANC files. All files listed in Table 8-1 and Table 8-3, except those listed as Elevation-only, are required. The following execution flag is required:

WAVEFORM_PROCESS=ALL

8.4.3 Partial Processing/Re-Processing: Elevation Only

This scenario is used to process only Elevation data, creating GLA06 and GLA12-15 data from selected GLA05 products (created during a previous execution of GLAS_Alt) and the requisite ANC files. All files listed in Table 8-1 and Table 8-3, except those listed as Waveform-only, are required. The following execution flag is required:

ELEVATION_PROCESS=ALL

8.4.4 Predict Orbit Processing: Waveform Only

This scenario is used to quickly process Waveform data when only predicted orbit (ANC20) is available. The input files listed in Table 8-5 are required.

Table 8-5 GLAS_Alt Predict Waveform Inputs

File Spec	Type	Source	Short Description
anc07*_0000.dat	Static Ancillary	Science Team	Error file.
anc07*_0001.dat	Static Ancillary	Science Team	Global constants file.
anc07*_0003.dat	Static Ancillary	Science Team	Waveform constants file.
anc20*.dat	Dynamic Ancillary	UTexas	Predict Orbit file.
anc25*.dat	Dynamic Ancillary	Science Team	GPS/UTC conversion file.
anc27*_0000.dat	Static Ancillary	Science Team	Coarse regional mask file.
anc27*_0001.dat	Static Ancillary	Science Team	Fine regional mask file.
anc33*.dat	Dynamic Ancillary	Science Team	UTC time conversion file.
anc45*_0001.dat	Static Ancillary	Science Team	GLA01 metadata input file. *Waveform only
anc45*_0005.dat	Static Ancillary	Science Team	GLA05 metadata input file.
Control File	Control	ISIPS Operations	Control file.
gla01*__.dat	Level-1A Product	GLAS_L1A	L1A Altimetry product file.

8.4.5 Predict Orbit Processing: Elevation Only

This scenario is used to quickly process Elevation data when only predicted orbit (ANC20) is available. The input files listed in Table 8-6 are required.

Table 8-6 GLAS_Alt Predict Elevation Inputs

File Spec	Type	Source	Short Description
anc07*_0000.dat	Static Ancillary	Science Team	Error file.
anc07*_0001.dat	Static Ancillary	Science Team	Global constants file.
anc07*_0004.dat	Static Ancillary	Science Team	Elevations constant file.
anc12*_0000.dat	Static Ancillary	Science Team	Coarse DEM file.
anc12*_0001.dat	Static Ancillary	Science Team	Fine DEM file
anc13*.dat	Static Ancillary	Science Team	Geoid file
anc16*.dat	Static Ancillary	Science Team	Load tide coefficients file
anc17*.dat	Static Ancillary	Science Team	Ocean tide coefficients file
anc20*.dat	Dynamic Ancillary	UTexas	Predict Orbit file.
anc25*.dat	Dynamic Ancillary	Science Team	GPS/UTC conversion file.
anc27*_0000.dat	Static Ancillary	Science Team	Coarse regional mask file.
anc27*_0001.dat	Static Ancillary	Science Team	Fine regional mask file.
anc33*.dat	Dynamic Ancillary	Science Team	UTC time conversion file.
anc41*.dat	Dynamic Ancillary	Science Team	JPL Planetary Ephemeris
anc45*_0005.dat	Static Ancillary	Science Team	GLA05 metadata input file.
anc45*_0006.dat	Static Ancillary	Science Team	GLA06 metadata input file.
anc45*_0012.dat	Static Ancillary	Science Team	GLA12 metadata input file.
anc45*_0013.dat	Static Ancillary	Science Team	GLA13 metadata input file.
anc45*_0014.dat	Static Ancillary	Science Team	GLA14 metadata input file.
anc45*_0015.dat	Static Ancillary	Science Team	GLA15 metadata input file.
Control File	Control	ISIPS Operations	Control file.
gla05*_*.dat	Level-1B Product	GLAS_Alt	L1B Waveform product file.
gla09*_*.dat	Level-2 Product	GLAS_Atm	L2 Atmosphere product file. (* Optional)
gla11*_*.dat	Level-2 Product	GLAS_Atm	L2 Atmosphere product file. (* Optional)

The following control flags are required:

WAVEFORM_PROCESS=NONE

```

ELEVATION_PROCESS=E_IntrpPOD
ELEVATION_PROCESS=E_CalcDEM
ELEVATION_PROCESS=E_CalcSlope
ELEVATION_PROCESS=E_CalcLoadTD
ELEVATION_PROCESS=E_CalcOceanTD
ELEVATION_PROCESS=E_CalcEarthTD
ELEVATION_PROCESS=E_GetGeoid
ELEVATION_PROCESS=E_Supress_STRM
SURFACE_TYPE=ALL

```

8.4.6 Re-Processing: Elevation Region-Specific Only

This scenario is used to recreate the GLA12-15 region-specific products from a previously created GLA05/GLA06 and the requisite ANC files. All files listed in Table 8-1 and Table 8-3, except those listed as Waveform-only, are required, with the following exceptions:

- GLA06 is required as an input but not an output.
- Tide files (ANC16, ANC17) are not required.
- The geoid file (ANC13) is not required.
- The meteorological files (ANC01) are not required.

The following execution flags are required:

```

ELEVATION_PROCESS=E_GetGeoid
ELEVATION_PROCESS=E_IntrpPOD
ELEVATION_PROCESS=E_CalcStdIR
ELEVATION_PROCESS=E_CalcLdIR
ELEVATION_PROCESS=E_CalcOcIR
ELEVATION_PROCESS=E_CalcSiIR
ELEVATION_PROCESS=E_CalcIsIR
ELEVATION_PROCESS=E_CALCSpLoc
ELEVATION_PROCESS=E_AtmQF
ELEVATION_PROCESS=E_CalcSlope
ELEVATION_PROCESS=E_CalcRefl
ELEVATION_PROCESS=E_ChckReg
ELEVATION_PROCESS=E_CalcRegRng
ELEVATION_PROCESS=E_CalcRegParm
ELEVATION_PROCESS=E_CalcDEM

```

8.5 Startup and Termination

This is an overview of the steps necessary to run GLAS_Alt.

8.5.1 Setup a Runtime Directory

The suggested method of running GLAS_Alt is to create a temporary directory and link all necessary files into it. The SDMS will create a temporary directory and link all necessary files into it. For example, to setup a GLAS_Alt run, one would perform the following steps (Designate TEMP_DIR as the temporary directory and DATA_DIR as the location in which input data for this job has been staged):

```

mkdir $TEMP_DIR
cd $TEMP_DIR
ln -s $GLAS_HOME/bin/GLAS_Alt .

```

```
ln -s $GLAS_HOME/lib/* .
ln -s $GLAS_HOME/data/anc*.dat .
ln -s $DATA_DIR/*.dat .
```

8.5.2 Create a Control File

GLAS_Alt is designed to take the name of a control file as a command-line argument. The suggested method of creating a control file is by copying a template from the \$GLAS_HOME/data directory and modifying it with desired input/output filenames and data processing options.

```
cp $GLAS_HOME/data/cf_glas_alt_(wf|elev).ctl ./control_file_name
vi ./control_file_name
```

8.5.3 Run the PGE

Error and status messages will be displayed on screen (stdout) and recorded in the ANC06 file.

```
./GLAS_Alt control_file_name
```

8.5.4 Run-Time Statistics

GLAS_Alt processes 25 hours of GLAS data in approximately 12 hours for full waveform processing. GLAS_Alt processes 25 hours of GLAS data in approximately 1.5 hours for full elevation processing. This may vary due to hardware load and data dependencies.

8.5.5 Termination

The process will terminate automatically upon reaching the end of all input data. The log/metadata file (ANC06*) must be examined to determine runtime success. Additionally, the process will return a result code to the operating system which may be used to programmatically determine success or failure (0=success, 3=fatal error).

8.6 Error and Warning Messages

All GSAS error and warning messages are numerically listed in Appendix D.

8.7 Recovery Steps

If GLAS_Alt terminates with an error:

- 1) Review error and status messages in the ANC06 file or on stdout to determine source or location of problem. Refer to errors listed in Appendix D for assistance in determining the problem.
- 2) Correct the problem
- 3) Remove previous output files
- 4) Re-run the software

In case of a problematic error, which cannot be easily diagnosed, debug versions of GLAS_Alt will be available for test use. This is, however, more of a developer procedure than

a user procedure. Software users should contact the GSAS Development Team for more instructions.

8.8 Sample GLAS_Alt Waveform Control File

```
=GLAS_Alt
PGE_VERSION=5.0
PASSID=3944 21030011101 118564084 118569884 25.45729 4123
PASSID=3945 21030011102 118569884 118575683 1.2635106 4124
# granule_id = 6489200
INPUT_FILE=ANC04_005_20031003_235947_02_0001.DAT 118497587 118583987
# granule_id = 7309164
INPUT_FILE=GLA01_024_2103_001_1101_4_01_0001.DAT 118569075 118570691 24 1 4
# granule_id = 7295559
INPUT_FILE=anc07_024_01_0000.dat 0 0
INPUT_FILE=anc07_024_01_0001.dat 0 0
INPUT_FILE=anc07_024_01_0002.dat 0 0
INPUT_FILE=anc07_024_01_0003.dat 0 0
INPUT_FILE=anc07_024_01_0004.dat 0 0
INPUT_FILE=anc07_024_01_0005.dat 0 0
INPUT_FILE=anc07_024_01_0006.dat 0 0
# granule_id = 6489212
INPUT_FILE=ANC08_006_20031003_235947_01_0001.DAT 118497587 118583987
# granule_id = 6890571
INPUT_FILE=ANC09_015_20031003_235947_01_0001.DAT 118497587 118583987
# granule_id = 6074352
INPUT_FILE=anc12_004_01_0000.dat 0 0
INPUT_FILE=anc12_004_01_0001.dat 0 0
# granule_id = 40170
INPUT_FILE=anc25_001_20021213_000000_01_0000.dat 0 0
# granule_id = 7615
INPUT_FILE=anc27_001_01_0000.dat 0 0
INPUT_FILE=anc27_001_01_0001.dat 0 0
# granule_id = 7266774
INPUT_FILE=ANC33_001_20050915_000000_01_0000.DAT 0 0
# granule_id = 139831
INPUT_FILE=anc41_009_01_0000.dat 0 0
# granule_id = 7291335
INPUT_FILE=anc45_024_01_0001.dat 0 0
INPUT_FILE=anc45_024_01_0002.dat 0 0
INPUT_FILE=anc45_024_01_0003.dat 0 0
INPUT_FILE=anc45_024_01_0004.dat 0 0
INPUT_FILE=anc45_024_01_0005.dat 0 0
INPUT_FILE=anc45_024_01_0006.dat 0 0
INPUT_FILE=anc45_024_01_0007.dat 0 0
INPUT_FILE=anc45_024_01_0008.dat 0 0
INPUT_FILE=anc45_024_01_0009.dat 0 0
INPUT_FILE=anc45_024_01_0010.dat 0 0
INPUT_FILE=anc45_024_01_0011.dat 0 0
INPUT_FILE=anc45_024_01_0012.dat 0 0
INPUT_FILE=anc45_024_01_0013.dat 0 0
INPUT_FILE=anc45_024_01_0014.dat 0 0
INPUT_FILE=anc45_024_01_0015.dat 0 0
# granule_id = 7309849
OUTPUT_FILE=GLA05_024_2103_001_1101_4_01_0001.DAT 118569075 118570691 24 1 4
# granule_id = 7309850
OUTPUT_FILE=GLA05_024_2103_001_1101_4_01_0001.QAP 118569075 118570691 24 1 4
```

```
OUTPUT_FILE=ANC06_024_20051019_467734_01_GLAS_Alt.txt 0 0
WAVEFORM_PROCESS=ALL
ELEVATION_PROCESS=NONE
```

8.9 Sample GLAS_Alt Elevation Control File

```
=GLAS_Alt
PGE_VERSION=ACC
PASSID=6127 21070020085 131223570 131229369 127.56509 3107
PASSID=6128 21070020086 131229369 131235169 103.36963 3108
PASSID=6129 21070020087 131235169 131240968 79.17347 3109
PASSID=6130 21070020088 131240968 131246767 54.9781 3110
PASSID=6131 21070020089 131246767 131252566 30.783556 3111
PASSID=6132 21070020090 131252566 131258365 6.589782 3112
PASSID=6133 21070020091 131258365 131264164 -17.603912 3113
PASSID=6134 21070020092 131264164 131269963 -41.798492 3114
PASSID=6135 21070020093 131269963 131275762 -65.99344 3115
PASSID=6136 21070020094 131275762 131281561 -90.187225 3116
PASSID=6137 21070020095 131281561 131287360 -114.38165 3117
PASSID=6138 21070020096 131287360 131293159 -138.57704 3118
PASSID=6139 21070020097 131293159 131298958 -162.77257 3119
PASSID=6140 21070020098 131298958 131304757 173.03156 3120
PASSID=6141 21070020099 131304757 131310556 148.83627 3121
# granule_id = 7558395
INPUT_FILE=GLA05_532_2107_002_0085_1_01_0001.DAT 131224377 131225658 532 1 1
# granule_id = 7558397
INPUT_FILE=GLA05_532_2107_002_0085_2_01_0001.DAT 131225658 131227274 532 1 2
# granule_id = 7558399
INPUT_FILE=GLA05_532_2107_002_0085_3_01_0001.DAT 131227274 131228561 532 1 3
# granule_id = 7558401
INPUT_FILE=GLA05_532_2107_002_0085_4_01_0001.DAT 131228561 131230177 532 1 4
# granule_id = 7558403
INPUT_FILE=GLA05_532_2107_002_0086_1_01_0001.DAT 131230177 131231457 532 1 1
# granule_id = 7558405
INPUT_FILE=GLA05_532_2107_002_0086_2_01_0001.DAT 131231457 131233073 532 1 2
# granule_id = 7558407
INPUT_FILE=GLA05_532_2107_002_0086_3_01_0001.DAT 131233073 131234360 532 1 3
# granule_id = 7558409
INPUT_FILE=GLA05_532_2107_002_0086_4_01_0001.DAT 131234360 131235976 532 1 4
# granule_id = 7558411
INPUT_FILE=GLA05_532_2107_002_0087_1_01_0001.DAT 131235976 131237256 532 1 1
# granule_id = 7558413
INPUT_FILE=GLA05_532_2107_002_0087_2_01_0001.DAT 131237256 131238873 532 1 2
# granule_id = 7558415
INPUT_FILE=GLA05_532_2107_002_0087_3_01_0001.DAT 131238873 131240159 532 1 3
# granule_id = 7558417
INPUT_FILE=GLA05_532_2107_002_0087_4_01_0001.DAT 131240159 131241775 532 1 4
# granule_id = 7558419
INPUT_FILE=GLA05_532_2107_002_0088_1_01_0001.DAT 131241775 131243055 532 1 1
# granule_id = 7558421
INPUT_FILE=GLA05_532_2107_002_0088_2_01_0001.DAT 131243055 131244672 532 1 2
# granule_id = 7558423
INPUT_FILE=GLA05_532_2107_002_0088_3_01_0001.DAT 131244672 131245958 532 1 3
# granule_id = 7558425
INPUT_FILE=GLA05_532_2107_002_0088_4_01_0001.DAT 131245958 131247574 532 1 4
# granule_id = 7558427
INPUT_FILE=GLA05_532_2107_002_0089_1_01_0001.DAT 131247574 131248854 532 1 1
# granule_id = 7558429
```

```
INPUT_FILE=GLA05_532_2107_002_0089_2_01_0001.DAT 131248854 131250471 532 1 2
# granule_id = 7558431
INPUT_FILE=GLA05_532_2107_002_0089_3_01_0001.DAT 131250471 131251757 532 1 3
# granule_id = 7558433
INPUT_FILE=GLA05_532_2107_002_0089_4_01_0001.DAT 131251757 131253373 532 1 4
# granule_id = 7558435
INPUT_FILE=GLA05_532_2107_002_0090_1_01_0001.DAT 131253373 131254653 532 1 1
# granule_id = 7558437
INPUT_FILE=GLA05_532_2107_002_0090_2_01_0001.DAT 131254653 131256270 532 1 2
# granule_id = 7558439
INPUT_FILE=GLA05_532_2107_002_0090_3_01_0001.DAT 131256270 131257556 532 1 3
# granule_id = 7558441
INPUT_FILE=GLA05_532_2107_002_0090_4_01_0001.DAT 131257556 131259172 532 1 4
# granule_id = 7558443
INPUT_FILE=GLA05_532_2107_002_0091_1_01_0001.DAT 131259172 131260452 532 1 1
# granule_id = 7558445
INPUT_FILE=GLA05_532_2107_002_0091_2_01_0001.DAT 131260452 131262068 532 1 2
# granule_id = 7558447
INPUT_FILE=GLA05_532_2107_002_0091_3_01_0001.DAT 131262068 131263355 532 1 3
# granule_id = 7558449
INPUT_FILE=GLA05_532_2107_002_0091_4_01_0001.DAT 131263355 131264971 532 1 4
# granule_id = 7558451
INPUT_FILE=GLA05_532_2107_002_0092_1_01_0001.DAT 131264971 131266251 532 1 1
# granule_id = 7558453
INPUT_FILE=GLA05_532_2107_002_0092_2_01_0001.DAT 131266251 131267867 532 1 2
# granule_id = 7558455
INPUT_FILE=GLA05_532_2107_002_0092_3_01_0001.DAT 131267867 131269154 532 1 3
# granule_id = 7558457
INPUT_FILE=GLA05_532_2107_002_0092_4_01_0001.DAT 131269154 131270770 532 1 4
# granule_id = 7558459
INPUT_FILE=GLA05_532_2107_002_0093_1_01_0001.DAT 131270770 131272050 532 1 1
# granule_id = 7558461
INPUT_FILE=GLA05_532_2107_002_0093_2_01_0001.DAT 131272050 131273667 532 1 2
# granule_id = 7558463
INPUT_FILE=GLA05_532_2107_002_0093_3_01_0001.DAT 131273667 131274953 532 1 3
# granule_id = 7558465
INPUT_FILE=GLA05_532_2107_002_0093_4_01_0001.DAT 131274953 131276569 532 1 4
# granule_id = 7558467
INPUT_FILE=GLA05_532_2107_002_0094_1_01_0001.DAT 131276569 131277849 532 1 1
# granule_id = 7558469
INPUT_FILE=GLA05_532_2107_002_0094_2_01_0001.DAT 131277849 131279466 532 1 2
# granule_id = 7558471
INPUT_FILE=GLA05_532_2107_002_0094_3_01_0001.DAT 131279466 131280752 532 1 3
# granule_id = 7558473
INPUT_FILE=GLA05_532_2107_002_0094_4_01_0001.DAT 131280752 131282368 532 1 4
# granule_id = 7558475
INPUT_FILE=GLA05_532_2107_002_0095_1_01_0001.DAT 131282368 131283649 532 1 1
# granule_id = 7558477
INPUT_FILE=GLA05_532_2107_002_0095_2_01_0001.DAT 131283649 131285265 532 1 2
# granule_id = 7558479
INPUT_FILE=GLA05_532_2107_002_0095_3_01_0001.DAT 131285265 131286551 532 1 3
# granule_id = 7558481
INPUT_FILE=GLA05_532_2107_002_0095_4_01_0001.DAT 131286551 131288167 532 1 4
# granule_id = 7558483
INPUT_FILE=GLA05_532_2107_002_0096_1_01_0001.DAT 131288167 131289448 532 1 1
# granule_id = 7558485
INPUT_FILE=GLA05_532_2107_002_0096_2_01_0001.DAT 131289448 131291064 532 1 2
# granule_id = 7558487
INPUT_FILE=GLA05_532_2107_002_0096_3_01_0001.DAT 131291064 131292350 532 1 3
```

```
# granule_id = 7558489
INPUT_FILE=GLA05_532_2107_002_0096_4_01_0001.DAT 131292350 131293966 532 1 4
# granule_id = 7558491
INPUT_FILE=GLA05_532_2107_002_0097_1_01_0001.DAT 131293966 131295247 532 1 1
# granule_id = 7558493
INPUT_FILE=GLA05_532_2107_002_0097_2_01_0001.DAT 131295247 131296863 532 1 2
# granule_id = 7558495
INPUT_FILE=GLA05_532_2107_002_0097_3_01_0001.DAT 131296863 131298150 532 1 3
# granule_id = 7558497
INPUT_FILE=GLA05_532_2107_002_0097_4_01_0001.DAT 131298150 131299765 532 1 4
# granule_id = 7558499
INPUT_FILE=GLA05_532_2107_002_0098_1_01_0001.DAT 131299765 131301046 532 1 1
# granule_id = 7558501
INPUT_FILE=GLA05_532_2107_002_0098_2_01_0001.DAT 131301046 131302662 532 1 2
# granule_id = 7558503
INPUT_FILE=GLA05_532_2107_002_0098_3_01_0001.DAT 131302662 131303949 532 1 3
# granule_id = 7558505
INPUT_FILE=GLA05_532_2107_002_0098_4_01_0001.DAT 131303949 131305564 532 1 4
# granule_id = 7559242
INPUT_FILE=GLA09_532_2107_002_0085_0_01_0001.DAT 131224377 131305564 532 1 0
# granule_id = 7559244
INPUT_FILE=GLA11_532_2107_002_0085_0_01_0001.DAT 131224377 131305564 532 1 0
# granule_id = 7552729
INPUT_FILE=ANC01_005_20040228_000000_01_0000.DAT 131198400 131241600
INPUT_FILE=ANC01_005_20040228_000000_01_0001.DAT 131198400 131241600
INPUT_FILE=ANC01_005_20040228_000000_01_0002.DAT 131198400 131241600
INPUT_FILE=ANC01_005_20040228_000000_01_0003.DAT 131198400 131241600
INPUT_FILE=ANC01_005_20040228_000000_01_0004.DAT 131198400 131241600
INPUT_FILE=ANC01_005_20040228_000000_01_0005.DAT 131198400 131241600
INPUT_FILE=ANC01_005_20040228_000000_01_0006.DAT 131198400 131241600
INPUT_FILE=ANC01_005_20040228_000000_01_0007.DAT 131198400 131241600
INPUT_FILE=ANC01_005_20040228_000000_01_0008.DAT 131198400 131241600
INPUT_FILE=ANC01_005_20040228_000000_01_0009.DAT 131198400 131241600
INPUT_FILE=ANC01_005_20040228_000000_01_0010.DAT 131198400 131241600
# granule_id = 7552730
INPUT_FILE=ANC01_005_20040228_060000_01_0000.DAT 131220000 131263200
INPUT_FILE=ANC01_005_20040228_060000_01_0001.DAT 131220000 131263200
INPUT_FILE=ANC01_005_20040228_060000_01_0002.DAT 131220000 131263200
INPUT_FILE=ANC01_005_20040228_060000_01_0003.DAT 131220000 131263200
INPUT_FILE=ANC01_005_20040228_060000_01_0004.DAT 131220000 131263200
INPUT_FILE=ANC01_005_20040228_060000_01_0005.DAT 131220000 131263200
INPUT_FILE=ANC01_005_20040228_060000_01_0006.DAT 131220000 131263200
INPUT_FILE=ANC01_005_20040228_060000_01_0007.DAT 131220000 131263200
INPUT_FILE=ANC01_005_20040228_060000_01_0008.DAT 131220000 131263200
INPUT_FILE=ANC01_005_20040228_060000_01_0009.DAT 131220000 131263200
INPUT_FILE=ANC01_005_20040228_060000_01_0010.DAT 131220000 131263200
# granule_id = 7552731
INPUT_FILE=ANC01_005_20040228_120000_01_0000.DAT 131241600 131284800
INPUT_FILE=ANC01_005_20040228_120000_01_0001.DAT 131241600 131284800
INPUT_FILE=ANC01_005_20040228_120000_01_0002.DAT 131241600 131284800
INPUT_FILE=ANC01_005_20040228_120000_01_0003.DAT 131241600 131284800
INPUT_FILE=ANC01_005_20040228_120000_01_0004.DAT 131241600 131284800
INPUT_FILE=ANC01_005_20040228_120000_01_0005.DAT 131241600 131284800
INPUT_FILE=ANC01_005_20040228_120000_01_0006.DAT 131241600 131284800
INPUT_FILE=ANC01_005_20040228_120000_01_0007.DAT 131241600 131284800
INPUT_FILE=ANC01_005_20040228_120000_01_0008.DAT 131241600 131284800
INPUT_FILE=ANC01_005_20040228_120000_01_0009.DAT 131241600 131284800
INPUT_FILE=ANC01_005_20040228_120000_01_0010.DAT 131241600 131284800
# granule_id = 7552737
```

```
INPUT_FILE=ANC01_005_20040228_180000_01_0000.DAT 131263200 131306400
INPUT_FILE=ANC01_005_20040228_180000_01_0001.DAT 131263200 131306400
INPUT_FILE=ANC01_005_20040228_180000_01_0002.DAT 131263200 131306400
INPUT_FILE=ANC01_005_20040228_180000_01_0003.DAT 131263200 131306400
INPUT_FILE=ANC01_005_20040228_180000_01_0004.DAT 131263200 131306400
INPUT_FILE=ANC01_005_20040228_180000_01_0005.DAT 131263200 131306400
INPUT_FILE=ANC01_005_20040228_180000_01_0006.DAT 131263200 131306400
INPUT_FILE=ANC01_005_20040228_180000_01_0007.DAT 131263200 131306400
INPUT_FILE=ANC01_005_20040228_180000_01_0008.DAT 131263200 131306400
INPUT_FILE=ANC01_005_20040228_180000_01_0009.DAT 131263200 131306400
INPUT_FILE=ANC01_005_20040228_180000_01_0010.DAT 131263200 131306400
# granule_id = 7552739
INPUT_FILE=ANC01_005_20040229_000000_01_0000.DAT 131284800 131328000
INPUT_FILE=ANC01_005_20040229_000000_01_0001.DAT 131284800 131328000
INPUT_FILE=ANC01_005_20040229_000000_01_0002.DAT 131284800 131328000
INPUT_FILE=ANC01_005_20040229_000000_01_0003.DAT 131284800 131328000
INPUT_FILE=ANC01_005_20040229_000000_01_0004.DAT 131284800 131328000
INPUT_FILE=ANC01_005_20040229_000000_01_0005.DAT 131284800 131328000
INPUT_FILE=ANC01_005_20040229_000000_01_0006.DAT 131284800 131328000
INPUT_FILE=ANC01_005_20040229_000000_01_0007.DAT 131284800 131328000
INPUT_FILE=ANC01_005_20040229_000000_01_0008.DAT 131284800 131328000
INPUT_FILE=ANC01_005_20040229_000000_01_0009.DAT 131284800 131328000
INPUT_FILE=ANC01_005_20040229_000000_01_0010.DAT 131284800 131328000
# granule_id = 7253571
INPUT_FILE=ANC04_006_20040227_235947_01_0001.DAT 131198387 131284787
# granule_id = 7254216
INPUT_FILE=ANC04_006_20040228_235947_01_0001.DAT 131284787 131371187
# granule_id = 7509819
INPUT_FILE=anc07_026_01_0000.dat 0 0
INPUT_FILE=anc07_026_01_0001.dat 0 0
INPUT_FILE=anc07_026_01_0002.dat 0 0
INPUT_FILE=anc07_026_01_0003.dat 0 0
INPUT_FILE=anc07_026_01_0004.dat 0 0
INPUT_FILE=anc07_026_01_0005.dat 0 0
INPUT_FILE=anc07_026_01_0006.dat 0 0
# granule_id = 7253574
INPUT_FILE=ANC08_008_20040227_235947_01_0001.DAT 131198387 131284787
# granule_id = 7254218
INPUT_FILE=ANC08_008_20040228_235947_01_0001.DAT 131284787 131371187
# granule_id = 7558141
INPUT_FILE=ANC09_940_20040227_235947_01_0001.DAT 131198387 131284787
# granule_id = 7558144
INPUT_FILE=ANC09_940_20040228_235947_01_0001.DAT 131284787 131371187
# granule_id = 6074352
INPUT_FILE=anc12_004_01_0000.dat 0 0
INPUT_FILE=anc12_004_01_0001.dat 0 0
# granule_id = 6459833
INPUT_FILE=anc13_005_01_0000.dat 0 0
# granule_id = 7963
INPUT_FILE=anc16_001_01_0000.dat 0 0
# granule_id = 7964
INPUT_FILE=anc17_001_01_0000.dat 0 0
# granule_id = 7466720
INPUT_FILE=anc25_001_20051231_000000_01_0000.dat 0 0
# granule_id = 7615
INPUT_FILE=anc27_001_01_0000.dat 0 0
INPUT_FILE=anc27_001_01_0001.dat 0 0
# granule_id = 7328803
INPUT_FILE=ANC33_001_20051020_000000_01_0000.DAT 0 0
```

```
# granule_id = 139831
INPUT_FILE=anc41_009_01_0000.dat 0 0
# granule_id = 7509820
INPUT_FILE=anc45_026_01_0001.dat 0 0
INPUT_FILE=anc45_026_01_0002.dat 0 0
INPUT_FILE=anc45_026_01_0003.dat 0 0
INPUT_FILE=anc45_026_01_0004.dat 0 0
INPUT_FILE=anc45_026_01_0005.dat 0 0
INPUT_FILE=anc45_026_01_0006.dat 0 0
INPUT_FILE=anc45_026_01_0007.dat 0 0
INPUT_FILE=anc45_026_01_0008.dat 0 0
INPUT_FILE=anc45_026_01_0009.dat 0 0
INPUT_FILE=anc45_026_01_0010.dat 0 0
INPUT_FILE=anc45_026_01_0011.dat 0 0
INPUT_FILE=anc45_026_01_0012.dat 0 0
INPUT_FILE=anc45_026_01_0013.dat 0 0
INPUT_FILE=anc45_026_01_0014.dat 0 0
INPUT_FILE=anc45_026_01_0015.dat 0 0
# granule_id = 7222880
INPUT_FILE=anc51_001_01_3107.dat 0 0
INPUT_FILE=anc51_001_01_3108.dat 0 0
INPUT_FILE=anc51_001_01_3109.dat 0 0
INPUT_FILE=anc51_001_01_3110.dat 0 0
INPUT_FILE=anc51_001_01_3111.dat 0 0
INPUT_FILE=anc51_001_01_3112.dat 0 0
INPUT_FILE=anc51_001_01_3113.dat 0 0
INPUT_FILE=anc51_001_01_3114.dat 0 0
INPUT_FILE=anc51_001_01_3115.dat 0 0
INPUT_FILE=anc51_001_01_3116.dat 0 0
INPUT_FILE=anc51_001_01_3117.dat 0 0
INPUT_FILE=anc51_001_01_3118.dat 0 0
INPUT_FILE=anc51_001_01_3119.dat 0 0
INPUT_FILE=anc51_001_01_3120.dat 0 0
INPUT_FILE=anc51_001_01_3121.dat 0 0
# granule_id = 7509822
INPUT_FILE=anc52_002_01_0001.dat 0 0
INPUT_FILE=anc52_002_01_0002.dat 0 0
INPUT_FILE=anc52_002_01_0003.dat 0 0
# granule_id = 7559716
OUTPUT_FILE=GLA06_532_2107_002_0085_1_01_0001.DAT 131224377 131225658 532 1 1
# granule_id = 7559718
OUTPUT_FILE=GLA06_532_2107_002_0085_2_01_0001.DAT 131225658 131227274 532 1 2
# granule_id = 7559720
OUTPUT_FILE=GLA06_532_2107_002_0085_3_01_0001.DAT 131227274 131228561 532 1 3
# granule_id = 7559722
OUTPUT_FILE=GLA06_532_2107_002_0085_4_01_0001.DAT 131228561 131230177 532 1 4
# granule_id = 7559724
OUTPUT_FILE=GLA06_532_2107_002_0086_1_01_0001.DAT 131230177 131231457 532 1 1
# granule_id = 7559726
OUTPUT_FILE=GLA06_532_2107_002_0086_2_01_0001.DAT 131231457 131233073 532 1 2
# granule_id = 7559728
OUTPUT_FILE=GLA06_532_2107_002_0086_3_01_0001.DAT 131233073 131234360 532 1 3
# granule_id = 7559730
OUTPUT_FILE=GLA06_532_2107_002_0086_4_01_0001.DAT 131234360 131235976 532 1 4
# granule_id = 7559732
OUTPUT_FILE=GLA06_532_2107_002_0087_1_01_0001.DAT 131235976 131237256 532 1 1
# granule_id = 7559734
OUTPUT_FILE=GLA06_532_2107_002_0087_2_01_0001.DAT 131237256 131238873 532 1 2
# granule_id = 7559736
```

```
OUTPUT_FILE=GLA06_532_2107_002_0087_3_01_0001.DAT 131238873 131240159 532 1 3
# granule_id = 7559738
OUTPUT_FILE=GLA06_532_2107_002_0087_4_01_0001.DAT 131240159 131241775 532 1 4
# granule_id = 7559740
OUTPUT_FILE=GLA06_532_2107_002_0088_1_01_0001.DAT 131241775 131243055 532 1 1
# granule_id = 7559742
OUTPUT_FILE=GLA06_532_2107_002_0088_2_01_0001.DAT 131243055 131244672 532 1 2
# granule_id = 7559744
OUTPUT_FILE=GLA06_532_2107_002_0088_3_01_0001.DAT 131244672 131245958 532 1 3
# granule_id = 7559746
OUTPUT_FILE=GLA06_532_2107_002_0088_4_01_0001.DAT 131245958 131247574 532 1 4
# granule_id = 7559748
OUTPUT_FILE=GLA06_532_2107_002_0089_1_01_0001.DAT 131247574 131248854 532 1 1
# granule_id = 7559750
OUTPUT_FILE=GLA06_532_2107_002_0089_2_01_0001.DAT 131248854 131250471 532 1 2
# granule_id = 7559752
OUTPUT_FILE=GLA06_532_2107_002_0089_3_01_0001.DAT 131250471 131251757 532 1 3
# granule_id = 7559754
OUTPUT_FILE=GLA06_532_2107_002_0089_4_01_0001.DAT 131251757 131253373 532 1 4
# granule_id = 7559756
OUTPUT_FILE=GLA06_532_2107_002_0090_1_01_0001.DAT 131253373 131254653 532 1 1
# granule_id = 7559758
OUTPUT_FILE=GLA06_532_2107_002_0090_2_01_0001.DAT 131254653 131256270 532 1 2
# granule_id = 7559760
OUTPUT_FILE=GLA06_532_2107_002_0090_3_01_0001.DAT 131256270 131257556 532 1 3
# granule_id = 7559762
OUTPUT_FILE=GLA06_532_2107_002_0090_4_01_0001.DAT 131257556 131259172 532 1 4
# granule_id = 7559764
OUTPUT_FILE=GLA06_532_2107_002_0091_1_02_0001.DAT 131259172 131260452 532 1 1
# granule_id = 7559766
OUTPUT_FILE=GLA06_532_2107_002_0091_2_01_0001.DAT 131260452 131262068 532 1 2
# granule_id = 7559768
OUTPUT_FILE=GLA06_532_2107_002_0091_3_01_0001.DAT 131262068 131263355 532 1 3
# granule_id = 7559770
OUTPUT_FILE=GLA06_532_2107_002_0091_4_01_0001.DAT 131263355 131264971 532 1 4
# granule_id = 7559772
OUTPUT_FILE=GLA06_532_2107_002_0092_1_01_0001.DAT 131264971 131266251 532 1 1
# granule_id = 7559774
OUTPUT_FILE=GLA06_532_2107_002_0092_2_01_0001.DAT 131266251 131267867 532 1 2
# granule_id = 7559776
OUTPUT_FILE=GLA06_532_2107_002_0092_3_01_0001.DAT 131267867 131269154 532 1 3
# granule_id = 7559778
OUTPUT_FILE=GLA06_532_2107_002_0092_4_01_0001.DAT 131269154 131270770 532 1 4
# granule_id = 7559780
OUTPUT_FILE=GLA06_532_2107_002_0093_1_01_0001.DAT 131270770 131272050 532 1 1
# granule_id = 7559782
OUTPUT_FILE=GLA06_532_2107_002_0093_2_01_0001.DAT 131272050 131273667 532 1 2
# granule_id = 7559784
OUTPUT_FILE=GLA06_532_2107_002_0093_3_01_0001.DAT 131273667 131274953 532 1 3
# granule_id = 7559786
OUTPUT_FILE=GLA06_532_2107_002_0093_4_01_0001.DAT 131274953 131276569 532 1 4
# granule_id = 7559788
OUTPUT_FILE=GLA06_532_2107_002_0094_1_01_0001.DAT 131276569 131277849 532 1 1
# granule_id = 7559790
OUTPUT_FILE=GLA06_532_2107_002_0094_2_01_0001.DAT 131277849 131279466 532 1 2
# granule_id = 7559792
OUTPUT_FILE=GLA06_532_2107_002_0094_3_01_0001.DAT 131279466 131280752 532 1 3
# granule_id = 7559794
OUTPUT_FILE=GLA06_532_2107_002_0094_4_01_0001.DAT 131280752 131282368 532 1 4
```

```
# granule_id = 7559796
OUTPUT_FILE=GLA06_532_2107_002_0095_1_01_0001.DAT 131282368 131283649 532 1 1
# granule_id = 7559798
OUTPUT_FILE=GLA06_532_2107_002_0095_2_01_0001.DAT 131283649 131285265 532 1 2
# granule_id = 7559800
OUTPUT_FILE=GLA06_532_2107_002_0095_3_01_0001.DAT 131285265 131286551 532 1 3
# granule_id = 7559802
OUTPUT_FILE=GLA06_532_2107_002_0095_4_01_0001.DAT 131286551 131288167 532 1 4
# granule_id = 7559804
OUTPUT_FILE=GLA06_532_2107_002_0096_1_01_0001.DAT 131288167 131289448 532 1 1
# granule_id = 7559806
OUTPUT_FILE=GLA06_532_2107_002_0096_2_01_0001.DAT 131289448 131291064 532 1 2
# granule_id = 7559808
OUTPUT_FILE=GLA06_532_2107_002_0096_3_01_0001.DAT 131291064 131292350 532 1 3
# granule_id = 7559810
OUTPUT_FILE=GLA06_532_2107_002_0096_4_01_0001.DAT 131292350 131293966 532 1 4
# granule_id = 7559812
OUTPUT_FILE=GLA06_532_2107_002_0097_1_01_0001.DAT 131293966 131295247 532 1 1
# granule_id = 7559814
OUTPUT_FILE=GLA06_532_2107_002_0097_2_01_0001.DAT 131295247 131296863 532 1 2
# granule_id = 7559816
OUTPUT_FILE=GLA06_532_2107_002_0097_3_01_0001.DAT 131296863 131298150 532 1 3
# granule_id = 7559818
OUTPUT_FILE=GLA06_532_2107_002_0097_4_01_0001.DAT 131298150 131299765 532 1 4
# granule_id = 7559820
OUTPUT_FILE=GLA06_532_2107_002_0098_1_01_0001.DAT 131299765 131301046 532 1 1
# granule_id = 7559822
OUTPUT_FILE=GLA06_532_2107_002_0098_2_01_0001.DAT 131301046 131302662 532 1 2
# granule_id = 7559824
OUTPUT_FILE=GLA06_532_2107_002_0098_3_01_0001.DAT 131302662 131303949 532 1 3
# granule_id = 7559827
OUTPUT_FILE=GLA06_532_2107_002_0098_4_01_0001.DAT 131303949 131305564 532 1 4
# granule_id = 7559708
OUTPUT_FILE=GLA12_532_2107_002_0085_0_01_0001.DAT 131224377 131305564 532 1 0
# granule_id = 7559709
OUTPUT_FILE=GLA13_532_2107_002_0085_0_01_0001.DAT 131224377 131305564 532 1 0
# granule_id = 7559710
OUTPUT_FILE=GLA14_532_2107_002_0085_0_01_0001.DAT 131224377 131305564 532 1 0
# granule_id = 7559711
OUTPUT_FILE=GLA15_532_2107_002_0085_0_01_0001.DAT 131224377 131305564 532 1 0
# granule_id = 7559717
OUTPUT_FILE=GLA06_532_2107_002_0085_1_01_0001.QAP 131224377 131225658 532 1 1
# granule_id = 7559719
OUTPUT_FILE=GLA06_532_2107_002_0085_2_01_0001.QAP 131225658 131227274 532 1 2
# granule_id = 7559721
OUTPUT_FILE=GLA06_532_2107_002_0085_3_01_0001.QAP 131227274 131228561 532 1 3
# granule_id = 7559723
OUTPUT_FILE=GLA06_532_2107_002_0085_4_01_0001.QAP 131228561 131230177 532 1 4
# granule_id = 7559725
OUTPUT_FILE=GLA06_532_2107_002_0086_1_01_0001.QAP 131230177 131231457 532 1 1
# granule_id = 7559727
OUTPUT_FILE=GLA06_532_2107_002_0086_2_01_0001.QAP 131231457 131233073 532 1 2
# granule_id = 7559729
OUTPUT_FILE=GLA06_532_2107_002_0086_3_01_0001.QAP 131233073 131234360 532 1 3
# granule_id = 7559731
OUTPUT_FILE=GLA06_532_2107_002_0086_4_01_0001.QAP 131234360 131235976 532 1 4
# granule_id = 7559733
OUTPUT_FILE=GLA06_532_2107_002_0087_1_01_0001.QAP 131235976 131237256 532 1 1
# granule_id = 7559735
```

```
OUTPUT_FILE=GLA06_532_2107_002_0087_2_01_0001.QAP 131237256 131238873 532 1 2
# granule_id = 7559737
OUTPUT_FILE=GLA06_532_2107_002_0087_3_01_0001.QAP 131238873 131240159 532 1 3
# granule_id = 7559739
OUTPUT_FILE=GLA06_532_2107_002_0087_4_01_0001.QAP 131240159 131241775 532 1 4
# granule_id = 7559741
OUTPUT_FILE=GLA06_532_2107_002_0088_1_01_0001.QAP 131241775 131243055 532 1 1
# granule_id = 7559743
OUTPUT_FILE=GLA06_532_2107_002_0088_2_01_0001.QAP 131243055 131244672 532 1 2
# granule_id = 7559745
OUTPUT_FILE=GLA06_532_2107_002_0088_3_01_0001.QAP 131244672 131245958 532 1 3
# granule_id = 7559747
OUTPUT_FILE=GLA06_532_2107_002_0088_4_01_0001.QAP 131245958 131247574 532 1 4
# granule_id = 7559749
OUTPUT_FILE=GLA06_532_2107_002_0089_1_01_0001.QAP 131247574 131248854 532 1 1
# granule_id = 7559751
OUTPUT_FILE=GLA06_532_2107_002_0089_2_01_0001.QAP 131248854 131250471 532 1 2
# granule_id = 7559753
OUTPUT_FILE=GLA06_532_2107_002_0089_3_01_0001.QAP 131250471 131251757 532 1 3
# granule_id = 7559755
OUTPUT_FILE=GLA06_532_2107_002_0089_4_01_0001.QAP 131251757 131253373 532 1 4
# granule_id = 7559757
OUTPUT_FILE=GLA06_532_2107_002_0090_1_01_0001.QAP 131253373 131254653 532 1 1
# granule_id = 7559759
OUTPUT_FILE=GLA06_532_2107_002_0090_2_01_0001.QAP 131254653 131256270 532 1 2
# granule_id = 7559761
OUTPUT_FILE=GLA06_532_2107_002_0090_3_01_0001.QAP 131256270 131257556 532 1 3
# granule_id = 7559763
OUTPUT_FILE=GLA06_532_2107_002_0090_4_01_0001.QAP 131257556 131259172 532 1 4
# granule_id = 7559765
OUTPUT_FILE=GLA06_532_2107_002_0091_1_01_0001.QAP 131259172 131260452 532 1 1
# granule_id = 7559767
OUTPUT_FILE=GLA06_532_2107_002_0091_2_01_0001.QAP 131260452 131262068 532 1 2
# granule_id = 7559769
OUTPUT_FILE=GLA06_532_2107_002_0091_3_01_0001.QAP 131262068 131263355 532 1 3
# granule_id = 7559771
OUTPUT_FILE=GLA06_532_2107_002_0091_4_01_0001.QAP 131263355 131264971 532 1 4
# granule_id = 7559773
OUTPUT_FILE=GLA06_532_2107_002_0092_1_01_0001.QAP 131264971 131266251 532 1 1
# granule_id = 7559775
OUTPUT_FILE=GLA06_532_2107_002_0092_2_01_0001.QAP 131266251 131267867 532 1 2
# granule_id = 7559777
OUTPUT_FILE=GLA06_532_2107_002_0092_3_01_0001.QAP 131267867 131269154 532 1 3
# granule_id = 7559779
OUTPUT_FILE=GLA06_532_2107_002_0092_4_01_0001.QAP 131269154 131270770 532 1 4
# granule_id = 7559781
OUTPUT_FILE=GLA06_532_2107_002_0093_1_01_0001.QAP 131270770 131272050 532 1 1
# granule_id = 7559783
OUTPUT_FILE=GLA06_532_2107_002_0093_2_01_0001.QAP 131272050 131273667 532 1 2
# granule_id = 7559785
OUTPUT_FILE=GLA06_532_2107_002_0093_3_01_0001.QAP 131273667 131274953 532 1 3
# granule_id = 7559787
OUTPUT_FILE=GLA06_532_2107_002_0093_4_01_0001.QAP 131274953 131276569 532 1 4
# granule_id = 7559789
OUTPUT_FILE=GLA06_532_2107_002_0094_1_01_0001.QAP 131276569 131277849 532 1 1
# granule_id = 7559791
OUTPUT_FILE=GLA06_532_2107_002_0094_2_01_0001.QAP 131277849 131279466 532 1 2
# granule_id = 7559793
OUTPUT_FILE=GLA06_532_2107_002_0094_3_01_0001.QAP 131279466 131280752 532 1 3
```

```
# granule_id = 7559795
OUTPUT_FILE=GLA06_532_2107_002_0094_4_01_0001.QAP 131280752 131282368 532 1 4
# granule_id = 7559797
OUTPUT_FILE=GLA06_532_2107_002_0095_1_01_0001.QAP 131282368 131283649 532 1 1
# granule_id = 7559799
OUTPUT_FILE=GLA06_532_2107_002_0095_2_01_0001.QAP 131283649 131285265 532 1 2
# granule_id = 7559801
OUTPUT_FILE=GLA06_532_2107_002_0095_3_01_0001.QAP 131285265 131286551 532 1 3
# granule_id = 7559803
OUTPUT_FILE=GLA06_532_2107_002_0095_4_01_0001.QAP 131286551 131288167 532 1 4
# granule_id = 7559805
OUTPUT_FILE=GLA06_532_2107_002_0096_1_01_0001.QAP 131288167 131289448 532 1 1
# granule_id = 7559807
OUTPUT_FILE=GLA06_532_2107_002_0096_2_01_0001.QAP 131289448 131291064 532 1 2
# granule_id = 7559809
OUTPUT_FILE=GLA06_532_2107_002_0096_3_01_0001.QAP 131291064 131292350 532 1 3
# granule_id = 7559811
OUTPUT_FILE=GLA06_532_2107_002_0096_4_01_0001.QAP 131292350 131293966 532 1 4
# granule_id = 7559813
OUTPUT_FILE=GLA06_532_2107_002_0097_1_01_0001.QAP 131293966 131295247 532 1 1
# granule_id = 7559815
OUTPUT_FILE=GLA06_532_2107_002_0097_2_01_0001.QAP 131295247 131296863 532 1 2
# granule_id = 7559817
OUTPUT_FILE=GLA06_532_2107_002_0097_3_01_0001.QAP 131296863 131298150 532 1 3
# granule_id = 7559819
OUTPUT_FILE=GLA06_532_2107_002_0097_4_01_0001.QAP 131298150 131299765 532 1 4
# granule_id = 7559821
OUTPUT_FILE=GLA06_532_2107_002_0098_1_01_0001.QAP 131299765 131301046 532 1 1
# granule_id = 7559823
OUTPUT_FILE=GLA06_532_2107_002_0098_2_01_0001.QAP 131301046 131302662 532 1 2
# granule_id = 7559826
OUTPUT_FILE=GLA06_532_2107_002_0098_3_01_0001.QAP 131302662 131303949 532 1 3
# granule_id = 7559828
OUTPUT_FILE=GLA06_532_2107_002_0098_4_01_0001.QAP 131303949 131305564 532 1 4
# granule_id = 7559712
OUTPUT_FILE=GLA12_532_2107_002_0085_0_01_0001.QAP 131224377 131305564 532 1 0
# granule_id = 7559713
OUTPUT_FILE=GLA13_532_2107_002_0085_0_01_0001.QAP 131224377 131305564 532 1 0
# granule_id = 7559714
OUTPUT_FILE=GLA14_532_2107_002_0085_0_01_0001.QAP 131224377 131305564 532 1 0
# granule_id = 7559715
OUTPUT_FILE=GLA15_532_2107_002_0085_0_01_0001.QAP 131224377 131305564 532 1 0
OUTPUT_FILE=ANC06_026_20060216_531244_01_GLAS_Alt.txt 0 0
WAVEFORM_PROCESS=NONE
ELEVATION_PROCESS=E_IntrpPOD
ELEVATION_PROCESS=E_CalcTrop
ELEVATION_PROCESS=E_CalcDEM
ELEVATION_PROCESS=E_CalcSlope
ELEVATION_PROCESS=E_CalcLoadTD
ELEVATION_PROCESS=E_CalcOceanTD
ELEVATION_PROCESS=E_CalcEarthTD
ELEVATION_PROCESS=E_GetGeoid
SURFACE_TYPE=ALL
```


Section 9

GLAS_Atmos

9.1 Function

GLAS_Atmos uses algorithms defined in the GLAS Atmosphere ATBD to first produce calibrated backscatter cross section and then to locate all radiatively significant cloud and aerosol features present in the data and define their height and optical depth. This is done by first locating the top and bottom of the layers, differentiating between cloud and aerosol and then computing the extinction and optical depth of each layer. The layers are classified as either 1) cloud, 2) elevated aerosol, or 3) planetary boundary layer.

In its most basic execution, GLAS_Atmos reads GLAS Level-1A GLA02 files and requisite ancillary files to create GLAS L1B and 2 Atmosphere product files (GLA07-11). However, in some execution scenarios, GLAS_Atmos can read the GLA07 file created in a previous execution to produce GLA08-11 products. GLAS_Atmos uses the ANC07 files for constants and error/status messages. It uses the ANC12 DEM files to determine a preliminary elevation from a global Digital Elevation Model. It uses the ANC13 file to determine the geoid, ANC18 for reference standard atmosphere measurements and ANC01 for meteorological information. It uses ANC09 for precision attitude, and ANC04/ANC08 for precision orbit information and ANC45 files for initializing metadata information. It uses ANC36 files generated by atm_anc to perform calibrations and ANC38 to perform multiple scattering corrections. ANC25 and ANC33 files are used for time delay and oscillator-based corrections.

GLAS_Atmos should be run once after successful execution of GLAS_L1A, atm_anc, and met_util. GLAS_Atmos permits multi-granule input/output files, input/output time selection, selected execution, and reprocessing.

9.2 Input Files

Table 9-1 lists the inputs files to GLAS_Atmos. Files which are specific to GLAS_Atmos are documented in this section. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details regarding the non-specific files.

9.2.1 Control File

The control file format and common elements are documented in Section 5 of this document. Elements specific to GLAS_Atmos are described here.

The control file section delimiter for GLAS_Atmos is:

```
=GLAS_Atmos
```

In order to satisfy the partial-processing/reprocessing requirement, GLAS_Atmos can perform limited processing based on execution flags within the control file. The flags and the processes they control are defined in Table 9-2.

Combinations of the execution flags are allowed. For example, to perform from backscatter to end and no POD, the control file would have the following entries:

Table 9-1 GLAS_Atm Inputs

File Spec	Type	Source	Short Description
anc01*.dat	Dynamic Ancillary	met_util	Meteorological subset files. Data sets at times before and after the time of the profile are interpolated to the time of the profile. If either of the ANC01 data sets are missing, then the available ANC01 data set is used without interpolation. If no ANC01 data sets are available, then standard atmosphere data are used instead.
anc04*.dat	Dynamic Ancillary	UTexas	IERS Polar Motion and Earth Rotation Data File.
anc07*_0000.dat	Static Ancillary	Science Team	Error file.
anc07*_0001.dat	Static Ancillary	Science Team	Global constants file.
anc07*_0002.dat	Static Ancillary	Science Team	Atm constants file.
anc07*_0005.dat	Static Ancillary	Science Team	L1A constants file.
anc08*.dat	Dynamic Ancillary	UTexas	Precision Orbit file.
anc09*.dat	Dynamic Ancillary	UTexas	Precision Attitude file.
anc12*_0000.dat	Static Ancillary	Science Team	DEM file.
anc12*_0001.dat	Static Ancillary	Science Team	DEM mask file.
anc13*.dat	Static Ancillary	Science Team	Geoid file.
anc18*.dat	Static Ancillary	Science Team	Standard atmosphere file.
anc24*.dat	Dynamic Ancillary	UTexas	Rotation Matrix file.
anc25*.dat	Dynamic Ancillary	Science Team	GPS/UTC conversion file.
anc30*.dat	Static Ancillary	Science Team	Global aerosol categorization map file.
anc27*_0000.dat	Static Ancillary	Science Team	Coarse regional mask file.
anc27*_0001.dat	Static Ancillary	Science Team	Fine regional mask file.
anc31*.dat	Static Ancillary	Science Team	Aerosol tropospheric classification map file.
anc33*.dat	Dynamic Ancillary	Science Team	UTC time conversion file.
anc35*.dat	Static Ancillary	Science Team	Ozone file.
anc36*.dat	Dynamic Ancillary	atm_anc	Atmosphere Calibration file.
anc38*.dat	Static Ancillary	Science Team	Multiple-scattering table file.

Table 9-1 GLAS_Atm Inputs (Continued)

File Spec	Type	Source	Short Description
anc41*.dat	Dynamic Ancillary	Science Team	JPL Planetary Ephemeris
anc45*_0002.dat	Static Ancillary	Science Team	GLA02 metadata input file.
anc45*_0007.dat	Static Ancillary	Science Team	GLA07 metadata input file.
anc45*_0008.dat	Static Ancillary	Science Team	GLA08 metadata input file.
anc45*_0009.dat	Static Ancillary	Science Team	GLA09 metadata input file.
anc45*_0010.dat	Static Ancillary	Science Team	GLA10 metadata input file.
anc45*_0011.dat	Static Ancillary	Science Team	GLA11 metadata input file.
Control File	Control	ISIPS Operations	Control file.
gla02*_*.dat	Level-1A Product	GLAS_L1A	L1A Atmosphere product file.

Table 9-2 GLAS_Atm Control Flags

Flag	Significance
ATMOSPHERE_PROCESS=None	Indicates that GLAS_Atm should perform no processing.
ATMOSPHERE_PROCESS=A_bs_to_end	Indicates that GLAS_Atm should perform all processing from backscatter-to-end.
ATMOSPHERE_PROCESS=A_bs_only	Indicates that GLAS_Atm should perform backscatter-only processing.
ATMOSPHERE_PROCESS=A_cld_to_end	Indicates that GLAS_Atm should perform processing from cloud-to-end.
ATMOSPHERE_PROCESS=A_no_pod	Indicates that GLAS_Atm should not perform precision orbit determination.
ATMOSPHERE_PROCESS=ALL	Indicates that GLAS_Atm should perform all processing from backscatter-to-end, including precision orbit determination.

```

ATMOSPHERE_PROCESS=A_bs_to_end
ATMOSPHERE_PROCESS=A_no_pod

```

A control file option is available to designate that location information be taken from the input data rather than the ANC04/08/09 geolocation file. This is useful for quick-look processing when the geolocation files are not yet available.

To indicate that pass-thru processing should be used, add the following line to the control file:

```
POSITION=PASS_THRU
```

If this line is not included in the control file, geolocation processing will occur by default.

9.3 Output Files

Table 9-3 lists the outputs created by GLAS_Atm. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details regarding the output files

Granule boundaries are designated by specifying start and stop times on the OUTPUT_FILE control file entries.

Table 9-3 GLAS_Atm Outputs

File Spec	Type	Destination	Short Description
gla07*.dat	L1B Atm Product	Archive	L1B Global Backscatter product file. Contains full 532 nm and 1064 nm calibrated attenuated backscatter profiles at 5 times per second, and from 10 to -1 km, at 40 times per second. Also included will be calibration coefficient values and molecular backscatter profiles at once per second.
gla08*.dat	L2 Atm Product	Archive	L2 Planetary Boundary Layer and Elevated Aerosol Layer Height product file. Contains elevated aerosol layer height data consisting of top and bottom heights for up to 5 aerosol layers below 20 km at once per 4 seconds, and top and bottom heights for up to 3 aerosol layers above 20 km at once per 20 seconds. The boundary layer height is provided at once per 4 second and 5 times per second resolution.
gla09*.dat	L2 Atm Product	Archive	L2 Cloud Layer Height product file. Contains top and bottom heights for up to 10 layers below 20 km at once per 4 seconds, once per second, 5 times per second, and 40 times per second (below 4 km only). Ground heights will also be provided at each resolution.
gla10*.dat	L2 Atm Product	Archive	L2 Aerosol Vertical Structure product file. Contains cloud and aerosol backscatter and extinction cross section profiles.

Table 9-3 GLAS_Atm Outputs (Continued)

File Spec	Type	Destination	Short Description
gla11*.dat	L2 AtmProduct	Archive	L2 Thin Cloud/Aerosol product file. Contains optical depths for clouds for up to 10 layers, the planetary boundary layer, and aerosols for up to 8 layers. Cloud optical depth is at once per second and aerosol optical depth is at once per 4 second resolution.
gla07*.qap	L2 Atm Quality	QA	L1B Global Backscatter quality file.
gla08*.qap	L2 Atm Quality	QA	L2 Planetary Boundary Layer and Elevated Aerosol Layer Height quality file.
gla09*.qap	L2 Atm Quality	QA	L2 Cloud Layer Height quality file.
gla10*.qap	L2 Atm Quality	QA	L2 Aerosol Vertical Structure quality file.
gla11*.qap	L2 Atm Quality	QA	L2 Thin Cloud/Aerosol quality file.
anc06*.txt	Dynamic Ancillary	ISIPS Operations	Standard metadata/processing log file.

Of importance is the relationship between the execution flags and the output products. If a particular execution flag is present in the control file, then the corresponding output file type must be present as well. Table 9-4 shows the relationship between output products and execution flags. These relationships will be more fully defined in the next section.

Table 9-4 GLAS_Atm Execution Flags and Output Products

Execution Flag	Required Output Product
ATMOSPHERE_PROCESS=A_bs_to_end	gla07*.dat, qap07*.dat, gla08*.dat, qap08*.dat, gla09*.dat, qap09*.dat, gla10*.dat, qap10*.dat, gla11*.dat qap11*.dat
ATMOSPHERE_PROCESS=A_bs_only	gla07*.dat, qap07*.dat,
ATMOSPHERE_PROCESS=A_cld_to_end	gla08*.dat, qap08*.dat, gla09*.dat, qap09*.dat, gla10*.dat, qap10*.dat, gla11*.dat qap11*.dat

9.4 Processing and Reprocessing Scenarios

GLAS_Atm supports full and partial processing scenarios. Control file entries are shown for each supported scenario defining the requisite execution flags as well as input and output files. Only those control file entries unique to the particular processing scenario are shown for brevity.

ity. Additionally, even though multiple files of the same time may be needed, a single instance is shown.

Time-selected processing may also be shown by specifying specific start and stop times on the INPUT_FILE and OUTPUT_FILE control file entries.

9.4.1 Standard Processing

This scenario is used for normal Atmosphere processing, creating GLA07, GLA08, GLA09, GLA10 and GLA11 data from GLA02 and the requisite ANC files. All files listed in Table 9-1 and Table 9-3 are required. The following execution flag is required:

```
ATMOSPHERE_PROCESS=A_bs_to_end
```

9.4.2 Predict Orbit Processing

This scenario is used to quickly process Atmosphere data when only predicted orbit (ANC20) is available. The input files listed in Table 9-5 are required.

Table 9-5 GLAS_Atmos Predict Inputs

File Spec	Type	Source	Short Description
anc07*_0000.dat	Static Ancillary	Science Team	Error file.
anc07*_0001.dat	Static Ancillary	Science Team	Global constants file.
anc07*_0002.dat	Static Ancillary	Science Team	Atmos constants file.
anc07*_0005.dat	Static Ancillary	Science Team	L1A constants file.
anc12*_0000.dat	Static Ancillary	Science Team	DEM file.
anc12*_0001.dat	Static Ancillary	Science Team	DEM mask file.
anc13*.dat	Static Ancillary	Science Team	Geoid file.
anc18*.dat	Static Ancillary	Science Team	Standard atmosphere file.
anc20*.dat	Dynamic Ancillary	UTexas	Predict Orbit file.
anc24*.dat	Dynamic Ancillary	UTexas	Rotation Matrix file.
anc25*.dat	Dynamic Ancillary	Science Team	GPS/UTC conversion file.
anc27*_0000.dat	Static Ancillary	Science Team	Coarse regional mask file.
anc27*_0001.dat	Static Ancillary	Science Team	Fine regional mask file.
anc30*.dat	Static Ancillary	Science Team	Global aerosol categorization map file.
anc31*.dat	Static Ancillary	Science Team	Aerosol tropospheric classification map file.
anc33*.dat	Dynamic Ancillary	Science Team	UTC time conversion file.
anc35*.dat	Static Ancillary	Science Team	Ozone file.
anc38*.dat	Static Ancillary	Science Team	Multiple-scattering table file.

Table 9-5 GLAS_Atm Predict Inputs (Continued)

File Spec	Type	Source	Short Description
anc41*.dat	Dynamic Ancillary	Science Team	JPL Planetary Ephemeris
anc45*_0002.dat	Static Ancillary	Science Team	GLA02 metadata input file.
anc45*_0007.dat	Static Ancillary	Science Team	GLA07 metadata input file.
anc45*_0008.dat	Static Ancillary	Science Team	GLA08 metadata input file.
anc45*_0009.dat	Static Ancillary	Science Team	GLA09 metadata input file.
anc45*_0010.dat	Static Ancillary	Science Team	GLA10 metadata input file.
anc45*_0011.dat	Static Ancillary	Science Team	GLA11 metadata input file.
Control File	Control	ISIPS Operations	Control file.
gla02*_.dat	Level-1A Product	GLAS_L1A	L1A Atmosphere product file.

9.4.3 Partial Processing: Backscatter

This scenario is used for backscatter-only Atmosphere processing, creating GLA07 data from GLA02 and the requisite ANC files. All files listed in Table 9-1 and Table 9-3 are required, with the following exceptions:

- GLA08-11 output files are not required.
- QAP08-11 output files are not required.

The following execution flag is required:

```
ATMOSPHERE_PROCESS=A_bs_only
```

9.4.4 Partial Processing/Re-Processing: Cloud-to-End

This scenario is used for cloud-to-end Atmosphere-related data, creating GLA08-11 data from selected GLA07 products (created during a previous execution of GLAS_Atm) and the requisite ANC files. All files listed in Table 9-1 and Table 9-3 are required, with the following exception:

- GLA07 is required as an input file, but not an output file.

The following execution flag is required:

```
ATMOSPHERE_PROCESS=A_cld_to_end
```

9.5 Startup and Termination

This is an overview of the steps necessary to run GLAS_Atm.

9.5.1 Setup a Runtime Directory

The suggested method of running GLAS_Atm is to create a temporary directory and link all necessary files into it. The SDMS will create a temporary directory and link all necessary files into it. For example, to setup a GLAS_Atm run, one would perform the following steps (Des-

ignate TEMP_DIR as the temporary directory and DATA_DIR as the location in which input data for this job has been staged):

```
mkdir $TEMP_DIR
cd $TEMP_DIR
ln -s $GLAS_HOME/bin/GLAS_Atm .
ln -s $GLAS_HOME/lib/* .
ln -s $GLAS_HOME/data/anc*.dat .
ln -s $DATA_DIR/*.dat .
```

9.5.2 Create a Control File

GLAS_Atm is designed to take the name of a control file as a command-line argument. The suggested method of creating a control file is by copying a template from the \$GLAS_HOME/data directory and modifying it with desired input/output filenames and data processing options.

```
cp $GLAS_HOME/data/cf_glas_atm.ctl ./control_file_name
vi ./control_file_name
```

9.5.3 Run the PGE

Error and status messages will be displayed on screen (stdout) and recorded in the ANC06 file.

```
./GLAS_Atm control_file_name
```

9.5.4 Run-Time Statistics

GLAS_Atm processes 25 hours of GLAS data in approximately four hours. This may vary due to hardware load and data dependencies.

9.5.5 Termination

The process will terminate automatically upon reaching the end of all input data. The log/metadata file (ANC06*) must be examined to determine runtime success. Additionally, the process will return a result code to the operating system which may be used to programatically determine success or failure (0=success, 3=fatal error).

9.6 Error and Warning Messages

All GSAS error and warning messages are numerically listed in Appendix D.

9.7 Recovery Steps

If GLAS_Atm terminates with an error:

- 1) Review error and status messages in the ANC06 file or on stdout to determine source or location of problem.
- 2) Correct the problem
- 3) Remove previous output files

4) Re-run the software

In case of a problematic error, which cannot be easily diagnosed, debug versions of GLAS_Atm will be available for test use. This is, however, more of a developer procedure than a user procedure. Software users should contact the GSAS Development Team for more instructions

9.8 Sample GLAS_Atm Control File

```
=GLAS_Atm
PGE_VERSION=ACC
PASSID=6407 21070020365 132847317 132853116 -167.03262 3387
PASSID=6408 21070020366 132853116 132858915 168.77177 3388
PASSID=6409 21070020367 132858915 132864714 144.57681 3389
PASSID=6410 21070020368 132864714 132870513 120.38229 3390
PASSID=6411 21070020369 132870513 132876312 96.18598 3391
PASSID=6412 21070020370 132876312 132882112 71.9897 3392
PASSID=6413 21070020371 132882112 132887911 47.79437 3393
PASSID=6414 21070020372 132887911 132893710 23.599838 3394
PASSID=6415 21070020373 132893710 132899509 -0.5939026 3395
PASSID=6416 21070020374 132899509 132905308 -24.787994 3396
PASSID=6417 21070020375 132905308 132911107 -48.983124 3397
PASSID=6418 21070020376 132911107 132916906 -73.177734 3398
PASSID=6419 21070020377 132916906 132922705 -97.371826 3399
PASSID=6420 21070020378 132922705 132928504 -121.566666 3400
PASSID=6421 21070020379 132928504 132934303 -145.76212 3401
INPUT_FILE=GLA02_026_2107_002_0365_0_01_0001.DAT 132848124 132859722 26 1 0
INPUT_FILE=GLA02_026_2107_002_0367_0_01_0001.DAT 132859722 132871321 26 1 0
INPUT_FILE=GLA02_026_2107_002_0369_0_01_0001.DAT 132871321 132882919 26 1 0
INPUT_FILE=GLA02_026_2107_002_0371_0_01_0001.DAT 132882919 132894517 26 1 0
INPUT_FILE=GLA02_026_2107_002_0373_0_01_0001.DAT 132894517 132906115 26 1 0
INPUT_FILE=GLA02_026_2107_002_0375_0_01_0001.DAT 132906115 132917713 26 1 0
INPUT_FILE=GLA02_026_2107_002_0377_0_01_0001.DAT 132917713 132929312 26 1 0
INPUT_FILE=ANC01_005_20040317_180000_01_0000.DAT 132818400 132861600
INPUT_FILE=ANC01_005_20040317_180000_01_0001.DAT 132818400 132861600
INPUT_FILE=ANC01_005_20040317_180000_01_0002.DAT 132818400 132861600
INPUT_FILE=ANC01_005_20040317_180000_01_0003.DAT 132818400 132861600
INPUT_FILE=ANC01_005_20040317_180000_01_0004.DAT 132818400 132861600
INPUT_FILE=ANC01_005_20040317_180000_01_0005.DAT 132818400 132861600
INPUT_FILE=ANC01_005_20040317_180000_01_0006.DAT 132818400 132861600
INPUT_FILE=ANC01_005_20040317_180000_01_0007.DAT 132818400 132861600
INPUT_FILE=ANC01_005_20040317_180000_01_0008.DAT 132818400 132861600
INPUT_FILE=ANC01_005_20040317_180000_01_0009.DAT 132818400 132861600
INPUT_FILE=ANC01_005_20040317_180000_01_0010.DAT 132818400 132861600
INPUT_FILE=ANC01_005_20040318_000000_01_0000.DAT 132840000 132883200
INPUT_FILE=ANC01_005_20040318_000000_01_0001.DAT 132840000 132883200
INPUT_FILE=ANC01_005_20040318_000000_01_0002.DAT 132840000 132883200
INPUT_FILE=ANC01_005_20040318_000000_01_0003.DAT 132840000 132883200
INPUT_FILE=ANC01_005_20040318_000000_01_0004.DAT 132840000 132883200
INPUT_FILE=ANC01_005_20040318_000000_01_0005.DAT 132840000 132883200
INPUT_FILE=ANC01_005_20040318_000000_01_0006.DAT 132840000 132883200
INPUT_FILE=ANC01_005_20040318_000000_01_0007.DAT 132840000 132883200
INPUT_FILE=ANC01_005_20040318_000000_01_0008.DAT 132840000 132883200
INPUT_FILE=ANC01_005_20040318_000000_01_0009.DAT 132840000 132883200
INPUT_FILE=ANC01_005_20040318_000000_01_0010.DAT 132840000 132883200
INPUT_FILE=ANC01_005_20040318_060000_01_0000.DAT 132861600 132904800
INPUT_FILE=ANC01_005_20040318_060000_01_0001.DAT 132861600 132904800
```

```
INPUT_FILE=ANC01_005_20040318_060000_01_0002.DAT 132861600 132904800
INPUT_FILE=ANC01_005_20040318_060000_01_0003.DAT 132861600 132904800
INPUT_FILE=ANC01_005_20040318_060000_01_0004.DAT 132861600 132904800
INPUT_FILE=ANC01_005_20040318_060000_01_0005.DAT 132861600 132904800
INPUT_FILE=ANC01_005_20040318_060000_01_0006.DAT 132861600 132904800
INPUT_FILE=ANC01_005_20040318_060000_01_0007.DAT 132861600 132904800
INPUT_FILE=ANC01_005_20040318_060000_01_0008.DAT 132861600 132904800
INPUT_FILE=ANC01_005_20040318_060000_01_0009.DAT 132861600 132904800
INPUT_FILE=ANC01_005_20040318_060000_01_0010.DAT 132861600 132904800
INPUT_FILE=ANC01_005_20040318_120000_01_0000.DAT 132883200 132926400
INPUT_FILE=ANC01_005_20040318_120000_01_0001.DAT 132883200 132926400
INPUT_FILE=ANC01_005_20040318_120000_01_0002.DAT 132883200 132926400
INPUT_FILE=ANC01_005_20040318_120000_01_0003.DAT 132883200 132926400
INPUT_FILE=ANC01_005_20040318_120000_01_0004.DAT 132883200 132926400
INPUT_FILE=ANC01_005_20040318_120000_01_0005.DAT 132883200 132926400
INPUT_FILE=ANC01_005_20040318_120000_01_0006.DAT 132883200 132926400
INPUT_FILE=ANC01_005_20040318_120000_01_0007.DAT 132883200 132926400
INPUT_FILE=ANC01_005_20040318_120000_01_0008.DAT 132883200 132926400
INPUT_FILE=ANC01_005_20040318_120000_01_0009.DAT 132883200 132926400
INPUT_FILE=ANC01_005_20040318_120000_01_0010.DAT 132883200 132926400
INPUT_FILE=ANC01_005_20040318_180000_01_0000.DAT 132904800 132948000
INPUT_FILE=ANC01_005_20040318_180000_01_0001.DAT 132904800 132948000
INPUT_FILE=ANC01_005_20040318_180000_01_0002.DAT 132904800 132948000
INPUT_FILE=ANC01_005_20040318_180000_01_0003.DAT 132904800 132948000
INPUT_FILE=ANC01_005_20040318_180000_01_0004.DAT 132904800 132948000
INPUT_FILE=ANC01_005_20040318_180000_01_0005.DAT 132904800 132948000
INPUT_FILE=ANC01_005_20040318_180000_01_0006.DAT 132904800 132948000
INPUT_FILE=ANC01_005_20040318_180000_01_0007.DAT 132904800 132948000
INPUT_FILE=ANC01_005_20040318_180000_01_0008.DAT 132904800 132948000
INPUT_FILE=ANC01_005_20040318_180000_01_0009.DAT 132904800 132948000
INPUT_FILE=ANC01_005_20040318_180000_01_0010.DAT 132904800 132948000
INPUT_FILE=ANC01_005_20040319_000000_01_0000.DAT 132926400 132969600
INPUT_FILE=ANC01_005_20040319_000000_01_0001.DAT 132926400 132969600
INPUT_FILE=ANC01_005_20040319_000000_01_0002.DAT 132926400 132969600
INPUT_FILE=ANC01_005_20040319_000000_01_0003.DAT 132926400 132969600
INPUT_FILE=ANC01_005_20040319_000000_01_0004.DAT 132926400 132969600
INPUT_FILE=ANC01_005_20040319_000000_01_0005.DAT 132926400 132969600
INPUT_FILE=ANC01_005_20040319_000000_01_0006.DAT 132926400 132969600
INPUT_FILE=ANC01_005_20040319_000000_01_0007.DAT 132926400 132969600
INPUT_FILE=ANC01_005_20040319_000000_01_0008.DAT 132926400 132969600
INPUT_FILE=ANC01_005_20040319_000000_01_0009.DAT 132926400 132969600
INPUT_FILE=ANC01_005_20040319_000000_01_0010.DAT 132926400 132969600
INPUT_FILE=ANC04_006_20040317_235947_01_0001.DAT 132839987 132926387
INPUT_FILE=ANC04_006_20040318_235947_01_0001.DAT 132926387 133012787
INPUT_FILE=anc07_026_01_0000.dat 0 0
INPUT_FILE=anc07_026_01_0001.dat 0 0
INPUT_FILE=anc07_026_01_0002.dat 0 0
INPUT_FILE=anc07_026_01_0003.dat 0 0
INPUT_FILE=anc07_026_01_0004.dat 0 0
INPUT_FILE=anc07_026_01_0005.dat 0 0
INPUT_FILE=anc07_026_01_0006.dat 0 0
INPUT_FILE=ANC08_008_20040317_235947_01_0001.DAT 132839987 132926387
INPUT_FILE=ANC08_008_20040318_235947_01_0001.DAT 132926387 133012787
INPUT_FILE=ANC09_940_20040317_235947_01_0001.DAT 132839987 132926387
INPUT_FILE=ANC09_940_20040318_235947_01_0001.DAT 132926387 133012787
INPUT_FILE=anc12_004_01_0000.dat 0 0
INPUT_FILE=anc12_004_01_0001.dat 0 0
INPUT_FILE=anc13_005_01_0000.dat 0 0
INPUT_FILE=anc18_001_01_0000.dat 0 0
```

```
INPUT_FILE=anc25_001_20051231_000000_01_0000.dat 0 0
INPUT_FILE=anc27_001_01_0000.dat 0 0
INPUT_FILE=anc27_001_01_0001.dat 0 0
INPUT_FILE=anc30_001_01_0000.dat 0 0
INPUT_FILE=anc31_004_20031120_000000_01_0000.dat 122558400 284040000
INPUT_FILE=ANC33_001_20051020_000000_01_0000.DAT 0 0
INPUT_FILE=anc35_001_01_0000.dat 0 0
INPUT_FILE=ANC36_026_21_07002_0365_0_01_0001.DAT 132848124 132859722
INPUT_FILE=ANC36_026_21_07002_0367_0_01_0001.DAT 132859722 132871321
INPUT_FILE=ANC36_026_21_07002_0369_0_01_0001.DAT 132871321 132882919
INPUT_FILE=ANC36_026_21_07002_0371_0_01_0001.DAT 132882919 132894517
INPUT_FILE=ANC36_026_21_07002_0373_0_01_0001.DAT 132894517 132906115
INPUT_FILE=ANC36_026_21_07002_0375_0_01_0001.DAT 132906115 132917713
INPUT_FILE=ANC36_026_21_07002_0377_0_01_0001.DAT 132917713 132929312
INPUT_FILE=anc38_001_01_0000.dat 0 0
INPUT_FILE=anc41_009_01_0000.dat 0 0
INPUT_FILE=anc45_026_01_0001.dat 0 0
INPUT_FILE=anc45_026_01_0002.dat 0 0
INPUT_FILE=anc45_026_01_0003.dat 0 0
INPUT_FILE=anc45_026_01_0004.dat 0 0
INPUT_FILE=anc45_026_01_0005.dat 0 0
INPUT_FILE=anc45_026_01_0006.dat 0 0
INPUT_FILE=anc45_026_01_0007.dat 0 0
INPUT_FILE=anc45_026_01_0008.dat 0 0
INPUT_FILE=anc45_026_01_0009.dat 0 0
INPUT_FILE=anc45_026_01_0010.dat 0 0
INPUT_FILE=anc45_026_01_0011.dat 0 0
INPUT_FILE=anc45_026_01_0012.dat 0 0
INPUT_FILE=anc45_026_01_0013.dat 0 0
INPUT_FILE=anc45_026_01_0014.dat 0 0
INPUT_FILE=anc45_026_01_0015.dat 0 0
OUTPUT_FILE=GLA07_532_2107_002_0365_0_01_0001.DAT 132848124 132859722 532 1 0
OUTPUT_FILE=GLA07_532_2107_002_0367_0_01_0001.DAT 132859722 132871321 532 1 0
OUTPUT_FILE=GLA07_532_2107_002_0369_0_01_0001.DAT 132871321 132882919 532 1 0
OUTPUT_FILE=GLA07_532_2107_002_0371_0_01_0001.DAT 132882919 132894517 532 1 0
OUTPUT_FILE=GLA07_532_2107_002_0373_0_01_0001.DAT 132894517 132906115 532 1 0
OUTPUT_FILE=GLA07_532_2107_002_0375_0_01_0001.DAT 132906115 132917713 532 1 0
OUTPUT_FILE=GLA07_532_2107_002_0377_0_01_0001.DAT 132917713 132929312 532 1 0
OUTPUT_FILE=GLA07_532_2107_002_0365_0_01_0001.QAP 132848124 132859722 532 1 0
OUTPUT_FILE=GLA07_532_2107_002_0367_0_01_0001.QAP 132859722 132871321 532 1 0
OUTPUT_FILE=GLA07_532_2107_002_0369_0_01_0001.QAP 132871321 132882919 532 1 0
OUTPUT_FILE=GLA07_532_2107_002_0371_0_01_0001.QAP 132882919 132894517 532 1 0
OUTPUT_FILE=GLA07_532_2107_002_0373_0_01_0001.QAP 132894517 132906115 532 1 0
OUTPUT_FILE=GLA07_532_2107_002_0375_0_01_0001.QAP 132906115 132917713 532 1 0
OUTPUT_FILE=GLA07_532_2107_002_0377_0_01_0001.QAP 132917713 132929312 532 1 0
OUTPUT_FILE=GLA08_532_2107_002_0365_0_01_0001.DAT 132848124 132929312 532 1 0
OUTPUT_FILE=GLA08_532_2107_002_0365_0_01_0001.QAP 132848124 132929312 532 1 0
OUTPUT_FILE=GLA09_532_2107_002_0365_0_01_0001.DAT 132848124 132929312 532 1 0
OUTPUT_FILE=GLA09_532_2107_002_0365_0_01_0001.QAP 132848124 132929312 532 1 0
OUTPUT_FILE=GLA10_532_2107_002_0365_0_01_0001.DAT 132848124 132929312 532 1 0
OUTPUT_FILE=GLA10_532_2107_002_0365_0_01_0001.QAP 132848124 132929312 532 1 0
OUTPUT_FILE=GLA11_532_2107_002_0365_0_01_0001.DAT 132848124 132929312 532 1 0
OUTPUT_FILE=GLA11_532_2107_002_0365_0_01_0001.QAP 132848124 132929312 532 1 0
OUTPUT_FILE=ANC06_026_20060216_531287_01_GLAS_Atm.txt 0 0
ATMOSPHERE_PROCESS=ALL
```


Section 10

GLAS_Reader

10.1 Function

GLAS_Reader reads nearly all GLAS product and ancillary files and prints the data contained within those files in human-readable format.

GLAS_Reader differs from other PGEs in that it has a rudimentary interface which will let the user specify input files from the command line. As with control file specifications, start and stop times are required along with the filename. The interface is invoked when running GLAS_Reader without a control file argument.

GLAS_Reader performs no processing, but permits specification of what type of data should be written to the text file. GLAS_Reader also supports input/output time selection.

Note: GLAS_Reader is not intended for production use.

10.2 Input Files

Table 10-1 lists the potential inputs files to GLAS_Reader. All or some of these files may be specified. Note, however, that GLA00 APID files may not be specified without also specifying a corresponding ANC29 file. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details regarding the non-specific files.

Table 10-1 GLAS_Reader Inputs

File Spec	Type	Source	Short Description
anc01*_?????.dat	Dynamic Ancillary	met_util	Subsetted meteorological files. There is a separate ANC01 file per data type. All of the ANC01 files must be specified.
anc07*_0000.dat	Static Ancillary	Science Team	GLAS error file.
anc07*_0001.dat	Static Ancillary	Science Team	GLAS global constants file.
anc07*_0002.dat	Static Ancillary	Science Team	GLAS waveform constants file.
anc07*_0003.dat	Static Ancillary	Science Team	GLAS elevation constants file.
anc07*_0004.dat	Static Ancillary	Science Team	GLAS atmosphere constants file.
anc07*_0005.dat	Static Ancillary	Science Team	GLAS L1A constants file.
anc08*.dat	Dynamic Ancillary	UTexas	Precision orbit file.
anc09*.dat	Dynamic Ancillary	UTexas	Precision Attitude Data
anc12*_0001.dat	Static Ancillary	Science Team	DEM mask file.
anc13*.dat	Static Ancillary	Science Team	Geoid file

Table 10-1 GLAS_Reader Inputs (Continued)

File Spec	Type	Source	Short Description
anc16*.dat	Static Ancillary	Science Team	Ocean Tide file
anc17*.dat	Static Ancillary	Science Team	Load Tide file
anc18*.dat	Static Ancillary	Science Team	Standard Atmosphere file
anc22*.dat	Dynamic Ancillary		Reference Orbit Ascending Nodes
anc23*.dat	Dynamic Ancillary		NOSE rectangle coordinates
anc25*.dat	Dynamic Ancillary	Science Team	GPS/UTC conversion file.
anc27*.dat	Static Ancillary	Science Team	Regional mask files.
anc30*.dat	Static Ancillary	Science Team	Aerosol file
anc31*.dat	Static Ancillary	Science Team	Troposphere file
anc32*.dat	Dynamic Ancillary	GLAS_L0proc	Frequency board to GPS time correlation file.
anc33*.dat	Dynamic Ancillary	Science Team	UTC time conversion file.
anc36*.dat	Dynamic Ancillary	atm_anc	Atmosphere Calibration file.
anc45*.dat	Static Ancillary	Science Team	Metadata input files.
anc52*.dat	Static Ancillary	Instrument Team	Saturation Correction Tables
Control File	Control	ISIPS Operations	Control file.
gla00*.dat/ ANC29*.dat	Level-0 APID/ Dynamic Ancillary	EDOS/ GLAS_L0proc	GLAS Level-0 APID files and the requisite ANC29 index file.
gla*.dat	GLAS Product	GSAS	GLAS Product files.
gla*.qap	GLAS QA	GSAS	GLAS QA files

10.2.1 Control File

The control file format and common elements are documented in Section 5 of this document. Elements specific to GLAS_Reader are described here.

The control file section delimiter for GLAS_Reader is:

```
=GLAS_Reader
```

Where appropriate, GLAS_Reader can print different types of data to the output file. The type of data printed is based on execution flags within the control file. The flags and the data types they control are defined in Table 10-2.

Combinations of the execution flags are allowed. For example, to print both algorithm and scale values, the control file would have the following entries:

Table 10-2 GLAS_Reader Control Flags

Flag	Significance
READER_OPTION=PRODUCT	Indicates that GLAS_Reader should print product-type data (scaled integers).
READER_OPTION=ALGORITHM	Indicates that GLAS_Reader should print data converted as used in science algorithms.
READER_OPTION=SCALE	Indicates that GLAS_Reader should print the scale factors.
READER_OPTION=ALL	Indicates that GLAS_Reader should print all of the data types listed above.

```
READER_OPTION=ALGORITHM
```

```
READER_OPTION=SCALE
```

10.3 Output Files

GLAS_Reader requires no OUTPUT_FILE specifications in the control file. GLAS_Reader will create an output file for each type of input file requested. GLAS_Reader will strip the '.dat' from the specified input filename and replace it with a '.txt' extension. Time selection for the output files is based on the time specified with the input files.

A corresponding ANC29 file is required to process GLA00 APID files. When processing GLA00 APID files, GLAS_Reader writes all output to the ANC29 text file, instead of to individual APID files. The benefit of this is that the output is created in time-aligned fashion. Also note that specific APID files may be processed even though the ANC29 file was created with a superset of the selected APIDs.

10.4 Startup and Termination

This is an overview of the steps necessary to run GLAS_Reader.

10.4.1 Setup a Runtime Directory

The suggested method of running GLAS_Reader is to create a temporary directory and link all necessary files into it. For example, to setup a GLAS_Reader run, one would perform the following steps (Designate TEMP_DIR as the temporary directory and DATA_DIR as the location in which input data for this job has been staged):

```
mkdir $TEMP_DIR
cd $TEMP_DIR
ln -s $GLAS_HOME/bin/GLAS_Reader.
ln -s $GLAS_HOME/lib/*.
ln -s $GLAS_HOME/data/anc*.dat.
ln -s $DATA_DIR/*.dat.
```

10.4.2 Create a Control File

GLAS_Reader is designed to take the name of a control file as a command-line argument. The suggested method of creating a control file is by copying a template from the \$GLAS_HOME/data directory and modifying it with desired input/output filenames and data processing options.

```
cp $GLAS_HOME/data/cf_glas_reader.cf ./control_file_name
vi ./control_file_name
```

10.4.3 Run the PGE

Error and status messages will be displayed on screen (stdout) and recorded in the ANC06 file.

```
./GLAS_Reader control_file_name
```

10.4.4 Run-Time Statistics

Since GLAS_APID will not be used in the production environment, no runtime statistics have been recorded.

10.4.5 Termination

The process will terminate automatically upon reaching the end of all input data. The log/metadata file (ANC06*) must be examined to determine runtime success. Additionally, the process will return a result code to the operating system which may be used to programatically determine success or failure (0=success, 3=fatal error).

10.5 Error and Warning Messages

All GSAS error and warning messages are numerically listed in Appendix D.

10.6 Recovery Steps

If GLAS_Reader terminates with an error:

- 1) Review error and status messages in the ANC06 file or on stdout to determine source or location of problem.
- 2) Correct the problem
- 3) Remove previous output files
- 4) Re-run the software

In case of a problematic error, which cannot be easily diagnosed, debug versions of GLAS_Reader will be available for test use. This is, however, more of a developer procedure than a user procedure. Software users should contact the GSAS Development Team for more instructions

10.7 Sample GLAS_Reader Control File

This control file reads and writes 100 seconds of ANC29, ANC32, and GLA00 APIDs 17 and 19. It writes only Algorithm values to the output files. ANC32 data are written in anc32_002_20000101_000000_01_0000.txt. The ANC29 and GLA00 APID data are written to anc29_002_20000101_000000_01_0000.txt.

```
#
# This is the control file for the GLAS_Reader.
#
#-----Execution Information
#
=GLAS_Reader
EXEC_KEY=p3t1a
DATE_GENERATED=08 August 2001
OPERATOR=jlee
PGE_VERSION=2.2
#
#-----Dynamic ANC Files
#
# ANC29 and ANC32 files
#
INPUT_FILE=anc29_002_20000101_000000_01_0000.dat 0 100
INPUT_FILE=anc32_002_20000101_000000_01_0000.dat 0 100
#
# GLA00 files
#
INPUT_FILE=glA00_002_20000101_000000_01_0017.dat 0 100
INPUT_FILE=glA00_002_20000101_000000_01_0019.dat 0 100
#
#-----Execution Control
#
READER_OPTION=Algorithm
#
#-----End of Control File
#
```


Section 11

met_util

11.1 Function

This utility, `met_util`, creates ANC01 subset files (i.e. temperature, relative humidity, etc.) from a meteorological (ANC40) file. The ANC40 file is a standard GRIB file received from GSFC. The subset files are used as input for several of the GSAS PGEs. `met_util` reads the ANC07 file for error definitions.

`met_util` uses a subset of the standard GSAS control file with several modifications. The format of the `met_util` control file will be fully documented in a later subsection. `met_util` does not use an ANC06 file, has no processing control and no time selection capabilities.

`met_util` should be run before executing GLAS_Alt or GLAS_Atm (which require the subsetted ANC01 files) for the corresponding span of data.

11.2 Input Files

Table 11-1 lists the inputs files to `met_util`. The ANC40 file is the NCEP Global Analysis, a 1-by-1 degree gridded data set with sampling every 6 hours. Variables included are temperature, geopotential height, and relative humidity at standard upper atmospheric pressure levels. The ANC40 files are in the GRIB format, which is the WMO (World Meteorological Organization) standard for exchanging gridded binary data. All of these files must be specified and named according to GSAS file naming conventions.

Table 11-1 `met_util` Inputs

File Spec	Type	Source	Short Description
anc40*.dat	Dynamic Ancillary	GSFC	Standard MET file.
anc07*_0000.dat	Static Ancillary	Science Team	GLAS error file.
anc07*_0006.dat	Static Ancillary	Science Team	GLAS utility constants file.
Control File	Control	ISIPS Operations	Control file.

11.2.1 Control File

The `met_util` control file is a subset of the standard GSAS control file. The basic format of this file is documented in Section 5 of this document. `met_util` does not use the common elements used in other GSAS control files.

The control file section delimiter for `met_util` is:

```
=met_util
```

The only keywords `met_util` uses are “INPUT_FILE”, “OUTPUT_FILE”, and the control file section delimiter. The “INPUT_FILE” and “OUTPUT_FILE” specifications do not have start time and stop times.

11.3 Output Files

Table 11-2 lists the specific subset output files created by met_util. The five files are an ASCII header file, a height file, a temperature file, a relative humidity file, and a precipitable water table file. The last four files are binary with no header.

Each record in the binary output file contains the global gridded values of the respective parameter at a particular pressure level. The first record is at the highest pressure level, and the last record is at the lowest pressure level. The ASCII header file lists the record number, location, date, pressure level, and parameter name (as read from the MET file). Refer to <http://wesley.wwb.noaa.gov/wgrib.html> for details

Output files must be named according to standard GSAS naming conventions.

Table 11-2 met_util Outputs

File Spec	Type	Destination	Short Description
anc01*_0000.dat	Dynamic Ancillary	GSAS PGEs/ Archive	Subsetted meteorological header file.
anc01*_0001.dat	Dynamic Ancillary	GSAS PGEs/ Archive	Subsetted meteorological precipitable water file.
anc01*_0002.dat	Dynamic Ancillary	GSAS PGEs/ Archive	Subsetted meteorological height file.
anc01*_0003.dat	Dynamic Ancillary	GSAS PGEs/ Archive	Subsetted meteorological relative humidity file.
anc01*_0004.dat	Dynamic Ancillary	GSAS PGEs/ Archive	Subsetted meteorological temperature file.

11.4 Startup and Termination

This is an overview of the steps necessary to run met_util. Specific operational procedures for each of the supported scenarios are provided in the ISIPS Operational Procedures Manual.

11.4.1 Setup a Runtime Directory

The suggested method of running met_util is to create a temporary directory and link all necessary files into it. The SDMS will create a temporary directory and link all necessary files into it. For example, to setup a met_util run, one would perform the following steps (Designate TEMP_DIR as the temporary directory and DATA_DIR as the location in which input data for this job has been staged):

```
mkdir $TEMP_DIR
cd $TEMP_DIR
ln -s $GLAS_HOME/bin/met_util .
ln -s $GLAS_HOME/bin/wgrib .
ln -s $GLAS_HOME/bin/SDMS_met_script .
ln -s $GLAS_HOME/lib/* .
```

```
ln -s $GLAS_HOME/data/anc*.dat .
ln -s $DATA_DIR/*.dat .
```

11.4.2 Create a Control File

met_util is designed to take the name of a control file as a command-line argument. The suggested method of creating a control file is by copying a template from the \$GLAS_HOME/data directory and modifying it with desired input/output filenames and data processing options.

```
cp $GLAS_HOME/data/cf_met_util.ctl ./control_file_name
vi ./control_file_name
```

11.4.3 Run the PGE

Error and status messages will be displayed on the screen (stdout) and recorded in the ANC06 file.

```
./met_util control_file_name
```

11.4.4 Run-Time Statistics

met_util subsets one file (6 hours) of meteorological data in less than a minute. This may vary due to hardware load and data dependencies.

11.4.5 Termination

The process will terminate automatically upon reaching the end of all input data. Standard output (stdout) must be examined to determine runtime success. Additionally, the process will return a result code to the operating system which may be used to programatically determine success or failure (0=success, 3=fatal error).

11.5 Error and Warning Messages

Fatal errors are generated if there is a problem opening or reading a file. When an error occurs, an error message is printed to the standard output. It includes the error number, severity, process name where the error occurred, a short description, and the file name if the error occurred while accessing a file.

Errors possible from met_util with the severity and frequency include:

ERROR=-10002 No control file specified	3	1
ERROR=-10014 Unrecognized line in control file	3	1
ERROR=-10015 Unknown value in keyword/value pair	3	1
ERROR=-10017 I/O Error Reading Control File	3	1
ERROR=-10046 Error returned from script	3	1
ERROR=-10047 File naming conventions do not match	3	1

The error severity and frequency may be modified as described in the error section.

Explanations of these errors follow:

Table 11-3 Error Resolution

Error Type	Ensure that:
No control file specified	- control file name is typed correctly on command line
Reading File	- file is available - file is not corrupt - regenerate if necessary
Unrecognized line in control file	- keywords have not been changed in control file - extraneous lines have not been added to control file
Unknown value in keyword/value pair	- input and output file names in control file conform to their correct naming conventions
File naming conventions do not match	- input and output file names in control file conform to their correct naming conventions - input and output file names match except for the last 7 characters
Error returned from script	- the script and executable are linked into the directory where the program is run - disk space is available

11.6 Recovery Steps

If met_util terminates with an error:

- 1) Review error and status messages on stdout to determine source or location of problem. Use Table 11-3 above for assistance.
- 2) Correct the problem
- 3) Remove previous output files
- 4) Re-run the software

In case of a problematic error, which cannot be easily diagnosed, debug versions of met_util will be available for test use. This is, however, more of a developer procedure than a user procedure. Software users should contact the GSAS Development Team for more instructions

11.7 Sample met_util Control File

This control file creates subsetted ANC01 files from the input ANC40 meteorological file.

```
= MET_UTIL
INPUT_FILE=anc40_000_20000101_120000_0001.dat
INPUT_FILE=anc07_000_00_0000.dat
INPUT_FILE=anc07_000_00_0006.dat
OUTPUT_FILE=anc01_000_20000101_120000_01_0000.dat
OUTPUT_FILE=anc01_000_20000101_120000_01_0001.dat
OUTPUT_FILE=anc01_000_20000101_120000_01_0002.dat
OUTPUT_FILE=anc01_000_20000101_120000_01_0003.dat
```

```
OUTPUT_FILE=anc01_000_20000101_120000_01_0004.dat  
=
```


Section 12

reforbit_util

12.1 Function

This utility, `reforbit_util`, processes a given Reference Orbit file (ANC26) for all ascending equatorial crossings. Each ascending equatorial crossing will be given a track number. The first track west of Greenwich (or on Greenwich) will be assigned a Track number of 1 and its time will be determined. All consecutive tracks after that (in increasing time order) will be assigned numbers 2, 3, 4, and so on. All tracks that were to the right of Track 1, will be wrapped around the last track on the left and numbered accordingly.

This routine will also create an ECS NOSE file. The NOSE track file will be created from the along track locations. The routine will (starting from Track 1) scroll the along track locations at 161 second time increments. These increments correspond to 10 degree latitude increments. Polygons of approximately one km width in the longitude direction, and a ten degree length in the longitudinal direction will be created. These polygons will be tangential, with the end of the last polygon for track number n being the beginning of the first polygon for track number $n+1$. ECS requires track numbers to be sequential between the NOSE files. Therefore, a standalone routine, `adjustNOSETrkNum`, will be used to add an offset to the track number.

`reforbit_util` uses a modified version of the standard GSAS control file. The format of the `reforbit_util` control file will be fully documented in a later subsection. `reforbit_util` does not use an ANC06 file, has no processing control and no time selection capabilities.

`reforbit_util` should be run before executing GLAS_L1A, GLAS_Alt or GLAS_Atm (which require SDMS to provide orbit information) for the corresponding span of data.

12.2 Input Files

Table 12-1 lists the inputs files to `reforbit_util`. Refer to the “Interface Control Document Between I-SIPS/ISF and CSR” for a description of the Reference orbit file. All of these files must be specified and named according to GSAS file naming conventions.

Table 12-1 `reforbit_util` Inputs

File Spec	Type	Source	Short Description
anc26*.dat	Dynamic Ancillary	UTexas	Reference Orbit file.
anc07*_0000.dat	Static Ancillary	Science Team	GLAS error file.
anc07*_0006.dat	Static Ancillary	Science Team	GLAS Utility constants file.
Control File	Control	ISIPS Operations	Control file.

12.2.1 Control File

The reorbit_util control file is a modified version of the standard GSAS control file. The basic format of this file is documented in Section 5 of this document. reorbit_util does not use the common elements used in other GSAS control files.

The control file section delimiter for reorbit_util is:

```
=reorbit_util
```

The only keywords reorbit_util uses are "INPUT_FILE", "INPUT_ERR", "OUTPUT_FILE1", "OUTPUT_FILE2", "OUTPUT_FILE3" and the control file section delimiter. These keyword specifications do not have start time and stop times. The keywords are used for the following designations:

Table 12-2 reorbit_util Keywords

Keyword	Value
INPUT_FILE	Input reference orbit filename.
INPUT_ERR	ANC07 error filename
OUTPUT_FILE1	output ANC22 reference orbit filename
OUTPUT_FILE2	SCF track file name (ANC 43)
OUTPUT_FILE3	NOSE track file name(ANC28)

12.3 Output Files

reorbit_util creates three files as output. The first file is an ASCII file (reference orbit track file), which contains the ascending node longitude and track number. The first record contains the average period of the tracks (in seconds), and the number of tracks in the reference orbit file. All subsequent records contain the longitude (in degrees E longitude), the track number, time in seconds relative to Track 1, the actual MJD time (in days), and the seconds of day.

The second file is in Fortran direct access format, with each record being 46412 bytes. This file is used by the SCF. It contains the 1-second along track locations for each track in the reference orbit file. Each 46412 byte record will contain 5801 latitudes (4-bytes each), 5801 longitudes (4-bytes each), and a 4-byte delta time. There will be one record for each track. The latitudes and longitudes are 1-second locations along each track from the start of the track to the end. The delta time indicates the time interval along the tracks (in this case 1 second).

The third file is an ASCII ECS NOSE track file. The format of the NOSE track is as follows:

```
A|3|track_1|block_1
B|pt1_lat|pt1_lon|0
B|pt2_lat|pt2_lon|0
B|pt3_lat|pt3_lon|0
```

B|pt4_lat|pt4_lon|2

Where,

- Items in bold are fixed for ECS purposes,
- Longitudes (lon) values are expressed in decimal degrees (4 radix places), with values in the range [-180.0000° .. +180.0000°] [+E]
- Latitude (lat) values are expressed in decimal degrees (4 radix places), with values in the range [-90.0000° .. +90.0000°] [+E]
- Repeat A,B,B,B,B records for all blocks (polygons) per track, and all tracks
- Points shall be ordered in a clockwise fashion, with no intersecting edges.

Table 12-3 reforbit_util Outputs

File Spec	Type	Destination	Short Description
anc22*.dat	Dynamic Ancillary	SDMS/Archive	Reference orbit file.
N/A	Dynamic Ancillary	SCF	SCF track file.
N/A	Dynamic Ancillary	ISIPS	NOSE track file

12.4 Startup and Termination

This is an overview of the steps necessary to run reforbit_util. Specific operational procedures for each of the supported scenarios are provided in the ISIPS Operational Procedures Manual.

12.4.1 Setup a Runtime Directory

The suggested method of running reforbit_util is to create a temporary directory and link all necessary files into it. The SDMS will create a temporary directory and link all necessary files into it. For example, to setup a reforbit_util run, one would perform the following steps (Designate TEMP_DIR as the temporary directory and DATA_DIR as the location in which input data for this job has been staged):

```
mkdir $TEMP_DIR
cd $TEMP_DIR
ln -s $GLAS_HOME/bin/reforbit_util.
ln -s $GLAS_HOME/lib/*.
ln -s $GLAS_HOME/data/anc*.dat.
ln -s $DATA_DIR/*.dat.
```

12.4.2 Create a Control File

reforbit_util is designed to take the name of a control file as a command-line argument. The suggested method of creating a control file is by copying a template from the \$GLAS_HOME/data directory and modifying it with desired input/output filenames and data processing options.

```
cp $GLAS_HOME/data/cf_reorbit_util.ctl ./control_file_name
vi ./control_file_name
```

12.4.3 Run the PGE

Error and status messages will be displayed on the screen (stdout) and recorded in the ANC06 file.

```
./met_util control_file_name
```

12.4.4 Run-Time Statistics

reorbit_util processes one orbit file in less than a minute. This may vary due to hardware load and data dependencies.

12.4.5 Termination

The process will terminate automatically upon reaching the end of all input data. Standard output (stdout) must be examined to determine runtime success. Additionally, the process will return a result code to the operating system which may be used to programatically determine success or failure (0=success, 3=fatal error).

12.5 Error and Warning Messages

Fatal errors are generated if there is a problem opening or reading a file. When an error occurs, an error message is printed to the standard output. It includes the error number, severity, process name where the error occurred, a short description, and the file name if the error occurred while accessing a file.

Errors possible from reorbit_util with the severity and frequency include:

ERROR=-10001 Error Opening File for Input	3	1
ERROR=-10002 No control file specified	3	1
ERROR=-10006 Error Opening File for Output	3	1
ERROR=-10014 Unrecognized line in control file	3	1
ERROR=-10017 I/O Error Reading Control File	3	1
ERROR=-10029 Error Returned From Script	3	1
ERROR=-50008 Value of cosine GT 1.0 in Geoloc	2	1
ERROR=-50009 Value of cosine Lt -1.0 in Geoloc	2	1
ERROR=-50010 Max Iterations exceeded in Geoloc	2	1
ERROR=-50013 Error reading 10 consec recs in POD file3	3	1

The error severity and frequency may be modified as described in the error section.

Explanations of these errors follow:

Table 12-4 Error Resolution

Error Type	Ensure that:
No control file specified	- control file name is typed correctly on command line
Reading File	- file is available - file is not corrupt - regenerate if necessary
Unrecognized line in control file	- keywords have not been changed in control file - extraneous lines have not been added to control file

12.6 Recovery Steps

If reorbit_util terminates with an error:

- 1) Review error and status messages on stdout to determine source or location of problem. Use Table 12-4 above for assistance.
- 2) Correct the problem
- 3) Remove previous output files
- 4) Re-run the software

In case of a problematic error, which cannot be easily diagnosed, debug versions of reorbit_util will be available for test use. This is, however, more of a developer procedure than a user procedure. Software users should contact the GSAS Development Team for more instructions

12.7 Sample reorbit_util Control File

This control file creates the ANC22 reference orbit file from the ANC26 input file.

```
= reorbit_util
INPUT_FILE=anc26_000_20000101_120000_0001.dat
INPUT_ERR= anc07_000_00_0000.dat
OUTPUT_FILE1=anc22_000_20000101_120000_0001.dat
OUTPUT_FILE2=anc43_20000101_120000_0001.dat
OUTPUT_FILE3=anc28_20000101_120000_0001.dat
=
```


Section 13

createGranule_util

13.1 Function

This utility, createGran_util, processes a given Predicted Orbit file and using a Reference Orbit ID file, creates 1/4 rev, 2 rev, and 14 rev granules. This utility will call the createGranule subroutine to create two scratch files (a rev file, and a granule file). The rev file will contain all the ascending equatorial crossings determined from the predicted orbit file. The granule file will contain the +/- 50 degree latitude crossings. The +/-50 degree latitude crossings will be designated by segment numbers. The segment numbers are defined in Table 13-1.

Table 13-1 Segment Description

Segment	Description
Segment 1	start of +50 degree latitude crossing (on the ascending portion of the track),
Segment 2	start of +50 degree latitude crossing (on the descending portion of the track),
Segment 3	start of a -50 degree latitude crossing (on the descending portion of the track),
Segment 4	start of a -50 degree latitude crossing (on the ascending portion of the track).

This utility will then check the operation mode selected (i.e., Predict or Reference). If the Reference mode is selected, then this utility will call the update_refTab subroutine to calculate the begin track, and time into begin track for the relevant reference orbit files. The Reference Orbit ID file (which is an input to this routine) will be updated with this new information. If the Predict mode is selected, then the calc_granules subroutine will be invoked. This routine will calculate the 1/4 rev, 2 rev, and 14 rev granule information on the basis of information contained in the Reference Orbit ID file and Predicted Orbit file. The calculated granule information will be written to user specified files. The information from the 1/4 rev granules will be used along with the appropriate track file to generate a SCF rev file. The SCF rev file will list the rev numbers, start times of each track as well as the reference orbit repeat ground track phase, reference orbit number and instance

createGran_util uses a modified version of the standard GSAS control file. The format of the createGran_util control file will be fully documented in a later subsection. createGran_util does not use an ANC06 file, has no processing control and no time selection capabilities.

createGran_util should be run before executing GLAS_L1A, GLAS_Alt or GLAS_Atm (which require SDMS to provide segment information) for the corresponding span of data.

13.2 Input Files

Table 13-2 lists the inputs files to createGran_util. Refer to the “Interface Control Document Between I-SIPS/ISF and CSR” for a description of the Predicted orbit file. All of these files must be specified and named according to GSAS file naming conventions.

Table 13-2 createGran_util Inputs

File Spec	Type	Source	Short Description
anc22*.dat	Dynamic Ancillary	UTexas	Predicted Orbit file.
anc42*.dat	Dynamic Ancillary	ISIPS	Reference orbit table.
anc07*_0000.dat	Static Ancillary	Science Team	GLAS error file.
anc25*.dat	Dynamic Ancillary	Science Team	GPS/UTC conversion file.
Control File	Control	ISIPS Operations	Control file.

13.2.1 Control File

The createGran_util control file is a modified version of the standard GSAS control file. The basic format of this file is documented in Section 5 of this document. createGran_util does not use the common elements used in other GSAS control files.

The control file section delimiter for createGran_util is:

```
=createGran_util
```

createGran_util keyword file specifications do not have start time and stop times. createGran_util uses the following keywords:

Table 13-3 createGran_util Keywords

Keyword	Value
IN_REFORBFILE	Reference orbit ID file name.
IN_PREDORBFILE	Predicted orbit table file name.
IN_ERRORFILE	Ancillary error file name.
IN_ANC25FILE	it is the GPS/UTC conversion file
LAST_TRACK	it is optional, but should be used when in transfer orbit mode
OUT_REFORBFILE	Reference orbit ID file name.
OUT_QRTREVFILE	quarter rev file name.
OUT_2REVFILE	two rev file name.
OUT_14REVFILE	fourteen rev file name
OUT_SCFREVFILE	SCF rev file name
PROC_MODE	Processing mode (i.e. PREDORB or REFORB)

Table 13-3 createGran_util Keywords (Continued)

Keyword	Value
START_TM	POD start time (J2000 secs)
STOP_TM	POD stop time (J2000 secs)

When running in REFORB mode, the IN_REFORBFILE, IN_PREDORBBFILE, IN_ERRORFILE, IN_ANC25FILE, OUT_REFORBFILE, PROC_MODE, START_TM, and STOP_TM keywords are required. For the PREDORB mode, the IN_REFORBFILE, IN_PREDORBBFILE, IN_ERRORFILE, IN_ANC25FILE, OUT_QRTREVFIL, OUT_2REVFIL, OUT_14REVFIL, OUT_SCFREVFIL, PROC_MODE, START_TM, and STOP_TM keywords are required. The LAST_TRACK keyword is optional, and is only used when in the transfer orbit mode. The value of the last track will be the last track that was processed by the predicted orbit file for the previous day.

13.3 Output Files

Four ASCII files are the primary output. The first file (called the quarter rev file) contains the quarter rev start time (in J2000 seconds), repeat ground track phase, reference orbit number, instance, product type (1 for quarter rev granule), cycle number, track number, and segment number for all the quarter rev granules determined from the predicted orbit file. The next ASCII file (the two rev file) contains the two rev start time (in J2000 seconds), repeat ground track phase, reference orbit number, instance, product type (2 for two rev granule), cycle number, track number, and segment number for all the two rev granules determined from the predicted orbit file. The third ASCII file (the fourteen rev file) contains the fourteen rev start time (in J2000 seconds), repeat ground track phase, reference orbit number, instance, product type (3 for two rev granule), cycle number, track number, and segment number for all the fourteen rev granules determined from the predicted orbit file. The fourth ASCII file (called the SCF rev file) contains the relative rev numbers, starting from 1 (during each execution), that were determined from the given predicted orbit file. It also contains the start time, repeat ground track phase, reference orbit number, instance, cycle number, and track number for all the equator crossings determined from the predicted orbit file.

Additionally, two ASCII scratch files will be created by the createGran_util Utility. The first file will be a rev file, which will contain the rev times and longitudes. Each row of this file will contain the time (in J2000 secs), latitude, and longitude of the ascending equatorial crossings. The other file will be a granule file, which will have the segment crossing times, and locations (latitudes and longitudes), as well as the segment numbers. Each line of the granule file will contain the start time (in J2000 secs), the latitude, longitude, and the segment number of a granule respectively. The first two rows will have a segment number of 10 and 11 respectively. These granules list the start and end times of the predicted orbit file respectively. For a two day predicted orbit file, the rev scratch file should be about 2 Kbytes, while a granule scratch file should be about 7Kbytes.

13.4 Startup and Termination

This is an overview of the steps necessary to run createGran_util. Specific operational procedures for each of the supported scenarios are provided in the ISIPS Operational Procedures Manual.

13.4.1 Setup a Runtime Directory

The suggested method of running createGran_util is to create a temporary directory and link all necessary files into it. The SDMS will create a temporary directory and link all necessary files into it. For example, to setup a createGran_util run, one would perform the following steps (Designate TEMP_DIR as the temporary directory and DATA_DIR as the location in which input data for this job has been staged):

```
mkdir $TEMP_DIR
cd $TEMP_DIR
ln -s $GLAS_HOME/bin/createGran_util.
ln -s $GLAS_HOME/lib/*.
ln -s $GLAS_HOME/data/anc*.dat.
ln -s $DATA_DIR/*.dat.
```

13.4.2 Create a Control File

createGran_util is designed to take the name of a control file as a command-line argument. The suggested method of creating a control file is by copying a template from the \$GLAS_HOME/data directory and modifying it with desired input/output filenames and data processing options.

```
cp $GLAS_HOME/data/cf_creategran.ctl ./control_file_name
vi ./control_file_name
```

13.4.3 Run the PGE

Error and status messages will be displayed on the screen (stdout) and recorded in the ANC06 file.

```
>./createGran_util control_file_name
```

13.4.4 Run-Time Statistics

createGran_util processes one orbit file in less than a minute. This may vary due to hardware load and data dependencies.

13.4.5 Termination

The process will terminate automatically upon reaching the end of all input data. Standard output (stdout) must be examined to determine runtime success. Additionally, the process will return a result code to the operating system which may be used to programatically determine success or failure (0=success, 3=fatal error).

13.5 Error and Warning Messages

Fatal errors are generated if there is a problem opening or reading a file. When an error occurs, an error message is printed to the standard output. It includes the error number, severity, process name where the error occurred, a short description, and the file name if the error occurred while accessing a file.

Errors possible from createGran_util with the severity and frequency include:

```

ERROR=-10001 Error Opening File for Input          3    1
ERROR=-10002 No control file specified              3    1
ERROR=-10006 Error Opening File for Output          3    1
ERROR=-10014 Unrecognized line in control file      3    1
ERROR=-10017 I/O Error Reading Control File         3    1
ERROR=-10029 Error Returned From Script            3    1
ERROR=-50008 Value of cosine GT 1.0 in Geoloc       2    1
ERROR=-50009 Value of cosine Lt -1.0 in Geoloc      2    1
ERROR=-50010 Max Iterations exceeded in Geoloc      2    1
ERROR=-50013 Error reading 10 consec recs in POD file3 1

```

The error severity and frequency may be modified as described in the error section. Explanations of these errors follow:

Table 13-4 Error Resolution

Error Type	Ensure that:
No control file specified	- control file name is typed correctly on command line
Reading File	- file is available - file is not corrupt - regenerate if necessary
Unrecognized line in control file	- keywords have not been changed in control file - extraneous lines have not been added to control file

13.6 Recovery Steps

If createGran_util terminates with an error:

- 1) Review error and status messages on stdout to determine source or location of problem. Use Table 13-4 above for assistance.
- 2) Correct the problem
- 3) Remove previous output files
- 4) Re-run the software

In case of a problematic error, which cannot be easily diagnosed, debug versions of createGran_util will be available for test use. This is, however, more of a developer procedure than a user procedure.

13.7 Sample createGran_util Control File (REFORB)

This control file processes a reference orbit ID file with processing mode set to REFORB.

```
=CREATEGRAN_UTIL Control file createGran utility
IN_REFORBFIL=reforbIDfile_123
IN_PREDORBFIL=day3orb.da
IN_ANC25File=anc25_001_20021213_000000_01_0000.dat
IN_ERRORFILE=anc07_001_01_0000.dat
IN_ERRORFILE=anc07_001_01_0001.dat
OUT_REFORBFIL=reforbIDfile_123out
PROC_MODE=REFORB
START_TM= 173250.0
STOP_TM= 258945.0
=END of control file
```

13.8 Sample createGran_util Control File (PREDORB)

This control file processes a reference orbit ID file with processing mode set to PREDORB.

```
=CREATEGRAN_UTIL Control file createGran utility
IN_REFORBFIL=reforbIDfile_123out
IN_PREDORBFIL=day3orb.da
IN_ANC25File=anc25_001_20021213_000000_01_0000.dat
IN_ERRORFILE=anc07_001_01_0000.dat
IN_ERRORFILE=anc07_001_01_0001.dat
IN_ERRORFILE=anc07_001_01_0002.dat
IN_ERRORFILE=anc07_001_01_0003.dat
IN_ERRORFILE=anc07_001_01_0004.dat
IN_ERRORFILE=anc07_001_01_0005.dat
IN_ERRORFILE=anc07_001_01_0006.dat
OUT_QRTREVFIL=qrtrevfile_2
OUT_2REVFIL=tworevfile_2
OUT_14REVFIL=fteenrevfile_2
OUT_SCFREVFIL=SCFrevfile_2
PROC_MODE=PREDORB
START_TM= 173250.0
STOP_TM= 258945.0
=END of control file
```

Section 14

atm_anc

14.1 Function

Atm_anc reads a GLA02 product file and computes 532 nm and 1064 nm calibration coefficients for specified-time segments. The coefficients per segment are output to an ancillary (ANC36) file which is used in the level 1B atmosphere data processing. A second ancillary file (ANC44) contains the 532 and 1064 data for clouds that were detected above about 10 km. The file is intended to be used for the calibration of the 1064 channel, which will be done separately by the science team, outside of normal ISIPS processing.

This utility performs an intermediary step between the atmosphere level 1A and level 1B data processing. It reads the GLA02 product file output from the atmosphere level 1A processing and creates a file containing data used by the atmosphere level 1B data processing. This file contains 532 nm and 1064 nm calibration coefficients calculated over specified-time segments. This is achieved by summing 532 nm and 1064 nm lidar data over each second of the GLA02 product file for a specified time. Once the time has been reached, the data is averaged for the segment. Standard atmosphere and meteorological (MET) data are retrieved and average 532 nm and 1064 nm molecular backscatter values are computed for each segment. Averaged 532 nm ozone transmissions are also computed for each segment. From these data, the 532 nm and 1064 nm calibration coefficients are calculated. The calibration coefficients, molecular backscatter, and ozone transmissions for each segment are written to the ancillary output file.

atm_anc uses a modified version of the standard GSAS control file. The format of the atm_anc control file will be fully documented in a later subsection. atm_anc does not use an ANC06 file, has no processing control and no time selection capabilities.

atm_anc should be run after executing met_util and GLAS_L1A, but before executing GLAS_Atm (which requires the ANC36 and ANC44 files) for the corresponding span of data.

14.2 Input Files

. Input files consist of the GLA02 product file, the standard atmosphere data file (ANC18), the

Table 14-1 atm_anc Inputs

File Spec	Type	Source	Short Description
anc01*_???.dat	Dynamic Ancillary	met_util	Subsetted MET files. There is a separate MET file per MET data type. All of the MET files must be specified.
anc07*_0000.dat	Static Ancillary	Science Team	GLAS error file.
anc07*_0002.dat	Static Ancillary	Science Team	GLAS atmosphere constants file.
anc18*.dat	Static Ancillary	Science Team	Standard Atmosphere file
anc35*.dat	Static Ancillary	Science Team	Ozone file
Control File	Control	ISIPS Operations	Control file.
gla02*.dat	L1A Product	GLAS_L1A	GLAS L1A Atmosphere product file.

ozone data file (ANC35), the MET data files (ANC01), and the ancillary (ANC07) files which contain constants used by the program and error numbers available to the program. Note that a full 12 hours of MET data (2 sets of files) must be specified. Table 14-1 lists the inputs files to atm_anc. All of these files must be specified and named according to GSAS file naming conventions

14.2.1 Control File

The atm_anc control file is a modified version of the standard GSAS control file. The basic format of this file is documented in Section 5 of this document. atm_anc does not use the common elements used in other GSAS control files.

The control file section delimiter for atm_anc is:

```
=atm_anc
```

The only keywords atm_anc uses are "INPUT_FILE", "OUTPUT_FILE" and the control file section delimiter.

14.3 Output Files

The software creates ANC36 and ANC44 output files.

14.3.1 ANC36

The ANC36 output file contains 23 values per segment:

- first latitude

Table 14-2 atm_anc Outputs

File Spec	Type	Destination	Short Description
anc36*.dat	Dynamic Ancillary	GLAS_Atm/Archive	Atmosphere Calibration file.
anc44*.dat	Dynamic Ancillary	Science Team	Atm 1064 Cirrus CAL File

- first longitude
- last latitude
- last longitude
- first record index
- first time (J2000 sec)
- last time (J2000 sec)
- 532 calibration coefficient at the high calibration height
- 532 calibration coefficient at the low calibration height
- 1064 calibration coefficient at the low calibration height
- average 532 lidar value at the high calibration height
- average 532 lidar value at the low calibration height
- average 1064 lidar value at the low calibration height
- average 532 molecular backscatter value at the high calibration height
- average 532 molecular backscatter value at the low calibration height
- average 1064 molecular backscatter value at the low calibration height
- average 532 ozone transmission value at the high calibration height
- average 532 ozone transmission value at the low calibration height
- average 532 background
- high calibration height (m)
- high calibration band width (m)
- low calibration height (m)
- low calibration band width (m)

The number of segments is the first number in the file.

An example of the output file follows:

```

2
  first lat      first lon      last lat      last lon
  rec_index     first_time     last_time     ccof_ghi     ccof_glo     ccof_irlo
    lid_ghi         lid_glo         lid_irlo         mol_ghi         mol_glo
mol_irlo

```

oz_ghi	oz_glo	g_bkgrd	cht_hi	hi_wid	cht_lo
lo_wid					

50.1268	354.2534	84.9712	306.0022		
30010.	3001.		3589.	3.513E+13	4.695E+13 5.684E+02
7.952E+05	1.274E+07	1.021E-05	2.281E-08	2.795E-07	1.797E-08
9.921E-01	9.712E-01	5.509E+00	30000.00	2000.00	14848.00 2000.00
	36010.		3601.	4189.	3.924E+13 5.412E+13
9.802E+02					
8.847E+05	1.265E+07	1.516E-05	2.264E-08	2.413E-07	1.547E-08
9.961E-01	9.686E-01	5.510E+00	30000.00	2000.00	14848.00 2000.00

The output file is meant to be used by the GSAS atmosphere level 1B data processing routines. These routines read the ANC36 file and interpolate the 532 nm and 1064 nm calibration coefficients per segment to once per second. These coefficients are then used to compute the 532 nm and 1064 nm backscatter cross section profiles at once per second for use in the atmosphere level 2 data processing.

The ANC36 file must be named according to standard GSAS naming conventions

14.3.2 ANC44

For each cloud above 'GD_CIRRUS_HT' the ANC44 file contains a header line followed by 'GI_CIRRUS_BINS' bins of 532 and 1064 NRB (GLA02) data, averaged to 1 second. The header line contains the time, latitude, longitude, cloud height, bin number of the first bin printed out and the number of bins printed out. There can be many clouds for a given granule, so the size of each ANC44 file can be considerable (1 MB or so).

An example of the ANC44 output for one cloud follows:

```
51890013.    50.127    354.585 13285.400    360    6
4.37720000D+06    3.50340000D-05
9.44040000D+06    8.62500000D-05
8.54600000D+06   -5.03000000D-06
4.14280000D+06    8.40680000D-05
7.54640000D+06    7.29500000D-05
3.51900000D+06    5.51380000D-05
```

14.4 Startup and Termination

This is an overview of the steps necessary to run atm_anc. Specific operational procedures for each of the supported scenarios are provided in the ISIPS Operational Procedures Manual.

14.4.1 Setup a Runtime Directory

The suggested method of running atm_anc is to create a temporary directory and link all necessary files into it. The SDMS will create a temporary directory and link all necessary files into it. For example, to setup a atm_anc run, one would perform the following steps (Designate TEMP_DIR as the temporary directory and DATA_DIR as the location in which input data for this job has been staged):

```
>mkdir $TEMP_DIR
>cd $TEMP_DIR
>ln -s $GLAS_HOME/bin/atm_anc.
```

```
>ln -s $GLAS_HOME/lib/*.  
>ln -s $GLAS_HOME/data/anc*.dat.  
>ln -s $DATA_DIR/*.dat.
```

14.4.2 Create a Control File

atm_anc is designed to take the name of a control file as a command-line argument. The suggested method of creating a control file is by copying a template from the \$GLAS_HOME/data directory and modifying it with desired input/output filenames and data processing options.

```
>cd $TEMP_DIR  
>cp $GLAS_HOME/data/control_template ./control_file_name  
>vi ./control_file_name
```

14.4.3 Run the PGE

Error and status messages will be displayed on screen (stdout) and recorded in the ANC06 file.

```
>cd $TEMP_DIR  
>./atm_anc control_file_name
```

14.4.4 Run-Time Statistics

atm_anc processes one orbit file in approximately x minutes. This may vary due to hardware load and data dependencies.

14.4.5 Termination

The process will terminate automatically upon reaching the end of all input data. Standard output (stdout) must be examined to determine runtime success. Additionally, the process will return a result code to the operating system which may be used to programmatically determine success or failure (0=success, 3=fatal error).

14.5 Error and Warning Messages

Fatal errors are generated if there is a problem opening or reading a file. When an error occurs, an error message is printed to the standard output. It includes the error number, severity, process name where the error occurred, a short description, and the file name if the error occurred while accessing a file.

Errors possible from atm_anc with the severity and frequency include:

```
ERROR=-10001 Error Opening File for Input: 31  
ERROR=-10002 No control file specified31  
ERROR=-10006 Error Opening File for Output31  
ERROR=-10008 Error Reading File31  
ERROR=-10009 Error Writing File31  
ERROR=-10014 Unrecognized line in control file31
```

```

ERROR=-10015 Unknown value in keyword/value pair 3 1
ERROR=-10017 I/O Error Reading Control File31
ERROR=-10025 Error Reading Standard Atmosphere file header
3 1
ERROR=-10026 Error Reading Standard Atmosphere file data
3 1
ERROR=-40001 DEM out-of-bounds 150
ERROR=-40024 Invalid value written to ancillary file 11
ERROR=-40025 Array index is greater than size allowed31

```

The error severity and frequency may be modified as described in the error section.

Explanations of these errors follow:

Table 14-3 Error Resolution

Error Type	Ensure that:
No control file specified	- control file name is typed correctly on command line
Opening File	- file is available - control file reflects the correct file name - file name does not exceed 60 characters
Reading File	- file is available - file is not corrupt - regenerate if necessary
Writing File	- file is available - disk space is available
Unrecognized line in control file	- keywords have not been changed in control file - extraneous lines have not been added to control file
Unknown value in keyword/ value pair	- input and output file names in control file conform to their correct naming conventions
Array index is greater than size allowed	- the dimension of the array is sufficient for the data it needs to contain - the amount of data is not too large for the array

14.6 Recovery Steps

If atm_anc terminates with an error:

- 1) Review error and status messages on stdout to determine source or location of problem. Use Table 14-3 above for assistance.
- 2) Correct the problem
- 3) Remove previous output files
- 4) Re-run the software

In case of a problematic error, which cannot be easily diagnosed, debug versions of atm_anc will be available for test use. This is, however, more of a developer procedure than a user procedure.

14.7 Sample atm_anc Control File

```
=ATM Anc
INPUT_FILE=GLA02_002_22_01005_2331_0_01_0000.DAT
INPUT_FILE=ANC01_000_20010823_120000_01_0000.DAT
INPUT_FILE=ANC01_000_20010823_120000_01_0001.DAT
INPUT_FILE=ANC01_000_20010823_120000_01_0002.DAT
INPUT_FILE=ANC01_000_20010823_120000_01_0003.DAT
INPUT_FILE=ANC01_000_20010823_120000_01_0004.DAT
INPUT_FILE=ANC01_000_20010823_180000_01_0000.DAT
INPUT_FILE=ANC01_000_20010823_180000_01_0001.DAT
INPUT_FILE=ANC01_000_20010823_180000_01_0002.DAT
INPUT_FILE=ANC01_000_20010823_180000_01_0003.DAT
INPUT_FILE=ANC01_000_20010823_180000_01_0004.DAT
INPUT_FILE=ANC01_000_20010824_000000_01_0000.DAT
INPUT_FILE=ANC01_000_20010824_000000_01_0001.DAT
INPUT_FILE=ANC01_000_20010824_000000_01_0002.DAT
INPUT_FILE=ANC01_000_20010824_000000_01_0003.DAT
INPUT_FILE=ANC01_000_20010824_000000_01_0004.DAT
INPUT_FILE=anc07_001_01_0000.dat
INPUT_FILE=anc07_001_01_0001.dat
INPUT_FILE=anc07_001_01_0002.dat
INPUT_FILE=anc07_001_01_0003.dat
INPUT_FILE=anc07_001_01_0006.dat
INPUT_FILE=anc07_001_01_0005.dat
INPUT_FILE=anc07_002_01_0004.dat
INPUT_FILE=anc18_001_01_0000.dat
INPUT_FILE=anc35_001_01_0000.dat
OUTPUT_FILE=ANC36_002_22_01005_2331_0_01_0000.DAT
OUTPUT_FILE=ANC44_002_22_01005_2331_0_01_0000.DAT
```


Section 15

GLAS_Meta

15.1 Function

GLAS_Meta reads ANC45 and ANC46 metadata input files and, using the parsed information, reads the header records of GLAS product and ancillary files to create ECS-compliant inventory-level metadata files. GLAS_Meta may be either run immediately after specific product files have been generated or just before sending batches of product/ancillary files for distribution. GLAS_Meta allows for multiple-file/multi-granule input and output files.

15.2 Input Files

Table 15-1 lists the inputs to GLAS_Meta. Files which are specific to GLAS_Meta are documented in this section. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details regarding the those files not specific to GLAS_Meta.

Table 15-1 GLAS_Meta Inputs

File Spec	Type	Source	Short Description
gla*.dat	GLAS Products	GSAS	GLAS product files.
anc45*.dat	Static Ancillary	Science Team	Product metadata input files.
anc04*.dat	Dynamic Ancillary	UTexas	IERS Polar Motion and Earth Rotation Data File.
anc46*_0004.dat	Static Ancillary	Science Team	Ancillary metadata input file for ANC04.
anc08*.dat	Dynamic Ancillary	UTexas	Precision Orbit file.
anc46*_0008.dat	Static Ancillary	Science Team	Ancillary metadata input file for ANC08.
anc09*.dat	Dynamic Ancillary	UTexas	Precision Attitude file.
anc46*_0009.dat	Static Ancillary	Science Team	Ancillary metadata input file for ANC09.
anc20*.dat	Dynamic Ancillary	UTexas	Predicted orbit file.
anc46*_0020.dat	Static Ancillary	Science Team	Ancillary metadata input file for ANC20.
anc22*.dat	Dynamic Ancillary	ISIPS	Track file.
anc46*_0022.dat	Static Ancillary	Science Team	Ancillary metadata input file for ANC22.
anc25*.dat	Dynamic Ancillary	Science Team	GPS/UTC conversion file.

Table 15-1 GLAS_Meta Inputs (Continued)

File Spec	Type	Source	Short Description
anc46*_0025.dat	Static Ancillary	Science Team	Ancillary metadata input file for ANC25.
anc33*.dat	Dynamic Ancillary	Science Team	UTC time conversion file.
anc46*_0033.dat	Static Ancillary	Science Team	Ancillary metadata input file for ANC33.
anc37*.dat	Dynamic Ancillary	UTEXAS	Spacecraft CG file.
anc46*_0037.dat	Static Ancillary	Science Team	Ancillary metadata input file for ANC37.
anc39*.dat	Dynamic Ancillary	UTEXAS	GPS file.
anc46*_0039.dat	Static Ancillary	Science Team	Ancillary metadata input file for ANC39.
anc07*_0001.dat	Static Ancillary	Science Team	GLAS global constants file.
Control File	Control	ISIPS Operations	Control file.

15.2.1 ANC45 Product Metadata Input Files

ANC45 Metadata input files are text-based templates created from ESDTs (Earth Science Data Types). The GLAS team collaborated with NSIDC to create ESDTs for each product and each ancillary product. Within the ESDT are collection-level and inventory-level metadata. Only the inventory-level metadata is present in the ANC45 files.

Each ANC45 filetype corresponds to the similarly numbered GLA product file. The files are parsed and empty fields are filled in from values present in the appropriate product header records.

Note that a single ANC04*_04 file is used for GLA04 processing and only the GLA04*_06.dat file is required to satisfy the GLA04 metadata processing requirements.

15.2.2 ANC46 Ancillary Metadata Input Files

ANC46 Metadata input files are text-based templates created from ESDTs (Earth Science Data Types). The GLAS team collaborated with NSIDC to create ESDTs for each product and each ancillary product. Within the ESDT are collection-level and inventory-level metadata. Only the inventory-level metadata is present in the ANC46 files.

Each ANC46 filetype corresponds to the similarly numbered ancillary file. The files are parsed and empty fields are filled in from values related to the target ancillary file.

15.2.3 Control File

The control file format and common elements are documented in Section 5 of this document. Elements specific to GLAS_Meta are described in this section.

The control file section delimiter for GLAS_Meta is:

=GLAS_Meta

Since GLAS_Meta has no requirement for execution scenarios, there are no unique keywords for the GLAS_Meta control file. GLAS_Meta will perform all functions based on the presence of input and output files within the control file.

15.3 Output Files

Table 15-2 lists the outputs created by GLAS_Meta. Files which are specific to GLAS_Meta are documented in this section. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details regarding the files which are not specific to GLAS_Meta.

Table 15-2 GLAS_Meta Outputs

File Spec	Type	Destination	Short Description
gla*.met	Metadata	ECS	ECS-compliant metadata inventory files.
anc04*.met	Metadata	ECS	IERS Polar Motion and Earth Rotation metadata File.
anc08*.met	Metadata	ECS	Precision Orbit metadata file.
anc09*.met	Metadata	ECS	Precision Attitude metadata file.
anc20*.met	Metadata	ECS	Predicted orbit metadata file.
anc22*.met	Metadata	ECS	Track metadata file.
anc25*.met	Metadata	ECS	GPS/UTC conversion metadata file.
anc33*.mett	Metadata	ECS	UTC time conversion metadata file.
anc37*.met	Metadata	ECS	Spacecraft CG metadata file.
anc39*.met	Metadata	ECS	GPS metadata file.
anc06*.txt	Dynamic Ancillary	ISIPS Operations	Standard metadata/processing log file.

15.3.1 GLA Metadata Files

GLAS metadata files are required to enable ECS to ingest GLAS products into their system. One metadata file must be generated for each GLAS product file delivered to ECS. Each GLAS product file type has a corresponding metadata file type (eg: gla05*.met corresponds to gla05*.dat). The exception is GLA04. Whereas GLA04 is a multi-file granule, a single metadata file is sufficient for each GLA04 granule. The gla04*_06.dat file should be used as input and gla04*_06.met as output when processing GLA04 metadata information.

15.4 Processing and Reprocessing Scenarios

GLAS_Meta supports only a full-processing scenario. All processing is based on the presence of input and output files within the control file.

Additionally, time-selected processing is not supported. The start and stop times on the INPUT_FILE and OUTPUT_FILE control file entries are ignored for processing.

15.5 Startup and Termination

This is an overview of the steps necessary to run GLAS_Meta.

15.5.1 Setup a Runtime Directory

The suggested method of running GLAS_Meta is to create a temporary directory and link all necessary files into it. The SDMS will create a temporary directory and link all necessary files into it. For example, to setup a GLAS_Meta run, one would perform the following steps (Designate TEMP_DIR as the temporary directory and DATA_DIR as the location in which input data for this job has been staged):

```
mkdir $TEMP_DIR
cd $TEMP_DIR
ln -s $GLAS_HOME/bin/GLAS_Meta .
ln -s $GLAS_HOME/lib/* .
ln -s $GLAS_HOME/data/anc07*.dat .
ln -s $GLAS_HOME/data/anc45*.dat .
ln -s $DATA_DIR/*.dat .
```

15.5.2 Create a Control File

GLAS_Meta is designed to take the name of a control file as a command-line argument. The suggested method of creating a control file is by copying a template from the \$GLAS_HOME/data directory and modifying it with desired input/output filenames and data processing options.

```
cp $GLAS_HOME/data/cf_glas_meta.ct1 ./control_file_name
vi ./control_file_name
```

15.5.3 Run the PGE

Error and status messages will be displayed on the screen (stdout) and recorded in the ANC06 file.

```
./GLAS_Meta control_file_name
```

15.5.4 Run-Time Statistics

GLAS_Meta has minimal processing requirements since it only parses the product header records.

15.5.5 Termination

The process will terminate automatically upon reaching the end of all input data. The log/metadata file (ANC06*) must be examined to determine runtime success. Additionally, the

process will return a result code to the operating system which may be used to programatically determine success or failure (0=success, 3=fatal error).

15.6 Error and Warning Messages

All GSAS error and warning messages are listed numerically in the Appendix D.

15.7 Recovery Steps

If GLAS_Meta terminates with an error:

- 1) Review error and status messages in the ANC06 file or on stdout to determine source or location of problem. Refer to errors listed in Appendix D for assistance in determining the problem.
- 2) Correct the problem
- 3) Remove previous output files
- 4) Re-run the software

In case of a problematic error, which cannot be easily diagnosed, debug versions of GLAS_Meta will be available for test use. This is, however, more of a developer procedure than a user procedure. Software users should contact the GSAS Development Team for more instructions.

15.8 Sample GLAS_Meta Control File

```
=GLAS_Meta
#
#-----Execution Information
#
EXEC_KEY=p3t1
PGE_VERSION=V2.2
DATE_GENERATED=11 January 2002
OPERATOR=jlee
#
#-----Static ANC Files
#
# Input ANC07 Files : 00=error, 01=global
#
INPUT_FILE=anc07_001_01_0000.dat 0000000 1000000
INPUT_FILE=anc07_001_01_0001.dat 0000000 1000000
#
# Input Metadata Templates
#
INPUT_FILE=anc45_001_01_0001.dat 0000000 100000000
INPUT_FILE=anc45_001_01_0002.dat 0000000 100000000
INPUT_FILE=anc45_001_01_0003.dat 0000000 100000000
INPUT_FILE=anc45_001_01_0004.dat 0000000 100000000
INPUT_FILE=anc45_001_01_0005.dat 0000000 100000000
INPUT_FILE=anc45_001_01_0006.dat 0000000 100000000
INPUT_FILE=anc45_001_01_0007.dat 0000000 100000000
INPUT_FILE=anc45_001_01_0008.dat 0000000 100000000
INPUT_FILE=anc45_001_01_0009.dat 0000000 100000000
```

```
INPUT_FILE=anc45_001_01_0010.dat 0000000 100000000
INPUT_FILE=anc45_001_01_0011.dat 0000000 100000000
INPUT_FILE=anc45_001_01_0012.dat 0000000 100000000
INPUT_FILE=anc45_001_01_0013.dat 0000000 100000000
INPUT_FILE=anc45_001_01_0014.dat 0000000 100000000
INPUT_FILE=anc45_001_01_0015.dat 0000000 100000000
#
# Input gla files
#
INPUT_FILE=GLA01_002_22_01005_2332_1_01_0000.DAT 0 52000000 1 1 0
INPUT_FILE=GLA02_002_22_01005_2331_0_01_0000.DAT 0 52000000 1 1 0
INPUT_FILE=GLA04_002_22_01005_2331_0_01_0006.DAT 0 52000000 1 1 0
INPUT_FILE=GLA05_002_22_01005_2332_1_01_0000.DAT 0 52000000 1 1 0
INPUT_FILE=GLA06_002_22_01005_2332_1_01_0000.DAT 0 52000000 1 1 0
INPUT_FILE=GLA07_002_22_01005_2331_0_01_0000.DAT 0 52000000 1 1 0
INPUT_FILE=GLA08_002_22_01005_2331_0_01_0000.DAT 0 52000000 1 1 0
INPUT_FILE=GLA09_002_22_01005_2331_0_01_0000.DAT 0 52000000 1 1 0
INPUT_FILE=GLA10_002_22_01005_2333_0_01_0000.DAT 0 52000000 1 1 0
INPUT_FILE=GLA11_002_22_01005_2331_0_01_0003.DAT 0 52000000 1 1 0
INPUT_FILE=GLA12_002_22_01005_2325_0_01_0000.DAT 0 52000000 1 1 0
INPUT_FILE=GLA13_002_22_01005_2325_0_01_0000.DAT 0 52000000 1 1 0
INPUT_FILE=GLA14_002_22_01005_2325_0_01_0000.DAT 0 52000000 1 1 0
INPUT_FILE=GLA15_002_22_01005_2325_0_01_0000.DAT 0 52000000 1 1 0
#
#-----Output ANC Files
#
# Output ANC06
#
OUTPUT_FILE=anc06_glas_meta.dat 0000000 1000000
#
#-----Output GLA Files
#
OUTPUT_FILE=GLA01_002_22_01005_2332_1_01_0000.MET 0 52000000 1 1 0
OUTPUT_FILE=GLA02_002_22_01005_2331_0_01_0000.MET 0 52000000 1 1 0
OUTPUT_FILE=GLA05_002_22_01005_2332_1_01_0000.MET 0 52000000 1 1 0
OUTPUT_FILE=GLA04_002_22_01005_2331_0_01_0006.MET 0 52000000 1 1 0
OUTPUT_FILE=GLA06_002_22_01005_2332_1_01_0000.MET 0 52000000 1 1 0
OUTPUT_FILE=GLA07_002_22_01005_2331_0_01_0000.MET 0 52000000 1 1 0
OUTPUT_FILE=GLA08_002_22_01005_2331_0_01_0000.MET 0 52000000 1 1 0
OUTPUT_FILE=GLA09_002_22_01005_2331_0_01_0000.MET 0 52000000 1 1 0
OUTPUT_FILE=GLA10_002_22_01005_2333_0_01_0000.MET 0 52000000 1 1 0
OUTPUT_FILE=GLA11_002_22_01005_2331_0_01_0000.MET 0 52000000 1 1 0
OUTPUT_FILE=GLA12_002_22_01005_2325_0_01_0000.MET 0 52000000 1 1 0
OUTPUT_FILE=GLA13_002_22_01005_2325_0_01_0000.MET 0 52000000 1 1 0
OUTPUT_FILE=GLA14_002_22_01005_2325_0_01_0000.MET 0 52000000 1 1 0
OUTPUT_FILE=GLA15_002_22_01005_2325_0_01_0000.MET 0 52000000 1 1 0
#
#-----End of Control File
#
```

Section 16

GLAS_GPS

16.1 Function

GLAS_GPS is a Fortran 90 wrapper written around the JPL-supplied RINEX (Receiver Independent Exchange Format) processing software. GLAS_GPS reads the APID 1088 GPS data and products (via RINEX) and ANC39 ASCII file containing processed GPS information. GLAS_GPS allows for multi-granule input and output files.

Note: The functionality of GLAS_GPS has been depreciated. UTC SR will process the APID 1088 files to obtain the GPS data. GLAS_GPS will not be used in ISIPS production processing and is not being maintained.

16.2 Input Files

Table 16-1 lists the inputs to GLAS_GPS. Files which are specific to GLAS_GPS are documented in this section. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details regarding the those files not specific to GLAS_GPS.

Table 16-1 GLAS_GPS Inputs

File Spec	Type	Source	Short Description
gla00*_1088.dat	Level-0 APID	EDOS	GLAS GPS APID file.
anc07*_01.dat	Static Ancillary	Science Team	GLAS global constants file.
Control File	Control	ISIPS Operations	Control file.

16.2.1 Control File

The control file format and common elements are documented in Section 5 of this document. Elements specific to GLAS_GPS are described in this section.

The control file section delimiter for GLAS_GPS is:

=GLAS_GPS

Since GLAS_GPS has no requirement for execution scenarios, there are no unique keywords for the GLAS_GPS control file. GLAS_GPS will perform all functions based on the presence of input and output files within the control file.

16.3 Output Files

Table 16-2 lists the outputs created by GLAS_GPS. Files which are specific to GLAS_GPS are documented in this section. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details regarding the files which are not specific to GLAS_GPS.

Table 16-2 GLAS_GPS Outputs

File Spec	Type	Destination	Short Description
anc39*.dat	Dynamic Ancillary	UTCSR	Text-based output from the RINEX processing software.
anc06*.dat	Dynamic Ancillary	ISIPS Operations	Standard metadata/processing log file.

16.3.1 ANC39 RINEX Output Files

For more information on RINEX – See the document “RINEX: The Receiver Independent Exchange Format Version 2”.

16.4 Processing and Reprocessing Scenarios

GLAS_GPS supports only a full-processing scenario. All processing is based on the presence of input and output files within the control file.

Additionally, time-selected processing is not supported. The start and stop times on the INPUT_FILE and OUTPUT_FILE control file entries are ignored for processing.

16.5 Startup and Termination

This is an overview of the steps necessary to run GLAS_GPS. Specific operational procedures will be provided in the ISIPS Operational Procedures Manual.

16.5.1 Setup a Runtime Directory

The suggested method of running GLAS_GPS is to create a temporary directory and link all necessary files into it. The SDMS will create a temporary directory and link all necessary files into it. For example, to setup a GLAS_GPS run, one would perform the following steps (Designate TEMP_DIR as the temporary directory and DATA_DIR as the location in which input data for this job has been staged):

```
mkdir $TEMP_DIR
cd $TEMP_DIR
ln -s $GLAS_HOME/bin/GLAS_GPS .
ln -s $GLAS_HOME/lib/* .
ln -s $GLAS_HOME/data/anc07*.dat .
ln -s $DATA_DIR/*.dat .
```

16.5.2 Create a Control File

GLAS_GPS is designed to take the name of a control file as a command-line argument. The suggested method of creating a control file is by copying a template from the \$GLAS_HOME/data directory and modifying it with desired input/output filenames and data processing options.

```
cp $GLAS_HOME/data/cf_GLAS_GPS.ct1 ./control_file_name
vi ./control_file_name
```

16.5.3 Run the PGE

Error and status messages will be displayed on screen (stdout) and recorded in the ANC06 file.

```
./GLAS_GPS control_file_name
```

16.5.4 Run-Time Statistics

Since GLAS_GPS will not be used in the production environment, no runtime statistics have been recorded.

16.5.5 Termination

The process will terminate automatically upon reaching the end of all input data. The log/metadata file (ANC06*) must be examined to determine runtime success. Additionally, the process will return a result code to the operating system which may be used to programatically determine success or failure (0=success, 3=fatal error).

16.6 Error and Warning Messages

All GSAS error and warning messages are listed numerically in the Appendix D.

16.7 Recovery Steps

If GLAS_GPS terminates with an error:

- 1) Review error and status messages in the ANC06 file or on stdout to determine source or location of problem. Refer to errors listed in Appendix D for assistance in determining the problem.
- 2) Correct the problem
- 3) Remove previous output files
- 4) Re-run the software

In case of a problematic error, which cannot be easily diagnosed, debug versions of GLAS_GPS will be available for test use. This is, however, more of a developer procedure than a user procedure. Software users should contact the GSAS Development Team for more instructions.

16.8 Sample GLAS_GPS Control File

```
=GLAS_GPS
#
#-----Execution Information
#
EXEC_KEY=p3t1
PGE_VERSION=V2.2
DATE_GENERATED=11 January 2002
OPERATOR=jlee
#
#-----Static ANC Files
#
```

```
# Input ANC07 Files : 00=error, 01=global
#
INPUT_FILE=anc07_001_01_00.dat 0000000 1000000
INPUT_FILE=anc07_001_01_01.dat 0000000 1000000
#
# Input GPS APID
#
INPUT_FILE=gla00_008_20020406_010000_01_1088.dat 51861600 51883201
#
#-----Output ANC Files
#
OUTPUT_FILE=anc06_GLAS_GPS.dat 0000000 1000000
OUTPUT_FILE=anc39_008_20020406_010000_01_1088.dat 51861600 51883201
#
#-----End of Control File
#
```

Section 17

GLAS_APID

17.1 Function

GLAS_APID is a modified form of GLAS_Reader which will read GLA00 APID files and create spreadsheet-friendly, column-based text files. Since GLAS_APID does not attempt to time-align the APIDS, (unlike GLAS_Reader) the ANC29 file is not required (but supported). GLAS_APID currently only processes ANC29, ANC32, and APID19 but its functionality will be expanded to include most APIDs of interest.

Like GLAS_Reader, GLAS_APID has a rudimentary interface which will let the user specify input files from the command line. As with control file specifications, start and stop times are required along with the filename. The interface is invoked when running GLAS_APID without a control file argument.

GLAS_APID performs no processing, but permits specification of what type of data should be written to the text file. GLAS_APID also supports input/output time selection.

Note: GLAS_APID is not intended for production use.

17.2 Input Files

Table 17-1 lists the inputs to GLAS_APID. Files which are specific to GLAS_APID are documented in this section. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details regarding the those files not specific to GLAS_APID.

Table 17-1 GLAS_APID Inputs

File Spec	Type	Source	Short Description
anc29*.dat	Dynamic Ancillary	GLAS_L0proc	Index file correlating APID times.
anc32*.dat	Dynamic Ancillary	GLAS_L0proc	Frequency board to GPS time correlation file.
gla00*_19.dat	Level-0 APID	EDOS	GLAS Anc Sci APID file.
anc07*_0000.dat	Static Ancillary	Science Team	GLAS error file.
anc07*_0001.dat	Static Ancillary	Science Team	GLAS global constants file.
Control File	Control	ISIPS Operations	Control file.

17.2.1 Control File

The control file format and common elements are documented in Section 5 of this document. Elements specific to GLAS_APID are described in this section.

The control file section delimiter for GLAS_APID is:

=GLAS_APID

Where appropriate, GLAS_APID can output the first element or all elements of pre-record data to the output file. The default is to output only the first array element. To designate that full-rate output should be created, use the flag defined in Table 17-2.

Table 17-2 GLAS_APID Control Flag

Flag	Significance
APID_RATE=FULLRATE	Indicates that GLAS_APID should write full-rate array values.

17.3 Output Files

GLAS_APID requires no OUTPUT_FILE specifications in the control file. GLAS_APID will create one or more output files for each type of input file requested. GLAS_APID will append extensions onto the base filename to create output files. Time selection for the output files is based on the time specified with the input files.

Table 17-3 lists the outputs created by GLAS_APID. Files which are specific to GLAS_APID are documented in this section. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details regarding the files which are not specific to GLAS_APID.

Table 17-3 GLAS_APID Outputs

File Spec	Type	Destination	Short Description
anc29*.dat.txt	text	Science Team	anc29 data in text format.
anc32*.dat.txt	text	Science Team	anc32 data in text format.
gla00*_19.dat_time.txt	text	Science Team	time-related parameters from apid19 in text format.
gla00*_19.dat_ad.txt	text	Science Team	AD-related parameters from apid19 in text format.
gla00*_19.dat_pc.txt	text	Science Team	PC-related parameters from apid19 in text format.
gla00*_19.dat_cd.txt	text	Science Team	CD-related parameters from apid19 in text format.
gla00*_19.dat_gps.txt	text	Science Team	GPS-related parameters from apid19 in text format.
gla00*_19.dat_ct.txt	text	Science Team	CT-related parameters from apid19 in text format.

17.3.1 APID19 Text Output Files

One of the ways to make the text files more spreadsheet-friendly is to make the number of columns in the output file manageable. Therefore, the APID19 text output is broken up into multiple text files grouped by related parameters.

17.4 Processing and Reprocessing Scenarios

GLAS_APID supports only a full-processing scenario. All processing is based on the presence of input and output files within the control file.

Time-selected processing is supported. The start and stop times on the INPUT_FILE and OUTPUT_FILE control file entries delimit the range of data output.

17.5 Startup and Termination

This is an overview of the steps necessary to run GLAS_APID.

17.5.1 Setup a Runtime Directory

The suggested method of running GLAS_APID is to create a temporary directory and link all necessary files into it. For example, to setup a GLAS_APID run, one would perform the following steps (Designate TEMP_DIR as the temporary directory and DATA_DIR as the location in which input data for this job has been staged):

```
mkdir $TEMP_DIR
cd $TEMP_DIR
ln -s $GLAS_HOME/bin/GLAS_APID .
ln -s $GLAS_HOME/lib/* .
ln -s $GLAS_HOME/data/anc07*.dat .
ln -s $DATA_DIR/*.dat .
```

17.5.2 Create a Control File

GLAS_APID is designed to take the name of a control file as a command-line argument. The suggested method of creating a control file is by copying a template from the \$GLAS_HOME/data directory and modifying it with desired input/output filenames and data processing options.

```
cp $GLAS_HOME/data/cf_GLAS_APID.ct1 ./control_file_name
vi ./control_file_name
```

17.5.3 Run the PGE

Error and status messages will be displayed on screen (stdout) and recorded in the ANC06 file.

```
./GLAS_APID control_file_name
```

17.5.4 Run-Time Statistics

Since GLAS_APID will not be used in the production environment, no runtime statistics have been recorded.

17.5.5 Termination

The process will terminate automatically upon reaching the end of all input data. The log/metadata file (ANC06*) must be examined to determine runtime success. Additionally, the process will return a result code to the operating system which may be used to programatically determine success or failure (0=success, 3=fatal error).

17.6 Error and Warning Messages

All GSAS error and warning messages are listed numerically in the Appendix D.

17.7 Recovery Steps

If GLAS_APID terminates with an error:

- 1) Review error and status messages in the ANC06 file or on stdout to determine source or location of problem. Refer to errors listed in Appendix D for assistance in determining the problem.
- 2) Correct the problem
- 3) Remove previous output files
- 4) Re-run the software

In case of a problematic error, which cannot be easily diagnosed, debug versions of GLAS_APID will be available for test use. This is, however, more of a developer procedure than a user procedure. Software users should contact the GSAS Development Team for more instructions.

17.8 Sample GLAS_APID Control File

This control file reads and writes 100 seconds of ANC29, ANC32, and GLA00 APID 19.

```
#
# This is the control file for the GLAS_APID.
#
#-----Execution Information
#
=GLAS_APID
EXEC_KEY=p3t1a
DATE_GENERATED=08 August 2001
OPERATOR=jlee
PGE_VERSION=2.2
#
#-----Dynamic ANC Files
#
# ANC29 and ANC32 files
#
INPUT_FILE=anc29_002_20000101_000000_01_00.dat 0 100
INPUT_FILE=anc32_002_20000101_000000_01_00.dat 0 100
#
# GLA00 files
#
INPUT_FILE=gla00_002_20000101_000000_01_19.dat 0 100
```

```
#  
#-----Execution Control  
#  
READER_OPTION=Algorithm  
#  
#-----End of Control File  
#
```


Section 18

GLAS_Tick

18.1 Function

GLAS_Tick reads ANC09, ANC32 and (optionally) GLA03 input files to create ANC50_00 and ANC50_01 output files. The ANC50_00 contains merged ANC09/ANC32 information which is written at a GPS update event. The ANC50_01 contains 6 hour statistics for oscillator and engineering data. GLAS_Tick is a full-fledged PGE and allows for multiple-file/multi-granule input and output files. Please reference the “Construction of the Lookup Table of GLAS Clock Oscillator Frequencies” memo by C. Field, X. Sun, and D. Hancock for requirements specifications.

18.2 Input Files

Table 18-1 lists the inputs to GLAS_Tick. Files which are specific to GLAS_Tick are documented in this section. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details regarding the those files not specific to GLAS_Tick.

Table 18-1 GLAS_Tick Inputs

File Spec	Type	Source	Short Description
gla03.dat	GLAS Products	GSAS	GLAS ENG product files.
anc09*.dat	Dynamic Ancillary	UTexas	Precision Attitude file.
anc25*.dat	Dynamic Ancillary	Science Team	GPS/UTC conversion file.
anc32*.dat	Dynamic Ancillary	Science Team	GPS time correction file.
anc33*.dat	Dynamic Ancillary	Science Team	UTC time conversion file.
anc07*_0000.dat	Static Ancillary	Science Team	GLAS error constants file.
anc07*_0001.dat	Static Ancillary	Science Team	GLAS global constants file.
anc07*_0005.dat	Static Ancillary	Science Team	GLAS L1A constants file.
Control File	Control	ISIPS Operations	Control file.

18.2.1 Control File

The control file format and common elements are documented in Section 5 of this document. Elements specific to GLAS_Tick are described in this section.

The control file section delimiter for GLAS_Tick is:

=GLAS_Tick

As a full-fledged PGE, control file sanity checking is provided. The following conditions are checked and the PGE will error-out if a condition is violated:

- There must be exactly 1 anc25 input file.
- There must be exactly 1 anc33 input file.
- There must be anc07 input files.
- There must be at least one ANC32 input file.
- There must be at least one ANC09 input file.
- There must be at least one ANC50_0000 and ANC50_0001 output file.
- There must be the same number of ANC50_0000 and ANC50_0001 output files.

Since GLAS_Tick has no requirement for execution scenarios, there are no unique keywords for the GLAS_Tick control file. GLAS_Tick will perform all functions based on the presence of input and output files within the control file.

Time controls on input/output files specification lines are enforced.

18.3 Output Files

Table 18-2 lists the outputs created by GLAS_Tick. Files which are specific to GLAS_Tick are documented in this section. See the appropriate section of this document or the GLAS Data Products Specifications Volumes for details regarding the files which are not specific to GLAS_Tick.

Table 18-2 GLAS_Tick Outputs

File Spec	Type	Destination	Short Description
anc50*_0000.txt	Text file	ISF/Science Team	Merged ANC09/ANC32 file.
anc50*_0001.txt	Text file	ISF/Science Team	Frequency trend file.
anc06*.txt	Dynamic Ancillary	ISIPS Operations	Standard metadata/processing log file.

18.3.1 anc50_0000.txt File

The anc50_0000 file is a merged ANC09/ANC32 file. The file contains multiple lines of tab-separated fields with descriptive headers. The files are designed to import cleanly into MS Excel. A line is written each time a GPS update occurs (once per 10 seconds). For parameters whose rate is greater than once per second, only the first value is written. Parameters are written in the following format (where A1 represents a TAB character):

```
I16,2(A1,F20.4),A1,F20.9,8(A1,F20.4),2(A1,I16),7(A1,F20.4),A1,A3
```

18.3.2 anc50_0001.txt Files

The anc50_0001 file contains statistics computed from parameters in the ANC09/GLA03 files. The file contains multiple lines of tab-separated fields with descriptive headers. The files is designed to import cleanly into MS Excel. Each line contains statistics for (nominally) 6 hours of data. When computing min/mean/max statistics for parameters whose rate is greater than one per second, all values are used in the computation. Additionally, those parameters

which are component-sensitive use values consistent with the active instrument. Depending upon the presence of GLA03 input (see next section) parameters are written in one of the two following formats (where A1 represents a TAB character):

(with GLA03 inputs)

```
2 (I16,A1) , 6 (F20.4,A1) , I6,5 (A1,F20.14) , 33 (A1,F20.4)
```

(without GLA03 inputs)

```
2 (I16,A1) , 6 (F20.4,A1) , I6,5 (A1,F20.14)
```

18.4 Processing and Reprocessing Scenarios

GLAS_Tick supports two different processing scenarios, dependent on the presence of GLA03 input files. Simply, if GLA03 input files are present, GLA03 statistics are computed and written. If GLA03 inputs are not present, no GLA03 statistics are computed or written. These scenarios are based entirely on the presence of GLA03 input files within the control file.

18.5 Startup and Termination

This is an overview of the steps necessary to run GLAS_Tick.

18.5.1 Setup a Runtime Directory

The suggested method of running GLAS_Tick is to create a temporary directory and link all necessary files into it. The SDMS will create a temporary directory and link all necessary files into it. For example, to setup a GLAS_Tick run, one would perform the following steps (Designate TEMP_DIR as the temporary directory and DATA_DIR as the location in which input data for this job has been staged):

```
mkdir $TEMP_DIR
cd $TEMP_DIR
ln -s $GLAS_HOME/bin/GLAS_Tick .
ln -s $GLAS_HOME/lib/* .
ln -s $GLAS_HOME/data/anc07*.dat .
ln -s $GLAS_HOME/data/anc25*.dat .
ln -s $GLAS_HOME/data/anc33*.dat .
ln -s $DATA_DIR/*.dat .
```

18.5.2 Create a Control File

GLAS_Tick is designed to take the name of a control file as a command-line argument. The suggested method of creating a control file is by copying a template from the \$GLAS_HOME/data directory and modifying it with desired input/output filenames and data processing options.

```
cp $GLAS_HOME/data/cf_GLAS_Tick.ctl ./control_file_name
vi ./control_file_name
```

18.5.3 Run the PGE

Error and status messages will be displayed on screen (stdout) and recorded in the ANC06 file.

```
./GLAS_Tick control_file_name
```

18.5.4 Run-Time Statistics

GLAS_Tick has minimal processing requirements since it only parses the product header records.

18.5.5 Termination

The process will terminate automatically upon reaching the end of all input data. The log/metadata file (ANC06*) must be examined to determine runtime success. Additionally, the process will return a result code to the operating system which may be used to programatically determine success or failure (0=success, 3=fatal error).

18.6 Error and Warning Messages

All GSAS error and warning messages are listed numerically in the Appendix D.

18.7 Recovery Steps

If GLAS_Tick terminates with an error:

- 1) Review error and status messages in the ANC06 file or on stdout to determine source or location of problem. Refer to errors listed in Appendix D for assistance in determining the problem.
- 2) Correct the problem
- 3) Remove previous output files
- 4) Re-run the software

In case of a problematic error, which cannot be easily diagnosed, debug versions of GLAS_Tick will be available for test use. This is, however, more of a developer procedure than a user procedure. Software users should contact the GSAS Development Team for more instructions.

18.8 Sample GLAS_Tick Control File

```
=GLAS_Tick
#-----Start of Control File
#
# This is an control file automatically generated by
# create_tick_ctl.sh.
#
#-----Execution Information
#
EXEC_KEY=auto
DATE_GENERATED=Thu Jan  8 18:25:19 EST 2004
OPERATOR=ACC_TEST
```

```
PGE_VERSION=ACC_TEST
#
#-----Input Static ANC Files
#
# Input ANC07
#
INPUT_FILE=anc07_013_01_0000.dat 0 1 1 1 0
INPUT_FILE=anc07_013_01_0001.dat 0 1 1 1 0
INPUT_FILE=anc07_013_01_0005.dat 0 1 1 1 0
INPUT_FILE=anc25_001_20021213_000000_01_0000.dat 0 1 1 1 0
INPUT_FILE=ANC33_001_20031223_193523_01_0000.DAT 0 1
#
#-----Input/Output Files
#
INPUT_FILE=ANC32_012_20030925_180000_01_0001.DAT 0 1
INPUT_FILE=ANC32_012_20030926_000000_01_0001.DAT 0 1
INPUT_FILE=ANC32_012_20030926_060000_01_0001.DAT 0 1
INPUT_FILE=ANC32_012_20030926_120000_01_0001.DAT 0 1
INPUT_FILE=ANC32_012_20030926_180000_02_0001.DAT 0 1
INPUT_FILE=ANC32_012_20030927_000000_02_0001.DAT 0 1

INPUT_FILE=GLA03_013_1102_028_0091_0_01_0001.DAT 117799207.0 117810806.0
INPUT_FILE=GLA03_013_1102_028_0093_0_01_0001.DAT 117810807.0 117822407.0
INPUT_FILE=GLA03_013_1102_028_0095_0_01_0001.DAT 117822408.0 117834006.0
INPUT_FILE=GLA03_013_1102_028_0097_0_01_0001.DAT 117834007.0 117845607.0
INPUT_FILE=GLA03_013_1102_028_0099_0_01_0001.DAT 117845608.0 117857206.0
INPUT_FILE=GLA03_013_1102_028_0101_0_01_0001.DAT 117857207.0 117868815.0
INPUT_FILE=GLA03_013_1102_028_0103_0_01_0001.DAT 117868816.0 117880414.0
INPUT_FILE=GLA03_013_1102_028_0105_0_01_0001.DAT 117880415.0 117892014.0
INPUT_FILE=GLA03_013_1102_028_0107_0_01_0001.DAT 117892015.0 117903615.0

INPUT_FILE=ANC09_005_20030925_235947_01_0001.DAT 117806400.0 117892800.0 1 1 0
OUTPUT_FILE=ANC50_005_20030925_235947_01_0000.txt 117806400.0 117892800.0 1 1 0
OUTPUT_FILE=ANC50_005_20030925_235947_01_0001.txt 117806400.0 117892800.0 1 1 0
OUTPUT_FILE=ANC06_tick_005_20030925_235947_01_0001.DAT 1 1 0
#
#-----Execution Control
#
# (none)
#
#-----End of GLAS_Tick Section-----
#
```


Section 19

QABrowse

19.1 Introduction

Program Name: QABrowse

Language: Interactive Data Language (IDL)

Function: Read quality assurance files for the data products and output image files with plots of the data that can be examined with a web browser.

19.2 Overview of Purpose and Functions

Purpose: Generate images that can be browsed over the web to let users determine whether they want to look at the data in the granules.

Function: Read QAP files and output image files.

19.3 Startup and Termination

To run the program:

- 1) Change to a runtime directory
- 2) Generate the control file.
- 3) The following three directories should be in your path:

`/<GLAS_HOME>/idl/qa_browse/browse`

`/<GLAS_HOME>/idl/qa_browse/read`

`/<GLAS_HOME>/idl/qa_browse/util`

where GLAS_HOME is as defined in previous sections of this document. These can be added to your IDL path with the command

```
IDL> !path = '/<GLAS_HOME>/idl/qa_browse/browse:' $  
+ '/<GLAS_HOME>/idl/qa_browse/read:' $  
+ '/<GLAS_HOME>/idl/qa_browse/util:' + !path
```

issued after you enter IDL and BEFORE you run the program. Here you need to substitute the value of GLAS_HOME in place of each <GLAS_HOME> since IDL does not know what this environment variable is. For example, if

```
GLAS_HOME = /data/myworkingdir,
```

the actual statement would be

```
IDL> !path = '/data/myworkingdir/idl/qa_browse/browse:' $
```

```
+ '/data/myworkingdir/idl/qa_browse/read:' $  
+ '/data/myworkingdir/idl/qa_browse/util:' +!path
```

4) Either

a. [i] Enter IDL and at the IDL prompt type

```
IDL> qabrowse, controlFileName
```

[ii] Exit from IDL.

OR

b. at the shell prompt or in a script, enter

```
$> runbrowse controlFileName
```

5. Move the output files (if you generated any) wherever they belong, if necessary.

19.4 Functions and Their Operation

The main functions of this program are:

- Read the control file
- Read the QAP files
- Generate QA browse images.

19.5 Input Arguments

19.5.1 Control File

This program requires the name of a control file as a command-line argument. The program reads input from the control file to determine control parameters. A sample control file is provided in the code directory (sample.txt) and is shown below.

19.6 Input Files

19.6.1 Control File

The program reads through the file until it finds a line containing

```
=QABROWSE
```

and nothing else. At that point, it reads and interprets all lines until it finds another line with an = sign in column 1, at which point the program stops reading, closes the control file, and begins processing.

Only lines of the form

```
KEY=Value
```

are evaluated, and they may be in any order.

The following KEY=Value pairs have meaning. Except for INPUT_FILE, only the last occurrence of each one is used.

Table 19-1 Description of Control File Contents

ENVIRONMENT=Value	OPTIONAL. Value = ISIPS or SCF, depending on where the product files were generated. The SCF version generates png files with different file names, and is not as strict with respect to the expected lat/lon range of the data. SCF will work for the ISIPS files but the plots may not have nice limits in some cases. Example: ENVIRONMENT=ISIPS Default: ISIPS
VERSION=Value	OPTIONAL. As of QAP Version 4.4 (GSAS version 4.3), the version is read from the QAP file header. An override option is available -- see FORCE_VERSION. For previous versions of the program, use the following: VERSION = 1 is obsolete and should not be used. VERSION = 2 is for files produced by version 3.0 or earlier of the GSAS software (MOSS 10 testing). VERSION = 3 is for files produced after version 3.0 of the GSAS software. It differs from VERSION=2 in that GLA06 and 12-15 QAP files were written as one record per along-track record, followed by a separator record consisting of one along-track record filled with invalids, followed by one summary record written as a single record. The along-track records contain averages of the trop and tide corrections, and the summary record contains histograms of these quantities plus number of elements in each histogram and lower limit of the first histogram bin and upper limit of the last histogram bin. VERSION=3.7: Added saturation flags to QAP05 VERSION=3.8: Change length of energy histograms in QAP02 VERSION=4 differs from VERSION=3 in that global summaries of the range parameters were added to the summary records in the elevation qap files (GLA06,12-15). VERSION=4.1: Metadata changes to QAP6 and 12-15 VERSION=4.2: Added images to QAP7-11
FORCE_VERSION	OPTIONAL. Logical Flag If set, use the VERSION specified by the VERSION keyword. Ignore any version that may be in the QAP file header.

Table 19-1 Description of Control File Contents (Continued)

OUTPUT_FORMAT=Value	OPTIONAL. Value should be a string. This parameter specifies the format for the output plots. Allowed values: PNG (file output in png format) X (screen plots on an x-window system) PS (file output in Postscript format) HDF (Hierarchical Data Format) Example: OUTPUT_FORMAT=PNG Default: HDF
OUTPUT_DIRECTORY=Value	OPTIONAL. Value is a string containing the name of the directory in which the output files (if any) are to be stored. If the output directory line is present and the value does not end in a / (on Unix systems) or \ (on Windows systems), one is added. Example: OUTPUT_DIRECTORY=/home/jack/ Default: current directory.
INPUT_FILE=Value	REQUIRED. Value should be a string containing the name of the QAP file to be processed. It is assumed that the file name is of the form "path/qapxx..." (without the quotes), where xx is a 2-digit number between 01 and 15. "path/" is the full path to the file, and may be left off if the file is in the working directory. "path" and "qap" may be any mix of upper and lower case characters but must correspond exactly to the actual path and file names. INPUT_FILE may appear any number of times, in which case all QAP files listed are processed. At least one INPUT_FILE is required. If there are no lines of this form, the program will assume there is no data to be processed and will quietly stop. Example: INPUT_FILE=/XOVER/disk4/jack/ GLA06_009_1102_004_0065_3_01_0001.qap
CATCHCANCEL	OPTIONAL. This is a debug flag designed to turn off the CATCH error handling function to help trap errors. It should NOT be used in production processing. CATCHCANCEL=0. Default. CATCH error handling is in effect. CATCHCANCEL=1. CATCH error handling is turned off. Program will issue an error message and STOP at the point where the error occurs.

Table 19-1 Description of Control File Contents (Continued)

QUIET	OPTIONAL. This is a debug flag and should not be used in production processing. QUIET is used to set !QUIET (see IDL documentation for values).
EXCEPT	OPTIONAL. This is a debug flag and should not be used in production processing. EXCEPT is used to set !EXCEPT (see IDL documentation for values).

Table 19-2 Sample Control File

```
=QABROWSE
VERSION=3.6
ENVIRONMENT=GSAS

# First QAP file to be processed
INPUT_FILE=/home/jack/GLA03_003_20030925_164545_01_0000.QAP
# A second QAP file to be processed
INPUT_FILE=/home/jack/glas/
GLA06_012_20031005_180404_01_0000.QAP

INPUT_FILE=/home/jack/anc07_001_01_0005.dat
OUTPUT_DIRECTORY=/home/jack
OUTPUT_FORMAT=png

=END
```

19.6.2 QAP File

One or more QAP files are required as input.

19.6.3 ANC File

None required.

19.7 Output

19.7.1 GLA01

For GLA01, the program generates four plots for each input QAP file.

Plot 1: global summary

Plots 2-3: bars showing min, max, average, std dev, and number of measurements for a variety of parameters

Plot 4: time histories

19.7.2 GLA02

For GLA02, the program generates three plots for each input QAP file.

Plot 1: summary information, groundtrack map of integrated return

Plot 2: 532 nm data

Plot 3: 1064 nm data

19.7.3 GLA03

For GLA03, the program generates a global summary Plot with a list of % missing data, followed by a list of out-of-bound parameters and how many times each was out of bounds. This list may extend to several pages.

The remaining pages contain bar plots showing min/max/average/std dev/number of points for a variety of parameters.

19.7.4 GLA04

For GLA04, the program generates eight plots. Plots 1-4 are global summary data and plots 5-8 contain along-track averages.

Plot 1: summary LPA and LRS images and Granule statistics.

Plots 2 and 3: granule statistics for a number of LRS, BST, and IST parameters.

Plot 4: histograms of a number of BST, IST, and LRS parameters.

Plot 5: along-track averages of LPA and Gyro parameters.

Plot 6: along-track averages of LRS parameters.

Plot 7: along-track averages of Solar array, Attitude, and BST parameters.

Plot 8: along-track averages of several IST parameters.

19.7.5 GLA05

For GLA05, the program generates either 13 or 16 plots for each input QAP file. Fewer Plots are generated for equatorial regions because these do not have any ice sheet regions. There are three different types of plots:

- 1) Global summary data. Only one of these per input QAP file.
- 2) Histograms. One Plot for each surface type, and one for all surface types combined.
- 3) Groundtrack maps of along-track data. Two Plots for each surface type, and one for all surface types combined.

19.7.6 GLA06

For GLA06, the program generates two to four plots for each input QAP file. Fewer Plots are generated for earlier versions of GLA06 QAP files.

Plot 1: summary data, histograms, and groundtrack maps of along-track data

Plot 2 and 3: groundtrack maps of along-track data

Plot 4: bars showing min, max, average, std dev, and number of measurements for the range adjustment parameters.

19.7.7 GLA07

For GLA07, the program generates one global summary plot and one image (two per plot) for every orbit for 532 nm and for 1064-nm data. There are a minimum of 3 plots -- the summary and one each for 532 and 1064.

19.7.8 GLA08

For GLA08, the program generates one global summary plot.

19.7.9 GLA09

For GLA09, the program generates one global summary plot.

19.7.10 GLA10

For GLA10, the program generates at least four plots:

Plot 1: Global summary and along-track maps of %valid cloud backscatter and aerosol backscatter.

Plot 2: Along-track parameters.

Plots 3-N: Images of the vertical distribution of cloud extinction. One orbit per image, two images per plot.

Plots N+1 on: Images of the vertical distribution of aerosol extinction. One orbit per image, two images per plot.

19.7.11 GLA011

For GLA11, the program generates two plots:

Plot 1: Global summary and along-track parameters.

Plot 2: Along-track parameters.

19.7.12 GLA12

For GLA12, the program generates two to four plots for each input QAP file. Fewer Plots are generated for earlier versions of GLA12 QAP files.

Plot 1: summary data, histograms, and groundtrack maps of along-track data

Plots 2 and 3: groundtrack maps of along-track data

Plot 4: bars showing min, max, average, std dev, and number of measurements for the range adjustment parameters.

19.7.13 GLA13

For GLA13, the program generates two to four plots for each input QAP file. Fewer Plots are generated for earlier versions of GLA13 QAP files.

Plot 1: summary data, histograms, and groundtrack maps of along-track data

Plots 2 and 3: groundtrack maps of along-track data

Plot 4: bars showing min, max, average, std dev, and number of measurements for the range adjustment parameters.

19.7.14 GLA14

For GLA14, the program generates two to four plots for each input QAP file. Fewer Plots are generated for earlier versions of GLA14 QAP files.

Plot 1: summary data, histograms, and groundtrack maps of along-track data

Plots 2 and 3: groundtrack maps of along-track data

Plot 4: bars showing min, max, average, std dev, and number of measurements for the range adjustment parameters.

19.7.15 GLA015

For GLA15, the program generates two to four plots for each input QAP file. Fewer Plots are generated for earlier versions of GLA15 QAP files.

Plot 1: summary data, histograms, and groundtrack maps of along-track data

Plots 2 and 3: groundtrack maps of along-track data

Plot 4: bars showing min, max, average, std dev, and number of measurements for the range adjustment parameters.

19.8 Error and Warning Messages

All warning and error messages generated by the program are self-explanatory. Any error messages generated by IDL should be reported except for floating underflows. These error messages are generated by the IDL internals and there does not appear to be any way to avoid getting them at least some of the time.

If the program generates the output plots successfully, IDL exits with exit code QA_NoError = 0.

If the program ends without generating all plots, IDL exits with a nonzero exit code. The exit codes are defined in file util/qa_exitcodes.pro.

19.9 Recovery Steps

Exit IDL, correct the error in the control file, and start over.

20.1 Introduction

Program Name:QAPG, from QAP Generator

Language: Fortran 90

Function: Read product files (granules) and generate QAP files

20.2 Overview of Purpose and Functions

Purpose: Read product files (granules) and generate QAP files

Function: Read product files (granules) and generate QAP files

20.3 Startup and Termination

To run the program:

- 1) Change to a runtime directory
- 2) Generate a control file.
- 3) At the shell prompt or in a script, enter
\$> **qapg controlFileName**

20.4 Functions and Their Operation

The main functions of this program are:

- Read the control file
- Read the product file
- Generate QAP file

20.5 Input Arguments

20.5.1 Control File

This program requires the name of a control file as a command-line argument. The program reads input from the control file to determine control parameters. A sample control file is provided in the code directory (sample.txt) and is shown below.

20.6 Input Files

20.6.1 Control File

The program reads through the file until it finds a line containing

=PROD_VER

and nothing else. The = should be in column 1 and there should be no space between it and the P. At that point, the program reads and interprets all lines until it finds another line with an = sign in column 1, at which point the program stops reading, closes the control file, and begins processing.

Only lines of the form

KEY=Value

are evaluated, and they may be in any order.

20.6.2 Product File(s)

One (or six for GLA04) product file is required as input.

20.6.3 ANC Files

ANC07 0000, 0003, 0004, and 0006 are required.

20.7 Output

QAPG generates one QAP file each time it is run successfully.

20.8 Error and Warning Messages

There are some of these in the portion of the code written by Kristine Barbieri.

20.9 Recovery Steps

Table 20-1 Description of Control File Contents

INPUT_FILE=Value	There are two types of input files. Type 1: REQUIRED. Value should be a string containing the name of the product file to be processed. In general, it is assumed that the file name is of the form "GLAxx..." (without the quotes), where xx is a 2-digit number between 01 and 15, and "GLA" may be any mix of upper and lower case characters but must correspond exactly to the actual path and file names. GLA04 file names have special requirements. For GLA01 - GLA03 and GLA05 - GLA15, INPUT_FILE may appear only once. For GLA04, INPUT_FILE must appear six times, and the name must be of the form GLAxx...000Y.zzz, where Y = 1,2,3,4,5, and 6. The rest of the file name must follow the rules for the other products. Y designates the type of GLA04 product file, as follows: 1: LPA 2: LRS 3: Gyro 4: IST 5: BST 6: Spacecraft Example: <pre>INPUT_FILE= GLA01_012_1102_002_0013_4_01_0001.DAT</pre> Type 2: REQUIRED. ANC07 files. The following ANC files are required <pre>ANC07 0000 ANC07 0003 ANC07 0004 ANC07 0006</pre> Example: INPUT_FILE= ANC07_001_01_0000.DAT
------------------	--

Table 20-1 Description of Control File Contents (Continued)

OUTPUT_FILE=Value	REQUIRED. Value should be a string containing the name of the output QAP file. Example: GLA01_012_1102_002_0013_4_01_0001.QAP
-------------------	---

Table 20-2 Sample Control File

<pre>=PROD_VER INPUT_FILE=GLA01_012_1102_002_0013_4_01_0001.DAT INPUT_FILE=anc07_001_01_0000.dat INPUT_FILE=anc07_001_01_0003.dat INPUT_FILE=anc07_001_01_0004.dat INPUT_FILE=anc07_001_01_0006.dat OUTPUT_FILE=gla01_012_1102_002_0013_4_01_Integ_0001.qap =END</pre>
--

Section 21

QAPCompare

21.1 Introduction

Program Name: QAPCompare.

Language: Interactive Data Language (IDL)

Function: Generate Quality Assurance parameters and flags based on data in the QAP files.

21.2 Overview of Purpose and Functions

Purpose: Generate product-specific QA parameters to allow data quality assessment, and QA flags for inclusion in the metadata.

Functions:

- 1) Generate Metadata flags and parameters from a QA file.
- 2) Compare the QA file generated during production of the product granule with the QA file generated from the product granule.

NOTE: It is possible to run the program without the second QA file, in which case only the first function is performed.

NOTE: Flag output is not implemented for all products.

21.3 Startup and Termination

To run the program:

- 1) Change to a runtime directory
- 2) Generate the control file.
- 3) The following three directories should be in your path:

`/<GLAS_HOME>/idl/qa_browse/compare`

`/<GLAS_HOME>/idl/qa_browse/read`

`/<GLAS_HOME>/idl/qa_browse/util`

where GLAS_HOME is previously defined in this document. These can be added to your IDL path with the command

```
IDL> !path = '/<GLAS_HOME>/idl/qa_browse/compare:' $
      + '/<GLAS_HOME>/idl/qa_browse/read:' $
      + '/<GLAS_HOME>/idl/qa_browse/util:' !path
```

issued after you enter IDL and BEFORE you run the program. Here you need to substitute the value of GLAS_HOME in place of each <GLAS_HOME> since IDL does not know what this environment variable is. For example, if

GLAS_HOME = /data/myworkingdir,

the actual statement would be

```
IDL> !path = '/data/myworkingdir/idl/qa_browse/compare:' $  
      + '/data/myworkingdir/idl/qa_browse/read:' $  
      + '/data/myworkingdir/idl/qa_browse/util:' !path
```

4) Either

a) [i] Enter IDL and at the IDL prompt type

```
IDL> qapcompare, controlFileName
```

[ii] Exit from IDL.

OR

b) at the shell prompt or in a script, enter

```
$> runcompare controlFileName
```

5) Move the output files (if you generated any) to wherever they belong, if necessary.

21.4 Functions and Their Operation

The main functions of this program are:

- Read the control file
- Read the QAP file(s)
- Generate the AUTOQA parameters and flags based on data in the QAP file that was made along with the product granule.
- Generate the OPERQA parameters and flags if one or more are defined for the product.

Optionally, generate the VAV file giving detailed comparison of two QAP files.

21.5 Input Arguments

21.5.1 Control File

This program requires the name of a control file as a command-line argument. The program reads input from the control file to determine control parameters. A sample control file is provided in the code directory (sample.txt), and a description of the file is given below.

21.6 Input Files

21.6.1 Control File

The program reads through the control file until it finds a line containing

=QAPCOMPARE

and nothing else. The = sign must be in column 1 and there may be no spaces in the line. It reads and interprets all lines following this until it finds another line with an = sign in column 1, at which point the program stops reading, closes the control file, and begins processing. Blank lines and lines with a # in column 1 are ignored. All other lines are expected to have the form

KEY=Value,

and they may be in any order. Spaces around the = sign are ignored, so

KEY = Value

is treated the same as

KEY=Value

An example file accompanies the distribution, in file sample.txt.

Table 21-1 KEY=Value Entries for QAPCompare

KEY=Value Entry	Description
QAP_FILE=Value	REQUIRED. Value should be a string containing the name of the QAP file generated along with the product granule. It is assumed that the file name is of the form "path/GGGxx..." (without the quotes), where xx is a 2-digit number between 01 and 15. "path/" is the full path to the file, and may be left off if the file is in the working directory, and "GGG" is exactly 3 characters. "path" and "GGG" may be any mix of upper and lower case characters, which must correspond exactly to the actual path and file names. EXAMPLE: QAP_FILE=GLA01_012_1102_002_0013_4_01_0001.QAP
QVV_FILE=Value	OPTIONAL as of 2003 October. Value should be a string containing the name of the QAP file generated from the product granule. It's format is identical to the format of QAP_FILE. EXAMPLE: QVV_FILE=GLA01_012_1102_002_0013_4_01_0011.QAP

Table 21-1 KEY=Value Entries for QAPCompare (Continued)

OUTPUT_VAV=Value	OPTIONAL. Name of the VAV file to be written by the program. Ignored if QVV_FILE is not present. May include a path. EXAMPLE: OUTPUT_VAV = GLA01.VAV
OUTPUT_QAPFLAGS=Value	REQUIRED. Value should be a string containing the name of the QAPFlags file to be written by the program. May include a path. EXAMPLE: OUTPUT_QAPFLAGS = GLA01.QAP-Flags
DOALONGTRACK=Value	OPTIONAL. Value should be TRUE or FALSE. TRUE ==> compare the along-track records. FALSE ==> do NOT compare the along-track records. In general, DOALONGTRACK should be set to FALSE for GLA12-15, TRUE for all other products. EXAMPLE: DOALONGTRACK = FALSE
VERSION=Value	OPTIONAL for Version >= 4.4. REQUIRED for Version < 4.4. As of Version 4.4 (GSAS version 4.3), the Version is read from the QAP file header. See Force_Header keyword. EXAMPLE: VERSION=3.6 NOTE: this is a real number, not a string, so it cannot handle subreleases such as 3.4.5. See Section 19 for details.
FORCE_VERSION	OPTIONAL. Logical Flag If set, use the VERSION specified by the VERSION keyword. Ignore any version that may be in the QAP file header.

Table 21-1 KEY=Value Entries for QAPCompare (Continued)

CATCHCANCEL	OPTIONAL. This is a debug flag designed to turn off the CATCH error handling function to help trap errors. It should NOT be used in production processing. CATCHCANCEL=0. Default. CATCH error handling is in effect. CATCHCANCEL=1. CATCH error handling is turned off. Program will issue an error message and STOP at the point where the error occurs.
QUIET	OPTIONAL. This is a debug flag and should not be used in production processing. QUIET is used to set !QUIET (see IDL documentation for values).

21.7 Output

21.7.1 VAV file

An ASCII file containing a detailed comparison of the two QAP files. The file contains a list of all components of the QAP file summary record and along-track records (if DOALONG-TRACK=True), with statistics for each, and a comparison of the two QAP files. The only difference from product to product is that the specific components change.

21.7.2 QAPFlags file

ASCII file with the QA flags and parameters.

21.8 Understanding the Output

21.8.1 QAPFlags File

The QAPFLAGS file contains a list of product-specific flags and parameters in KEY=WORD=Value format. The specific keywords vary from product to product. Sample output files for each product follow.

Table 21-2 Sample QAPFLAGS Files

KEY=Value Entry	Description
GLA01.QAPFlags	AUTOQA_UTCTime_PctMissing = 0.061842919 AUTOQA_Waveform_PctMissing = 0.061842919 AUTOQA_Waveform_PctOOB = N/A AUTOQA_UTCTime_FLAG = PASS AUTOQA_Waveforms_FLAG = PASS
GLA02.QAPFlags	AUTOQA_UTCTime_PctMissing = 0.0086199466 AUTOQA_PCProf_PctMissing = 0.0086199466 AUTOQA_CDProf_PctMissing = 0.0086199466 AUTOQA_PCProf_PctOOB = N/A AUTOQA_CDProf_PctOOB = N/A AUTOQA_UTCTime_FLAG = PASS AUTOQA_PCProf_FLAG = PASS AUTOQA_CDProf_FLAG = PASS
GLA03.QAPFlags	AUTOQA_UTCTime_PctMissing = 0.0086199466 AUTOQA_Temp_PctOOB = N/A AUTOQA_Voltage_PctOOB = N/A AUTOQA_UTCTime_FLAG = PASS AUTOQA_Temperature_FLAG = PASS AUTOQA_Voltage_FLAG = PASS

Table 21-2 Sample QAPFLAGS Files (Continued)

GLA04.QAPFlags	AUTOQA_BST_PctMissing = 1.7976931e+308 AUTOQA_Gyro_PctMissing = 1.7976931e+308 AUTOQA_IST_PctMissing = 1.7976931e+308 AUTOQA_LPA_PctMissing = 1.7976931e+308 AUTOQA_LRS_PctMissing = 1.7976931e+308 AUTOQA_PRAP_PctMissing = 1.7976931e+308 AUTOQA_LPA_FLAG = FAIL AUTOQA_PRAP_FLAG = FAIL AUTOQA_LRS_FLAG = N/A AUTOQA_BST_FLAG = N/A AUTOQA_IST_FLAG = N/A AUTOQA_Gyro_FLAG = N/A
GLA05.QAPFlags	AUTOQA_RANGE_FLAG = PASS RANGE_PCTMISSING = 34.7800 ICESHEET_NVALIDMEASUREMENTS = N/A SEAICE_NVALIDMEASUREMENTS = N/A LAND_NVALIDMEASUREMENTS = N/A OCEAN_NVALIDMEASUREMENTS = N/A
GLA06.QAPFlags	AUTOQA_SURFELEVATION_FLAG = FAIL SURFELEVATION_PctOOB = N/A SURFROUGHNESS_PctOOB = N/A SURFREFLECTANCE_PctOOB = N/A SURFSLOPE_PctOOB = N/A
GLA07.QAPFlags	AUTOQA_ = N/A
GLA08.QAPFlags	AUTOQA_ = N/A
GLA09.QAPFlags	AUTOQA_ = N/A
GLA10.QAPFlags	AUTOQA_ = N/A
GLA11.QAPFlags	AUTOQA_ = N/A
GLA12.QAPFlags	AUTOQA_SURFELEVATION_FLAG = PASS AUTOQA_SURFROUGHNESS_FLAG = PASS AUTOQA_SURFREFLECTANCE_FLAG = PASS AUTOQA_SURFSLOPE_FLAG = PASS SURFELEVATION_PctOOB = N/A SURFROUGHNESS_PctOOB = N/A SURFREFLECTANCE_PctOOB = N/A SURFSLOPE_PctOOB = N/A
GLA13.QAPFlags	AUTOQA_SURFELEVATION_FLAG = PASS AUTOQA_SURFREFLECTANCE_FLAG = PASS SURFELEVATION_PctOOB = N/A SURFROUGHNESS_PctOOB = N/A

Table 21-2 Sample QAPFLAGS Files (Continued)

GLA14.QAPFlags	AUTOQA_SURFELEVATION_FLAG = PASS AUTOQA_SURFROUGHNESS_FLAG = PASS AUTOQA_SURFREFLECTANCE_FLAG = PASS AUTOQA_SURFSLOPE_FLAG = PASS SURFELEVATION_PctOOB = N/A SURFROUGHNESS_PctOOB = N/A SURFREFLECTANCE_PctOOB = N/A SURFSLOPE_PctOOB = N/A
GLA15.QAPFlags	AUTOQA_SURFELEVATION_FLAG = PASS AUTOQA_SURFROUGHNESS_FLAG = PASS AUTOQA_SURFREFLECTANCE_FLAG = PASS SURFELEVATION_PctOOB = N/A SURFROUGHNESS_PctOOB = N/A SURFREFLECTANCE_PctOOB = N/A

21.8.2 VAV file

The VAV file has four sections. The sections are separated by lines of dashes. A sample VAV file is given after the descriptions.

21.8.3 VAV file section 1

The file starts with the names of the files being compared, followed by a description of the contents of sections 2 and 3, and ends with the number of matching along-track records.

21.8.4 VAV file Section 2

Section 2 starts with the line "ALONG-TRACK STATISTICS:". This is followed by statistics summarizing the data in each parameter and a comparison of the data in the two files. All along-track parameters are vectors. A sample of the beginning of this section is given below. The four lines of information for each parameter contain

Line 1: The AVERAGE value of the parameter, the Min, the Max, and the Standard Deviation for file 1.

Line 2: The same, for file 2

Line 3: The difference: File 2 - File 1

Line 4: The % difference: $100 * \text{diff} / \text{File 2 value}$

21.8.5 VAV file Section 3

Section 3 starts with the line "SUMMARY STATISTICS:". This is followed by statistics summarizing the data in each parameter in the QAP summary record and a comparison of the data in the two files. Summary records contain both scalar and array data. All array data are treated as vectors. A sample of the beginning of this section is given below.

The information for array data has the same format as for vectors. See section 10.2.2 for a description. For scalar variables, the output consists of one line containing (in order)

- the name of the parameter

- the value from the QAP file
- the value from the QVV file
- the difference (QAP-QVV)
- the % difference ($100 (QAP - QVV) / QVV$)

21.8.6 VAV file Section 4

Section 4 summarizes the comparison of the two QAP files. It starts with a description of the comparisons. A sample section is given below.

The statistics are:

- 1) The avg, min, max, and standard deviation of the % differences for all items for which a comparison was made.
- 2) The number of parameters included in 1.
- 3) The maximum number of parameters that could have been included in 1. This excludes items not available in output from QAPG.
- 4) The number of items that can be calculated from the product alone (i.e., the number of items available in QAP files written by QAPG).
- 5) The number of items with good data for which the % difference could not be calculated because the file 2 value was zero (so would cause a divide by zero error).
- 6) The number of discrepancies (unexpectedly large differences).
- 7) The number of parameters that were invalid unexpectedly.
- 8) The number of along-track records for which the times or locations did not agree.

Table 21-3 Sample VAV File

```

COMPARING CONTENTS OF
  FILE 1: /XOVER/disk4/jack/glas/Mantis795/
GLA01_012_1102_002_0013_4_01_0001.QAP
  FILE 2: /XOVER/disk4/jack/glas/Mantis795/
GLA01_012_1102_002_0013_4_01_qapg_0001.qap
For vector data: Average, Min, Max, Standard deviation of
    Line 1: File 1 data
    Line 2: File 2 data
    Line 3: Diff = File 2 data - File 1 data
    Line 4: 100 * Diff / File 2 data
For scalar data: File 1 datum, File 2 datum, Diff = File 2 datum - File 1 datum,
    100 * Diff / File 2 datum
Not Avail = the item is not present in one or both files and it can not be
    calculated from the product file alone.
No Data = the item is not present in one or both files. It should be
    possible to calculate it from the product file alone
Invalid = the value is zero in File 2 so the ratio is undefined.
+++ = bad data found for File 1
XXX = bad data found for File 2
*** = bad data found for both files
OOO = problem with comparison of File 1 and File 2 for this item
NUMBER OF MATCHING ALONG-TRACK RECORDS:          101
-----
ALONG-TRACK STATISTICS:
DQATIME1:
          9.94E+07   9.94E+07   9.94E+07   4.69E+02
          9.94E+07   9.94E+07   9.94E+07   4.69E+02
          -3.26E-08  -4.77E-07   5.07E-07   2.85E-07
          -3.28E-14  -4.80E-13   5.10E-13   2.87E-13

...

I_PREDOM_WAVE:
          6.34E-01   0.00E+00   1.00E+00   4.84E-01
          6.34E-01   0.00E+00   1.00E+00   4.84E-01
          0.00E+00   0.00E+00   0.00E+00   0.00E+00
          0.00E+00   0.00E+00   0.00E+00   0.00E+00
-----

```

Table 21-3 Sample VAV File (Continued)

SUMMARY STATISTICS:

DQATIME1:	9.94E+07	Not Avail	Not Avail	Not Avail	XXX
DQATIME2:	9.94E+07	Not Avail	Not Avail	Not Avail	XXX
I_EXP_APID19:	1617	Not Avail	Not Avail	Not Avail	XXX
I_NUM_APID19:	1616	1616	0	0.00	
...					
I_LFILTNUM_CNT:	4.90E+03	1.40E+03	1.05E+04	3.16E+03	
	4.90E+03	1.40E+03	1.05E+04	3.16E+03	
	0.00E+00	0.00E+00	0.00E+00	0.00E+00	
	0.00E+00	0.00E+00	0.00E+00	0.00E+00	
I_SFILTNUM_CNT:	1.27E+03	1.15E+02	4.90E+03	1.81E+03	
	1.27E+03	1.15E+02	4.90E+03	1.81E+03	
	0.00E+00	0.00E+00	0.00E+00	0.00E+00	
	0.00E+00	0.00E+00	0.00E+00	0.00E+00	

Summary information

Summary: avg, min, max, std dev of the % differences

N in Summary: Number of points in summary statistics. This can be different from the "Max N in summary" for several reasons:

- The % diff cannot be calculated if the quantity from file 2 is 0 while the quantity from file 1 is not exactly 0, so the ratio is not defined. The number of such items is given separately as "N Zero."
- Items that cannot be calculated from the product alone will be missing if one of the QAP files was generated after production processing.
- If the values are invalid in one or both QAP files, the item is not included in the total. If a value is invalid in only one file, and should be present in both (see b), this is a discrepancy.

Max N in summary: Maximum number of items that could be in the summary.

N Not in Product: Number of items that cannot be calculated from data in the product file alone

N Zero: Number of items with good data for which the % difference could not be calculated because the value for file 2 (but not file 1) was zero, making the ratio infinite.

N Discrepancies: Number of items for which an unexpected difference was found

N Bad Data Found: Number of items for which unexpected bad data were found

N Non-matching: Number of along-track records for which the start/end times (QAP1,2,5) or lat/lon (QAP6,12-15) are different.
Not applicable to other products.

Table 21-3 Sample VAV File (Continued)

SUMMARY:	-4.68E-03	-3.81E+01	2.30E+01	4.69E-02
MAX N IN SUMMARY:	84			
N NOT IN PRODUCT:	10			
N ZERO:	0			
N DISCREPENCIES:	0			
N BAD DATA FOUND:	11			
N IN SUMMARY:	73			
N NON-MATCHING:	0			

11.0 Error and Warning Messages

21.9 Error and Warning Messages

All warning and error messages generated by the program are self-explanatory. Any error messages generated by IDL should be reported.

In addition to errors and warnings written to stderr and stdout, the program generates an exit code. The exit codes used are specified in /vobs/glas/idl/qa_browse/util/qa_exitcodes.pro.

21.10 Recovery Steps

Exit IDL, correct the error in the control file, and start over.

Creating a Global DEM and Replacing Greenland and Antarctica DEM with New Grids

22.1 Global DEM

- 1) Download the SRTM30 data from <http://edcftp.cr.usgs.gov/pub/data/srtm/SRTM30/>

e020n40.dem.zip

e060n40.dem.zip

e100n40.dem.zip

e140n40.dem.zip

w020n40.dem.zip

w060n40.dem.zip

w100n40.dem.zip

w140n40.dem.zip

w180n40.dem.zip

e020n90.dem.zip

e060n90.dem.zip

e100n90.dem.zip

e140n90.dem.zip

w020n90.dem.zip

w060n90.dem.zip

w100n90.dem.zip

w140n90.dem.zip

w180n90.dem.zip

e020s10.dem.zip

e060s10.dem.zip

e100s10.dem.zip

e140s10.dem.zip

- w020s10.dem.zip
- w060s10.dem.zip
- w100s10.dem.zip
- w140s10.dem.zip
- w180s10.dem.zip
- 2) Download the Antarctica data from <http://edcdaac.usgs.gov/gtopo30/gtopo30.html>
 - w060s60.tar.gz
 - w180s60.tar.gz
 - w120s60.tar.gz
 - w000s60.tar.gz
 - e060s60.tar.gz
 - e120s60.tar.gz
- 3) Ftp all the files to the working directory
 - All in the working directory
- 4) Unzip the zip files
 - (unzip for *.zip, gunzip and tar xvf for *.tar.gz)
- 5) Run the following programs:
 - merge40 to merge the data file of latitude –10 to 40 degrees
 - merge90 to merge the data file of latitude 40 to 90 degrees
 - merges10 to merge the data file of latitude –60 to –10 degrees
 - mergesAntar to merge the data file of latitude –90 to –60
- 6) Run mergeall to merge all the data files to the final file:GLOBAL.dem
- 7) Run interp_ourgrid_to30secDEM to replace a new grid in Antarctica and Greenland.
 - Replacing Antarctica grid:
 - interp_ourgrid_to30secDEM /del/newgrids/
 - ac_gmJGM3_ers1DGM_5km_slcr.GRID-egm96 GLOBAL.dem tempfile
 - Replacing Greenland grid:
 - interp_ourgrid_to30secDEM /del/newgrids/
 - gc_gmJGM3_ers1DGM_5km_slcr.GRID-egm96
 - tempfile NEW_GLOBAL.dem.
- 8) Run create_newgrid to add data above 89.995833 and below -89.995833 deg lat

The final file is NEWGLOBAL.dem.

- 9) Run `convrt1deg_new` to create the one degree mask identifying region types in them (ocean or land or mix)

The final file is ONEDEG.MASK.

- 10) Run `cr_1degDem` to create DEM.MASK file that has 0 for ocean, and if not 0, i.e. land, then the value is the record number of the new global dem containing that 1 deg segment.

It also creates LAND.DEM that contains only land dem.

- 11) Run unit test to read the LAND.DEM and DEM.MASK and compares the data values to a test data in `test_dempoints.out`.

Section 23

prod_util

23.1 Function

The content of prod_util is a set of non-production product-related utilities. There are six utilities present: scantime, proc_wf, product_test, gsas_prod_readers, strip1984 and stripper.

Only stripper, scantime, and proc_wf are based on the standard GSAS PGE model. Therefore, no multi-granule or multi-file support is provided, no time selection is available, and no control files are necessary for the other utilities.

Note: The prod_util routines are not intended for production use.

23.2 scantime

scantime is a utility which reads ANC29, ANC23, APID19 and APID1984 and detects secondary header time resets. This can be used to assist in the generation of ANC33 updates. scantime uses a standard GSAS control file.

Required input files are listed in Table 23-1.

Table 23-1 scantime Inputs

File Spec	Type	Source	Short Description
gla00*_0019.dat	Level-0 APID	EDOS	GLAS Level-0 APID19.
gla00*_1984.dat	Level-0 APID	EDOS	GLAS Level-0 APID1984.
anc07*_0000.dat	Static Ancillary	Science Team	GLAS error file.
anc07*_0001.dat	Static Ancillary	Science Team	GLAS global constants file.
anc25*.dat	Dynamic Ancillary	Science Team	GPS/UTC conversion file.
anc33*.dat	Dynamic Ancillary	ISIPS Operations	Counter-to-UTC conversion file.
Control File	Control	ISIPS Operations	Control file.

Output files are listed in Table 23-2.

Table 23-2 scantime Outputs

File Spec	Type	Destination	Short Description
anc33*.dat	Dynamic Ancillary	ISIPS Operations	Suggested replacement ANC33 file.
anc06*.dat	Dynamic Ancillary	ISIPS Operations	Standard metadata/processing log file.

The control file section delimiter for scantime is:

=SCANTIME

23.3 product_test

product_test is used to verify product formats in a testing environment. It contains programs which write product data records with minimum, maximum, and intermediate values. Other programs read what has been written to verify that no change was detected in the values read versus the values written. Two executables (glaxx_writer and glaxx_reader) are provided for each GLA filetype.

glaxx_writer requests the name of an output GLAxx product file from the user and writes data records to that file, as well as creating the text-based output files described in Table 23-3.

Table 23-3 glaxx_writer outputs

Output File	Description
<i>filename.write.scal</i>	contains text-format scaling values for the appropriate product.
<i>filename.write.prod</i>	contains text-format product (scaled) values for each data record written.
<i>filename.write.alg</i>	contains text-format algorithm (unscaled) values for each data record written.

glaxx_reader requests the name of an input GLAxx product file from the user and then reads that file to create text-based output files described in Table 23-4.

Table 23-4 glaxx_reader outputs

Output File	Description
<i>filename.read.scal</i>	contains text-format scaling values for the appropriate product.
<i>filename.read.prod</i>	contains text-format product (scaled) values for each data record written.
<i>filename.read.alg</i>	contains text-format algorithm (unscaled) values for each data record written.

Once glaxx_writer creates the output file and glaxx_reader reads it, the resulting text output files can be compared to determine if any data were lost or changed during the input/output process.

23.4 gsas_prod_readers

gsas_prod_readers are sample product readers which are can be distributed independent from the rest of GSAS. These are designed to provide external data users with sample code for reading the GLAS products. The gsas_prod_readers are fully documented in a separate document which can be provided to the data users along with the code.

23.5 strip1984

strip1984 is a small utility which strips extraneous data from the APID1984 packets. This was created because extra information was added to the 1984 packets during GSFC testing.

strip1984 requests the name of an input 1984 APID file. It reads the secondary header of the first data record to determine the correct record length and then writes the trimmed records to an output file. The output filename is the input filename with '.stripped' appended to it.

23.6 stripper

stripper is a utility written to help process spacecraft test data. It subsets APIDs by selecting data which fall within the specified MET count range. It is modeled after a full-fledged PGE using a slightly modified control file format (MET counts are substituted for UTC seconds in the time specification).

23.7 proc_wf

proc_wf is a utility that decompresses the GLAS waveform from a GLA01 granule and time aligns data and parameters from the GLA01 granule with data and parameters from the corresponding GLA05 granule.

create_regionsMASK_util

24.1 Introduction

This document details the procedure to be followed to create a surface type grid file for use by GLAS.

24.2 Related Documentation

- GSAS Design Document Common Appendices
- Surface Type Grid Creation Utility Design Document

24.3 Overview of Purpose and Functions

The create_regionsMask.pro utility consists of two subroutines (combine and minsurfmask) that have to be called to create the fine and coarse surface type grid files. The combine routine will combine the four surface type grid files (ice sheet, sea ice, land, and ocean) to create one global surface type grid file. The minsurfmask routine will read the global surface type grid file, and create a coarse surface type grid file and a fine surface type grid file. The fine surface type grid file contains 2 x 2 arc minute cells.

24.4 Installation and Initialization

This program has been compiled and tested under the following environment:

OS: HP-UX 11.00

Compiler:IDL Version 5.4

24.5 Startup and Termination

To run the utility programs:

- Change to the runtime directory
- Link in the masks files
- Delete or rename any old output files
- Type "create_regionsmask < control_file"
- Make sure that the run_regionsmaskprog, control_file, and create_regionsMask.pro files are all linked (or present) in the runtime directory

If the program completes without error and the output files are created, then the program has completed successfully. Abnormal execution will result in an error. Two additional files (mask1.test and mask2.test) are created. These are test files containing the ASCII version of the data in surf_1deg_mask.dat and surf_2min_mask.dat files. They are only used for debug-

ging purposes. The combined regions mask file, and the coarse and fine regions mask files are created with the names entered in the control file.

24.6 Functions and Their Operation

The create_regionmask batch file will call the idl script run_regionsmaskprog. This will compile and execute the create_regionsMask.pro idl routine. The main function of this idl routine are:

combine

- Combining the individual surface masks file into one global surface masks file. The shape and size of the combined surface masks file is the same as the individual surface masks file.

minsurfmask

- Reading the global surface masks file and creating a coarse grid (1 x 1 deg) and a fine grid (2 x 2 minute) file.

24.7 Input Arguments

24.7.1 Control File

This program requires the name of a control file as a command-line argument. The program reads input from the control file to determine control parameters. The control file contains the names of the Predicted orbit file, the ANC07 error file, and the output files.

The control file format is as follows:

= CREATE_REGIONSMASK

outMaskFile1deg = surface_1deg_mask.dat

outMaskFile2min = surface_2min_mask.dat

iceSheetMaskFile = icesheet_mask

landMaskFile = land_mask

oceanMaskFile = ocean_mask

seaIceMaskFile = seaice_mask

combinedMaskFile = surface_masks.dat

=END

The control file must begin and end with an equal sign "=" to designate this as a section. CREATE_REGIONSMASK is the section name for this program and should not be changed. This allows the control section to be included in a larger control file. The structure follows the "keyword=" format. It is important that the keywords are the same as in the above example since the code reading this file is searching for these words. The keywords may be in upper-

case or lowercase. Also, it makes no difference if there are spaces between the keyword, equal sign, and parameter name. Following the equal signs are the values which may change (in italics). The order of the keywords or file names is not important.

Refer to the GSAS User's Guide Common Appendices, "Control File Format" section for additional information on the control file format.

24.8 Input Files

Input files consist of the individual surface masks files (ice sheet, sea ice, land, and ocean).

24.9 Output Files

The output files are the combined global surface masks file "surface_masks.dat", and the global coarse grid file (surface_1deg_mask.dat) and the global fine grid file (surface_2min_mask.dat). Two ASCII debug files (mask1.test and mask2.test) are also produced.

24.10 Understanding the Output

The output files each have a header record. The coarse file has a 1440 byte record, while the fine grid file has a 900 byte record. The combined masks file also has a 900 byte header record. The header records lists the individual regions masks files used to create the final coarse and fine grid files, as well as other housekeeping information. The header records are in ASCII format, and therefore can be easily looked at by performing a UNIX head command on the files.

The "surface_1deg_mask.dat" and "surface_2min_mask.dat" are FORTRAN direct access files. The "surface_1deg_mask.dat" file contains one 4-byte record for each 1-degree latitude/longitude cell. The value in the record is a 4-byte integer. If the surface type is constant throughout the cell, the record contains the negative of the surface type (see SURFACE TYPE CODING, below). If the surface type is not constant throughout the coarse cell, the record contains the starting location in the fine grid file of the sub grid with the surface types for this coarse cell. The location is given as the byte offset from the beginning of the fine grid file. Records start at the North Pole, with 0 deg Longitude, and proceed to 360 deg Longitude before stepping to the next latitude band, where the sequence is repeated.

Each record of the "surface_2min_mask.dat" file contains one 30x20 BYTE array. Each cell of this array specifies the surface type for one fine cell within the coarse grid to which the array corresponds (see SURFACE TYPE CODING, below). The first byte of the array contains the surface type for the northwest corner of the large cell. Location changes most rapidly with longitude.

SURFACE TYPE CODING

Allowed values for the surface type are 1 to 15. The surface types are bit-coded, and any combination of surface type is allowed. The bit coding is:

1 = ice sheet

2 = sea ice

4 = land

8 = ocean

24.11 Error and Warning Messages

None.

24.12 Recovery Steps

None.

24.13 Abbreviations and Acronyms

None.

24.14 Glossary

File	A collection of data stored as records and terminated by a physical or logical end-of-file (EOF) marker. The term usually applies to the collection within a storage device or storage media such as a disk file or a tape file. Loosely employed it is used to indicate a collection of GLAS data records without a standard label. For the Level 1A Data Product, the file would constitute the collection of one-second Level 1A data records generated in the SDPS working storage for a single pass.
Program	The smallest set of computer instructions that can be executed as a stand-alone unit.
Subroutine	A program that is called by another program.
Variable	Usually a reference in a computer program to a storage location, i.e., a place to contain or hold the value of a data item.

24.15 Notes

None

24.16 Appendices

- GSAS User's Guide Common Appendices

Appendix A

GLAS File Summary

This Appendix is a summary of the GLAS File types and provides information about the recommended production naming conventions. Full details regarding the GLAS product and ancillary files are provided in the GLAS Science Data Management Plan and the GLAS Standard Data Products Specifications - Level 1 and Level 2.

A.1 GLAS Production File Naming Convention

GSAS creates products and uses various ancillary files and other input products that are track/time dependent, or process-specific and created automatically. Some ancillary files are static and others are dynamic. The following scheme outlines the file naming conventions required for each file type.

- 1) Track dependent products processed at ISIPS (GLA01-15; and corresponding png files, qap products, v and v files, and metadata files)

GLAxx_mmm_prkk_ccc_tttt_s_nn_fff.eee

Where eee is dat for GLA01-15 and eee is hdf for GLA16; qap for corresponding qap file; png for corresponding non-hdf browse files; vav for corresponding validation and verification file; met for metadata files

Note that the multiple file pngs for GLA01, 02, 03 and 05-15 will use the ffff to denote the different files

- 2) Time dependent GLA and ANC granules: (GLA00, dynamic ANC time dependent files except for ANC06)

**GLA00_mmm_yyyymmdd_hhmmss_nn_fff.eee and
ANCxx_mmm_yyyymmdd_hhmmss_nn_fff.eee**

Where eee is always dat, xx is the corresponding ANC file number

yyymmdd_hhmmss is the date_time of the first data point in the file

for GLA00 the ffff has to have a one to one correspondence with the APID number. If the apid number is less than 4 digits then the unused portion of the ffff field will be set to 0. The numbers will be filled in from the right most 'f' field, i.e. apid 26 will be denoted as 0026.

- 3) Static Ancillary files required for processing (ANC)

ANCxx_mmm_nn_fff.eee

Where eee is always dat, xx is the corresponding ANC file number

- 4) Log files, ANC06

ANC06_mmm_yyyymmdd_gggggg_nn_pgename.txt

yyyymmdd is the creation date

5) Control files

CTL_mmm_yyyymmdd_gggggg_nn_pgename.ctl

Where yyyymmdd is the creation date

6) SCF QA files

SCFQA_mmm_yyyymmdd_iiiiii_nn.txt

Where yyyymmdd is the creation date

Time for process-specific files is processing date. GLAS file naming keys are defined in Table A-1.

Table A-1 GLAS File Naming Keys

Key	Description
xx	Type ID number (CCB assigned number within a specific GLA or ANC series)
p	repeat ground track phase
r	reference orbit number
kk	instance # incremented every time GLAS enters a different reference orbit
ccc	cycle of reference orbit for this phase
tttt	track within reference orbit
s	segment of orbit. This is 0 on files that contain multiple segments (GLA02, GLA03, GLA04, GLA07-GLA15) and 1,2,3, or 4 on GLA01, GLA05, and GLA06.
yyyymmdd	starting date in year, month, and day of month or creation date (see above)
hhmmss	starting time hour, minute, second
mmm	release number for process that created the produce (CCB assigned-combination of software and data)
nn	granule version number (the number of times this granule is created for a specific release)
iii	counting sequence number (incremental sequence per day for each instance of a process specific ANCxx or GLAxx)
ffff	file type (numerical, CCB assigned for multiple files as needed for data of same time period for a specific ANCxx or GLAxx, .i.e. multi-file granule)
eee	descriptor telling whether data product, browse product, quality assurance product, validation and verification output. Valid eee values are dat, png, hdf, qap, vav, and met
dddd	'brws' denotes consolidated multi-png file browse product in hdf

Table A-1 GLAS File Naming Keys (Continued)

Key	Description
ggggggg	job id number – number of digits may change.
pgenome	GLAS_ATM, GLAS_L0P, met_util, GLAS_L1A, GLAS_Meta, ATM_ANC, met_util, GLAS_ALT, QABROWSE, ExtractRev

A.2 EDOS L0 File Naming Convention

EDOS-delivered files have a different naming convention than standard GLAS product files. The EDOS L0 files will be renamed as part of the ingest process. Incoming filenames are as follows:

foooooooooooooooooooooooooooooo

Table A-2 defines keys for the EDOS file naming convention.

Table A-2 EDOS L0 File Naming Keys

Key	Description
f	E (for EDS) or P (for PDS) (1byte)
oooooooo	First APID in data set (SCID 3 bytes, APID 4 bytes)
ttttttt	Second APID in data set (SCID 3 bytes, APID 4 bytes)
hhhhhhh	Third APID in data set (SCID 3 bytes, APID 4 bytes)
dddddddddd	creation GMT/ZULU time (11 bytes)
l	numeric identification (0-9) (1 byte)
uu	Unique file number (00-99) (2 bytes)
eeee	File naming extension PDS or EDS (4 bytes)

A.3 GLAS File Types

Table A-3 lists GLAS file IDs, a short description, and file type for each file used in GSAS. Note that QAP files, which correspond to each product file, are not listed. The “multi” column

indicates if a file type is a multi-file granule. These means there are multiple subtypes within each file type.

Table A-3 GLAS File Types

File Type	Short Description	Type	Multi
ANC01	Meteorological Data	Dynamic Anc	Yes 00=header 01=precip water 02=height 03=rel humidity 04=temperature
ANC03	Laser Tracking Data	Dynamic Anc	No
ANC04	IERS Rotation	Dynamic Anc	No
ANC05	Magnetic and Solar Flux	Dynamic Anc	No
ANC06	GLAS Metadata and Log	Dynamic Anc	No
ANC07	GLAS Coefficients and Constants	Static Anc	Yes 00=errors 01=global 02=atmosphere 03=elevation 04=waveform 05=L1A 06=utility
ANC08	Precision Orbit Data	Dynamic Anc	No
ANC09	Precision Attitude Data	Dynamic Anc	No
ANC10	GPS Tracking	Dynamic Anc	No
ANC11	Instrument Trend	Dynamic Anc	No
ANC12	Digital Elevation Model	Static Anc	Yes 00=DEM 01=Mask
ANC13	Geoid	Static Anc	No
ANC16	Load Tide Model	Static Anc	No
ANC17	Ocean Tide Model	Static Anc	No
ANC18	Standard Atmosphere	Static Anc	No
ANC20	Predicted Orbit	Dynamic Anc	No
ANC21	Science Trend Data	Dynamic Anc	No
ANC22	Reference orbit	Dynamic Anc	No
ANC23	Reference ascending node	Dynamic Anc	No

Table A-3 GLAS File Types (Continued)

File Type	Short Description	Type	Multi
ANC25	GPS-UTC time	Dynamic Anc	No
ANC26	Reference Orbit Ephemerides		No
ANC27	Regional masks	Static Anc	No
ANC28	Rev node table	Dynamic Anc	No
ANC29	Index	Dynamic Anc	No
ANC30	Global aerosol categorization map	Static Anc	No
ANC31	Aerosol tropospheric classification map)	Static Anc	No
ANC32	GPS time correction	Dynamic Anc	No
ANC33	MET Counter to UTC conversion	Dynamic Anc	No
ANC34	BCTCW counter to UTC conversion	Dynamic Anc	No
ANC35	Ozone	Static Anc	No
ANC36	Atmosphere Utility	Dynamic Anc	No
ANC37	Spacecraft CG	Dynamic Anc	No
ANC38	Multiple-scattering table	Dynamic Anc	No
ANC39	GPS Data	Dynamic Anc	No
ANC40	Raw Meteorological File	Dynamic Anc	No
ANC41	JPL Planetary Ephemeris	Dynamic Anc	No
ANC42	Reference Orbit Table	Dynamic Anc	No
ANC43	Track File	Dynamic Anc	No
ANC44	Atm 1064 Cirrus CAL File	Dynamic Anc	No
ANC45	Product Metadata template files	Static Anc	Yes 01=GLA01 02=GLA02 etc...
ANC46	Ancillary Metadata template files	Static Anc	Yes 04=ANC04 08=ANC08 etc...
ANC47	EDOS Construction Records	Dynamic ANC	yes (one file per APID type)
ANC48	GLAS MCF File	Static Anc	Yes 01 for GLA01

Table A-3 GLAS File Types (Continued)

File Type	Short Description	Type	Multi
ANC49	GLAS Ancillary MCF File	Static Anc	Yes 01 for GLA01
ANC50	00 for Merged ANC09/ANC32 File 01 for Frequency Trend File	Dynamic ANC	Yes (see short description)
ANC51	SRTM DEM Data	Static Anc	Yes
ANC52	Saturation Correction Tables	Static Anc	Yes 01=range 02=energy 03=pulse width
GLA00	GLAS Instrument Packet File (APIDs)	Product	yes (one file per APID type)
GLA01	Altimetry Data	Product	No
GLA02	Atmosphere Data	Product	No
GLA03	Engineering Data	Product	No
GLA04	SRS and GPS Data	Product	Yes 01=LPA 02=LRS 03=GYRO 04=IST 05=BST 06=SCPA
GLA05	Waveform-based Range Corrections	Product	No
GLA06	Elevation	Product	No
GLA07	Backscatter	Product	No
GLA08	Boundary Layer and Aerosol Layer Heights	Product	No
GLA09	Cloud Height for Multiple Layers	Product	No
GLA10	Aerosol Vertical Structure	Product	No
GLA11	Thin Cloud/Aerosol Optical Depth	Product	No
GLA12	Ice Sheet Products	Product	No
GLA13	Sea Ice Products	Product	No
GLA14	Land Products	Product	No
GLA15	Ocean Products	Product	No

A.4 GLAS File Associations

Table A-4 lists each GLAS file and its associated source or PGE. Those inputs in *italics* are for special processing scenarios. Note that GLAS_Reader, though not listed as a destination, can read most of these files.

Table A-4 GSAS File Associations

File Type	Short Description	Source (output from)	Destination (input to)
ANC01	Meteorological Data	met_util	GLAS_Alt GLAS_Atm
ANC04	IERS Polar Motion and Earth Rotation Data File.	UTexas	GLAS_Alt, GLAS_Atm
ANC06	GLAS Metadata and Log	All core PGEs	Archive
ANC07	GLAS Coefficients and Constants	Science Team	All PGEs
ANC08	Precision Orbit Data	UTexas	GLAS_Alt GLAS_Atm
ANC09	Precision Attitude Data	UTexas	GLAS_Alt GLAS_Atm
ANC12	Digital Elevation Model	Science Team	GLAS_Alt GLAS_Atm
ANC13	Geoid	Science Team	GLAS_Alt GLAS_Atm
ANC16	Load Tide Model	Science Team	GLAS_Alt
ANC17	Ocean Tide Model	Science Team	GLAS_Alt
ANC18	Standard Atmosphere	Science Team	GLAS_Atm
ANC20	Predicted Orbit	UTexas	createGran, GLAS_L1A, GLAS_Alt, GLAS_Atm
ANC25	GPS-UTC time	UTexas	GLAS_L1A
ANC27	Regional masks	Science Team	GLAS_Atm
ANC29	Index files	GLAS_L0proc	GLAS_L1A
ANC30	Global aerosol categorization map	Science Team	GLAS_Atm
ANC31	Aerosol tropospheric classification map)	Science Team	GLAS_Atm
ANC32	GPS time correction	GLAS_L0proc	GLAS_L1A
ANC33	MET Counter to UTC conversion	Instrument Team	GLAS_L0proc
ANC35	Ozone file	Science Team	Atm_anc

Table A-4 GSAS File Associations (Continued)

File Type	Short Description	Source (output from)	Destination (input to)
ANC36	Atmosphere Utility	Atm_anc	GLAS_Atm
ANC40	Raw meteorological file.	GSFC DAAC	met_util
ANC44	Atm 1064 Cirrus CAL File	atm_anc	Science Team
ANC45	Product Metadata template files	Science Team	GLAS_L1A GLAS_Atm GLAS_Alt GLAS_Meta
ANC46	Ancillary Metadata template files	Science Team	GLAS_Meta
ANC47	EDOS Construction Records	EDOS	GLAS_L0proc
ANC50	Merged ANC09/ANC32 File, or Frequency Trend File	GLAS_Tick	Instrument Team
ANC51	SRTM DEM Data	Science Team	GLAS_Alt
ANC52-01	Range Saturation Correction Table	Science Team	GLAS_Alt
ANC52-02	Energy Saturation Correction Table	Science Team	GLAS_Alt
ANC53	Time-based aerosol tropospheric map	Science Team	GLAS_Alt
ANC54-01	GLAS Derived DEM-Greenland index	Science Team	GLAS_Alt
ANC54-02	GLAS Derived 1k DEM over Greenland	Science Team	GLAS_Alt
ANC54-03	GLAS Derived DEM-Antarctica index	Science Team	GLAS_Alt
ANC54-04	GLAS Derived 500m DEM over Greenland	Science Team	GLAS_Alt
ANC54-05	Canadian DEM Index File	Science Team	GLAS_Alt
ANC54-06	Canadian DEM Elevation File for (231-299 degrees east, 70-82 degree north)	Science Team	GLAS_Alt
ANC55	Mean Sea Surface	Science Team	GLAS_Alt
ANC56	Pole Tide	Science Team	GLAS_Alt
ANC57	Global Bathymetry	Science Team	GLAS_Alt
ANC58	Ground Track	Science Team	GLAS_Alt
ANC59	Pointing Mode Table	Science Team	GLAS_Alt

Table A-4 GSAS File Associations (Continued)

File Type	Short Description	Source (output from)	Destination (input to)
ANC70	SCF Constants File	SCF	SCF
GLA00	GLAS Instrument Packet File (APIDs)	EDOS	GLAS_L0proc, GLAS_L1A
GLA01	Altimetry Data	GLAS_L1A	GLAS_Alt, Archive
GLA02	Atmosphere Data	GLAS_L1A	GLAS_Atm, atm_anc, Archive
GLA03	Engineering Data	GLAS_L1A	GLAS_Tick, Archive
GLA04	SRS and GPS Data	GLAS_L1A	GLAS_L1A, UTexas, Archive
GLA05	Waveform-based Range Corrections	GLAS_Alt	GLAS_Alt, Archive
GLA06	Elevation	GLAS_Alt	GLAS_Alt, Archive
GLA07	Backscatter	GLAS_Atm	GLAS_Atm, Archive
GLA08	Boundary Layer and Elevated Aerosol Layer Heights	GLAS_Atm	Archive
GLA09	Cloud Height for Multiple Layers	GLAS_Atm	GLAS_Alt, Archive
GLA10	Aerosol Vertical Structure	GLAS_Atm	Archive
GLA11	Thin Cloud/Aerosol Optical Depth	GLAS_Atm	GLAS_Alt, Archive
GLA12	Ice Sheet Products	GLAS_Alt	Archive
GLA13	Sea Ice Products	GLAS_Alt	Archive
GLA14	Land Products	GLAS_Alt	Archive
GLA15	Ocean Products	GLAS_Alt	Archive

Appendix B

ANC07 Format, Files and Contents

B.1 ANC07 Format

ANC07 files are in standard GSAS “keyword=value” format. ANC07 files contain sections for errors messages, status messages, global constants, and subsystem-specific constants. Sections may be combined into a single file or separated into multiple files. Not all sections need be present. The sections are delimited as follows:

```
BEG_OF_STATUS=
...Status section contents...
END_OF_STATUS=

BEG_OF_ERROR=
...Error section contents...
END_OF_ERROR

BEG_OF_GLOBALS=
...Global constants section contents...
END_OF_GLOBALS

BEG_OF_ATM=
...Atmosphere constants section contents...
END_OF_ATM

BEG_OF_ELEV=
...Elevation constants section contents...
END_OF_ELEV

BEG_OF_L1A=
...L1A constants section contents...
END_OF_L1A

BEG_OF_UTIL=
...Utility constants section contents...
END_OF_UTIL
```

B.2 ANC07 Files

In production, ANC07 is defined as a multi-granule file with a single granule representing a different section (for the most part). Table B-1 lists the granule names and contents. See Appendix A for more information regarding file naming conventions.

Table B-1 ANC07 Granule Names and Contents

Naming Convention	Contents
anc07_mmm_nn_0000.dat	Error and Status sections
anc07_mmm_nn_0001.dat	Global constants
anc07_mmm_nn_0002.dat	Atmosphere constants
anc07_mmm_nn_0003.dat	Elevation constants
anc07_mmm_nn_0004.dat	Waveform constants
anc07_mmm_nn_0005.dat	L1A constants
anc07_mmm_nn_0006.dat	Utility constants

B.3 ANC07 Contents

Global constants and those used by the L1A, Atmosphere, Elevation, and Waveforms are listed in this section. Error and Status messages are listed in Appendix D. Values listed here are current for the final release version of GSAS (6.0.1).

B.3.1 Global Constants

```
#
# 06/07/99 PLJ Corrected the elevation status messages
# 1999 September 22 JLee, Updated GLAS_Error where error < 0
# 09/27/99 GMM Updated the error list to include entries from ATM, WF, ELEV
#       subsystems and made error codes negative.
# 1999 October   18 JLee, Fixed error code.
# 1999 November  01 JLee, Integrated ATM constants
# 1999 November  09 JLee, Fixed error codes, split out.
# 1999 November 10 JLee, Included errors from GM email
# 2000 March     13 JLee, Updated
# 2001 April     13 JLee, Added DEM constants from Elevation
# 2001 May       16 PJester, Added GPS to UTC offset
# 2001 June      08 JLee, Modified GPS to UTC offset to match Donghui's data
# 2001 August    22 JLee, Moved calibration coefs from L1A to here so that
#       both WF and L1A can use them
# 2002 January   24 JLee, Changed GPSttoUTCOffset to work with MOSS6 data.
# 2002 January   08 JLee, Modified GPS to UTC offset to match data
# 2002 April     11 JLee, Modified GPS to UTC offset (again) to match data
# 2002 April     23 JLee, CR20020412-001 Change energy calib coeffs
# 2002-12-06 LA Roberts, added d_cnt2voltTable & d_cnt2gainTable
# 2003-06-17 LA Roberts, moved d_dthires from const_ll1a_mod & const_wf_mod
#       and renamed gd_dthires
# 2003-07-28 JLee, CR0000480 instrument state sensitivity
# 2003-11-05 LA Roberts, changed D_CAL_C to GD_CAL_C,
#       D_CAL_C_DETID to GD_CAL_C_DETID, D_CAL_C_DIGID to GD_CAL_C_DIGID,
```

```

#      added GD_CO_FIBER_BOX
# 2005-04-06  LA Roberts, updated energy calculation variables
# 2005-05-12  LA Roberts, set GD_THRNSIGR to 2.0d0
# 2005-05-16  LA Roberts, added gd_minRANrg & gd_minRlNrg
# 2005-07-21  LA Roberts, set GD_THRNSIGR to 4.5d0
# 2006-04-12  JLee, CR2240 xmit energy gain fix
# 2008-01-07  LA Roberts, moved anc52 saturation parameters from const_elev_mod
#
# Constants Mod Entries
#
BEG_OF_GLOBALS = -----
GLOB_VERS = ANC07 Globals V6.0.1 2011-05-16
#
# Minimum Number of ANC32 records
#
GI_MIN_ANC32_RECS=2
#
# Mean Ellipsiod Radius
#
ELLIPAE = 6378136.3d0
#
# Ellipsiod Flattening
#
ELLIPF = 298.257d0
#
# min GLA05%i_satNdx for filling d_satRngCorr, d_satNrgCorr or d_satPwdCorr
GI_MIN_SATNDX = 2
#
# Gain Correction Factor is used to correct the computed transmit energy by the
# transmitted gain (in counts) and is calculated by the laser dependent
# coefficients GD_GAINCOEFF.
#
GD_GAINCOEFF_1=1.0d0, 0.0d0, 0.0d0, 0.0d0
GD_GAINCOEFF_2=1.0746249D00, -2.2665959D-03, 1.1939701D-05, -2.5616417D-08
GD_GAINCOEFF_3=1.096532D00, -3.0427996D-03, 1.8456647D-05, -4.0666979D-08
#
# Tables for converting raw WF counts to volts
#      d_wf_volts = d_cnt2voltTable(i_wf_counts)
#
# The following was used to generate this table:
# f = a1*y+b1 for 0<=y<=127
#      a2*y+b2 for 127<y<=255
# f==d_cnt2voltTable, y==i_wf_counts
# detector 1
#      a1==0.006675, b1==-.19528
#      a2==0.006198, b2==-.13442
# detector 2
#      a1==0.006625, b1==-.19383
#      a2==0.006128, b2==-.13044
#
D_CNT2VOLTTABLE1_1=-0.195279d0, -0.188604d0, -0.181929d0, -0.175254d0, -
0.168579d0, -0.161904d0, -0.155229d0, -0.148554d0, -0.141879d0, -0.135204d0, -
0.128529d0, -0.121854d0, -0.115179d0, -0.108504d0, -0.101829d0, -0.095154d0
D_CNT2VOLTTABLE1_2=-0.088479d0, -0.081804d0, -0.075129d0, -0.068454d0, -
0.061779d0, -0.055104d0, -0.048429d0, -0.041754d0, -0.035079d0, -0.028404d0, -
0.021729d0, -0.015054d0, -0.008379d0, -0.001704d0, 0.004971d0, 0.011646d0
D_CNT2VOLTTABLE1_3=0.018321d0, 0.024996d0, 0.031671d0, 0.038346d0, 0.045021d0,
0.051696d0, 0.058371d0, 0.065046d0, 0.071721d0, 0.078396d0, 0.085071d0,
0.091746d0, 0.098421d0, 0.105096d0, 0.111771d0, 0.118446d0

```

D_CNT2VOLTTABLE1_4=0.125121d0, 0.131796d0, 0.138471d0, 0.145146d0, 0.151821d0,
0.158496d0, 0.165171d0, 0.171846d0, 0.178521d0, 0.185196d0, 0.191871d0,
0.198546d0, 0.205221d0, 0.211896d0, 0.218571d0, 0.225246d0
D_CNT2VOLTTABLE1_5=0.231921d0, 0.238596d0, 0.245271d0, 0.251946d0, 0.258621d0,
0.265296d0, 0.271971d0, 0.278646d0, 0.285321d0, 0.291996d0, 0.298671d0,
0.305346d0, 0.312021d0, 0.318696d0, 0.325371d0, 0.332046d0
D_CNT2VOLTTABLE1_6=0.338721d0, 0.345396d0, 0.352071d0, 0.358746d0, 0.365421d0,
0.372096d0, 0.378771d0, 0.385446d0, 0.392121d0, 0.398796d0, 0.405471d0,
0.412146d0, 0.418821d0, 0.425496d0, 0.432171d0, 0.438846d0
D_CNT2VOLTTABLE1_7=0.445521d0, 0.452196d0, 0.458871d0, 0.465546d0, 0.472221d0,
0.478896d0, 0.485571d0, 0.492246d0, 0.498921d0, 0.505596d0, 0.512271d0,
0.518946d0, 0.525621d0, 0.532296d0, 0.538971d0, 0.545646d0
D_CNT2VOLTTABLE1_8=0.552321d0, 0.558996d0, 0.565671d0, 0.572346d0, 0.579021d0,
0.585696d0, 0.592371d0, 0.599046d0, 0.605721d0, 0.612396d0, 0.619071d0,
0.625746d0, 0.632421d0, 0.639096d0, 0.645771d0, 0.652446d0
D_CNT2VOLTTABLE1_9=0.658924d0, 0.665122d0, 0.67132d0, 0.677518d0, 0.683716d0,
0.689914d0, 0.696112d0, 0.70231d0, 0.708508d0, 0.714706d0, 0.720904d0,
0.727102d0, 0.7333d0, 0.739498d0, 0.745696d0, 0.751894d0
D_CNT2VOLTTABLE1_10=0.758092d0, 0.76429d0, 0.770488d0, 0.776686d0, 0.782884d0,
0.789082d0, 0.79528d0, 0.801478d0, 0.807676d0, 0.813874d0, 0.820072d0, 0.82627d0,
0.832468d0, 0.838666d0, 0.844864d0, 0.851062d0
D_CNT2VOLTTABLE1_11=0.85726d0, 0.863458d0, 0.869656d0, 0.875854d0, 0.882052d0,
0.88825d0, 0.894448d0, 0.900646d0, 0.906844d0, 0.913042d0, 0.91924d0, 0.925438d0,
0.931636d0, 0.937834d0, 0.944032d0, 0.95023d0
D_CNT2VOLTTABLE1_12=0.956428d0, 0.962626d0, 0.968824d0, 0.975022d0, 0.98122d0,
0.987418d0, 0.993616d0, 0.999814d0, 1.006012d0, 1.01221d0, 1.018408d0,
1.024606d0, 1.030804d0, 1.037002d0, 1.0432d0, 1.049398d0
D_CNT2VOLTTABLE1_13=1.055596d0, 1.061794d0, 1.067992d0, 1.07419d0, 1.080388d0,
1.086586d0, 1.092784d0, 1.098982d0, 1.10518d0, 1.111378d0, 1.117576d0,
1.123774d0, 1.129972d0, 1.13617d0, 1.142368d0, 1.148566d0
D_CNT2VOLTTABLE1_14=1.154764d0, 1.160962d0, 1.16716d0, 1.173358d0, 1.179556d0,
1.185754d0, 1.191952d0, 1.19815d0, 1.204348d0, 1.210546d0, 1.216744d0,
1.222942d0, 1.22914d0, 1.235338d0, 1.241536d0, 1.247734d0
D_CNT2VOLTTABLE1_15=1.253932d0, 1.26013d0, 1.266328d0, 1.272526d0, 1.278724d0,
1.284922d0, 1.29112d0, 1.297318d0, 1.303516d0, 1.309714d0, 1.315912d0, 1.32211d0,
1.328308d0, 1.334506d0, 1.340704d0, 1.346902d0
D_CNT2VOLTTABLE1_16=1.3531d0, 1.359298d0, 1.365496d0, 1.371694d0, 1.377892d0,
1.38409d0, 1.390288d0, 1.396486d0, 1.402684d0, 1.408882d0, 1.41508d0, 1.421278d0,
1.427476d0, 1.433674d0, 1.439872d0, 1.44607d0
D_CNT2VOLTTABLE2_1=-0.193828d0, -0.187203d0, -0.180578d0, -0.173953d0, -
0.167328d0, -0.160703d0, -0.154078d0, -0.147453d0, -0.140828d0, -0.134203d0, -
0.127578d0, -0.120953d0, -0.114328d0, -0.107703d0, -0.101078d0, -0.094453d0
D_CNT2VOLTTABLE2_2=-0.087828d0, -0.081203d0, -0.074578d0, -0.067953d0, -
0.061328d0, -0.054703d0, -0.048078d0, -0.041453d0, -0.034828d0, -0.028203d0, -
0.021578d0, -0.014953d0, -0.008328d0, -0.001703d0, 0.004922d0, 0.011547d0
D_CNT2VOLTTABLE2_3=0.018172d0, 0.024797d0, 0.031422d0, 0.038047d0, 0.044672d0,
0.051297d0, 0.057922d0, 0.064547d0, 0.071172d0, 0.077797d0, 0.084422d0,
0.091047d0, 0.097672d0, 0.104297d0, 0.110922d0, 0.117547d0
D_CNT2VOLTTABLE2_4=0.124172d0, 0.130797d0, 0.137422d0, 0.144047d0, 0.150672d0,
0.157297d0, 0.163922d0, 0.170547d0, 0.177172d0, 0.183797d0, 0.190422d0,
0.197047d0, 0.203672d0, 0.210297d0, 0.216922d0, 0.223547d0
D_CNT2VOLTTABLE2_5=0.230172d0, 0.236797d0, 0.243422d0, 0.250047d0, 0.256672d0,
0.263297d0, 0.269922d0, 0.276547d0, 0.283172d0, 0.289797d0, 0.296422d0,
0.303047d0, 0.309672d0, 0.316297d0, 0.322922d0, 0.329547d0
D_CNT2VOLTTABLE2_6=0.336172d0, 0.342797d0, 0.349422d0, 0.356047d0, 0.362672d0,
0.369297d0, 0.375922d0, 0.382547d0, 0.389172d0, 0.395797d0, 0.402422d0,
0.409047d0, 0.415672d0, 0.422297d0, 0.428922d0, 0.435547d0
D_CNT2VOLTTABLE2_7=0.442172d0, 0.448797d0, 0.455422d0, 0.462047d0, 0.468672d0,
0.475297d0, 0.481922d0, 0.488547d0, 0.495172d0, 0.501797d0, 0.508422d0,

```
0.515047d0, 0.521672d0, 0.528297d0, 0.534922d0, 0.541547d0
D_CNT2VOLTTABLE2_8=0.548172d0, 0.554797d0, 0.561422d0, 0.568047d0, 0.574672d0,
0.581297d0, 0.587922d0, 0.594547d0, 0.601172d0, 0.607797d0, 0.614422d0,
0.621047d0, 0.627672d0, 0.634297d0, 0.640922d0, 0.647547d0
D_CNT2VOLTTABLE2_9=0.653941d0, 0.660069d0, 0.666197d0, 0.672325d0, 0.678453d0,
0.684581d0, 0.690709d0, 0.696837d0, 0.702965d0, 0.709093d0, 0.715221d0,
0.721349d0, 0.727477d0, 0.733605d0, 0.739733d0, 0.745861d0
D_CNT2VOLTTABLE2_10=0.751989d0, 0.758117d0, 0.764245d0, 0.770373d0, 0.776501d0,
0.782629d0, 0.788757d0, 0.794885d0, 0.801013d0, 0.807141d0, 0.813269d0,
0.819397d0, 0.825525d0, 0.831653d0, 0.837781d0, 0.843909d0
D_CNT2VOLTTABLE2_11=0.850037d0, 0.856165d0, 0.862293d0, 0.868421d0, 0.874549d0,
0.880677d0, 0.886805d0, 0.892933d0, 0.899061d0, 0.905189d0, 0.911317d0,
0.917445d0, 0.923573d0, 0.929701d0, 0.935829d0, 0.941957d0
D_CNT2VOLTTABLE2_12=0.948085d0, 0.954213d0, 0.960341d0, 0.966469d0, 0.972597d0,
0.978725d0, 0.984853d0, 0.990981d0, 0.997109d0, 1.003237d0, 1.009365d0,
1.015493d0, 1.021621d0, 1.027749d0, 1.033877d0, 1.040005d0
D_CNT2VOLTTABLE2_13=1.046133d0, 1.052261d0, 1.058389d0, 1.064517d0, 1.070645d0,
1.076773d0, 1.082901d0, 1.089029d0, 1.095157d0, 1.101285d0, 1.107413d0,
1.113541d0, 1.119669d0, 1.125797d0, 1.131925d0, 1.138053d0
D_CNT2VOLTTABLE2_14=1.144181d0, 1.150309d0, 1.156437d0, 1.162565d0, 1.168693d0,
1.174821d0, 1.180949d0, 1.187077d0, 1.193205d0, 1.199333d0, 1.205461d0,
1.211589d0, 1.217717d0, 1.223845d0, 1.229973d0, 1.236101d0
D_CNT2VOLTTABLE2_15=1.242229d0, 1.248357d0, 1.254485d0, 1.260613d0, 1.266741d0,
1.272869d0, 1.278997d0, 1.285125d0, 1.291253d0, 1.297381d0, 1.303509d0,
1.309637d0, 1.315765d0, 1.321893d0, 1.328021d0, 1.334149d0
D_CNT2VOLTTABLE2_16=1.340277d0, 1.346405d0, 1.352533d0, 1.358661d0, 1.364789d0,
1.370917d0, 1.377045d0, 1.383173d0, 1.389301d0, 1.395429d0, 1.401557d0,
1.407685d0, 1.413813d0, 1.419941d0, 1.426069d0, 1.432197d0
#
# Gain Correction Table computed following Xiaoli's original algorithm
# using a "normalized" gain
#
D_CNT2GAINTABLE_1=0.0d0, 0.00392157d0, 0.00784314d0, 0.01176471d0,
0.01568627d0, 0.01960784d0, 0.02352941d0, 0.02745098d0, 0.03137255d0,
0.03529412d0, 0.03921569d0, 0.04313725d0, 0.04705882d0, 0.05098039d0,
0.05490196d0, 0.05882353d0
D_CNT2GAINTABLE_2=0.0627451d0, 0.06666667d0, 0.07058824d0, 0.0745098d0,
0.07843137d0, 0.08235294d0, 0.08627451d0, 0.09019608d0, 0.09411765d0,
0.09803922d0, 0.10196078d0, 0.10588235d0, 0.10980392d0, 0.11372549d0,
0.11764706d0, 0.12156863d0
D_CNT2GAINTABLE_3=0.1254902d0, 0.12941176d0, 0.13333333d0, 0.1372549d0,
0.14117647d0, 0.14509804d0, 0.14901961d0, 0.15294118d0, 0.15686275d0,
0.16078431d0, 0.16470588d0, 0.16862745d0, 0.17254902d0, 0.17647059d0,
0.18039216d0, 0.18431373d0
D_CNT2GAINTABLE_4=0.18823529d0, 0.19215686d0, 0.19607843d0, 0.2d0,
0.20392157d0, 0.20784314d0, 0.21176471d0, 0.21568627d0, 0.21960784d0,
0.22352941d0, 0.22745098d0, 0.23137255d0, 0.23529412d0, 0.23921569d0,
0.24313725d0, 0.24705882d0
D_CNT2GAINTABLE_5=0.25098039d0, 0.25490196d0, 0.25882353d0, 0.2627451d0,
0.26666667d0, 0.27058824d0, 0.2745098d0, 0.27843137d0, 0.28235294d0,
0.28627451d0, 0.29019608d0, 0.29411765d0, 0.29803922d0, 0.30196078d0,
0.30588235d0, 0.30980392d0
D_CNT2GAINTABLE_6=0.31372549d0, 0.31764706d0, 0.32156863d0, 0.3254902d0,
0.32941176d0, 0.33333333d0, 0.3372549d0, 0.34117647d0, 0.34509804d0,
0.34901961d0, 0.35294118d0, 0.35686275d0, 0.36078431d0, 0.36470588d0,
0.36862745d0, 0.37254902d0
D_CNT2GAINTABLE_7=0.37647059d0, 0.38039216d0, 0.38431373d0, 0.38823529d0,
0.39215686d0, 0.39607843d0, 0.4d0, 0.40392157d0, 0.40784314d0, 0.41176471d0,
0.41568627d0, 0.41960784d0, 0.42352941d0, 0.42745098d0, 0.43137255d0,
```

```

0.43529412d0
D_CNT2GAINTABLE_8=0.43921569d0, 0.44313725d0, 0.44705882d0, 0.45098039d0,
0.45490196d0, 0.45882353d0, 0.4627451d0, 0.46666667d0, 0.47058824d0,
0.4745098d0, 0.47843137d0, 0.48235294d0, 0.48627451d0, 0.49019608d0,
0.49411765d0, 0.49803922d0
D_CNT2GAINTABLE_9=0.50196078d0, 0.50588235d0, 0.50980392d0, 0.51372549d0,
0.51764706d0, 0.52156863d0, 0.5254902d0, 0.52941176d0, 0.53333333d0,
0.5372549d0, 0.54117647d0, 0.54509804d0, 0.54901961d0, 0.55294118d0,
0.55686275d0, 0.56078431d0
D_CNT2GAINTABLE_10=0.56470588d0, 0.56862745d0, 0.57254902d0, 0.57647059d0,
0.58039216d0, 0.58431373d0, 0.58823529d0, 0.59215686d0, 0.59607843d0, 0.6d0,
0.60392157d0, 0.60784314d0, 0.61176471d0, 0.61568627d0, 0.61960784d0,
0.62352941d0
D_CNT2GAINTABLE_11=0.62745098d0, 0.63137255d0, 0.63529412d0, 0.63921569d0,
0.64313725d0, 0.64705882d0, 0.65098039d0, 0.65490196d0, 0.65882353d0,
0.6627451d0, 0.66666667d0, 0.67058824d0, 0.6745098d0, 0.67843137d0,
0.68235294d0, 0.68627451d0
D_CNT2GAINTABLE_12=0.69019608d0, 0.69411765d0, 0.69803922d0, 0.70196078d0,
0.70588235d0, 0.70980392d0, 0.71372549d0, 0.71764706d0, 0.72156863d0,
0.7254902d0, 0.72941176d0, 0.73333333d0, 0.7372549d0, 0.74117647d0,
0.74509804d0, 0.74901961d0
D_CNT2GAINTABLE_13=0.75294118d0, 0.75686275d0, 0.76078431d0, 0.76470588d0,
0.76862745d0, 0.77254902d0, 0.77647059d0, 0.78039216d0, 0.78431373d0,
0.78823529d0, 0.79215686d0, 0.79607843d0, 0.8d0, 0.80392157d0, 0.80784314d0,
0.81176471d0
D_CNT2GAINTABLE_14=0.81568627d0, 0.81960784d0, 0.82352941d0, 0.82745098d0,
0.83137255d0, 0.83529412d0, 0.83921569d0, 0.84313725d0, 0.84705882d0,
0.85098039d0, 0.85490196d0, 0.85882353d0, 0.8627451d0, 0.86666667d0,
0.87058824d0, 0.8745098d0
D_CNT2GAINTABLE_15=0.87843137d0, 0.88235294d0, 0.88627451d0, 0.89019608d0,
0.89411765d0, 0.89803922d0, 0.90196078d0, 0.90588235d0, 0.90980392d0,
0.91372549d0, 0.91764706d0, 0.92156863d0, 0.9254902d0, 0.92941176d0,
0.93333333d0, 0.9372549d0
D_CNT2GAINTABLE_16=0.94117647d0, 0.94509804d0, 0.94901961d0, 0.95294118d0,
0.95686275d0, 0.96078431d0, 0.96470588d0, 0.96862745d0, 0.97254902d0,
0.97647059d0, 0.98039216d0, 0.98431373d0, 0.98823529d0, 0.99215686d0,
0.99607843d0, 1.0d0
#
# Calibration Coefficients
# cal_tx = (GD_CAL_TX_C_FB * GD_CAL_C_DETID * GD_CAL_C_DIGID) *
# (GD_CAL_C(1) +GD_CAL_C(2)*T_detID +GD_CAL_C(3)*T_detID^2)*
# (GD_CAL_C(4) +GD_CAL_C(5)*T_digID +GD_CAL_C(6)*T_digID^2)*
# (GD_CAL_C(7) +GD_CAL_C(8)*T_relay +GD_CAL_C(9)*T_relay^2)*
# (GD_CAL_C(10)+GD_CAL_C(11)*T_fb +GD_CAL_C(12)*T_fb^2 +GD_CAL_C(13)*T_fb^3)
#
# cal_rec = (GD_CAL_C_DETID * GD_CAL_C_DIGID) *
# (GD_CAL_C(1) +GD_CAL_C(2)*T_detID +GD_CAL_C(3)*T_detID^2)*
# (GD_CAL_C(4) +GD_CAL_C(5)*T_digID +GD_CAL_C(6)*T_digID^2)*
# (GD_CAL_C(7) +GD_CAL_C(8)*T_relay +GD_CAL_C(9)*T_relay^2)
#
# With these values for GD_CAL_C, temps will not affect above values
GD_CAL_C =
1.0d0,0.0d0,0.0d0,1.0d0,0.0d0,0.0d0,1.0d0,0.0d0,0.0d0,1.0d0,0.0d0,0.0d0,0.0d0
#
#
# detector=1, laser=1, 2, 3
#GD_CO_FIBER_BOX1(1:3)=2.965e-14/2.86e-14,2.786e-14/2.86e-14,2.793e-14/2.86e-14
#GD_CO_FIBER_BOX1 = 1.036713287,0.974125874,0.976573426 mantis 1750 LAR050406
GD_CO_FIBER_BOX1 = 1.12d0,1.12d0,1.12d0

```

```
#
# Values are same for detector 2 until sci team gives update
# detector=2, laser=1, 2, 3
#GD_C0_FIBER_BOX2(1:3)=2.965e-14/2.86e-14,2.786e-14/2.86e-14,2.793e-14/2.86e-14
#GD_C0_FIBER_BOX2 = 1.036713287,0.974125874,0.976573426   mantis 1750   LAR050406
GD_C0_FIBER_BOX2 = 1.12d0,1.12d0,1.12d0
#
# Values are same for detector 2 until sci team gives update
# for detectors 1 & 2
#GD_CAL_C0_DETID = 1.21d0,1.21d0 ... changed, mantis 1750   LAR050406
GD_CAL_C0_DETID = 1.0d0,1.0d0
#
# Values are same for digitizer 2 until sci team gives update
# for digitizers 1 & 2
GD_CAL_C0_DIGID = 1.0d0,1.0d0
#
#
GD_N_FOV  = 1.0d0
GD_N_CIRC = 0.923d0
GD_R_DET  = 2.28d7
#
# detector=1, laser=1, 2, 3
GD_N_OPT_REC01 = 0.670d0,0.670d0,0.670d0
#
# Values are same for detector 2 until sci team gives update
# detector=2, laser=1, 2, 3
GD_N_OPT_REC02 = 0.670d0,0.670d0,0.670d0
#
# detector=1, laser=1, 2, 3
GD_N_OPT_TX01 = 2.9650d-14,2.7868d-14,2.7937d-14
#
# (laser=1,detector=2 should not happen)
# detector=2, laser=1, 2, 3
GD_N_OPT_TX02 = 2.9650d-14,2.2572d-14,2.3357d-14
#
# delta lat for DEM grid
#
DEMDLat  = 0.008333333333333d0
#
# delta lon for DEM grid
#
DEMDLon  = 0.008333333333333d0
#
# Start latitude on the DEM grid
#
DEMLAT_BEG = 90.00416666666667d0
#
# Start longitude on the DEM grid
#
DEMLON_BEG = -0.004166666666667d0
#
# The offset from the GPS reference time (00:00 Jan 1, 1980)
# to the UTC reference time (12:00 Jan 1, 2000)
#
GPStoUTCOffset = -630763200.00000
#
# Max PAD offset allowed (max off-nadir pointing angle)
#
MAXPADOFF = 0.5d0
```

```

#
# 1064 Basic time interval - nominally 1 ns
#
gd_dthires = 1.0d0
#
# Threshold for computing the transmit energy from trans pulse peak
#
GD_THRPCNT = 0.03d0
#
# Threshold for computing the received energy from rec waveform peak
#   = noise + GD_THRNSIGR * stdDevNoise
#
GD_THRNSIGR = 4.5d0
#
# Minimum energy - if E is less than this, then it will be stored as 0
#   on gla01. These numbers should be updated if the scale is changed
#   for either i_RecNrgAll_EU, or i_RecNrgLast_EU
#
gd_minRANrg = 0.5d-18
gd_minR1Nrg = 0.5d-18
#
# Icesat/NOSE track offset
#
GI_NOSE_TRACK_OFFSET=2842
#
END_OF_GLOBALS = -----
#
END_OF_ANC07_FILE = -----

```

B.3.2 L1A Constants

```

#
# l1a Constants Mod Entries
#
BEG_OF_L1A = -----
L1A_VERS = ANC07 L1a V6.0 2010-11-03
#
# 1064 transmit energy default to use when computed energy is unavailable
#
GD_IR_TXNRG = 70.0D-3
#
# 532 / 1064 Lower energy threshold (Joules)
#
GD_NRG_THR1 = 0.5D-3
#
# 532 / 1064 Upper energy threshold (Joules)
#
GD_NRG_THR2 = 100.0D-3
#
# 532 energy mJ per count
#
GD_G_NRG_MJ_CT = 0.25d0
#
# Default value for range from satellite to 532 profile (m)
#
GD_RNG2PCPROF = 5.6d5
#
# Lower threshold for range from satellite to 532 profile (m)
#

```

```
GD_RNG2PCPROF1 = 5.0d5
#
# Upper threshold for range from satellite to 532 profile (m)
#
GD_RNG2PCPROF2 = 6.2d5
#
# ground ret threshold
#
GI_GRND_THRESH = 20
#
# cloud ret threshold
#
GI_CLD_THRESH = 5
#
#lidar bin sat val
#
GI_LID_SATVAL = 8
#
# quality flag(1hz) for integrated return
#
GI_INT_QFVAL= 800,600,400,100
#
# 532 laser energy max value
#
GI_G_NRGMAX = 36
#
# 1064 laser energy max value
#
GI_IR_NRGMAX = 73
#
#background index used for 532/1064
#1=upper, 2=lower, 3=(upper+lower)/2, 4=avg of last 8 bins of the profile
#
GI_G_USEDDBG = 1
#
# background index used for 532/1064
#
GI_IR_USEDDBG = 3
#
# Droop flag
#
GI_CORRECT_DROOP=1
#
# GainShift Constants
#
GI_LIM_GAINSHIFT_RNG=4500000
GD_LIM_GAINSHIFT_SEC=0.03d0
#
# GLA04 time latencies
#
GD_GYRO_TIME_LAT = -0.048237d0
GD_BST1_TIME_LAT = 0.0D0
GD_BST2_TIME_LAT = 0.0D0
GD_LRS_TIME_LAT = 0.03274d0
GD_IST_TIME_LAT = 0.032168d0
GD_POS_ATT_TIME_LAT = 0.0000015D0
#
# GLA04 LRS VT Subject Swap Parameters
#
```

```
# X=C, Y=R
#
GD_LIM_VT1CENTR = 850.0d0 920.0d0
GD_LIM_VT1CENTC = 850.0d0 900.0d0
GD_LIM_VT2CENTR = 930.0d0 975.0d0
GD_LIM_VT2CENTC = 1175.0d0 1215.0d0
GD_VAL_VT1CENTR = 830.0d0 950.0d0
GD_VAL_VT1CENTC = 820.0d0 950.0d0
GD_VAL_VT2CENTR = 900.0d0 1060.0d0
GD_VAL_VT2CENTC = 1100.d0 1260.0d0
GD_LIM_VT1NRG = 1500.0d0
GD_LIM_VT2NRG = 75.0d0
GD_LIM_VTC_RATE = 8.0d0
GD_LIM_VTR_RATE = 8.0d0
GD_LIM_VT_SWAP_T = 2.0d0
#
# GLA04 COI Limit
#
GD_IST_COI_LIM = 0.140d0
#
# deadtime correction lookup table - allows for up to 255 entries in the table
#   note : each keyword value can not exceed 255 characters therefore value
#   distributed between several keywords.
#
# DTC for SPCM1
#
D_DTC_TBL1_1=9.7961D-01, 1.0206D+00, 9.8440D-01, 1.0053D+00, 1.0012D+00, 9.9708D-
01, 1.0035D+00, 1.0099D+00, 1.0174D+00, 1.0249D+00, 1.0323D+00, 1.0398D+00,
1.0433D+00, 1.0469D+00, 1.0504D+00, 1.0540D+00, 1.0575D+00, 1.0611D+00,
1.0674D+00, 1.0737D+00
D_DTC_TBL2_1=1.0800D+00, 1.0863D+00, 1.0926D+00, 1.0989D+00, 1.1052D+00,
1.1115D+00, 1.1178D+00, 1.1237D+00, 1.1297D+00, 1.1356D+00, 1.1415D+00,
1.1475D+00, 1.1534D+00, 1.1593D+00, 1.1653D+00, 1.1712D+00, 1.1772D+00,
1.1831D+00, 1.1890D+00, 1.1946D+00
D_DTC_TBL3_1=1.2002D+00, 1.2057D+00, 1.2113D+00, 1.2169D+00, 1.2224D+00,
1.2280D+00, 1.2336D+00, 1.2391D+00, 1.2447D+00, 1.2502D+00, 1.2558D+00,
1.2614D+00, 1.2669D+00, 1.2725D+00, 1.2781D+00, 1.2836D+00, 1.2892D+00,
1.2867D+00, 1.2843D+00, 1.2818D+00
D_DTC_TBL4_1=1.2794D+00, 1.2769D+00, 1.2744D+00, 1.2720D+00, 1.2695D+00,
1.2671D+00, 1.2646D+00, 1.2621D+00, 1.2597D+00, 1.2572D+00, 1.2547D+00,
1.2523D+00, 1.2498D+00, 1.2482D+00, 1.2465D+00, 1.2449D+00, 1.2433D+00,
1.2416D+00, 1.2400D+00, 1.2383D+00
D_DTC_TBL5_1=1.2367D+00, 1.2350D+00, 1.2334D+00, 1.2318D+00, 1.2301D+00,
1.2285D+00, 1.2268D+00, 1.2252D+00, 1.2235D+00, 1.2219D+00, 1.2203D+00,
1.2186D+00, 1.2170D+00, 1.2153D+00, 1.2211D+00, 1.2268D+00, 1.2325D+00,
1.2383D+00, 1.2440D+00, 1.2498D+00
D_DTC_TBL6_1=1.2555D+00, 1.2612D+00, 1.2670D+00, 1.2727D+00, 1.2784D+00,
1.2842D+00, 1.2899D+00, 1.2957D+00, 1.3014D+00, 1.3071D+00, 1.3218D+00,
1.3365D+00, 1.3511D+00, 1.3658D+00, 1.3805D+00, 1.3952D+00, 1.4098D+00,
1.4245D+00, 1.4392D+00, 1.4538D+00
D_DTC_TBL7_1=1.4685D+00, 1.4832D+00, 1.5123D+00, 1.5414D+00, 1.5705D+00,
1.5996D+00, 1.6287D+00, 1.6578D+00, 1.6869D+00, 1.7160D+00, 1.7451D+00,
1.7935D+00, 1.8420D+00, 1.8905D+00, 1.9389D+00, 1.9874D+00, 2.0359D+00,
2.0843D+00, 2.1560D+00, 2.2276D+00
D_DTC_TBL8_1=2.2992D+00, 2.3709D+00, 2.4425D+00, 2.5141D+00, 2.6235D+00,
2.7328D+00, 2.8421D+00, 2.9514D+00, 3.0607D+00, 3.2340D+00, 3.4073D+00,
3.5806D+00, 3.7539D+00, 4.0480D+00, 4.3420D+00, 4.6361D+00, 5.1977D+00,
5.7593D+00, 7.1899D+00, 7.1899D+00
D_DTC_TBL9_1=7.1899D+00, 7.1899D+00, 7.1899D+00, 7.1899D+00, 7.1899D+00,
```

```
7.1899D+00, 7.1899D+00, 7.1899D+00, 7.1899D+00, 7.1899D+00, 7.1899D+00,
7.1899D+00, 7.1899D+00, 7.1899D+00, 7.1899D+00, 7.1899D+00, 7.1899D+00,
7.1899D+00, 7.1899D+00, 7.1899D+00
D_DTC_TBL10_1=7.1899D+00, 7.1899D+00, 7.1899D+00, 7.1899D+00, 7.1899D+00,
7.1899D+00, 7.1899D+00, 7.1899D+00, 7.1899D+00, 7.1899D+00, 7.1899D+00,
7.1899D+00, 7.1899D+00, 7.1899D+00, 7.1899D+00, 7.1899D+00, 7.1899D+00,
7.1899D+00, 7.1899D+00, 7.1899D+00
#
# DCT for SPCM 2
#
D_DTC_TBL1_2=1.0128D+00, 1.0422D+00, 1.0427D+00, 1.0400D+00, 1.0478D+00,
1.0555D+00, 1.0680D+00, 1.0805D+00, 1.0851D+00, 1.0898D+00, 1.0944D+00,
1.0991D+00, 1.1052D+00, 1.1113D+00, 1.1174D+00, 1.1236D+00, 1.1297D+00,
1.1358D+00, 1.1423D+00, 1.1487D+00
D_DTC_TBL2_2=1.1551D+00, 1.1615D+00, 1.1680D+00, 1.1744D+00, 1.1808D+00,
1.1873D+00, 1.1937D+00, 1.2014D+00, 1.2091D+00, 1.2168D+00, 1.2245D+00,
1.2321D+00, 1.2398D+00, 1.2475D+00, 1.2552D+00, 1.2629D+00, 1.2706D+00,
1.2783D+00, 1.2860D+00, 1.2955D+00
D_DTC_TBL3_2=1.3051D+00, 1.3147D+00, 1.3242D+00, 1.3338D+00, 1.3433D+00,
1.3529D+00, 1.3625D+00, 1.3720D+00, 1.3816D+00, 1.3912D+00, 1.4007D+00,
1.4103D+00, 1.4199D+00, 1.4294D+00, 1.4390D+00, 1.4462D+00, 1.4534D+00,
1.4606D+00, 1.4678D+00, 1.4750D+00
D_DTC_TBL4_2=1.4822D+00, 1.4894D+00, 1.4966D+00, 1.5039D+00, 1.5111D+00,
1.5183D+00, 1.5313D+00, 1.5444D+00, 1.5575D+00, 1.5706D+00, 1.5836D+00,
1.5967D+00, 1.6098D+00, 1.6229D+00, 1.6359D+00, 1.6490D+00, 1.6641D+00,
1.6793D+00, 1.6944D+00, 1.7096D+00
D_DTC_TBL5_2=1.7247D+00, 1.7399D+00, 1.7550D+00, 1.7701D+00, 1.7853D+00,
1.8004D+00, 1.8156D+00, 1.8296D+00, 1.8436D+00, 1.8577D+00, 1.8717D+00,
1.8857D+00, 1.8998D+00, 1.9138D+00, 1.9279D+00, 1.9419D+00, 1.9559D+00,
1.9700D+00, 1.9840D+00, 1.9980D+00
D_DTC_TBL6_2=2.0222D+00, 2.0463D+00, 2.0704D+00, 2.0945D+00, 2.1187D+00,
2.1428D+00, 2.1669D+00, 2.1910D+00, 2.2152D+00, 2.2393D+00, 2.2634D+00,
2.2914D+00, 2.3193D+00, 2.3473D+00, 2.3753D+00, 2.4032D+00, 2.4312D+00,
2.4592D+00, 2.4871D+00, 2.5151D+00
D_DTC_TBL7_2=2.5430D+00, 2.5710D+00, 2.6038D+00, 2.6367D+00, 2.6695D+00,
2.7024D+00, 2.7352D+00, 2.7681D+00, 2.8009D+00, 2.8338D+00, 2.8666D+00,
2.8994D+00, 2.9323D+00, 2.9651D+00, 3.0322D+00, 3.0993D+00, 3.1663D+00,
3.2334D+00, 3.3005D+00, 3.3675D+00
D_DTC_TBL8_2=3.4346D+00, 3.5017D+00, 3.5744D+00, 3.6471D+00, 3.7198D+00,
3.7926D+00, 3.8653D+00, 3.9380D+00, 4.0107D+00, 4.0834D+00, 4.1562D+00,
4.3001D+00, 4.4441D+00, 4.5880D+00, 4.7320D+00, 4.8760D+00, 5.0199D+00,
5.2408D+00, 5.4616D+00, 5.6825D+00
D_DTC_TBL9_2=5.9033D+00, 6.1242D+00, 6.1242D+00, 6.1242D+00, 6.1242D+00,
6.1242D+00, 6.1242D+00, 6.1242D+00, 6.1242D+00, 6.1242D+00, 6.1242D+00,
6.1242D+00, 6.1242D+00, 6.1242D+00, 6.1242D+00, 6.1242D+00, 6.1242D+00,
6.1242D+00, 6.1242D+00, 6.1242D+00
D_DTC_TBL10_2=6.1242D+00, 6.1242D+00, 6.1242D+00, 6.1242D+00, 6.1242D+00,
6.1242D+00, 6.1242D+00, 6.1242D+00, 6.1242D+00, 6.1242D+00, 6.1242D+00,
6.1242D+00, 6.1242D+00, 6.1242D+00, 6.1242D+00, 6.1242D+00, 6.1242D+00,
6.1242D+00, 6.1242D+00, 6.1242D+00
#
# DTC for SPCM 5
#
D_DTC_TBL1_5=1.0149D+00, 1.0558D+00, 1.0292D+00, 1.0458D+00, 1.0491D+00,
1.0524D+00, 1.0573D+00, 1.0623D+00, 1.0673D+00, 1.0735D+00, 1.0798D+00,
1.0861D+00, 1.0924D+00, 1.0976D+00, 1.1029D+00, 1.1081D+00, 1.1134D+00,
1.1186D+00, 1.1238D+00, 1.1306D+00
D_DTC_TBL2_5=1.1374D+00, 1.1442D+00, 1.1509D+00, 1.1577D+00, 1.1645D+00,
1.1713D+00, 1.1780D+00, 1.1848D+00, 1.1919D+00, 1.1989D+00, 1.2060D+00,
```

```
1.2130D+00, 1.2201D+00, 1.2271D+00, 1.2342D+00, 1.2412D+00, 1.2483D+00,
1.2553D+00, 1.2624D+00, 1.2695D+00
D_DTC_TBL3_5=1.2765D+00, 1.2847D+00, 1.2929D+00, 1.3011D+00, 1.3093D+00,
1.3175D+00, 1.3257D+00, 1.3339D+00, 1.3421D+00, 1.3503D+00, 1.3585D+00,
1.3667D+00, 1.3749D+00, 1.3831D+00, 1.3913D+00, 1.3995D+00, 1.4077D+00,
1.4159D+00, 1.4275D+00, 1.4391D+00
D_DTC_TBL4_5=1.4508D+00, 1.4624D+00, 1.4740D+00, 1.4857D+00, 1.4973D+00,
1.5089D+00, 1.5206D+00, 1.5299D+00, 1.5392D+00, 1.5486D+00, 1.5579D+00,
1.5673D+00, 1.5766D+00, 1.5859D+00, 1.5953D+00, 1.6046D+00, 1.6139D+00,
1.6233D+00, 1.6326D+00, 1.6454D+00
D_DTC_TBL5_5=1.6582D+00, 1.6709D+00, 1.6837D+00, 1.6965D+00, 1.7093D+00,
1.7220D+00, 1.7348D+00, 1.7476D+00, 1.7603D+00, 1.7731D+00, 1.7859D+00,
1.8042D+00, 1.8225D+00, 1.8408D+00, 1.8591D+00, 1.8775D+00, 1.8978D+00,
1.9141D+00, 1.9324D+00, 1.9507D+00
D_DTC_TBL6_5=1.9690D+00, 1.9873D+00, 2.0035D+00, 2.0197D+00, 2.0359D+00,
2.0521D+00, 2.0683D+00, 2.0845D+00, 2.1007D+00, 2.1169D+00, 2.1331D+00,
2.1492D+00, 2.1654D+00, 2.1816D+00, 2.1978D+00, 2.2140D+00, 2.2441D+00,
2.2741D+00, 2.3042D+00, 2.3343D+00
D_DTC_TBL7_5=2.3643D+00, 2.3944D+00, 2.4245D+00, 2.4545D+00, 2.4846D+00,
2.5147D+00, 2.5447D+00, 2.5807D+00, 2.6167D+00, 2.6528D+00, 2.6888D+00,
2.7248D+00, 2.7608D+00, 2.7968D+00, 2.8328D+00, 2.8688D+00, 2.9048D+00,
2.9408D+00, 2.9908D+00, 3.0409D+00
D_DTC_TBL8_5=3.0909D+00, 3.1410D+00, 3.1910D+00, 3.2411D+00, 3.2911D+00,
3.3412D+00, 3.3912D+00, 3.4413D+00, 3.5254D+00, 3.6096D+00, 3.6938D+00,
3.7780D+00, 3.8622D+00, 3.9464D+00, 4.0305D+00, 4.1147D+00, 4.2346D+00,
4.3545D+00, 4.4744D+00, 4.5943D+00
D_DTC_TBL9_5=4.7142D+00, 4.8341D+00, 4.9540D+00, 5.1730D+00, 5.3919D+00,
5.6109D+00, 5.8299D+00, 6.0488D+00, 6.3980D+00, 6.7471D+00, 7.0962D+00,
7.4454D+00, 7.4454D+00, 7.4454D+00, 7.4454D+00, 7.4454D+00, 7.4454D+00,
7.4454D+00, 7.4454D+00, 7.4454D+00
D_DTC_TBL10_5=7.4454D+00, 7.4454D+00, 7.4454D+00, 7.4454D+00, 7.4454D+00,
7.4454D+00, 7.4454D+00, 7.4454D+00, 7.4454D+00, 7.4454D+00, 7.4454D+00,
7.4454D+00, 7.4454D+00, 7.4454D+00
#
# DTC for SPCM 6
#
D_DTC_TBL1_6=1.0085D+00, 1.0468D+00, 1.0075D+00, 1.0343D+00, 1.0358D+00,
1.0374D+00, 1.0402D+00, 1.0431D+00, 1.0459D+00, 1.0533D+00, 1.0607D+00,
1.0681D+00, 1.0755D+00, 1.0785D+00, 1.0815D+00, 1.0845D+00, 1.0874D+00,
1.0904D+00, 1.0934D+00, 1.0985D+00
D_DTC_TBL2_6=1.1035D+00, 1.1086D+00, 1.1136D+00, 1.1187D+00, 1.1237D+00,
1.1288D+00, 1.1338D+00, 1.1389D+00, 1.1439D+00, 1.1505D+00, 1.1570D+00,
1.1636D+00, 1.1701D+00, 1.1767D+00, 1.1832D+00, 1.1898D+00, 1.1963D+00,
1.2029D+00, 1.2095D+00, 1.2160D+00
D_DTC_TBL3_6=1.2226D+00, 1.2291D+00, 1.2358D+00, 1.2424D+00, 1.2491D+00,
1.2557D+00, 1.2624D+00, 1.2690D+00, 1.2757D+00, 1.2824D+00, 1.2890D+00,
1.2957D+00, 1.3023D+00, 1.3090D+00, 1.3156D+00, 1.3223D+00, 1.3289D+00,
1.3356D+00, 1.3422D+00, 1.3489D+00
D_DTC_TBL4_6=1.3591D+00, 1.3692D+00, 1.3793D+00, 1.3895D+00, 1.3996D+00,
1.4098D+00, 1.4199D+00, 1.4301D+00, 1.4402D+00, 1.4504D+00, 1.4610D+00,
1.4717D+00, 1.4824D+00, 1.4930D+00, 1.5037D+00, 1.5144D+00, 1.5251D+00,
1.5357D+00, 1.5464D+00, 1.5571D+00
D_DTC_TBL5_6=1.5677D+00, 1.5787D+00, 1.5897D+00, 1.6006D+00, 1.6116D+00,
1.6226D+00, 1.6335D+00, 1.6445D+00, 1.6555D+00, 1.6665D+00, 1.6774D+00,
1.6884D+00, 1.6994D+00, 1.7103D+00, 1.7286D+00, 1.7469D+00, 1.7652D+00,
1.7835D+00, 1.8017D+00, 1.8200D+00
D_DTC_TBL6_6=1.8383D+00, 1.8566D+00, 1.8749D+00, 1.8931D+00, 1.9114D+00,
1.9324D+00, 1.9533D+00, 1.9742D+00, 1.9952D+00, 2.0161D+00, 2.0370D+00,
```

```
2.0579D+00, 2.0789D+00, 2.0998D+00, 2.1207D+00, 2.1417D+00, 2.1626D+00,
2.1886D+00, 2.2147D+00, 2.2407D+00
D_DTC_TBL7_6=2.2668D+00, 2.2928D+00, 2.3189D+00, 2.3449D+00, 2.3709D+00,
2.3970D+00, 2.4230D+00, 2.4491D+00, 2.4751D+00, 2.5106D+00, 2.5461D+00,
2.5816D+00, 2.6172D+00, 2.6527D+00, 2.6882D+00, 2.7237D+00, 2.7592D+00,
2.7947D+00, 2.8302D+00, 2.8657D+00
D_DTC_TBL8_6=2.9087D+00, 2.9516D+00, 2.9946D+00, 3.0375D+00, 3.0804D+00,
3.1234D+00, 3.1663D+00, 3.2093D+00, 3.2522D+00, 3.2951D+00, 3.3381D+00,
3.4075D+00, 3.4769D+00, 3.5462D+00, 3.6156D+00, 3.6850D+00, 3.7544D+00,
3.8238D+00, 3.8932D+00, 3.9626D+00
D_DTC_TBL9_6=4.0605D+00, 4.1583D+00, 4.2562D+00, 4.3541D+00, 4.4520D+00,
4.5498D+00, 4.6477D+00, 4.7456D+00, 4.9153D+00, 5.0850D+00, 5.2547D+00,
5.4244D+00, 5.5941D+00, 5.7638D+00, 6.0264D+00, 6.2890D+00, 6.5516D+00,
6.8142D+00, 7.0768D+00, 7.0768D+00
D_DTC_TBL10_6=7.0768D+00, 7.0768D+00, 7.0768D+00, 7.0768D+00, 7.0768D+00,
7.0768D+00, 7.0768D+00, 7.0768D+00, 7.0768D+00, 7.0768D+00, 7.0768D+00,
7.0768D+00, 7.0768D+00, 7.0768D+00, 7.0768D+00, 7.0768D+00, 7.0768D+00,
7.0768D+00, 7.0768D+00, 7.0768D+00
#
# DTC for SPCM 8
#
D_DTC_TBL1_8=9.6968D-01, 9.9754D-01, 1.0047D+00, 1.0102D+00, 1.0177D+00,
1.0217D+00, 1.0257D+00, 1.0297D+00, 1.0382D+00, 1.0467D+00, 1.0551D+00,
1.0591D+00, 1.0630D+00, 1.0669D+00, 1.0708D+00, 1.0748D+00, 1.0787D+00,
1.0849D+00, 1.0910D+00, 1.0972D+00
D_DTC_TBL2_8=1.1034D+00, 1.1096D+00, 1.1157D+00, 1.1219D+00, 1.1281D+00,
1.1341D+00, 1.1402D+00, 1.1462D+00, 1.1523D+00, 1.1583D+00, 1.1643D+00,
1.1704D+00, 1.1764D+00, 1.1825D+00, 1.1885D+00, 1.1946D+00, 1.2006D+00,
1.2085D+00, 1.2164D+00, 1.2242D+00
D_DTC_TBL3_8=1.2321D+00, 1.2400D+00, 1.2479D+00, 1.2557D+00, 1.2636D+00,
1.2715D+00, 1.2794D+00, 1.2873D+00, 1.2951D+00, 1.3030D+00, 1.3109D+00,
1.3188D+00, 1.3285D+00, 1.3383D+00, 1.3480D+00, 1.3578D+00, 1.3675D+00,
1.3772D+00, 1.3870D+00, 1.3967D+00
D_DTC_TBL4_8=1.4065D+00, 1.4150D+00, 1.4236D+00, 1.4321D+00, 1.4407D+00,
1.4492D+00, 1.4577D+00, 1.4663D+00, 1.4748D+00, 1.4834D+00, 1.4919D+00,
1.5005D+00, 1.5045D+00, 1.5085D+00, 1.5125D+00, 1.5165D+00, 1.5205D+00,
1.5245D+00, 1.5285D+00, 1.5325D+00
D_DTC_TBL5_8=1.5365D+00, 1.5405D+00, 1.5445D+00, 1.5485D+00, 1.5525D+00,
1.5565D+00, 1.5605D+00, 1.5657D+00, 1.5708D+00, 1.5760D+00, 1.5811D+00,
1.5862D+00, 1.5914D+00, 1.5965D+00, 1.6017D+00, 1.6068D+00, 1.6120D+00,
1.6171D+00, 1.6222D+00, 1.6274D+00
D_DTC_TBL6_8=1.6325D+00, 1.6377D+00, 1.6428D+00, 1.6479D+00, 1.6683D+00,
1.6886D+00, 1.7089D+00, 1.7293D+00, 1.7496D+00, 1.7699D+00, 1.7902D+00,
1.8106D+00, 1.8309D+00, 1.8512D+00, 1.8716D+00, 1.8911D+00, 1.9106D+00,
1.9302D+00, 1.9497D+00, 1.9693D+00
D_DTC_TBL7_8=1.9888D+00, 2.0083D+00, 2.0279D+00, 2.0474D+00, 2.0669D+00,
2.0865D+00, 2.1060D+00, 2.1256D+00, 2.1727D+00, 2.2198D+00, 2.2669D+00,
2.3140D+00, 2.3611D+00, 2.4082D+00, 2.4553D+00, 2.5024D+00, 2.5611D+00,
2.6198D+00, 2.6785D+00, 2.7372D+00
D_DTC_TBL8_8=2.7959D+00, 2.8546D+00, 2.9133D+00, 2.9720D+00, 3.0585D+00,
3.1450D+00, 3.2315D+00, 3.3179D+00, 3.4044D+00, 3.4909D+00, 3.5774D+00,
3.7318D+00, 3.8862D+00, 4.0406D+00, 4.1950D+00, 4.3494D+00, 4.5461D+00,
4.7427D+00, 4.9394D+00, 5.1360D+00
D_DTC_TBL9_8=5.3326D+00, 5.9654D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00,
6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00,
6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00,
6.5982D+00, 6.5982D+00, 6.5982D+00
D_DTC_TBL10_8=6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00,
6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00,
6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00,
6.5982D+00, 6.5982D+00, 6.5982D+00
```

```
6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00, 6.5982D+00,
6.5982D+00, 6.5982D+00, 6.5982D+00
#
# Maximum LIDAR value for 532 nm
#
gD_G_MAXLID = 200.0d0
#
# digital to analog convrsn lookup table
#
D_D2A_TBL1=0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20
D_D2A_TBL2=21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38,
39, 40, 41
D_D2A_TBL3=42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59,
60, 61, 62
D_D2A_TBL4=63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80,
81, 82, 83
D_D2A_TBL5=84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100,
101, 102, 103
D_D2A_TBL6=104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117,
118, 119, 120
D_D2A_TBL7=121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134,
135, 136, 137
D_D2A_TBL8=138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151,
152, 153, 154
D_D2A_TBL9=155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168,
169, 170, 171
D_D2A_TBL10=172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185,
186, 187, 188
D_D2A_TBL11=189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202,
203, 204, 205
D_D2A_TBL12=206, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218,
219, 220, 221
D_D2A_TBL13=222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235,
236, 237, 238
D_D2A_TBL14=239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252,
253, 254, 255
#
# L_Alt TX Flag upper Limit and Lower Limit
#
GI_TXLWLIM_FLG = 195
GI_TXUPLIM_FLG = 205
#
# Maximum LIDAR value for 1064 nm
#
GD_IR_MAXLID = 500.0d0
#
# L_Eng constants
#
GD_AP21_CONST1 = 9.22D0
GD_AP21_CONST2 = 10.0D0
GD_AP21_CONST3 = 1.52D0
GD_AP21_CONST4 = 4.0D0
GD_AP21_CONST5 = 0.408D0
GD_AP21_CONST6 = 2.0D0
GD_AP21_CONST7 = 0.41D0
GD_AP21_CONST8 = 3.0D0
GD_AP21_CONST9 = 0.407D0
GD_AP21_CONST10 = 9.2D0
GD_AP21_CONST11 = 8.0D0
```

```
GD_AP21_CONST12 = 1.25D0
GD_AP21_CONST13 = 9.25D0
GD_AP21_CONST14 = 13.0D0
GD_AP21_CONST15 = 1.514D0
GD_AP21_CONST16 = 1.91D0
GD_AP21_CONST17 = 3.52D0
GD_AP21_CONST18 = 0.66D0
GD_AP21_CONST19 = -3.515D0
GD_AP21_CONST20 = 0.63D0
GD_AP21_CONST21 = 1.515D0
GD_AP21_CONST22 = -1.532D0
GD_AP21_CONST23 = 1.49D0
GD_AP21_CONST24 = -1.52D0
GD_AP21_CONST25 = 2.05D0
GD_AP21_CONST26 = 4.05D0
GD_AP21_CONST27 = -4.028D0
GD_AP21_CONST28 = 0.054D0
GD_AP21_CONST29 = 7.0D0
GD_AP21_CONST30 = 0.052D0
GD_AP21_CONST31 = 5.0D0
GD_AP21_CONST32 = 30.0D0
GD_AP21_CONST33 = 30.2D0
#
# L_ENG COEF ARRAYS
#
GD_LSROSCA_COEF = 1.898D0
GD_LSROSCB_COEF = 0.4878D0
GD_LSROSCC_COEF = -1.406D-2
GD_LSRAMPA_COEF = 2.062D0
GD_LSRAMPB_COEF = 0.4865D0
GD_LSRAMPC_COEF = -1.406D-2
GD_LSRDR_COEF = 131.08D0,0.512D0
GD_ADDETGN_COEF = -1D0,0.0078125D0
GD_DPINA1_COEF = 0.5609D0
GD_DPINA2_COEF = 0.3823D0
GD_DPINA3_COEF = 3.848D-5
GD_DPINA4_COEF = -5.737D-3
GD_DPINB1_COEF = 1.108D0
GD_DPINB2_COEF = 0.4143D0
GD_DPINB3_COEF = 8.671D-5
GD_DPINB4_COEF = -1.159D-3
GD_532NRG1_COEF = -0.969D0
GD_532NRG2_COEF = 0.4095D0
GD_532NRG3_COEF = -6.601D-5
GD_532NRG4_COEF = 8.765D-3
GD_SPCM_COEF = 0.0D0,3.581D0
GD_INTTMP1_COEF = -50.0D0,0.781D0
GD_INTTMP2_COEF = 9.0D0,0.031D0
GD_VC_COEF = -100.0D0,0.048828125D0
GD_XY_COEF = -10.0D0,0.0048828125D0
GD_AP20_1_COEF = -33.84D0,5.368D-1,-1.622D-3,3.155D-6
GD_AP20_2_COEF = 20.84D0,1.032D-1,-2.879D-5,1.446D-7
GD_AP21_1_COEF = 0.0D0,0.026D0
GD_AP21_2_COEF = 0.0D0,0.052D0
GD_AP22_1_COEF = -20.4D0,0.3984D0
GD_AP22_2_COEF = -23.5D0,0.3984D0
GD_AP22_3_COEF = -21.6D0,0.3984D0
GD_AP22_4_COEF = -21.0D0,0.3984D0
GD_AP22_5_COEF = -20.7D0,0.3984D0
```

```
GD_AP22_6_COEF = -18.113D0,0.3083D0
GD_AP22_7_COEF = 0D0,0.2949D0
GD_AP23_1_COEF = -1456.13D0,0.5664055703D0
GD_AP23_2_COEF = -2.0D0,976.5625D-6
GD_AP23_3_COEF = 0.1586D0,0.1027D0,-4.2353D-05,3.833D-07
GD_AP23_4_COEF = 0.14D0,0.104D0,-5.962D-05,4.304D-07
GD_AP23_5_COEF = 0.1392D0,0.104D0,-5.962D-05,4.304D-07
GD_AP23_6_COEF = 29.27D0,0.09251D0,9.919D-06,1.022D-07
GD_AP23_7_COEF = 0.02609D0,0.1173D0,-6.871D-05,2.629D-07
GD_AP23_8_COEF = -7.696D0,0.11D0,-5.1D-05,2.007D-07
GD_AP50_OTS_COEF = 0.0D0,0.256D0
GD_AP50_1_COEF = 40D0,-0.15625D0
GD_AP50_2_COEF = 0.1586D0,0.1027D0,-4.253D-05,3.833D-07
GD_AP50_3_COEF = 0.02506D0,0.1051D0,-6.469D-05,4.376D-07
GD_AP50_4_COEF = 0.1392D0,0.104D0,-5.962D-05,4.304D-07
GD_AP50_5_COEF = 29.27D0,0.09251D0,9.919D-06,1.022D-07
GD_AP50_6_COEF = 0.02609D0,0.1173D0,-6.871D-05,2.629D-07
GD_AP50_7_COEF = -7.696D0,0.11D0,-5.1D-05,2.007D-07
GD_AP50_8_COEF = 0.0008D0,0.003678D0
GD_AP50_9_COEF = -0.0008D0,0.003113D0
GD_AP50_10_COEF = 0.0008D0,0.00311D0
GD_AP50_11_COEF = 1.35D-3,0.003468D0
GD_AP50_12_COEF = -33.84D0,0.5368D0,-1.622D-3,3.155D-6
GD_AP50_13_COEF = -2.406D0,0.06459D0,-7.58D-6,5.591D-8
GD_AP50_14_COEF = 13.33D0,0.06518D0,-5.261D-6,4.076D-8
GD_AP25_1_COEF = 0.0D0,0.125D0
GD_AP55_1_COEF = 0.0D0,0.128D0
#
# Psuedo Telemetry eq. constants
#
PSETLM_F0_N = -273.15D0
PSETLM_F1_N = 1.0185D-3
PSETLM_F2_N = 2.4090D-4
PSETLM_F3_N = 1.4990D-7
PSETTEMP1_N = 5.0D0
PSETTEMP2_N = 7.5D0
PSETTEMP1_D = 255.0D0
PSETTEMP2_D = 7680.0D0
PSETTEMP1 = 0.0D0
PSETTEMP2 = 0.0D0
#####
# L_Eng Nominal On-Orbit Operations Limits
# Due to volume of limits they are formatted as
# d0 rather than .0d0
#####
# AP20 Red Low, Yellow Low, Yellow High, Red High
#####
GD_LMB1REF_T_LIM = 9d0,10d0,30d0,35d0
GD_LSR1DBLR_T_LIM = 10d0,35d0,45d0,55d0
GD_LSR1OSC_T_LIM = 10d0,15d0,34.5d0,35d0
GD_L1ELEC_T_LIM = 0d0,4d0,34d0,40d0
GD_LSROSC_C_LIM = 0d0,82d0,95d0,96d0
GD_LSRAMP_C_LIM = 0d0,96d0,102d0,102.5d0
GD_LSRDR_PW_LIM = 0d0,185d0,215d0,220d0
GD_LMB2REF_T_LIM = 9d0,10d0,30d0,35d0
GD_LSR2DBLR_T_LIM = 10d0,35d0,45d0,55d0
GD_LSR2OSC_T_LIM = 10d0,15d0,34.5d0,35d0
GD_L2ELEC_T_LIM = 0d0,4d0,34d0,40d0
GD_LMB3REF_T_LIM = 9d0,10d0,30d0,35d0
```

```
GD_LSR3DBLR_T_LIM = 10d0,35d0,45d0,55d0
GD_LSR3OSC_T_LIM = 10d0,15d0,34.5d0,35d0
GD_L3ELEC_T_LIM = 0d0,4d0,34d0,40d0
GD_DPINA_LIM = -1d0,0d0,100d0,250d0
GD_DPINB_LIM = -1d0,0d0,100d0,250d0
GD_G_NRG_LIM = -2d0,-1d0,70d0,72d0
GD_PRIMAD550V_LIM = -20d0,422d0,578d0,607d0
GD_SECAD550V_LIM = -30d0,-20d0,20d0,422d0
GD_SPCM1_550V_LIM = -20d0,510d0,578d0,607d0
GD_SPCM2_550V_LIM = -20d0,510d0,578d0,607d0
GD_SPCM3_550V_LIM = -30d0,-20d0,20d0,30d0
GD_SPCM4_550V_LIM = -30d0,-20d0,20d0,30d0
GD_SPCM5_550V_LIM = -20d0,525d0,578d0,607d0
GD_SPCM6_550V_LIM = -20d0,505d0,578d0,607d0
GD_SPCM7_550V_LIM = -30d0,-20d0,20d0,30d0
GD_SPCM8_550V_LIM = -20d0,505d0,578d0,607d0
GD_INT1_T_LIM = -18d0,-10d0,70d0,80d0
GD_CT_PRAIL_V_LIM = 10d0,11d0,13d0,14d0
GD_INT3_T_LIM = -18d0,-10d0,70d0,80d0
GD_VCXMTTR_C_LIM = -40d0,-30d0,30d0,40d0
GD_VCYMTTR_C_LIM = -40d0,-30d0,30d0,40d0
GD_XPOS_LIM = -4.1d0,-3.5d0,3.5d0,4.1d0
GD_YPOS_LIM = -4.1d0,-3.5d0,3.5d0,4.1d0
#####
# AP21 Red Low, Yellow Low, Yellow High, Red High
#####
GD_BUSAINST_28V_LIM = 24d0,25d0,35.1d0,35.5d0
GD_HBSUPP_C_LIM = -2d0,-1d0,4d0,4.5d0
GD_HVPSDETSUP_C_LIM = -2d0,-1d0,1.4d0,1.6d0
GD_OPHTR_C_LIM = -2d0,-1d0,3.1d0,3.3d0
GD_MECHSYS_C_LIM = -2d0,-1d0,1.1d0,1.5d0
GD_BUSBL1_V_LIM = -1d0,24.3d0,34.7d0,35d0
GD_BUSBL1_C_LIM = -3.5d0,3.3d0,5d0,5.5d0
GD_BUSCL2_V_LIM = -1d0,24.3d0,34.7d0,35d0
GD_BUSCL2_C_LIM = -3.5d0,3.3d0,5d0,5.5d0
GD_BUSDL3_V_LIM = -1d0,24.3d0,34.7d0,35d0
GD_BUSDL3_C_LIM = -3.5d0,3.3d0,5d0,5.5d0
GD_5VHB1_V_LIM = 4.8d0,4.9d0,5.3d0,5.4d0
GD_5VHB1_C_LIM = -2d0,-1d0,3.5d0,4d0
GD_12VHB2_V_LIM = 11.7d0,11.8d0,12.4d0,12.5d0
GD_12VHB2_C_LIM = -2d0,-1d0,1.5d0,2d0
GD_N12VHB3_V_LIM = -12.5d0,-12.4d0,-11.8d0,-11.7d0
GD_N12VHB3_C_LIM = -2d0,-1d0,1.5d0,2d0
GD_5VHB4_V_LIM = 4.8d0,4.9d0,5.3d0,5.4d0
GD_5VHB4_C_LIM = -2d0,-1d0,6.5d0,7d0
GD_N5VHB5_V_LIM = -5.3d0,-5.2d0,-4.9d0,-4.8d0
GD_N5VHB5_C_LIM = -2d0,-1d0,2.2d0,3d0
GD_N5VHB6_V_LIM = -5.6d0,-5.5d0,-5.1d0,-5d0
GD_N5VHB6_C_LIM = -2d0,-1d0,5d0,6d0
GD_15VBPR_V_LIM = 14.6d0,14.7d0,15.3d0,15.4d0
GD_N15VBPR_V_LIM = -15.4d0,-15.3d0,-14.6d0,-14.5d0
GD_12VPOSCTC_C_LIM = -0.25d0,-0.24d0,0.24d0,0.25d0
GD_12VSOSCTC_C_LIM = -0.25d0,-0.24d0,0.24d0,0.25d0
GD_N2VDV_V_LIM = -2.5d0,-2.4d0,-1.7d0,-1.6d0
GD_HBHS_T_LIM = -18d0,-10d0,70d0,80d0
GD_FETSBHS_T_LIM = -18d0,-10d0,70d0,80d0
GD_0VHVPSREF_V_LIM = -0.5d0,-0.25d0,0.104d0,0.26d0
GD_5VHVPSREF_V_LIM = 4.74d0,4.844d0,5.156d0,5.26d0
#####
```

```
# AP22 Red Low, Yellow Low, Yellow High, Red High
#####
GD_HKBDC0_T_LIM = -18d0,-10d0,55d0,65d0
GD_IPSBDC1_T_LIM = -18d0,-10d0,55d0,65d0
GD_PCBDC2_T_LIM = -18d0,-10d0,55d0,65d0
GD_CDFTBDC3_T_LIM = -18d0,-10d0,55d0,65d0
GD_AD1DSPC4_T_LIM = -18d0,-10d0,60d0,70d0
GD_AD2DSPC5_T_LIM = -18d0,-17d0,60d0,70d0
GD_DCHBDC6_T_LIM = -18d0,-10d0,55d0,65d0
GD_LMBDC7_T_LIM = -18d0,-10d0,55d0,65d0
GD_OXC01BDC9_T_LIM = -18d0,-10d0,55d0,65d0
GD_OXC02BDC10_T_LIM = -18d0,-10d0,55d0,65d0
GD_OSCBDC11_T_LIM = -18d0,-10d0,55d0,65d0
GD_OTSBDC12_T_LIM = -18d0,-10d0,55d0,65d0
GD_LPAC13_T1_LIM = -18d0,-10d0,45d0,46d0
GD_LPAC14_T2_LIM = -18d0,-10d0,45d0,46d0
GD_AD1ECLAC15_T_LIM = -18d0,-10d0,60d0,78d0
GD_AD2ECLAC16_T_LIM = -18d0,-17d0,60d0,78d0
GD_AD1ECLBC17_T_LIM = -18d0,-10d0,60d0,78d0
GD_AD2ECLBC18_T_LIM = -18d0,-17d0,60d0,78d0
GD_AD1ADCC19_T_LIM = -18d0,-10d0,60d0,78d0
GD_AD2ADCC20_T_LIM = -18d0,-17d0,60d0,78d0
GD_LID_BOX_T_LIM = -28d0,-25d0,31d0,41d0
GD_PRTTELMTC22T_LIM = -68d0,-40d0,30d0,40d0
GD_PRTTELBFC23T_LIM = -68d0,-40d0,30d0,40d0
GD_PRTAD1C24_T_LIM = -13.5d0,-8d0,30d0,40d0
GD_PRTAD2C25_T_LIM = -18d0,-13.5d0,30d0,40d0
GDF1LTRSRSC26_T_LIM = -17d0,-12d0,29d0,37d0
GDF2LTRSRSC27_T_LIM = -17d0,-12d0,29d0,37d0
GD_SRS_FF_OPTIO_T_LIM = -33d0,-30d0,31d0,39d0
GD_PRTFBOXC29_T_LIM = -28d0,-25d0,31d0,39d0
GD_F1FABC30_T_LIM = -17d0,-12d0,25d0,33d0
GD_F2FABC31_T_LIM = -17d0,-12d0,25d0,33d0
GDF1LTRCRSC32_T_LIM = -11d0,-6d0,31d0,39d0
GDF2LTRCRSC33_T_LIM = -11d0,-6d0,31d0,39d0
GD_SRSPARC34_T_LIM = -33d0,-28d0,31d0,39d0
GD_PRTCALLC35_T_LIM = -5.5d0,-2.1d0,-0.9d0,2.5d0
GD_PRTCALHC36_T_LIM = 41.7d0,45.1d0,46.3d0,49.7d0
GD_PDBIASC38_V_LIM = 17d0,45d0,47d0,57d0
GDAD1HSRAMC39_T_LIM = -33d0,-28d0,60d0,78d0
GD_TCMBDC8_T_LIM = -18.0d0,-10.0d0,55.0d0,65.0d0
#####
# AP23 Red Low, Yellow Low, Yellow High, Red High
#####
GD_LSM1_T_LIM = -30d0,-25d0,55d0,85d0
GD_LSM2_T_LIM = -30d0,-25d0,55d0,85d0
GD_ADSM_T_LIM = -30d0,-25d0,85d0,90d0
GD_LBSME_T_LIM = -30d0,-25d0,35d0,40d0
GD_LBSMM_T_LIM = -30d0,-25d0,25d0,30d0
GD_HOP1ACTH1_C_LIM = -0.01d0,-0.005d0,0.005d0,0.01d0
GD_HOP1ACTH2_C_LIM = -0.01d0,-0.005d0,0.005d0,0.01d0
GD_HOP2ACTH1_C_LIM = -0.01d0,-0.005d0,0.005d0,0.01d0
GD_HOP2ACTH2_C_LIM = -0.01d0,-0.005d0,0.005d0,0.01d0
GD_HOP3ACTH1_C_LIM = -0.01d0,-0.005d0,0.005d0,0.01d0
GD_HOP3ACTH2_C_LIM = -0.01d0,-0.005d0,0.005d0,0.01d0
#####
# AP50 Red Low, Yellow Low, Yellow High, Red High
#####
GD_TSPMIR_T_LIM = -15d0,-5d0,25d0,30d0
```

```
GD_TSTWR_T_LIM = -15d0,-5d0,25d0,30d0
GD_ETC37D_T_LIM = 18d0,29d0,55d0,59d0
GD_LHP1C37E_T_LIM = -2d0,0d0,30d0,32d0
GD_LHP2C37F_T_LIM = -10d0,-8d0,22d0,24d0
GD_TSPMIRHDR_C_LIM = -0.2d0,-0.1d0,0.61d0,0.62d0
GD_TSTWRHDR_C_LIM = -0.2d0,-0.1d0,0.59d0,0.63d0
GD_ETHTRC37J_C_LIM = -0.2d0,-0.1d0,0.4d0,0.5d0
GD_DLYLINEALL_T_LIM = -12d0,-5d0,30d0,33d0
GD_DLYLINEMID_T_LIM = -12d0,-2.5d0,14.5d0,33d0
GD_DLYLINEHI_T_LIM = -12d0,13.3d0,30d0,33d0
#####
# Constant for Delay Waveform Offset (30 counts)
# Used in QAP03
#####
GI_DC_OFFSET = 30
#
# 28V Bus A Instrument (Volts)
#
GD_BA28INST_SF = 0.0d0, 9.22d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# Hybrid Supplies (Amps)
#
GD_HYBSUPP_SF = 0.0d0, 1.9d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# HVPS Detector Supplies(Amps)
#
GD_HVPSDET_SF = 0.0d0, 0.405d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# Operational Heaters (Amps)
#
GD_OPHTRS_SF = 0.0d0, 0.395d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# Mechanical System (Amps)
#
GD_MECHSYS_SF = 0.0d0, 0.395d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# 28V Bus B Laser 1 (Volts)
#
GD_BB28L1V_SF = 0.0d0, 9.35d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# 28V Bus B Laser 1 (Amps)
#
GD_BB28L1A_SF = 0.0d0, 1.551d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# 28V Bus C Laser 2 (Volts)
#
GD_BC28L2V_SF = 0.0d0, 9.35d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# 28V Bus C Laser 2 (Amps)
#
GD_BC28L2A_SF = 0.0d0, 1.511d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# 28V Bus D Laser 3 (Volts)
#
GD_BD28L3V_SF = 0.0d0, 9.35d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# 28V Bus D Laser 3 (Amps)
#
GD_BD28L3A_SF = 0.0d0, 1.555d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
```

```
#
# 5V Hybrid #1 (Volts)
#
GD_5VHYB1V_SF = 0.0d0, 1.54d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# 5V Hybrid #1 (Amps)
#
GD_5VHYB1A_SF = 0.0d0, 1.91d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# 12V Hybrid #2 (Volts)
#
GD_12VHYB2V_SF = 0.0d0, 3.52d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# 12V Hybrid #2 (Amps)
#
GD_12VHYB2A_SF = 0.0d0, 0.66d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# m12V Hybrid #3 (Volts)
#
GD_M12VHYB3V_SF = 0.0d0, -3.52d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# m12V Hybrid #3 (Amps)
#
GD_M12VHYB3A_SF = 0.0d0, 0.63d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# 5V Hybrid #4 (Volts)
#
GD_5VHYB4V_SF = 0.0d0, 1.532d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# 5V Hybrid #4 (Amps)
#
GD_5VHYB4A_SF = 0.0d0, 1.91d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# m5V Hybrid #5 (Volts)
#
GD_M5VHYB5V_SF = 0.0d0, -1.532d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# m5V Hybrid #5 (Amps)
#
GD_M5VHYB5A_SF = 0.0d0, 1.91d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# m5V Hybrid #6 (Volts)
#
GD_M5VHYB6V_SF = 0.0d0, -1.532d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# m5V Hybrid #6 (Amps)
#
GD_M5VHYB6A_SF = 0.0d0, 1.95d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# 15V Boost Post Reg (Volts)
#
GD_15VBPR_SF = 0.0d0, 4.08d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# m15V Boost Post Reg (Volts)
#
GD_M15VBPR_SF = 0.0d0, -4.09d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# 12V Prim Osc Thermal Control (Amps)
#
```

```
GD_12VPOTC_SF = 0.0d0, 0.04d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# 12V Sec Osc Thermal Control (Amps)
#
GD_12VSOTC_SF = 0.0d0, 0.04d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# m2V Discrete Voltage (Volts)
#
GD_M2VDV_SF = 0.0d0, 2.0d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# Hybrid Heatsink (deg C)
#
GD_HBHS_SF = 0.0d0, 30.2d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# FET Switch Bank Heatsink (deg C)
#
GD_FETSBHS_SF = 0.0d0, 30.2d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# HVPS 0V Reference (Volts)
#
GD_HVPS0VR_SF = 0.0d0, 0.0195d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# HVPS 5V Reference (Volts)
#
GD_HVPS5VR_SF = 0.0d0, 0.0391d0, 0.0d0, 0.0d0, 0.0d0, 0.0d0
#
# Number of bad lidar values within profile that will generate error
#
gi_bad_lid_num = 100
#
# Number of bins to average over for background(4)
#
gi_bg_bin = 8
#
# 1064 amplifier gain
#
gd_ir_gain = 18.0d0
#
# 1064 volts per count conversion (Volts/cnt)
#
gd_volts_cnt = 0.01560d0
#
# 1064 voltage offset
#
gd_volt_offset = 0.840d0
#
# 1064 detector responsivity factor (Volts/Watt)
#
gd_det_res_ftr = 4.4d7
## ----- moved to const_glob_mod LAR030617
## 1064 Basic time interval - nominally 1 ns
##
##d_dthires = 1.0d0
##
## Threshold for computing the received and transmit energy from waveform peak
##
##d_thrpcnt = 0.03d0
#
# PRAP Siru Time Tag
```

```
#
gd_siru_ttag= 0.0d0, 64.0d0
#
# PRAP Siru Integrated Angles
#
gd_siru_ia= 0.0d0, 0.05d0
#
# PRAP Star Tracker #1 Data Latency
#
gd_bst1_datalat = 0.0d0, 0.064d0
#
# PRAP Star Tracker #1 Position X
#
gd_bst1_posx = 0.0d0, 0.5d0
#
# PRAP Star Tracker #1 Position Y
#
gd_bst1_posy = 0.0d0, 0.5d0
#
# PRAP Star Tracker #1 Intensity
#
gd_bst1_starint = 0.0d0, 0.0625d0
#
# PRAP Star Tracker #1 CCD Temperature
#
gd_bst1_ccdtemp = 0.0d0, 0.01d0
#
# PRAP Star Tracker #1 BasePlate Temperature
#
gd_bst1_bptemp = 0.0d0, 0.01d0
#
# PRAP Star Tracker #1 Lens Temperature
#
gd_bst1_lenstemp = 0.0d0, 0.01d0
#
# PRAP Star Tracker #1 8v
#
gd_bst1_8v=0.0d0, 0.1d0
#
# PRAP Star Tracker #1 -9v
#
gd_bst1_n9v=0.0d0, 0.1d0
#
# PRAP Star Tracker #1 4v
#
gd_bst1_4v=0.0d0, 0.1d0
#
# PRAP Star Tracker #1 -5v
#
gd_bst1_n5v=0.0d0, 0.1d0
#
# PRAP Star Tracker #2 Data Latency
#
gd_bst2_datalat = 0.0d0, 0.064d0
#
# PRAP Star Tracker #2 Position X
#
gd_bst2_posx = 0.0d0, 0.5d0
#
```

```
# PRAP Star Tracker #2 Position Y
#
gd_bst2_posy = 0.0d0, 0.5d0
#
# PRAP Star Tracker #2 Intensity
#
gd_bst2_starint = 0.0d0, 0.0625d0
#
# PRAP Star Tracker #2 CCD Temperature
#
gd_bst2_ccdtemp = 0.0d0, 0.01d0
#
# PRAP Star Tracker #2 BasePlate Temperature
#
gd_bst2_bptemp = 0.0d0, 0.01d0
#
# PRAP Star Tracker #2 Lens Temperature
#
gd_bst2_lenstemp = 0.0d0, 0.01d0
#
# PRAP Star Tracker #2 8v
#
gd_bst2_8v=0.0d0, 0.1d0
#
# PRAP Star Tracker #2 -9v
#
gd_bst2_n9v=0.0d0, 0.1d0
#
# PRAP Star Tracker #2 4v
#
gd_bst2_4v=0.0d0, 0.1d0
#
# PRAP Star Tracker #2 -5v
#
gd_bst2_n5v=0.0d0, 0.1d0
#
# PRAP IST Virtual Tracker Boresight H
#
gd_ist_boreh=0.0d0, 412529.72d0
#
# PRAP IST Virtual Tracker Boresight V
#
gd_ist_borev=0.0d0, 412529.72d0
#
# PRAP IST Virtual Tracker Focal Length
#
gd_ist_foclngh=0.0d0,1.0d0
#
# PRAP IST Virtual Tracker Time to Center of Integration
#
gd_ist_timcofint=0.0d0, 20.0d0
#
# PRAP LRS Time to Center of Integration
#
gd_lrs_timcofint=0.0d0, 20.0d0
#
# PRAP IST Virtual Tracker Star Magnitude
#
gd_ist_VTstarmag=0.0d0, 0.1d0
```

```
#
# PRAP IST Boresight Column
#
gd_ist_borecol=256.0d0,0.001953d0
#
# PRAP IST Boresight Row
#
gd_ist_borerow=256.0d0,0.001953d0
#
# PRAP IST CCD Temperature
#
gd_ist_ccdtemp=-273.16d0,0.007812d0
#
# PRAP IST Lens Cell Temperature
#
gd_ist_lenscellt=-273.16d0,0.007812d0
#
# PRAP LRS Virtual Tracker 0 Centroid Row
#
gd_lrs_VTcentr=0.0d0,0.02646875d0
#
# PRAP LRS Virtual Tracker 0 Centroid Column
#
gd_lrs_VTcentc=0.0d0,0.02646875d0
#
# PRAP LRS Integration Time
#
gd_lrs_inttime=0.d00, 1.0d0
#
# PRAP LRS Health CCD Temperature
#
gd_lrs_hlth_ccdtemp=-273.16, 0.007812
#
# PRAP LRS Health Lens Cell Temperature
#
gd_lrs_hlth_celltemp=-273.16, 0.007812
#
# PRAP ADCS Attitude Q1
#
gd_adcs_att_q1=0.0d0,3.2d-5
#
# PRAP ADCS Attitude Q2
#
gd_adcs_att_q2=0.0d0,3.2d-5
#
# PRAP ADCS Attitude Q3
#
gd_adcs_att_q3=0.0d0,3.2d-5
#
# PRAP ADCS Attitude Q4
#
gd_adcs_att_q4=0.0d0,3.2d-5
#
# PRAP ADCS Orbital Pos X
#
gd_adcs_pos_x=0.0d0,0.25d0
#
# PRAP ADCS Orbital Pos Y
#
```

```

gd_adcs_pos_y=0.0d0,0.25d0
#
# PRAP ADCS Orbital Pos Y
#
gd_adcs_pos_z=0.0d0,0.25d0
#
# PRAP ADCS Orbital Vel X
#
gd_adcs_vel_x=0.0d0, 3.2d-4
#
# PRAP ADCS Orbital Vel Y
#
gd_adcs_vel_y=0.0d0, 3.2d-4
#
# PRAP ADCS Orbital Vel Z
#
gd_adcs_vel_z=0.0d0, 3.2d-4
#
# PRAP ADCS Calculated SA 1 Position
#
gd_adcs_cal_pos1=0.0d0,2.0d-4
#
# PRAP ADCS Calculated SA 2 Position
#
gd_adcs_cal_pos2=0.0d0,2.0d-4
#
# Quality Assurance dumping intervals [seconds]
#
I_QA01_DUMP_TME = 16
I_QA02_DUMP_TME = 16
I_QA03_DUMP_TME = 3600
#
# Quality Assurance energy histogram interval [joules]
#
D_QA_G_NRG_HIST = 0.000d0, 0.001d0, 0.002d0, 0.003d0, 0.004d0, 0.005d0, 0.006d0,
0.007d0, 0.008d0, 0.009d0, 0.010d0, 0.011d0, 0.012d0, 0.013d0, 0.014d0, 0.015d0
D_QA_IR_NRG_HIST = 0.000d0, 0.004d0, 0.008d0, 0.012d0, 0.016d0, 0.020d0, 0.024d0,
0.028d0, 0.032d0, 0.036d0, 0.040d0, 0.044d0, 0.048d0, 0.052d0, 0.056d0, 0.060d0
#
#
END_OF_L1A = -----
#
END_OF_ANC07_FILE = -----

```

B.3.3 Waveform Constants

```

#
# Waveform Constants Mod Entries
#
# 2003 Feb 10 Jack L. Saba Mantis 1228: added d_GainAlertLevel.
# 2004-04-13 LA.Roberts, changed I_SATAMP,I_SATUR_GAIN,D_SATUR_NRG,
# D_MINNRG_SAT,I_MAXGAIN_SAT,D_WIDTHPK_SAT, & D_MINSKEW_SAT to arrays of 3
# 2004-05-07 LA.Roberts, added D_MINSIGWDTH and D_MINPK2NS
# 2004-07-12 LA.Roberts, added D_NSIGTX
# 2004-11-05 LA.Roberts, added D_DPROX1, D_DPROX2, I_ESTSW1 & I_ESTSW2
# 2005-02-09 LARoberts, added I_SATNDXTH
# 2005-04-06 LARoberts, changed D_CREATELE, mantis 1750
# 2005-04-13 LARoberts, added d_fltrWdMin1, d_fltrWdMin2, d_wfFitSDevThr

```

```

# i_normWF & i_convSw
# 2005-06-24 LARoberts, added I_TMCKSW1 & I_TMCKSW2 (cr2034)
# 2005-08-26 LARoberts, added d_maxSDev (cr2091)
# 2005-08-17 LARoberts, changed D_FLTRWDMIN1, D_INTV_MIN1 & D_WT_SGM
# per mantis 2078
# 2005-08-31 LARoberts, changed D_FLTRWDMIN1 & D_INTV_MIN1 per new
# requirements in mantis 2078
# 2005-09-14 LARoberts, added I_NORMTYPE
# 2005-09-16 LARoberts, added iMinNG2useTr & iNGates2useTr
# 2005-10-06 LARoberts, changed D_WT_SGM to D_WT_SGM1 & D_WT_SGM2 (cr2128)
# 2005-11-15 LARoberts, added i_maxNdxNSat1 & i_maxNdxNSat2
# 2005-12-21 LARoberts, added I_STOPAT6_1 & I_STOPAT6_2 (cr2206)
# 2006-01-20 LARoberts, added i_throwOutZA1 & i_throwOutZA2, and changed
# D_WFFITSDEVTHR1 from 0.00001 to 0.001
# 2006-01-25 JLee, Change i_maxNdxNSat2 to 0
# 2006-03-31 LARoberts, (2266), changed d_nSig to d_beg_nsig and LAR060331
# d_end_nsig LAR060331
# 2006-01-31 LARoberts, added d_maxDeltas (2220)
# 2006-02-23 LARoberts, added I_MAXSMBINS (2236)
# 2006-06-09 LARoberts, added I_KEEPPK1 (2322) LAR060609
# 2006-07-19 LARoberts, added I_MIN4CLIP (2339) LAR060719
# 2006-07-24 LARoberts, added comments and changed values of I_ESTSW1
# and I_MAXNDXNSAT1 (2326)
# 2006-07-26 LARoberts, removed d_minskw_sat, i_maxgain_sat, LAR060726
# d_minnrg_sat, & d_satur_nrg from anc07_Indep. (2263) LAR060726
# 2006-08-11 LARoberts, changed I_STOPAT6_1, D_FLTRWDMIN1, D_BEG_NSIG1,
# D_MAXDELTAS_A1 & D_MAXDELTAS_L1 per 2362
# 2006-08-17 LARoberts, changed D_MAXDELTAS_A1 per 2367
# 2006-08-30 LARoberts, changed D_FLTRWDMIN1 & D_FLTRWDMIN2 to
# D_FLTRWDBEG1 & D_FLTRWDBEG2 and removed D_WIDTHPK_SAT and I_SATAMPn
# 2006-11-03 LARoberts, changed D_MAXGOODSDEV to D_MAXGOODSDEV1 and
# D_MAXGOODSDEV2, and changed D_MAXGOODSDEV1 from 0.04 to 0.06 (2416 & 2420)
# 2008-01-07 LARoberts, added BSS calibration vars, D_OVRCALIB & D_NLGC
# 2008-02-26 LARoberts, added IMINSATNDX (2356)
# 2007-08-03 LARoberts, changed d_GainAlertLevel to i_GainAlertLevel (2506)
# 2009-06-02 LARoberts, implemented time dependent d_nSig (2864)
# 2009-06-09 LARoberts, removed unused vars: I_USEHS_PROC, D_AALPHA, (2895)
# D_AGAMA, D_ABETA, I_SATUR_GAIN*, D_AREAV0
# 2009-07-17 LARoberts, changed D_MAXDELTAS_S1, D_MAXDELTAS_A2,
# D_MAXDELTAS_L2, D_MAXDELTAS_S2 (2764)
# 2009-07-23 LARoberts, updated BSS table for L2D & L2E (2862)
# 2009-08-02 JLee, updated NSIG table values and reordered.
# 2010-06-10 LARoberts, changed BSS table for L2D, L2E, & L2F from (2903)
# 1.23 to 1.70
# 2011-03-08 LARoberts, Changed entry#4 of D_NSIG_TABLE from time
# 280900000 to 244631000 (3051)
#
BEG_OF_WF = -----
WF_VERS = ANC07 WF V6.0 2011-03-08
#
# Select Region "0==use all gates, 1==use selected region"
I_SLCTREGN1 = 1
I_SLCTREGN2 = 0
#
# "If i_slctRegn? is set, indexSignalBegin? = indexSignalBegin? - i_offsetb?"
I_OFFSETB1 = 50
I_OFFSETB2 = 50
#
# "If i_slctRegn? is set, indexSignalEnd? = indexSignalEnd? + i_offsete?"

```

```

I_OFFSET1 = 50
I_OFFSET2 = 50
#
# Min # of gates equal to 255 to set the clipped flag in l_WFqual
I_MIN4CLIP=2
#
# Min number of iterations during functional fit
I_MINITER = 3
#
# Max number of iterations during functional fit
I_MAXITER1 = 12
I_MAXITER2 = 12
#
# Max number of peaks to fit - alternate & standard parameters
I_MAXFIT1 = 6
I_MAXFIT2 = 2
#
# Min filter width used by WFMgr for sanity checking
D_FLTRWDMIN =4.0d0
#
# Min filter width used by W_Smooth1
#   D_FLTRWDBEG1 is the two sigma filter used to make the alt smoothed WF
#   D_FLTRWDBEG2 is the two sigma filter used to make the std smoothed WF
#   both smoothed WFs are passed to W_FunctionalFit & used for estimates.
D_FLTRWDBEG1 =14.0d0
D_FLTRWDBEG2 =33.0d0
D_FLTRWDMAX = 129.0d0
#   max num bins to use for smoothing in W_Smooth1
I_MAXSMBINS = 129
#
# Absolute minimum amplitude (volts)
D_ABSMINAMP1 = 0.05d0
D_ABSMINAMP2 = 0.05d0
#
# Min peak amplitude = d_Npeak_min? * (sDevNoise)+ noise
D_NPEAK_MIN1 = 4.5d0
D_NPEAK_MIN2 = 4.5d0
#
# Max peak amplitude (volts)
D_MAXAMP = 2.5d0
#
# Min & max peak sigma (ns)
D_SIGMAMINIT = 2.5d0
D_MAXSIGMA = 300.0d0
#
# Max value for d_wfFitSDev and d_sDevFitTr
D_MAXSDEV = 0.3d0
#
# Noise threshold TransPulse = d_nsigTx * sDevNsTx
D_NSIGTX = 1.5d0
#
#
#   D_T_NSIG      YYYYMMDD HHMMSS
# 0000000000.0d0 20030220 000000 L1A
# 117782220.0d0 20030925 171700 L2A
# 130326180.0d0 20040217 214300 L2B
# 138171420.0d0 20040518 165700 L2C
# 150111000.0d0 20041003 213000 L3A
# 161928480.0d0 20050217 160800 L3B

```

```

# 169878900.0d0 20050520 163500 L3C
# 183207360.0d0 20051021 225600 L3D
# 193912620.0d0 20060222 203700 L3E
# 201764580.0d0 20060524 174300 L3F
# 215052540.0d0 20061025 124900 L3G
# 226937100.0d0 20070312 020500 L3H
# 244631400.0d0 20071002 211000 L3I
# 256549920.0d0 20080217 195200 L3J
# 276401580.0d0 20081004 141300 L3K
# 280907280.0d0 20081125 174800 L2D
# 289879560.0d0 20090309 140600 L2E
#
# Noise threshold = d_nsig? * sDevNoise
#
# NSIG Table Fields:
#
GI_NUM_NSIG = 8
#
# Table History
#
# 7/31/2009 Change Std fit Nsig to 9.5 for L2C 5/17/2004 to 6/22/2004
# 7/31/2009 Change std fit Nsig to 15 for L3A to L3G
# 7/31/2009 Change Std fit Nsig to 9.5 for L3G and all periods afterward
# 10/24/2006 table end
# 7/31/2009 Change Alt fit Nsig to 7.5 for L2E 3/8/2009 table end
# 2011-03-03 Changed entry#4 from time 280900000 to 244631000
#
#           TIME           B_NSIG1 E_NSIG1 B_NSIG2 E_NSIG2
#
D_NSIG_TABLE = 000000000.0d0 3.5D0 4.5D0 15.0D0 15.0D0
D_NSIG_TABLE = 138024000.0d0 3.5D0 4.5D0 15.0D0 15.0D0
D_NSIG_TABLE = 141134400.0d0 3.5D0 4.5D0 15.0D0 15.0D0
D_NSIG_TABLE = 244631000.0d0 3.5D0 4.5D0 9.5D0 9.5D0
D_NSIG_TABLE = 289742400.0d0 7.5D0 7.5D0 9.5D0 9.5D0
D_NSIG_TABLE = 999999999.0d0 7.5D0 7.5D0 9.5D0 9.5D0
D_NSIG_TABLE = 999999999.0d0 7.5D0 7.5D0 9.5D0 9.5D0
D_NSIG_TABLE = 999999999.0d0 7.5D0 7.5D0 9.5D0 9.5D0
#
# Min interval between peaks
D_INTV_MIN1 = 15.0d0
D_INTV_MIN2 = 30.0d0
#
# fraction of peak sigma proximity to sigB or sigE allowed during fit
D_DPROX1 = 0.0d0
D_DPROX2 = 0.25d0
#
# 1=don't remove peaks if too small, too narrow, or too close.
I_KEEPAALLPKS1 = 1
I_KEEPAALLPKS2 = 0
#
# 1=remove peaks if zero amplitude and if I_KEEPAALLPKSn == 1
I_THROWOUTZA1 = 1
I_THROWOUTZA2 = 0
#
# d_maxDeltas = max delta during fit
#   _N multiply by noise parm
#   _A multiply by amplitude parm
#   _L absolute number for max loc delta in ns
#   _S multiply by sigma parm

```

```

D_MAXDELTAS_N1 = 0.0d0
D_MAXDELTAS_A1 = 0.5d0
D_MAXDELTAS_L1 = 15.0d0
D_MAXDELTAS_S1 = 0.5d0
#
D_MAXDELTAS_N2 = 0.0d0
D_MAXDELTAS_A2 = 0.5d0
D_MAXDELTAS_L2 = 15.0d0
D_MAXDELTAS_S2 = 0.5d0
#D_MAXDELTAS_A2 = 10000.0d0
#D_MAXDELTAS_L2 = 10000.0d0
#D_MAXDELTAS_S2 = 10000.0d0
#
# Switch used during estimates (for secondary peaks)
# 0=Recompute peak sigmas
# 1=Do not recompute sigmas
#The loop is going from the largest area to the smallest.
# If i_estswN=1, then it only does the highest ranking peak (largest area).
# If i_estswN=0, then it recomputes the sigma for all of the peaks.
#When the sigma is recomputed, instead of computing the sigma from the second
# derivative, the locations to either side of the peak location are found
# where the amplitude is a percentage of the peak amplitude:
# At T where W = 80% AMPm, |T-Tm| = 0.668045 * SGMm.
# so, find T1 before Tm and T2 after Tm where W = 80% AMPm
# SGMm = |dT2_80 - dT1_80| / 1.33609d0
# At T where W = 60.653% AMPm, |T-Tm| = SGMm.
# so, find T1 before Tm and T2 after Tm where W = 60.653% AMPm
# SGMm = |dT2_61 - dT1_61| / 2.0d0
I_ESTSW1 = 0
I_ESTSW2 = 1
#
# Combine peaks switch
# "(0,1) => weight peaks by area when combining"
# "(1,0) => use straight average when combining peaks"
D_CMB1 = 0.0d0
D_CMB2 = 1.0d0
#
# min signal width for a good fit
# if sigE-sigB < this value, l_WFqual(gwi_suspect,iWF) is set
D_MINSIGWDTH = 5.0d0
#
# min peak to noise ratio for a good fit
# if (maxAmp-d_bgNoiseOb)/d_sDevNsOb < this value,
# l_WFqual(gwi_suspect,iWF) is set
D_MINPK2NS = 5.0d0
#
# max value of standard deviation of fit for a good fit
# if d_wfFitSDev(iWF,?) > this value, l_WFqual(gwi_poorFit?,iWF) is set
D_MAXGOODSDEV1 = 0.06d0
D_MAXGOODSDEV2 = 0.04d0
#
# chi threshold for convergence of fit in W_CkConvRMS
# when sDevFit changes by <= this value during an iteration of the fit,
# then the fit has converged
D_WFFITSDEVTHR1 = 0.001d0
D_WFFITSDEVTHR2 = 0.00001d0
#
# Switch to normalize WF during fit
# 0 => don't normalize

```

```

# 1 => normalize
I_NORMWF1 = 1
I_NORMWF2 = 0
#
# Switch to convergence method
# 0 => use W_CkConv      (parameter change)
# 1 => use W_CkConvRMS   (chi change)
I_CONVSW1 = 1
I_CONVSW2 = 0
#
# Iterated parameter change indicating convergence in W_CkConv
# 0.02 == 2% or less change => convergence
D_DNOISE1 = 0.02d0
D_DNOISE2 = 0.02d0
#
D_DAMPCK1 = 0.02d0
D_DAMPCK2 = 0.02d0
#
D_DTMCK1 = 0.02d0
D_DTMCK2 = 0.07d0
#
D_DSGMCK1 = 0.02d0
D_DSGMCK2 = 0.02d0
#
# Switches
# 1==use D_DTMCK as a number of ns
# 0==use D_DTMCK as percent for W_CkConv
#
I_TMCKSW1 = 0
I_TMCKSW2 = 1
#
# Calculate noise switch
# "0==use observed noise & sDevNoise, 1==calculate noise & sDevNoise"
I_NSCAL1 = 0
I_NSCAL2 = 0
#
# Number of gates to use to calculate noise (beginning & ending of WF)
INGATES2USE1 = 20
INGATES2USE2 = 20
#
# Min number of gates to use to calculate noise (in case signal_begin or
#   signal_end occurs within INGATES2USE? gates of the beginning or ending
#   of the WF)
IMINNG2USE = 10
#
# Number of gates to use to calculate noise for the transmitted pulse
INGATES2USETR = 10
#
# Min number of gates to use to calculate noise for the transmitted pulse
IMINNG2USETR = 5
#
# Min i_satNdx to be counted as saturated for QA purposes
IMINSATNDX = 2
#
#
# Threshold for saturation index.  If the gate amplitude is >=
#   this value, then i_satNdx is incremented (max value is 126).
# -- changed to array of 256 per mantis 2324
#I_SATNDXTH = 220

```

```

I_SAT_TH_1= 30, 30, 30, 30, 30, 30, 30, 30, 109,149,177,196,209,218,224,228
I_SAT_TH_2= 231,232,233,234,234,234,235,235,236,237,238,239,239,239,239,239
I_SAT_TH_3= 239,239,239,239,239,239,239,239,239,239,239,239,239,239,239
I_SAT_TH_4= 239,239,239,239,239,239,239,239,239,239,239,239,239,239,239
I_SAT_TH_5= 239,239,239,239,239,239,239,239,239,239,239,239,239,239,239
I_SAT_TH_6= 239,239,239,239,239,239,239,239,239,239,239,239,239,239,239
I_SAT_TH_7= 239,239,239,239,239,239,239,239,239,239,239,239,239,239,239
I_SAT_TH_8= 239,239,239,239,239,239,239,239,239,239,239,239,239,239,239
I_SAT_TH_9= 239,239,239,239,239,239,239,239,239,239,239,239,239,239,239
I_SAT_TH_10=239,239,239,239,239,239,239,239,239,239,239,239,239,239,239
I_SAT_TH_11=239,239,239,239,239,239,239,239,239,239,239,239,239,239,239
I_SAT_TH_12=239,239,239,239,239,239,239,239,239,239,239,239,239,239,239
I_SAT_TH_13=239,239,239,239,239,239,239,239,239,239,239,239,239,239,239
I_SAT_TH_14=239,239,239,239,239,239,239,239,239,239,239,239,239,239,239
I_SAT_TH_15=239,239,239,239,239,239,239,239,239,239,239,239,239,239,239
I_SAT_TH_16=239,239,239,239,239,239,239,239,239,239,239,239,239,239,239
#
# Used in W_Estimates and W_EstNew. If I_SATNDX <= this value, then
#   Sigma is not recal'd as if the whole signal was one saturated peak
I_MAXNDXNSAT1 = 20
I_MAXNDXNSAT2 = 0
#
# Used in W_Estimates and W_EstNew. If I_stopat6_1=1 then stop combining
#   peaks in spite of being close to other peaks if 6 or less
I_STOPAT6_1 = 0
I_STOPAT6_2 = 0
#
# Used in W_Estimates and W_EstNew. If i_keepPk1_1=1 then keep peak #1
#   even if its rank is more than i_maxfit
I_KEEPPK1_1 = 1
I_KEEPPK1_2 = 0
#
# non-linear gain calibration for reflectivity
# Y=NLGC(1)+NLGC(2)*gain+NLGC(3)*gain^2+NLGC(4)*gain^3+NLGC(5)*gain^4
# f = 1 / Y
# E_norm = f * E
#
D_NLGC = 0.72807d0, 0.008543d0, -9.6905d-5, 4.7896d-7, -8.621d-10
#
# BSS (Boresight Shift Shadowing)
#
# D_T_BSS      YYYYMMDD HHMMSS      D_F_BSS
# 000000000.0d0 20030220 000000 L1A 1.00d0
# 117782220.0d0 20030925 171700 L2A 1.83d0
# 119340000.0d0 20031013 180000 L2A 1.95d0
# 119348940.0d0 20031013 202900 L2A 1.15d0
# 119443920.0d0 20031014 225200 L2A 1.30d0
# 120648000.0d0 20031028 212000 L2A 1.55d0
# 120735000.0d0 20031029 213000 L2A 1.35d0
# 130326180.0d0 20040217 214300 L2B 1.30d0
# 138171420.0d0 20040518 165700 L2C 1.40d0
# 138348060.0d0 20040520 180100 L2C 1.23d0
# 150111000.0d0 20041003 213000 L3A 1.00d0
# 161928480.0d0 20050217 160800 L3B 0.95d0
# 183207360.0d0 20051021 225600 L3D 1.00d0
# 256554496.0d0 20080217 000000 L3J 1.00d0
# 276405992.0d0 20081004 000000 L3K 1.00d0
# 280907280.0d0 20081125 174800 L2D 1.23d0 -> 1.7d0
# 289879560.0d0 20090309 140600 L2E 1.23d0 -> 1.7d0

```

```

# 307623923.0d0 20090930 000000 L2F 1.23d0 -> 1.7d0
# 999999999.0d0 ----- ----- --- 1.00d0
#
#   number of actual values in table
I_N_BSS = 15
#
#   effective time
D_T_BSS1 = 000000000.0d0, 117782220.0d0, 119340000.0d0, 119348940.0d0
D_T_BSS2 = 119443920.0d0, 120648000.0d0, 120735000.0d0, 130326180.0d0
D_T_BSS3 = 138171420.0d0, 138348060.0d0, 150111000.0d0, 161928480.0d0
D_T_BSS4 = 183207360.0d0, 280907280.0d0, 999999999.0d0, 999999999.0d0
D_T_BSS5 = 999999999.0d0, 999999999.0d0, 999999999.0d0, 999999999.0d0
D_T_BSS6 = 999999999.0d0, 999999999.0d0, 999999999.0d0, 999999999.0d0
#
#   Calibration factor
D_F_BSS1 = 1.00d0, 1.83d0, 1.95d0, 1.15d0
D_F_BSS2 = 1.30d0, 1.55d0, 1.35d0, 1.30d0
D_F_BSS3 = 1.40d0, 1.23d0, 1.00d0, 0.95d0
D_F_BSS4 = 1.00d0, 1.70d0, 1.00d0, 1.00d0
D_F_BSS5 = 1.00d0, 1.00d0, 1.00d0, 1.00d0
D_F_BSS6 = 1.00d0, 1.00d0, 1.00d0, 1.00d0
#
# Overall calibration for reflectivity
#   d_ovrCalib(2)==1/1.16
D_OVRCALIB = 0.0d0, 0.862068965d0
#
# retracker threshold = d_thresh_lvl * maxSmoothAmp(WF)
D_THRESH_LVL1 = 0.11d0
D_THRESH_LVL2 = 0.15d0
#
# Measurement uncertainty for computing weights for LsqFit
#   wt = 1/(D_WT_SGM)^2
D_WT_SGM1 = 0.03d0
D_WT_SGM2 = 0.001d0
#
# a priori fit-matrix-sigma for noise = 1/SQRT(d_V0ns)
D_V0NS1 = 1000000.0d0
D_V0NS2 = 1000000.0d0
#
# a priori fit-matrix-sigma for amplitude = 1/SQRT(d_V0amp)
D_V0AMP1 = 0.001d0
D_V0AMP2 = 0.001d0
#
# a priori fit-matrix-sigma for location = 1/SQRT(d_V0loc)
D_V0LOC1 = 0.1d0
D_V0LOC2 = 0.1d0
#
# a priori fit-matrix-sigma for peak-sigma = 1/SQRT(d_V0sgm)
D_V0SGM1 = 0.001d0
D_V0SGM2 = 0.001d0
#
# Minimum noise (raw counts)
D_MINNOISE = 0.5d0
#
# Area of telescope ... changed from 0.709 to pi/4
D_AREATELE = 0.78539816d0
#
# Optics transmission ... changed from .555 to .67 see mantis 671
D_OPTTRANS = 0.67d0

```

```
#
# QA along-track dumping interval time [seconds]
I_QA_DUMP_TME = 16
#
# Set gain flag in i_ElvFlg = 1 if gain >= this value, = 0 otherwise
i_GainAlertLevel = 30
#
#
END_OF_WF = -----
#
END_OF_ANC07_FILE = -----
```

B.3.4 Atmosphere Constants

```
#
# GLAS v1 ANC07 Atmosphere File
#
# 1999 November 11 JLee, Fixed error codes, split out.
# 2000 March 13 JLee, Updated.
# 2000 March 16 JLee, fixed gi_cld_thick
# 2000 April 17 KBarbieri - Modifications for V1 integration
# 2000 August 16 KBarbieri - Starting V2 additions
# 2000 August 28 KBarbieri - changed cal cofs for lidar profile unit
#                          change from J to mJ
# 2000 Nov 13 KBarbieri - Adding atm_anc additions
# 2001 Feb 09 KBarbieri - Adding L1B additions
# 2001 May 02 KBarbieri - Adding L2 additions
# 2001 Oct 22 KBarbieri - Changing version to V2
# 2002 Jan 16 SPalm - Changed GI_CC_ELIM_F from 1 to 0
# 2002 Jan 16 SPalm - Changed gd_g_bkgd_thr from 6 to 4
# 2002 Jan 16 SPalm - Changed GI_CC_MFIT from 10 to -1
# 2002 Feb 01 SPalm - Changed Cloud/Aerosol discrimination thresholds
# 2002 Feb 01 SPalm - Changed GD_RAT_THR1 from 1.0d0 to 1.0d-1
# 2002 Feb 04 SPalm - Changed GI_GDET_BIN from 0 to 5
# 2002 Apr 23 WHart - Changed GD_CLD_THR_FTR from 4.0d0 to 3.0d0
# 2002 Apr 23 WHart - Changed GI_RN_TOP from 23000 to 35000
# 2002 Jun 17 KBarbieri - Added GD_TIME_TOL
# 2003 Apr 24 Jlee - CR0000373 GD_IR_LMCALCOF, GI_USE_GCC_F, and
#                  GI_USE_IRCC_F
# 2003 May 09 SPalm - Changed GD_TIME_TOL form 1.0d0 to 1.0d2
# 2003 Jul 25 SPalm - Changed GD_IR_LMCALCOF from 5.82d1 to 5.20d1
# 2003 Oct 24 Jlee - CR0000985
# 2004 Jan 22 WDHART - Changed from GI_CALC_AER_F from 1 to 0;
# 2004 Jan 29 SPalm - Changed GI_AER_TOP_HT from 36000 to 30000
# 2004 Feb 04 SPalm - Changed GI_CC_ELIM_F from 1 to 0
# 2004 Feb 20 SPalm - Changed GD_CRAT_THR20 from 1.10d1 to 1.0d1
# 2004 Mar 22 SPalm - Changed GD_IR_LMCALCOF from 52.0 to 42.0
# 2004 Mar 22 SPalm - Changed GD_PBL_THR_FTR from 0.40 to 0.30
# 2004 Mar 22 SPalm - Changed GI_CC_ELIM_F from 0 to 1
# 2004 Mar 23 SPalm - Changed GD_CC_NUM_STD from 2.0d0 to 1.3d0
# 2004 Mar 25 WHart - Updated GD_DISCRIM_THR profile
# 2004 Jul 14 DHLavka - Updated GD_GDET_FTR from 5.0 to 9.0
# 2004 Aug 26 SMcLaughlin- Add QA dumping intervals
# 2005 Apr 25 SMcLaughlin- Add smoothing-filter half-widths
# 2005 Jun 17 SMcLaughlin- Add threshold of integrated signal which
#                          implies a cloud
# 2005 Jun 27 SMcLaughlin- Add Low Clouds search Count Number Needed
#                          for identification
# 2007 Jun 08 SPalm - Changed GI_CAL_TIME from 600 to 1000 and GI_CC_ELIM_F
```

```
from 1 to 0
# 2007 Jul      19 SPalm      - The above did not work well for day-night transition.
Integration time
#
#                               was too long. Changed GI_CAL_TIME to 250
# 2007 Jul      10 SPalm      - Changed GD_HI_HALFWID from 2.0 to 4.0 - the
calibration band half width. I also changed
#
#                               the center height of the cal band from 22000 m
to 25000 m (in const_atm_mod.f90)
# 2007 Sep      04 SPalm      - Changed GD_DIURNAL_FTR from 0.5 to 1.463d-6
# 2007 Oct      26 SPalm      - Changed GD_DIURNAL_FTR from 1.463d-6 to 2.926d-6
# 2007 Dec      11 SPalm      - Changed GD_DIURNAL_FTR from 2.926d-6 to 4.38d-6
#
# ATM Constants Mod Entries
#
BEG_OF_ATM = -----
ATM_VERS = ANC07 Atm Globals V6.0 Dec 11 2007
#
# Aerosol scaling factor for 20 sec search
# It seems that 4.0 is good for daytime data, but 5.0 is better for night
#
GD_AER_20S_FTR = 2.5d0
#
# Aerosol scaling factor for 4 sec search
#
GD_AER_4S_FTR = 0.3d0
#
# Aerosol threshold factors for new (V2) molecular threshold at 20 sec
#
GD_AER_FTR1 = 3.0d0
GD_AER_FTR2 = 1.2d0
GD_AER_FTR3 = 1.2d0
#
# The two-way aerosol transmission from the top of the atm to the two calibration
heights
# for 532 and the one calibration height for 1064
#
GD_AEROSOL_TRANS_HI = 1.0d0
GD_AEROSOL_TRANS_IR = 0.98d0
GD_AEROSOL_TRANS_LO = 0.98d0
#
# Factor to multiply molecular difference for bot threshold for 20 s algm
#
GD_BMDIFF_FTR = 0.98d0
#
# Factor to multiply top threshold for bot threshold for 20 s algm
#
GD_BTHR_FTR = 0.96d0
#
# Calibration cloud factor for determining cloud threshold
#
GD_CAL_CLD_FTR = 1.5d0
#
# Percent of good records needed (in decimal form) for cal cof sums to be
# averaged and output to ancillary file
#
GD_CAL_PCT = 0.5d0
#
# Number of standard deviations to eliminate calibration coefficients
#
```

```
GD_CC_NUM_STD = 1.30d0
#
# Use previous granule data if last time is within this number secs of
# current granule time
#
GD_CC_PREV_SEC = 3600.0d0
#
# Ratio to eliminate calibration coefficients
#
GD_CC_RATIO = 0.50
#
# The height (m) above which clouds detected by the calibration utility are
# considered to be cirrus and the 1064 and 532 data are written to anc file 44
#
GD_CIRRUS_HT = 10000.0
#
# Cloud density threshold
#
GD_CLD_DENSE = 25.0d0
#
# Cloud separation height for using low and high consec values (m)
#
GD_CLD_SEP_HT = 5.0d3
#
# Cloud thickness threshold (m)
#
GD_CLD_THICK = 230.0d0
#
# Cloud threshold factor
#
GD_CLD_THR_FTR = 3.0d0
#
# Critical ratio threshold for 20 s algm
#
GD_CRAT_THR20 = 1.0d1
#
# Critical ratio threshold for 4 s algm
#
GD_CRAT_THR4 = 1.25d0
#
# Upper limit for valid DEM (meters)
#
GD_DEM_HI = 10000.0d0
#
# Lower limit for valid DEM (meters)
#
GD_DEM_LO = -2000.0d0
#
# GLA02%DEMmin must be offset by this amount (m)
#
GD_DEM_OFFSET = 1000.0d0
#
# Cloud/aerosol discrimination thresholds
# from 21 km to ground by 1 km increments
#
#GD_DISCRIM_THR = 6.0d-13, 6.0d-13, 6.0d-13, 6.0d-13, 6.0d-13, 6.0d-13, 6.0d-13,
6.0d-13, 6.0d-13, 6.0d-13, 6.0d-13, 7.0d-13, 8.0d-13, 1.0d-12, 1.5d-12, 4.0d-12,
6.0d-12, 6.0d-12, 6.0d-12, 6.0d-12, 6.0d-12
#GD_DISCRIM_THR = 6.0d-15, 6.0d-15, 6.0d-15, 6.0d-15, 6.0d-15, 6.0d-15, 6.0d-14, 6.0d-14,
```

```
6.0d-14, 6.0d-14, 6.0d-14, 6.0d-14, 7.0d-14, 8.0d-12, 1.0d-11, 1.5d-10, 4.0d-10,
6.0d-10, 6.0d-10, 6.0d-10, 6.0d-10, 6.0d-10
#GD_DISCRIM_THR = 6.0d-15, 6.0d-15, 6.0d-15, 6.0d-15, 6.0d-15, 6.0d-14, 6.0d-14,
6.0d-14, 6.0d-14, 6.0d-14, 6.0d-14, 7.0d-14, 8.0d-12, 1.0d-11, 2.5d-11, 5.0d-11,
7.5d-11, 1.0d-10, 3.0d-10, 3.0d-10, 3.0d-10
GD_DISCRIM_THR = 6.0d-15, 6.0d-15, 6.0d-15, 6.0d-15, 6.0d-15, 6.0d-14, 6.0d-14,
6.0d-14, 6.0d-14, 6.0d-14, 6.0d-14, 7.0d-14, 8.0d-12, 1.0d-11, 2.5d-11, 1.0d-10,
2.0d-10, 3.0d-10, 3.0d-10, 3.0d-10, 3.0d-10
#
# Diurnal threshold factor
#
#GD_DIURNAL_FTR = 0.5d0
#GD_DIURNAL_FTR = 1.463d-6
#GD_DIURNAL_FTR = 2.926d-6
GD_DIURNAL_FTR = 4.380d-6
#
# Lower threshold for 532 day/night flag
#
GD_DNF_THR1 = 1.0d5
#
# Upper threshold for 532 day/night flag
#
GD_DNF_THR2 = 1.0d6
#
# 532 background threshold for calibration coefficient elimination (photons/bin)
#
GD_G_BKGD_THR = 2.0d0
#
# Ground detection factor
#
GD_GDET_FTR = 9.0d0
#
# Lab measured 532 calibration coefficient
#
GD_G_LMCALCOF = 9.00d12
#
# Half width of calibration band around high calibration height (km)
#
GD_HI_HALFWID = 4.0d0
#
# Lab measured 1064 calibration coefficient
#
GD_IR_LMCALCOF = 4.20d1
#
# Half width of calibration band around low calibration height (km)
#
GD_LO_HALFWID = 1.0d0
#
# Factor to multiply average molecular bscs for top threshold for 4 s algm
#
GD_MAER_FTR = 1.1d0
#
# Factor to multiply average molecular bscs for top threshold for 20 s algm
#
GD_MAVG_FTR = 10.0d0
#
# Cloud integrated signal threshold
#
GD_MIN_CLD_SIG = 5.0d-5
```

```
#
# PBL threshold factor
#
GD_PBL_THR_FTR = 0.30d0
#
# Lower threshold for ratio of GLA07 integrated returns
#
GD_RAT_THR1 = 1.0d-1
#
# Upper threshold for ratio of GLA07 integrated returns
#
GD_RAT_THR2 = 1.0d1
#
# Threshold for range from satellite to geoid (m)
#
GD_RNG_THR = 5.0d5
#
# Total to molecular scattering ratio at the two calibration heights for 532
# and at the one lower height for the 1064 channel
#
GD_SCAT_RATIO_HI = 1.00d0
GD_SCAT_RATIO_IR = 1.05d0
GD_SCAT_RATIO_LO = 1.03d0
#
# Segment heights for cloud detection (tops of bins)
#
GD_SEG_HTS = 20.5d0, 19.0d0, 17.0d0, 15.0d0, 13.d0, 11.0d0, 10.0d0, 9.0d0, 8.0d0,
7.0d0, 6.0d0, 5.0d0, 4.0d0 3.0d0, 2.0d0, 1.0d0, 0.0d0, -2.0d0, -2.0d0, -2.0d0
#
# Time tolerance for comparing ANC36 and GLA02 times in A_cal_cofs
#
GD_TIME_TOL = 1.0d2
#
# Factor to multiply molecular difference for top threshold for 20 s algm
#
GD_TMDIFF_FTR = 0.98d0
#
# Minimum number of valid 5 Hz profiles in 1 sec buffer
#
GI_1SEC_MIN = 2
#
# Min number of valid 5 Hz profiles in 20 sec buffer
#
GI_20SEC_MIN = 50
#
# Minimum number of valid 1 sec profiles in 20 sec buffer
#
GI_20SEC_MIN1 = 10
#
# Min number of valid 5 Hz profiles in 4 sec buffer
#
GI_4SEC_MIN = 8
#
# Minimum number of valid 1 sec profiles in 4 sec buffer
#
GI_4SEC_MIN1 = 2
#
# Number of bins to constrain the search for the PBL layer at 4 sec
#
```

```
GI_4S_LIM_BIN = 12
#
# Number of bins to constrain the search for the PBL layer at 5 Hz
#
GI_5HZ_LIM_BIN = 6
#
# Height (m) above PBL or surface for aerosol search limit
#
GI_AER_BOT_HT = 250
#
# Number of bins above optically thick cloud top to end aerosol search at 4 sec
#
GI_AER_CLD_OFF = 5
#
# Number of bins to constrain the search for aerosol top at 4 sec
#
GI_AER_LIM_BIN = 13
#
# Number of bins for new molecular threshold in 20 sec aerosol detection
#
GI_AER_NPTS = 450
#
# Minimum number of bins in an aerosol layer in 20 sec algm
#
GI_AER_NUM_BIN = 3
#
# Flag indicating threshold algorithm to use in 20 sec aerosol detection
# 0=old threshold, 1=new molecular threshold
#
GI_AER_THR_F = 0
#
# Lower limit for std for new molecular threshold in 20 sec aerosol detection
#
GI_AER_THR_LL = 40
#
# Upper limit for std for new molecular threshold in 20 sec aerosol detection
#
GI_AER_THR_UL = 160
#
# Start Height (m) for 20 sec aerosol search limit
#
GI_AER_TOP_HT = 30000
#
# Limit for number of bad locations allowed
#
GI_BAD_LOC_LIMIT = 30
#
# Flag to indicate if backscatter quality flags are used to eliminate data
# Used in the PBL routine A_pbl_lay_mod.f90, and possibly elsewhere, but
# definitely only within level 2 software
# Not used = 0, used = 1
#
GI_BSCS_QF_CHK = 0
#
# Flag indicating if 4 sec aerosol layers should be calculated using aerosol
# routine or if aerosol layers found by cloud algorithm should be used.
# 0 = use cloud algorithm, 1 = use aerosol algorithm
#
#Changed from 1 to 0; 22ja04,WDH
```

```
GI_CALC_AER_F = 0
#
# Start height for cal cof cloud search (m)
#
GI_CAL_CLD_HT = 22000
#
# Number of seconds that cal cof sums are averaged over (segment length)
#
GI_CAL_TIME = 250
#
# Flag to eliminate calibration coefficients (0=no, 1=yes) for data that was taken
# with a background greater than gd_g_bkgd_thr (default vaue of 4.0 photons/bin)
#
GI_CC_ELIM_F = 0
#
# Flag to tell whether to use the high 532 calibration constant or the low
# 1 - Use high calibration constant
# 2 - Use low calibration constant
#
GI_CC_INTERP_F = 1
#
# This is the order of the least squares polynomial fit that defines a calibration
# constant fo each second of the granule
# -1 - linear piecewise fit between each calibration point
# 0 - 0 order or segment average
# 1 - 1st order or linear least square fit:  $y = a + bx$ 
# 2 - 2nd order or parabolic fit:  $y = a + b*x + c*x*x$ 
# 3 - 3rd order or cubic fit:  $y = a + b*x + c*x*x + d*x*x*x$ 
# ..... etc until a max of 10. Note that GI_CC_MFIT = 10 is essentially a linear
# piecewise fit
#
GI_CC_MFIT = -1
#
# Number of points to use in calibration coefficient Interpolation
#
GI_CC_NUM_PTS = 3
#
# Number of bins of 532 and 1064 data to write out when the calibration utility
# detects a cloud. This is for 1064 calibration from cirrus clouds
#
GI_CIRRUS_BINS = 6
#
# Number of consecutive bins for aerosol layer at 20 sec
#
GI_CLD_BIN = 7
#
# Number of consecutive bins for aerosol layer at 20 sec
#
GI_CONS_AER20 = 4
#
# Number of consecutive bins for aerosol layer at 4 sec
#
GI_CONS_AER4 = 4
#
# Number of consecutive bins for ground detection
#
GI_CONS_GRD = 2
#
# Number of consecutive bins for PBL
```

```
#
GI_CONS_PBL = 2
#
# Lower threshold for DEM (bins)
#
GI_DEM_THR1 = -13
#
# Upper threshold for DEM (bins)
#
GI_DEM_THR2 = 156
#
# Number of bins above surface to start search for ground detection
#
GI_DET_TOP_BIN = 7
#
# If ground detection is less than DEM by this number of bins, use DEM
# for lower limit of profile search
#
GI_GDET_BIN = 5
#
# Don't add profile to cal cof sums if number invalid bins in profile > this
# threshold
#
GI_INVALID_THR = 100
#
# Number of consecutive bins for clouds from 10 to 20 km
#
GI_NUM_CLD_HI = 3
#
# Number of consecutive bins for clouds from 0 to 10 km
#
GI_NUM_CLD_LO = 2
#
# Number of consecutive bins for clear sky for 10 to 20 km
#
GI_NUM_CLR_HI = 3
#
# Number of consecutive bins for clear sky for 0 to 10 km
#
GI_NUM_CLR_LO = 2
#
# Backscatter profile is excluded from PBL search if a cloud top is detected
# above this height (m) + 20 sec average PBL height and no cloud bottom or
# ground is detected
# to turn off the elimination of cloud shots, make this larger than 20000
# to enable it, make it about 3000
#
GI_PBL_CLD_HT = 3000
#
# Lower limit for input PBL height
#
GI_PBL_LIM1 = 200
#
# Upper limit for input PBL height
#
GI_PBL_LIM2 = 6000
#
# Height (m) above ground detection for PBL search
#
```

```
GI_PBL_TOP_HT = 7000
#
# Troposphere height (m) above average PBL height
#
GI_PBL_TROP_HT = 1000
#
# Height (m) above which polar stratospheric clouds are detected
#
GI_PSC_HT = 14000
#
# Flag indicating if saturated 532 backscatter values should be replaced
# with 1064 backscatter values: Do not replace = 0, replace = 1
#
GI_REPLACE_F = 0
#
# Lower height (m) for random noise calculation
#
GI_RN_BOT = 22000
#
# Upper height (m) for random noise calculation
#
GI_RN_TOP = 35000
#
# Day number of the year for start of Summer
#
GI_SEASON_DEMARC = 111
#
# Flag to use calculated or lab-measured constant 532 calib coeff; use
# constant value = 0; use calculated value = 1
#
GI_USE_GCC_F = 1
#
# Flag to use calculated or lab-measured constant 1064 calib coeff; use
# constant value = 0; use calculated value = 1
#
GI_USE_IRCC_F = 0
#
# Quality Assurance dumping intervals [seconds]
#
I_QA07_DUMP_TME = 16
I_QA08_DUMP_TME = 16
I_QA09_DUMP_TME = 16
I_QA10_DUMP_TME = 16
I_QA11_DUMP_TME = 16
#
# Preliminary smoothing-filter half-width for cloud height derivation
#   done from 1064nm data
#
GI_IR_CLDSMTH_HWD_PRELM = 1
#
# Preliminary smoothing-filter type for cloud height derivation
#   done from 1064nm data
#
GI_IR_CLDSMTH_TYPE_PRELM = 2
#
# Primary smoothing-filter half-width for cloud height derivation
#   done from 1064nm data
#
GI_IR_CLDSMTH_HWD_PRIME = 3
```

```

#
# Primary smoothing-filter type for cloud height derivation
#   done from 1064nm data
#
GI_IR_CLDSMTH_TYPE_PRIME = 1
#
# Value defining maximum allowed energy level for IR cloud search
#
GD_IR_MAX_ENERGY = 10.0D0
#
# Adjustment for tuning of lowest bin defining base of atmospheric
#   column in search for cloud tops
#
GI_IR_CLD_LOWBIN_ADJ = 2
#
# Number of consecutive bins above threshold required to
#   indicate a cloud top
#
GI_IR_CLD_CONSEC = 4
#
# Energy threshold defining whether a cloud layer exists or not
#
GD_IR_CLOUD_THRESH = 1.10D-5
#
# Energy threshold defining whether integrated signal is real
#
GD_INTEG_THRESHOLD = 1.0D-7
#
# Energy threshold of integrated signal which implies a cloud
#
GD_ISIG_CLOUD_THR = 0.50D-5
#
# Number of Levels Above Energy threshold of in search to identify low cloud
#
GI_LOW_CLOUD_COUNT = 3
#
END_OF_ATM = -----
#
END_OF_ANC07_FILE = -----
#

```

B.3.5 Elevation Constants

```

#
# Elevation Constants Mod Entries
#
# 2007-02-08  LARoberts, removed GD_SGMR2, SURFRUF_PULSEWID, GD_MAX_SLOPE,
#   & REC_IMPULSE (2459)
# 2008-02-26  LARoberts, moved GI_MIN_SATNDX to const_glob_mod
# 2008-02-29  LARoberts, added GI_MIN4SAT, GD_FULLWIDTH & GD_PCTSATTH (2356)
BEG_OF_ELEV = -----
ELEV_VERS = ANC07 Elev Globals V6.0 2008-02-29
#
# gravity effect in milligals
#
gravEffTide = 9.8d0
#
# Constants used in calc of earth tide

```

```
#
earthTdH2 = 0.609d0
#
# Constants used in calc of earth tide
#
earthTdH3 = 0.291d0
#
# Beam Divergence Angle
#
#DIVANGLE = 0.00011d0
#
# QAP Track length (in secs)
#
QAPTRKLEN = 16.0d0
#
# Estimated Roundtrip Atmosphere Transmission
#
GD_T_RTATM = 0.98d0
#
# Filtering Ground Track Azimuth Parameters
GT_AZIMUTH_STDEV = 200.0D0
GT_AZIMUTH_NUM_VALS = 4
# min GLA05%i_satNdx to be counted as saturated
GI_MIN4SAT = 2
#
# percent saturation threshold for computing the saturation correction
GD_PCTSATTH = 2.0d0
# full width threshold for setting i_satCorrFlg
GD_FULLWIDTH = 100.0d0
#
END_OF_ELEV = -----
#
END_OF_ANC07_FILE = -----
```


Appendix C

GSAS ANC06 File Content

C.1 ANC06 Overview

GSAS software creates ANC06 output files as required by GSDP-31100 (refer to the GLAS Science Software Requirements Document). The ANC06 file contains processing information, error messages, and status messages. The file is in standard GSAS keyword=value format. The format of an ANC06 entry is:

```
[keyword] = [value]
```

The first field [keyword] is a keyword describing the type of information presented. The second field [value] is standardized for use in ANC06. It contains two subfields: the time and a text message. The time is that of the data being processed when the entry was written (if no data have been processed, the time may be 0 or an invalid value). The time is a GSAS-standard time representation (currently UTC seconds).

```
[time] [message]
```

Each type of message may have different message field formats. The rules for parsing an ANC06 entry are:

- the keyword is the string left of the “=”
- the data time is the number immediately to the right of the “=”
- the messages text is the information after the data time

C.2 ANC06 Example and Description

A sample ANC06 file, created during V1 Acceptance Testing, is examined below. In this example, multiple spaces have been compressed to a single space for readability.

The first entries in the example ANC06 file show what files were initially opened. The message part of each entry is a GSAS standard error/status message. The first field of the error/status message is the error code, the second is the error severity, the third is the reporting routine and the last is the error text.

All initial input files are opened. (this section has been edited for brevity)

```
0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
gla05_002_11_0001_0028_2_00_00.dat
0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc01_001_20000101_060000_01_00.dat
0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc01_001_20000101_060000_01_02.dat
0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc01_001_20000101_060000_01_03.dat
0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc01_001_20000101_060000_01_04.dat
0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
```

```

anc01_001_20000101_060000_01_01.dat
  0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input) anc07_001_01_00.dat
  0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input) anc07_001_01_01.dat
  0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input) anc07_001_01_03.dat
  0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc08_001_20000101_000000_01_00.dat
  0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc09_001_20000101_000000_01_00.dat
  0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input) anc12_000_00_00.dat
  0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input) anc12_000_00_01.dat
  0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input) anc13_001_01_00.dat
  0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input) anc16_001_01_00.dat
  0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input) anc17_001_01_00.dat
  0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc24_001_20000101_000000_01_00.dat
  0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input) anc27_001_01_00.dat
  0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input) anc27_001_01_01.dat
  0 STATUS= 10005, 0, OpenFOutFile, Opened file: (Output)
gla06_002_11_0001_0028_2_00_00.dat
  0 STATUS= 10005, 0, OpenFOutFile, Opened file: (Output)
gla12_002_11_0001_0015_0_00_00.dat
  0 STATUS= 10005, 0, OpenFOutFile, Opened file: (Output)
gla13_002_11_0001_0015_0_00_00.dat
  0 STATUS= 10005, 0, OpenFOutFile, Opened file: (Output)
gla14_002_11_0001_0015_0_00_00.dat
  0 STATUS= 10005, 0, OpenFOutFile, Opened file: (Output)
gla15_002_11_0001_0015_0_00_00.dat
  0 STATUS= 10005, 0, OpenFOutFile, Opened file: (Output)
gap06_002_11_0001_0028_2_00_00.dat
  0 STATUS= 10005, 0, OpenFOutFile, Opened file: (Output)
gap12_002_11_0001_0015_0_00_00.dat
  0 STATUS= 10005, 0, OpenFOutFile, Opened file: (Output)
gap13_002_11_0001_0015_0_00_00.dat
  0 STATUS= 10005, 0, OpenFOutFile, Opened file: (Output)
gap14_002_11_0001_0015_0_00_00.dat
  0 STATUS= 10005, 0, OpenFOutFile, Opened file: (Output)
gap15_002_11_0001_0015_0_00_00.dat
  0 STATUS= 10010, 0, exec_lib, OpenFiles Subroutine status End of execution

```

The control file name is referenced.

```

0 #=-----
0 #=Control File Name
0 #=-----
0 CF_NAME=cf_p3t1.ctl

```

The control file contents are listed. Notice that “=” is replaced with “:” so there is no chance of the keyword/value processor being confused. Comments are retained. (this section has been edited for brevity)

```

0 CONTROL=#
0 CONTROL=#-----Execution Information
0 CONTROL=#
0 CONTROL= EXEC_KEY:p3t1
0 CONTROL= DATE_GENERATED:21 September 2001
0 CONTROL= OPERATOR:jlee
0 CONTROL=#
0 CONTROL=#-----Static ANC Files
0 CONTROL=#

```

```

0 CONTROL=# Input ANC07 Files : 00=error, 01=global, 03=atmosphere
0 CONTROL=#
0 CONTROL= INPUT_FILE:anc07_001_01_00.dat 0000000 1000000
0 CONTROL= INPUT_FILE:anc07_001_01_01.dat 0000000 1000000
0 CONTROL= INPUT_FILE:anc07_001_01_03.dat 0000000 1000000
.
.
.
0 CONTROL= OUTPUT_FILE:qap14_002_11_0001_0043_0_00_00.dat 84922.3646
90000.0000
0 CONTROL= OUTPUT_FILE:qap15_002_11_0001_0043_0_00_00.dat 84922.3646
90000.0000
0 CONTROL=#
0 CONTROL=#-----Execution Control
0 CONTROL=#
0 CONTROL= WAVEFORM_PROCESS:NONE
0 CONTROL= ELEVATION_PROCESS:ALL
0 CONTROL= SURFACE_TYPE:ALL
0 CONTROL=#
0 CONTROL=#-----End of Control File
0 CONTROL=#

```

The exec version number is referenced.

```

0 #-----
0 #=Exec Version Information
0 #-----
0 EXE_VERSION=GLAS_Alt v2.0, October 2001

```

The associated library version numbers are referenced.

```

0 #-----
0 #=Common Library Version Information
0 #-----
0 LIB_VERSION=libexec V2, October 2001
0 LIB_VERSION=libplatform V2.0, October 2001
0 LIB_VERSION=libcntrl V2.0, October 2001
0 LIB_VERSION=libprod V2.0, October 2001
0 LIB_VERSION=libfile V2.0, October 2001
0 LIB_VERSION=libtime V2.0, October 2001
0 LIB_VERSION=liberr V2.0, October 2001
0 LIB_VERSION=libanc V2.0, October 2001
0 LIB_VERSION=libmath V2.0, October 2001
0 LIB_VERSION=libgeo V2.0, October 2001

```

The associated subsystem version number is referenced.

```

0 #-----
0 #=Subsystem Version Information
0 #-----
0 WF_VERSION=libwf v2.0, October 2001
0 ELEV_VERSION=libelev v2.0, October 2001

```

Ancillary files which remain resident in core are read are then closed.

```

0 STATUS= 10011, 0, ReadAnc, ReadAnc Subroutine status Start of execution
0 STATUS= 10005, 0, OpenFinFile, Opened file: (Input)
anc01_001_20000101_060000_01_00.dat
0 STATUS= 10005, 0, OpenFinFile, Opened file: (Input)
anc01_001_20000101_060000_01_02.dat

```

```

0 STATUS= 10005, 0, OpenFinFile, Opened file: (Input)
anc01_001_20000101_060000_01_04.dat
0 STATUS= 10005, 0, OpenFinFile, Opened file: (Input)
anc01_001_20000101_060000_01_03.dat
0 STATUS= 10005, 0, OpenFinFile, Opened file: (Input)
anc01_001_20000101_060000_01_01.dat
0 STATUS= 10007, 0, ReadANC, Finished reading file:
anc01_001_20000101_060000_01_00.dat
0 STATUS= 10005, 0, OpenFinFile, Opened file: (Input)
anc01_001_20000101_120000_01_00.dat
0 STATUS= 10005, 0, OpenFinFile, Opened file: (Input)
anc01_001_20000101_120000_01_02.dat
0 STATUS= 10005, 0, OpenFinFile, Opened file: (Input)
anc01_001_20000101_120000_01_04.dat
0 STATUS= 10005, 0, OpenFinFile, Opened file: (Input)
anc01_001_20000101_120000_01_03.dat
0 STATUS= 10005, 0, OpenFinFile, Opened file: (Input)
anc01_001_20000101_120000_01_01.dat
0 STATUS= 10007, 0, ReadANC, Finished reading file:
anc01_001_20000101_120000_01_00.dat
0 STATUS= 10007, 0, ReadANC, Finished reading file: anc07_001_01_00.dat
0 STATUS= 10006, 0, CloseFile, Closed file: anc07_001_01_00.dat
0 STATUS= 10007, 0, ReadANC, Finished reading file: anc07_001_01_01.dat
0 STATUS= 10006, 0, CloseFile, Closed file: anc07_001_01_01.dat
0 STATUS= 10007, 0, ReadANC, Finished reading file: anc07_001_01_03.dat
0 STATUS= 10006, 0, CloseFile, Closed file: anc07_001_01_03.dat
0 STATUS= 10015, 0, ReadANC, Initialized file information
anc08_001_20000101_000000_01_00.dat
0 STATUS= 10015, 0, ReadANC, Initialized file information
anc12_000_00_00.dat
0 STATUS= 10007, 0, ReadANC, Finished reading file: anc12_000_00_01.dat
0 STATUS= 10006, 0, CloseFile, Closed file: anc12_000_00_01.dat
0 STATUS= 50005, 0, C_LoadGeoid, IN E_GETGEOID subroutine status
0 STATUS= 10007, 0, ReadANC, Finished reading file: anc13_001_01_00.dat
0 STATUS= 10006, 0, CloseFile, Closed file: anc13_001_01_00.dat
0 STATUS= 10015, 0, ReadANC, Initialized file information
anc16_001_01_00.dat
0 STATUS= 10015, 0, ReadANC, Initialized file information
anc17_001_01_00.dat
0 STATUS= 10015, 0, ReadANC, Initialized file information
anc24_001_20000101_000000_01_00.dat
0 STATUS= 10006, 0, CloseFile, Closed file: anc27_001_01_01.dat
0 STATUS= 10011, 0, ReadAnc, ReadAnc Subroutine status End of execution

```

Parsed execution flag values are referenced.

```

0 #=-----
0 #=Execution Control Flags
0 #=-----
0 SURFACE_TYPE=Land = T
0 SURFACE_TYPE=Ocean = T
0 SURFACE_TYPE=Sea_Ice = T
0 SURFACE_TYPE=Ice_Sheet = T
0 MANAGER_EXEC=Waveform = F
0 MANAGER_EXEC=Elevation = T
0 ELEVATION_PROCESS=E_CalcLoadTD = T
0 ELEVATION_PROCESS=E_CalcOceanTD = T
0 ELEVATION_PROCESS=E_CalcEarthTD = T
0 ELEVATION_PROCESS=E_CalcPoleTD = T

```

```

0 ELEVATION_PROCESS=E_GetGeoid = T
0 ELEVATION_PROCESS=E_CalcTrop = T
0 ELEVATION_PROCESS=E_IntrpPOD = T
0 ELEVATION_PROCESS=E_CalcStdIR = T
0 ELEVATION_PROCESS=E_CalcLdIR = T
0 ELEVATION_PROCESS=E_CalcOcIR = T
0 ELEVATION_PROCESS=E_CalcSiIR = T
0 ELEVATION_PROCESS=E_CalcIsIR = T
0 ELEVATION_PROCESS=E_CalcSpLoc = T
0 ELEVATION_PROCESS=E_AtmQF = T
0 ELEVATION_PROCESS=E_CalcSlope = T
0 ELEVATION_PROCESS=E_CalcRefl = T
0 ELEVATION_PROCESS=E_ChckReg = T
0 ELEVATION_PROCESS=E_CalcRegRng = T
0 ELEVATION_PROCESS=E_CalcRegParm = T
0 ELEVATION_PROCESS=E_CalcDEM = T

```

Version information from applicable ancillary files is referenced.

```

0 #-----
0 #=Ancillary File Version Information
0 #-----
0 ANC_VERSION=ANC07 Error V2.0 October 2001
0 ANC_VERSION=ANC07 Status V2.0 October 2001
0 ANC_VERSION=ANC07 Globals v2.0 October 2001
0 ANC_VERSION=no ANC07 Atm globals read
0 ANC_VERSION=ANC07 Elev Globals v1.0 Fri Mar 10 11:2
0 ANC_VERSION=no ANC07 WF globals read
0 ANC_VERSION=no ANC07 L1A globals read
0 ANC_VERSION=
0 ANC_VERSION=Version 1.0, 04/12/2000*
0 ANC_VERSION=anc13_dem not read
0 ANC_VERSION=anc16_ltide not read
0 ANC_VERSION=anc17_otide not read

```

Execution trace proceeds. Granules are opened/closed dynamically. (this section has been edited for brevity)

```

0 #-----
0 #=Execution Status
0 #-----
0 STATUS= 10012, 0, ReadData, ReadData Subroutine status
0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc01_001_20000101_120000_01_00.dat
0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc01_001_20000101_120000_01_02.dat
0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc01_001_20000101_120000_01_04.dat
0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc01_001_20000101_120000_01_03.dat
0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc01_001_20000101_120000_01_01.dat
0 STATUS= 10006, 0, CloseFile, Closed file:
anc01_001_20000101_060000_01_00.dat
0 STATUS= 10006, 0, CloseFile, Closed file:
anc01_001_20000101_060000_01_02.dat
0 STATUS= 10006, 0, CloseFile, Closed file:
anc01_001_20000101_060000_01_04.dat
0 STATUS= 10006, 0, CloseFile, Closed file:

```

```

anc01_001_20000101_060000_01_03.dat
    0 STATUS= 10006, 0, CloseFile, Closed file:
anc01_001_20000101_060000_01_01.dat
    0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc01_001_20000101_180000_01_00.dat
    0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc01_001_20000101_180000_01_02.dat
    0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc01_001_20000101_180000_01_04.dat
    0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc01_001_20000101_180000_01_03.dat
    0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
anc01_001_20000101_180000_01_01.dat
    0 STATUS= 50006, 0, C_IntrpPOD, IN C_IntrpPOD subroutine status
    0 STATUS= 50008, 0, C_CalcSpLoc, IN C_CALCSPLOC subroutine status
    0 STATUS= 50002, 0, E_CalcOceanTD, IN E_CalcOceanTd subroutine status
    0 STATUS= 50003, 0, E_CalcEarthTD, IN E_CalcEarthTd subroutine status
    0 STATUS= 50001, 0, E_CalcLoadTD, IN E_CalcLoadTd subroutine status
    0 STATUS= 50013, 0, E_CalcTrop, IN E_CalcTrop subroutine status
    0 STATUS= 50017, 0, E_CalcDEM, IN E_CalcDEM subroutine status
    0 STATUS= 50010, 0, E_CalcSlope, IN E_CALCXSLOPE subroutine status
    0 ERROR=-50022, 2, e_calcslope, Cannot take sq. root of negative quantity
cant take square root of a negative quantity
    0 STATUS= 50021, 0, E_OceanParm, IN E_OceanParm subroutine status
.
.
.
    0 STATUS= 10007, 0, NextGranule, Finished reading file:
gla05_002_11_0001_0028_2_00_00.dat
    0 STATUS= 10006, 0, CloseFile, Closed file:
gla05_002_11_0001_0028_2_00_00.dat
    0 STATUS= 10005, 0, OpenFInFile, Opened file: (Input)
gla05_002_11_0001_0028_3_00_00.dat
    8100 STATUS= 10006, 0, CloseFile, Closed file:
gla06_002_11_0001_0028_2_00_00.dat
    8100 STATUS= 10005, 0, OpenFOutFile, Opened file: (Output)
gla06_002_11_0001_0028_3_00_00.dat
    8100 STATUS= 10005, 0, OpenFiles, Opened file: (In-
put)gla06_002_11_0001_0028_3_00_00.dat
    8100 STATUS= 10006, 0, CloseFile, Closed file:
qap06_002_11_0001_0028_2_00_00.dat
    8100 STATUS= 10005, 0, OpenFOutFile, Opened file: (Output)
qap06_002_11_0001_0028_3_00_00.dat
    8100 STATUS= 10005, 0, OpenFiles, Opened file: (In-
put)qap06_002_11_0001_0028_3_00_00.dat
.
.
.
    899590 STATUS= 50013, 0, E_CalcTrop, IN E_CalcTrop subroutine status
    899790 STATUS= 50017, 0, E_CalcDEM, IN E_CalcDEM subroutine status
    899800 STATUS= 50010, 0, E_CalcSlope, IN E_CALCXSLOPE subroutine status
    0 STATUS= 10007, 0, NextGranule, Finished reading file:
gla05_002_11_0001_0043_4_00_00.dat
    0 STATUS= 10006, 0, CloseFile, Closed file:
gla05_002_11_0001_0043_4_00_00.dat
    899990 STATUS= 10006, 0, CloseFile, Closed file:
gla06_002_11_0001_0043_4_00_00.dat
    899990 STATUS= 10006, 0, CloseFile, Closed file:
qap06_002_11_0001_0043_4_00_00.dat

```

```

899990 STATUS= 10006, 0, CloseFile, Closed file:
gla12_002_11_0001_0043_0_00_00.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
gla13_002_11_0001_0043_0_00_00.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
gla14_002_11_0001_0043_0_00_00.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
gla15_002_11_0001_0043_0_00_00.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
gap12_002_11_0001_0043_0_00_00.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
gap13_002_11_0001_0043_0_00_00.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
gap14_002_11_0001_0043_0_00_00.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
gap15_002_11_0001_0043_0_00_00.dat
899990 STATUS= 10013, 0, exec_lib, MainWrap Subroutine status Start of execu-
tion

```

An summary of input files/records is created. (this section has been edited for brevity)

```

899990 STATUS= 10013, 0, exec_lib, MainWrap Subroutine status Start of execu-
tion
899990 #=-----
899990 #=Input/Output Wrapup Summary
899990 #=-----
899990 INPUT_SUMMARY=gla05_002_11_0001_0028_2_00_00.dat: read 810 records
899990 INPUT_SUMMARY=gla05_002_11_0001_0028_3_00_00.dat: read 1287 records
899990 INPUT_SUMMARY=gla05_002_11_0001_0028_4_00_00.dat: read 1616 records
899990 INPUT_SUMMARY=gla05_002_11_0001_0029_1_00_00.dat: read 1281 records
899990 INPUT_SUMMARY=gla05_002_11_0001_0029_2_00_00.dat: read 1616 records
899990 INPUT_SUMMARY=gla05_002_11_0001_0029_3_00_00.dat: read 1287 records
899990 INPUT_SUMMARY=gla05_002_11_0001_0029_4_00_00.dat: read 1617 records
899990 INPUT_SUMMARY=gla05_002_11_0001_0030_1_00_00.dat: read 1281 records
899990 INPUT_SUMMARY=gla05_002_11_0001_0030_2_00_00.dat: read 1616 records
899990 INPUT_SUMMARY=gla05_002_11_0001_0030_3_00_00.dat: read 1287 records
899990 INPUT_SUMMARY=gla05_002_11_0001_0030_4_00_00.dat: read 1617 records
899990 INPUT_SUMMARY=gla05_002_11_0001_0031_1_00_00.dat: read 1280 records
.
.
.
899990 INPUT_SUMMARY=anc17_001_01_00_00.dat: read 0 records
899990 INPUT_SUMMARY=anc24_001_20000101_000000_01_00_00.dat: read 0 records
899990 INPUT_SUMMARY=anc27_001_01_00_00.dat: read 0 records
899990 INPUT_SUMMARY=anc27_001_01_01_00_00.dat: read 0 records

```

An summary of output files/records is created. (this section has been edited for brevity)

```

899990 OUTPUT_SUMMARY=gla06_002_11_0001_0028_2_00_00.dat: wrote 811 records
899990 OUTPUT_SUMMARY=gla06_002_11_0001_0028_3_00_00.dat: wrote 1288 records
899990 OUTPUT_SUMMARY=gla06_002_11_0001_0028_4_00_00.dat: wrote 1617 records
899990 OUTPUT_SUMMARY=gla06_002_11_0001_0029_1_00_00.dat: wrote 1282 records
899990 OUTPUT_SUMMARY=gla06_002_11_0001_0029_2_00_00.dat: wrote 1617 records
899990 OUTPUT_SUMMARY=gla06_002_11_0001_0029_3_00_00.dat: wrote 1288 records
899990 OUTPUT_SUMMARY=gla06_002_11_0001_0029_4_00_00.dat: wrote 1618 records
899990 OUTPUT_SUMMARY=gla06_002_11_0001_0030_1_00_00.dat: wrote 1282 records
899990 OUTPUT_SUMMARY=gla06_002_11_0001_0030_2_00_00.dat: wrote 1617 records
899990 OUTPUT_SUMMARY=gla06_002_11_0001_0030_3_00_00.dat: wrote 1288 records
.

```

```

899990 OUTPUT_SUMMARY=qap14_002_11_0001_0029_0_00_00.dat: wrote 0 records
899990 OUTPUT_SUMMARY=qap14_002_11_0001_0043_0_00_00.dat: wrote 0 records
899990 OUTPUT_SUMMARY=qap15_002_11_0001_0015_0_00_00.dat: wrote 0 records
899990 OUTPUT_SUMMARY=qap15_002_11_0001_0029_0_00_00.dat: wrote 0 records
899990 OUTPUT_SUMMARY=qap15_002_11_0001_0043_0_00_00.dat: wrote 0 records

```

An summary of error/status messages is created. (this section has been edited for brevity)

```

899990 #=-----
899990 #=Status/Error Wrapup Summary
899990 #=-----
899990 ERROR_SUMMARY= 2833426 Cannot take sq. root of negative quantity
899990 STATUS_SUMMARY= 356 Opened file:
899990 STATUS_SUMMARY= 244 Closed file:
899990 STATUS_SUMMARY= 68 Finished reading file:
899990 STATUS_SUMMARY= 1 ReadAnc Subroutine status
899990 STATUS_SUMMARY= 89693 ReadData Subroutine status
899990 STATUS_SUMMARY= 1 MainWrap Subroutine status
899990 STATUS_SUMMARY= 5 Initialized file information
899990 STATUS_SUMMARY= 358731 In E_CalcLoadTd subroutine status
899990 STATUS_SUMMARY= 179370 IN E_CalcOceanTd subroutine status
899990 STATUS_SUMMARY= 179370 IN E_CalcEarthTd subroutine status
899990 STATUS_SUMMARY= 179371 IN E_GETGEOID subroutine status
899990 STATUS_SUMMARY= 3587400 IN C_IntrpPOD subroutine status
899990 STATUS_SUMMARY= 13915989 IN C_CALCSPLOC subroutine status
899990 STATUS_SUMMARY= 2838356 IN E_CALC_SLOPE subroutine status
899990 STATUS_SUMMARY= 3587215 IN E_CalcTrop subroutine status
899990 STATUS_SUMMARY= 8425624 IN E_CalcDEM subroutine status
899990 STATUS_SUMMARY= 1024984 IN E_LandParm subroutine status
899990 STATUS_SUMMARY= 2557848 IN E_OceanParm subroutine status

```

Any remaining open files are closed.

```

899990 STATUS= 10013, 0, exec_lib, MainWrap Subroutine status End of execution
899990 STATUS= 10014, 0, exec_lib, CloseFiles Subroutine status Start of execution
899990 STATUS= 10006, 0, CloseFile, Closed file:
anc01_001_20000102_120000_01_00.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
anc01_001_20000102_180000_01_00.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
anc01_001_20000102_120000_01_02.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
anc01_001_20000102_180000_01_02.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
anc01_001_20000102_120000_01_03.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
anc01_001_20000102_180000_01_03.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
anc01_001_20000102_120000_01_04.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
anc01_001_20000102_180000_01_04.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
anc01_001_20000102_120000_01_01.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
anc01_001_20000102_180000_01_01.dat
899990 STATUS= 10006, 0, CloseFile, Closed file:
anc08_001_20000101_000000_01_00.dat

```

```
      899990 STATUS= 10006, 0, CloseFile, Closed file:
anc09_001_20000101_000000_01_00.dat
      899990 STATUS= 10006, 0, CloseFile, Closed file: anc12_000_00_00.dat
      899990 STATUS= 10006, 0, CloseFile, Closed file: anc16_001_01_00.dat
      899990 STATUS= 10006, 0, CloseFile, Closed file: anc17_001_01_00.dat
      899990 STATUS= 10006, 0, CloseFile, Closed file:
anc24_001_20000101_000000_01_00.dat
      899990 STATUS= 10006, 0, CloseFile, Closed file: anc27_001_01_00.dat
      899990 STATUS= 10014, 0, exec_lib, CloseFiles Subroutine status End of execu-
tion
```


Appendix D

GSAS Error and Status Codes

This section lists errors and possible solutions for each error defined in GSAS.

D.1 General Errors

-10001 Error Opening File for Input:

The operating system was unable to open the specified input file. Verify that the requested file exists in (or is correctly linked into) the current directory. Verify the spelling of the filename within the control file (filenames are case-sensitive). Verify that the user has read permission on the file.

-10002 No control file specified.

A control file must be specified as a command-line argument when GLAS_Exec is executed. If a control file was specified, then perform the following verification steps: Verify that the control file exists in (or is correctly linked into) the current directory. Verify that the user has read permission on the control file.

-10003 Bad rec_ndx in control file.

A bad start or stop time was specified in the control file. The start/stop times are fractional numbers representing UTC seconds. The times must contain only digits and the decimal point.

-10004 Stop rec_ndx > start rec_ndx.

A start time which was chronologically greater than the stop time was found in the control file. Start times must be less than stop times.

-10005 Previous granule stop > current start.

Multiple granules of the same type were specified in the control file. The start time of a previous granule was chronologically greater than the stop time of the current granules. Multiple granules of the same type must not have time spans which overlap within the same control file. The granules must be entered in the control file in chronological order.

-10006 Error Opening File for Output:

The operating system was unable to open the specified output file. Verify that the requested file does not already exist in (or is correctly linked into) the current directory. Verify that the user has write permission on the current directory.

-10007 Error Closing File:

The operating system returned an error code when attempting to close a file. Verify that opened files were not moved from the current directory while GLAS_Exec was running. This is an unusual error and would normally indicate a programming error.

-10008 Error Reading File:

The operating system returned an error code when attempting to read a file. Verify that files listed in the control file are present and accessible in the current directory. This is an unusual error and would normally indicate a programming error or a corrupt input file.

-10009 Error Writing File:

The operating system returned an error code when attempting to write a file. Verify that files listed in the control file are present and accessible in the current directory. This is an unusual error and would normally indicate a programming error or a full file system.

-10010 Error Reading ANC07:

The operating system returned an error code when attempting to read the specified ANC07 file. Verify that the ANC07 files listed in the control file are present and accessible in the current directory. If all files are present, this indicates corruption in the ANC07 file. Appendix B describes the format of ANC07 files. verify the ANC07 file contents.

-10011 Unknown Keyword in ANC07:

The ANC07 file reader has found a keyword it does not recognize in the ANC07 file. This usually indicates corruption in the ANC07 file. Appendix B lists recognized ANC07 keywords. Verify the ANC07 file contents.

-10012 Multiple single-instance keywords:

The control file parser has detected multiple instances of single-instance keywords in the control file. Appendix C details single and multiple-instance keywords in the control file. Verify the control file contents.

-10013 Multiple-instance keyword limit exceeded:

The control file parser has detected that the number of instances of a multiple-instance keyword has been exceeded. Verify the control file contents.

-10014 Unrecognized line in control file:

The control file parser has found a line in the control file which it does not recognize. Appendix C details the format of the control file. Verify the control file contents.

-10015 Unknown value in keyword/value pair:

The control file parser has found a line in the control file with a value it does not recognize. Certain keywords are required to have only certain values. Appendix C lists possible values within the control file. Verify the control file contents.

-10016 I/O Error Opening Control File:

The operating system was unable to open the specified control file. Verify that the requested file exists in (or is correctly linked into) the current directory. Verify the spelling of the filename on the command line. Verify that the user has read permission on the file.

-10017 Error Reading Control File:

The operating system returned an error code when attempting to read the control file. Verify that the control file is present and accessible in the current directory. This is an unusual error and would normally indicate a programming error or a corrupt control file.

-10018 Specified Unknown File Type:

An unknown file type was specified in the control file. A file type is represented by the first 5 characters of the filename. Appendix A lists recognized GLAS file types. Verify the control file.

-10019 GLA01 Unknown Record Type

An unknown record type was found within the GLA01 file. Valid record types are header, body, long and short. This error indicates a corrupt GLA01 file or a program error.

-10020 GLA01 Exceeded Waveform Record Limit

The number of waveform records per second was exceeded in the GLA01 file. This error indicates a corrupt GLA01 file or a program error.

-10021 GLA00 Unknown APid

An unknown APID was detected in the GLA00 data. This error indicates corrupt GLA00 data.

-10022 GLA00 Wrong APid

This error indicates that the expected APID number was not found in the file being read. This error indicates corrupt GLA00 data.

-10023 Max APIDs per sec exceeded

This indicates that the maximum number of APIDs per second has been exceeded. This error indicates corrupt GLA00 data.

-10024 Data Time < Granule Start Time

This indicates that data was lost because the time of the current record is less than the start time of the current granule. Verify the start and stop times in the control file.

-10025 Error Reading Standard Atmosphere file header

An error was detected reading the Standard Atmosphere file header. This indicates a corrupt Standard Atmosphere file.

-10026 Error Reading Standard Atmosphere file data

An error was detected reading the Standard Atmosphere file data. This indicates a corrupt Standard Atmosphere file.

-10027 Error Reading Global Aerosol map

An error was detected reading the Global Aerosol file data. This indicates a corrupt Global Aerosol file.

-10028 Error Reading Aerosol Troposphere map

An error was detected reading the Aerosol troposphere file data. This indicates a corrupt Aerosol Troposphere map file.

-10029 Duplicate APID found

An error was detected when duplicate APID records were found while processing GLA00 APID data. A duplicate APID is defined as one having the same APID number and same mission elapsed time.

-10030 EOF or Error Reading ANC33

An error was detected while reading the ANC33 file. Verify that the file exists and has the correct format.

-10031 Exceeded maximum GLA00 index entries

The number of GLA00 index entries in the ANC29 file exceeded the maximum allowed. Contact the GSAS Development team.

-10032 Non-zero version in APID Primary Hdr

An inconsistency was detected in an APID primary header field. This is most likely due to a corrupt APID file.

-10033 Mismatched APID numbers in phdr and file

An error was detected when verifying that the APID number within the APID data did not match the expected APID number designated by the file type. This is most likely due to a corrupt APID file.

-10034 Flag indicates no secondary header in APID

An error was detected when checking the secondary header flag within the APID data. This is most likely due to a corrupt APID file.

-10035 Gap in APID sequence count

A gap was detected in the APID sequence count. This most likely indicates missing data or a corrupt APID file.

-10036 Mismatch in APID lengths

A mismatch was detected when verifying the APID length field within the secondary header against the expected APID length, based on the file type of the APID. This is most likely due to a corrupt APID file.

-10037 GPS Delta time exceeds limit

The time between consecutive GPS updates exceeds a preset limit. This is most likely due to missing data.

-10038 Inconsistent APID shot count

The APID shot counts are inconsistent. This indicates that the APID alignment process may not work correctly. Contact the GSAS Development Team.

-10039 Overflowed number of reserved header records

This indicates the number of product header records has exceeded the expected number of product header records. The product header records may be incomplete. Contact the GSAS Development Team.

-10040 Reference Orbit File is empty

This indicates the reference orbit file is corrupt.

-10041 Did not find desired rev in rev file

This indicates that data time is not within the predicted orbit file.

-10042 Granule time not within Ref Orb file

This indicates that data time is not accounted for in the reference orbit id table.

-10043 Undefined Segment type

This indicates an error in routine while determining segment type.

-10044 Error running CreateGran_util

This indicates that the utility terminated abnormally. An error code will be generated where the error occurred.

-10045 Time error: current < previous

This error indicates that time has moved backwards. This indicates a corrupt APID or product file.

-10046 Error returned from script

An error was returned from the SDMS_met_script. This is most likely due to a corrupt ANC40 file.

-10047 File naming conventions do not match

met_util has detected that the file naming conventions do not match when comparing the names of the ANC40 and ANC01 files.

-10048 Unknown header keyword

This indicates that the processing has detected a header keyword which was not expected. This may indicate lack of the appropriate input ANC45 file or a corrupted product file.

-10049 APID record edited. Shot count > limit

This indicates that a sanity check of the APID has detected a shot counter whose value is out of the nominal range (0-200). This normally indicates bad APID data. The APID record in question was removed from processing.

-10050 GLA00 time/rec_ndx inconsistency

This indicates that an inconsistency was detected in the relationship between UTCtime and the unique record index.

-10051 Control File Sanity Check Violation

This indicates that a sanity-check rule was violated and the error is determined fatal.

-10052 Shot_cnt inconsistency between GLA00 and ANC29

This indicates a potential corrupted ANC29. The shot counts do not match between corresponding records of GLA00 and ANC29.

-10053 cksum does not match for GLA00 file

This indicates that checksums recorded in ANC29 do not match those computed for the input GLA00. The ANC29 file and GLA00 data are mismatched.

-10054 Output time inconsistency

This indicates that inconsistency has been detected between the previous output time and the current output time.

-10055 Control File Sanity Check Warning

This indicates that a sanity-check rule was violated, but the error is not determined fatal.

-10056 Skipped EDOS-filled record

This indicates that an input GLA00 record was skipped because of the corresponding EDOS fill flag.

-10057 Cannot calculate NOSE info - L/L outside bounds

This indicates that the current position is outside the expected NOSE range.

-10058 Error processing NOSE info

This indicates that an error occurred while processing NOSE information.

-10059 Error creating HDF-EOS swath (he5_swcreate)

Not used.

-10060 Error detaching HDF-EOS swath (he5_swdetach)

Not used.

-10061 Error in ANC45 metadata file

This indicates that an inconsistency was detected between the input file headers and the ANC45 information.

-10062 Error filling HDF-EOS file

Not used.

-10063 Unknown HDF-EOS data type

Not used.

D.1.1 L1A Errors**-20001 Error reading PAD data Eng data**

No Used.

-20002 Error reading PAD data Eng data

Not Used.

-20003 Background value out of range

If background value is outside of threshold limits, lidar values are set to invalid and lidar quality flag is set to 3.

-20004 Energy value out of range

If transmitted energy value is less than threshold value, lidar values are set to invalid.

-20005 Large number bad lidar values within profile

If the number of lidar values, within a profile, that fall outside of threshold limits exceeds a certain number, then the lidar values are set to invalid.

-20006 APID not available - no atm processed

Either the ancillary science packet data are unavailable or both the photon science packet and the cloud digitizer packet data are unavailable for the record. No L1A atmosphere data are processed and invalid values are written to GLA02.

-20007 APID not available - atm processed

Either the photon science packet data or the cloud digitizer packet data are unavailable for the record. Available L1A atmosphere data are processed. Unavailable values given invalid values on GLA02.

-20008 Range value out of range

If range to start of profile value is outside of threshold limits, a default value is used.

-20009 Attenuation setting ≤ 0 , set to 1

If the attenuation setting is less than 1, it is set equal to 1.

-20010 1064 computed transmit energy unavailable

If the 1064 nm transmitted energy is not available, a default value is used.

-20011 No ANC32 data available

No ANC32 data are available for processing. Verify the correctness of the control file.

-20012 No ANC33 data available

No ANC33 data are available for processing. Verify the correctness of the control file.

-20013 No ANC25 data available

No ANC25 data are available for processing. Verify the correctness of the control file.

-20014 Current number of seconds exceeds max number

Not used.

-20015 Using estimated shot time

Shot time is being estimated instead of calculated. This is most likely due to a missing APID19 record.

-20016 Filter number exceeds limit

This indicates that the filter number in APID19 exceeds the physical number of filters. This indicates bad APID19 data.

-20017 Time inconsistency

This error indicates that the precise time computed in shot_time_mod differs from the estimated time computed using the MET counter by greater than one second. This could be due to bad data or bad ANC33/ANC25 entries.

-20018 No LRS alignment for entire record

This error indicates that an entire record of LRS data could not be aligned with the correct APID19. The LRS data are lost and were not written to GLA04. This error could be caused by missing APID19 data or a timing problem.

-20019 No IST alignment for entire record

This error indicates that an entire record of IST data could not be aligned with the correct APID19. The IST data are lost and were not written to GLA04. This error could be caused by missing APID19 data or a timing problem.

-20020 No LRS alignment for shot

This error indicates that a 1/10 second shot of LRS data could not be aligned with the correct APID19 shot. The LRS data are lost and were not written to GLA04. This error could be caused by missing APID19 data or a timing problem.

-20021 No IST alignment for shot

This error indicates that a 1/10 second shot of IST data could not be aligned with the correct APID19 shot. The IST data are lost and were not written to GLA04. This error could be caused by missing APID19 data or a timing problem.

-20022 No LRS alignment for image

This error indicates that an LRS image could not be aligned with the correct APID19 shot. The image data are lost and were not written to GLA04. This error could be caused by missing APID19 data or a timing problem.

-20023 Not enough SPCMs enabled

One or no SPCMs are enabled. That is not enough to collect valid science data therefore no atmosphere processing is performed for this second.

-20024 Exceeded max number of instrument states

This indicates that the number of instrument changes exceeded a maximum value.

-20025 Instrument State Changed

This indicates that a change in instrument state was detected.

-20026 Deleted IST frame

This indicates that an IST frame was deleted by the realignment process.

-20027 d_cal_c_tx zero in C_CalctNrg

This indicates that the transmit energy for this shot is invalid.

-20028 d_cal_c_rec zero in C_CalcrNrg

This indicates that the received energy for this shot is invalid.

-20029 Engineering Value above Yellow High Limit

This indicates the engineering data is above the yellow high limit and the data associated with the time of the alarm is suspect for science use.

-20030 Engineering Value below Yellow Low Limit

This indicates the engineering data is below the yellow low limit and the data associated with the time of the alarm is suspect for science use.

-20031 Engineering Value above Red High Limit

This indicates the engineering data is above the red high limit and the data associated with the time of the alarm is outside of engineering data specifications.

-20032 Engineering Value below Red Low Limit

This indicates the engineering data is below the red low limit and the data associated with the time of the alarm is outside of engineering data specifications.

-20033 Actual > Expected numrecs in QAP03

The actual number of records read by QAP03 for the APID is more than expected; this is a warning.

-20034 Reinitialized due to delta_t > siru_max_diff

This indicates that a synchronization reset occurred in the IST/LRS processing code.

-20035 Incremented number of rolls

This indicates that a rollover even was detected in the IST/LRS processing code.

-20036 Swapping LRS VT2->VT0

This indicates that within the LRS telemetry the virtual tracker 2 data was swapped with the virtual tracker 0 data and the ground processing unswapped the data.

-20037 Swapping LRS VT1->VT0

This indicates that within the LRS telemetry the virtual tracker 1 data was swapped with the virtual tracker 0 data and the ground processing unswapped the data.

-20038 Insufficient ANC32 records in file

This indicates that time tagging failed because of an insufficient number of ANC32 records.

D.2 Waveform Errors**-30001 Singular Matrix**

Matrix inversion performed as part of the least squares fitting of a waveform to a Gaussian has yielded a singular matrix, and no solution is available.

-30002 Number of peaks found greater than max

The number of peaks found compounded within a single returned waveform exceeds the max number allowable.

-30003 No signal

Not used.

-30004 Standard deviation is zero

Not used.

-30005 Bad Frame

Not used.

-30006 Error from C_InterpPOD

Not used.

-30007 Error from C_CalcSpLoc

Not used.

-30008 Error from WF_Mgr

Filter number exceeds known values. It is less than 1 or greater than 6. Probable data error.

-30009 W_Estimates, Underflow creating DEXP values

not used

-30010 WFMgr, Inconsistent Compression Parameters.

Compression parameters are inconsistent. Input parameters have not been defined consistently. Probable error in telemetry.

-30011 GLA05_scal_mod, Overflow in sigma computation.

This implies that the errors of the parameters solved for with the Gaussian fit are not within acceptable bounds.

-30012 QAP file write error on Packet data

Write error encountered while writing a record of 16-second processing packet data to the QAP file. Possible system-related error.

-30013 QAP file write error on Summary data

Write error encountered while writing a record of granule summary data to the QAP file. Possible system-related error.

-30014 W_CalcReflect, Illegal value trans energy pulse.

An unphysical value for the energy of the transmitted pulse exists, and is equal to or less than

0.0 joules. Reflectance is set to default to avoid division by zero and/or an unphysical computation.

-30015 GLA05_scal_mod, Overflow in reflectivity comp

This implies that values used in the reflectivity calculation are outside bounds.

-30016 WFMgr_mod, Indeterminate waveform type

Flag that identifies a waveform as short vs. long cannot be properly retrieved. Probable data error or missing data.

-30017 W_ParamWithFit, d_bg_Noise/d_sDevNoise invalid

-30018 W_ParamWithFit, d_bg_Noise/d_sDevNoise invalid

This indicates that an otherwise valid waveform has an invalid value for the observed noise and/or the standard deviation of the observed noise.

-30019 WFMgr, anc33 file required

Not used.

-30020 WFMgr, Instrument State Invalid

This indicates that the instrument state is invalid in C_SetCalibVars.

-30021 WFMgr, De-allocation error for QA arrays

This indicates that there was an error during deallocation of the QA arrays.

D.3 Atmosphere Errors

Subsystem errors and corrective action will be fully documented in V2 of this document.

-40001 DEM out-of-bounds

If the DEM value is invalid or outside of threshold limits, do not process record.

-40002 532 integrated return flag poor or bad

If the 532 nm integrated return flag indicates that the 532 nm lidar data are poor, the 1 Hz backscatter quality flag is set to 1.

-40003 Ratio of integrated returns out-of-bounds

If the ratio of the 532 nm integrated return / molecular integrated return is outside of threshold limits, then the 1 Hz backscatter quality flag is set to 1.

-40004 Large num bad recs not incl in data

Not used.

-40005 Excessive num bad recs not incl in data

Not used.

-40006 Time between recs greater than threshold

Not used.

-40007 Divide by zero

If the denominator value is 0, set it to a default value.

-40008 Exponent too large

If the exponent value exceeds a certain threshold limit, set the exponent to that limit.

-40009 Index beyond gi_cld_lays

Not used.

-40010 Index beyond gi_pb_aer_lays

Not used.

-40011 Deficient 532 laser energy flag

If the 532 nm energy laser flag indicates that the 532 nm transmitted laser energy is deficient, the 532 nm backscatter quality flag is set to 1.

-40012 Deficient 1064 laser energy flag

If the 1064 nm energy laser flag indicates that the 1064 nm transmitted laser energy is deficient, the 1064 nm backscatter quality flag is set to 1.

-40013 Excess num cloudy recs not incl in data

Not used.

-40014 PBL signal ratio less than zero

Not used.

-40015 Input PBL height out-of-bounds

If PBL height value is outside threshold limits, calculate PBL height as height of maximum profile signal.

-40016 Aerosol signal ratio less than zero

Not used.

-40017 Insufficient filtered data for processing

If the number of valid backscatter values averaged over a period of time is below a certain percentage, then data is not processed for that time span. This affects PBL and aerosol detection.

-40018 Random noise not valid for cloud detection

If at least two backscatter values are not available to calculate a standard deviation, then the random noise is set to invalid.

-40019 Too many bad locations

This error is for met interpolation only. If the input latitude or longitude value is invalid, use last saved value. If the number of invalid values exceeds a threshold limit, this error is called.

-40020 PBL QA array index beyond array size

If the PBL height QA array is indexed by a number greater than the array dimension, no more data is added to the array.

-40021 Invalid lat/lon from GLA07

This error is for the atmosphere manager only. If control flags are set to skip POD processing and the latitude or longitude value from GLA07 is invalid, processing stops.

-40022 Invalid DEM from GLA07

This error is for the atmosphere manager only. If control flags are set to skip POD processing and the DEM value from GLA07 is invalid, the DEM value is set to 0.0.

-40023 Input product is not GLA02

Not used.

-40024 Invalid value written to ancillary file

This error is for the atmosphere utility only. If a certain percentage of lidar values within a time segment are invalid, an invalid average is written to the anc36 file for the segment. This message may be seen often if there were clouds present when the data were collected.

-40025 Array index is greater than size allowed

If an array is indexed by a number greater than the array dimension, processing stops. Check the array dimension in the atmosphere constants file and increase if necessary.

-40026 No ANC36 data for current granule

If there is no ANC36 file for the current granule, then atmosphere backscatter processing stops.

-40027 Cal cof avg is invalid after elim tests

If the calibration coefficient is invalid after the elimination tests, use the original average taken before the tests and set the calibration coefficient quality flag to 2.

-40028 ANC36 current granule data is in first structure

ANC36 data for the current granule are expected in the second structure and data for the previous granule are expected in the first structure. If data for the current granule are in the first structure, processing may continue, but data for the previous granule are not available.

-40029 Matrix singularity in polynomial fit routine

Not used.

-40030 less than 3 cal constants for least sqrs fit

Not used.

-40031 GLA10_scal_mod, Overflow in aerosol bs compute

Values for GLA10%d_aer4_bs_prof and/or GLA10%d_cld1_bs_prof are not invalid, but they are also not within an acceptable and expected range of values and will result in an overflow of a conversion computation in the scal module. An atmospheric scientist should evaluate this data.

-40032 GLA10_scal_mod, Overflow in aerosol prof compute

Values for GLA10%d_cld1_ext_prof and/or GLA10%d_aer4_ext_prof are not invalid, but they are also not within an acceptable and expected range of values and will result in an overflow of a conversion computation in the scal module. An atmospheric scientist should evaluate this data.

D.4 Elevation Errors

-50001 Error reading met height file

An error was detected reading the meteorological height file. This indicates a corrupt met height file.

-50002 Error reading met temperature file

An error was detected reading the meteorological temperature file. This indicates a corrupt met temperature file.

-50003 Error reading met relative humidity file

An error was detected reading the meteorological relative humidity file. This indicates a corrupt met relative humidity file.

-50004 Error reading met precip water table file

An error was detected reading the meteorological precip water file. This indicates a corrupt met precip water file.

-50005 Elevation more than max pressure level ht

The elevation is higher than the maximum pressure level height. This indicates elevation is suspect.

-50006 Max Iterations exceeded in ODE calcs.

This indicates that the data is suspect.

-50007 Step size underflow in BS-step method

This indicates that the data is suspect.

-50008 Value of cosine GT 1.0 in Geoloc

The cosine of angle is greater than 1. Most probably due to round-off errors in calculation.

-50009 Value of cosine LT -1.0 in Geoloc

The cosine of angle is greater than 1. Most probably due to round-off errors in calculation.

-50010 Max Iterations exceeded in Geoloc

This occurs when number of iterations exceeds preset limits. This indicates data is suspect.

-50011 POD file structure is empty

This occurs when POD file structure is not loaded from control file. Need to check if control file contains ANC08 or ANC20 input file.

-50012 Time not within vals in POD file structure

This occurs when data time is not within time range in the POD file structure. Need to check if correct start/stop times are entered in control file for the ANC08/ANC20 files.

-50013 Error reading 10 consec recs in POD file

This occurs when data time is past the last time in the ANC08/ANC20 file.

-50014 Error reading Load Tide coeffs file

An error was detected reading the load tide coefficients file. This indicates a corrupt load tide coefficients file.

-50015 Error reading Geoid coeffs file

An error was detected reading the geoid file. This indicates a corrupt geoid file.

-50016 Error reading DEM file

An error was detected reading the DEM file. This indicates a corrupt DEM file.

-50017 Error reading 1 deg Ocean Mask file

An error was detected reading the ocean mask file. This indicates a corrupt ocean mask file.

-50018 Size of ocean td array must be increased

Error in legacy code. Need to refer to Richard Ray's GOT00 documentation.

-50019 Likely error in Check1 of legacy ocean td

Error in legacy code. Need to refer to Richard Ray's GOT00 documentation.

-50020 Lat/Lon out of bounds in legacy ocean td

Error in legacy code. Need to refer to Richard Ray's GOT00 documentation.

-50021 Increase dimensions in call to UTCSRI

Error in legacy code. Need to refer to Richard Ray's GOT00 documentation.

-50022 Cannot take sq. root of negative quantity

This indicates data is suspect.

-50023 Bad Frame flag set in E_SeaIceParm (rem)

Not used.

-50024 Bad Frame flag set in E_LandParm (rem)

Not used.

-50025 Bad Frame flag set in E_OceanParm (rem)

Not used.

-50026 Bad Frame flag set in E_CalcSlope (rem)

Not used.

-50027 Bad Frame flag set in E_CalcRange (rem)

Not used.

-50028 Geopotential Ht > max rel hum ht

The geopotential height is more than the maximum height for relative humidity. The relative humidity is set to zero.

-50029 ROT file structure is empty

This occurs when ROT matrix file structure is not loaded from control file. Need to check if control file contains ANC24 input file.

-50030 Time not within vals in ROT file structure

This occurs when data time is not within time range in the ROT file structure. Need to check if correct start/stop times are entered in control file for the ANC24 files.

-50031 Error reading recs in ROT file

This indicates a corrupt ROT file.

-50032 Invalid input POD value in c_calcsoloc

This indicates that data could not be geolocated because the POD value is invalid.

-50033 Error reading fine Surface Type file

An error has occurred reading the ANC27_00 file. This indicates a corrupt 2min x 2min ANC27 file.

-50034 Error reading coarse Surface Type file

An error has occurred reading the ANC27_01 file. This indicates a corrupt 1deg x 1deg ANC27 file.

-50035 LAT/LON out of bounds in coarse surf type

The latitude/longitude is not within the lat/lon boundaries. This indicates that data is suspect.

-50036 LAT/LON out of bounds in fine surf type

The latitude/longitude is not within the lat/lon boundaries. This indicates that data is suspect.

-50037 Fine surface type grid index out of bounds

This indicates that data is suspect.

-50038 Unreasonable values for POD degradation

This indicates that input values of orbit degradation and/or supplemental descriptive information obtained from the header of the orbit file are not valid values. This could indicate the wrong file, a corrupted file, or bad parameters entered when the file was created. Consult the originator of the file for an explanation of the problem.

-50039 Unreasonable values for PAD degradation

This indicates that input values of attitude degradation and/or supplemental descriptive information obtained from the header of the attitude file are not valid values. This could indicate the wrong file, a corrupted file, or bad parameters entered when the file was created. Consult the originator of the file for an explanation of the problem.

-50040 I_WFqual(gwi_noFit2,:) not properly set

Not used.

-50041 Reading ANC04 header rec instead of data rec

Not used.

-50042 ANC04 GPSMJD not eq to data MJD

Not used.

-50043 Read Error on Track Record

This indicates that SRTM track file had a read error, possibly caused by its absence in the control file.

-50044 superceeded

Not used.

-50045 Time Exceeds Bounds of Reference Orbit Track

This indicates that a time outside the recognized bounds of an SRTM track file was used when trying to access the track file.

-50046 Attempt to update QA with invalid data

Not used.

-50047 Error reading anc52xx file

This indicates that there was an I/O error during the reading of an anc52xx file, or that necessary information was missing from the header.

-50048 Pass Data Not Available When Seeking Track Number

This indicates that pass information containing the track number was unavailable to be matched to a read of an SRTM track file, where track number matching is required before data can be accessed.

D.5 HP Runtime Error Codes

This section provides a list of HP runtime error codes. These codes are taken directly from *HP Fortran 90 Programmers Reference; Product Number: B3909DB; Fortran 90 Compiler for HP-UX; Document Number: B3908-90002; October 1998*.

Error No.	Error Message	Description	Action
900	ERROR IN FORMAT	FORMAT statement syntax contains an error.	Refer to the syntax for "FORMAT" on page 330. Also see Chapter 8, "I/O and file handling," on page 171 for the syntax of the format specification and edit descriptors.
901	NEGATIVE UNIT NUMBER SPECIFIED	Unit number was not greater than or equal to zero.	Use a non-negative unit number.
902	FORMATTED I/O ATTEMPTED ON UNFORMATTED FILE	Formatted I/O was attempted on a file opened for unformatted I/O.	Open the file for formatted I/O or perform unformatted I/O on this file. ⁹
903	UNFORMATTED I/O ATTEMPTED ON FORMATTED FILE	Unformatted I/O was attempted on a file opened for formatted I/O.	Open the file for unformatted I/O or perform formatted I/O on this file.
904	DIRECT I/O ATTEMPTED ON SEQUENTIAL FILE	Direct operation attempted on sequential file, direct operation attempted on opened file connected to a terminal.	Use sequential operations on this file, open file for direct access, or do not do direct I/O on a file connected to a terminal.
905	ERROR IN LIST-DIRECTED READ OF LOGICAL DATA	Found repeat value, but no asterisk. First character after optional decimal point was not T or F.	Change input data to correspond to syntax expected by list-directed input of logicals, or use input statement that corresponds to syntax of input data.

Error No.	Error Message	Description	Action
907	ERROR IN LIST-DIRECTED READ OF CHARACTER DATA	Found repeat value, but no asterisk. Characters not delimited by quotation marks.	Change input data to correspond to syntax expected by list-directed input of characters, or use input statement that corresponds to syntax of input data.
908	COULD NOT OPEN FILE SPECIFIED	Tried to open a file that the system would not allow for one of the following reasons: access to the file was denied by the file system due to access restriction; the named file does not exist; or the type of access request is impossible.	Correct the pathname to open the intended file.
909	SEQUENTIAL I/O ATTEMPTED ON DIRECT ACCESS FILE	Attempted a BACKSPACE, REWIND, or ENDFILE on a terminal or other device for which these operations are not defined.	Do not use the BACKSPACE, REWIND, and ENDFILE statements.
910	ACCESS PAST END OF RECORD ATTEMPTED	Tried to do I/O on record of a file past beginning or end of record.	Perform I/O operation within bounds of the record, or increase record length.
912	ERROR IN LIST I/O READ OF COMPLEX DATA	While reading complex data, one of the following problems has occurred: no left parenthesis and no repeat value; repeat value was found but no asterisk; or no closing right parenthesis.	Change input data to correspond to syntax expected by list-directed input of complex numbers, or use input statement corresponding to syntax of input data.
913	OUT OF FREE SPACE	Library cannot allocate an I/O block (from an OPEN statement), parse array (for formats assembled at run-time), file name string (from OPEN) characters from list-directed read, or file buffer. The program may be trying to overwrite a shared memory segment defined by another process.	Allocate more free space in the heap area, open fewer files, use FORMAT statements in place of assembling formats at run time in character arrays, or reduce the maximum size of file records.

Error No.	Error Message	Description	Action
914	ACCESS OF UNCONNECTED UNIT ATTEMPTED	Unit specified in I/O statement has not previously been connected to anything.	Connect unit using the OPEN statement before attempting I/O on it, or perform I/O on another, already connected, unit.
915	READ UNEXPECTED CHARACTER	Read a character that is not admissible for the type of conversion being performed. Input value was too large for the type of the variable.	Remove from input data any characters that are illegal in integers or real numbers.
916	ERROR IN READ OF LOGICAL DATA	An illegal character was read when logical data was expected.	Change input data to correspond to syntax expected when reading logical data or use input statement corresponding to syntax of input data.
917	OPEN WITH NAMED SCRATCH FILE ATTEMPTED	Executed OPEN statement with STATUS='SCRATCH', but also named the file. Scratch files must not be named.	Either remove the FILE= specifier, or open the file with a status other than STATUS='SCRATCH'.
918	OPEN OF EXISTING FILE WITH STATUS='NEW' ATTEMPTED	Executed OPEN statement with STATUS='NEW', but file already exists.	Either remove the STATUS= specifier from the OPEN statement, or use the STATUS='OLD'; STATUS='UNKNOWN'; or STATUS='REPLACE' specifier.
920	OPEN OF FILE CONNECTED TO DIFFERENT UNIT ATTEMPTED	You attempted to open a file that is already open with a different unit number.	Close the file with the current unit number before attempting to open it with a different unit number.
921	UNFORMATTED OPEN WITH BLANK SPECIFIER ATTEMPTED	OPEN statement specified FORM='UNFORMATTED' and BLANK=xx.	Either use FORM='FORMATTED' or remove BLANK=xx.
922	READ ON ILLEGAL RECORD ATTEMPTED	Attempted to read a record of a formatted or unformatted direct file that is beyond the current end-of-file.	Read records that are within the bounds of the file.
923	OPEN WITH ILLEGAL FORM SPECIFIER ATTEMPTED	FORM= specified string other than 'FORMATTED' or 'UNFORMATTED'.	Use either 'FORMATTED' or 'UNFORMATTED' for the FORM= specifier in an OPEN statement.

Error No.	Error Message	Description	Action
924	CLOSE OF SCRATCH FILE WITH STATUS='KEEP' ATTEMPTED	The file specified in the CLOSE statement was previously opened with 'SCRATCH' specified in the STATUS= specifier.	Open the file with a STATUS= , specifying a string other than 'SCRATCH' or do not specify STATUS='KEEP' in the CLOSE statement for this scratch file.
925	OPEN WITH ILLEGAL STATUS SPECIFIER ATTEMPTED	STATUS= specified string other than 'OLD' 'NEW' 'UNKNOWN' 'REPLACE' or 'SCRATCH'.	Use 'OLD', 'NEW', 'UNKNOWN', 'REPLACE' or 'SCRATCH' for the STATUS= specifier in OPEN statement.
926	CLOSE WITH ILLEGAL STATUS SPECIFIER ATTEMPTED	STATUS= specified string other than 'KEEP' or 'DELETE'.	Use 'KEEP' or 'DELETE' for the STATUS= specifier in a CLOSE statement.
927	OPEN WITH ILLEGAL ACCESS SPECIFIER ATTEMPTED	ACCESS= specified string other than 'SEQUENTIAL' or 'DIRECT'.	Use 'SEQUENTIAL' or 'DIRECT' for the ACCESS= specifier in an OPEN statement.
929	OPEN OF DIRECT FILE WITH NO RECL SPECIFIER ATTEMPTED	OPEN statement has ACCESS='DIRECT', but no RECL= specifier.	Add RECL= specifier to OPEN statement, or specify ACCESS='SEQUENTIAL'.
930	OPEN WITH RECL LESS THAN 1 ATTEMPTED	RECL= specifier in OPEN statement was less than or equal to zero.	Specify a positive number for RECL= specifier in OPEN statement.
931	OPEN WITH ILLEGAL BLANK SPECIFIER ATTEMPTED	BLANK= specified string other than 'NULL' or 'ZERO'	Use 'NULL' or 'ZERO' for BLANK= specifier in OPEN statement.
933	END (OR BEGIN) OF FILE WITH NO END=x SPECIFIER	End-of-file mark read by a READ statement with no END= specifier to indicate label to which to jump.	Use the END= specifier to handle EOF, or check logic.
937	ILLEGAL RECORD NUMBER SPECIFIED	A record number less than one was specified for direct I/O.	Use record numbers greater than zero.
942	ERROR IN LIST-DIRECTED READ - CHARACTER DATA READ FOR ASSIGNMENT TO NON-CHARACTER VARIABLE	A character string was read for a numerical or logical variable.	Check input data and input variable type.

Error No.	Error Message	Description	Action
944	RECORD TOO LONG IN DIRECT UNFORMATTED I/O	Output requested is too long for specified (or pre-existing) record length.	Make the number of bytes output by WRITE less than or equal to the file record size.
945	ERROR IN FORMATTED I/O	More bytes of I/O were requested than exist in the current record.	Match the format to the data record.
953	NO REPEATABLE EDIT DESCRIPTOR IN FORMAT STRING	No format descriptor was found to match I/O list items.	Add at least one repeatable edit descriptor to the format statement.
956	FILE SYSTEM ERROR	The file system returned an error status during an I/O operation.	See the associated file system error message.
957	FORMAT DESCRIPTOR INCOMPATIBLE WITH NUMERIC ITEM IN I/O LIST	A numeric item in the I/O list was matched with a non-numeric edit descriptor.	Match format descriptors to I/O list.
958	FORMAT DESCRIPTOR INCOMPATIBLE WITH CHARACTER ITEM IN I/O LIST	A character item in the I/O list was matched with an edit descriptor other than A or R.	Match format descriptors to I/O list.
959	FORMAT DESCRIPTOR INCOMPATIBLE WITH LOGICAL ITEM IN I/O LIST	A logical item in the I/O list was matched with a edit descriptor other than L.	Match format descriptors to I/O list.
973	RECORD LENGTH DIFFERENT IN SUBSEQUENT OPEN	Record length specified in second OPEN conflicted with the value as opened.	Only BLANK=, DELIM=, and PAD= specifiers may be changed by a redundant OPEN.
974	RECORD ACCESSED PAST END OF INTERNAL FILE RECORD (VARIABLE)	An attempt was made to transfer more characters than internal file length.	Match READ or WRITE statement with internal file size.
975	ILLEGAL NEW FILE NUMBER REQUESTED IN FSET FUNCTION	The file number requested to be set was not a legal file system file number.	Check that the OPEN succeeded and the file number is correct.
976	UNEXPECTED CHARACTER IN "NAMELIST" READ	An illegal character was found in namelist-directed input.	Be sure input data conforms to the syntax rules for namelist-directed input, or remove illegal character from data.

Error No.	Error Message	Description	Action
977	ILLEGAL SUB-SCRIPT OR SUB-STRING IN "NAMELIST" READ	An invalid subscript or substring specifier was found in namelist-directed input. Possible causes include bad syntax, subscript/substring component out-of-bounds, wrong number of subscripts and substring on non-character variable.	Check input data for syntax errors. Be sure subscript/substring specifiers are correct for data type. Specify only array elements within the bounds of the array being read.
978	TOO MANY VALUES IN "NAMELIST" READ	Too many input values were found during a namelist-directed READ. This message will be generated by attempts to fill variables beyond their memory limits.	Supply only as many values as the length of the array.
979	VARIABLE NOT IN NAMELIST GROUP	A variable name was encountered in the input stream that was not declared as part of the current namelist group.	Read only the variables in this namelist.
980	NAMELIST I/O ATTEMPTED ON UNFORMATTED FILE	An illegal namelist-directed I/O operation was attempted on an unformatted (binary) file.	Specify FORM='FORMATTED' in OPEN statement, or use namelist-directed I/O only on formatted files.
1010	OPEN WITH ILLEGAL PAD SPECIFIER ATTEMPTED	An attempt was made to open a file with an illegal value specified for the PAD= specifier.	Specify either PAD='YES' or PAD='NO'.
1011	OPEN WITH ILLEGAL POSITION SPECIFIER ATTEMPTED	An attempt was made to open a file with an illegal value specified for the POSITION= specifier.	Specify POSITION='ASIS', POSITION='REWIND' or POSITION='APPEND'.
1012	OPEN WITH ILLEGAL DELIM SPECIFIER ATTEMPTED	An attempt was made to open a file with an illegal value specified for the DELIM= specifier.	Specify DELIM='APOSTROPHE', DELIM='QUOTE' or DELIM='NONE'.
1013	OPEN WITH ILLEGAL ACTION SPECIFIER ATTEMPTED	An attempt was made to open a file with an illegal value specified for the ACTION= specifier.	Specify ACTION='READ', ACTION='WRITE' or ACTION='READWRITE'.

Abbreviations & Acronyms

A2P	Algorithm-to-Product Conversion
ALT	Altimeter or Altimetry, also designation for the EOS-Altimeter spacecraft series
ANCxx	GLAS Ancillary Data Files
APID	GLAS Level-0 Data file
ATBD	Algorithm Theoretical Basis Document
ATM	Atmosphere
CCB	Change Control Board
ClearCase	GSAS version tracking software
CR	Change Request
DAAC	Distributed Active Archive Center
DEM	Digital Elevation Model
DFD	Data Flow Diagram
DLT	Digital Linear Tape
EDOS	EOS Data and Operations System
EDS	Expedited Data Set
ELEV	Elevation
EOC	EOS Operating Center
EOS	NASA Earth Observing System Mission Program
EOSDIS	Earth Observing System Data and Information System
GB	Gigabyte
GDS	GLAS Ground Data System
GLAS	Geoscience Laser Altimeter System instrument or investigation
GLAxx	GLAS Science Data Product Files
GLOP	GLAS Level-0 PGE (correctly called GLAS_L0proc)
GPS	Global Positioning System
GSAS	GLAS Science Algorithm Software
GSFC	NASA Goddard Space Flight Center at Greenbelt, Maryland
GSFC/WFF	NASA Goddard Space Flight Center/Wallops Flight Facility at Wallops Island, Virginia

HDF	Hierarchical Data Format
HDF-EOS	EOS-specific Hierarchical Data Format
I-SIPS	Icesat Science Investigator Led Processing System
I/O	Input/Output
ICESAT	Ice, Cloud and Land Elevation Satellite
ID	Identification
IDL	Interactive Data Language
IEEE	Institute for Electronics and Electrical Engineering
ISF	Instrument Support Facility
IST	Instrument Star Tracker
KB	Kilobyte
L0	Level 0
L1A	Level-1A
L1B	Level-1 B
L2	Level-2
LASER	Light Amplification by Stimulated Emission of Radiation
LIDAR	Light Detection and Ranging
LPA	Laser Pointing Array
LRS	Laser Reference System
MB	Megabyte
MET	(context sensitive) Mission Elapsed Time or Meteorological
MOSS	Mission Operations Science Simulation (test)
N/A or NA	Not (/) Applicable
NASA	National Aeronautics and Space Administration
NOAA	National Oceanic and Atmospheric Administration
P2A	Product-to-Algorithm Conversion
PAD	Precision Attitude Determination
PDF	Portable Document Format
PDS	Production Data Set
PGE	Product Generation Executable
POD	Precision Orbit Determination
PR	Problem Report

QA	Quality Assessment
QAP	Quality Assessment Processing
SC	Structure Chart
SCF	Science Computing Facility
SDMP	Science Data Management Plan
SDMS	Scheduling and Data Management System
SDP	Standard Data Products
SRS	Stellar Reference System
SSMP	Science Software Management Plan
SSRF	Science Software Requirements Document
TBD	to be determined, to be done, or to be developed
UNIX	the operating system jointly developed by the AT&T Bell Laboratories and the University of California-Berkeley System Division
UTC	Universal Time Correlation
WF	Waveform

Glossary

aggregate	A collection, assemblage, or grouping of distinct data parts together to make a whole. It is generally used to indicate the grouping of GLAS data items, arrays, elements, and EOS parameters into a data record. For example, the collection of Level 1B EOS Data Parameters gathered to form a one-second Level 1B data record. It could be used to represent groupings of various GLAS data entities such as data items aggregated as an array, data items and arrays aggregated into a GLAS Data Element, GLAS Data Elements aggregated as an EOS Data Parameter, or EOS Data Parameters aggregated into a Data Product record.
array	An ordered arrangement of homogenous data items that may either be synchronous or asynchronous. An array of data items usually implies the ability to access individual data items or members of the array by an index. An array of GLAS data items might represent the three coordinates of a georeference location, a collection of values at a rate, or a collection of values describing an altimeter waveform.
file	A collection of data stored as records and terminated by a physical or logical end-of-file (EOF) marker. The term usually applies to the collection within a storage device or storage media such as a disk file or a tape file. Loosely employed it is used to indicate a collection of GLAS data records without a standard label. For the Level 1A Data Product, the file would constitute the collection of one-second Level 1A data records generated in the SDPS working storage for a single pass.
header	A text and/or binary label or information record, record set, or block, prefacing a data record, record set, or a file. A header usually contains identifying or descriptive information, and may sometimes be embedded within a record rather than attached as a prefix.
item	Specifically, a data item. A discrete, non-decomposable unit of data, usually a single word or value in a data record, or a single value from a data array. The representation of a single GLAS data value within a data array or a GLAS Data Element.
label	The text and/or binary information records, record set, block, header, or headers prefacing a data file or linked to a data file sufficient to form a labeled data product. A standard label may imply a standard data product. A label may consist of a single header as well as multiple headers and markers depending on the defining authority.
Level 0	The level designation applied to an EOS data product that consists of raw instrument data, recorded at the original resolution, in time order, with any duplicate or redundant data packets removed.
Level 1A	The level designation applied to an EOS data product that consists of reconstructed, unprocessed Level 0 instrument data, recorded at the full resolution with time referenced data records, in time order. The data are annotated with ancillary information including radiometric and geometric calibration coefficients, and georeferencing parameter data (i.e., ephemeris data). The included, computed coefficients and parameter data have not however been applied to correct the Level 0 instrument data contents.

Level 1B	The level designation applied to an EOS data product that consists of Level 1A data that have been radiometrically corrected, processed from raw data into sensor data units, and have been geolocated according to applied georeferencing data.
Level 2	The level designation applied to an EOS data product that consists of derived geophysical data values, recorded at the same resolution, time order, and georeference location as the Level 1A or Level 1B data.
Level 3	The level designation applied to an EOS data product that consists of geophysical data values derived from Level 1 or Level 2 data, recorded at a temporally or spatially resampled resolution.
Level 4	The level designation applied to an EOS data product that consists of data from modeled output or resultant analysis of lower level data that are not directly derived by the GLAS instrument and supplemental sensors.
metadata	The textual information supplied as supplemental, descriptive information to a data product. It may consist of fixed or variable length records of ASCII data describing files, records, parameters, elements, items, formats, etc., that may serve as catalog, data base, keyword/value, header, or label data. This data may be parsable and searchable by some tool or utility program.
orbit	The passage of time and spacecraft travel signifying a complete journey around a celestial or terrestrial body. For GLAS and the EOS ALT-L spacecraft each orbit starts at the time when the spacecraft is on the equator traveling toward the North Pole, continues through the equator crossing as the spacecraft ground track moves toward the South Pole, and terminates when the spacecraft has reached the equator moving northward from the South Polar region.
model	A graphical representation of a system.
module	A collection of program statements with four basic attributes: input and output, function, mechanics and internal data.
parameter	Specifically, an EOS Data Parameter. This is a defining, controlling, or constraining data unit associated with a EOS science community approved algorithm. It is identified by an EOS Parameter Number and Parameter Name. An EOS Data Parameter within the GLAS Data Product is composed of one or more GLAS Data Elements
pass	A sub-segment of an orbit, it may consist of the ascending or descending portion of an orbit (e.g., a descending pass would consist of the ground track segment beginning with the northernmost point of travel through the following southernmost point of travel), or the segment above or below the equator; for GLAS the pass is identified as either the northern or southern hemisphere portion of the ground track on any orbit
PDL	Program Design Language (Pseudocode). A language tool used for module programming and specification. It is at a higher level than any existing compilable language.
process	An activity on a dataflow diagram that transforms input data flow(s) into output data flow(s).

product	Specifically, the Data Product or the EOS Data Product. This is implicitly the labeled data product or the data product as produced by software on the SDPS or SCF. A GLAS data product refers to the data file or record collection either prefaced with a product label or standard formatted data label or linked to a product label or standard formatted data label file. Loosely used, it may indicate a single pass file aggregation, or the entire set of product files contained in a data repository.
program	The smallest set of computer instructions that can be executed as a stand-alone unit
record	A specific organization or aggregate of data items. It represents the collection of EOS Data Parameters within a given time interval, such as a one-second data record. It is the first level decomposition of a product file.
Scenario	A single execution path for a process.
Standard Data Product	Specifically, a GLAS Standard Data Product. It represents an EOS ALT-L/ GLAS Data Product produced on the EOSDIS SDPS for GLAS data product generation or within the GLAS Science Computing Facility using EOS science community approved algorithms. It is routinely produced and is intended to be archived in the EOSDIS data repository for EOS user community-wide access and retrieval.
State Transition Diagram	Graphical representation of one or more scenarios.
Stub	(alias dummy module) a primitive implementation of a subordinate module, which is normally used in the top-down testing of superordinate (higher) modules.
Structured Chart	A graphical tool for depicting the partitioning of a system into modules, the hierarchy and organization of those modules, and the communication interfaces between the modules.
Structured Design	The development of a blueprint of a computer system solution to a problem, having the same components and interrelationships amount the components as the original problem has.
Subroutine	A program that is called by another program
variable	Usually a reference in a computer program to a storage location, i.e., a place to contain or hold the value of a data item.

