https://ntrs.nasa.gov/search.jsp?R=19680023563 2018-07-25T15:43:56+00:00Z

CONTRACT NO. NONR 839(40) (FBM)
TASK NR 064-427

68-8

AD 669900

NATURAL FREQUENCIES OF ORTHOTROPIC CIRCULAR PLATES OF VARIABLE THICKNESS

by

Alan P. Salzman and Sharad A. Patel

GPO PRICE $ _____

CSFTI PRICE(S) $ _____

Hard copy (HC) 3.00

Microfiche (MF) .65

ff 653 July 65

N68-33035
(ACCESSION NUMBER)
29
(PAGES)
AD 669 900
(NASA CR OR TMX OR AD NUMBER)
CR 96314
(THRU)
1
(CODE)
32
(CATEGORY)
FACILITY FORM 602

SEP 1968
RECEIVED
NASA STI FACILITY
INPUT BRANCH

POLYTECHNIC INSTITUTE OF BROOKLYN

DEPARTMENT
of
AEROSPACE ENGINEERING
and
APPLIED MECHANICS

Acquisition Document
SQT

APRIL, 1968

DISTRIBUTION OF THIS
DOCUMENT IS UNLIMITED

PIBAL REPORT No. 68-8

Contract No. Nonr 839(40)(FBM)
Task NR 064-427

NATURAL FREQUENCIES OF ORTHOTROPIC CIRCULAR PLATES OF VARIABLE THICKNESS

by

Alan P. Salzman and Sharad A. Patel

Polytechnic Institute of Brooklyn
Department of
Aerospace Engineering and Applied Mechanics

April 1968

PIBAL Report No. 68-8

---

*This report is based upon a thesis submitted by A. P. Salzman to the Polytechnic Institute of Brooklyn in partial fulfillment of the requirements for the degree of Master of Science in Applied Mechanics. Mr. Salzman was supported in his work under a NASA Predoctoral Traineeship.

ABSTRACT

The present investigation is concerned with the natural frequencies of orthotropic circular plates of variable thickness. In particular, a thickness variation of the form $h = h_o (1-HR^n)$ has been selected. The derivation of the differential equation governing the motion of the plate is based on the classical formulation of the theory of plates. The solution of this equation for the axisymmetric case is obtained by an application of the method of Frobenius. Characteristic equations for the natural frequencies of clamped and simply supported plates are derived and numerical results are presented for several plates of various shapes.

LIST OF SYMBOLS

a	plate radius
a_o, b_o, c_o, d_o	undetermined constants in deflection solution
a_k, b_k, c_k, d_k	coefficients of Frobenius series for specific exponents of singularity
A_k, B_k, C_k, D_k	$= a_k/a_o$, b_k/b_o, c_k/c_o, d_k/d_o, respectively
D_o	$= E_r h_o^3/12$
D_r	$= E_r h^3/12$
E_r, E_φ, $E_{r\varphi}$	material constants
f	frequency, cycles/sec.
$\bar{f}$	$= [(a^2/h_o) \sqrt{(\rho/E_r)}]\ f$
g_k	coefficients of Frobenius series in general form
G	material constant
h	plate thickness
h_o, h_a	thickness of the plate at r=0, r=a, respectively

H	$= 1-(h_a/h_o)$, non-dimensional thickness coefficient
j	exponents of singularity in Frobenius series
k	index of Frobenius series
M_r, M_φ, $M_{r\varphi}$	radial, circumferential, and twisting moments per unit length
n	exponent of thickness expression
q	lateral load per unit area
Q_r	transverse shear force per unit length
r	radial coordinate
R	$= r/a$, non-dimensional radial coordinate
t	time
w	lateral displacement
X, Y, Z	expressions defined by Eqs. (18), (19), (20), respectively
z	coordinate normal to and measured from the median surface of the plate

α	$= E_{r\varphi}/E_r$, non-dimensional material constant
β	$= E_{\varphi}/E_r$, non-dimensional material constant
γ	$= G/E_r$, non-dimensional material constant
δ	step function notation
ϵ_r, ϵ_{φ}	radial and circumferential normal strains
$\gamma_{r\varphi}$	shearing strain
λ	$= \rho\omega^2 h_o a^4/D_o$, a frequency parameter
ρ	mass density of the plate
σ_r, σ_{φ}	radial and circumferential bending stresses
$\tau_{r\varphi}$	shearing stress
φ	circumferential coordinate
ω	circular frequency, rad./sec.
$(\ )_{,}$	partial derivative of ( ) with respect to the subscripts following the comma
$(\ )'$	$= d(\ )/dR$

I. INTRODUCTION

The literature of recent years contains many analyses of isotropic and orthotropic circular plates of both uniform and variable thickness. The transverse vibrations of cylindrically orthotropic circular plates has been analyzed by Pandalai and Patel [1], and Minkarah and Hoppmann [2]. In these investigations clamped as well as simply supported plates of constant thickness were considered. The present analysis is an extension of this work and concerns itself with the investigation of the natural frequencies of orthotropic circular plates of variable thickness.

In the classical formulation of problems concerning plates of variable thickness the effects of both transverse shear deformation and transverse normal stress are neglected, and hence, the stress solutions do not satisfy the prescribed surface tractions at the upper and lower surfaces of the plate. However, it has been shown by Essenberg [3] that the displacements predicted by the theory are reliable provided the maximum thickness of the plate is small compared to the radius of the plate. Of course the slope of the plate surface is small compared to unity. In view of this argument, the classical theory of thin plates is assumed valid for the present investigation.

The material properties of the plates considered in past investigations ([1], [2]) and in the present analysis as well are characterized by the principal directions of orthotropy at a point; these being the radial and circumferential directions. Such orthotropy may occur

naturally in some cross sections of wood, or may be manufactured, at least approximately, by reinforced plastics, by thin impregnated laminations wound around a cylindrical core, or by isotropic plates which have been stiffened by radial or circumferential ribs. It has been found by Carrier [4] that, as a consequence of this form of orthotropy, the origin of the coordinate system represents a singular point of the material properties of the plate. The effect of this singularity on the displacement solution is discussed in the last section of the thesis.

In what follows, the governing equation for the free vibration of such plates is derived in terms of the lateral deflections of their median surface. This equation is then solved, for the axisymmetric case, by the method of Frobenius. The characteristic equations for the natural frequencies are derived for a clamped and a simply supported plate, and some numerical examples are considered. Finally, a brief discussion of the results is presented.

2. DERIVATION OF THE GOVERNING EQUATION

First, it is assumed that the circular plates analyzed in the present investigation are governed by the small deflection theory of plates. That is, the following simplifying assumptions are made: (1) The maximum thickness of the plate is small in comparison with the radius of the plate. (2) The magnitude of the lateral deflection is small compared to the local thickness of the plate. (3) The rotations are very small compared to the strains and as a result the stretching of the median surface of the plate is considered negligible. (4) An element of the plate along a normal to the median surface in the undeformed plate remains straight and normal to the deformed median surface, and its extension is negligible. Hence, the transverse shear strains are taken to be zero.

The above assumptions lead to the strain displacement relations

$$\epsilon_r = - z\, w_{,rr}$$

$$\epsilon_\varphi = - z\left(\frac{w_{,r}}{r} + \frac{w_{,\varphi\varphi}}{r^2}\right) \tag{1}$$

$$\gamma_{r\varphi} = - 2z\left(\frac{w_{,\varphi}}{r}\right)_{,r}$$

in polar coordinates which are the most convenient for the present problem.

In the above equation, ϵ_r and ϵ_φ are the radial and circumferential normal strains, $\gamma_{r\varphi}$ is the shearing strain, w is the lateral displacement of the median surface of the plate, r and φ are the radial and circumferential coordinates, z is the coordinate normal to and measured from the median surface of the plate (see Fig. 1), and, finally, a comma after a symbol denotes partial differentiation of the symbol with respect to the coordinates indicated by the subscripts following the comma.

Next, it is assumed that the plates are made of orthotropic material, i.e., the elastic properties of the plate in the radial and circumferential directions are different. In view of the fact that the small deflection theory of the plate is assumed to be valid, the pertinent stress-strain relations for such a plate may be written [5] as

$$\begin{aligned} \sigma_r &= E_r\ \epsilon_r + E_{r\varphi}\ \epsilon_\varphi \\ \sigma_\varphi &= E_{r\varphi}\ \epsilon_r + E_\varphi\ \epsilon_\varphi \\ \tau_{r\varphi} &= G\ \gamma_{r\varphi} \end{aligned} \tag{2}$$

where σ_r and σ_φ are normal stresses in the radial and circumferential directions, $\tau_{r\varphi}$ is the shearing stress, and E_r, E_φ, $E_{r\varphi}$ and G are the material constants. These stress-strain relations together with the strain displacement relations of Eq. (1) may now be used to derive expressions for the bending moments per unit length in terms of the deflection as

$$M_r = \int_{-\frac{h}{2}}^{\frac{h}{2}} \sigma_r \, z dz = - D_r \left[w,_{rr} + \alpha \left(\frac{w,_r}{r} + \frac{w,_{\varphi\varphi}}{r^2} \right) \right]$$

$$M_\varphi = \int_{-\frac{h}{2}}^{\frac{h}{2}} \sigma_\varphi \, z dz = - D_r \left[\alpha \, w,_{rr} + \beta \left(\frac{w,_r}{r} + \frac{w,_{\varphi\varphi}}{r^2} \right) \right] \tag{3}$$

$$M_{r\varphi} = - \int_{-\frac{h}{2}}^{\frac{h}{2}} \tau_{r\varphi} \, z dz = 2D_r \gamma \left(\frac{w,_\varphi}{r} \right)_{,r}$$

where, M_r, M_φ and $M_{r\varphi}$ are the radial, circumferential, and twisting moments per unit length, $h = h(r,\varphi)$ is the local thickness of the plate, $D_r = E_r h^3/12$, $\alpha = E_{r\varphi}/E_r$, $\beta = E_\varphi/E_r$, and $\gamma = G/E_r$.

During bending, in addition to satisfying Eqs. (3) the plate must also satisfy the equilibrium equation

$$\frac{1}{r} (rM_r)_{,rr} - \frac{2}{r^2} (rM_{r\varphi})_{,r\varphi} + \frac{1}{r^2} M_{\varphi,\varphi\varphi} - \frac{1}{r} M_{\varphi,r} = - q \tag{4}$$

where q is the intensity of the lateral load on the plate. Since the present problem is concerned with the free vibrations of the plate this intensity is

$$q = - \rho \, h \, w,_{tt} \tag{5}$$

where ρ is the mass density of the plate, t is the time and $w = w\,(r,\varphi,t)$.

Substitution of Eqs. (3) and (5) into Eq. (4) yields the governing equation for the free vibrations of the plate as

$$D_r \Big[w_{,rrrr} + 2\,\frac{w_{,rrr}}{r} + 2\alpha \Big(\frac{w_{,rr\varphi\varphi}}{r^2} - \frac{w_{,r\varphi\varphi}}{r^3} + \frac{w_{,\varphi\varphi}}{r^4} \Big) +$$

$$+ \beta \Big(-\frac{w_{,rr}}{r^2} + \frac{w_{,r}}{r^3} + 2\,\frac{w_{,\varphi\varphi}}{r^4} + \frac{w_{,\varphi\varphi\varphi\varphi}}{r^4} \Big) +$$

$$+ 4\gamma \Big(\frac{w_{,rr\varphi\varphi}}{r^2} - \frac{w_{,r\varphi\varphi}}{r^3} + \frac{w_{,\varphi\varphi}}{r^4} \Big) \Big] +$$

$$+ D_{r,r} \Big[2\, w_{,rrr} + 2\,\frac{w_{,rr}}{r} + \alpha \Big(\frac{w_{,rr}}{r} + 2\,\frac{w_{,r\varphi\varphi}}{r^2} - 2\,\frac{w_{,\varphi\varphi}}{r^3} \Big) +$$

$$- \beta \Big(\frac{w_{,r}}{r^2} + \frac{w_{,\varphi\varphi}}{r^3} \Big) + 4\gamma \Big(\frac{w_{,r\varphi\varphi}}{r^2} - \frac{w_{,\varphi\varphi}}{r^3} \Big) \Big] +$$

$$+ D_{r,rr} \Big[w_{,rr} + \alpha \Big(\frac{w_{,r}}{r} + \frac{w_{,\varphi\varphi}}{r^2} \Big) \Big] +$$

$$+ D_{r,\varphi} \Big[2\alpha\,\frac{w_{,rr\varphi}}{r^2} + 2\beta \Big(\frac{w_{,r\varphi}}{r^3} + \frac{w_{,\varphi\varphi\varphi}}{r^4} \Big) +$$

$$+ 4\gamma \Big(\frac{w_{,rr\varphi}}{r^2} - \frac{w_{,r\varphi}}{r^3} + \frac{w_{,\varphi}}{r^4} \Big) \Big] +$$

$$+ D_{r,\varphi\varphi}\left[\alpha \frac{w,_{rr}}{r^2} + \beta\left(\frac{w,_r}{r^3} + \frac{w,_{\varphi\varphi}}{r^4}\right)\right] +$$

$$+ D_{r,r\varphi}\left[4\gamma\left(\frac{w,_{r\varphi}}{r^2} - \frac{w,_\varphi}{r^3}\right)\right] = - \rho\, h\, w,_{tt} \tag{6}$$

For the axisymmetric case this equation reduces to

$$D_r\, w,_{rrrr} + 2(D_r + r\, D_{r,r})\frac{w,_{rrr}}{r} +$$

$$+ \left(- \beta D_r + (2+\alpha)\, r\, D_{r,r} + r^2\, D_{r,rr}\right)\frac{w,_{rr}}{r^2} +$$

$$+ \left(\beta D_r - \beta r D_{r,r} + \alpha\, r^2\, D_{r,rr}\right)\frac{w,_r}{r^3} = - \rho h\, w,_{tt} \tag{7}$$

For the present axisymmetric problem the thickness can vary only in the radial direction and it is assumed to be given by

$$h = h_o\left[1 - \frac{h_o - h_a}{h_o}\left(\frac{r}{a}\right)^n\right] = h_o\,(1 - HR^n) \tag{8}$$

where, h_o and h_a represent the thickness of the plate at the center $r = 0$, and at the edge of the plate $r = a$, respectively, n is any positive integer and the definitions of R and H are obvious. (For a uniform thickness plate $H = 0$). Thus, by definition, the quantity $D_r = E_r h^3/12$ becomes $D_r = E_r h_o^3(1-HR^n)^3/12$. Since this quantity must be positive for a full plate everywhere in the interval $0 \leq r \leq a$ it is required that H be less

than unity ($H < 1$). Substitution of the thickness h given by Eq. (8) into Eq. (7) leads to the equation .

$$(1 - 2\,HR^n + H^2\,R^{2n})\,w,_{RRRR} +$$

$$+ 2\left[1 - (2 + 3n)\,HR^n + (1 + 3n)\,H^2R^{2n}\right]\frac{w,_{RRR}}{R} +$$

$$+ \left\{-\beta + \left[2\beta - 3n(1+\alpha+n)\right]HR^n + \left[-\beta + 3n\,(1+\alpha+3n)\right]H^2R^{2n}\right\}\frac{w,_{RR}}{R^2} +$$

$$+ \left\{\beta - \left[\beta(2-3n) + 3\alpha n\,(n-1)\right]HR^n + (1-3n)(\beta-3\alpha n)H^2R^{2n}\right\}\frac{w,_{R}}{R^3} +$$

$$+ \frac{\rho\,h_o\,a^4}{D_o}\,w,_{tt} = 0 \qquad (9)$$

where $D_o = E_r\,h_o^3/12$. Equation (9) is the governing equation for the axisymmetric free vibration of an orthotropic plate having a thickness variation $h = h_o\,(1-HR^n)$.

The deflection solution to Eq. (9) must satisfy the boundary conditions which depend upon the manner in which the edge of the plate is supported. While for a clamped plate the displacement and the slope must vanish, the displacement and the radial moment must vanish for a simply supported plate. Thus, at $r = a$ the displacement w must satisfy for a clamped plate:

$$w = 0 \qquad \text{and } w' = 0 \qquad (10a)$$

for a simply supported plate:

$$w = 0 \qquad \text{and} \quad w'' + \alpha\, w'/R = 0 \tag{10b}$$

In writing the second of Equations (10b) use has been made of Eq. (3).

In addition to satisfying these conditions the solution must also satisfy "regularity" conditions at $r = 0$, the center of the plate. These require that at the center the slope be finite* and that the inertia forces be in equilibrium with the resultant internal transverse shear force. The magnitude of the intensity of shear, Q_r, at a radius r may be determined from the condition

$$2\pi\, r\, Q_r = \int_0^r \rho\, h\, 2\pi\, r\, w,_{tt}\, dr \tag{11}$$

It may also be expressed in terms of the moments [5] and hence (see Eq. (3)) in terms of the displacement w. This relation is

$$\begin{aligned} r\, Q_r &= (r\, M_r),_r - M_\varphi \\ &= -\left\{D_r \left[r\, w,_{rrr} + w,_{rr} - \beta \frac{w,_r}{r}\right] + r\, D_{r,r} \left[w,_{rr} + \alpha \frac{w,_r}{r}\right]\right\} \end{aligned} \tag{12}$$

In view of Eqs. (11) and (12) the second of the "regularity" conditions requires that at $r = 0$, the expression on the last line of Equation (12) must vanish.

---

*For the present axisymmetric case this condition implies that $w,_r = 0$.

3. METHOD OF SOLUTION

In attempting to solve the governing Equation (9) first the non-dimensional variable $R = r/a$ has been introduced. Next, the displacement w is assumed to have the form

$$w\ (R,t) = W(R)\ e^{i\omega t} \tag{13}$$

where $W(R)$ is a function only of R, $i = \sqrt{-1}$ and ω is the circular frequency. When Eq. (13) is substituted into Eq. (9) the time and space variables are separated and an ordinary differential equation in terms of W is obtained as

$$\begin{aligned}
&(1 - 2HR^n + H^2R^{2n})W'''' \quad + \\
&+ 2\left[1 - (2+3n)HR^n + (1+3n)H^2R^{2n}\right]\frac{W'''}{R} \quad + \\
&+ \left\{-\beta + \left[2\beta-3n(1+\alpha+n)\right]HR^n + \left[-\beta+3n(1+\alpha+3n)\right]H^2R^{2n}\right\}\frac{W''}{R^2} \quad + \\
&+ \left\{\beta - \left[\beta(2-3n) + 3\alpha n\ (n-1)\right]HR^n + (1-3n)(\beta-3\alpha n)H^2R^{2n}\right\}\frac{W'}{R^3} + \\
&- \lambda W = 0
\end{aligned} \tag{14}$$

where

$$\lambda = \frac{\rho\omega^2 h_o a^4}{D_o} \tag{15}$$

and a prime over a symbol denotes differentiation with respect to R.

For the solution of Eq. (14) the method of Frobenius is adopted. A series solution for W, about the regular singular point R = 0, is assumed in the form

$$W(R) = \sum_{k=0}^{\infty} g_k R^{j+k} \tag{16}$$

where k is the index of the summation, j denotes the exponents of singularity, the g_k represent the coefficients of the series, and g_o is, by assumption, the coefficient of the first term in the series. Since Eq. (14) is a fourth order differential equation, Frobenius' method will yield four exponents of singularity in the solution. Hence, the right hand side of Eq. (16) represents the sum of four series each corresponding to a particular value of j; furthermore, the g_k then represent four sets of coefficients, one for each series.

Substituting the assumed solution (16) into Eq. (14) the following equation is obtained:

$$\sum_{k=0}^{\infty} X(j+k) g_k R^{j+k-4} - \sum_{k=n}^{\infty} Y(j+k-n) H g_{k-n} R^{j+k-4} +$$

$$- \sum_{k=2n}^{\infty} Z(j+k-2n) H^2 g_{k-2n} R^{j+k-4} - \sum_{k=4}^{\infty} \lambda g_{k-4} R^{j+k-4} = 0 \tag{17}$$

where the indices of the summations have been manipulated in such a manner that R appears to the same power in each term and the functions X, Y and Z are defined as

$$X\ (j+k) = (j+k)(j+k-2)[(j+k-1)^2-\beta] \tag{18}$$

$$Y\ (j+k-n) = (j+k-n)\left\{(j+k-n-1)[2(j+k+2n-1)(j+k-n-2)-2\beta + \right.$$

$$\left. + 3n(1+\alpha+n)] + \beta(2-3n) + 3\alpha n(n-1)\right\} \tag{19}$$

$$Z\ (j+k-2n) = (j+k-2n)\left\{(j+k-2n-1)[-(j+k+4n-1)(j+k-2n-2) + \right.$$

$$\left. + \beta-3n(1+\alpha+3n)] + (1-3n)(3\alpha n-\beta)\right\} \tag{20}$$

The functional notations X (j+k), Y (j+k-n), and Z (j+k-2n) have been adopted to indicate that these expressions depend not only on the ratios of the material properties α and β, and the power of the thickness variation, n, but also on the value of the exponent of singularity, j, and the index of summation, k, for which they are to be evaluated. Upon introducing the step function notation

$$\delta(k-m) = \begin{cases} 1 & k-m \geq 0 \\ 0 & k-m < 0 \end{cases} \tag{21}$$

and collecting the coefficients of successive powers of R, Eq. (17) may be written in the form

$$X\ (j)\ g_o\ R^{j-4} +$$

$$+ \left\{X\ (j+1)g_1 - \delta(1-n)\ Y(j+1-n)Hg_{1-n} - \delta(1-2n)\ Z(j+1-2n)H^2 g_{1-2n}\right\} R^{j-3} +$$

$$+ \left\{X\ (j+2)g_2 - \delta(2-n)\ Y(j+2-n)Hg_{2-n} - \delta(2-2n)\ Z(j+2-2n)H^2 g_{2-2n}\right\} R^{j-2} +$$

$$+\left\{X\ (j+3)g_3 - \delta(3-n)\ Y(j+3-n)Hg_{3-n} - \delta(3-2n)\ Z(j+3-2n)H^2 g_{3-2n}\right\} R^{j-1} +$$

$$+\sum_{k=4}^{\infty} \left\{X(j+k)g_k - \delta(k-n)\ Y(j+k-n)Hg_{k-n} - \delta(k-2n)\ Z(j+k-2n)H^2 g_{k-2n} + \right.$$

$$\left. - \lambda g_{k-4}\right\} R^{j+k-4} = 0 \tag{22}$$

Now, for W(R) given by Eq. (16) to be a solution of Eq. (14) the coefficient of each term of R in Eq. (22) must vanish identically. Thus, equating to zero the coefficient of the term R^{j-4}, the term with the lowest power of R, yields the indicial equation

$$X(j) = j(j-2)[(j-1)^2 - \beta] = 0 \tag{23}$$

The four roots of this equation are

$$j = 0,\ 2,\ 1 + \sqrt{\beta},\ 1 - \sqrt{\beta} \tag{24}$$

For each value of j in Eq. (24), the vanishing of the coefficients of the terms R^{j-3}, R^{j-2}, and R^{j-1} gives the following equations for determining g_1, g_2, and g_3:

$$X(j+1)g_1 = \delta(1-n)\ Y(j+1-n)Hg_{1-n} + \delta(1-2n)\ Z(j+1-2n)H^2 g_{1-2n} \tag{25}$$

$$X(j+2)g_2 = \delta(2-n)\ Y(j+2-n)Hg_{2-n} + \delta(2-2n)\ Z(j+2-2n)H^2 g_{2-2n} \tag{26}$$

$$X(j+3)g_3 = \delta(3-n)\ Y(j+3-n)Hg_{3-n} + \delta(3-2n)\ Z(j+3-2n)H^2 g_{3-2n} \tag{27}$$

Finally, for the determination of each of the coefficients g_k for $k \geq 4$, the following recurrence relation is obtained when the coefficient of the term R^{j+k-4} is equated to zero:

$$X(j+k)g_k = \delta(k-n)\ Y(j+k-n)Hg_{k-n} + \delta(k-2n)\ Z(j+k-2n)H^2 g_{k-2n} + \\ + \lambda\ g_{k-4} \qquad (k \geq 4) \tag{28}$$

This relation determines each of the coefficients g_k $(k \geq 4)$ in terms of the preceding g's, and hence in terms of g_o, for each j in Eq. (24).

An inspection of Eqs. (25) thru (28) indicates that it is not possible to write a simple expression for the g_k explicitly in terms of g_o for a general value of n. However, for any particular n the corresponding solution, W(R), can be written [6] as

$$W(R) = a_o \sum_{k=0,4,5,\ldots}^{\infty} A_k R^k + b_o \sum_{k=0}^{\infty} B_k R^{k+2} + c_o \sum_{k=0}^{\infty} C_k R^{k+1+\sqrt{\beta}} + \\ + d_o \sum_{k=0}^{\infty} D_k R^{k+1-\sqrt{\beta}} \tag{29}$$

In Eq. (29) a_o, b_o, c_o, and d_o are undetermined constants, and $A_k = a_k/a_o$, $B_k = b_k/b_o$, $C_k = c_k/c_o$, and $D_k = d_k/d_o$ where the a_k, b_k, c_k, and d_k correspond to the g_k calculated with $j = 0$, 2, $1+\sqrt{\beta}$, and $1-\sqrt{\beta}$, respectively. The form of the solution given by Eq. (29) applies only for the case in which $\beta \neq p^2/4$, where p is any integer. For cases in which $\beta = p^2/4$

special forms for the solution are required [6]. The isotropic plate ($\beta = 1$), in particular, is one of these cases since the exponents of singularity become $j = 0, 0, 2, 2$, which represents two sets of equal roots, each set differing by an integer.

The solution for $W(R)$ of Eq. (29) must satisfy the "regularity" and boundary conditions discussed previously. In order that the slope be finite at the center of the plate ($R = 0$) the solution corresponding to the root $j = 1-\sqrt{\beta}$ is inadmissible since its derivative is always singular at the origin; hence, $d_o = 0$. It is noted that this condition also insures that the deflection is finite at the center. The second "regularity" condition to be satisfied at the center (Eq. 12) may be written in terms of the non-dimensional variable R as

$$D_r\left[RW''' + W'' - \beta \frac{W'}{R}\right] + RD_r' \left[W'' + \alpha \frac{W'}{R}\right] = 0 \tag{30}$$

Upon substituting Eq. (29) with $d_o = 0$, noting that $\beta \neq 1$ for this form of the solution, and using the definition of D_r, the condition (30) requires that $b_o = 0$. With these results the solution becomes

$$W(R) = a_o \sum_{k=0,4,5,\ldots}^{\infty} A_k R^k + c_o \sum_{k=0}^{\infty} C_k R^{k+1+\sqrt{\beta}} \tag{31}$$

where the remaining constants are to be determined from the boundary conditions at the edge of the plate.

When the boundary conditions (10a) and (10b) are enforced at the edge of the plate (R = 1), the following sets of simultaneous equations are obtained:

$$a_o \sum_{k=0,4,5,\ldots}^{\infty} A_k + c_o \sum_{k=0}^{\infty} C_k = 0$$

$$a_o \sum_{k=4,5,\ldots}^{\infty} kA_k + c_o \sum_{k=0}^{\infty} (k+1+\sqrt{\beta})\, C_k = 0 \tag{32a}$$

$$a_o \sum_{k=0,4,5,\ldots}^{\infty} A_k + c_o \sum_{k=0}^{\infty} C_k = 0$$

$$a_o \sum_{k=4,5,\ldots}^{\infty} k(k+\alpha-1)A_k + c_o \sum_{k=0}^{\infty} (k+1+\sqrt{\beta})(k+\alpha+\sqrt{\beta})C_k = 0 \tag{32b}$$

where Eqs. (32a) and (32b) correspond to the clamped and simply supported plate, respectively. The solution of Eqs. (32a) and (32b) for non-trivial values of a_o and c_o requires that the determinant of the coefficients of a_o and c_o in Eqs. (32a) and (32b) vanishes. These conditions yield the following characteristic equations for the determination of the natural frequencies

for a clamped plate:

$$\left[\sum_{k=0,4,5\ldots}^{\infty} A_k\right]\left[\sum_{k=0}^{\infty} (k+1+\sqrt{\beta})C_k\right] - \left[\sum_{k=4,5,\ldots}^{\infty} kA_k\right]\left[\sum_{k=0}^{\infty} C_k\right] = 0 \tag{33a}$$

for a simply supported plate:

$$\left[\sum_{k=0,4,5,\ldots}^{\infty} A_k\right]\left[\sum_{k=0}^{\infty} (k+1+\sqrt{\beta})(k+\alpha+\sqrt{\beta})C_k\right] - \left[\sum_{k=4,5,\ldots}^{\infty} k(k+\alpha-1)A_k\right]\left[\sum_{k=0}^{\infty} C_k\right] = 0 \tag{33b}$$

The roots of Eqs. (33a) and (33b) give the values of λ which, when substituted into the equation

$$f = \frac{\omega}{2\pi} = \frac{\lambda^{\frac{1}{2}}}{2\pi}\left(\frac{D_o}{\rho h_o a^4}\right)^{\frac{1}{2}} \tag{34}$$

determine the natural frequencies of the plate.

4. ILLUSTRATIVE EXAMPLE

The equations developed in the previous section were applied to several clamped and simply supported plates of various shapes. In particular plates of uniform thickness and those with thickness variations corresponding to n = 1 and n = 3 were considered. For all cases the material parameters α and β were taken to be 0.3 and 1.44, respectively. The numerical calculations were made restricting the series in Eqs. (33a) and (33b) to include terms up to the twelfth power in λ. The results for $\bar{f} = \left[(a^2/h_o)\sqrt{(\rho/E_r)}\right] f$ corresponding to the lowest two frequencies (see Eq. 34) were computed and are presented in the following table.

		Clamped Plate		Simply Supported Plate	
n	H	$\bar{f}_1$	$\bar{f}_2$	$\bar{f}_1$	$\bar{f}_2$
1	0.1	0.4577	1.793	0.2382	1.356
1	0.25	0.3980	1.617	0.2151	1.234
1	0.5	0.2980	1.309	0.1759	1.023
3	0.1	0.4667	1.836	0.2458	1.399
3	0.25	0.4196	1.723	0.2343	1.340
3	0.5	0.3386	1.509	0.2154	1.222
uniform thickness		0.4975	1.908	0.2536	1.436

All the computations were performed on an IBM 360 computer at the Institute's Computer Center.

5. DISCUSSION OF RESULTS

A method for determining the natural frequencies of clamped and simply supported orthotropic circular plates of radially varying thickness has been presented. From an examination of the numerical results it may be concluded that the natural frequencies for clamped and simply supported plates of a given material tend to decrease as the ratio of the edge thickness of the plate to its thickness at the center is decreased, and tend to increase as the thickness exponent n increases.

The solution for W(R) as given by Eq. (29) is valid everywhere in the plate where the material is properly orthotropic. It has been noted, however, that the form of cylindrical orthotropy considered in this investigation cannot exist at the center of the plate. In order to correct the theory for this singularity in the material properties, the neighborhood of the center of the plate could be treated as an isotropic core of radius, say, Δ. The "regularity" conditions at the center would then be applied to the solution for the isotropic core; and for the complete solution the continuity of $w, (w,_r)$, M_r and Q_r could be enforced at $r = \Delta$, the boundary of the isotropic core and the orthotropic plate. The solution which has been obtained in this investigation may be considered a limiting case of this approach, where Δ is allowed to go to zero. It is this inexactness of the solution at the origin which causes the theory to predict infinite moments at the center for cases where $\beta < 1$, and zero moments at the center for cases where $\beta > 1$. However, it is hoped that the present theory will predict frequencies in good agreement with those which may be predicted by the complete solution with an isotropic core of a very small radius.

REFERENCES

1. Pandalai, K. A. V. and Patel, S. A.: Natural Frequencies of Orthotropic Circular Plates, AIAA Journal, Vol. 3, No. 4, pp. 780-781, 1964.

2. Minkarah, I. A. and Hoppmann, W. H. II: Flexural Vibrations of Cylindrically Aeolotropic Circular Plates, The Journal of the Acoustical Society of America, Vol. 36, No. 3, pp. 470-475, 1964.

3. Essenburg, F.: On Axially Symmetrical Plates of Variable Thickness, The University of Michigan Research Institute, Technical Note No. 2, 1958.

4. Carrier, G. F.: Stress Distributions in Cylindrically Aeolotropic Plates, Journal of Applied Mechanics, Vol. 65, pp. A117-A122, 1943.

5. Timoshenko, S. and Woinowsky-Krieger, S.: Theory of Plates and Shells, 2nd Edition, McGraw-Hill Book Co., Inc., pp. 364, 298, 1959.

6. Hildebrand, F. B.: Advanced Calculus for Applications, Prentice-Hall, Inc., pp. 132-135, 1965.

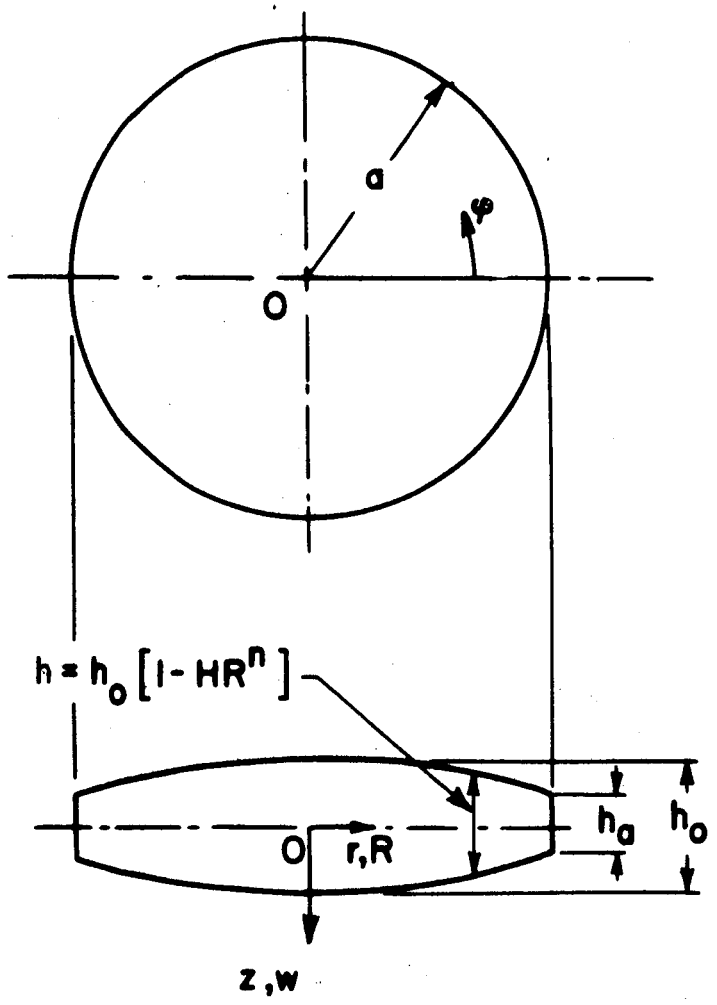

Fig.1 Plate Geometry

DISTRIBUTION LIST FOR UNCLASSIFIED
TECHNICAL REPORTS ISSUED UNDER
CONTRACT NONR 839(40)(FBM), TASK NR 064-427

PART I - GOVERNMENT

Administrative & Liaison Activities

Chief of Naval Research
Attn:
423
439 (2)
468
Department of the Navy
Washington, D.C. 20360

Commanding Officer
ONR Branch Office
495 Summer Street
Boston, Massachusetts 02210

Commanding Officer
ONR Branch Office
219 S. Dearborn Street
Chicago, Illinois 60604

Commanding Officer
ONR Branch Office
Box 39, Navy 100
c/o Fleet Post Office (5)
New York, New York 09510

Commanding Officer
ONR Branch Office
207 West 24th Street
New York, New York 10011

Commanding Officer
ONR Branch Office
1030 E. Green Street
Pasadena, California 91101

Commanding Officer
ONR Branch Office
U.S. Post Office & Courts Bldg.
1076 Mission Street
San Francisco, California 94103

U.S. Naval Research Laboratory
Attn: Technical Information Div.
Washington, D.C. 20390 (6)

Defense Documentation Center
Cameron Station
Alexandria, Virginia 22314 (20)

Army

Commanding Officer
U.S. Army Research Off.-Durham
Attn: Mr. J.J. Murray
CRD-AA-IP
Box CM, Duke Station
Durham, North Carolina 27706

Commanding Officer
AMXMR-ATL
U.S. Army Materials Res. Agcy.
Watertown, Massachusetts 02172

Redstone Scientific Info. Center
Chief, Document Section
U.S. Army Missile Command
Redstone Arsenal, Alabama 35809

AMSMI-RKP
Attn: Mr. T. H. Duerr
Redstone Arsenal, Alabama 35809

Ballistic Research Laboratories
Attn: Dr. A.S. Elder
Aberdeen Proving Ground
Aberdeen, Maryland 21005

Ballistic Research Laboratories
Attn: Mr. H.P. Gay
AMXBR-ID
Aberdeen Proving Ground
Aberdeen, Maryland 21005

Technical Library
Aberdeen Proving Ground
Aberdeen, Maryland 21005

Navy

Commanding Officer and Director
Attn: Code 042 (Cent. Lib. Br.)
050
700 (Struc. Mech. Lab.)
720
725
740 (Mr. W. J. Sette)
901 (Dr. M. Strassberg)
941 (Dr. R. Liebowitz)
945 (Mr. A.O. Sykes)
960 (Mr. E.F. Noonan)
962 (Dr. E. Buchmann)
David Taylor Model Basin
Washington, D.C. 20007

Navy (cont'd)

Undersea Explosion Research Div.
Attn: Mr. D.S. Cohen
Code 780
David Taylor Model Basin
Norfolk Naval Shipyard
Portsmouth, Virginia 23709

Commanding Officer & Director
Code 257, Library
U.S. Navy Marine Engr. Lab.
Annapolis, Maryland 21402

Commander
Technical Library
U.S. Naval Ordnance Test Station
Pasadena Annex
3202 E. Foothill Blvd.
Pasadena, California 91107

U.S. Naval Ordnance Test Station
Attn: Dr. Arnold Adicoff
Code 5056
China Lake, California 93557

Commander
U.S. Naval Ordnance Test Station
Mechanical Engineering Division
Code 556
China Lake, California 93557

Commanding Officer & Director
U.S. Naval Civil Engr. Lab
Code L31
Port Hueneme, California 93041

Shipyard Technical Library
Code 242L
Portsmouth Naval Shipyard
Portsmouth, New Hampshire 03804

U.S. Naval Electronics Laboratory
Attn: Dr. R.J. Christensen
San Diego, California 92152

U.S. Naval Ordnance Laboratory
Mechanics Division
RFD 1, White Oak
Silver Spring, Maryland 20910

U.S. Naval Ordnance Laboratory
Attn: Mr. H.A. Perry, Jr.
Non-Metallic Materials Division
Silver Spring, Maryland 20910

Supervisor of Shipbuilding
U.S. Navy
Newport News, Virginia 23607

Shipyard Technical Library
Building 746, Code 303TL
Mare Island Naval Shipyard
Vallejo, California 94592

Director
U.S. Navy Underwater Sound Ref. Lab.
Office of Naval Research
P.O. Box 8337
Orlando, Florida 32806

Technical Library
U.S. Naval Propellant Plant
Indian Head, Maryland 20640

U.S. Naval Propellant Plant
Attn: Dr. J.G. Tuono
Research & Development Division
Indian Head, Maryland 20640

Chief of Naval Operations
Attn: Code Op-03EG
Op-07T
Department of the Navy
Washington, D.C. 20350

Director, Special Projects
Attn: Sp-001
43
2731
Department of the Navy
Washington, D.C. 20360

Executive Secretary PLRRD
Special Projects Office (Sp-00110)
Department of the Navy
Washington, D.C. 20360

U.S. Naval Applied Science Lab.
Code 222
Technical Library
Building 1,
Brooklyn, New York 11251

Director
Aeronautical Materials Lab.
Naval Air Engineering Center
Naval Base
Philadelphia, Pennsylvania 19112

Mr. Garet A. Bornstein
U. S. Naval Propellant Plant
Indian Head, Md. 20640

Navy (cont'd)

Director
Aeronautical Structures Lab.
Naval Air Engineering Center
Naval Base
Philadelphia, Pennsylvania 19112

Director
Attn: Code 5360
5500
6200
6210
6250
6260
Technical Library
Naval Research Library
Washington, D. C. 20390

Chief, Bureau of Naval Weapons
Attn: Code DLI-3
RAAD-2
RAAD-24 (Mr. E. M. Ryan)
RM
RMMP-2
RMMP-11 (Mr. Silver)
RMMP-22 (Mr. J. C. Ardinger)
RR
R-12
RRRE
RRRE-61 (Mr. W. J. Marciniak)
RU
Department of the Navy
Washington, D. C. 20360

Chief, Bureau of Ships
Attn: Code 210-1
306
345
421
423
430
440
442
443
1500
Department of the Navy
Washington, D. C. 20360

Commander
U. S. Naval Weapons Laboratory
Dahlgren, Virginia 22448

Bureau of Yards & Docks Tech. Lib.
Yards & Docks Annex
Department of the Navy
Washington, D. C. 20390

Mr. Ernest A. Hogge
Head, Scientific Support Division
U. S. Navy Mine Defense Laboratory
Panama City, Florida 32402

Air Force

Commander, WADD
Attn: Code WWRMDD AFFDL (FDDS)
Structures Division
AFLC (MCEEA)
Code WWRMDS AFFDL (FDT)
Code WWRC AFML (MAAM)
Code WCLSY
SEG (SEFSD, Mr. Lakin)
Wright-Patterson AFB
Dayton, Ohio 45433

Commander
Chief, Applied Mechanics Group
U. S. Air Force Inst. of Tech.
Wright-Patterson AFB
Dayton, Ohio 45433

Chief, Civil Engineering Branch
WLRC, Research Division
Air Force Weapons Laboratory
Kirtland AFB, New Mexico 87117

Commander
AFRPL (RPMC/Dr. F. N. Kelley)
Edwards AFB, California 93528

Commander, Attn: Mr. A. L. Skinner, COMQQC
Hill AFB, Utah 84401

Commander
Mechanics Division
Air Force Office of Scien. Res.
Washington, D. C. 20333

NASA

Structures Research Division
Attn: Mr. R. R. Heldenfels, Chief
National Aeronautics & Space Admin.
Langley Research Center
Langley Station
Hampton, Virginia 23365

NASA (cont'd)

National Aeronautics & Space Admin.
Code RV-2
Washington, D. C. 20546

National Aeronautics & Space Admin.
Associate Administrator for Advanced
Research & Technology
Washington, D. C. 20546

Scientific & Tech. Info. Facility
NASA Representative (S-AK/DL)
P.O. Box 33
College Park, Md. 20740

Other Government Activities

Commandant
Chief, Testing & Development Div.
U. S. Coast Guard
1300 E Street, N. W.
Washington, D. C. 20226

Director
Marine Corps Landing Force Devel. Cen.
Marine Corps Schools
Quantico, Virginia 22134

Director
Attn: Mr. B. L. Wilson
National Bureau of Standards
Washington, D. C. 20234

National Science Foundation
Engineering Division
1951 Constitution Avenue, N. W.
Washington, D. C. 20550

Science & Tech. Division
Library of Congress
Washington, D. C. 20540

Director
STBS
Defense Atomic Support Agency
Washington, D. C. 20301

Commander Field Command
Defense Atomic Support Agency
Sandia Base
Albuquerque, New Mexico 87115

Chief, Defense Atomic Support Agcy.
Blast & Shock Division
The Pentagon
Washington, D. C. 20301

Director Defense Research & Engr.
Technical Library
Room 3C-128
The Pentagon
Washington, D. C. 20301

Chief, Airframe & Equipment Branch
FS-120
Office of Flight Standards
Federal Aviation Agency
Washington, D. C. 20553

Chief, Division of Ship Design
Maritime Administration
Washington, D. C. 20235

Deputy Chief, Office of Ship Constr.
Attn: Mr. U. L. Russo
Maritime Adminstration
Washington, D. C. 20235

Executive Secretary
Committee on Undersea Warfare
National Academy of Sciences
2101 Constitution Avenue
Washington, D. C. 20418

Ship Hull Research Committee
Attn: Mr. A. R. Lytle
National Research Council
National Academy of Sciences
2101 Constitution Avenue
Washington, D. C. 20418

PART II - CONTRACTORS AND OTHER TECHNICAL COLLABORATORS

Universities

Dr. D. C. Drucker
Division of Engineering
Brown University
Providence, Rhode Island 02912

Prof. J. Edmund Fitzgerald
Chairman, Dept. of Civil Engineering
University of Utah
Salt Lake City, Utah 84112

Universities (cont'd)

Prof. M. E. Gurtin
Brown University
Providence, Rhode Island 02912

Prof. R. S. Rivlin
Division of Applied Mathematics
Lehigh University
Bethlehem, Pennsylvania 18015

Dr. Paul J. Blatz
Science Center-Aerospace & Systems Group
North American Rockwell Corp.
1049 Camino Dos Rios
Thousand Oaks, California 91360

Prof. Julius Miklowitz
Div. of Engr. & Applied Sciences
California Institute of Technology
Pasadena, California 91109

Prof. George Sih
Department of Mechanics
Lehigh University
Bethlehem, Pennsylvania 18015

Solid Propellant Library
Firestone Flight Science Lab.
California Institute of Technology
Pasadena, California 91109

Prof. Eli Sternberg
Div. of Engr. & Applied Sciences
California Institute of Technology
Pasadena, California 91109

Prof. Paul M. Naghdi
Div. of Applied Mechanics
Etcheverry Hall
University of California
Berkley, California 94720

Prof. J. Baltrukonis
Mechanics Division
The Catholic Univ. of America
Washington, D. C. 20017

Dr. Y. Weitsman
Division of Applied Mathematics
Brown University
Providence, R. I. 02912

Prof. A. J. Durelli
Mechanics Division
The Catholic Univ. of America
Washington, D. C. 20017

Prof. H. H. Bleich
Department of Civil Engr.
Columbia University
Amsterdam & 120th Street
New York, New York 10027

Prof. R. D. Mindlin
Department of Civil Engr.
Columbia University
S. W. Mudd Building
New York, New York 10027

Prof. B. A. Boley
Department of Civil Engr.
Columbia University
Amsterdam & 120th Street
New York, New York 10027

Prof. F. L. DiMaggio
Department of Civil Engr.
Columbia University
616 Mudd Building
New York, New York 10027

Prof. A. M. Freudenthal
Dept. of Civil Engr. & Engr. Mech.
Columbia University
New York, New York 10027

Dr. William A. Nash
Dept. of Mech. & Aero. Eng.
University of Massachusetts
Amherst, Mass. 01002

Prof. B. Budiansky
Div. of Engr. & Applied Physics
Pierce Hall
Harvard University
Cambridge, Massachusetts 02138

Prof. P. G. Hodge
Department of Mechanics
Illinois Institute of Technology
Chicago, Illinois 60616

Universities (cont'd)

Prof. H. T. Corten
University of Illinois
Urbana, Illinois 61803

Prof. W. J. Hall
Department of Civil Engr.
University of Illinois
Urbana, Illinois 61803

Prof. N. M. Newmark
Dept. of Civil Engineering
University of Illinois
Urbana, Illinois 61803

Dr. W. H. Avery
Applied Physics Laboratory
Johns Hopkins University
8621 Georgia Avenue
Silver Spring, Maryland 20910

Prof. J. B. Tiedemann
Dept. of Aero. Engr. & Arch.
University of Kansas
Lawrence, Kansas 66045

Prof. S. Taira
Department of Engineering
Kyoto University
Kyoto, Japan

Prof. E. Reissner
Dept. of Mathematics
Massachusetts Inst. of Tech.
Cambridge, Massachusetts 02139

Library (Code 0384)
U. S. Naval Postgraduate School
Monterey, California 93940

Dr. Joseph Marin
Prof. of Materials Science
Dept. of Materials Sc. & Chem.
U. S. Naval Postgraduate School
Monterey, California 93940

Prof. E. L. Reiss
Courant Inst. of Math. Sciences
New York University
4 Washington Place
New York, New York 10003

Dr. Francis Cozzarelli
Div. of Interdisciplinary
Studies and Research
School of Engineering
State Univ. of N. Y. at Buffalo
Buffalo, New York 14214

Dr. George Herrmann
The Technological Institute
Northwestern University
Evanston, Illinois 60201

Director, Ordnance Research Lab.
The Pennsylvania State University
P. O. Box 30
State College, Pennsylvania 16801

Prof. Eugen J. Skudrzyk
Department of Physics
Ordnance Research Lab.
The Pennsylvania State University
P. O. Box 30
State College, Pennsylvania 16801

Dean Oscar Baguio
College of Engineering
University of the Philippines
Quezon City,
Philippines

Prof. J. Kempner
Dept. of Aero. Engr. & Applied Mech.
Polytechnic Institute of Brooklyn
333 Jay Street
Brooklyn, New York 11201

Prof. J. Klosner
Polytechnic Institute of Brooklyn
333 Jay Street
Brooklyn, New York 11201

Prof. F. R. Eirich
Polytechnic Institute of Brooklyn
333 Jay Street
Brooklyn, New York 11201

Universities (cont'd)

Dr. S. L. Koh
School of Aero., Astro. & Engr. Sc.
Purdue University
Lafayette, Indiana 47907

Prof. E. H. Lee
Div. of Engr. Mechanics
Stanford University
Stanford, California 94305

Dr. Nicholas J. Hoff
Dept. of Aero. & Astro.
Stanford University
Stanford, California 94305

Prof. J. N. Goodier
Div. of Engr. Mechanics
Stanford University
Stanford, California 94305

Prof. Markus Reiner
Technion R & D Foundation, Ltd.
Haifa, Israel

Prof. Tsuyoshi Hayashi
Department of Aeronautics
Faculty of Engineering
University of Tokyo
BUNKYO-KU
Tokyo, Japan

Prof. R. J. H. Bollard
Chairman, Aeronautical Engr. Dept.
207 Guggenheim Hall
University of Washington
Seattle, Washington 98105

Prof. Albert S. Kobayashi
Dept. of Mechanical Engr.
University of Washington
Seattle, Washington 98105

Officer-in-Charge
Post Graduate School for Naval Off.
Webb Institute of Naval Arch.
Crescent Beach Road, Glen Cove
Long Island, New York 11542

Industry and Research Institutes

Mr. K. W. Bills, Jr.
Dept. 4722, Bldg. 0525
Aerojet-General Corporation
P. O. Box 1947
Sacramento, California 95809

Dr. James H. Wiegand
Senior Dept. 4720 Bldg. 0525
Ballistics & Mech. Properties Lab.
Aerojet-General Corporation
P. O. Box 1947
Sacramento, California 95809

Mr. J. S. Wise
Aerospace Corporation
P. O. Box 1308
San Bernardino, California 92402

Dr. Vito Salerno
Applied Technology Assoc., Inc.
29 Church Street
Ramsey, New Jersey 07446

Library Services Department
Report Section, Bldg. 14-14
Argonne National Laboratory
9700 S. Cass Avenue
Argonne, Illinois 60440

Dr. E. M. Kerwin
Bolt, Beranek, & Newman, Inc.
50 Moulton Street
Cambridge, Massachusetts 02138

Dr. M. C. Junger
Cambridge Acoustical Associates
129 Mount Auburn Street
Cambridge, Massachusetts 02138

Dr. F. R. Schwarzl
Central Laboratory T. N. O.
134 Julianalaan
Delft, Holland

Industry & Research Inst. (cont'd)

Mr. Ronald D. Brown
Applied Physics Laboratory
Chemical Propulsion Agency
8621 Georgia Avenue
Silver Spring, Maryland 20910

Research and Development
Electric Boat Division
General Dynamics Corporation
Groton, Connecticut 06340

Supervisor of Shipbuilding, USN,
and Naval Insp. of Ordnance
Electric Boat Division
General Dynamics Corporation
Groton, Connecticut 06340

Dr. L. H. Chen
Basic Engineering
Electric Boat Division
General Dynamics Corporation
Groton, Connecticut 06340

Mr. Ross H. Petty
Technical Librarian
Allegany Ballistics Lab.
Hercules Powder Company
P. O. Box 210
Cumberland, Maryland 21501

Dr. J. H. Thacher
Allegany Ballistic Laboratory
Hercules Powder Company
Cumberland, Maryland 21501

Dr. Joshua E. Greenspon
J. G. Engr. Research Associates
3831 Menlo Drive
Baltimore, Maryland 21215

Mr. R. F. Landel
Jet Propulsion Laboratory
4800 Oak Grove Drive
Pasadena, California 91103

Mr. G. Lewis
Jet Propulsion Laboratory
4800 Oak Grove Drive
Pasadena, California 91103

Dr. M. L. Baron
Paul Weidlinger, Consulting Engr.
777 Third Ave., - 22nd Floor
New York, New York 10017

Dr. G. R. Makepeace
Director, Research & Engineering
Lockheed Propulsion Company
P. O. Box 111
Redlands, California 92374

Dr. R. C. DeHart
Southwest Research Institute
8500 Culebra Road
San Antonio,
Texas 78206

Library
Newport News Shipbuilding &
Dry Dock Company
Newport News, Virginia 23607

Mr. E. A. Alexander
Rocketdyne Division, Research Dept. (991)
North American Aviation
6633 Canoga Avenue
Canoga Park, California 91304

Mr. Cezar P. Nuguid
Deputy Commisioner
Philippine Atomic Energy Commission
Manila, Philippines

Mr. S. C. Britton
Solid Rocket Division
Rocketdyne
P. O. Box 548
McGregor, Texas 76657

Dr. A. J. Ignatowski
Redstone Arsenal Research Div.
Rohm & Haas Company
Huntsville, Alabama 35807

Dr. M. L. Merritt
Division 5412
Sandia Corporation
Sandia Base
Albuquerque, New Mexico 87115

Director
Ship Research Institute
Ministry of Transportation
700, SHINKAWA
Mitaka
Tokyo, Japan

Dr. H. N. Abramson
Southwest Research Institute
8500 Culebra Road
San Antonio, Texas 78206

Dr. Thor Smith
Stanford Research Institute
Menlo Park,
California 94025

Dr. T. C. Fan
The Rand Corporation
1700 Main Street
Santa Monica, California 90406

UNCLASSIFIED
Security Classification

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY *(Corporate author)*
Polytechnic Institute of Brooklyn
Dept. of Aerospace Engineering and Applied Mechanics
333 Jay Street, Brooklyn, N.Y. 11201

2a. REPORT SECURITY CLASSIFICATION
UNCLASSIFIED

2b. GROUP
---

3. REPORT TITLE

NATURAL FREQUENCIES OF ORTHOTROPIC CIRCULAR PLATES OF VARIABLE THICKNESS

4. DESCRIPTIVE NOTES *(Type of report and inclusive dates)*
Research Report

5. AUTHOR(S) *(Last name, first name, initial)*

Alan P. Salzman and Sharad A. Patel

6. REPORT DATE
April, 1968

7a. TOTAL NO. OF PAGES
35

7b. NO. OF REFS
6

8a. CONTRACT OR GRANT NO.
Nonr 839(40)FBM

b. PROJECT NO.
Task NR 064-427

c.

d.

9a. ORIGINATOR'S REPORT NUMBER(S)
PIBAL Report No. 68-8

9b. OTHER REPORT NO(S) *(Any other numbers that may be assigned this report)*

10. AVAILABILITY/LIMITATION NOTICES

ONR & DDC
Distribution of this document is unlimited

11. SUPPLEMENTARY NOTES

12. SPONSORING MILITARY ACTIVITY
Office of Naval Research
Washington, D.C.

13. ABSTRACT

The present investigation is concerned with the natural frequencies of orthotropic circular plates of variable thickness. In particular, a thickness variation of the form $h = h_o (1-HR^n)$ has been selected. The derivation of the differential equation governing the motion of the plate is based on the classical formulation of the theory of plates. The solution of this equation for the axisymmetric case is obtained by an application of the method of Frobenius. Characteristic equations for the natural frequencies of clamped and simply supported plates are derived and numerical results are presented for several plates of various shapes.

DD FORM 1 JAN 64 1473

UNCLASSIFIED
Security Classification