NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

TECHNICAL NOTE 2036

CHARTS OF AIRPLANE ACCELERATION RATIO

FOR GUSTS OF ARBITRARY SHAPE

By Bernard Mazelsky

Langley Aeronautical Laboratory
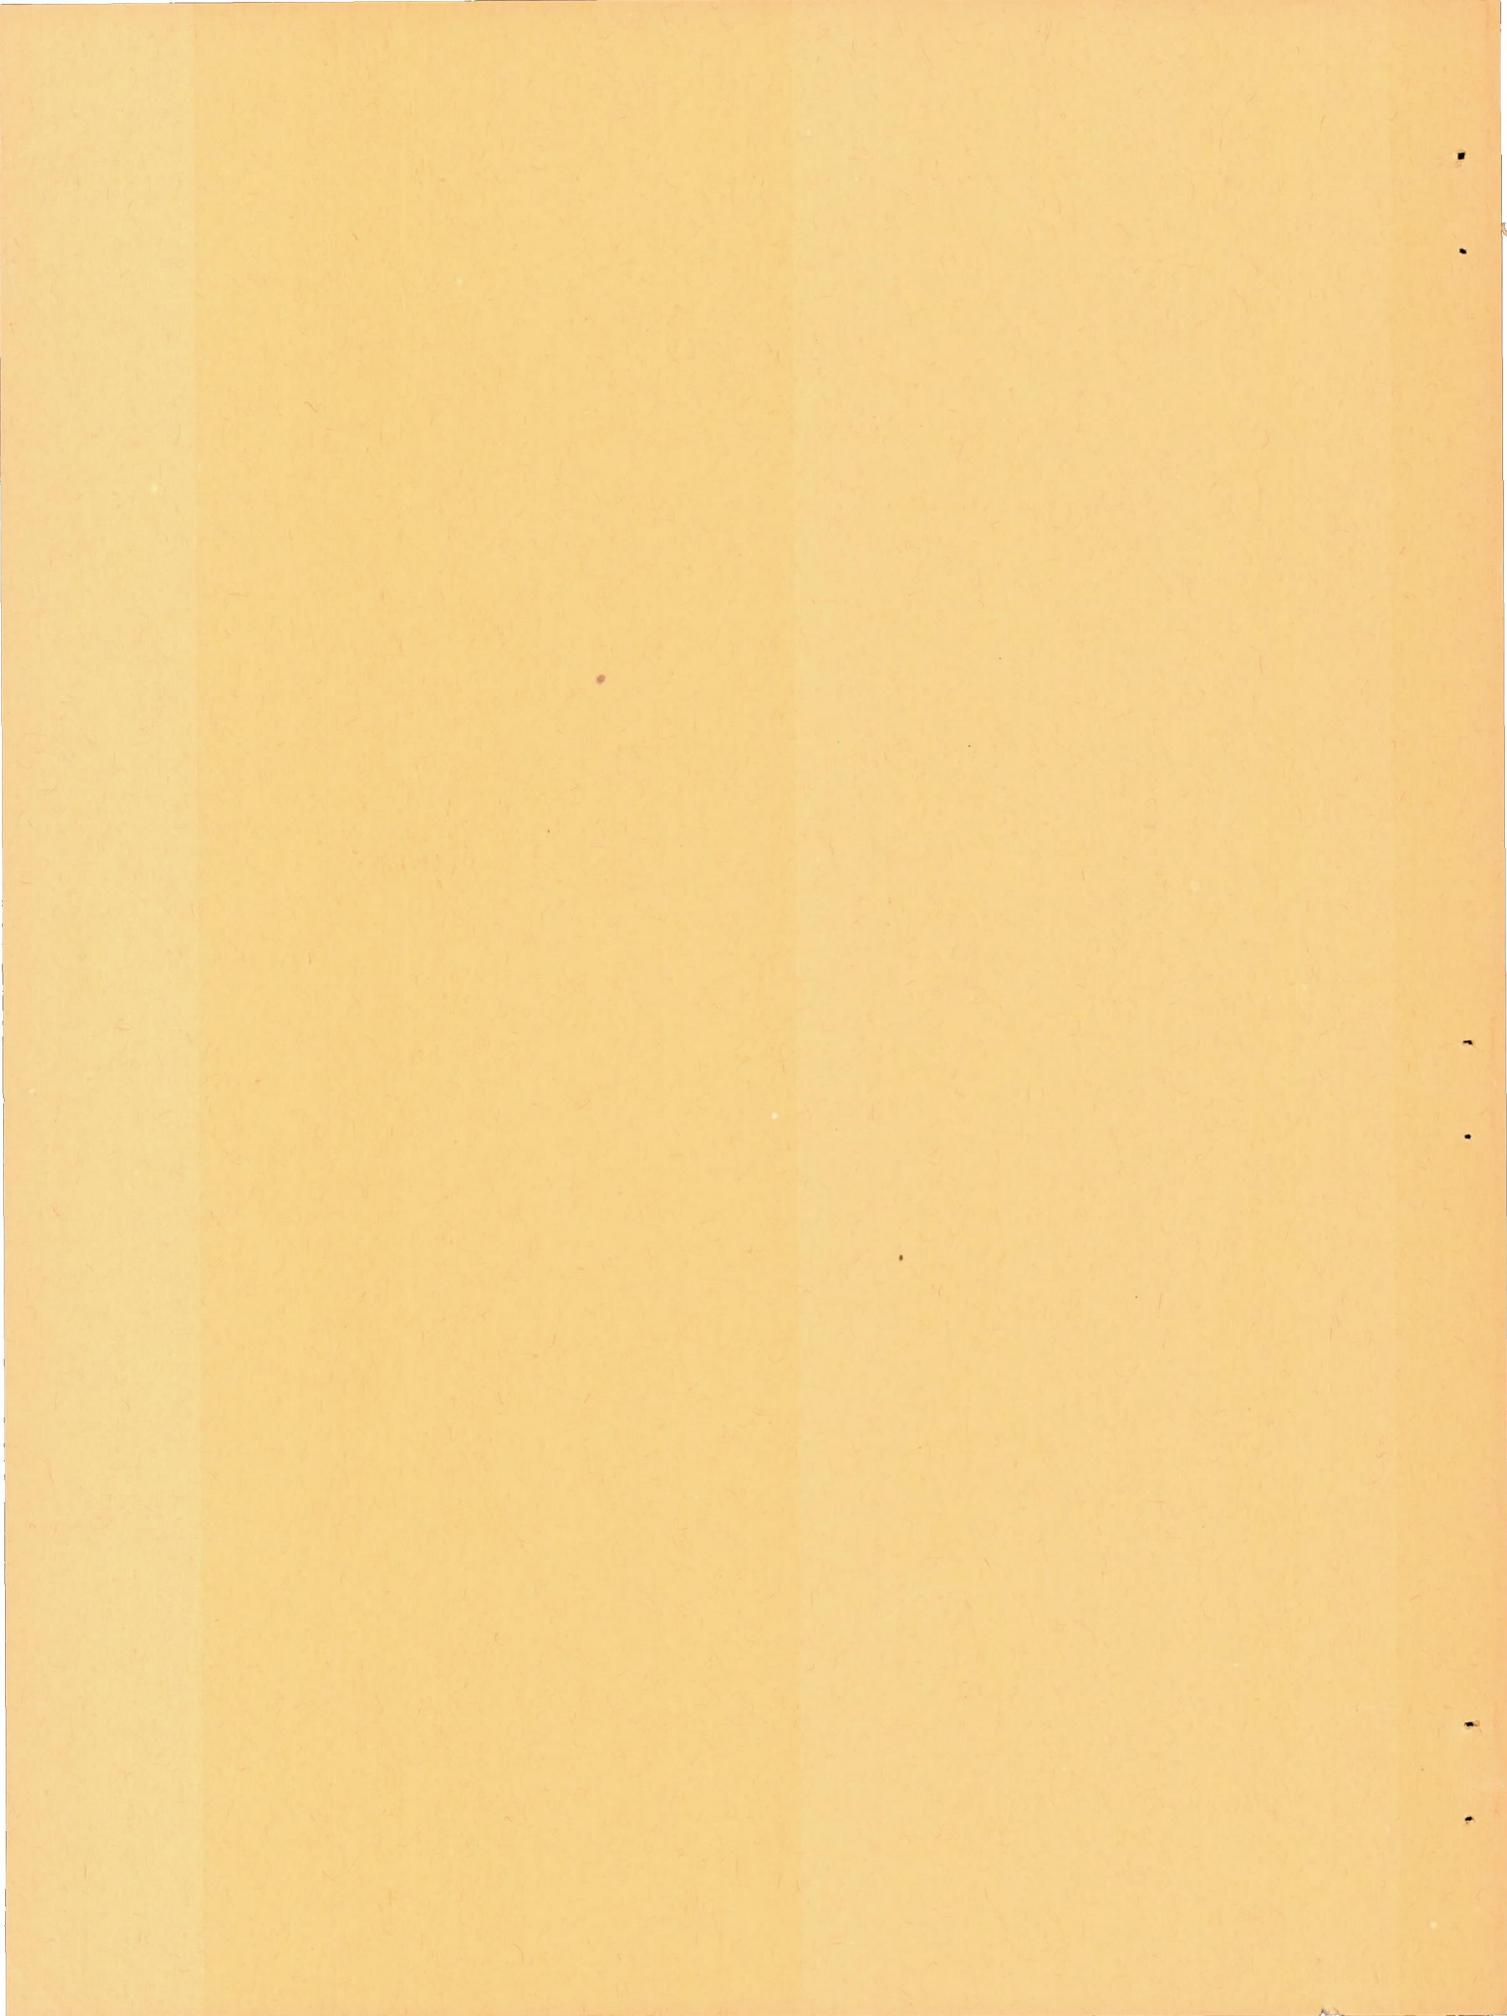Langley Air Force Base, Va.

NACA

Washington

February 1950

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

TECHNICAL NOTE 2036

CHARTS OF AIRPLANE ACCELERATION RATIO

FOR GUSTS OF ARBITRARY SHAPE

By Bernard Mazelsky

SUMMARY

The equation of vertical motion for an airplane flying in gusty air
is simplified in order that its solution is a function of only two
parameters, namely, the mass parameter of the airplane and the shape of
the gust the airplane is penetrating. The solutions of the equation are
presented in the form of charts that can be used for estimating rapidly
and easily the acceleration ratios encountered by airplanes with
different mass parameters penetrating a sharp-edge gust, a gust of
arbitrary shape, or a triangular gust.

INTRODUCTION

For many problems of gust loads it has been found practical to
calculate the loads as if they were for a rigid airplane restrained in
pitch under the action of the gust. Although previous investigations
have presented solutions for particular mass parameters and gust shapes,
they have not been found sufficiently accurate. In the present paper
the equation of motion has therefore been solved for a large range of
mass parameters to obtain charts of airplane reactions to specific
gusts and to provide a means for obtaining loads on airplane wings for
arbitrary gust shapes. The charts presented are based on two-
dimensional unsteady-lift curves and a numerical solution of the
equation of motion.

SYMBOLS

$\dfrac{dC_L}{d\alpha}$ slope of wing lift curve, per radian

ρ mass density of air, slugs per cubic foot

V forward velocity, feet per second

W airplane weight, pounds

S area of wing, square feet

c mean aerodynamic chord, feet

g acceleration due to gravity, feet per second per second

s penetration into gust, chords

Δs increment of s used in numerical solution

C_{L_g} normalized unsteady-lift function due to penetration of a sharp-edge gust

F_m forcing function in recurrence formula due to pentration of gust

C_{L_α} normalized unsteady-lift function for a unit change of angle of attack

A_m transformed unsteady-lift function $(1 - C_{L_\alpha}(s))$

U gust velocity, feet per second

$H, H_1, H_2, \ldots$ gradient distances of gusts, chords

μ_g mass parameter $\left(\dfrac{2W}{\rho \dfrac{dC_L}{d\alpha} Scg} \right)$

$\Delta n(s)$ load-factor increment

Δn_s load-factor increment as computed by the gust-load formula $\left(\dfrac{\rho \dfrac{dC_L}{d\alpha} VSU_{max}}{2W} \right)$

$\Delta n(s)/\Delta n_s$ acceleration ratio

$\left(\dfrac{\Delta n(s)}{\Delta n_s}\right)_{seg}$ acceleration ratio for penetration of a sharp-edge gust

I integral of acceleration ratio $\Delta n/\Delta n_s$

Subscripts:

max   maximum value

m   integer denoting m increments of s in recurrence formula $(s/\Delta s)$

1   denotes point at which solution applies

DERIVATION AND USE OF CHARTS

The following assumptions are made for stating the equation of motion:

(1) The gust velocity is uniform across the span and parallel to the vertical axis of the airplane at any instant.

(2) The airplane is in steady level flight prior to entry into the gust.

(3) The airplane can rise but does not pitch under the action of the gust.

(4) The airplane is rigid.

(5) The lift increment of the horizontal tail due to the gust and the airplane motions is negligible as compared to the wing lift increment.

The following equation for describing the vertical motion of the airplane is written in terms of acceleration ratios:

$$\frac{\Delta n(s_1)}{\Delta n_s} = \int_0^{s_1} C_{L_g}(s_1 - s)\, \frac{d\left(\dfrac{U(s)}{U_{max}}\right)}{ds}\, ds - \frac{1}{\mu_g} \int_0^{s_1} C_{L_\alpha}(s_1 - s)\, \frac{\Delta n(s)}{\Delta n_s}\, ds \qquad (1)$$

The first term on the right represents the force due to the gust and the second, the alleviation due to the vertical motion of the airplane.

The values of the load-factor increment Δn_s and mass parameter μ_g may be obtained from the characteristics of the airplane and its flight conditions by the following equations:

$$\Delta n_s = \frac{\rho \frac{dC_L}{d\alpha} V S U_{max}}{2W} \tag{2}$$

and

$$\mu_g = \frac{2W}{\rho \frac{dC_L}{d\alpha} S c g} \tag{3}$$

Sharp-Edge Gust

For a sharp-edge gust (fig. 1(a)), equation (1) can be rewritten

$$\left(\frac{\Delta n(s_1)}{\Delta n_s}\right)_{seg} = C_{L_g}(s) - \frac{1}{\mu_g} \int_0^{s_1} C_{L_\alpha}(s_1 - s) \frac{\Delta n(s)}{\Delta n_s} ds \tag{4}$$

Equation (4) has been solved by a numerical method according to reference 1 and the solution is written in the form of a recurrence formula. Utilizing the procedure in this reference and making substitutions for the unsteady-lift functions gives the numerical solution of equation (4) in recurrence form; thus,

$$\left(\frac{\Delta n}{\Delta n_s}\right)_m = K_1 F_m + K_2 I_{m-1} + K_3\left(\frac{\Delta n}{\Delta n_s}\right)_{m-1} + K_4\left(\frac{\Delta n}{\Delta n_s}\right)_{m-2} + K_5\left(\frac{\Delta n}{\Delta n_s}\right)_{m-3}$$

$$+ K_6\left(\frac{\Delta n}{\Delta n_s}\right)_{m-4} + K_7\left(\frac{\Delta n}{\Delta n_s}\right)_{m-5} + K_8\left(\frac{\Delta n}{\Delta n_s}\right)_{m-6} \tag{5}$$

where

$$F_m = C_{L_g}(m) = C_{L_g}(s)$$

$$I_m = I_{m-1} + \frac{\Delta s}{24}\left[9\left(\frac{\Delta n}{\Delta n_s}\right)_m + 19\left(\frac{\Delta n}{\Delta n_s}\right)_{m-1} - 5\left(\frac{\Delta n}{\Delta n_s}\right)_{m-2} + \left(\frac{\Delta n}{\Delta n_s}\right)_{m-3}\right] \quad (6)$$

$$K_1 = \frac{1}{\left[1 + \frac{\Delta s}{\mu_g}\left(\frac{9}{24} - \frac{A_0}{3}\right)\right]} \quad (7a)$$

$$K_2 = -\frac{1}{\mu_g}K_1 \quad (7b)$$

$$K_3 = \frac{K_1\,\Delta s}{\mu_g}\left(\frac{4A_1}{3} - \frac{19}{24}\right) \quad (7c)$$

$$K_4 = \frac{K_1\,\Delta s}{\mu_g}\left(\frac{5}{24} + \frac{2A_2}{3}\right) \quad (7d)$$

$$K_5 = \frac{K_1\,\Delta s}{\mu_g}\left(\frac{4A_3}{3} - \frac{1}{24}\right) \quad (7e)$$

$$K_6 = \frac{2\,\Delta s K_1 A_4}{3\mu_g} \quad (7f)$$

$$K_7 = \frac{4 \, \Delta s K_1 A_5}{3 \mu_g} \tag{7g}$$

$$K_8 = \frac{\Delta s K_1 A_6}{3 \mu_g} \tag{7h}$$

and

$$A_m = 1 - C_{L_\alpha}(s) \tag{8}$$

Equation (5) is evaluated for a range of mass parameters from 10 to 100 and the results are shown in figure 2. In the calculations, the unsteady-lift functions derived for the two-dimensional wing are assumed to be made applicable to the finite wing by replacing the slope of the lift curve for the two-dimensional wing by the slope of the lift curve for the finite wing. These unsteady-lift functions due to penetration of a sharp-edge gust $C_{L_g}(s)$ and an instantaneous unit angle-of-attack change $C_{L_\alpha}(s)$ for a two-dimensional wing were normalized from those given in reference 2.

Although equation (4) can be solved in closed form by means of operators, the solution is unwieldy and the numerical method was adopted for ease in computation.

The inaccuracies incurred in the solution by the numerical method are principally a function of the mass parameter μ_g and the increment Δs. For high values of μ_g and small values of Δs the accuracy of the calculation is increased, conversely for low values of μ_g and large values of Δs the accuracy is decreased. When the recurrence equation was evaluated, the value of Δs was appropriately changed for the range of μ_g considered.

Arbitrary Gust Shape

In order to calculate the response to an arbitrary gust shape, the response to a sharp-edge gust may be used as an indicial response with the gust shape as a forcing function in Duhamel's integral. (See reference 3.) Thus,

$$\frac{\Delta n(s_1)}{\Delta n_s} = \int_0^{s_1} \left(\frac{\Delta n}{\Delta n_s}\right)_{seg} (s_1 - s) \; \frac{d\left(\frac{U(s)}{U_{max}}\right)}{ds} \; ds \qquad (9)$$

Various methods are given in reference 4 for evaluating equation (9) numerically; however, if the forcing function consists of a series of straight lines, equation (9) can be modified by the following procedure: For a linear disturbance starting from $s = 0$ with a slope $1/H$ and extending to infinity (fig. 1(b)), equation (9) can be rewritten as follows:

$$\frac{\Delta n(s)}{\Delta n_s} = \frac{1}{H} \int_0^{s} \left(\frac{\Delta n(s)}{\Delta n_s}\right)_{seg} ds \qquad (10)$$

This equation can be evaluated for different mass parameters by merely integrating the function $\left(\frac{\Delta n(s)}{\Delta n_s}\right)_{seg}$ for different values of mass parameter and multiplying the result by the constant $1/H$. In figure 3 the integrations of the $\left(\frac{\Delta n(s)}{\Delta n_s}\right)_{seg}$ responses are given for a range of mass parameters. When the ordinates for a curve are multiplied by the slope $1/H$, the resulting response is the solution of equation (10). By superposition of a series of functions of the type given by equation (10), this approach may be extended to predict the responses to disturbances of the type shown in figure 1(c) where the disturbance is composed of straight-line segments. Figure 3 is used to evaluate this response by the following steps:

(a) Evaluate the following integrals in a manner similar to that used for equation (10), with the aid of figure 3:

$$\left.\begin{array}{c} \dfrac{1}{H_1}I(s) \\[20pt] \dfrac{1}{H_2}I(s) \\[20pt] \dfrac{1}{H_3}I(s) \\[20pt] \dfrac{1}{H_4}I(s) \end{array}\right\} \qquad (11)$$

(b) Superpose the time histories obtained from step (a) so that the disturbance function shown in figure 1(c) will be formed by the addition of the slopes $1/H_1$, $1/H_2$, $1/H_3$, and $1/H_4$. Note that in the course of this superposition, the functions corresponding to the slopes $1/H_2$, $1/H_3$, and $1/H_4$ must be displaced by the intervals H_1 for the slope $1/H_2$, $H_1 + H_2$ for the slope $1/H_3$, and $H_1 + H_2 + H_3$ for the slope $1/H_4$. The final response for the disturbance shown in figure 1(c) may then be obtained from the following equation:

$$\frac{\Delta n(s)}{\Delta n_s} = \frac{1}{H_1}I(s) - \frac{1}{H_1}I(s - H_1) - \frac{1}{H_2}I(s - H_1)$$

$$+ \frac{1}{H_2}I(s - H_1 - H_2) - \frac{1}{H_3}I(s - H_1 - H_2) + \frac{1}{H_3}I(s - H_1 - H_2 - H_3)$$

$$+ \frac{1}{H_4}I(s - H_1 - H_2 - H_3) - \frac{1}{H_4}I(s - H_1 - H_2 - H_3 - H_4) \qquad (12)$$

Although equation (12) appears very lengthy, the actual computations are relatively simple since all the integrals for a particular mass parameter have already been determined (fig. 3). The values of each integral multiplied by its appropriate constant can be tabulated in separate columns displaced by its corresponding interval. The addition of the elements in each row of these columns will determine

the final response $\dfrac{\Delta n(s)}{\Delta n_s}$.

Triangular Gust

Since the triangular gust shown in figure 1(d) was used in many calculations, a chart was prepared for this specific shape. The response to this type of disturbance for a range of mass parameters μ_g and gradient distances H was obtained by the method previously described for gust shapes approximated by straight lines. Plotting the maximum values of these responses $\left(\dfrac{\Delta n}{\Delta n_s}\right)_{max}$ as a function of H with μ_g as a parameter gives the chart shown in figure 4. As a matter of interest the values of $\left(\dfrac{\Delta n}{\Delta n_s}\right)_{max}$ are plotted as a function of μ_g with the gradient distance H as the parameter in figure 5. When the mass parameter of the airplane (equation (3)) and the gradient distance H are known, the value of $\left(\dfrac{\Delta n}{\Delta n_s}\right)_{max}$ is readily obtained directly. Evaluating Δn_s by equation (2) permits the value of Δn_{max} in a triangular gust to be determined from the acceleration ratio $\left(\dfrac{\Delta n}{\Delta n_s}\right)_{max}$
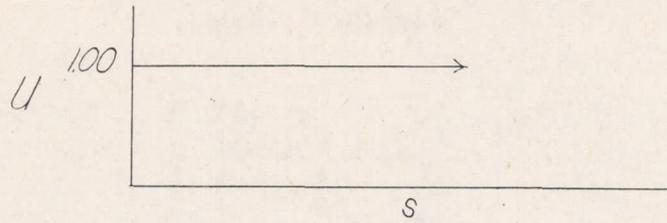
CONCLUDING REMARKS

The simplified equation of vertical motion of an airplane has been solved to obtain charts of acceleration ratio for different gust shapes.

The results permit the rapid estimation of maximum acceleration ratios
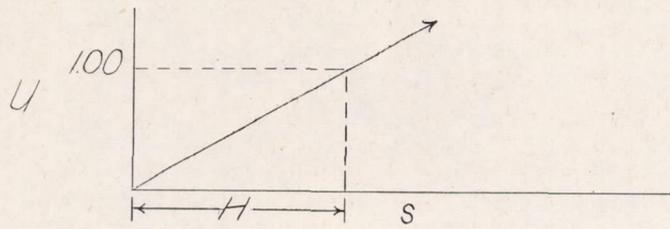for gusts of arbitrary shape.

Langley Aeronautical Laboratory
    National Advisory Committee for Aeronautics
        Langley Air Force Base, Va., August 1, 1949
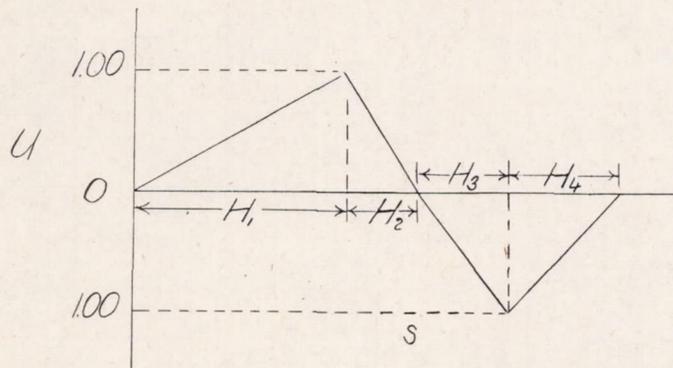

REFERENCES

1. Mazelsky, Bernard, and Diederich, Franklin W.: A Method of
      Determining the Effect of Airplane Stability on the Gust Load
      Factor. NACA TN 2035, 1950.

2. Jones, Robert T.: The Unsteady Lift of a Wing of Finite Aspect Ratio.
      NACA Rep. 681, 1940.

3. Von Kármán, Theodore, and Biot, Maurice A.: Mathematical Methods in
      Engineering. First ed., McGraw-Hill Book Co., Inc., 1940,
      pp. 403-405.

4. Mazelsky, Bernard, and Diederich, Franklin W.: Two Matrix Methods
      for Calculating Forcing Functions from Known Responses. NACA
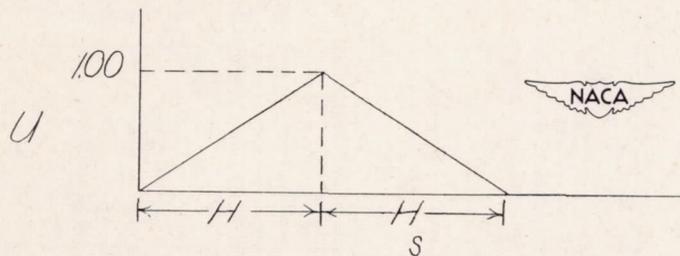   TN 1965, 1949.

(a) Sharp-edge gust.

(b) Gradient gust.

(c) Arbitrary gust shape approximated by straight lines.

(d) Triangular gust.
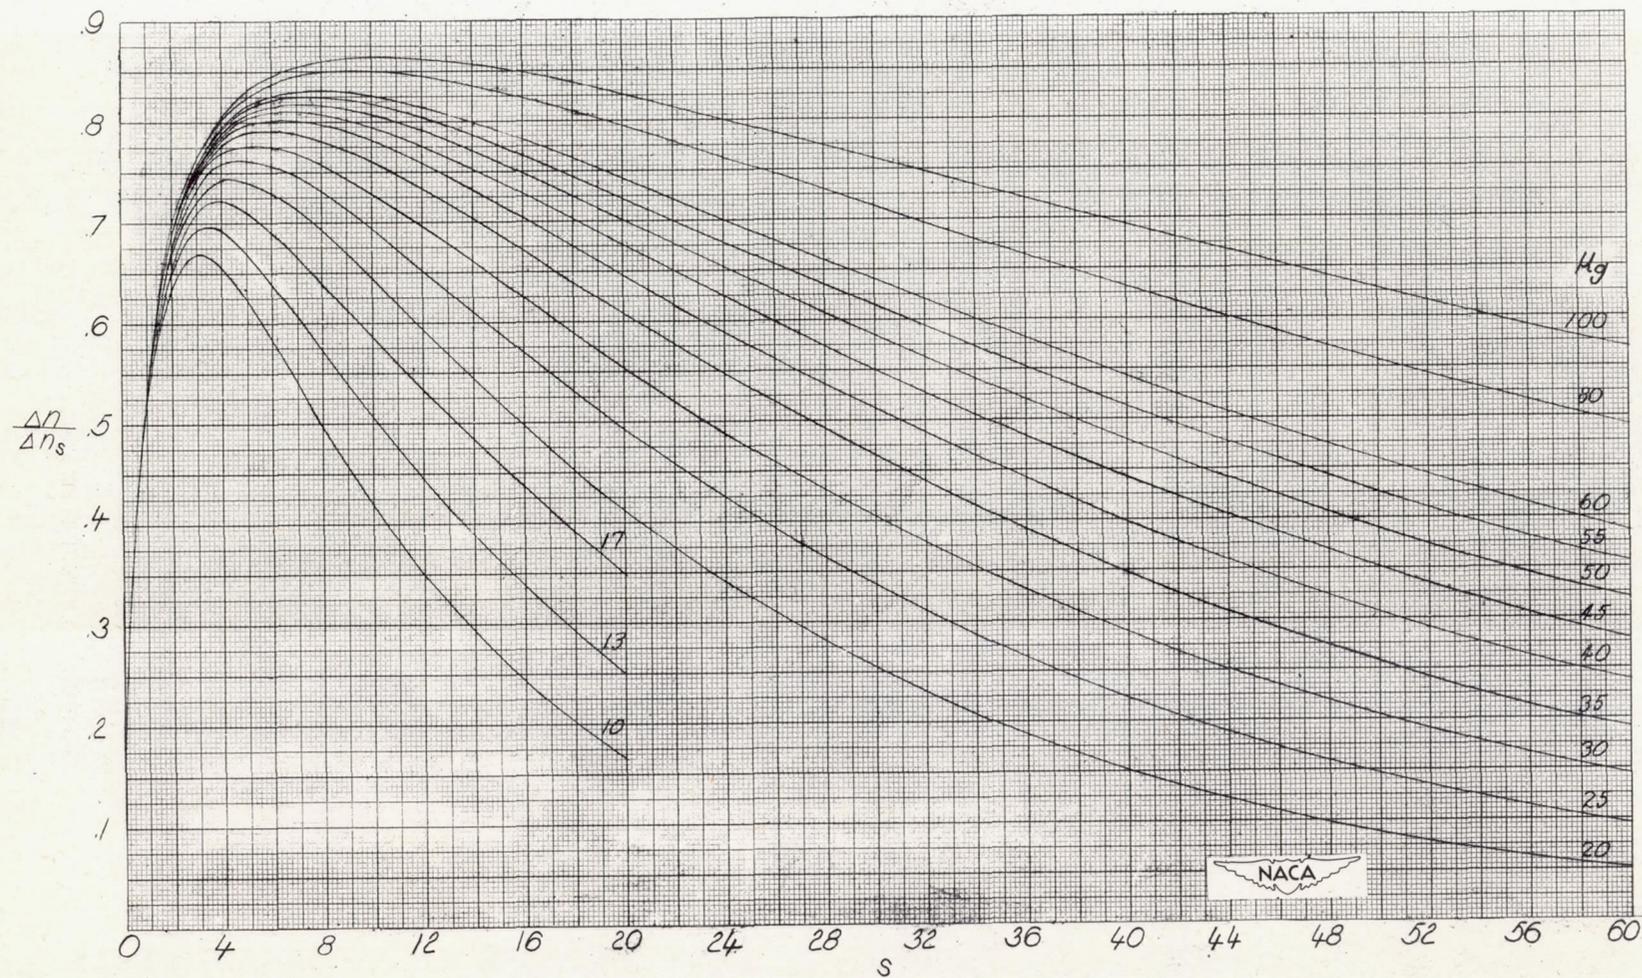
Figure 1.- Gust shapes.

Figure 2.- Acceleration ratio for a wing penetrating a sharp-edge gust for various mass parameters.
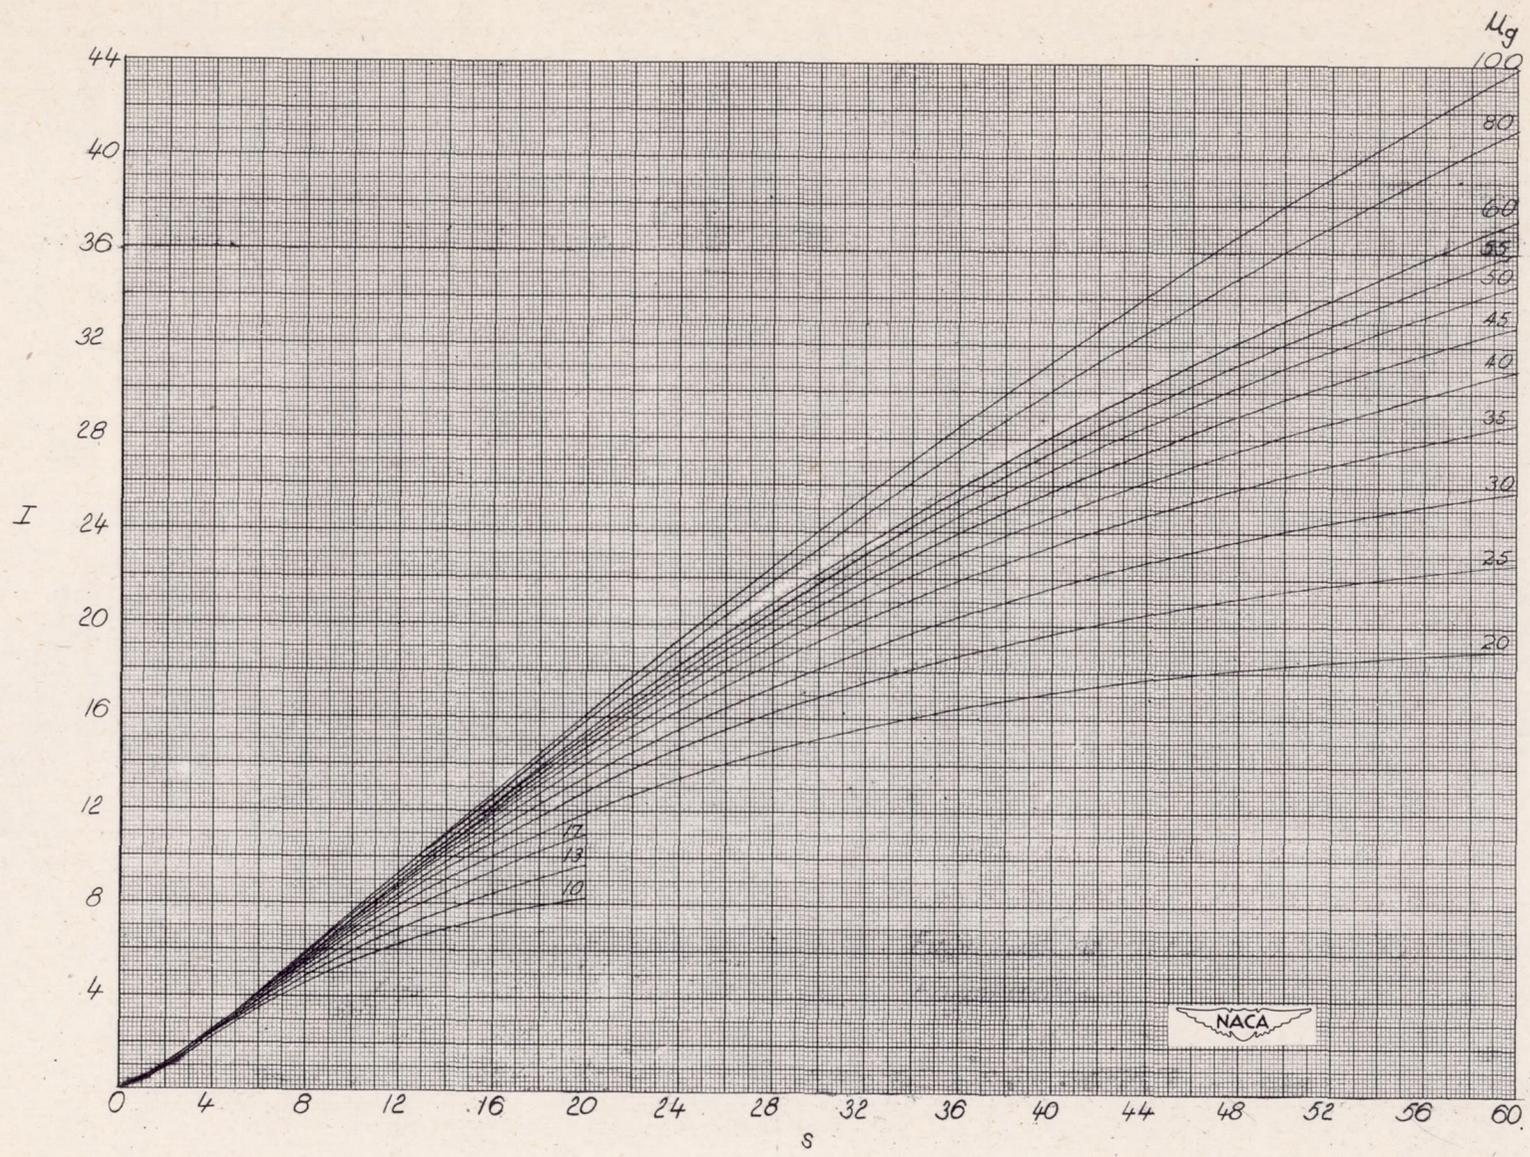
Figure 3.- Integration of acceleration ratio for a wing penetrating a sharp-edge gust for various mass parameters.
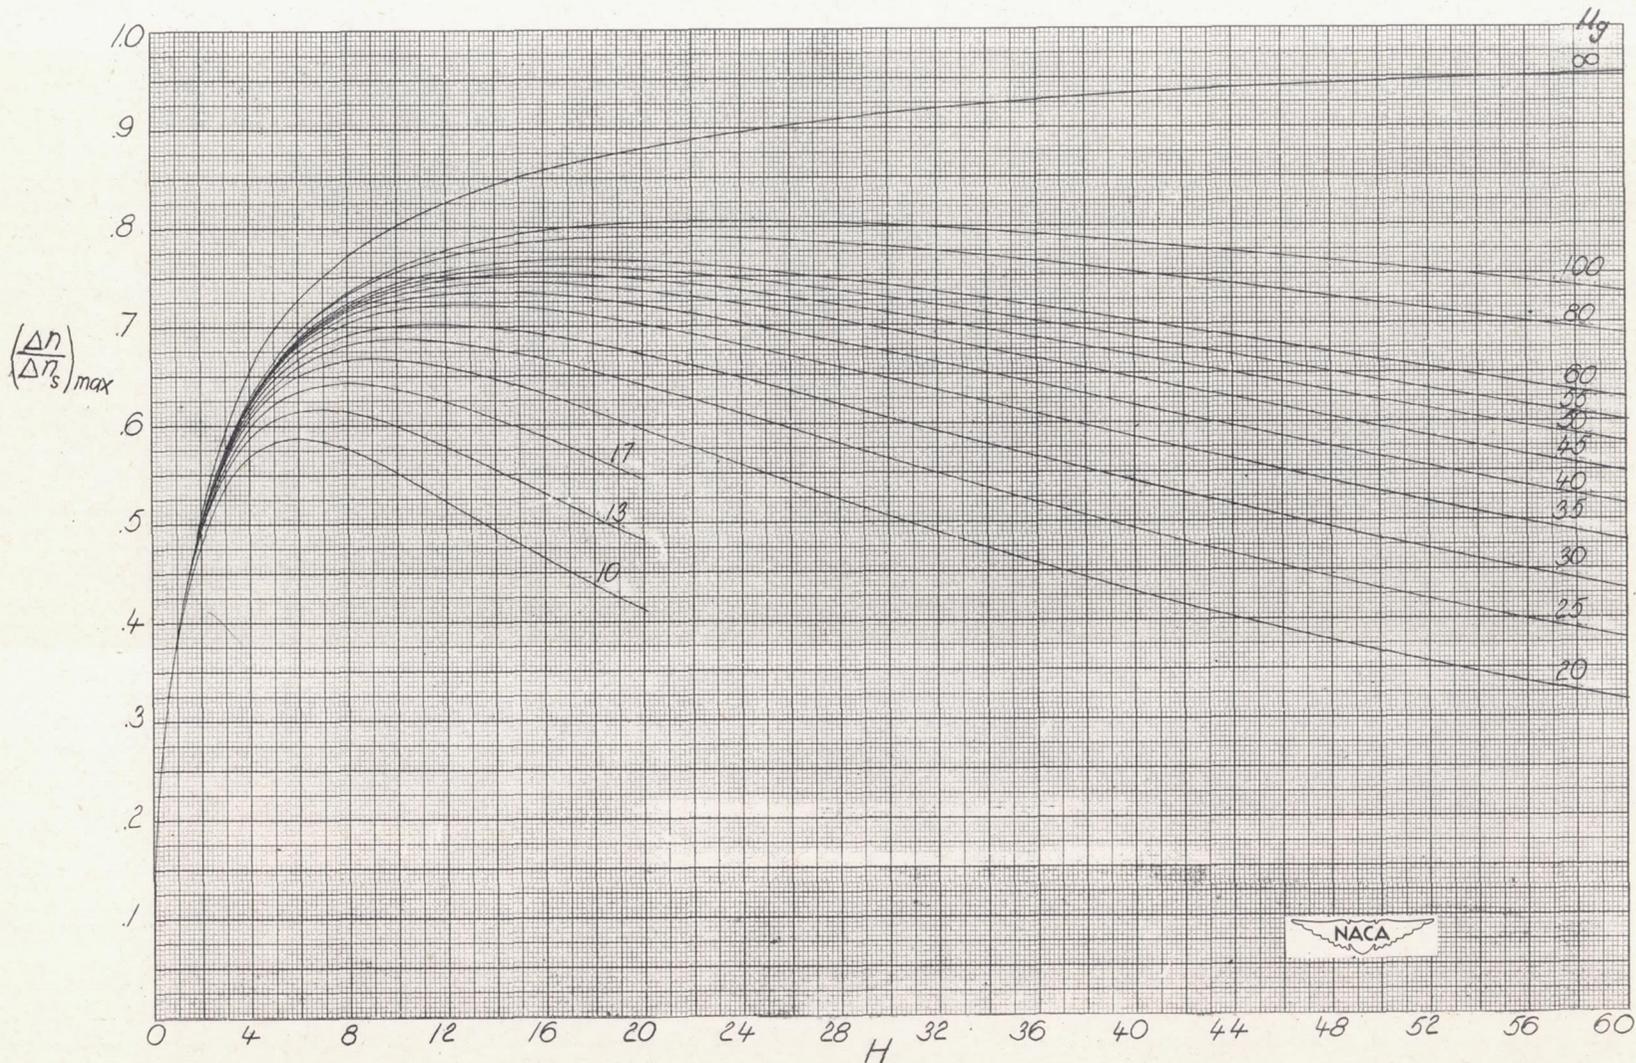
Figure 4.- Maximum acceleration ratio for a triangular gust as a function of gradient distance.
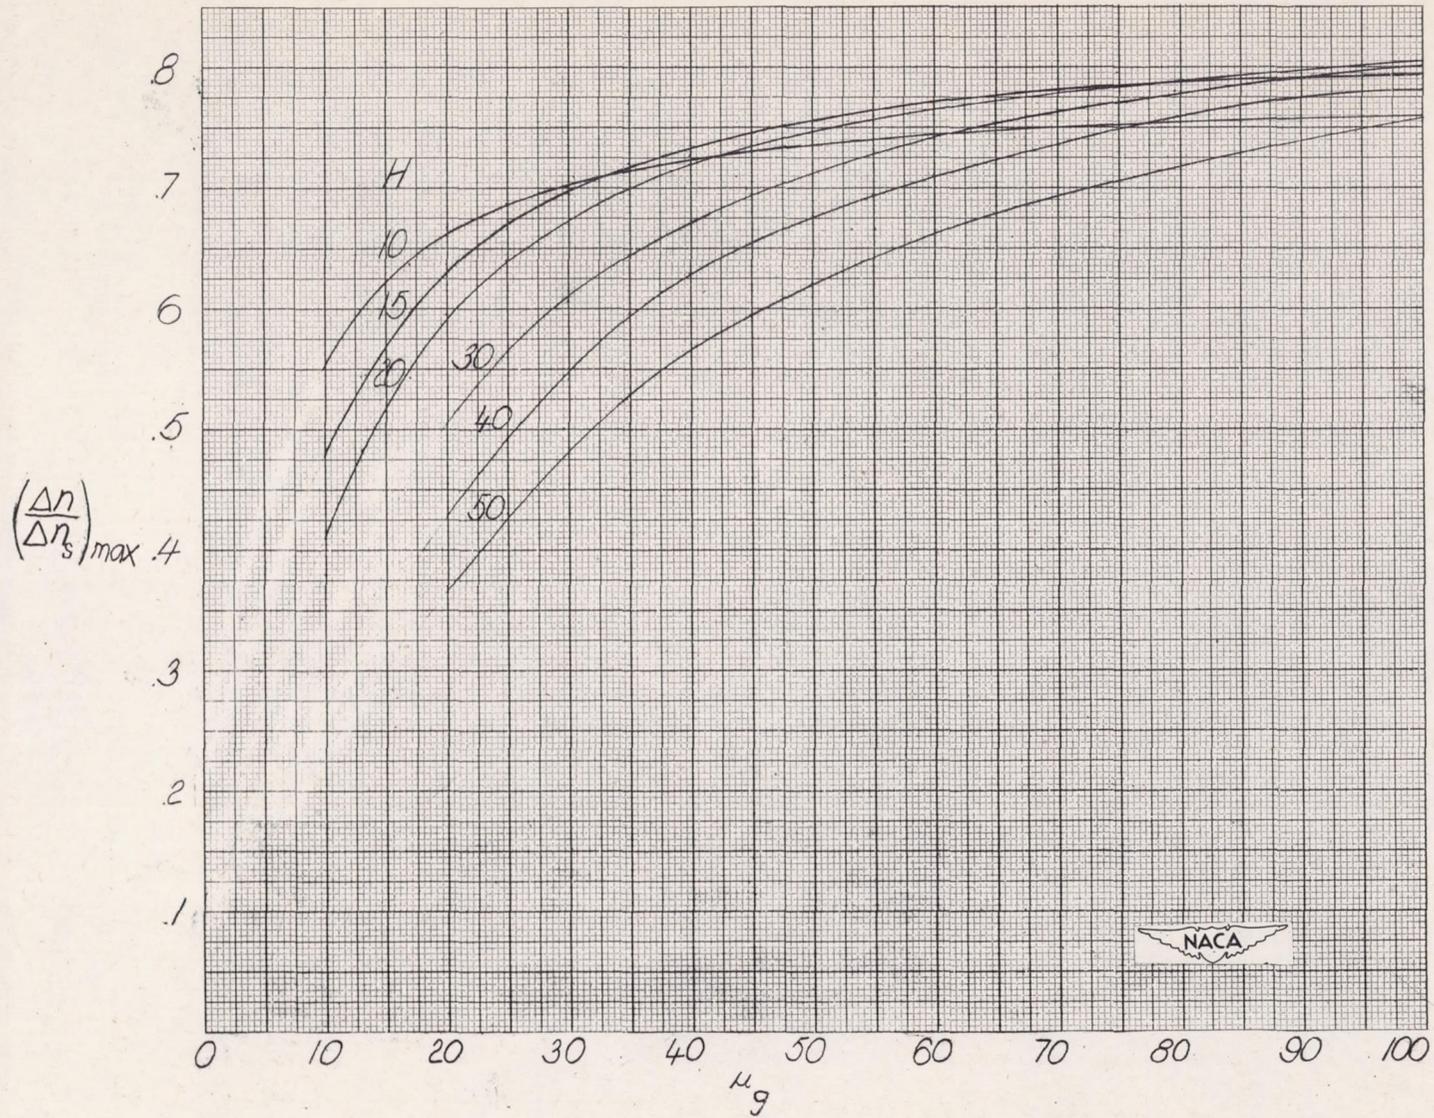
Figure 5.- Maximum acceleration ratio for a triangular gust as a function of mass parameter.